



D		C		B		A	
VER.	MARK	DCR/ECN NO.	DATE	UPDATE DESCRIPTION		SIGNATURE	
0	N/A	N/A	2019/12/03	First Release		Yong-feng Li	

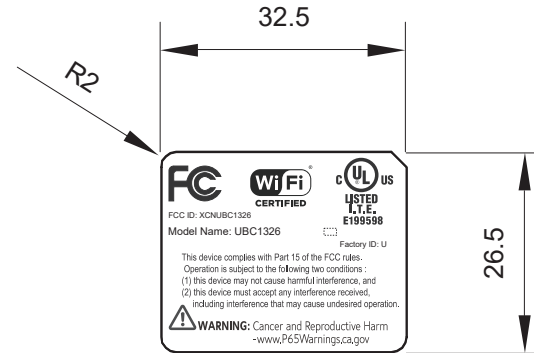

Vendor code _____

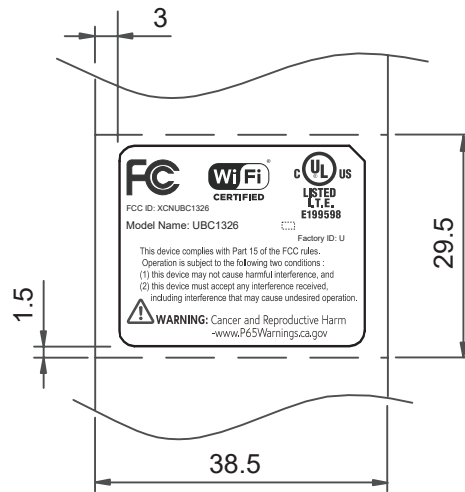

NOTES:

1. Surface Material color:white
2. Printing color is as color defined in artwork
3. Adhesive:Acrylic
4. Adhesive thickness:0.025+/-0.003mm
5. Adhesion to steel(180°磨钢粘着力):1.8+/-0.3 kg/25mm
6. Initial Tack (初期力) : 4 #/boll
7. Release Power(90°剥离力):5 g/25mm
8. Holding Power(持粘力测试法):1 hr/kg/20mm²
9. Shipment method: Roll
10. This part must comply with RoHS.
11. Test condition :
 1. Soak alcohol(99.7%) at first trial and repeat to soak every 50 times
 2. Push force:250g
 3. Speed:30 times/min
 4. Move back and forth 100 times,printing was not removed

標籤製作黏貼方式 /U10C149.00/00/2 OF 10

MATERIAL (SPEC.)										SCALE 1:1		FOXCONN HON HAI PRECISION IND. CO., LTD CNSBG			
FINISH 膠面咬花										SHEET 1/1					
Select								V		UNIT	PART NAME				
Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	LABEL	USR	mm	PTT label			
0~6	0.05	0.05	0.10						0.20	0.05	SIZE A4	MODEL	PART NO.	DESIGNED	
6~30	0.10	0.15	0.20	0.50	0.50	3.00			0.20	0.05		U10C149.00	500.02478.005	Yong-feng Li	
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.10						
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.15						
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20						
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20						
DRAFT TOLERANCE				±0.2°	CRITICAL DIM. MARK				*			CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED	
											N/A	N/A	Bailey Tan		

MATERIAL (SPEC.)										SCALE 1:1		FOXCONN HON HAI PRECISION IND. CO., LTD CNSBG			
FINISH 膠面咬花										SHEET 1/1					
Select								V		UNIT	PART NAME				
Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	LABEL	USR	mm	PTT label			
0~6	0.05	0.05	0.10						0.20	0.05	SIZE A4	MODEL	PART NO.	DESIGNED	
6~30	0.10	0.15	0.20	0.50	0.50	3.00			0.20	0.05		U10C149.00	500.02478.005	Yong-feng Li	
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.10						
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.15						
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20						
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20						
DRAFT TOLERANCE				±0.2°	CRITICAL DIM. MARK				*			CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED	
											N/A	N/A	Bailey Tan		