

| <b>TEST REPORT</b><br><b>47 CFR FCC Part 15 subpart C Par. 15.225</b><br><b>Intentional Radiators</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                      |                                                                            |                           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------|---------------------------|
| <b>Applicant:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | A.R. Hungary, Inc. Alkotas utca 41. Budapest 1123, HUNGARY                           |                                                                            |                           |
| <b>Test item:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Passport Reader and ID scanner                                                       |                                                                            |                           |
| <b>Identification / Type No.:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Osmond N                                                                             |                                                                            |                           |
| <b>FCC ID:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | XCW-OSMOND-R                                                                         |                                                                            |                           |
| <b>Order content:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Full testing according to the following standard(s):                                 |                                                                            |                           |
| <b>Test specification:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | FCC Part 15, Subpart C (par. 15.225)                                                 |                                                                            |                           |
| <b>Date of receipt:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 05/05/2022                                                                           | <i>Photos were removed for confidentiality as demanded by the customer</i> |                           |
| <b>Internal storage No.:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | A003255761-008                                                                       |                                                                            |                           |
| <b>Testing period:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 27/02/2023 & 09/06/2023                                                              |                                                                            |                           |
| <b>Place of testing:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | TÜV Rheinland Italia S.r.l.<br>Via E. Mattei, 3<br>20005 Pogliano Milanese (MI) - IT |                                                                            |                           |
| <b>Testing laboratory:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | TÜV Rheinland Italia S.r.l.<br>Via E. Mattei,3<br>20005 Pogliano Milanese (MI) - IT  |                                                                            |                           |
| <b>Test result:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Pass                                                                                 |                                                                            |                           |
| <b>Tested by:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Roberto Radice                                                                       | <b>Authorized by:</b>                                                      | Luca Colombo              |
| <b>Date:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 19/01/2024                                                                           | <b>Date:</b>                                                               | 19/01/2024                |
| <b>Position</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Sachverständige(r)/Expert                                                            | <b>Position</b>                                                            | Sachverständige(r)/Expert |
| <b>Condition of the test item at delivery:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                      | Test item complete and undamaged                                           |                           |
| <p>The test results reported in this test report shall refer only to the samples tested as received.<br/> TÜV Rheinland Italia is not responsible for the sampling phase.<br/> This report may not be partially reproduced, except with the prior written permission of the issuing Laboratory<br/> TÜV Rheinland refuses any responsibility about information supplied by the customer contained in this test report<br/> (#) Test sample(s), as well sample information, description, product details and intended usage was provided by customer.</p> |                                                                                      |                                                                            |                           |

## Product description

|   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | <p>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.</p> <p>Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</p>                                         |
| 2 | <p>As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</p> |
| 3 | <p>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</p> <p>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</p>                                                                                                                                                                                                                                                                    |
| 4 | <p>Unless otherwise agreed with the customer, a conformity assessment is always carried out based on the applied standards.</p> <p>At the customer's request, the statement on the conformity of the product tested in this test report is carried out according to the criteria/requirements of the applied standards.</p> <p>Evaluation conditions deviating from these are documented separately in the respective chapters.</p>                                                                                                          |

## Product description

### 0. Table of Contents

|     |                                                       |    |
|-----|-------------------------------------------------------|----|
| 0.  | Table of Contents .....                               | 3  |
| 1.  | General description of test item(s) .....             | 4  |
| 2.  | Test method .....                                     | 5  |
| 3.  | Reference standards .....                             | 9  |
| 4.  | Equipment used during test .....                      | 10 |
| 5.  | Input/Output ports .....                              | 11 |
| 6.  | Radio type identification .....                       | 12 |
| 7.  | Operating modes .....                                 | 13 |
| 8.  | Climatic conditions .....                             | 13 |
| 9.  | Modification during tests .....                       | 14 |
| 10. | Statement of the measurement uncertainty .....        | 15 |
| 11. | Example for interpretation of measuring results ..... | 15 |
| 12. | Measurement uncertainty .....                         | 16 |
| 13. | EUT configuration .....                               | 17 |
| 14. | Change history .....                                  | 18 |
| 15. | Result summary section .....                          | 19 |
| 16. | Emission Test .....                                   | 20 |
| 17. | List of test equipment .....                          | 49 |

## Product description

### 1. General description of test item(s)

|                            |                                                                                                                                                          |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Identification / Type No.: | Passport Reader and ID scanner Osmond N                                                                                                                  |
| Serial number              | 1215319                                                                                                                                                  |
| Manufacturer               | A.R. Hungary, Inc.<br>Alkotas utca 41. Budapest 1123, HUNGARY                                                                                            |
| Trade Mark                 |                                                                         |
| Rated voltage / frequency  | 100-240 V AC, 50/60 Hz via universal external power supply                                                                                               |
| Rated current / power      | Input Max 1.5 A                                                                                                                                          |
| Equipment type             | Intentional radiator installed in a host equipment                                                                                                       |
| Number of phases           | 1ph.                                                                                                                                                     |
| Hardware version (#)       | ASM-1054.19                                                                                                                                              |
| Software version (#)       | PR 2.1.10.3                                                                                                                                              |
| Dimensions                 | 178 × 203 × 157 mm                                                                                                                                       |
| Weight                     | 2.25 kg                                                                                                                                                  |
| Temperature Range          | 5 °C to 40 °C                                                                                                                                            |
| Test sample obtaining:     | <input checked="" type="checkbox"/> Sampling by customer<br><input type="checkbox"/> Sampling by TÜV Rheinland Group<br><input type="checkbox"/> others: |

**2. Test method****§15.225 Operation within the band 13.110 – 14.010 MHz**

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

(e) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

(f) In the case of radio frequency powered tags designed to operate with a device authorized under this section, the tag may be approved with the device or be considered as a separate device subject to its own authorization. Powered tags approved with a device under a single application shall be labeled with the same identification number as the device

### §15.207 Conducted limits.

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency of Emission (MHz) | Conducted Limit (dB $\mu$ V) |            |
|-----------------------------|------------------------------|------------|
|                             | Quasi-peak                   | Average    |
| 0.15-0.5                    | 66 to 56 *                   | 56 to 46 * |
| 0.5-5                       | 56                           | 46         |
| 5-30                        | 60                           | 50         |

\* Decreases with the logarithm of the frequency.

(b) The shown limit in paragraph (a) of this Section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current systems containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in Section 15.205 and Section 15.209, 15.221, 15.223, 15.225 or 15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operating while charging, AC adaptors or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

### §15.209 Radiated emission limits, general requirements.

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| <i>Frequency (MHz)</i> | <i>Field strength (microvolts/meter)</i> | <i>Measurement Distance (meter)</i> |
|------------------------|------------------------------------------|-------------------------------------|
| 0.009 - 0.490          | 2400/F(kHz)                              | 300                                 |
| 0.490 - 1.705          | 24000/F(kHz)                             | 30                                  |
| 1.705 - 30.0           | 30                                       | 30                                  |
| 30-88                  | 100**                                    | 3                                   |
| 88-216                 | 150**                                    | 3                                   |
| 216-960                | 200**                                    | 3                                   |
| Above 960              | 500                                      | 3                                   |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(b) In the emission table above, the tighter limit applies at the band edges.

(c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other Sections within this Part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.

(d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

(e) The provisions in Sections 15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this Part.

(f) In accordance with Section 15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in Section 15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in Section 15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in Section 15.109 that are applicable to the incorporated digital device.

(g) Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.

**§ 15.33 Frequency range of radiated measurements.**

(a) Unless otherwise noted in the specific rule section under which the equipment operates for an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

(3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

### 3. Reference standards

| Reference document                  |                         |                                                                                                                                      |
|-------------------------------------|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| 47 CFR Part 15                      | Last edition            | Radio Frequency Device                                                                                                               |
| ANSI C63.4                          | 2014                    | Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| ANSI C63.10                         | 2020                    | American National Standard for Testing Unlicensed Wireless Devices                                                                   |
| 996369 D04 Module Integration Guide | v02<br>October 13, 2020 | Modular transmitter integration guide; guidance for host product manufacturers.                                                      |

Note: The following referenced documents are indispensable for the application of this document.

For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

**4. Equipment used during test**

## Equipment under test

| No. | Product type                   | Manufacturer       | Model    | Comments |
|-----|--------------------------------|--------------------|----------|----------|
| 1   | Passport Reader and ID scanner | A.R. Hungary, Inc. | Osmond N | —        |
| 2   | —                              | —                  | —        | —        |

## Auxiliary Equipment / Peripherals

| No. | Product type      | Manufacturer | Model | Comments                                   |
|-----|-------------------|--------------|-------|--------------------------------------------|
| 1   | Personal computer | Lenovo       | —     | Ethernet traffic with equipment under test |
| 2   | —                 | —            | —     | —                                          |
| 3   | —                 | —            | —     | —                                          |

## 5. Input/Output ports

| Nr. | Name                | Type               | Cable length | Cable shielded | Comments                                                                                        |
|-----|---------------------|--------------------|--------------|----------------|-------------------------------------------------------------------------------------------------|
| 1   | Enclosure port      | Conductive surface | —            | —              | Closed by screws                                                                                |
| 2   | AC power port       | Mains Input        | <3m.         | No             | Via switching adapter JG mod. ZZU1588-400050-3T input 100-240V 50-60Hz output + 5v dc 4.0Ampere |
| 3   | DC power port       | Port not present   |              |                |                                                                                                 |
| 4   | Signal/control port | USB Port           | <3m.         | Yes            | —                                                                                               |
| 5   | Wired Network port  | Lan Port           | >3m.         | No             | —                                                                                               |

| 6. Radio type identification                         |                                                                                                                                                            |
|------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Brand name and model of radio module                 | highly integrated NFC Initiator / HF Reader IC, AMS mod. AS3911-BQFT                                                                                       |
| Antenna model and Gain                               | LC antenna                                                                                                                                                 |
| Antenna type                                         | <input type="checkbox"/> External antenna<br><input type="checkbox"/> Dedicated antenna<br><input checked="" type="checkbox"/> Integral antenna            |
| Type of equipment                                    | <input type="checkbox"/> stand-alone equipment<br><input checked="" type="checkbox"/> combined equipment<br><input type="checkbox"/> multi-radio equipment |
| Type of modulation                                   | OOK                                                                                                                                                        |
| Nominal voltage of stand-alone or combined equipment | voltage range from 2.4 Vdc to 5.5 Vdc                                                                                                                      |
| Operating frequency                                  | 13.56MHz                                                                                                                                                   |
| Number of channels                                   | 1                                                                                                                                                          |
| Transmit operating mode                              | <input checked="" type="checkbox"/> single antenna<br><input type="checkbox"/> multiple antennas                                                           |
| Temperature range                                    | -40°C to 125°C                                                                                                                                             |

## 7. Operating modes

### No. Description

- |          |                                                                                                                               |
|----------|-------------------------------------------------------------------------------------------------------------------------------|
| <b>1</b> | Continuous scanning mode with test passport; ethernet cable connected to PC (auxiliary equipment) in continuous traffic mode. |
|----------|-------------------------------------------------------------------------------------------------------------------------------|

## 8. Climatic conditions

|                            |               |
|----------------------------|---------------|
| <b>Ambient Temperature</b> | 10 - 40 °C    |
| <b>Relative Humidity</b>   | 10 - 90 %     |
| <b>Air pressure</b>        | Not specified |

According to ANSI C63.4

|                                                                                     |                                                                                              |                                        |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|----------------------------------------|
| <b>Ambient Temperature Humidity Sensor</b><br>(used to control climatic conditions) | Type: 6152C (ID: 2782344; manufacturer: Davis Instruments)<br>• Semi-Anechoic Chamber FACT 3 | <b>Calibration due date</b><br>06/2024 |
|                                                                                     | Type: T3511 (ID: 2782075; manufacturer: Comet system)<br>• Semi-Anechoic Chamber SAC 5       | <b>Calibration due date</b><br>06/2024 |
|                                                                                     | Type: T3511 (ID: 2782070; manufacturer: Comet system)<br>• Transitory phenomena area         | <b>Calibration due date</b><br>06/2024 |
|                                                                                     | Type: T3511 (ID: 2781962; manufacturer: Comet system)<br>• ESD room                          | <b>Calibration due date</b><br>06/2024 |
| <b>Barometer</b><br>(used to control climatic conditions)                           | Type P3267S07801 + E1999X<br>(ID: 2782560; manufacturer: Tecsisi)                            | <b>Calibration due date</b><br>03/2025 |

**9. Modification during tests**

- ☒ No modifications done during testing
- ☐ Modifications done during testing (see details below)

| No. | Description of modification | Date of modification |
|-----|-----------------------------|----------------------|
| 1   |                             |                      |
| 2   |                             |                      |
| 3   |                             |                      |

Supplementary information: --


## 10. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the quality system acc. to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

The manufacturer has the sole responsibility of continued compliance of the device.

## 11. Example for interpretation of measuring results

The decision rule for statements of conformity in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance to and ILAC-G8:09/2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report."

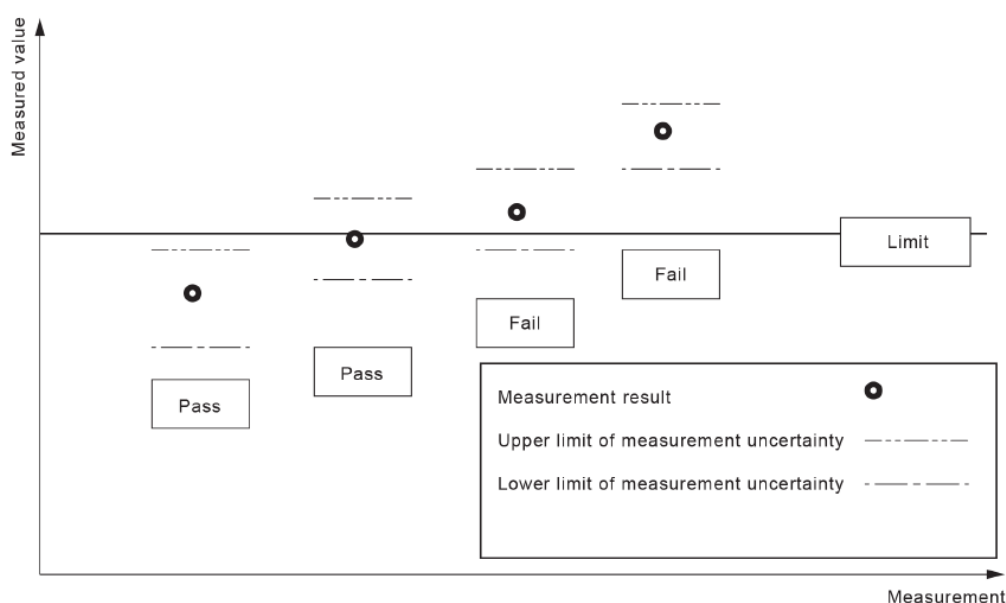

### Decision Rule

Statements of conformity (PASS or FAIL) to specifications are made in this report without taking measurement uncertainty into account.

Where statements of conformity are made in this report, the following decision rules are applied:

|                                                      |            |                  |
|------------------------------------------------------|------------|------------------|
| Test result complies with test specification.        | <b>P</b>   | = passed         |
| Test result does not comply with test specification. | <b>F</b>   | = failed         |
| Requirement not applicable                           | <b>N/A</b> | = not applicable |
| Requirement not tested                               | <b>N/T</b> | = not tested     |

**12. Measurement uncertainty**

| Test Method                                                | Uncertainty (95%)      | Coverage factor k |
|------------------------------------------------------------|------------------------|-------------------|
| RF Conducted continuous emissions - range (9 kHz – 30 MHz) | 3.3 dB                 | 2.0               |
| RF Radiated emissions – range (30 – 1000) MHz              | 4.9 dB                 | 2.0               |
| Occupied Bandwidth                                         | $514.4 \times 10^{-9}$ | 2.0               |
| Measurement of Normalised Site Attenuation and VSWR        | 6.0 dB                 | 2.0               |

**13. EUT configuration**

The test setup was made in accordance with mentioned FF standards.

Measurements and tests were executed under "worst case" conditions. Typical EUT arrangements or operating modes were chosen or assumed which let suspect maximum emission or susceptibility (a so called "unfavourable configuration").

Details of test setup or adjustments are (particularly) shown inside the photo documentation.  
As far as not mentioned otherwise these statements are valid for all following tests.

**REVISION HISTORY****14. Change history**

| Test report number | List of revisions | Date       |
|--------------------|-------------------|------------|
| IT23SWZZ 001       | First edition     | 19/01/2024 |

## ADDITIONAL DOCUMENTATION

### 15. Result summary section

| Clause                           | Requirement – Test case                                            | Result                 |
|----------------------------------|--------------------------------------------------------------------|------------------------|
| § 15.203                         | Antenna Requirements                                               | <b>P</b>               |
| § 15.207 (a)                     | Conducted emission test                                            | <b>P</b>               |
| § 15.215 (a) (b) (c)             | Additional provisions to the general radiated emission limitations | <b>P</b>               |
| § 15.215 (c)                     | 20 dB Bandwidth                                                    | <b>P</b>               |
| § 15.225 (a)                     | Field strength in band 13,553-13,567MHz                            | <b>P</b>               |
| § 15.225 (b)                     | Field strength in band 13,410-13,553 MHz and 13,567-13,710 MHz     | <b>P</b>               |
| § 15.225 (c)                     | Field strength in band 13,110-13,410 MHz and 13,710-14,010 MHz     | <b>P</b>               |
| § 15.225 (d)<br>§ 15.209 (a) (f) | Field strength outside of the 13,110-14,010 MHz band               | <b>P</b>               |
| § 15.225 (e)                     | Frequency tolerance of the carrier signal                          | <b>P</b>               |
| § 15.225 (f)                     | Radio frequency powered tags                                       | <b>N/A<sup>1</sup></b> |

N.A.<sup>1</sup>: No powered tag.

**ADDITIONAL DOCUMENTATION****16. Emission Test**

| Antenna requirement  |                |
|----------------------|----------------|
| Test date            | 27/02/2023     |
| Applied Standard     | FCC part 15 C  |
| Paragraph            | §15.203        |
| Temperature          | 21.5° C        |
| Humidity             | 46%            |
| Tested by            | Roberto Radice |
| Model                | Osmond N       |
| Internal Storage No. | A003255761-009 |
| Remarks              | None           |

**ADDITIONAL DOCUMENTATION**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

**Antenna specifications**

|                                |                   |
|--------------------------------|-------------------|
| N° of authorized antenna types | 1                 |
| Antenna type                   | LC antenna on PCB |
| Maximum total gain             | < 6dBi            |
| External power amplifiers      | Not present       |

**ADDITIONAL DOCUMENTATION**

| Conducted emission test                |                                                                                      |
|----------------------------------------|--------------------------------------------------------------------------------------|
| Test date                              | 27/02/2023 & 09/06/2023                                                              |
| Applied Standard                       | FCC part 15 C                                                                        |
| Paragraph                              | §15.207                                                                              |
| Test method                            | § 7 of ANSI C63-4                                                                    |
| Temperature                            | 21.5° C                                                                              |
| Humidity                               | 46%                                                                                  |
| Voltage/Frequency used during the test | 110Vac / 60Hz                                                                        |
| Tested by                              | Roberto Radice                                                                       |
| Model                                  | Osmond N                                                                             |
| Internal Storage No.                   | A003255761-008                                                                       |
| Operating mode                         | 1                                                                                    |
| Tested terminals                       | AC Mains input                                                                       |
| Remarks                                | Equipment tested before with normal antenna and after closed on 50ohm resistor load. |

## ADDITIONAL DOCUMENTATION

### Test parameter of

### EMI Auto Test Template: Voltage with 2-Line-LISN R&S ENV216 150kHz-30MHz

Hardware Setup: Voltage with 2-Line-LISN R&S ENV216 150kHz-30MHz  
Measurement Type: 2 Line LISN  
Frequency Range: 150 kHz - 30 MHz  
Graphics Level Range: 0 dBμV - 80 dBμV

Preview Measurements:  
LISN Lines: N & L  
Scan Test Template: Voltage with 2-Line-LISN R&S ENV216 150kHz-30MHz

| Subrange                               | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|----------------------------------------|-----------|-----------|-------|------------|--------|
| Receiver: [ESW 44]<br>150 kHz - 30 MHz | 2.25 kHz  | PK+ ; AVG | 9 kHz | 0,2 s      | 0 dB   |

Final Measurements:  
Template for Single Meas.: Voltage with 2-Line-LISN R&S ENV216 150kHz-30MHz fin

| Subrange                               | Step Size | Detectors | IF BW | Meas. Time | Preamp |
|----------------------------------------|-----------|-----------|-------|------------|--------|
| Receiver: [ESW 44]<br>150 kHz - 30 MHz | 2.25 kHz  | QPK ; AVG | 9 kHz | 5 s        | 0 dB   |


## ADDITIONAL DOCUMENTATION

### Graphical presentation of

### Phase Line

Equipment tested with normal antenna; TAG present

Full Spectrum

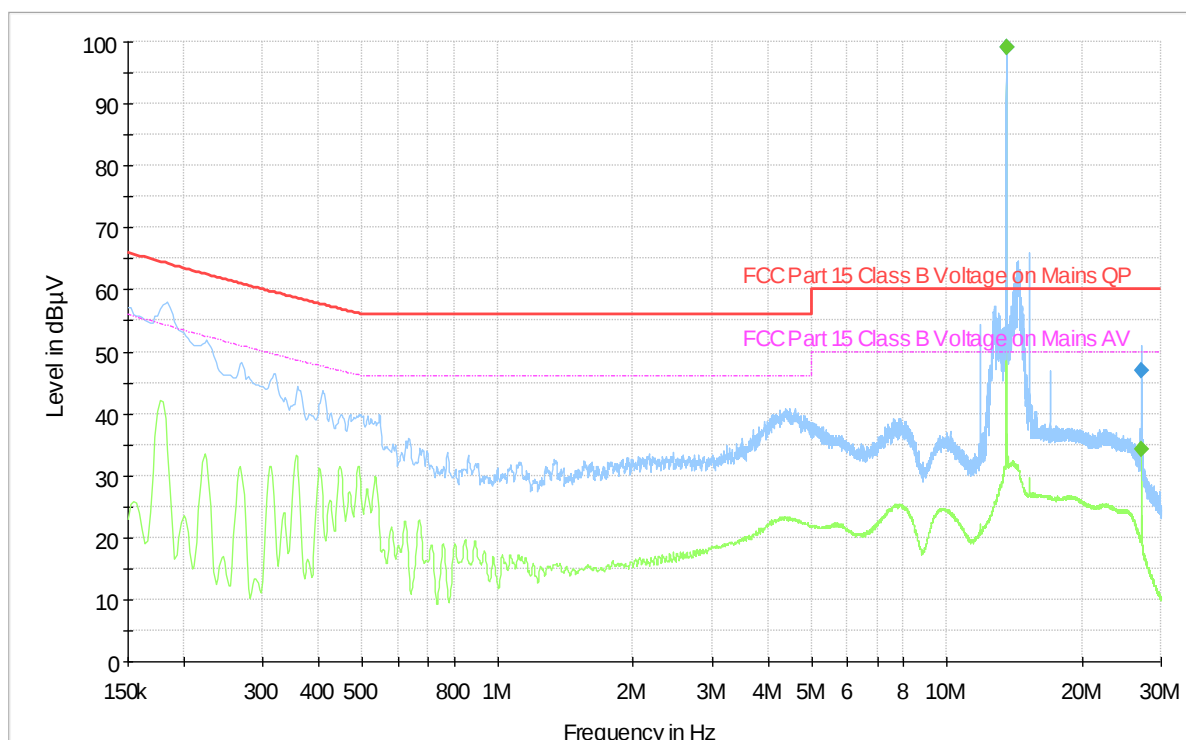

### Measurement data of

### Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 13.562250       | ---              | 98.98          | 50.00        | -48.98      | 5000.0          | 9.000           | N    | 10.2       |
| 13.562250       | 99.19            | ---            | 60.00        | -39.19      | 5000.0          | 9.000           | N    | 10.2       |
| 27.123000       | ---              | 34.16          | 50.00        | 15.84       | 5000.0          | 9.000           | N    | 10.5       |
| 27.123000       | 46.91            | ---            | 60.00        | 13.09       | 5000.0          | 9.000           | N    | 10.5       |

Remarks:

Margin value = Measurement value – Limit value


## ADDITIONAL DOCUMENTATION

### Graphical presentation of

**Neutral Line**

Equipment tested with normal antenna; TAG present

Full Spectrum

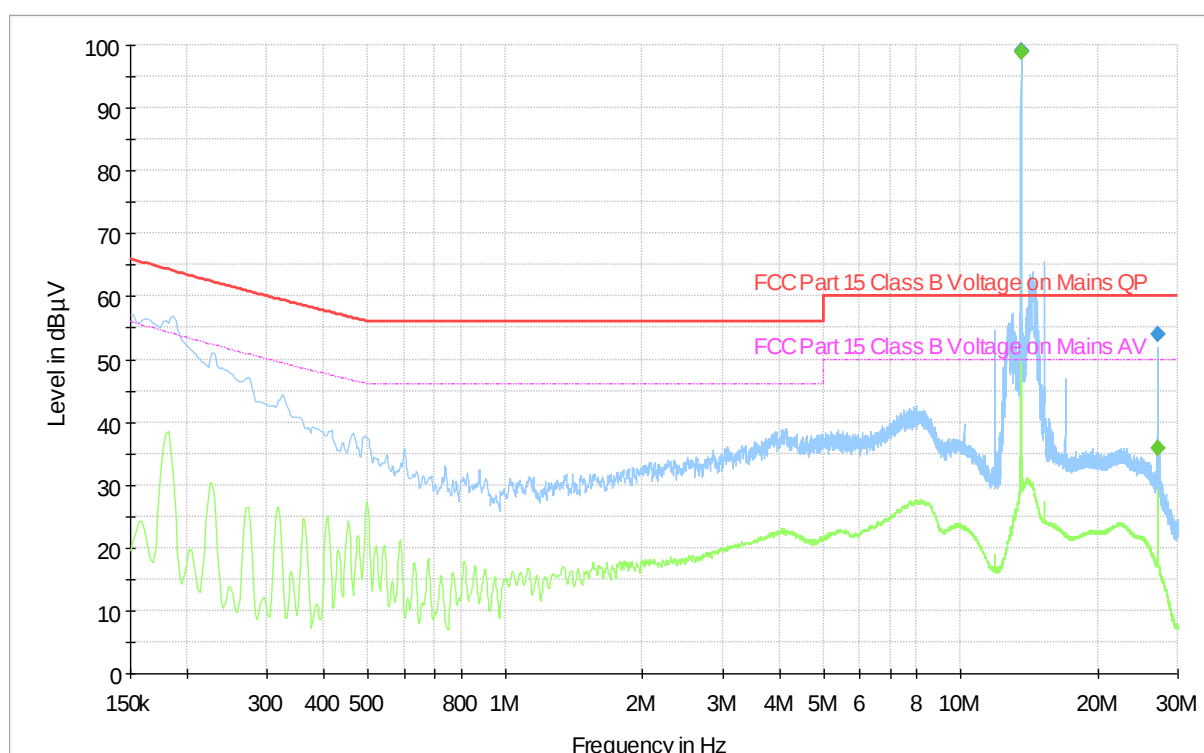

### Measurement data of

### Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 13.562250       | ---              | 98.83          | 50.00        | -48.83      | 5000.0          | 9.000           | L1   | 10.1       |
| 13.562250       | 99.02            | ---            | 60.00        | -39.02      | 5000.0          | 9.000           | L1   | 10.1       |
| 27.123000       | ---              | 35.74          | 50.00        | 14.26       | 5000.0          | 9.000           | L1   | 10.3       |
| 27.123000       | 53.86            | ---            | 60.00        | 6.14        | 5000.0          | 9.000           | L1   | 10.3       |

Remarks:


Margin value = Measurement value – Limit value

## ADDITIONAL DOCUMENTATION

**Graphical presentation of**
**Phase Line**

Equipment tested with normal antenna; TAG not present

Full Spectrum

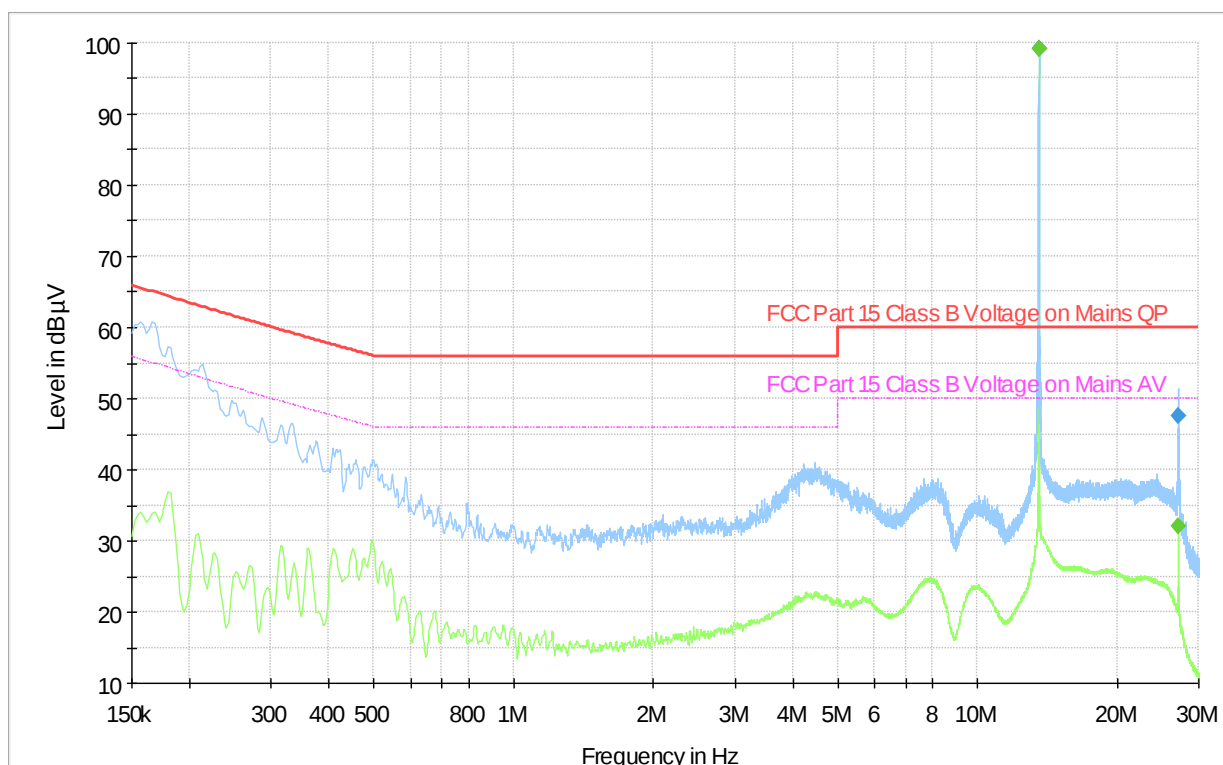
**Measurement data of**
**Final Result**

| Frequency (MHz) | QuasiPeak (dBµV) | Average (dBµV) | Limit (dBµV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 13.562250       | ---              | 99.09          | 50.00        | -49.09      | 5000.0          | 9.000           | L1   | 10.1       |
| 13.562250       | 99.27            | ---            | 60.00        | -39.27      | 5000.0          | 9.000           | L1   | 10.1       |
| 27.123000       | ---              | 32.03          | 50.00        | 17.97       | 5000.0          | 9.000           | L1   | 10.3       |
| 27.123000       | 47.49            | ---            | 60.00        | 12.51       | 5000.0          | 9.000           | L1   | 10.3       |

Remarks:


Margin value = Measurement value – Limit value

## ADDITIONAL DOCUMENTATION

**Graphical presentation of**
**Neutral Line**

Equipment tested with normal antenna; TAG not present

Full Spectrum

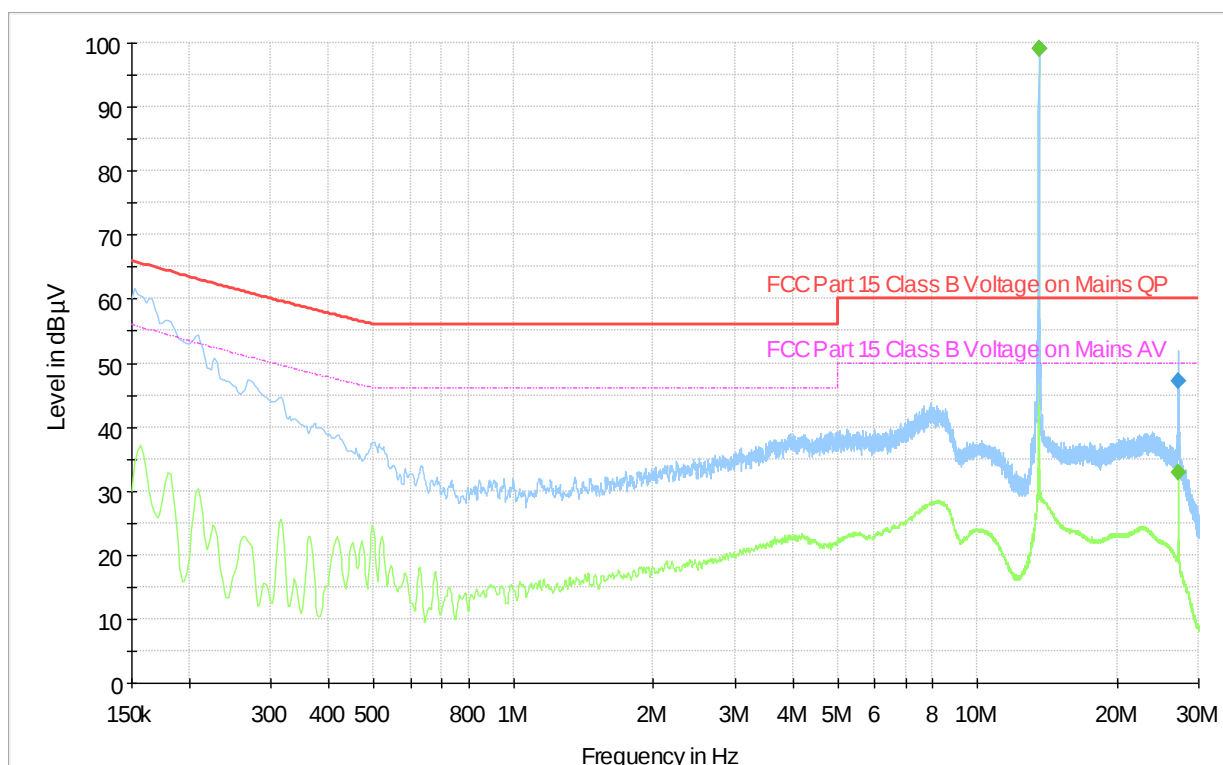
**Measurement data of**
**Final Result**

| Frequency (MHz) | QuasiPeak (dBµV) | Average (dBµV) | Limit (dBµV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 13.562250       | ---              | 99.04          | 50.00        | -49.04      | 5000.0          | 9.000           | N    | 10.2       |
| 13.562250       | 99.20            | ---            | 60.00        | -39.20      | 5000.0          | 9.000           | N    | 10.2       |
| 27.123000       | ---              | 32.81          | 50.00        | 17.19       | 5000.0          | 9.000           | N    | 10.5       |
| 27.123000       | 47.22            | ---            | 60.00        | 12.78       | 5000.0          | 9.000           | N    | 10.5       |

Remarks:

Margin value = Measurement value – Limit value


## ADDITIONAL DOCUMENTATION

### Graphical presentation of

### Phase Line

Equipment tested with antenna circuit closed on 50ohm load.

Full Spectrum

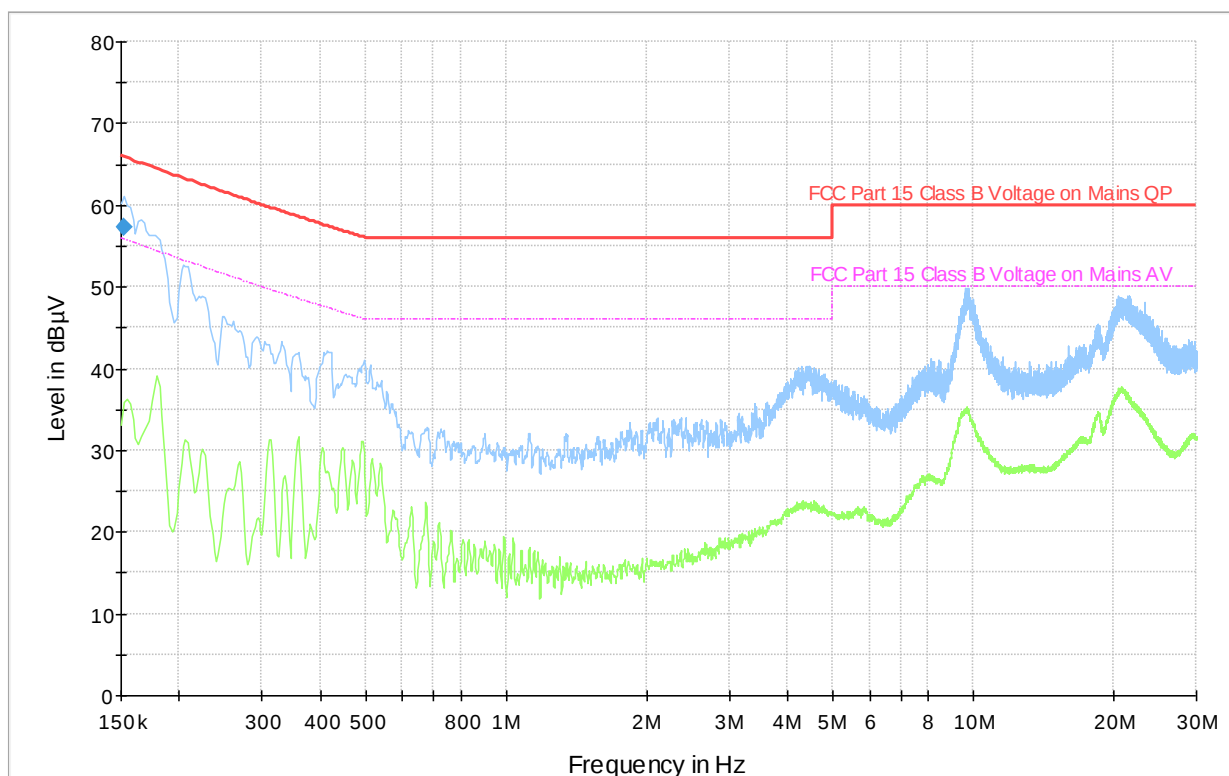

— Preview Result 2-AVG      — Preview Result 1-PK+  
— FCC Part 15 Class B Voltage on Mains QP      — FCC Part 15 Class B Voltage on Mains AV  
◆ Final\_Result QPK      ◆ Final\_Result AVG

### Measurement data of

### Final\_Result

| Frequency (MHz) | QuasiPeak (dBµV) | Average (dBµV) | Limit (dBµV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.152250        | 57.37            | ---            | 65.87        | 8.49        | 1000.0          | 9.000           | L1   | 9.8        |

Remarks:

Margin value = Measurement value – Limit value


## ADDITIONAL DOCUMENTATION

### Graphical presentation of

### Neutral Line

Equipment tested with antenna circuit closed on 50ohm load.

Full Spectrum

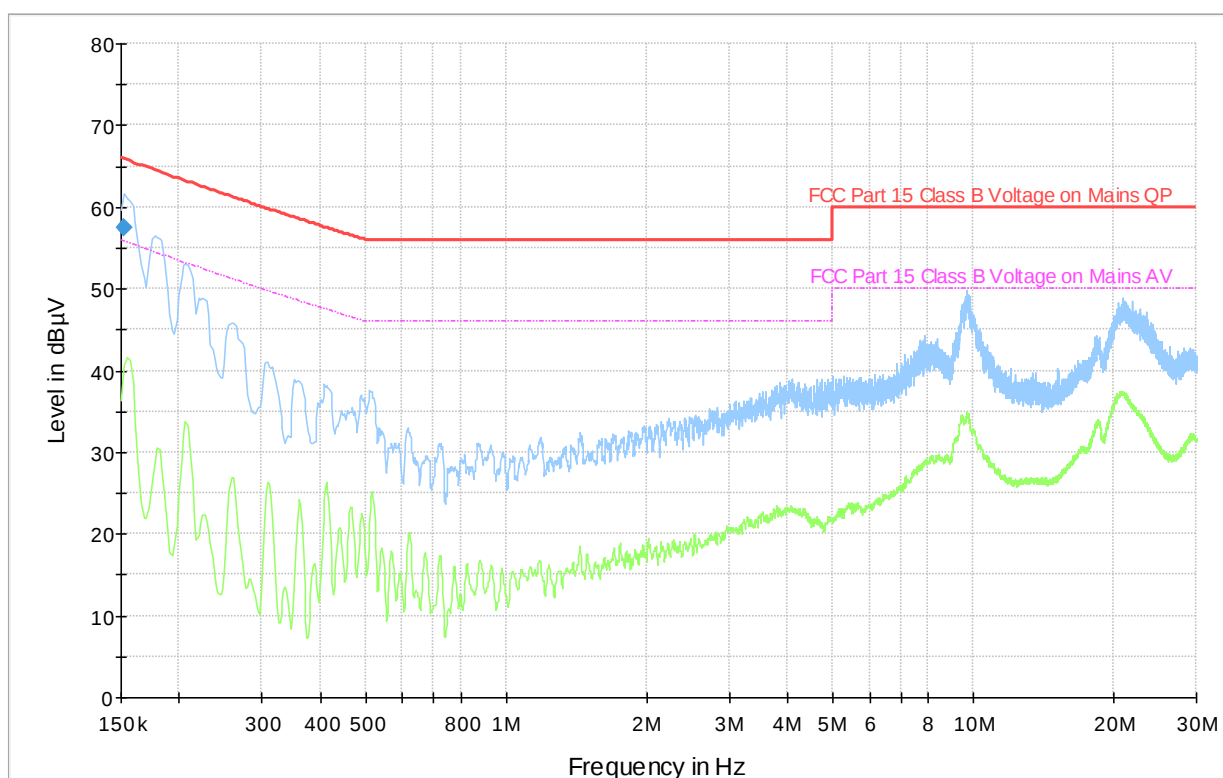

— Preview Result 2-AVG      — Preview Result 1-PK+  
— FCC Part 15 Class B Voltage on Mains QP      — FCC Part 15 Class B Voltage on Mains AV  
◆ Final\_Result QPK      ◆ Final\_Result AVG

### Measurement data of

### Final\_Result

| Frequency (MHz) | QuasiPeak (dBµV) | Average (dBµV) | Limit (dBµV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.152250        | 57.52            | ---            | 65.87        | 8.34        | 1000.0          | 9.000           | N    | 9.8        |

Remarks:

Margin value = Measurement value – Limit value

## ADDITIONAL DOCUMENTATION

| Radiated emission test - Field strength outside of the 13,110-14,010 MHz band |                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test date                                                                     | 27/02/2023                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Applied Standard                                                              | FCC part 15 C                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Paragraph                                                                     | §15.205; §15.209; §15.225                                                                                                                                                                                                                                                                                                                                                                                                           |
| Test method                                                                   | § 8 of ANSI C63-4                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Temperature                                                                   | 21.5° C                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Humidity                                                                      | 46%                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Voltage/Frequency used during the test                                        | 110Vac / 60Hz                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Tested by                                                                     | Roberto Radice                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Model                                                                         | Osmond N                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Internal Storage No.                                                          | A003255761-008                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Operating mode                                                                | 1                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Tested terminals                                                              | Enclosure                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Further information to test setup                                             | For frequencies above 1GHz, the anechoic material is also placed on the metallic floor between EUT and Antenna                                                                                                                                                                                                                                                                                                                      |
| Remarks                                                                       | In accordance with part 15.31 (f) (2), where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied in order to permit measurement to be performed at a separation distance. The applied formula for limits at 3 meter is:<br>Extrapolation (dB) = $40\log(300\text{meter} / 3\text{meter}) = +80\text{db}$<br>Extrapolation (dB) = $40\log(30\text{meter} / 3\text{meter}) = +40\text{db}$ |

## ADDITIONAL DOCUMENTATION

### RANGE 9kHz-30MHz

#### Test parameter of

### EMI Auto Test Template: Electric Field Strength with Scans 9kHz-30MHz active loop

Hardware Setup: Electric Field Strength 9kHz-30MHz - HFH2-Z2E  
Measurement Type: Open-Area-Test-Site (SAC/FAR)  
Frequency Range: 9 kHz - 30 MHz  
Graphics Level Range: -20 dB $\mu$ V/m - 90 dB $\mu$ V/m

Preview Measurements:  
Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 2  
Polarization: H  
Turntable position: 0 - 330 deg , Step Size = 30 deg , Positioning Speed = 3  
Scan Test Template: Electric Field Strength 9kHz-30MHz active Antenna Loop

Adjustment:  
Antenna height: Range = 25 cm , Measuring Speed = 2  
Turntable position: Range = 30 deg , Measuring Speed = 3  
Template for Single Meas.: Electric Field Strength 9kHz-30MHz active Antenna Loop

Final Measurements:  
Template for Single Meas.: Electric Field Strength 9kHz-30MHz active Antenna Loop fin QP


| Subrange           | Step Size | Detectors | IF BW  | Meas. Time | Preamp |
|--------------------|-----------|-----------|--------|------------|--------|
| Receiver: [ESW 44] |           |           |        |            |        |
| 9 kHz - 150 kHz    | 50 Hz     | QPK ; AVG | 200 Hz | 2 s        | 0 dB   |
| 150 kHz - 30 MHz   | 2.25 kHz  | QPK ; AVG | 9 kHz  | 5 s        | 0 dB   |

## ADDITIONAL DOCUMENTATION

### Graphical presentation of

Equipment tested with normal antenna; TAG present

Full Spectrum

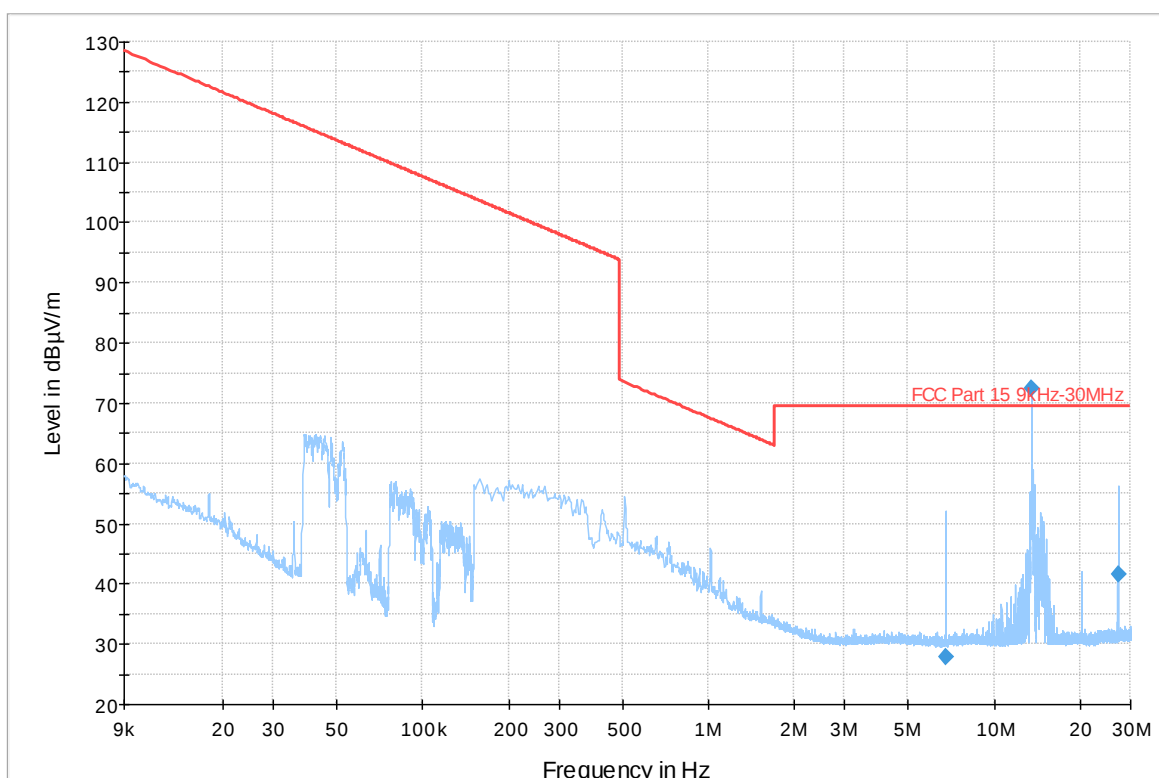

— Preview Result 1-PK+ — FCC Part 15 9kHz-30MHz ◆ Final\_Result QPK ◆ Final\_Result A

### Measurement data of

#### Final Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 6.783000        | 27.90              | ---              | 69.55          | 41.65       | 5000.0          | 9.000           | 100.0       | H   | 133.0         | 20.5         |
| 13.562250*      | 72.52              | ---              | ---            | ---         | 5000.0          | 9.000           | 100.0       | H   | 170.0         | 20.5         |
| 27.123000       | 41.55              | ---              | 69.55          | 28.00       | 5000.0          | 9.000           | 100.0       | H   | 103.0         | 21.2         |

\*Fundamental frequency not related to limit

Remarks:


Margin value = Measurement value – Limit value

## ADDITIONAL DOCUMENTATION

### Graphical presentation of

Equipment tested with normal antenna; TAG not present

Full Spectrum

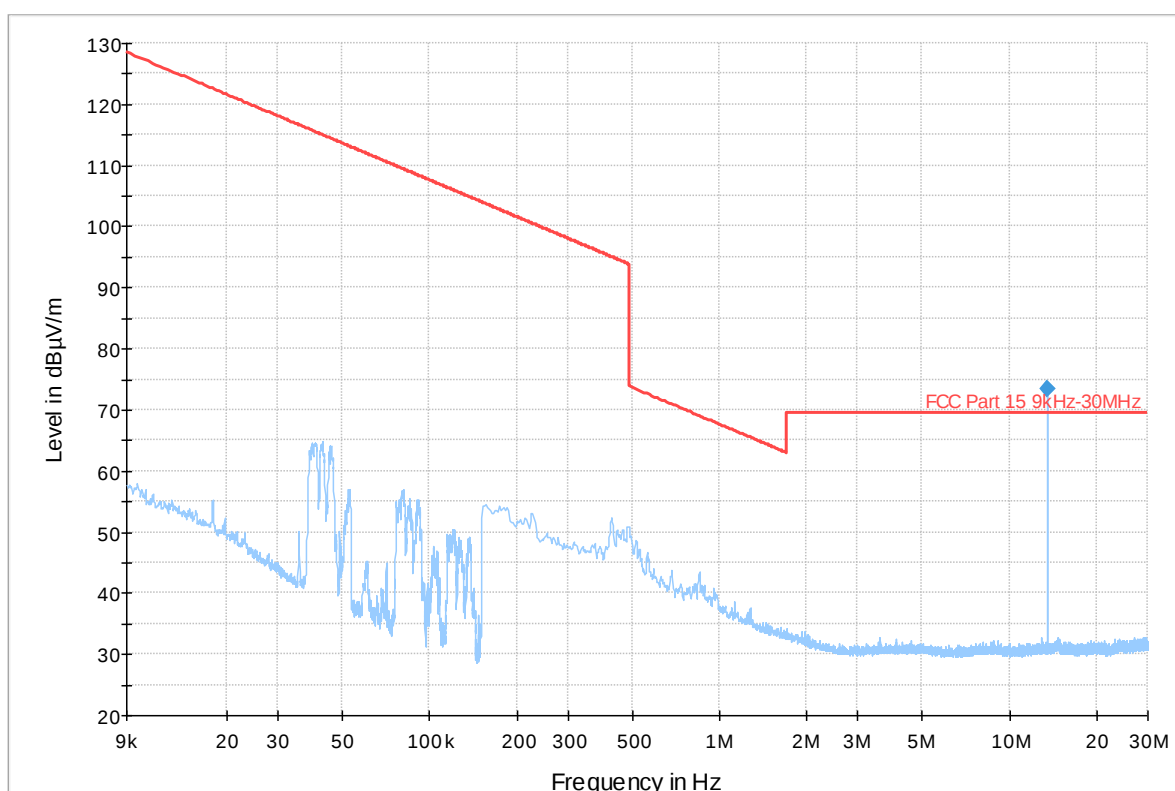

— Preview Result 1-PK+ — FCC Part 15 9kHz-30MHz ◆ Final\_Result QPK ◆ Final\_Result A

### Measurement data of

#### Final Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 13.562250       | 73.31              | ---              | ---            | ---         | 5000.0          | 9.000           | 100.0       | H   | 170.0         | 20.5         |

\*Fundamental frequency not related to limit

Remarks:

Margin value = Measurement value – Limit value

## ADDITIONAL DOCUMENTATION

### RANGE 30-1000 MHz

#### Test parameter of

### EMI Auto Test Template: Electric Field Strength with Scans 30-1000MHz

Hardware Setup: Electric Field Strength 30-1000MHz  
 Measurement Type: Open-Area-Test-Site (SAC/FAR)  
 Frequency Range: 30 MHz - 1 GHz  
 Graphics Level Range: 0 dBμV/m - 80 dBμV/m

Preview Measurements:  
 Antenna height: 100 - 400 cm , Step Size = 100 cm , Positioning Speed = 2  
 Polarization: H + V  
 Turntable position: 0 - 270 deg , Step Size = 90 deg , Positioning Speed = 3  
 Scan Test Template: Electric Field Strength

Adjustment:  
 Antenna height: Range = 25 cm , Measuring Speed = 3  
 Turntable position: Range = 25 deg , Measuring Speed = 3  
 Template for Single Meas.: Electric Field Strength

Final Measurements:  
 Template for Single Meas.: Electric Field Strength fin


| Subrange                             | Step Size | Detectors | IF BW   | Meas. Time | Preamp |
|--------------------------------------|-----------|-----------|---------|------------|--------|
| Receiver: [ESW 44]<br>30 MHz - 1 GHz | 30 kHz    | QPK       | 120 kHz | 1 s        | 0 dB   |

## ADDITIONAL DOCUMENTATION

### Graphical presentation of

Equipment tested with normal antenna; TAG present

Full Spectrum

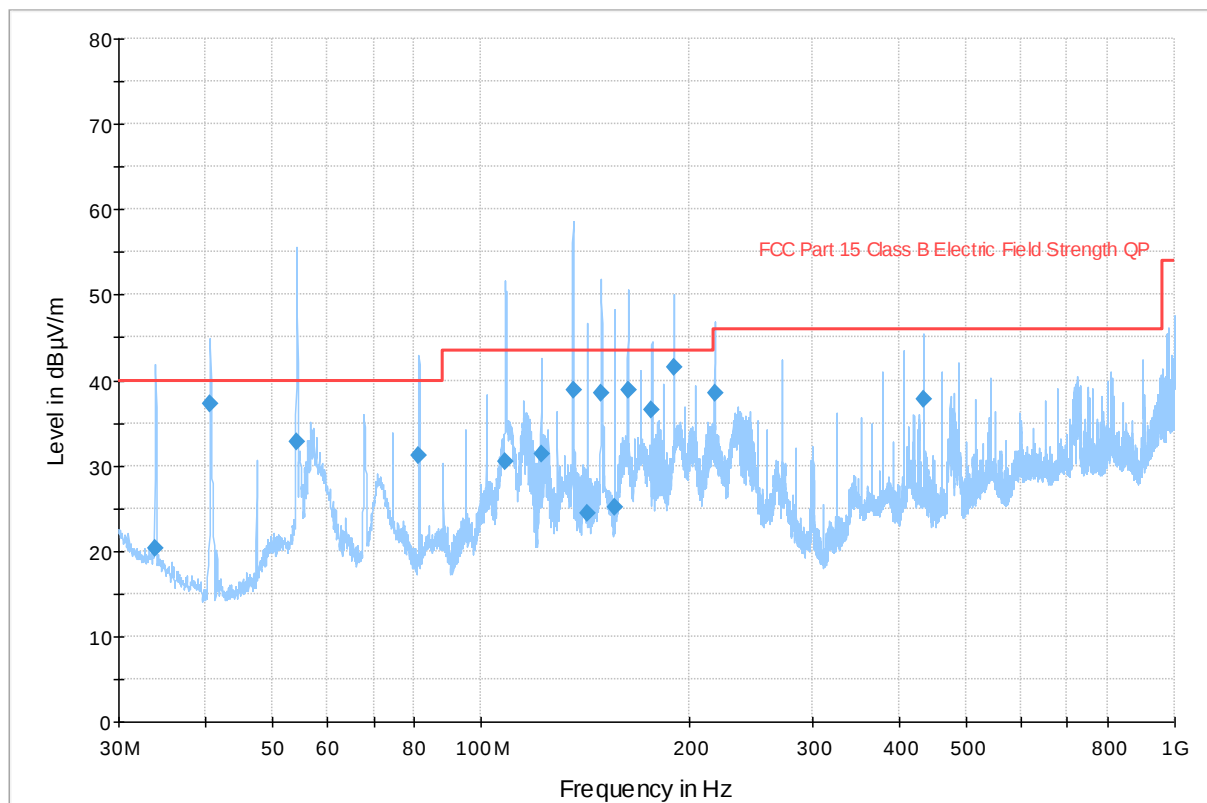

— Preview Result 1-PK+ — FCC Part 15 Class B Electric Field Strength QP ◆ Final Result QPK

## ADDITIONAL DOCUMENTATION

### Measurement data of

### Final Result

| Frequency<br>(MHz) | QuasiPeak<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Meas. Time<br>(ms) | Bandwidth<br>(kHz) | Height<br>(cm) | Pol | Azimuth<br>(deg) | Corr.<br>(dB/m) |
|--------------------|-----------------------|-------------------|----------------|--------------------|--------------------|----------------|-----|------------------|-----------------|
| 33.900000          | 20.27                 | 40.00             | 19.73          | 5000.0             | 120.000            | 100.0          | V   | 103.0            | 14.2            |
| 40.680000          | 37.16                 | 40.00             | 2.84           | 5000.0             | 120.000            | 212.0          | H   | 181.0            | 9.6             |
| 54.210000          | 32.86                 | 40.00             | 7.14           | 5000.0             | 120.000            | 202.0          | V   | 86.0             | 7.3             |
| 81.360000          | 31.16                 | 40.00             | 8.84           | 5000.0             | 120.000            | 212.0          | H   | 86.0             | 7.2             |
| 108.420000         | 30.50                 | 43.50             | 13.00          | 5000.0             | 120.000            | 195.0          | H   | 89.0             | 8.2             |
| 122.040000         | 31.44                 | 43.50             | 12.06          | 5000.0             | 120.000            | 212.0          | H   | 78.0             | 7.5             |
| 135.600000         | 38.83                 | 43.50             | 4.67           | 5000.0             | 120.000            | 195.0          | V   | 193.0            | 9.0             |
| 142.380000         | 24.33                 | 43.50             | 19.17          | 5000.0             | 120.000            | 100.0          | H   | 91.0             | 8.9             |
| 149.160000         | 38.49                 | 43.50             | 5.01           | 5000.0             | 120.000            | 112.0          | H   | 103.0            | 9.9             |
| 155.940000         | 25.06                 | 43.50             | 18.44          | 5000.0             | 120.000            | 112.0          | H   | 103.0            | 11.1            |
| 162.720000         | 38.82                 | 43.50             | 4.68           | 5000.0             | 120.000            | 103.0          | H   | 91.0             | 10.5            |
| 176.280000         | 36.47                 | 43.50             | 7.03           | 5000.0             | 120.000            | 187.0          | H   | 13.0             | 10.7            |
| 189.870000         | 41.49                 | 43.50             | 2.01           | 5000.0             | 120.000            | 103.0          | H   | 283.0            | 10.3            |
| 216.960000         | 38.44                 | 46.00             | 7.56           | 5000.0             | 120.000            | 288.0          | H   | 268.0            | 11.5            |
| 433.950000         | 37.84                 | 46.00             | 8.16           | 5000.0             | 120.000            | 187.0          | H   | 13.0             | 18.3            |

Remarks:


Margin value = Measurement value – Limit value

## ADDITIONAL DOCUMENTATION

### Graphical presentation of

Equipment tested with normal antenna; TAG not present

Full Spectrum

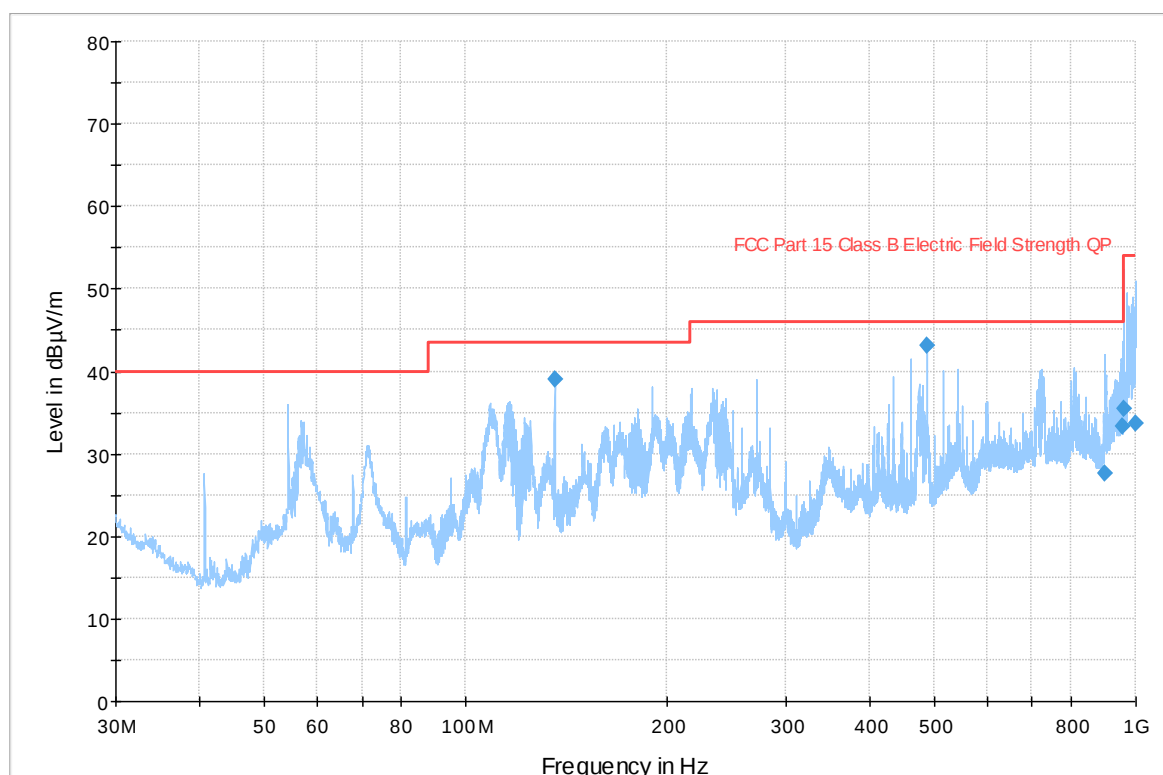

— Preview Result 1-PK+ — FCC Part 15 Class B Electric Field Strength QP ◆ Final Result QP K

### Measurement data of

#### Final Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 135.600000      | 38.99              | 43.50          | 4.51        | 5000.0          | 120.000         | 287.0       | H   | 83.0          | 8.7          |
| 488.190000      | 43.11              | 46.00          | 2.89        | 5000.0          | 120.000         | 187.0       | H   | 12.0          | 20.9         |
| 898.980000      | 27.56              | 46.00          | 18.44       | 5000.0          | 120.000         | 212.0       | H   | 98.0          | 25.2         |
| 954.210000      | 33.31              | 46.00          | 12.69       | 5000.0          | 120.000         | 112.0       | V   | 178.0         | 28.9         |
| 960.000000      | 35.41              | 46.00          | 10.59       | 5000.0          | 120.000         | 207.0       | H   | 103.0         | 28.2         |
| 997.560000      | 33.68              | 53.90          | 20.22       | 5000.0          | 120.000         | 108.0       | V   | 266.0         | 28.0         |

Remarks:

Margin value = Measurement value – Limit value

**ADDITIONAL DOCUMENTATION**

| Radiated emission test - Field strength inside of the 13,110-14,010 MHz band |                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test date                                                                    | 27/02/2023                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Applied Standard                                                             | FCC part 15 C                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Paragraph                                                                    | §15.225(a); §15.225(b); §15.225(c)                                                                                                                                                                                                                                                                                                                                                                                                  |
| Temperature                                                                  | 21.5° C                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Humidity                                                                     | 46%                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Voltage/Frequency used during the test                                       | 110Vac / 60Hz                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Tested by                                                                    | Roberto Radice                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Model                                                                        | Osmond N                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Internal Storage No.                                                         | A003255761-008                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Operating mode                                                               | 1                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Tested terminals                                                             | Enclosure                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Remarks                                                                      | In accordance with part 15.31 (f) (2), where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied in order to permit measurement to be performed at a separation distance. The applied formula for limits at 3 meter is:<br>Extrapolation (dB) = $40\log(300\text{meter} / 3\text{meter}) = +80\text{db}$<br>Extrapolation (dB) = $40\log(30\text{meter} / 3\text{meter}) = +40\text{db}$ |

## ADDITIONAL DOCUMENTATION

### Extrapolation from the measurement of a single point

If field strength is measured at only a single point, then that point shall be at the radial from the EUT that produces the maximum emission at the frequency being measured, as described in 5.4. If that point is closer to the EUT than  $\lambda/2\pi$  and the limit distance is greater than  $\lambda/2\pi$ , the measurement shall be extrapolated to the limit distance by conservatively presuming that the field strength decreases at a 40 dB/decade of distance rate to the  $\lambda/2\pi$  distance, and at a 20 dB/decade of distance rate beyond  $\lambda/2\pi$ .

This shall be accomplished using **Equation (A)**:

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log \left( \frac{d_{\text{near field}}}{d_{\text{measure}}} \right) - 20 \log \left( \frac{d_{\text{limit}}}{d_{\text{near field}}} \right)$$

where

$FS_{\text{limit}}$  is the calculation of field strength at the limit distance, expressed in dB $\mu$ V/m

$FS_{\text{max}}$  is the measured field strength, expressed in dB $\mu$ V/m

$d_{\text{near field}}$  is the  $\lambda/2\pi$  distance

$d_{\text{measure}}$  is the distance of the measurement point from the EUT

$d_{\text{limit}}$  is the reference limit distance

If the single point measured is at a distance greater than  $\lambda/2\pi$ , then extrapolation to the limit distance shall be calculated using Equation (B):

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left( \frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

If both the single point and the limit distance are equal to or closer to the EUT than  $\lambda/2\pi$ , then extrapolation to the limit distance shall be calculated using Equation (C):

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log \left( \frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

where

$FS_{\text{limit}}$  is the calculation of field strength at the limit distance, expressed in dB $\mu$ V/m

$FS_{\text{max}}$  is the measured field strength, expressed in dB $\mu$ V/m

$d_{\text{near field}}$  is the  $\lambda/2\pi$  distance

$d_{\text{measure}}$  is the distance of the measurement point from the EUT

$d_{\text{limit}}$  is the reference distance or the distance of the  $\lambda/2\pi$  point

# **ADDITIONAL DOCUMENTATION**


| New limit (according to equation A) |                    |                      |                      |                   |                 |                      |
|-------------------------------------|--------------------|----------------------|----------------------|-------------------|-----------------|----------------------|
| f<br>(MHz)                          | Fs limit<br>(uV/m) | Fs limit<br>(dBuV/m) | d(near field)<br>(m) | d(measure)<br>(m) | d(limit)<br>(m) | FS (max)<br>(dBuV/m) |
| 13,11                               | 106                | 40,51                | 3,64                 | 3                 | 30              | 62,2                 |
| 13,41                               | 334                | 50,47                | 3,56                 | 3                 | 30              | 72,0                 |
| 13,41                               | 334                | 50,47                | 3,56                 | 3                 | 30              | 72,0                 |
| 13,553                              | 15848              | 84,00                | 3,52                 | 3                 | 30              | 105,4                |
| 13,567                              | 15848              | 84,00                | 3,52                 | 3                 | 30              | 105,4                |
| 13,71                               | 334                | 50,47                | 3,48                 | 3                 | 30              | 71,8                 |
| 13,71                               | 334                | 50,47                | 3,48                 | 3                 | 30              | 71,8                 |
| 14,01                               | 106                | 40,51                | 3,41                 | 3                 | 30              | 61,6                 |

## ADDITIONAL DOCUMENTATION

Graphical presentation of

Frequency: 13.110-14.010 MHz

Full Spectrum

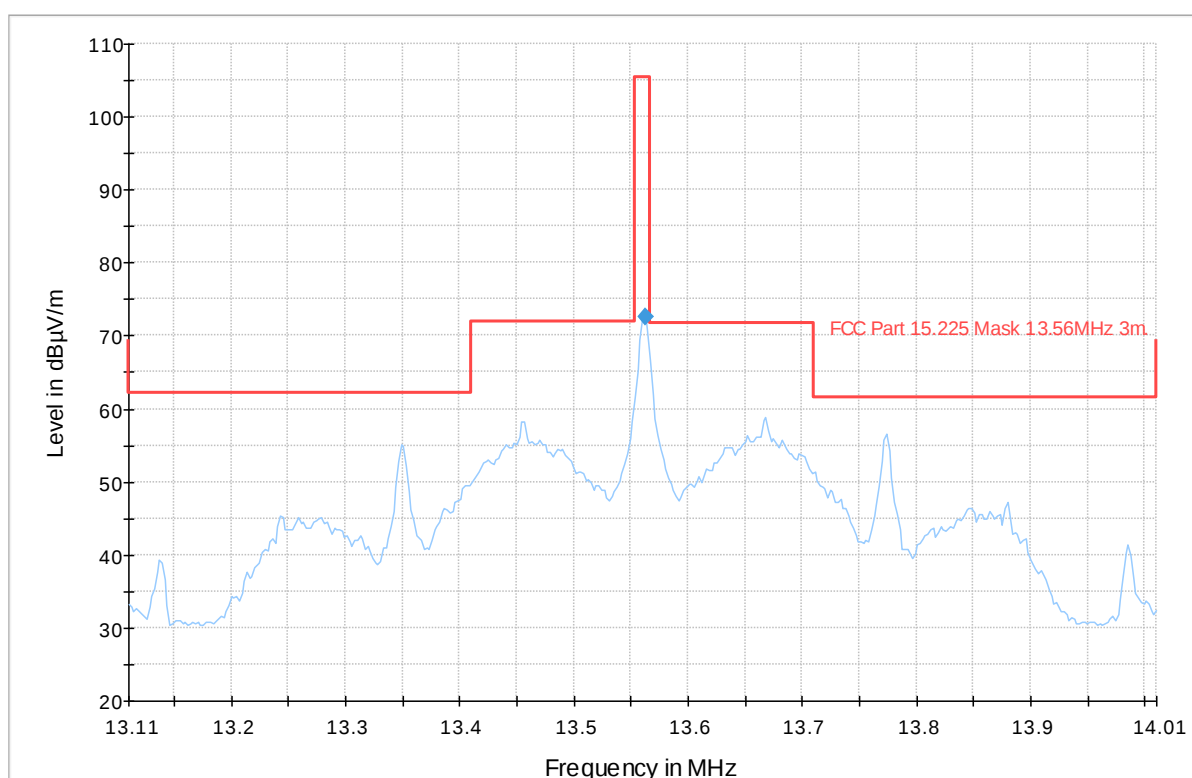

Preview Result 1-PK+  
Final\_Result QPK

FCC Part 15.225 Mask 13.56MHz 3m.  
Final\_Result AVG

## Final\_Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Average (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|------------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 13.562250       | 72.52              | ---              | 5000.0          | 9.000           | 100.0       | H   | 170.0         | 20.5         |


**ADDITIONAL DOCUMENTATION**

| <b>20dB Bandwidth</b>       |                |
|-----------------------------|----------------|
| <b>Test date</b>            | 27/02/2023     |
| <b>Applied Standard</b>     | FCC part 15 C  |
| <b>Paragraph</b>            | §15.215(c)     |
| <b>Temperature</b>          | 21.5° C        |
| <b>Humidity</b>             | 46%            |
| <b>Tested by</b>            | Roberto Radice |
| <b>Model</b>                | Osmond N       |
| <b>Internal Storage No.</b> | A003255761-008 |
| <b>Operating mode</b>       | 1              |
| <b>Tested terminals</b>     | Enclosure      |
| <b>Remarks</b>              | None           |

Note: Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

## ADDITIONAL DOCUMENTATION


### Graphical presentation of

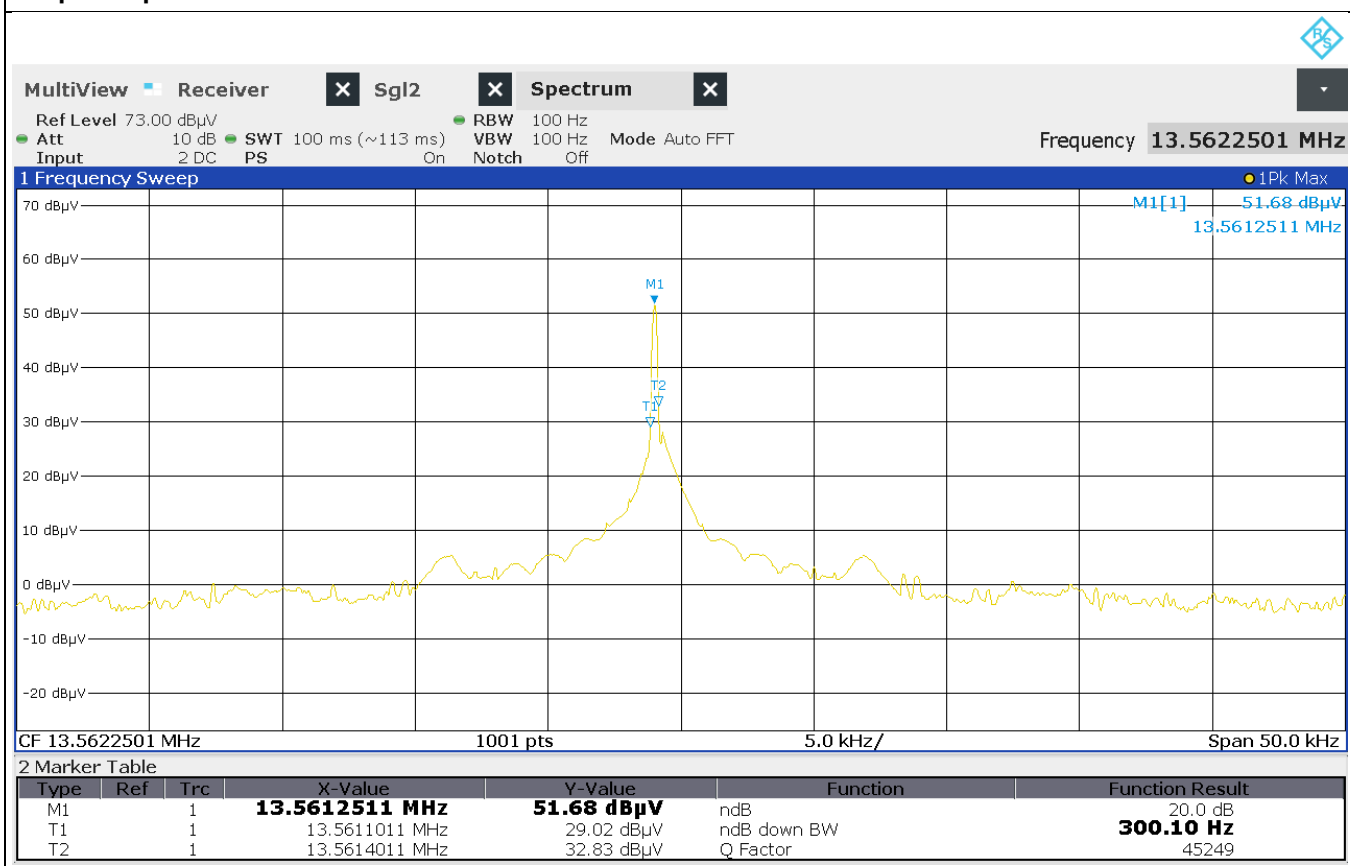**20dB Bandwidth**


| Channel (No.) | Frequency (MHz) | Channel Bandwidth at -20dB (Hz) | Plot (No.) |
|---------------|-----------------|---------------------------------|------------|
| 1             | 13.5612511      | 300.10                          | 1          |

| Bandwidth at -20dB (Fmin and Fmax) |                |      |                |
|------------------------------------|----------------|------|----------------|
| Fmin                               | 13.5611011 MHz | Fmax | 13.5614011 MHz |

## ADDITIONAL DOCUMENTATION

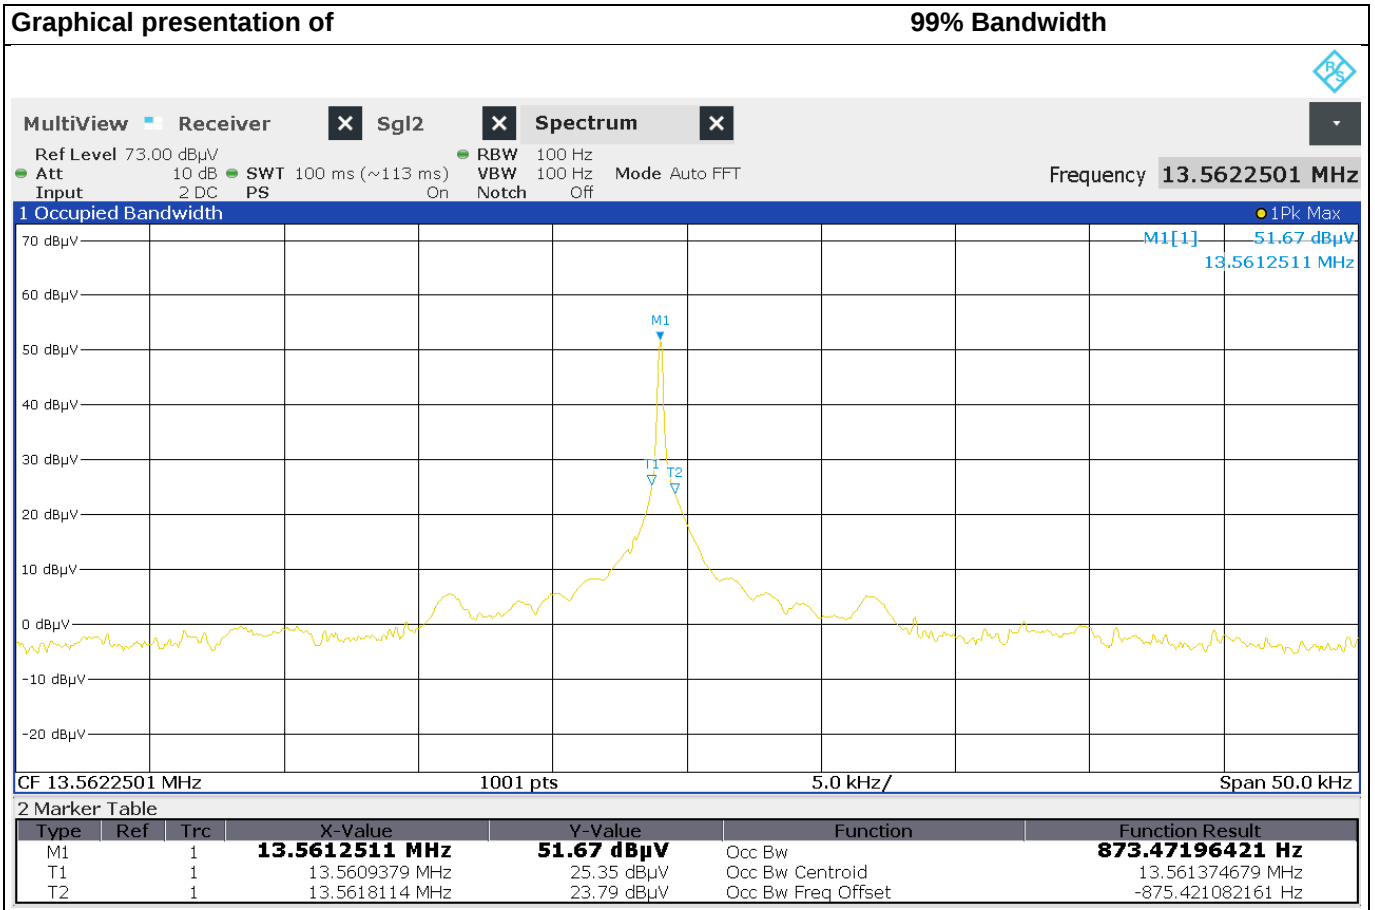

| Channel (No.) | Frequency (MHz) | Channel Bandwidth at 99% (Hz) | Plot (No.) |
|---------------|-----------------|-------------------------------|------------|
| 1             | 13.5612511      | 873.47                        | 1          |

| Bandwidth at 99% (Fmin and Fmax) |                |      |                |
|----------------------------------|----------------|------|----------------|
| Fmin                             | 13.5609379 MHz | Fmax | 13.5618114 MHz |

**ADDITIONAL DOCUMENTATION**

| Frequency tolerance of the carrier signal                                                                                                                                                                                                                                                                                                                                                                                             |                |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Test date                                                                                                                                                                                                                                                                                                                                                                                                                             | 27/02/2023     |
| Applied Standard                                                                                                                                                                                                                                                                                                                                                                                                                      | FCC part 15 C  |
| Paragraph                                                                                                                                                                                                                                                                                                                                                                                                                             | §15.225(e)     |
| Temperature                                                                                                                                                                                                                                                                                                                                                                                                                           | 20.5° C        |
| Humidity                                                                                                                                                                                                                                                                                                                                                                                                                              | 40%            |
| Tested by                                                                                                                                                                                                                                                                                                                                                                                                                             | Roberto Radice |
| Model                                                                                                                                                                                                                                                                                                                                                                                                                                 | Osmond N       |
| Internal Storage No.                                                                                                                                                                                                                                                                                                                                                                                                                  | A003255761-008 |
| Operating mode                                                                                                                                                                                                                                                                                                                                                                                                                        | 1              |
| Tested terminals                                                                                                                                                                                                                                                                                                                                                                                                                      | Enclosure      |
| Remarks                                                                                                                                                                                                                                                                                                                                                                                                                               | None           |
| Note: the frequency tolerance of the carrier signal shall be maintained within +0.01% of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery. |                |

**ADDITIONAL DOCUMENTATION****Frequency stability**

| Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Frequency Delta (ppm) |
|------------------|-------------|--------------------------|-----------------------|
| 25               | 110         | 13.5612640               | 0                     |
| 25               | 93.5        | 13.5612640               | 0                     |
| 25               | 126.5       | 13.5612640               | 0                     |

| Temperature (°C) | Voltage (Vac) | Measured Frequency (MHz) | Frequency Delta (ppm) |
|------------------|---------------|--------------------------|-----------------------|
| -20              | 110           | 13.5612640               | 0                     |
| -10              | 110           | 13.5612640               | 0                     |
| 0                | 110           | 13.5612640               | 0                     |
| +10              | 110           | 13.5612640               | 0                     |
| +20              | 110           | 13.5612640               | 0                     |
| +25              | 110           | 13.5612640               | 0                     |
| +30              | 110           | 13.5612640               | 0                     |
| +40              | 110           | 13.5612640               | 0                     |
| +50              | 110           | 13.5612640               | 0                     |

**ADDITIONAL DOCUMENTATION**

| Additional provisions to the general radiated emission limitations. |                     |
|---------------------------------------------------------------------|---------------------|
| Test date                                                           | 27/02/2023          |
| Applied Standard                                                    | FCC part 15 C       |
| Paragraph                                                           | §15.215 (a) (b) (c) |
| Temperature                                                         | 21.5° C             |
| Humidity                                                            | 46%                 |
| Tested by                                                           | Roberto Radice      |
| Model                                                               | Osmond N            |
| Internal Storage No.                                                | A003255761-009      |
| Operating mode                                                      | 1                   |
| Tested terminals                                                    | Enclosure           |
| Remarks                                                             | None                |

## ADDITIONAL DOCUMENTATION

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| (A) The regulations in §§ 15.217-15.257 provide alternatives to the general radiated emission limits for intentional radiators operating in specified frequency bands. Unless otherwise stated, there are no restrictions as to the types of operation permitted under these sections.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |          |
| (B) In most cases, unwanted emissions outside of the frequency bands shown in these alternative provisions must be attenuated to the emission limits shown in Section 15.209. In no case shall the level of the unwanted emissions from an intentional radiator operating under these additional provisions exceed the field strength of the fundamental emission.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | VERDICT  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>P</b> |
| (C) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least | VERDICT  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>P</b> |

## ADDITIONAL DOCUMENTATION

### 17. List of test equipment

| Equipment                                                                                        | Type            | Inventory no. | Manufacturer  | Calibration due date |
|--------------------------------------------------------------------------------------------------|-----------------|---------------|---------------|----------------------|
| <b>Test stand: Radiated emission test - Field strength outside of the 13,110-14,010 MHz band</b> |                 |               |               |                      |
| Semi-anechoic Chamber                                                                            | FACT3           | 2782378       | ETS Lindgren  | 05/2024              |
| Active Loop Antenna and power supply                                                             | HFH2-Z2E+IN 600 | 9015215       | Rohde&Schwarz | 06/2026              |
| BiConiLog Antenna                                                                                | 3142-E          | 2782348       | ETS Lindgren  | 08/2023              |
| EMI Receiver                                                                                     | ESW44           | 2782867       | Rohde&Schwarz | 05/2024              |
| Three-Phases Power Supply                                                                        | TPS T 30K60S    | 2782385       | Elettrotest   | 10/2024              |
| Software EMC32                                                                                   | 11.40.00        | ---           | Rohde&Schwarz | ---                  |
| <b>Test stand: Radiated emission test - Field strength inside of the 13,110-14,010 MHz band</b>  |                 |               |               |                      |
| Semi-anechoic Chamber                                                                            | FACT3           | 2782378       | ETS Lindgren  | 05/2024              |
| Active Loop Antenna and power supply                                                             | HFH2-Z2E+IN 600 | 9015215       | Rohde&Schwarz | 06/2026              |
| EMI Receiver                                                                                     | ESW44           | 2782867       | Rohde&Schwarz | 05/2024              |
| Three-Phases Power Supply                                                                        | TPS T 30K60S    | 2782385       | Elettrotest   | 10/2024              |
| Software EMC32                                                                                   | 11.40.00        | ---           | Rohde&Schwarz | ---                  |

### ADDITIONAL DOCUMENTATION

| Equipment                                                    | Type            | Inventory no. | Manufacturer  | Calibration due date |
|--------------------------------------------------------------|-----------------|---------------|---------------|----------------------|
| <b>Test stand: 20dB Bandwidth</b>                            |                 |               |               |                      |
| Semi-anechoic Chamber                                        | FACT3           | 2782378       | ETS Lindgren  | 05/2024              |
| Active Loop Antenna and power supply                         | HFH2-Z2E+IN 600 | 9015215       | Rohde&Schwarz | 06/2026              |
| EMI Receiver                                                 | ESW44           | 2782867       | Rohde&Schwarz | 05/2024              |
| Three-Phases Power Supply                                    | TPS T 30K60S    | 2782385       | Elettrotest   | 10/2024              |
| Software EMC32                                               | 11.40.00        | ---           | Rohde&Schwarz | ---                  |
| <b>Test stand: Frequency tolerance of the carrier signal</b> |                 |               |               |                      |
| Climatic Chamber                                             | CTS C-40/350    | 2789461       | CTS           | 07/2024              |
| Active Loop Antenna and power supply                         | HFH2-Z2E+IN 600 | 9015215       | Rohde&Schwarz | 06/2026              |
| EMI Receiver                                                 | ESR 3           | 2782768       | Rohde&Schwarz | 05/2024              |
| Three-Phases Power Supply                                    | TPS T 30K60S    | 2782385       | Elettrotest   | 10/2024              |
| <b>Test stand: Conducted emission</b>                        |                 |               |               |                      |
| EMI Receiver                                                 | ESW44           | 2782867       | Rohde&Schwarz | 05/2024              |
| Single-phase LISN 16A                                        | ENV216          | 2782895       | Rohde&Schwarz | 06/2024              |
| Three-Phases Power Supply                                    | TPS T 30K60S    | 2782385       | Elettrotest   | 10/2024              |
| Software EMC32                                               | 11.40.00        | ---           | Rohde&Schwarz | ---                  |

**ADDITIONAL DOCUMENTATION****PHOTOGRAPHIC DOCUMENTATION**

See the Annex below:

|                      |                    |
|----------------------|--------------------|
| IT23SWZZ 001 Annex 1 | External photos    |
| IT23SWZZ 001 Annex 2 | Internal photos    |
| IT23SWZZ 001 Annex 3 | Test Set-up photos |

**SAR EVALUATION**

See the Annex below:

|                      |                |
|----------------------|----------------|
| IT23SWZZ 001 Annex 4 | SAR Evaluation |
|----------------------|----------------|

---END OF TEST REPORT---