

TEST REPORT 47 CFR FCC Part 15 subpart C Par. 15.225 Intentional Radiators			
Applicant:	A.R. Hungary, Inc. Alkotas utca 41. Budapest 1123, HUNGARY		
Test item:	Passaport Readers and ID scanners		
Identification / Type No.:	Osmond R		
IC:	XCW-OSMOND-R		
Order content:	Full testing according to the following standard(s):		
Test specification:	FCC Part 15, Subpart C (par. 15.225)		
Date of receipt:	05/05/2022	<i>Photos were removed for confidentiality as demanded by the customer</i>	
Internal storage No.:	A003255761-003		
Testing period:	21-22/06/2022 31/10/2022 18/11/2022		
Place of testing:	TÜV Rheinland Italia S.r.l. Via E. Mattei, 3 20005 Pogliano Milanese (MI) - IT		
Testing laboratory:	TÜV Rheinland Italia S.r.l. Via E. Mattei,3 20005 Pogliano Milanese (MI) - IT		
Test result:	Pass		
Tested by:	Frescaroli Mattia	Authorized by:	Andrea Bortolotti
Date:	01/02/2023	Date:	02/02/2023
Position	Sachverständige(r)/Expert	Position	Sachverständige(r)/Expert
Other:	---		
The test results reported in this test report shall refer only to the samples tested as received. TRI is not responsible for the sampling phase. This report may not be partially reproduced, except with the prior written permission of the issuing Laboratory. TRI refuses any responsibility about information supplied by the customer contained in this test report			

Product description

1	The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.
2	As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.
3	Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.
4	Unless otherwise agreed with the customer, a conformity assessment is always carried out based on the applied standards. At the customer's request, the statement on the conformity of the product tested in this test report is carried out according to the criteria/requirements of the applied standards. Evaluation conditions deviating from these are documented separately in the respective chapters.

Product description

0. Table of Contents

0.	Table of Contents	3
1.	General description of test item(s)	4
2.	EUT identification	5
3.	Test method	6
4.	Reference standards	10
5.	Equipment used during test	10
6.	Input/Output ports	11
7.	Radio type identification	12
8.	Operating modes	13
9.	Climatic conditions	13
10.	Statement of the measurement uncertainty	14
11.	Example for interpretation of measuring results	14
12.	Measurement uncertainty	15
13.	EUT configuration	16
14.	Change history	17
15.	Result summary section	18
16.	Emission Test	19
17.	Photographic documentation: EUT Test setup	41
18.	List of test equipment	42

Product description

1. General description of test item(s)

Identification / Type No.:	Osmond R
Serial number	1213620
Manufacturer	A.R. Hungary, Inc. Alkotas utca 41. Budapest 1123, HUNGARY
Trade Mark	
Rated voltage / frequency	100-240 V AC, 50/60 Hz
Rated current / power	Input Max 1,5 A
Equipment type	Intentional radiator installed in a host equipment
Number of phases	1Phase
Hardware version	ASM-1054.18
Software version	PR 2.1.10.3
Dimensions	178 × 203 × 157 mm
Weight	2.25 kg
Other	---
Test sample obtaining:	☒ Sampling by customer ☐ Sampling by TÜV Rheinland Group ☐ others:

Product description**2. EUT identification**

See the Annex below:

DE2297LO 001 Annex 1

Photographic documentation

Clause	Requirements - Tests	Clause	Evaluation
3. Test method			
	§15.225 Operation within the band 13.110 – 14.010 MHz (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters. (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters. (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters. (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209. (e) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of –20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery. (f) In the case of radio frequency powered tags designed to operate with a device authorized under this section, the tag may be approved with the device or be considered as a separate device subject to its own authorization. Powered tags approved with a device under a single application shall be labeled with the same identification number as the device		

Clause	Requirements - Tests	Clause	Evaluation															
	§15.207 Conducted limits. (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges. <table><tr><th>Frequency of Emission (MHz)</th><th colspan="2">Conducted Limit (dBμV)</th></tr><tr><td></td><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56 *</td><td>56 to 46 *</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * Decreases with the logarithm of the frequency. (b) The shown limit in paragraph (a) of this Section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards: (1) For carrier current systems containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions. (2) For all other carrier current systems: 1000 μV within the frequency band 535-1705 kHz, as measured using a 50 μH/50 ohms LISN. (3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in Section 15.205 and Section 15.209, 15.221, 15.223, 15.225 or 15.227, as appropriate. (c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operating while charging, AC adaptors or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.			Frequency of Emission (MHz)	Conducted Limit (dB μ V)			Quasi-peak	Average	0.15-0.5	66 to 56 *	56 to 46 *	0.5-5	56	46	5-30	60	50
Frequency of Emission (MHz)	Conducted Limit (dB μ V)																	
	Quasi-peak	Average																
0.15-0.5	66 to 56 *	56 to 46 *																
0.5-5	56	46																
5-30	60	50																

Clause	Requirements - Tests	Clause	Evaluation																								
	§15.209 Radiated emission limits, general requirements. (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: <table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement Distance (meter)</th></tr><tr><td>0.009 - 0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490 - 1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705 - 30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100**</td><td>3</td></tr><tr><td>88-216</td><td>150**</td><td>3</td></tr><tr><td>216-960</td><td>200**</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table> ** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241. (b) In the emission table above, the tighter limit applies at the band edges. (c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other Sections within this Part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. (e) The provisions in Sections 15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this Part. (f) In accordance with Section 15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in Section 15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in Section 15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in Section 15.109 that are applicable to the incorporated digital device. (g) Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.			Frequency (MHz)	Field strength (microvolts/meter)	Measurement Distance (meter)	0.009 - 0.490	2400/F(kHz)	300	0.490 - 1.705	24000/F(kHz)	30	1.705 - 30.0	30	30	30-88	100**	3	88-216	150**	3	216-960	200**	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement Distance (meter)																									
0.009 - 0.490	2400/F(kHz)	300																									
0.490 - 1.705	24000/F(kHz)	30																									
1.705 - 30.0	30	30																									
30-88	100**	3																									
88-216	150**	3																									
216-960	200**	3																									
Above 960	500	3																									


Clause	Requirements - Tests	Clause	Evaluation
	§ 15.33 Frequency range of radiated measurements. (a) Unless otherwise noted in the specific rule section under which the equipment operates for an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph: (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower. (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules. (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.		

Clause	Requirements - Tests		Clause	Evaluation	
4. Reference standards					
	Reference document				
	47 CFR Part 15	Last edition	Radio Frequency Device		
	ANSI C63.4	2014	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz		
	ANSI C63.10	2020	American National Standard for Testing Unlicensed Wireless Devices		
	996369 D04 Module Integration Guide	v02 October 13, 2020	Modular transmitter integration guide; guidance for host product manufacturers.		
Note: The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.					
5. Equipment used during test					
	Equipment under test				
	No.	Product type	Manufacturer	Model	Comments
	1	Passaport Readers and ID scanners	Adaptive Recognition	Osmond R	With RFID
	2	—	—	—	—
	Auxiliary Equipment / Peripherals				
	No.	Product type	Manufacturer	Model	Comments
	1	Personal computer	DELL	—	Use for the continuous scanning mode

Clause	Requirements - Tests			Clause	Evaluation	
6. Input/Output ports						
	Nr.	Name	Type	Cable length	Cable shielded	Comments
	1	Enclosure port	Conductive/ Non conductive	—	—	Closed by screws
	2	AC power port	Power / Mains	< 3m	---	L/N/PE

Clause	Requirements - Tests	Clause	Evaluation
7. Radio type identification			
Brand name and model of radio module	ST25R3911B		
Antenna model and Gain	Pcb loop antenna		
Antenna type	☐ External antenna ☐ Dedicated antenna ☒ Integral antenna		
Type of equipment	☐ stand-alone equipment ☒ combined equipment ☐ multi-radio equipment		
Type of modulation	----		
Nominal voltage of stand-alone or combined equipment	100-240 V AC		
Operatig frequency	13.56MHz		
Number of channels	1		
Transmit operating mode	☒ single antenna ☐ multiple antennas		
Environmental equipment	☒ Test only in normal conditions ☐ Test in normal conditions and extreme conditions		
Temperature range	-20 °C to +55 °C		

Clause	Requirements - Tests	Clause	Evaluation
8. Operating modes			
No. Description			
1 continuous scanning mode with test passport			
9. Climatic conditions			
Ambient Temperature10 - 40 °C			
Relative Humidity10 - 90 %			
Air pressureNot specified			
According to ANSI C63.4			

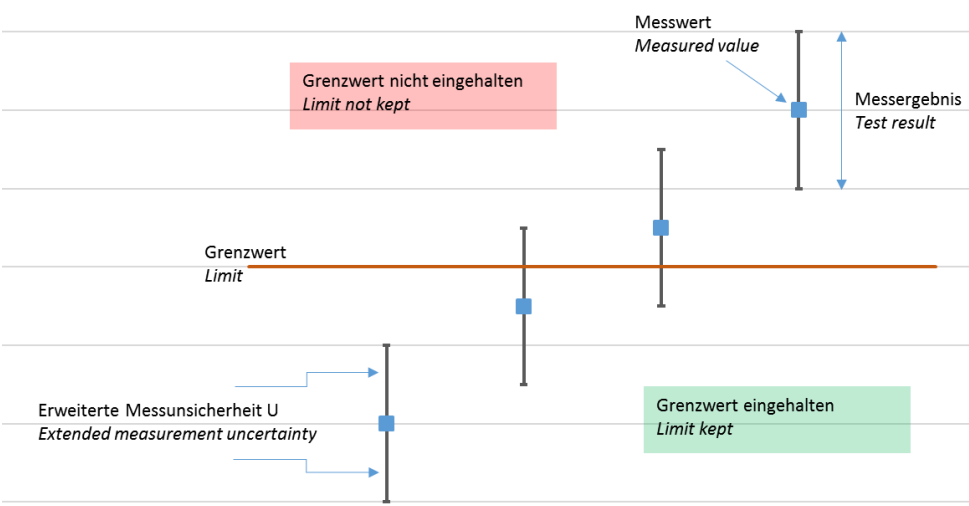Clause	Requirements - Tests	Clause	Evaluation								
10. Statement of the measurement uncertainty											
The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the quality system acc. to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.											
11. Example for interpretation of measuring results											
											
	Example for interpretation of measuring results <table> <thead> <tr> <th>Measured value</th><th>Limit</th><th>Extended measurement uncertainty (k=2)</th><th>Test result</th></tr> </thead> <tbody> <tr> <td>48.9 dBµV @ 16.5 MHz</td><td>50 dBµV</td><td>2.2 dB</td><td>46.7 dBµV – 51.1 dBµV</td></tr> </tbody> </table>			Measured value	Limit	Extended measurement uncertainty (k=2)	Test result	48.9 dBµV @ 16.5 MHz	50 dBµV	2.2 dB	46.7 dBµV – 51.1 dBµV
Measured value	Limit	Extended measurement uncertainty (k=2)	Test result								
48.9 dBµV @ 16.5 MHz	50 dBµV	2.2 dB	46.7 dBµV – 51.1 dBµV								
Decision rule :	Statements of conformity (PASS or FAIL) to specifications are made in this report without taking measurement uncertainty into account. Where statements of conformity are made in this report, the following decision rules are applied: PASS – Results within limits/specifications FAIL – Results exceed limits/specifications										

Clause	Requirements - Tests	Clause	Evaluation
--------	----------------------	--------	------------

12. Measurement uncertainty

Test Method	Uncertainty (95%)	Coverage factor k
RF Conducted continuous emissions - range (9 kHz – 30 MHz)	3.3 dB	2.0
RF Radiated emissions – range (30 – 1000) MHz	4.9 dB	2.0
RF Radiated emissions – range (1 – 3,6) GHz	5.1 dB	2.0
RF Radiated emissions – range (3,6 – 8) GHz	5.1 dB	2.0
RF Magnetic Field by Loop Large Antenna – range (9 kHz – 30 MHz)	4,6 dB	2,0
Occupied Bandwidth	514.4 x 10 ⁻⁹	2.0
Measurement of Normalised Site Attenuation and VSWR	6.0 dB	2.0

Clause	Requirements - Tests	Clause	Evaluation
13. EUT configuration			
	The test setup was made in accordance with mentioned FF standards. Measurements and tests were executed under "worst case" conditions. Typical EUT arrangements or operating modes were chosen or assumed which let suspect maximum emission or susceptibility (a so called "unfavourable configuration"). Details of test setup or adjustments are (particularly) shown inside the photo documentation. As far as not mentioned otherwise these statements are valid for all following tests.		
AC or DC mains voltage used during the test if not otherwise specified:	115 Vac – 60 Hz		

REVISION HISTORY**14. Change history**

Test report number	List of revisions	Date
DE2297LO 001	First edition	02/02/2023

ADDITIONAL DOCUMENTATION

15. Result summary section

Clause	Requirement – Test case	Result
§ 15.203	Antenna Requirements	Pass
§ 15.207 (a)	Conducted emission test	Pass
§ 15.215 (a) (b) (c)	Additional provisions to the general radiated emission limitations	Pass
§ 15.215 (c)	20 dB Bandwidth	Pass
§ 15.225 (a)	Field strength in band 13,553-13,567MHz	Pass
§ 15.225 (b)	Field strength in band 13,410-13,553 MHz and 13,567-13,710 MHz	Pass
§ 15.225 (c)	Field strength in band 13,110-13,410 MHz and 13,710-14,010 MHz	Pass
§ 15.225 (d)	Field strength outside of the 13,110-14,010 MHz band	Pass
§ 15.209 (a) (f)	Field strength outside of the 13,110-14,010 MHz band	Pass
§ 15.225 (e)	Frequency tolerance of the carrier signal	Pass
§ 15.225 (f)	Radio frequency powered tags	Not applicable ¹
N.A. ¹ : No powered tag.		

ADDITIONAL DOCUMENTATION**16. Emission Test**

Antenna requirement	
Test date	18/11/2022
Applied Standard	FCC part 15 C
Paragraph	§15.203
Temperature	25° C
Humidity	40%
Tested by	Mattia Frescaroli
Model	Osmond R
Internal Storage No.	A003255761-003
Remarks	1

ADDITIONAL DOCUMENTATION

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

Antenna specifications

N° of authorized antenna types	1
Antenna type	PCB antenna
Maximum total gain	< 6dBi
External power amplifiers	Not present

ADDITIONAL DOCUMENTATION

Conducted emission test	
Test date	18/11/2022
Applied Standard	FCC part 15 C
Paragraph	§15.207
Test method	§ 7 of ANSI C63-4
Temperature	25° C
Humidity	40%
Tested by	Mattia Frescaroli
Model	Osmond R
Internal Storage No.	A003255761-003
Operating mode	1
Tested terminals	AC Mains input
Remarks	---

ADDITIONAL DOCUMENTATION

Test parameter of

Hardware Setup: Voltage with 2-Line-LISN R&S ENV216 150kHz-30MHz
 Measurement Type: 2 Line LISN
 Frequency Range: 150 kHz - 30 MHz
 Graphics Level Range: 0 dBμV - 90 dBμV

Preview Measurements:
 LISN Lines: N, L1, HP (150 kHz)
 Scan Test Template: Voltage with 2-Line-LISN R&S ENV216 150kHz-30MHz

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 3] 150 kHz - 30 MHz	2.25 kHz	QPK ; AVG	9 kHz	2 s	0 dB

Final Measurements:
 Template for Single Meas.: Voltage with 2-Line-LISN R&S ENV216 150kHz-30MHz fin


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 3] 150 kHz - 30 MHz	2.25 kHz	QPK ; AVG	9 kHz	1 s	0 dB

ADDITIONAL DOCUMENTATION

Graphical presentation of

Phase Line

Full Spectrum

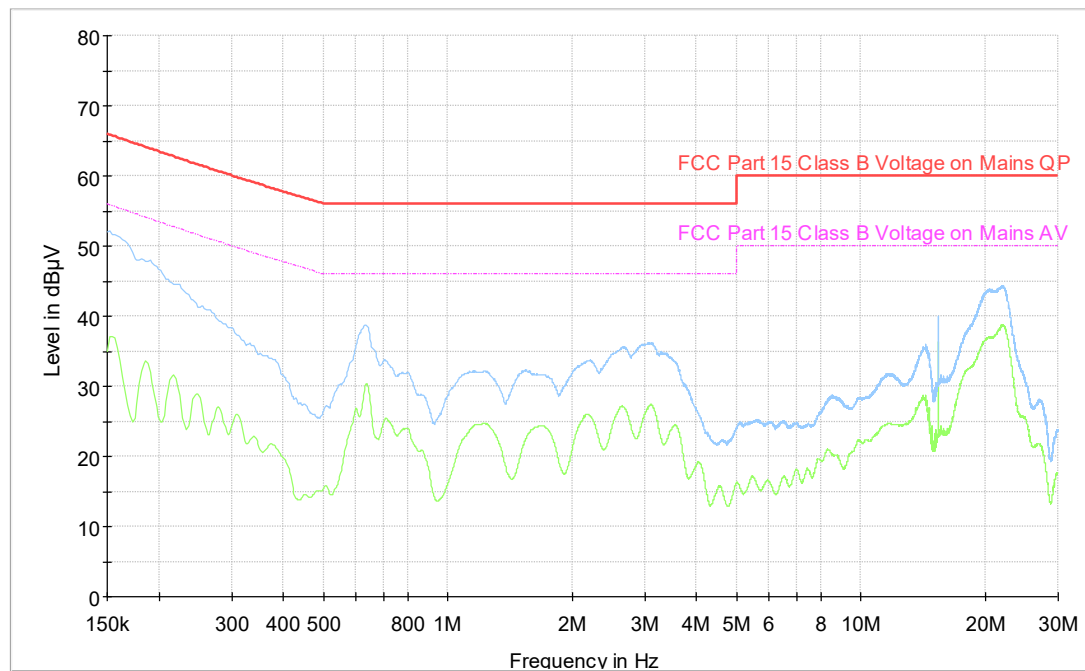

Measurement data of

Note: with RF circuit closed on 50ohm resistor.


Margin value = Measurement value – Limit value

ADDITIONAL DOCUMENTATION

Graphical presentation of

Neutral Line

Full Spectrum

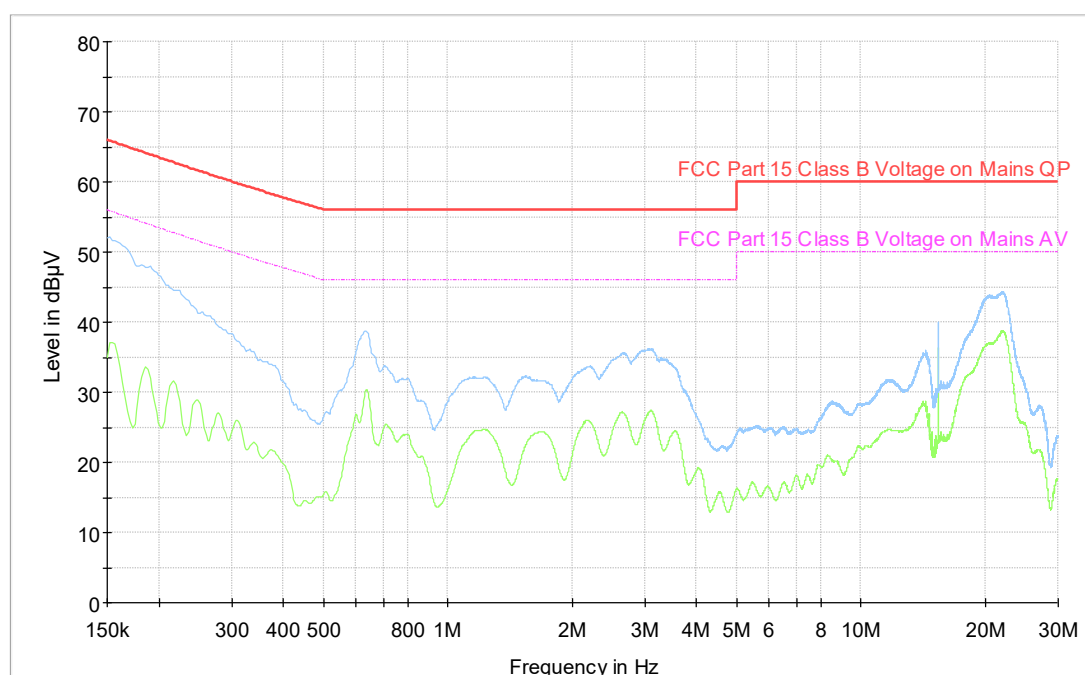

Measurement data of

Note: with RF circuit closed on 50ohm resistor

Margin value = Measurement value – Limit value

ADDITIONAL DOCUMENTATION

Radiated emission test - Field strength outside of the 13,110-14,010 MHz band	
Test date	18/11/2022
Applied Standard	FCC part 15 C
Paragraph	§15.205; §15.209; §15.225
Test method	§ 8 of ANSI C63-4
Temperature	25° C
Humidity	40%
Tested by	Mattia Frescaroli
Model	Osmond R
Internal Storage No.	A003255761-003
Operating mode	1
Tested terminals	Enclosure
Further information to test setup	For frequencies above 1GHz, the anechoic material is also placed on the metallic floor between EUT and Antenna
Remarks	In accordance with part 15.31 (f) (2), where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied in order to permit measurement to be performed at a separation distance. The applied formula for limits at 3 meter is: Extrapolation (dB) = $40\log(300\text{meter} / 3\text{meter}) = +80\text{db}$ Extrapolation (dB) = $40\log(30\text{meter} / 3\text{meter}) = +40\text{db}$

ADDITIONAL DOCUMENTATION

RANGE 9kHz-30MHz

Test parameter of

EMI Auto Test Template: Electric Field Strength with Scans 9kHz-30MHz

Hardware Setup: Electric Field Strength 9kHz-30MHz
 Measurement Type: Open-Area-Test-Site (SAC/FAR)
 Frequency Range: 9 kHz - 30 MHz
 Graphics Level Range: 0 dBμV/m - 130 dBμV/m

Preview Measurements:
 Antenna height: 100 - 100 cm , Step Size = 0 cm , Positioning Speed = 1
 Polarization: V
 Turntable position: 0 - 270 deg , Step Size = 90 deg , Positioning Speed = 3
 Scan Test Template: Electric Field Strength 9kHz-30MHz

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 3]					
9 kHz - 150 kHz	50 Hz	PK+	200 Hz	0,05 s	0 dB
150 kHz - 30 MHz	2.25 kHz	PK+	9 kHz	5 s	0 dB


Final Measurements:
 Template for Single Meas.: Electric Field Strength 9kHz-30MHz fin

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 3]					
9 kHz - 150 kHz	80 Hz	QPK	200 Hz	1 s	20 dB
150 kHz - 30 MHz	2.25 kHz	QPK ; AVG	9 kHz	1 s	20 dB

ADDITIONAL DOCUMENTATION

Graphical presentation of

Full Spectrum

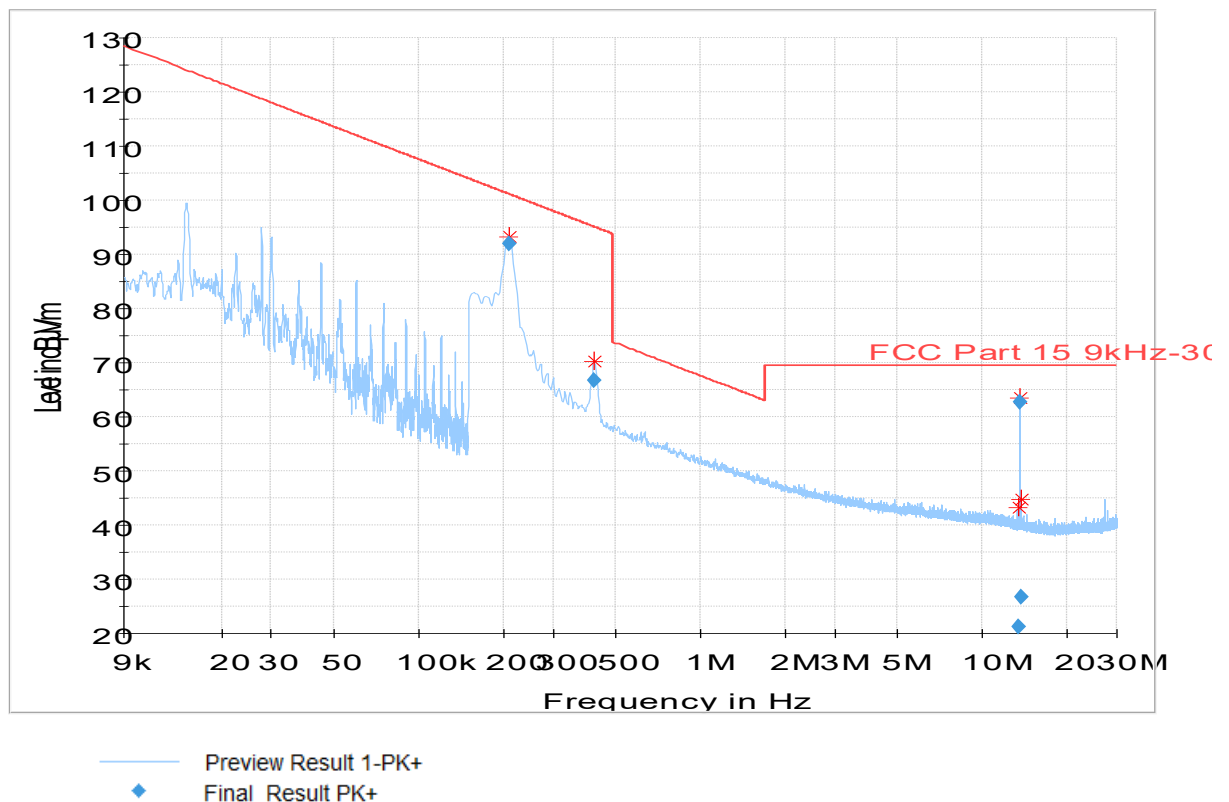

Measurement data of

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
13.454250	21.33	69.55	48.22	1000.0	9.000	100.0	V	180.0	32.9
13.668000	26.68	69.55	42.87	1000.0	9.000	100.0	V	180.0	32.9
13.562250	62.87	69.55	6.68	1000.0	9.000	100.0	V	90.0	32.9
0.417750	66.64	95.17	28.53	1000.0	9.000	100.0	V	0.0	53.7
0.208500	92.00	101.21	9.20	1000.0	9.000	100.0	V	180.0	59.7

Remarks:

Margin value = Measurement value – Limit value

ADDITIONAL DOCUMENTATION

RANGE 30-1000 MHz

Test parameter of


Hardware Setup:	Emissione irradiata 30-1000MHz HL562E 3metri
Measurement Type:	Open-Area-Test-Site (SAC/FAR)
Frequency Range:	30 MHz - 1 GHz
Graphics Level Range:	0 dBμV/m - 80 dBμV/m
 Preview Measurements:	
Antenna height:	100 - 400 cm , Step Size = 100 cm , Positioning Speed = 4
Polarization:	H + V
Turntable position:	0 - 270 deg , Step Size = 90 deg , Positioning Speed = 4
Scan Test Template:	Emissione irradiata 30-1000MHz HL562E 3metri
 Adjustment:	
Antenna height:	Range = 50 cm , Measuring Speed = 3
Turntable position:	Range = 20 deg , Measuring Speed = 3
Template for Single Meas.:	Emissione irradiata 30-1000MHz HL562E 3metri
 Final Measurements:	
Template for Single Meas.:	Emissione irradiata 30-1000MHz HL562E 3metri - fin QP

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESW 44] 30 MHz - 1 GHz	30 kHz	QPK	120 kHz	1 s	20 dB

ADDITIONAL DOCUMENTATION

Graphical presentation of

Full Spectrum

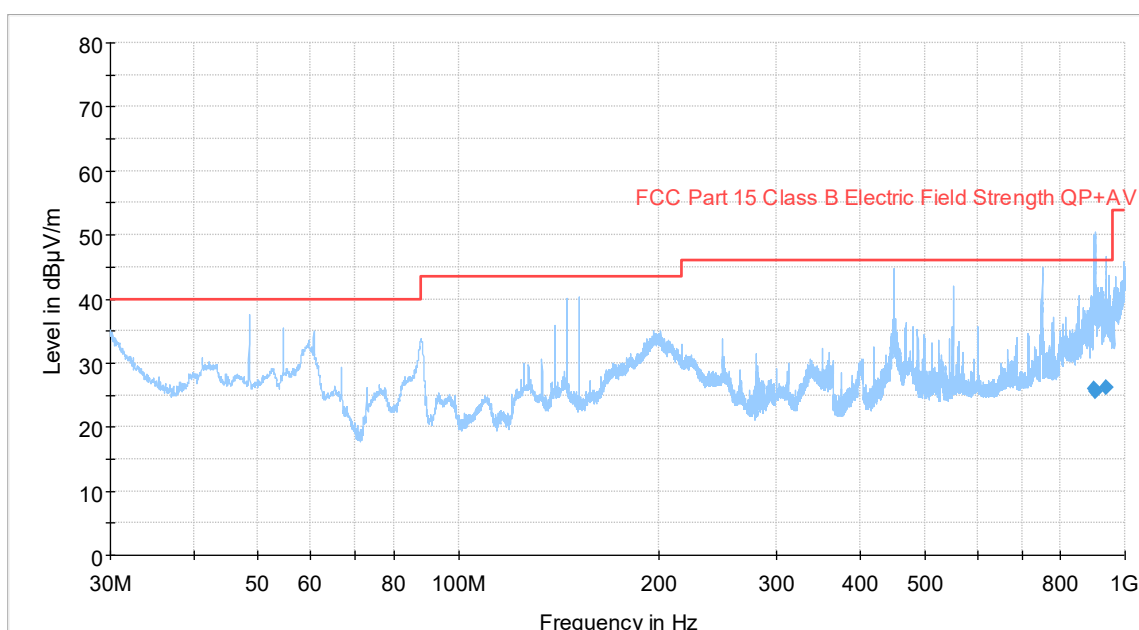

— Preview Result 1-PK+
— FCC Part 15 Class B Electric Field Strength QP+AV
◆ Final_Result QPK

Measurement data of

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
898.950000	26.04	46.00	19.96	1000.0	120.000	325.0	H	93.0	25.2
900.990000	25.50	46.00	20.50	1000.0	120.000	325.0	H	96.0	25.2
938.220000	26.07	46.00	19.93	1000.0	120.000	185.0	H	184.0	25.3

Remarks:

Margin value = Measurement value – Limit value

ADDITIONAL DOCUMENTATION

Radiated emission test - Field strength inside of the 13,110-14,010 MHz band	
Test date	21/06/2022
Applied Standard	FCC part 15 C
Paragraph	§15.225(a); §15.225(b); §15.225(c)
Temperature	25° C
Humidity	40%
Tested by	Mattia Frescaroli
Model	Osmond R
Internal Storage No.	A003255761-003
Operating mode	1
Tested terminals	Enclosure
Remarks	In accordance with part 15.31 (f) (2), where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied in order to permit measurement to be performed at a separation distance. The applied formula for limits at 3 meter is: Extrapolation (dB) = $40\log(300\text{meter} / 3\text{meter}) = +80\text{db}$ Extrapolation (dB) = $40\log(30\text{meter} / 3\text{meter}) = +40\text{db}$

ADDITIONAL DOCUMENTATION**Extrapolation from the measurement of a single point**

If field strength is measured at only a single point, then that point shall be at the radial from the EUT that produces the maximum emission at the frequency being measured, as described in 5.4. If that point is closer to the EUT than $\lambda/2\pi$ and the limit distance is greater than $\lambda/2\pi$, the measurement shall be extrapolated to the limit distance by conservatively presuming that the field strength decreases at a 40 dB/decade of distance rate to the $\lambda/2\pi$ distance, and at a 20 dB/decade of distance rate beyond $\lambda/2\pi$.

This shall be accomplished using **Equation (A)**:

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log \left(\frac{d_{\text{near field}}}{d_{\text{measure}}} \right) - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{near field}}} \right)$$

where

FS_{limit} is the calculation of field strength at the limit distance, expressed in dB μ V/m

FS_{max} is the measured field strength, expressed in dB μ V/m

$d_{\text{near field}}$ is the $\lambda/2\pi$ distance

d_{measure} is the distance of the measurement point from the EUT

d_{limit} is the reference limit distance

If the single point measured is at a distance greater than $\lambda/2\pi$, then extrapolation to the limit distance shall be calculated using Equation (B):

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

If both the single point and the limit distance are equal to or closer to the EUT than $\lambda/2\pi$, then extrapolation to the limit distance shall be calculated using Equation (C):

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

where

FS_{limit} is the calculation of field strength at the limit distance, expressed in dB μ V/m

FS_{max} is the measured field strength, expressed in dB μ V/m

$d_{\text{near field}}$ is the $\lambda/2\pi$ distance

d_{measure} is the distance of the measurement point from the EUT

d_{limit} is the reference distance or the distance of the $\lambda/2\pi$ point


ADDITIONAL DOCUMENTATION

New limit (according to equation A)						
f (MHz)	Fs limit (uV/m)	Fs limit (dBuV/m)	d(near field) (m)	d(measure) (m)	d(limit) (m)	FS (max) (dBuV/m)
13,11	106	40,51	3,64	3	30	62,2
13,41	334	50,47	3,56	3	30	72,0
13,41	334	50,47	3,56	3	30	72,0
13,553	15848	84,00	3,52	3	30	105,4
13,567	15848	84,00	3,52	3	30	105,4
13,71	334	50,47	3,48	3	30	71,8
13,71	334	50,47	3,48	3	30	71,8
14,01	106	40,51	3,41	3	30	61,6

ADDITIONAL DOCUMENTATION

Graphical presentation of

Frequency: 13.110-14.010 MHz

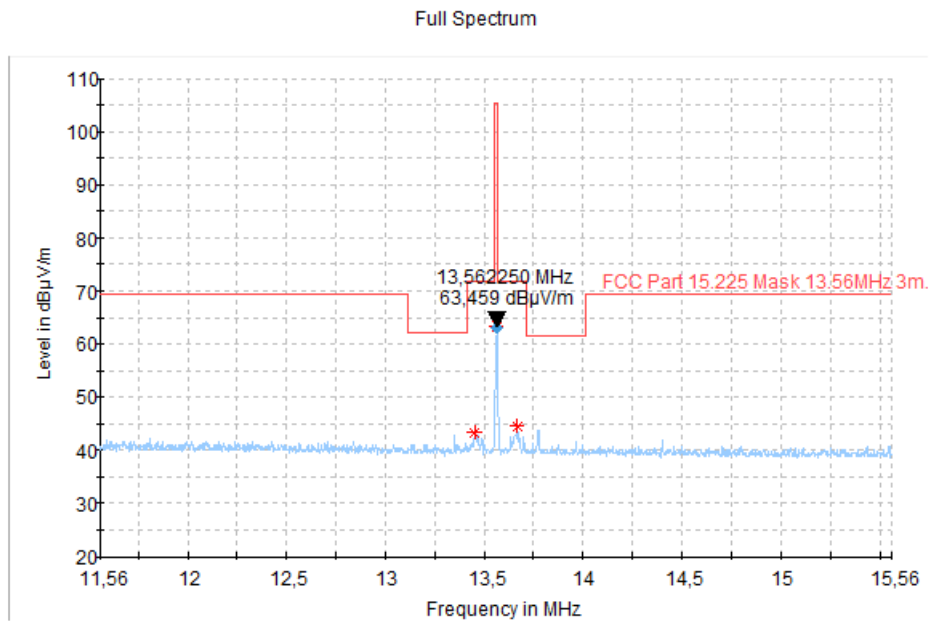


ADDITIONAL DOCUMENTATION

20dB Bandwidth	
Test date	22/06/2022
Applied Standard	FCC part 15 C
Paragraph	§15.215(c)
Temperature	25° C
Humidity	40%
Tested by	Mattia Frescaroli
Model	Osmond R
Internal Storage No.	A003255761-003
Operating mode	1
Tested terminals	Enclosure
Remarks	---

Note: Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.


ADDITIONAL DOCUMENTATION

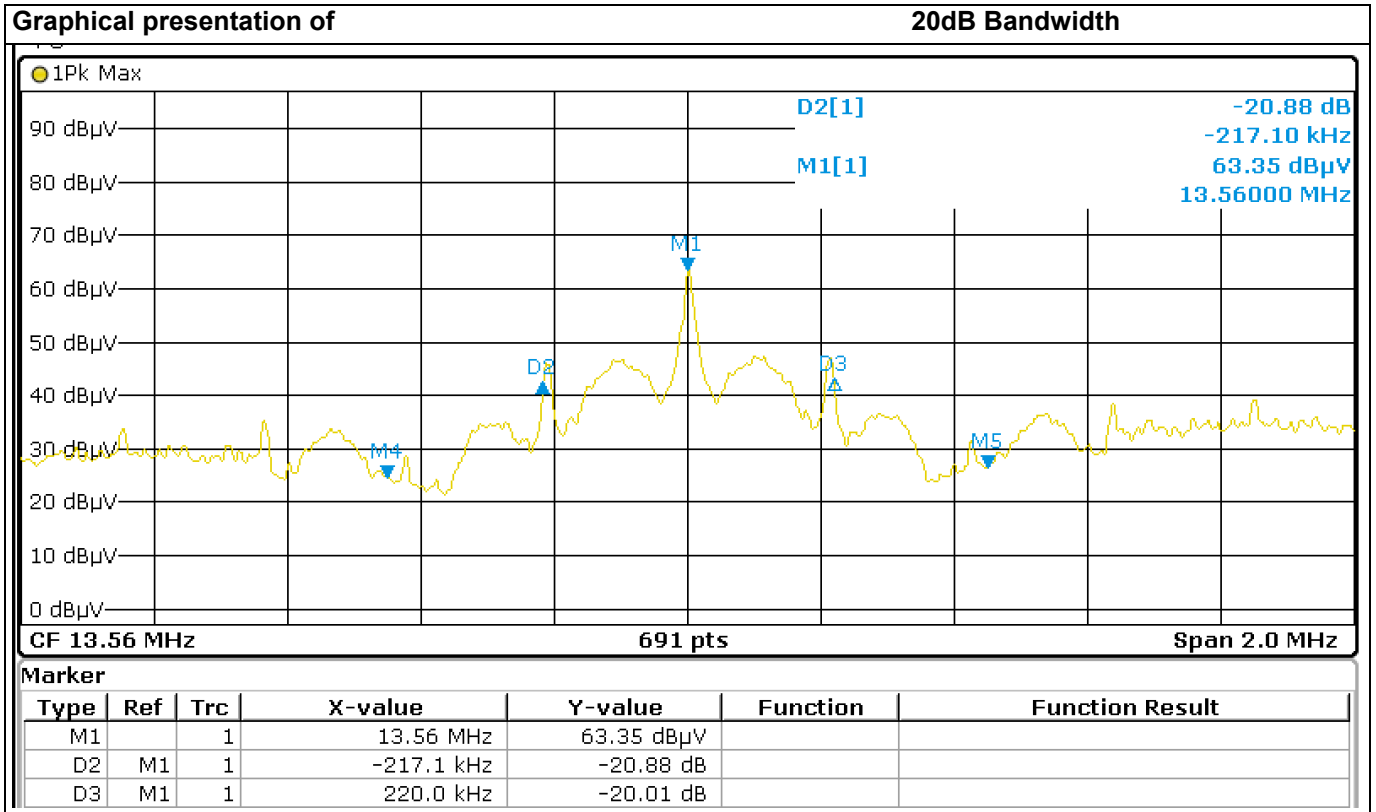

Channel (No.)	Frequency (MHz)	Channel Bandwidth at -20dB (kHz)	Plot (No.)
1	13,56	220,0	1

Bandwidth at -20dB (Fmin and Fmax)			
Fmin	13,34 MHz	Fmax	13,78 MHz

ADDITIONAL DOCUMENTATION

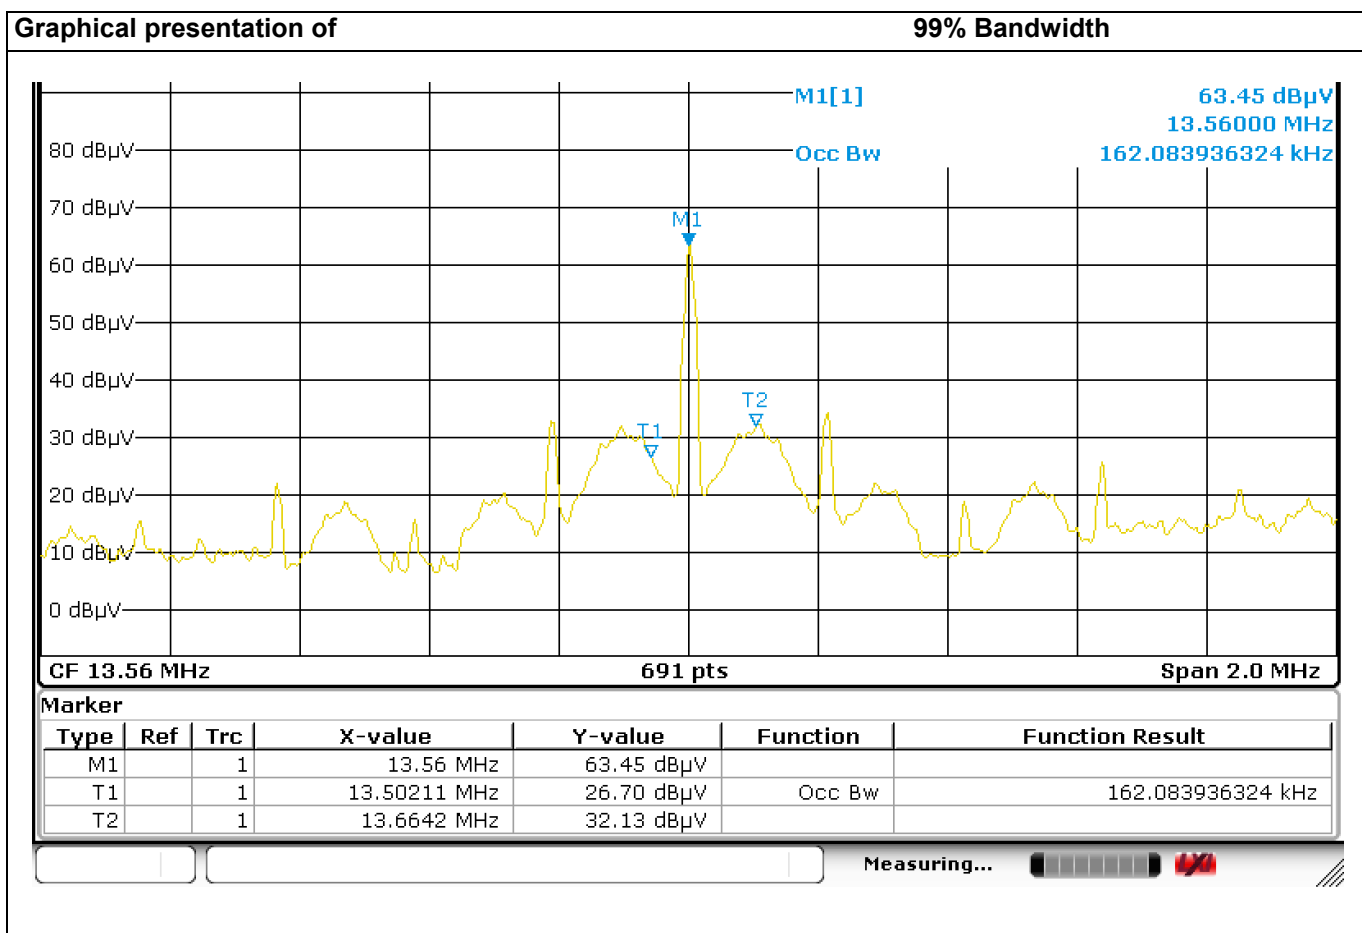

Channel (No.)	Frequency (MHz)	Channel Bandwidth at 99% (kHz)	Plot (No.)
1	13,56	162,08	1

Bandwidth at 99% (Fmin and Fmax)			
Fmin	13,50 MHz	Fmax	13,66 MHz

ADDITIONAL DOCUMENTATION

Frequency tolerance of the carrier signal	
Test date	22/06/2022
Applied Standard	FCC part 15 C
Paragraph	§15.225(e)
Temperature	25° C
Humidity	40%
Tested by	Mattia Frescaroli
Model	Osmond R
Internal Storage No.	A003255761-003
Operating mode	1
Tested terminals	Enclosure
Remarks	---
Note: the frequency tolerance of the carrier signal shall be maintained within +0.01% of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.	

ADDITIONAL DOCUMENTATION

Frequency stability

Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Frequency Delta (ppm)
25	230	13,559358	0
25	195,5	13,559358	0
25	264,5	13,559358	0

Temperature (°C)	Voltage (Vac)	Measured Frequency (MHz)	Frequency Delta (ppm)
-20	230	13,559358	0
-10	230	13,559358	0
0	230	13,559358	0
+10	230	13,559358	0
+20	230	13,559358	0
+30	230	13,559358	0
+40	230	13,559358	0
+50	230	13,559358	0

ADDITIONAL DOCUMENTATION

Additional provisions to the general radiated emission limitations.	
Test date	18/11/2022
Applied Standard	FCC part 15 C
Paragraph	§15.215 (a) (b) (c)
Temperature	25° C
Humidity	40%
Tested by	Mattia Frescaroli
Model	Osmond R
Internal Storage No.	A003255761-003
Operating mode	1
Tested terminals	Enclosure
Remarks	---

ADDITIONAL DOCUMENTATION

(A) The regulations in §§ 15.217-15.257 provide alternatives to the general radiated emission limits for intentional radiators operating in specified frequency bands. Unless otherwise stated, there are no restrictions as to the types of operation permitted under these sections.	
(B) In most cases, unwanted emissions outside of the frequency bands shown in these alternative provisions must be attenuated to the emission limits shown in Section 15.209. In no case shall the level of the unwanted emissions from an intentional radiator operating under these additional provisions exceed the field strength of the fundamental emission.	VERDICT
	PASS
(C) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least	VERDICT
	PASS

ADDITIONAL DOCUMENTATION**17. Photographic documentation: EUT Test setup**

See the Annex below:

DE2297LO 001 Annex 1

Photographic documentation

ADDITIONAL DOCUMENTATION

18. List of test equipment

Equipment	Type	Inventory no.	Manufacturer	Calibration due date
Test stand: Radiated emission test - Field strength outside of the 13,110-14,010 MHz band				
Semi-Anechoic Chamber	FACT3	2782378	ETS Lindgren	05/2024
BiConiLog Antenna	3142-E	2782348	ETS Lindgren	05/2023
Loop Antenna	6512	2782356	EMCO	07/2023
EMI Receiver	ESW44	2782867	Rohde&Schwarz	08/2023
EMI Receiver	ESU40	2782345	Rohde&Schwarz	11/2022
Software EMC32	11.40.00	---	Rohde&Schwarz	---

Equipment	Type	Inventory no.	Manufacturer	Calibration due date
Test stand: 20dB Bandwidth				
Semi-Anechoic Chamber	FACT3	2782378	ETS Lindgren	05/2024
BiConiLog Antenna	3142-E	2782348	ETS Lindgren	05/2023
Loop Antenna	6512	2782356	EMCO	07/2023
EMI Receiver	ESW44	2782867	Rohde&Schwarz	08/2023
EMI Receiver	ESU40	2782345	Rohde&Schwarz	11/2022
Software EMC32	11.40.00	---	Rohde&Schwarz	---

Test stand: Frequency tolerance of the carrier signal				
Climatic Chamber	CTS C-40/350	2789468	CTS	03/2023
Loop Antenna	6512	2782356	EMCO	07/2023
EMI Receiver	ESR3	2782768	Rohde&Schwarz	03/2023
Three-Phases Power Supply	TPS T 30K60S	2782385	Elettrotest	10/2024

ADDITIONAL DOCUMENTATION**Test stand: Conducted emission**

Semi-Anechoic Chamber	FACT3	2782378	ETS Lindgren	05/2024
EMI Receiver	ESW44	9019591	Rohde&Schwarz	08/2023
Software EMC32	11.40.00	---	Rohde&Schwarz	---
Single-phase LISN 16A	ENV216	2782895	Rohde&Schwarz	06/2023

Environmental condition

Equipment	Type	Inventory no.	Manufacturer	Calibration due date
Ambient Temperature Humidity Sensor SAC1	6152C	2782344	Davis Instruments	06/2024
Ambient Temperature Humidity Sensor ESD laboratory	T3511	2781962	Comet system	06/2024
Barometer	P3267S07801 + E1999X	2782560	TECSIS	02/2023
Climatic Chamber	C-40/350	2789461	CTS	03/2023

---END OF TEST REPORT---