

TEST REPORT

Applicant: Shenzhen Tinno Mobile Technology Corp.
27-001, South Side of Tianlong Mobile
Headquarters Building, Tongfa South Road, Xili
Community, Xili Street, Nanshan District, Shenzhen,
PRC

Address:

Equipment Type: Mobile Phone

Model Name: U1030AA (refer to section 2.3)

Brand Name: N/A

FCC ID: XD6U1030AA

Test Standard: 47 CFR Part 15 Subpart B
ANSI C63.4-2014

Sample Arrival Date: Sep. 14, 2026

Test Date: Sep. 15, 2026 - Sep. 20, 2026

Date of Issue: Sep. 30, 2026

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Gu Shuaizhen**Checked by:** Zong Liyao**Approved by:** Liao Jianming
(Technical Director)*Gu Shuaizhen**Zong Liyao**Liao Jianming*

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Sep. 30, 2026</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	3
1.1	Test Laboratory	3
1.2	Test Location	3
2	PRODUCT INFORMATION	4
2.1	Applicant Information	4
2.2	Manufacturer Information.....	4
2.3	General Description for Equipment under Test (EUT).....	4
2.4	Ancillary Equipment.....	4
2.5	Technical Information	5
3	SUMMARY OF TEST RESULTS	6
3.1	Test Standards	6
3.2	Verdict.....	6
3.3	Test Uncertainty	6
4	GENERAL TEST CONFIGURATIONS	7
4.1	Test Enclosure List.....	7
4.2	Test Configurations	7
4.3	Test Setups	8
5	TEST ITEMS	10
5.1	Emission Tests	10
ANNEX A	TEST RESULTS	15
A.1	Radiated Emission.....	15
A.2	Conducted Emission, AC Ports.....	21
ANNEX B	TEST SETUP PHOTOS	25
ANNEX C	EUT EXTERNAL PHOTOS.....	25
ANNEX D	EUT INTERNAL PHOTOS.....	25

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	601, Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☐ Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen, Guangdong
	☒ 1/F., Building B, Ganghongji High-Tech Intelligent Industrial Park, No.1008, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The certification body is American Association for Laboratory Accreditation (A2LA).

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Shenzhen Tinno Mobile Technology Corp.
Address	27-001, South Side of Tianlong Mobile Headquarters Building, Tongfa South Road, Xili Community, Xili Street, Nanshan District, Shenzhen, PRC

2.2 Manufacturer Information

Manufacturer	Shenzhen Tinno Mobile Technology Corp.
Address	27-001, South Side of Tianlong Mobile Headquarters Building, Tongfa South Road, Xili Community, Xili Street, Nanshan District, Shenzhen, PRC

2.3 General Description for Equipment under Test (EUT)

EUT Name	Mobile Phone
Model Name Under Test	U1030AA
Series Model Name	U1030AC
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in model name. (this information provided by the applicant)
Hardware Version	V1.0
Software Version	U1030AAV02.84.11
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	N/A
	Model No.	LT25H426271B
	Capacity	1450mAh
	Rated Voltage	3.8V
	Manufacturer	GUANGDONG FENGHUA NEW ENERGY CO., LTD.
Ancillary Equipment 2	Adapter	
	Brand Name	N/A
	Model No.	TN-050120U9
	Rated Input	100-240 Vac, 50/60 Hz, 0.2 A
	Rated Output	5.0 Vdc/1.2 A
	Manufacturer	Chongqing Lianmao Electronics Co., Ltd.
Ancillary Equipment 3	USB Cable	
	Length (Approx.)	1.0m

2.5 Technical Information

Network and Wireless connectivity	3G Network WCDMA/HSDPA/HSUPA/HSPA+ Band 2/4/5 4G Network FDD LTE Band 2/4/5/12/14 Bluetooth (BR+EDR+BLE) WIFI 802.11b, 802.11g, 802.11n (HT20)
Classification of equipment	Class B

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Remark
1	Radiated Emission	15.109	Pass	--
2	Conducted Emission, AC Ports	15.107	Pass	--

Note:
Compared with the EUT of test report I22Z62463-EMC01, the changes of the EUT of this report as below:
1. All the differences in the secondary supply are due to the variations in the suppliers, and change the software version, while the device specifications and materials remain the same. Other hardware circuit and software are the same as EUT referred in test report I22Z62463-EMC01.
Therefore, all the test items were retested in this report.

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9 kHz-150 KHz)-AMN	3.36 dB
Conducted emissions (150 kHz-30 MHz)-AMN	2.92 dB
Radiated emissions (30 MHz-1 GHz)	4.24 dB
Radiated emissions (1 GHz-6 GHz)	5.10 dB
Radiated emissions (6 GHz-18 GHz)	5.30 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
3.5mm Earphone	Xiaomi	M1213E1	N/A	N/A	N/A	☒

4.2 Test Configurations


All test modes of EUT are listed in the table below.

Test Mode Configuration	Description
Mode 1	<u>The Charging Test Mode</u> EUT + Adapter + USB Cable + Battery +3.5mm earphone
Mode 2	<u>The Rear Camera Test Mode</u> EUT + Adapter + USB Cable + Battery +3.5mm earphone
Mode 3	<u>The MP4+WCDMA 850MHz idle Test Mode</u> EUT + Adapter + USB Cable + Battery +MP4 + WCDMA 850MHz idle+3.5mm earphone
Mode 4	<u>The FM+ LTE Band 5 idle Mode Test Mode</u> EUT + Adapter + USB Cable + Battery +FM+ LTE Band 5 idle +3.5mm earphone


Test Case	Test Mode Configuration	Worst Mode
Radiated Emission	Mode 1~Mode 4	2
Conducted Emission, AC Ports	Mode 1~Mode 4	2
Note: All operation modes were tested, but only test data of the worst mode was presented in this report.		

4.3 Test Setups


Test Setup 1

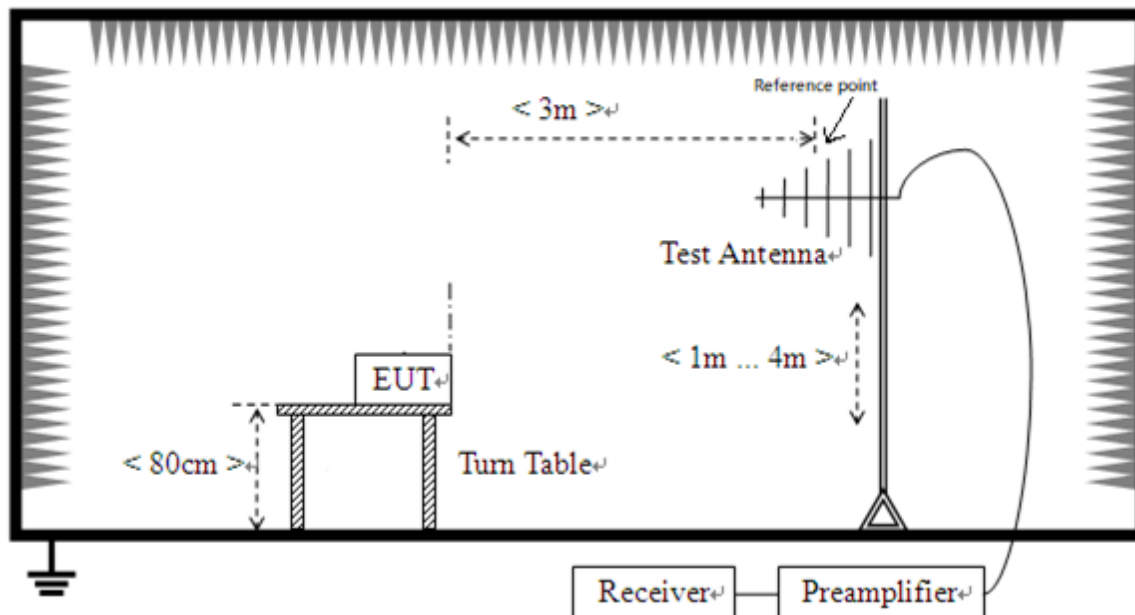

Radiated Emission (30 MHz-1 GHz)

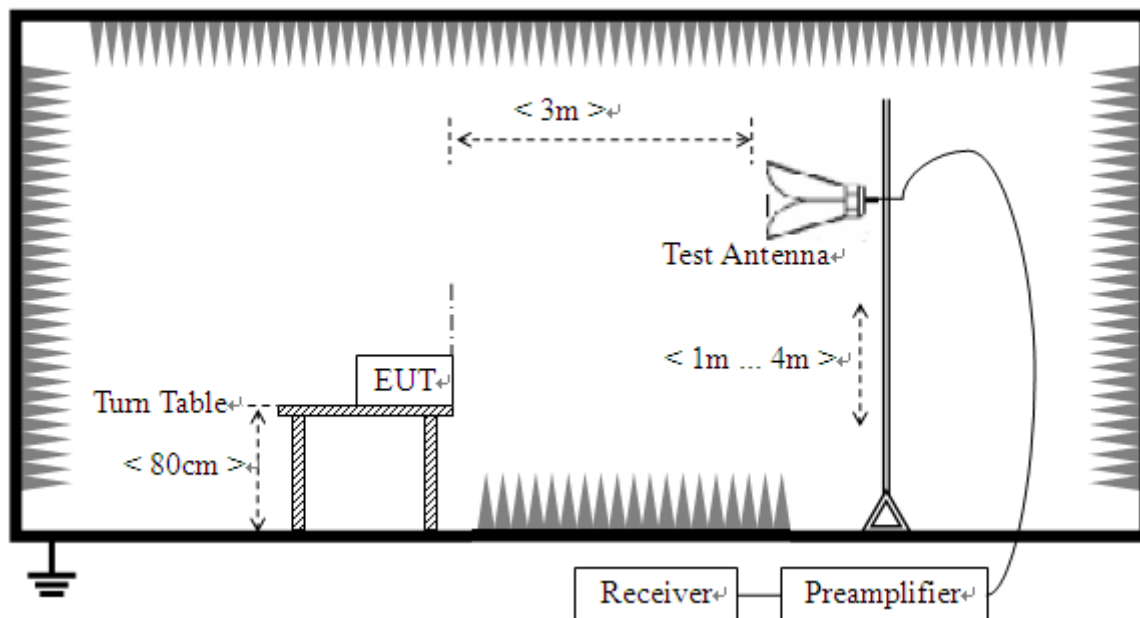

Radiated Emission (above 1 GHz)

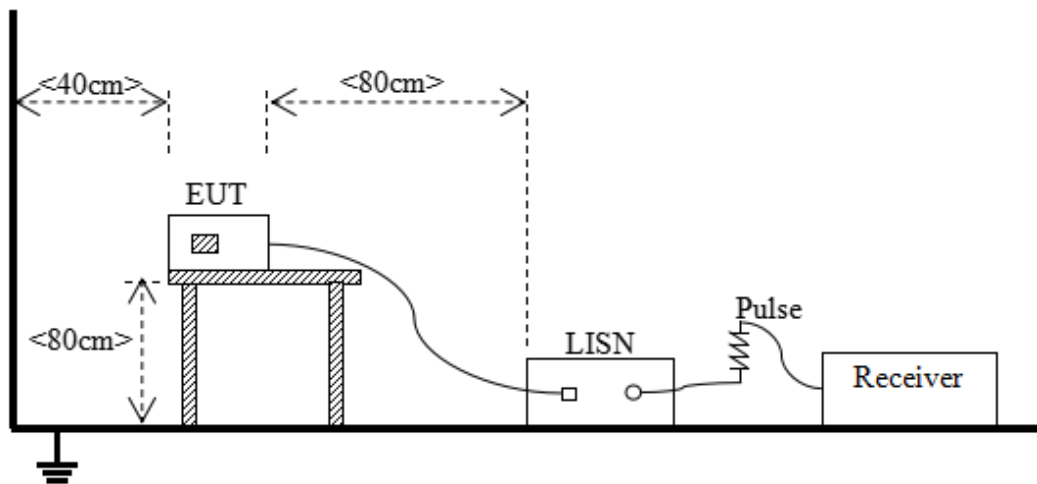Test Setup 2

Conducted Emissions, AC Ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60
NOTE:			
1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.			
2) In the emission tables above, the tighter limit applies at the band edges.			
3) For 30 MHz to 1000 MHz, the CISPR quasi-peak is employed.			

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F_M	500	54	74	60	80
Note 1: The highest measurement frequency, F_M , in GHz, shall be determined as next Table.					
Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:					
$L_{3m} = L_{10m} + 20 \cdot \log(d_{10m}/d_{3m})$					
Where:					
L_{3m} is Average Class A limit at 3m;					
L_{10m} is Average Class A limit at 10m;					
d_{10m} is Measurement distance in 10m;					
d_{3m} is Measurement distance in 3m.					
For this case: $L_{3m} = 49.5 + 20 \cdot \log(10/3) = 60$ (dB $\mu\text{V/m}$).					

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5 GHz
$F_X \geq 1 \text{ GHz}$	$5 * F_X$ or 40 GHz, whichever is lower.
Note: F_X is Highest frequency generated or used in the device or on which the device operates or tunes.	

5.1.1.2 Test Setup

Refer to 4.3 section (test setup 1) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak for $f < 1 \text{ GHz}$, peak & RMS Average for $f \geq 1 \text{ GHz}$

Trace = max hold

5.1.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit - Results

5.1.2 Conducted Emission, AC Ports

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.3 section test (test setup 2) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 kHz

VBW $\geq$ RBW

Sweep = 10ms

Detector function = peak & Average

Trace = max hold

5.1.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

NOTE:

1. Results (dBμV) = Reading (dBμV) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit - Results

ANNEX A TEST RESULTS

A.1 Radiated Emission


Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Sample No.	S04	Temperature	22.9℃
Humidity	46%RH	Pressure	99.7kPa
Test Engineer	Tang Xuming	Test Date	2026.09.20


Test Mode 2

1) Test Antenna Vertical, 30 MHz – 1 GHz

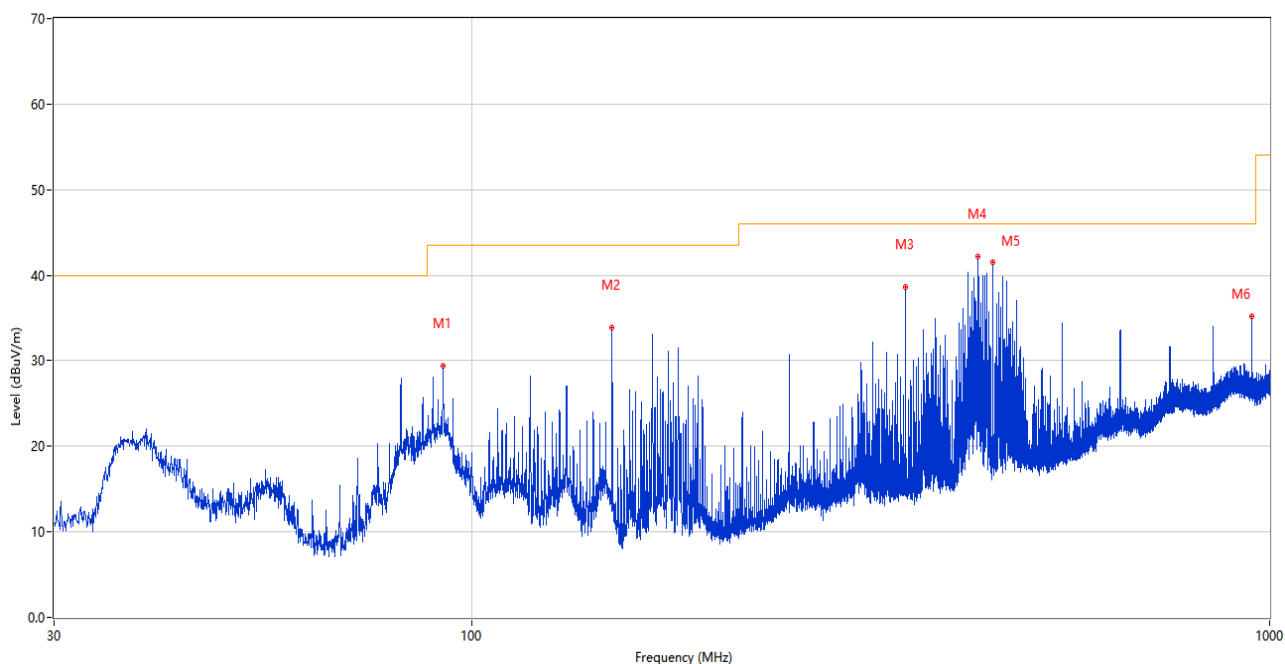

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	92.080	29.44	-27.53	43.5	14.06	Peak	273.00	100	Vertical	Pass
2	149.989	33.93	-29.74	43.5	9.57	Peak	300.00	100	Vertical	Pass
3	350.003	38.58	-21.41	46.0	7.42	Peak	360.00	100	Vertical	Pass
4	431.580	42.15	-19.79	46.0	3.85	Peak	148.00	100	Vertical	Pass
5	450.010	41.57	-19.59	46.0	4.43	Peak	190.00	100	Vertical	Pass
6	949.997	35.20	-8.96	46.0	10.80	Peak	156.00	100	Vertical	Pass


2) Test Antenna Horizontal, 30 MHz – 1 GHz

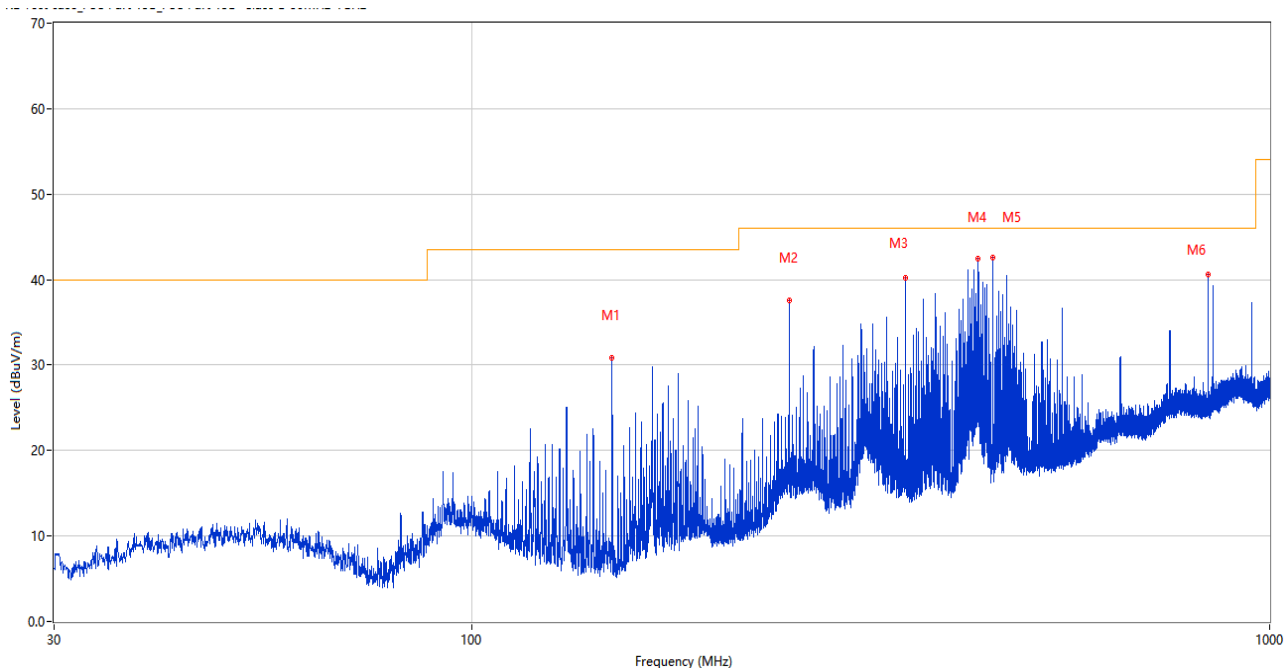

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	149.989	30.82	-29.74	43.5	12.68	Peak	251.00	200	Horizontal	Pass
2	249.996	37.54	-24.18	46.0	8.46	Peak	266.00	100	Horizontal	Pass
3	350.003	40.23	-21.41	46.0	5.77	Peak	74.00	100	Horizontal	Pass
4	431.580	42.47	-19.79	46.0	3.53	Peak	346.00	100	Horizontal	Pass
5	450.010	42.52	-19.59	46.0	3.48	Peak	360.00	100	Horizontal	Pass
6	836.652	40.62	-11.31	46.0	5.38	Peak	111.00	100	Horizontal	Pass


Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Below 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330121	2025.12.26	2026.12.25	☒
Test Antenna- Bi-Log	SCHWARZB ECK	VULB 9163	01414	2023.11.03	2026.11.02	☒
Amplifier (30MHz-1GHz)	COM-MW	ZT30-1000M	19061432	2026.04.15	2027.04.14	☒
Anechoic Chamber	EMC Electronic Co., Ltd	C8-966	107	2024.05.12	2027.05.11	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.4 en	/		☒

3) Test Antenna Vertical, 1 GHz – 18 GHz

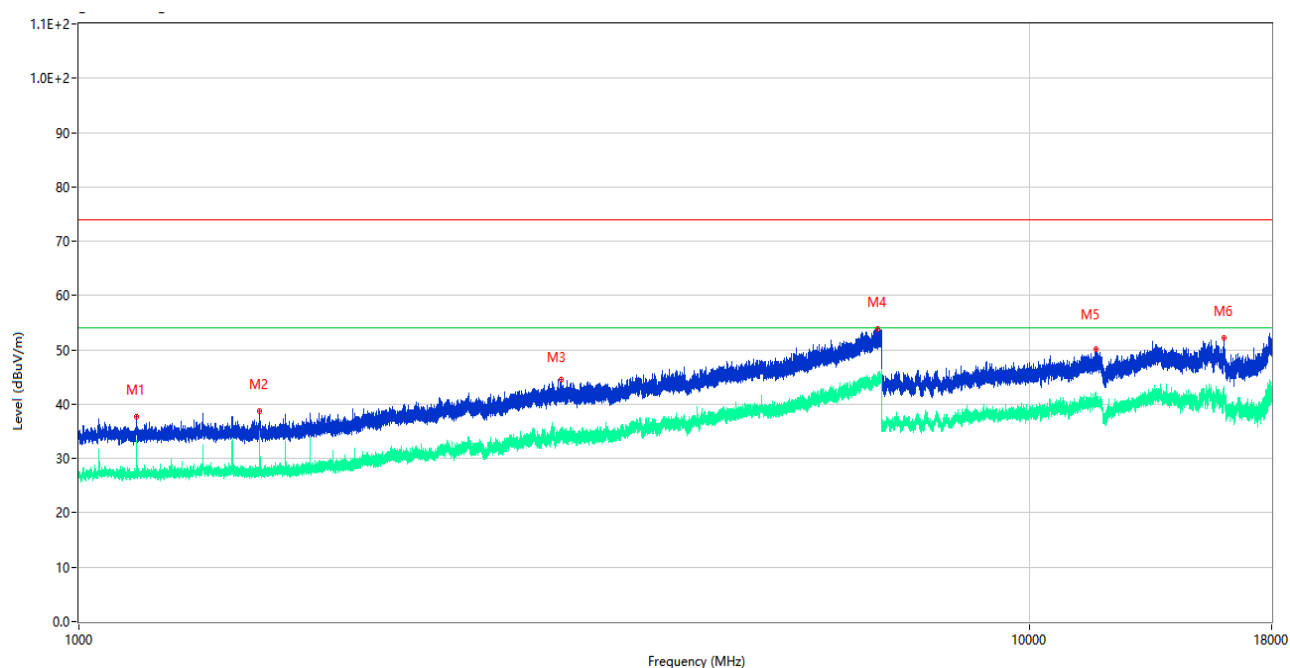

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1150.150	37.62	-17.76	74.0	36.38	Peak	0.00	100	Vertical	Pass
1**	1150.150	33.40	-17.76	54.0	20.60	AV	0.00	100	Vertical	Pass
2	1550.420	38.67	-17.91	74.0	35.33	Peak	360.00	100	Vertical	Pass
2**	1550.420	34.05	-17.91	54.0	19.95	AV	360.00	100	Vertical	Pass
3	3218.710	44.62	-9.07	74.0	29.38	Peak	23.00	100	Vertical	Pass
3**	3218.710	34.69	-9.07	54.0	19.31	AV	23.00	100	Vertical	Pass
4	6921.290	53.92	0.70	74.0	20.08	Peak	149.00	100	Vertical	Pass
4**	6921.290	44.73	0.70	54.0	9.27	AV	149.00	100	Vertical	Pass
5	11758.050	50.23	5.61	74.0	23.77	Peak	158.00	100	Vertical	Pass
5**	11758.050	41.10	5.61	54.0	12.90	AV	158.00	100	Vertical	Pass
6	16043.650	52.26	8.94	74.0	21.74	Peak	253.00	100	Vertical	Pass
6**	16043.650	41.70	8.94	54.0	12.30	AV	253.00	100	Vertical	Pass

4) Test Antenna Horizontal, 1 GHz – 18 GHz

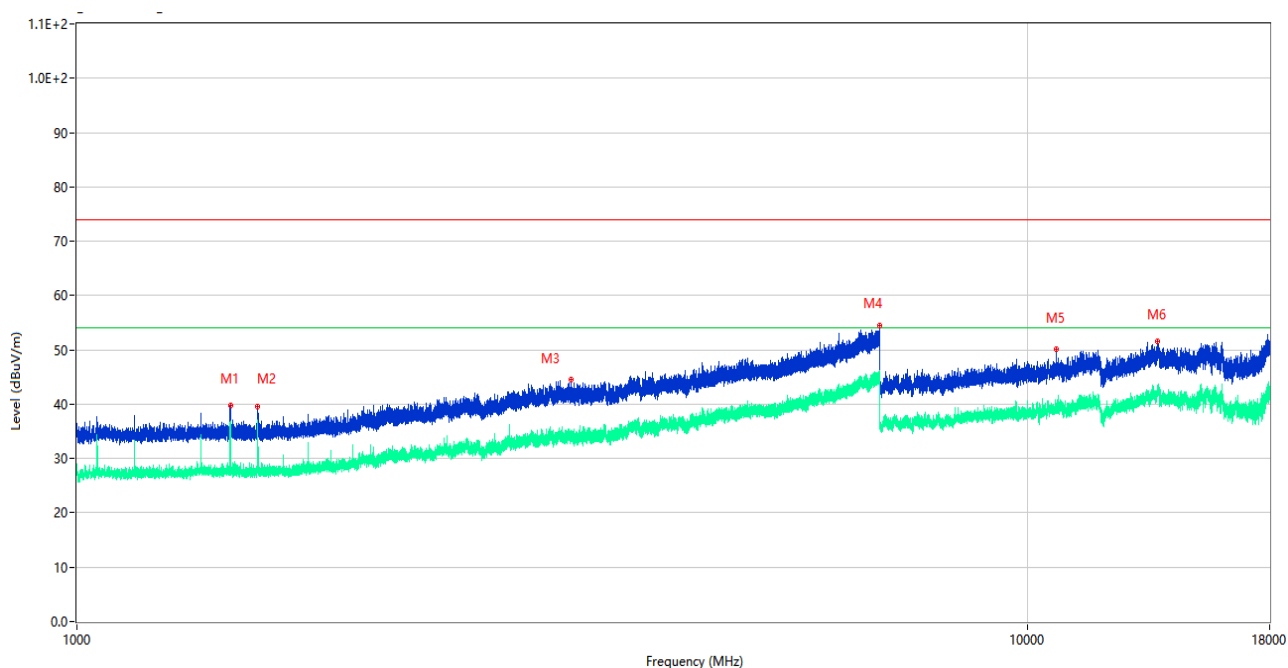

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1450.060	39.82	-17.84	74.0	34.18	Peak	233.00	100	Horizontal	Pass
1**	1450.060	35.58	-17.84	54.0	18.42	AV	233.00	100	Horizontal	Pass
2	1550.030	39.47	-17.91	74.0	34.53	Peak	348.00	100	Horizontal	Pass
2**	1550.030	37.07	-17.91	54.0	16.93	AV	348.00	100	Horizontal	Pass
3	3314.520	44.62	-8.80	74.0	29.38	Peak	113.00	100	Horizontal	Pass
3**	3314.520	33.70	-8.80	54.0	20.30	AV	113.00	100	Horizontal	Pass
4	6993.200	54.47	0.83	74.0	19.53	Peak	188.00	100	Horizontal	Pass
4**	6993.200	44.69	0.83	54.0	9.31	AV	188.00	100	Horizontal	Pass
5	10721.299	50.23	2.30	74.0	23.77	Peak	361.00	100	Horizontal	Pass
5**	10721.299	39.16	2.30	54.0	14.84	AV	361.00	100	Horizontal	Pass
6	13716.050	51.58	5.86	74.0	22.42	Peak	86.00	100	Horizontal	Pass
6**	13716.050	42.19	5.86	54.0	11.81	AV	86.00	100	Horizontal	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Above 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330121	2025.12.26	2026.12.25	☒
Test Antenna-Horn	SCHWARZB ECK	BBHA 9120D	02459	2023.10.26	2026.10.25	☒
Amplifier (1-12GHz)	COM-MW	LSCX-LMA1-12G-01	19061431	2026.04.15	2027.04.14	☒
Amplifier (7-18GHz)	COM-MW	XKu_LNA7-18G-01	07210208	2026.04.15	2027.04.14	☒
Anechoic Chamber	EMC Electronic Co., Ltd	C8-966	107	2024.05.12	2027.05.11	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.4 en	/		☒


A.2 Conducted Emission, AC Ports

Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Sample No.	S04	Temperature	22.1℃
Humidity	52%RH	Pressure	100.7kPa
Test Engineer	Tang Xuming	Test Date	2026.09.15


Test Mode 2

1) AC Ports - L Phase

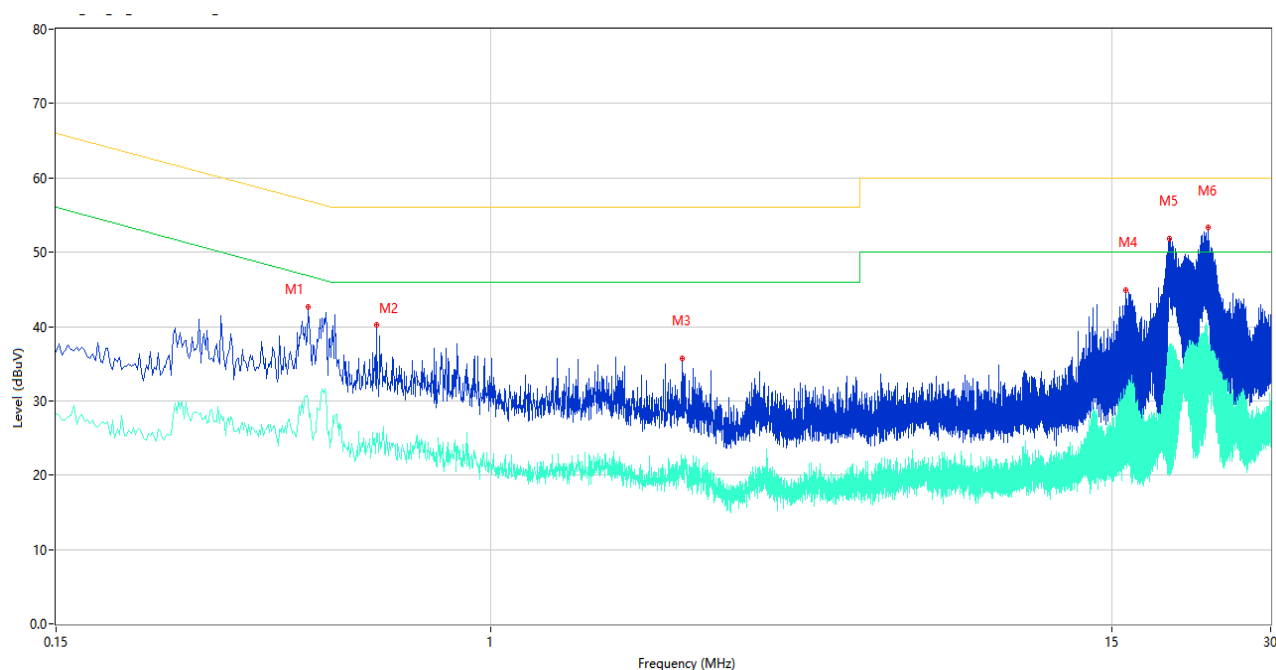

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.450	42.61	10.25	56.88	14.27	Peak	L	Pass
1**	0.450	29.98	10.25	46.88	16.90	AV	L	Pass
2	0.606	40.25	10.26	56.00	15.75	Peak	L	Pass
2**	0.606	25.62	10.26	46.00	20.38	AV	L	Pass
3	2.300	35.77	10.51	56.00	20.23	Peak	L	Pass
3**	2.300	20.82	10.51	46.00	25.18	AV	L	Pass
4	15.974	44.85	14.10	60.00	15.15	Peak	L	Pass
4**	15.974	31.06	14.10	50.00	18.94	AV	L	Pass
5	19.308	51.90	14.90	60.00	8.10	Peak	L	Pass
5**	19.308	36.43	14.90	50.00	13.57	AV	L	Pass
6	22.856	53.29	15.52	60.00	6.71	Peak	L	Pass
6**	22.856	36.50	15.52	50.00	13.50	AV	L	Pass

2) AC Ports - N Phase

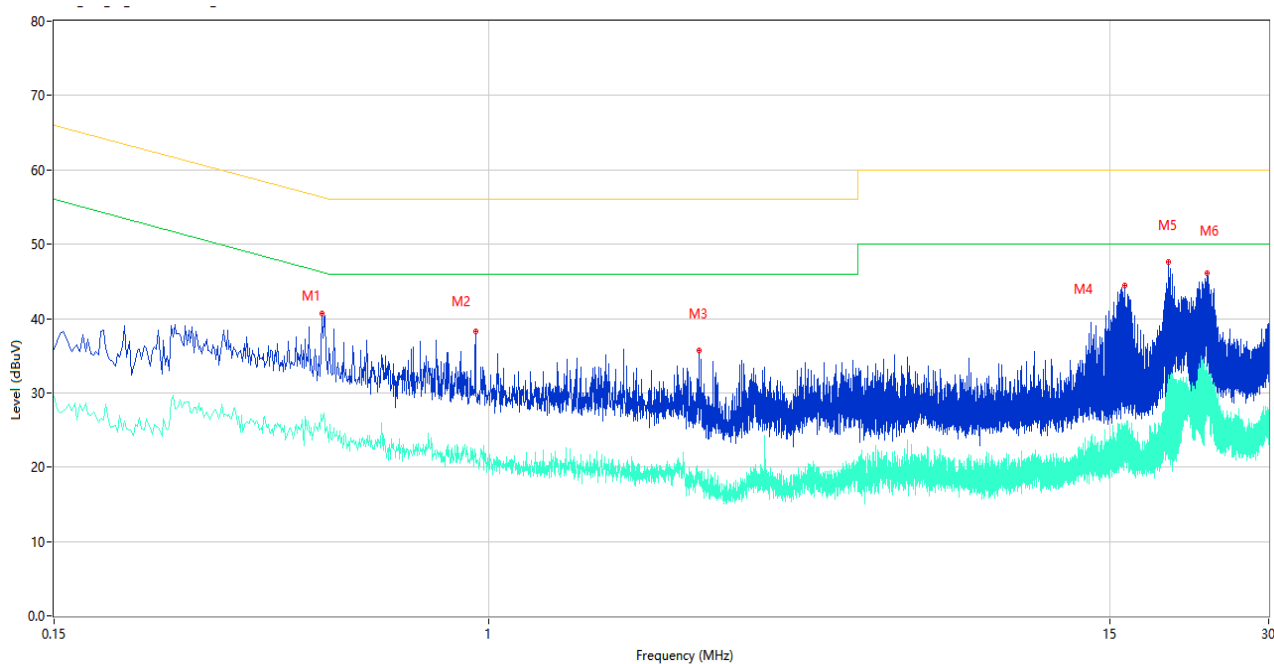

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.482	40.72	10.23	56.30	15.58	Peak	N	Pass
1**	0.482	26.24	10.23	46.30	20.06	AV	N	Pass
2	0.944	38.24	10.28	56.00	17.76	Peak	N	Pass
2**	0.944	21.80	10.28	46.00	24.20	AV	N	Pass
3	2.500	35.72	10.51	56.00	20.28	Peak	N	Pass
3**	2.500	19.39	10.51	46.00	26.61	AV	N	Pass
4	16.030	44.39	14.13	60.00	15.61	Peak	N	Pass
4**	16.030	25.96	14.13	50.00	24.04	AV	N	Pass
5	19.390	47.65	15.01	60.00	12.35	Peak	N	Pass
5**	19.390	31.45	15.01	50.00	18.55	AV	N	Pass
6	22.922	46.06	15.62	60.00	13.94	Peak	N	Pass
6**	22.922	29.78	15.62	50.00	20.22	AV	N	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038B	MY61380132	2025.12.26	2026.12.25	☒
LISN	SCHWARZBECK	NSLK 8127	01009	2026.06.22	2027.06.21	☒
Shielded Room	YiHeng Electronic Co., Ltd	/	235	2024.11.05	2027.11.04	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.4 en	/		☒

ANNEX B TEST SETUP PHOTOS

Please refer the document “Ti-CC26090196-AE-1.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “Ti-CC26090196-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “Ti-CC26090196-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--