

Ti-CC26050303-ASC
System Check:750Mhz

Date: 2026.06.08

Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.5°C Liquid Temperature:21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(10.06, 10.62, 10.22) Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW750/Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.892 W/kg

CW750/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.85 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.856 W/kg; SAR(10 g) = 0.582 W/kg

Smallest distance from peaks to all points 3 dB below = 17.8 mm

Ratio of SAR at M2 to SAR at M1 = 61.4%

Maximum value of SAR (measured) = 0.897 W/kg

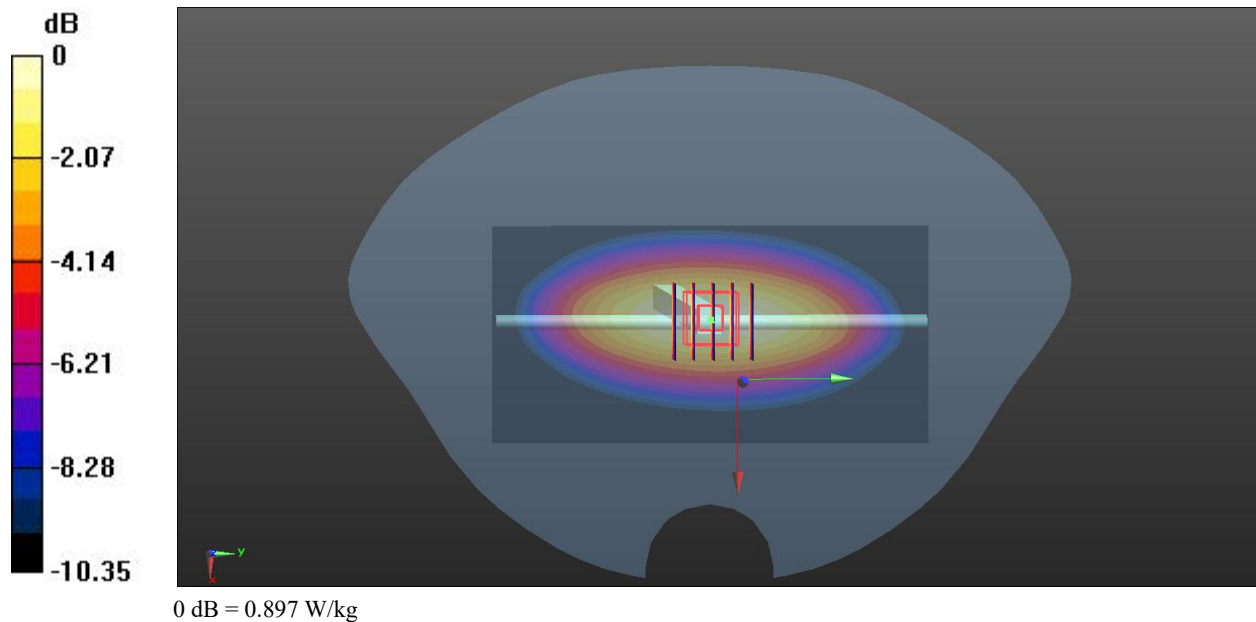

Ti-CC26050303-ASC
System Check:750Mhz

Date: 2026.06.09

Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 42.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(10.06, 10.62, 10.22) Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW750/Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.899 W/kg

CW750/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.84 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.861 W/kg; SAR(10 g) = 0.585 W/kg

Smallest distance from peaks to all points 3 dB below = 20.1 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 0.904 W/kg

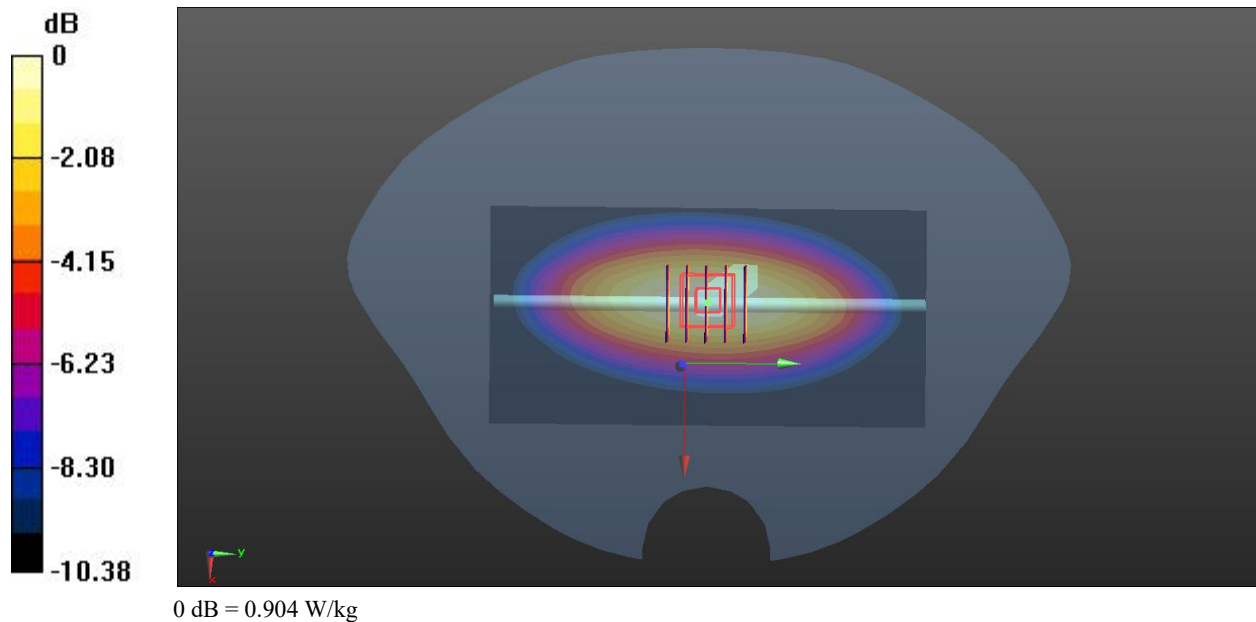

Ti-CC26050303-ASC
System Check:750Mhz

Date: 2026.06.10

Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.766$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.1°C Liquid Temperature:21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(10.06, 10.62, 10.22) Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW750/Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.882 W/kg

CW750/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.63 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.854 W/kg; SAR(10 g) = 0.575 W/kg

Smallest distance from peaks to all points 3 dB below = 16.3 mm

Ratio of SAR at M2 to SAR at M1 = 58.6%

Maximum value of SAR (measured) = 0.886 W/kg

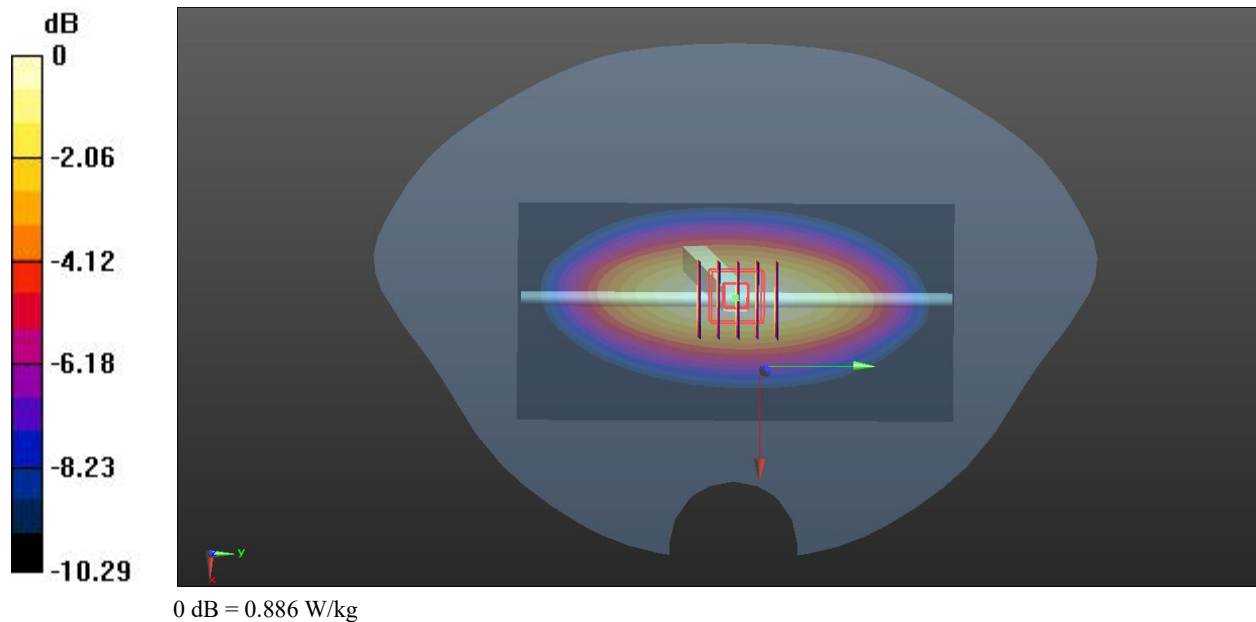

Ti-CC26050303-ASC
System Check:750Mhz

Date: 2026.06.11

Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.147$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C Liquid Temperature:21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(10.06, 10.62, 10.22) Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW750/Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.863 W/kg

CW750/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.75 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.832 W/kg; SAR(10 g) = 0.561 W/kg

Smallest distance from peaks to all points 3 dB below = 18.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 0.861 W/kg

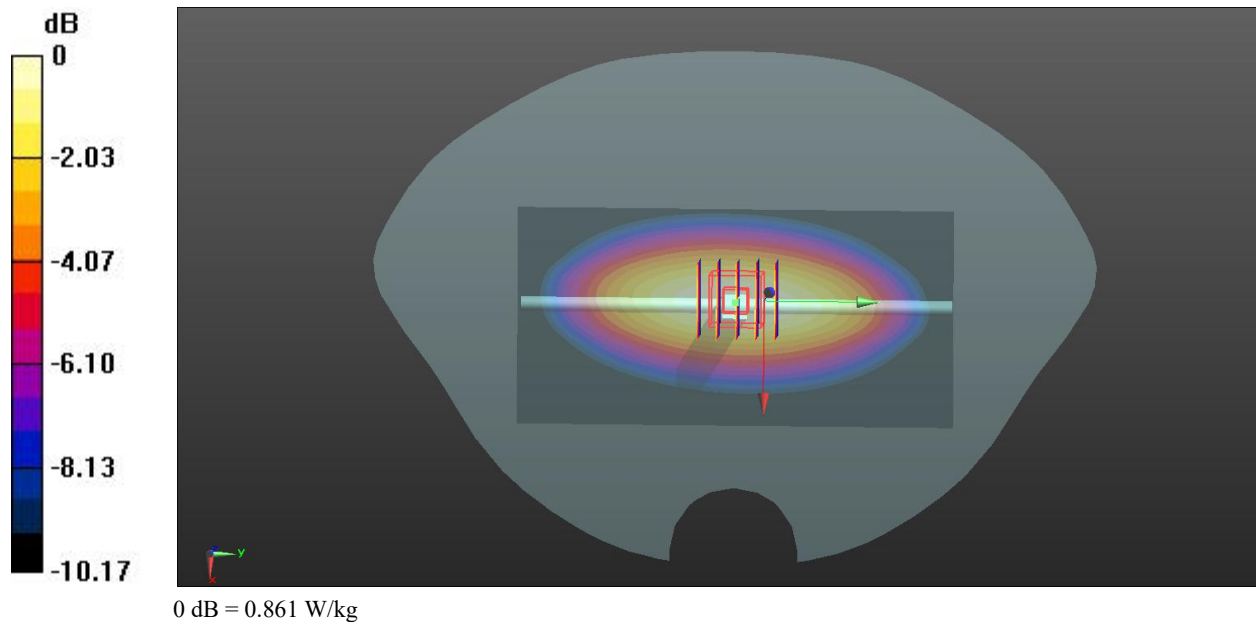

Ti-CC26050303-ASC
System check:835MHz

Date: 2026.06.12

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 41.932$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(9.85, 10.39, 10) Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW835/Area Scan (51x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.22 W/kg

CW835/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 33.24 V/m ; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.965 W/kg ; SAR(10 g) = 0.652 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 50.3%

Maximum value of SAR (measured) = 1.31 W/kg

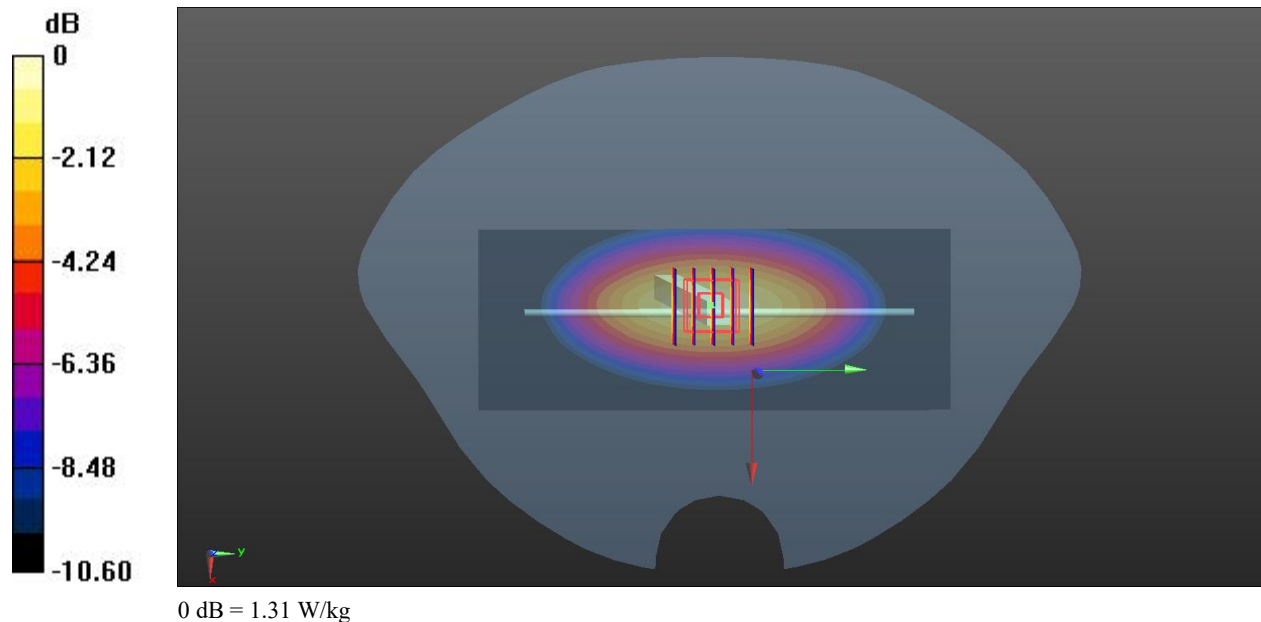

Ti-CC26050303-ASC
System check:835MHz

Date: 2026.06.13

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.888 \text{ S/m}$; $\epsilon_r = 42.239$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature:22.2°C Liquid Temperature:21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(9.85, 10.39, 10) Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW835/Area Scan (51x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.19 W/kg

CW835/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 34.18 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.985 W/kg; SAR(10 g) = 0.639 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 59.4%

Maximum value of SAR (measured) = 1.26 W/kg

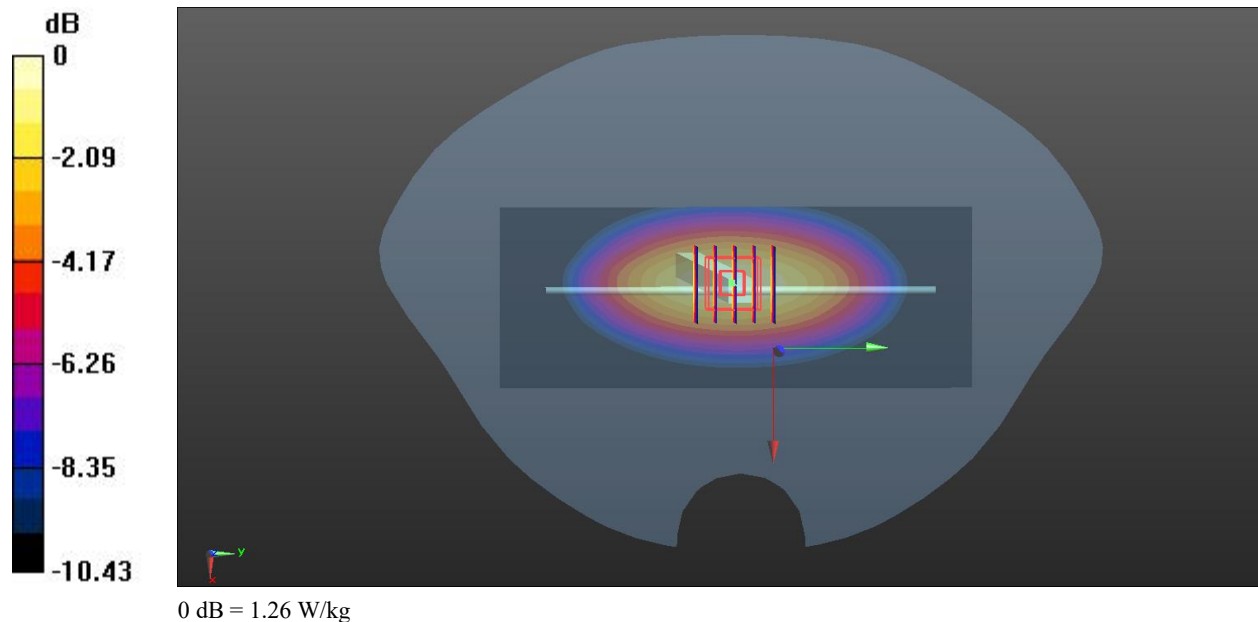

Ti-CC26050303-ASC
System check:1750MHz

Date: 2026.06.14

Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 38.906$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C Liquid Temperature:21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(8.28, 8.74, 8.41) Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW1750/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.55 W/kg

CW1750/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.10 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 6.85 W/kg

SAR(1 g) = 3.85 W/kg; SAR(10 g) = 2.05 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 59%

Maximum value of SAR (measured) = 4.62 W/kg

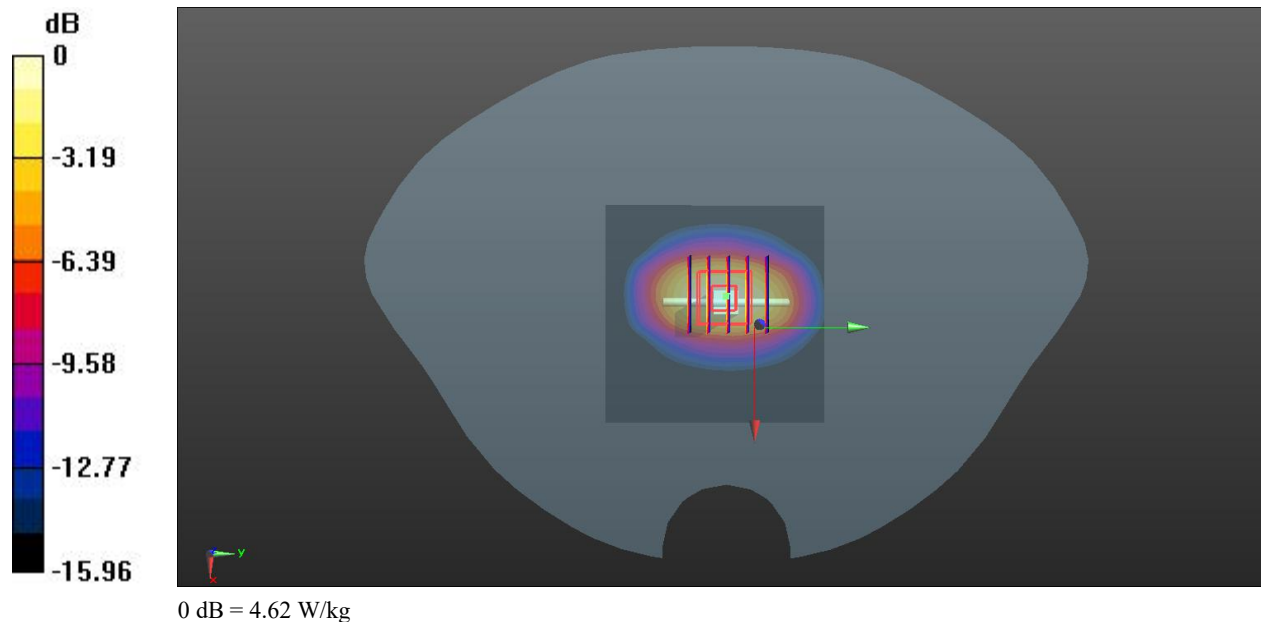

Ti-CC26050303-ASC
System check:1750MHz

Date: 2026.06.15

Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 39.266$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.6°C Liquid Temperature:21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(8.28, 8.74, 8.41) Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW1750/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 4.65 W/kg

CW1750/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 57.10 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 6.85 W/kg

SAR(1 g) = 3.82W/kg; SAR(10 g) = 2.01 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 60%

Maximum value of SAR (measured) = 4.43 W/kg

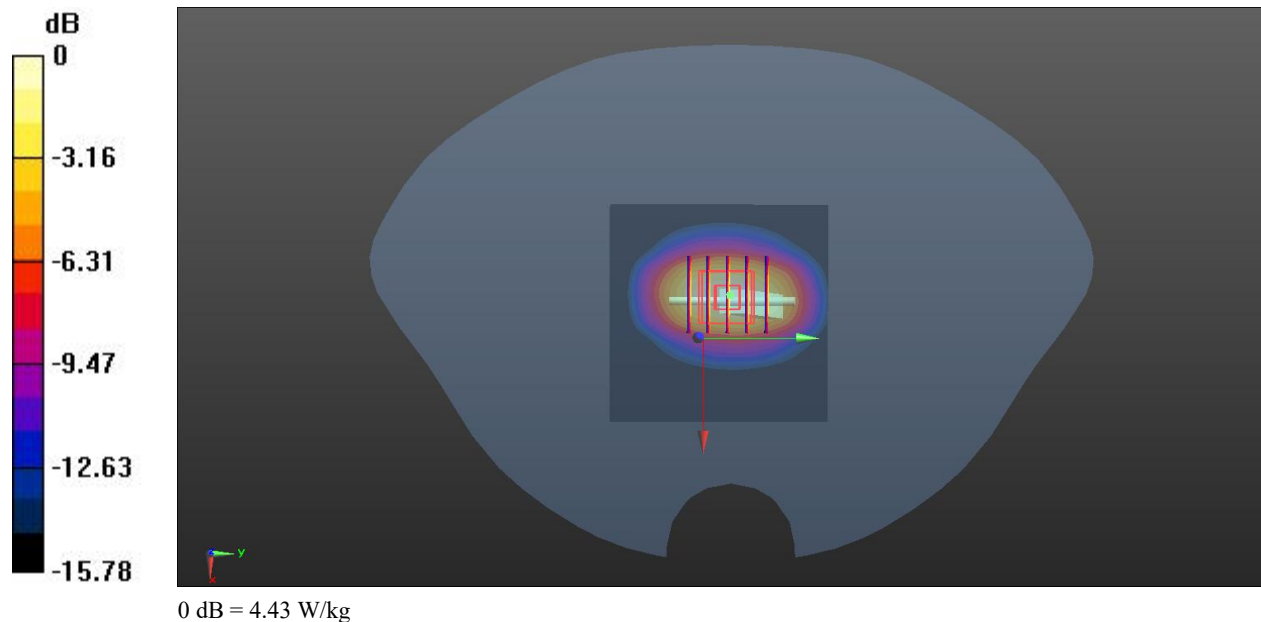

Ti-CC26050303-ASC
System check:1750MHz

Date: 2026.06.16

Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.615$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.9°C Liquid Temperature:21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(8.28, 8.74, 8.41) Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW1750/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 4.61 W/kg

CW1750/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 57.10 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 6.85 W/kg

SAR(1 g) = 3.79 W/kg; SAR(10 g) = 1.99 W/kg

Smallest distance from peaks to all points 3 dB below = 10.5 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 4.25 W/kg

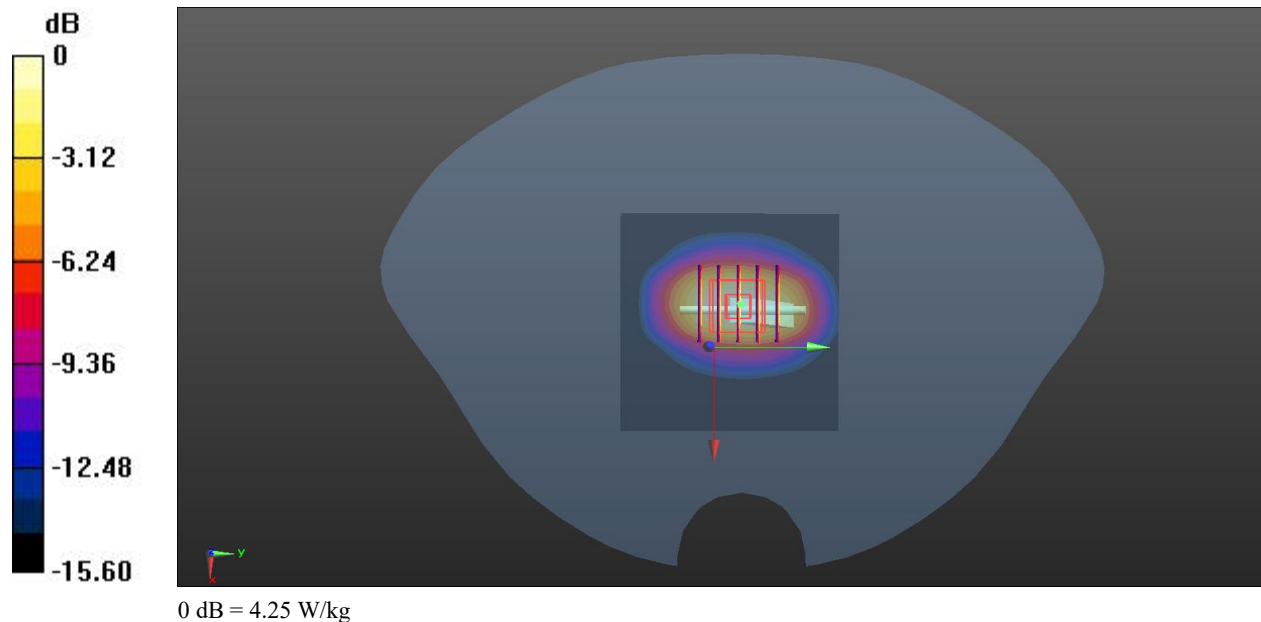

Ti-CC26050303-ASC

System check:1750MHz

Date: 2026.07.15

Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 41.266$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(8.28, 8.74, 8.41) Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW1750/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.63 W/kg

CW1750/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.81 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 5.75 W/kg

SAR(1 g) = 3.75 W/kg; SAR(10 g) = 2.03 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 58.2%

Maximum value of SAR (measured) = 3.81 W/kg

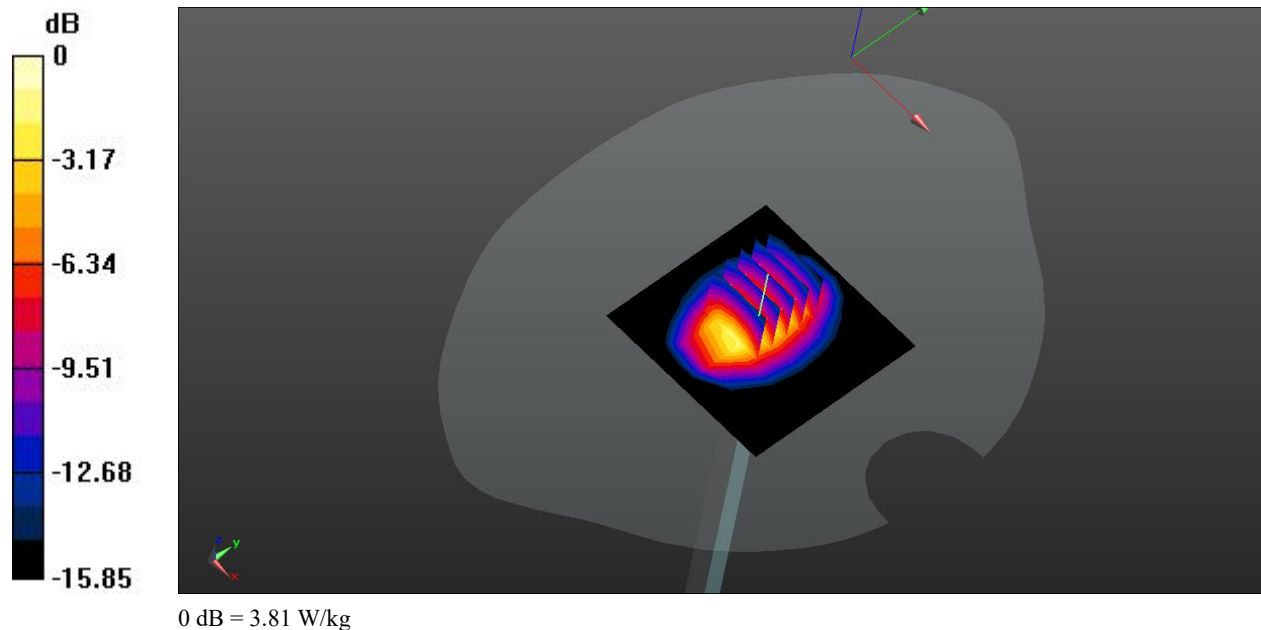

System check:1950MHz

Date: 2026.06.17

Communication System Band: D1950 (1950.0 MHz); Frequency: 1950 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1950 \text{ MHz}$; $\sigma = 1.439 \text{ S/m}$; $\epsilon_r = 38.828$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature:22.7°C Liquid Temperature:21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.79, 8.23, 7.92) Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW1950/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 5.44 W/kg

CW1950/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.38 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 8.03 W/kg

SAR(1 g) = 4.27 W/kg; SAR(10 g) = 2.21 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 4.86 W/kg

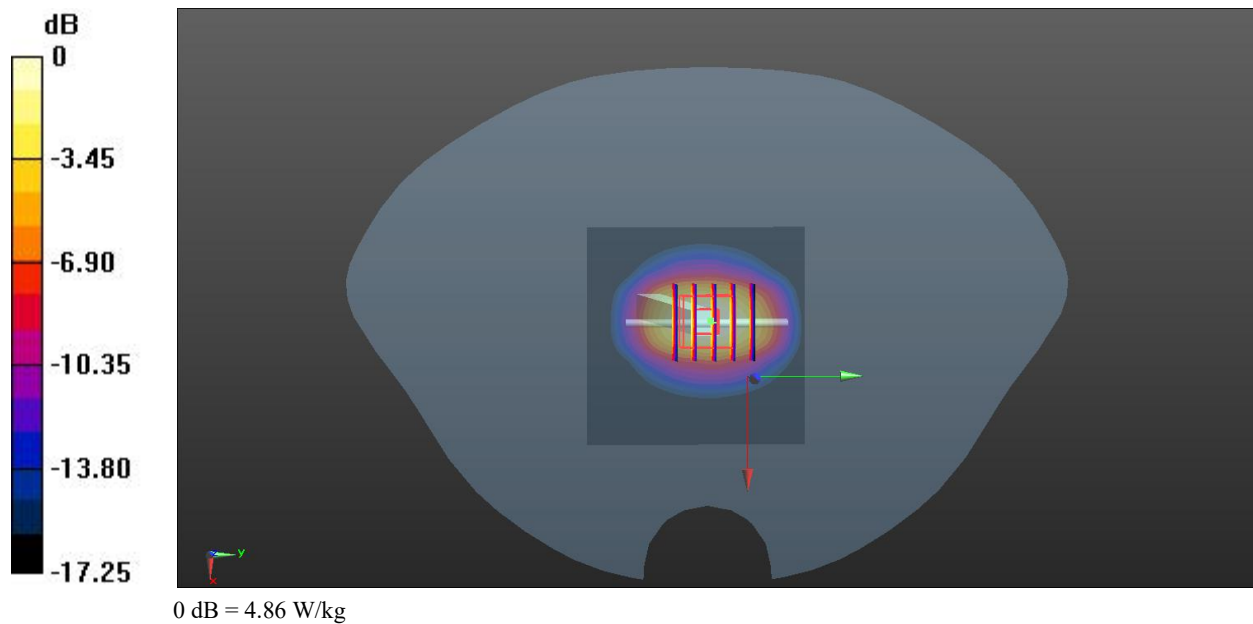

Ti-CC26050303-ASC
System check:1950MHz

Date: 2026.06.18

Communication System Band: D1950 (1950.0 MHz); Frequency: 1950 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1950$ MHz; $\sigma = 1.426$ S/m; $\epsilon_r = 39.044$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.6°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.79, 8.23, 7.92) Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW1950/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 5.44 W/kg

CW1950/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.38 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 8.03 W/kg

SAR(1 g) = 4.21 W/kg; SAR(10 g) = 2.19 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.3%

Maximum value of SAR (measured) = 5.11 W/kg

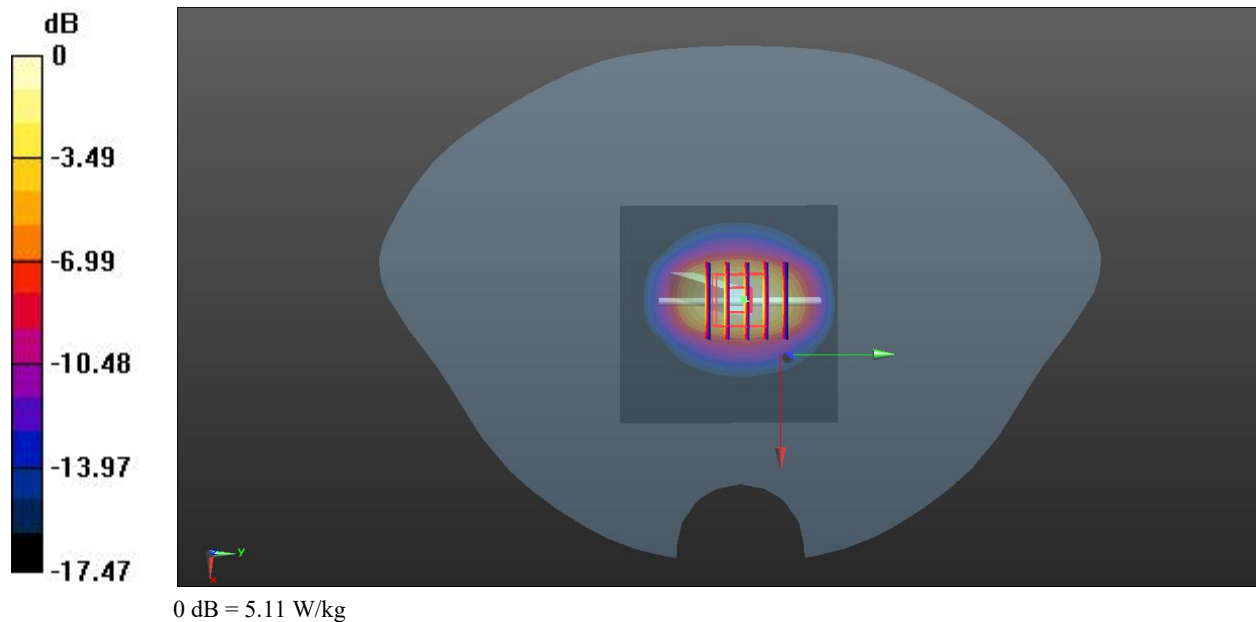

Ti-CC26050303-ASC
System check:2450MHz

Date: 2026.06.19

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.821$ S/m; $\epsilon_r = 38.224$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C Liquid Temperature:21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.57, 7.28) Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW2450/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.67 W/kg

CW2450/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.28 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 11.4 W/kg

SAR(1 g) = 5.35 W/kg; SAR(10 g) = 2.51 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 6.52 W/kg

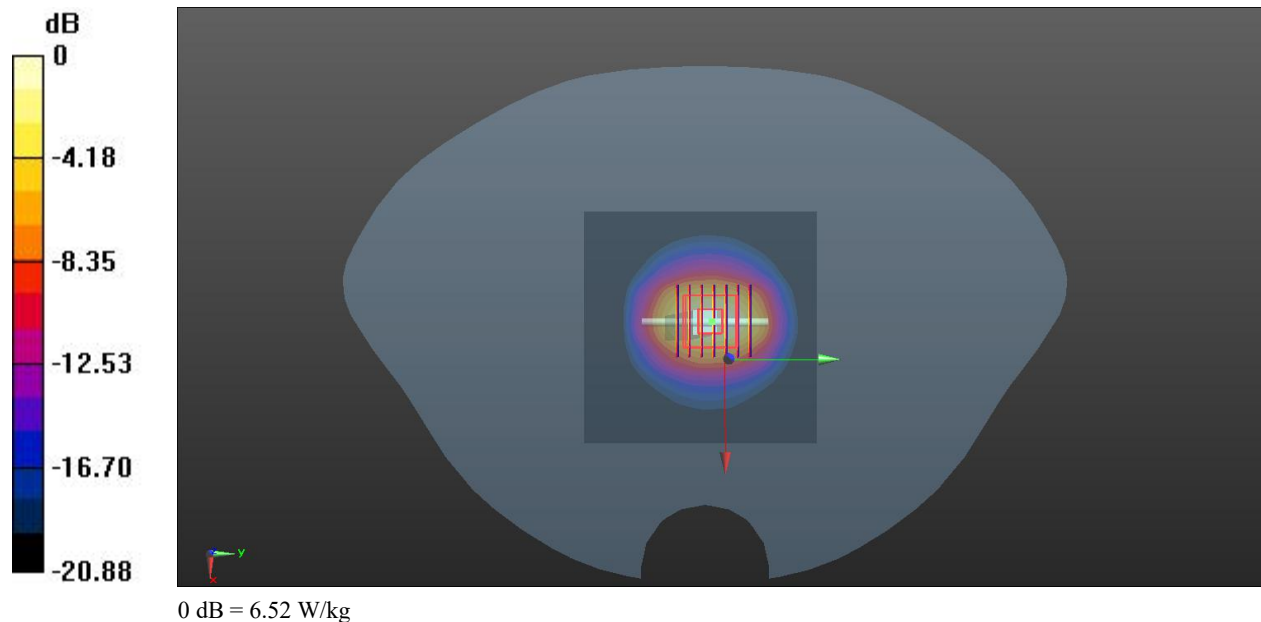

Ti-CC26050303-ASC
System check:2450MHz

Date: 2026.06.24

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.828$ S/m; $\epsilon_r = 38.671$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.57, 7.28) Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW2450/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 6.72 W/kg

CW2450/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 51.27 V/m; Power Drift = 0.02dB


Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5.38 W/kg; SAR(10 g) = 2.56 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 6.47 W/kg

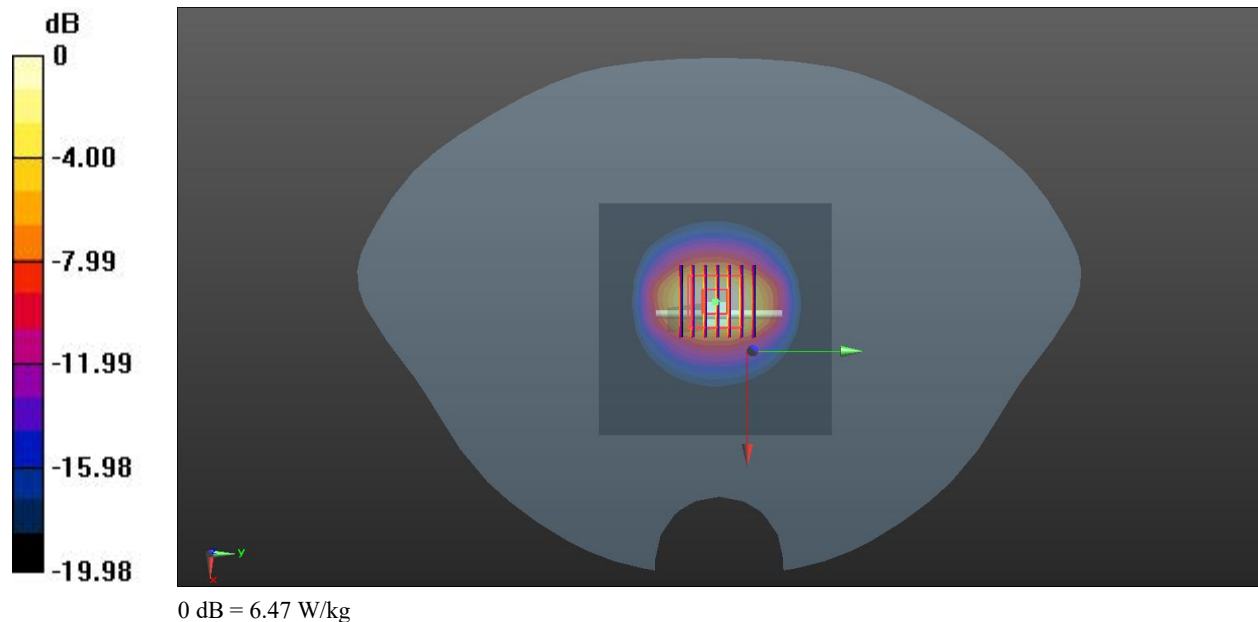

Ti-CC26050303-ASC
System check:2450MHz

Date: 2026.06.25

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 38.984$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.17, 7.57, 7.28) Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW2450/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 6.62 W/kg

CW2450/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 51.27 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5.41 W/kg; SAR(10 g) = 2.59 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.8%

Maximum value of SAR (measured) = 6.96 W/kg

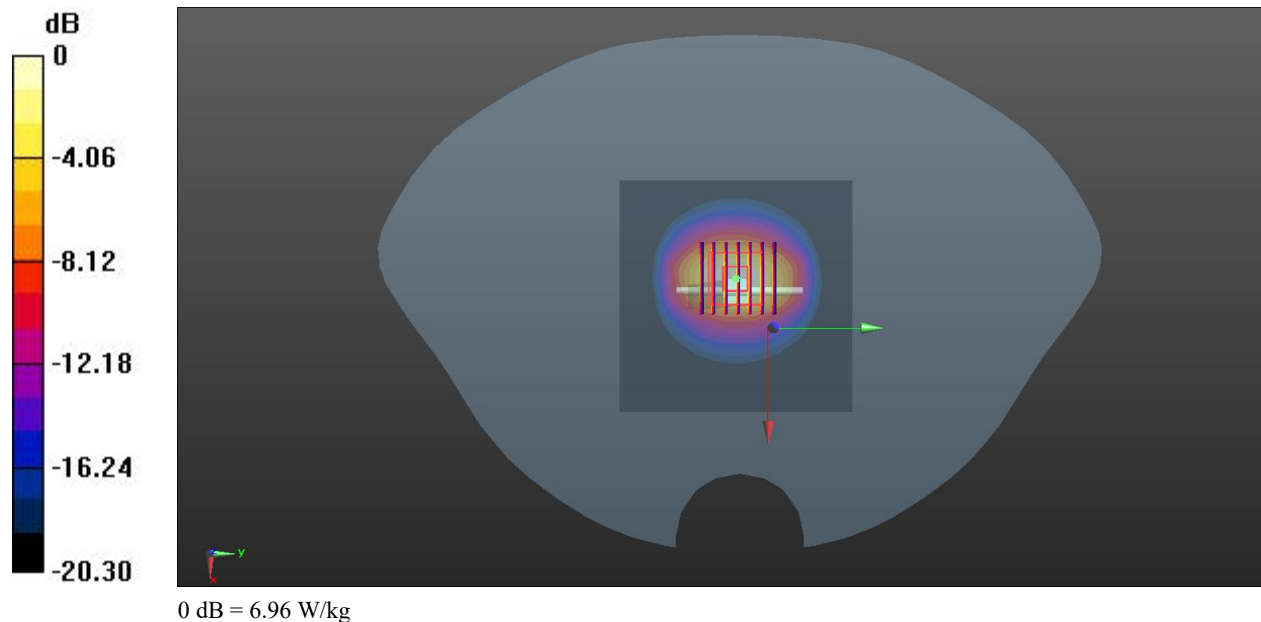

Ti-CC26050303-ASC
System check:2600MHz

Date: 2026.06.22

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 38.089$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.2°C Liquid Temperature:21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7607; ConvF(7.01, 7.39, 7.12) Calibrated: 2025.08.06
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW2600/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.38 W/kg

CW2600/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.34 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5.66 W/kg; SAR(10 g) = 2.61 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 51.9%

Maximum value of SAR (measured) = 6.31 W/kg

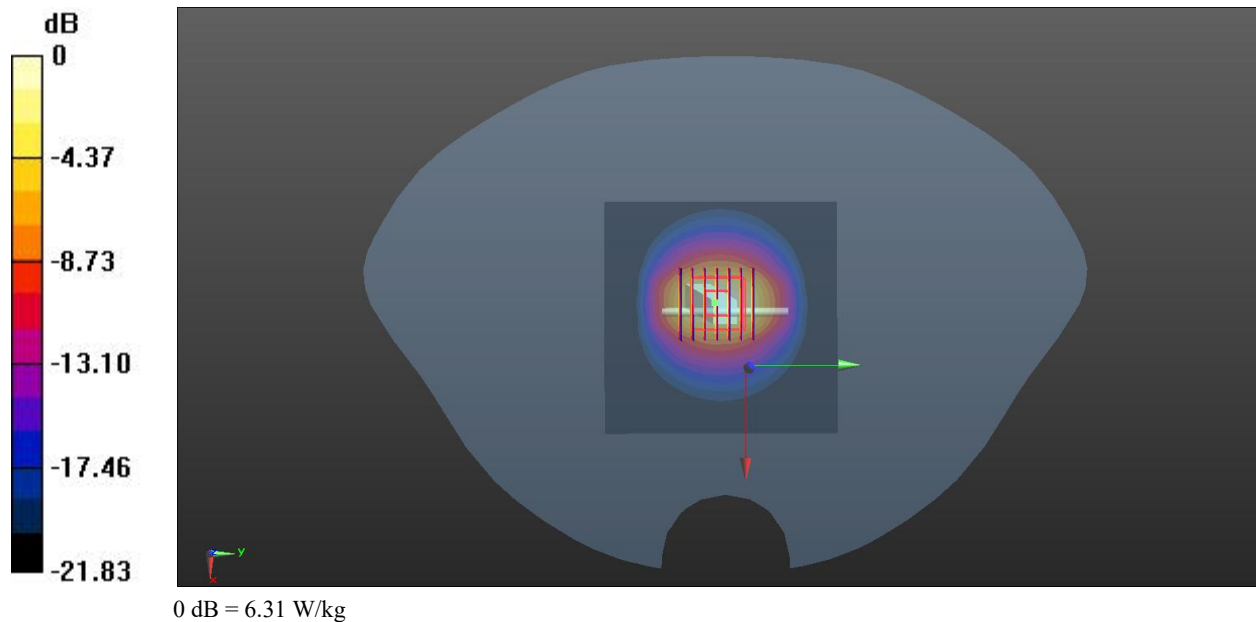

Ti-CC26050303-ASC
System check:3500MHz

Date: 2026.06.08

Communication System Band: D3500 (3500.0 MHz); Frequency: 3500 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.847$ S/m; $\epsilon_r = 38.787$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.02, 7.02, 7.02); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

CW3500/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 9.23 W/kg

CW3500/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=6mm, dy=6mm, dz=4mm

Reference Value = 54.38 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 14.6 W/kg

SAR(1 g) = 6.85 W/kg; SAR(10 g) = 2.69 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 9.96 W/kg

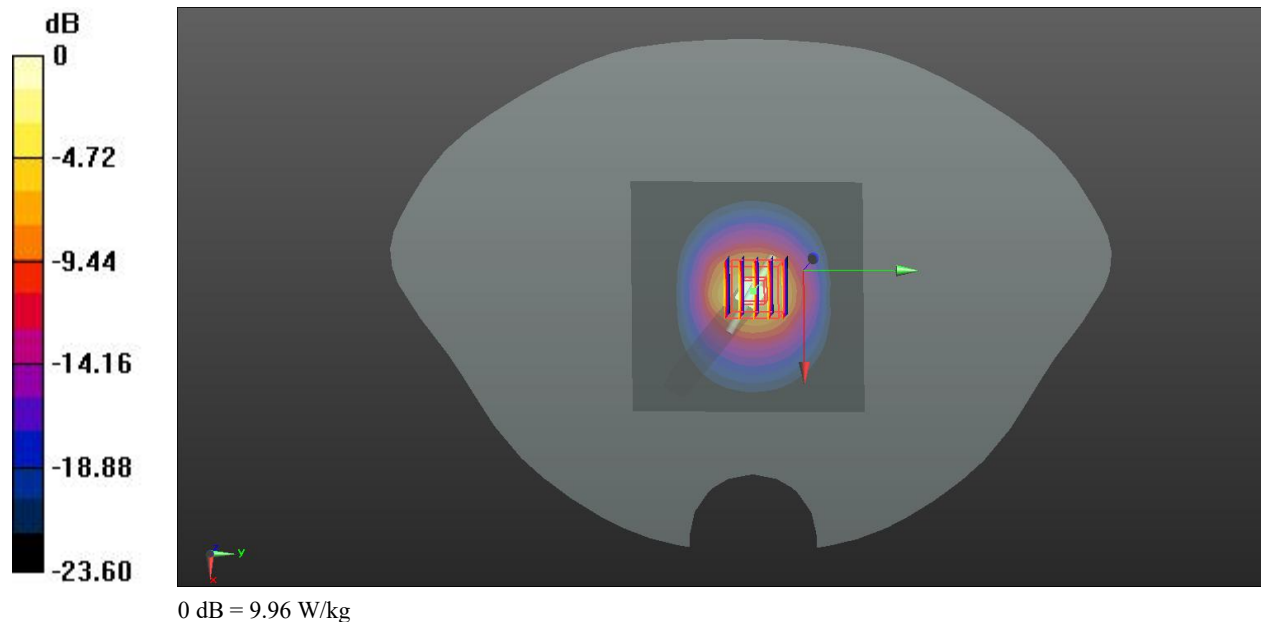

Ti-CC26050303-ASC
System check:3500MHz

Date: 2026.06.09

Communication System Band: D3500 (3500.0 MHz); Frequency: 3500 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.86$ S/m; $\epsilon_r = 38.533$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.02, 7.02, 7.02); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

CW3500/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 11.4 W/kg

CW3500/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=6mm, dy=6mm, dz=4mm

Reference Value = 51.75 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 13.7 W/kg

SAR(1 g) = 6.91 W/kg; SAR(10 g) = 2.65 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 11.2 W/kg

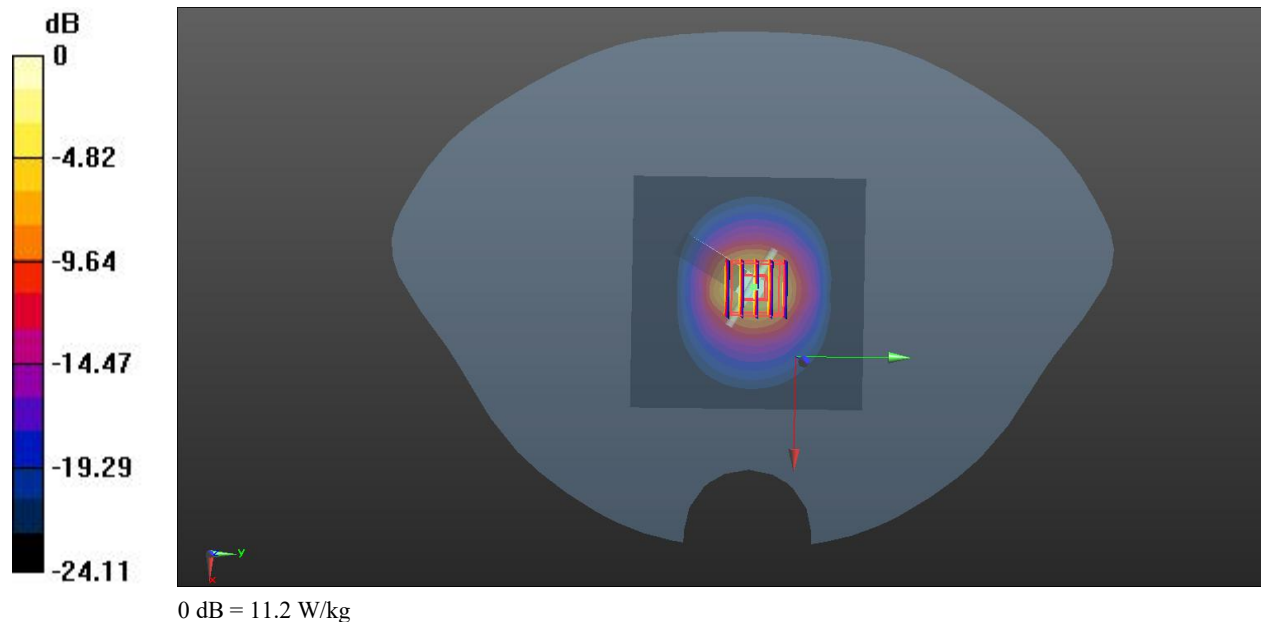

Ti-CC26050303-ASC
System check:3500MHz

Date: 2026.06.10

Communication System Band: D3500 (3500.0 MHz); Frequency: 3500 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.847$ S/m; $\epsilon_r = 38.45$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.5°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.02, 7.02, 7.02); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

CW3500/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 10.2 W/kg

CW3500/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=6mm, dy=6mm, dz=4mm

Reference Value = 52.47 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 13.5 W/kg

SAR(1 g) = 6.95 W/kg; SAR(10 g) = 2.68 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 10.8 W/kg

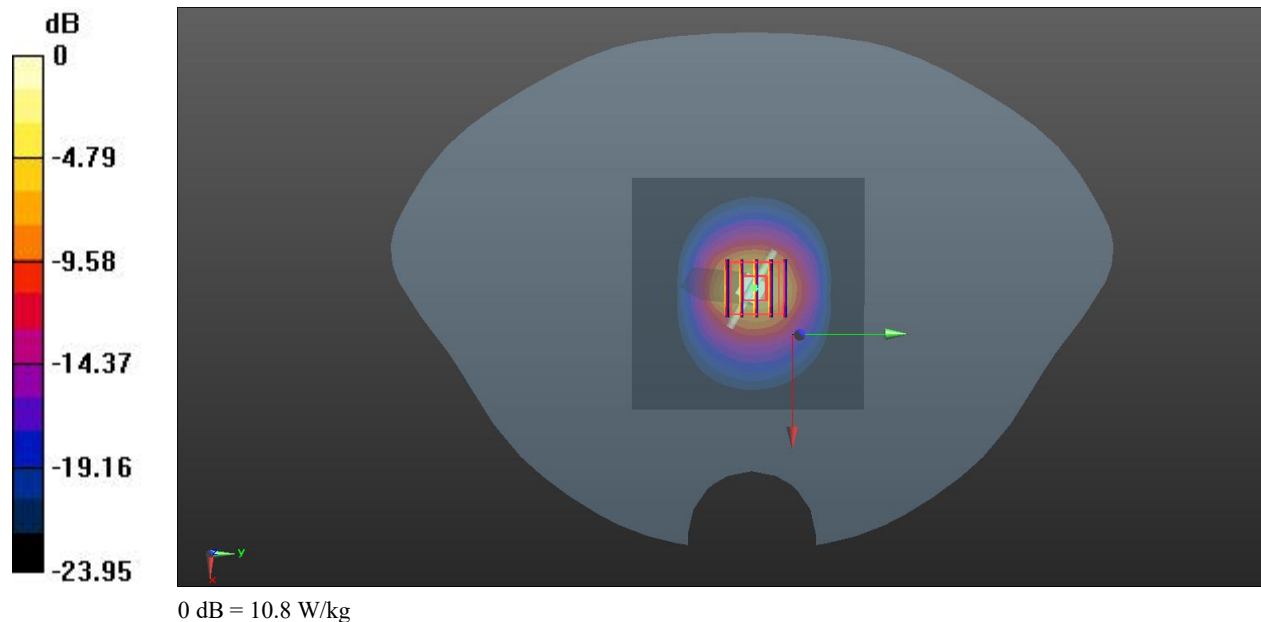

Ti-CC26050303-ASC
System Check:3700Mhz

Date: 2026.06.11

Communication System Band: D3700 (3700.0 MHz); Frequency: 3700 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 3700$ MHz; $\sigma = 3.092$ S/m; $\epsilon_r = 38.492$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(6.85, 6.85, 6.85); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

CW3700/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.54 W/kg

CW3700/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=6mm, dy=6mm, dz=4mm

Reference Value = 51.88 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 12.5 W/kg

SAR(1 g) = 6.82 W/kg; SAR(10 g) = 2.51 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.9%

Maximum value of SAR (measured) = 6.73 W/kg

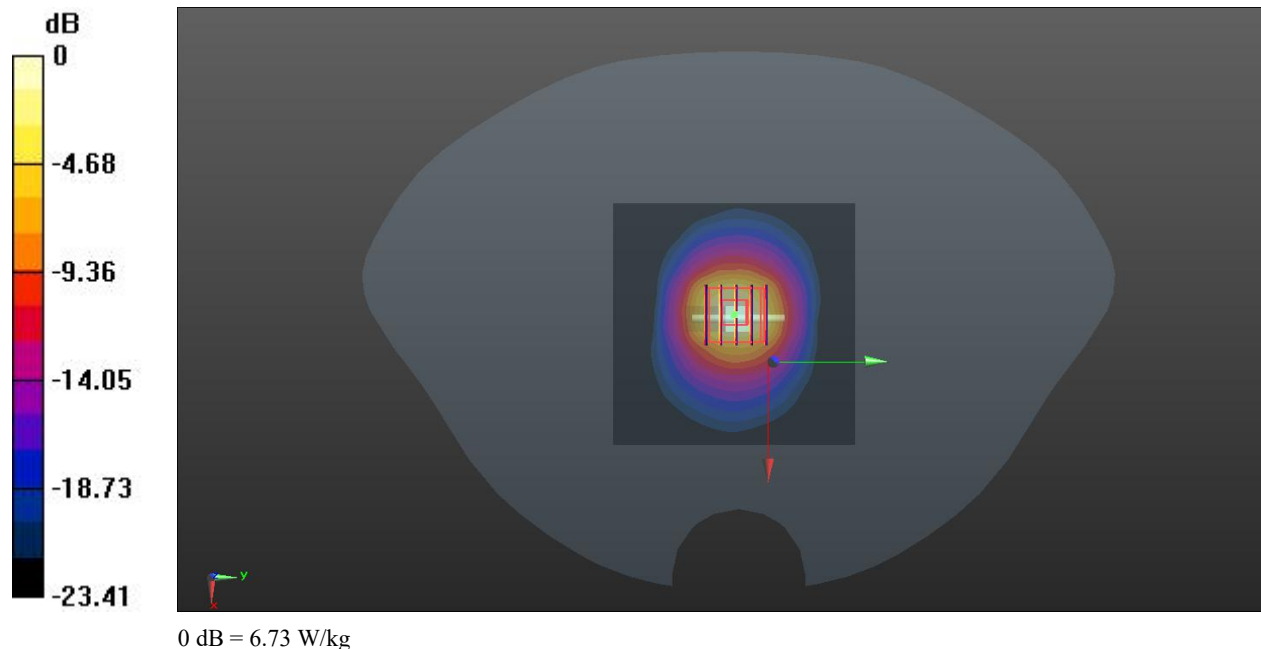

Ti-CC26050303-ASC
System Check:3900Mhz

Date: 2026.06.13

Communication System Band: D3900(3900.0Mhz); Frequency: 3900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 3900$ MHz; $\sigma = 3.308$ S/m; $\epsilon_r = 37.774$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(6.75, 6.75, 6.75); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

CW3900/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 8.08 W/kg

CW3900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=6mm, dy=6mm, dz=4mm

Reference Value = 40.18 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 21.0 W/kg

SAR(1 g) = 6.61 W/kg; SAR(10 g) = 2.31 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 41.1%

Maximum value of SAR (measured) = 13.2 W/kg

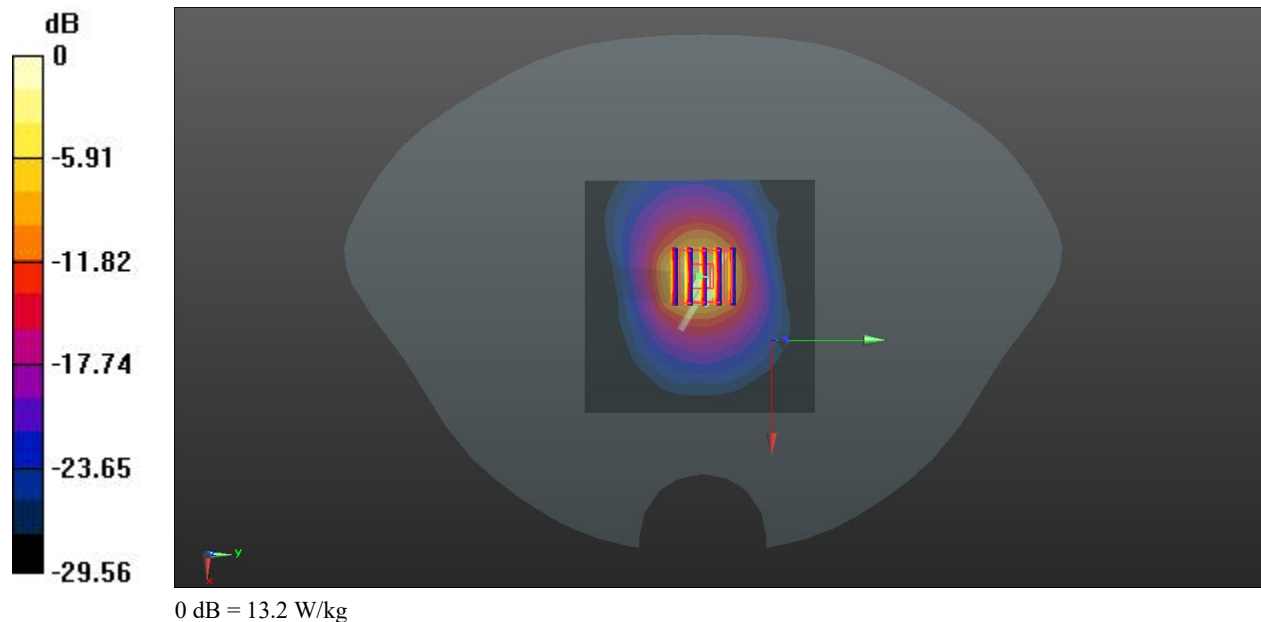

Ti-CC26050303-ASC
System Check:3900Mhz

Date: 2026.06.14

Communication System Band: D3900(3900.0Mhz); Frequency: 3900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 3900$ MHz; $\sigma = 3.341$ S/m; $\epsilon_r = 36.945$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.2°C Liquid Temperature:21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(6.75, 6.75, 6.75); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

CW3900/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 8.11 W/kg

CW3900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=6$ mm, $dy=6$ mm, $dz=4$ mm

Reference Value = 40.99 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 21.0 W/kg

SAR(1 g) = 6.65 W/kg; SAR(10 g) = 2.29 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 41.8%

Maximum value of SAR (measured) = 13.8 W/kg

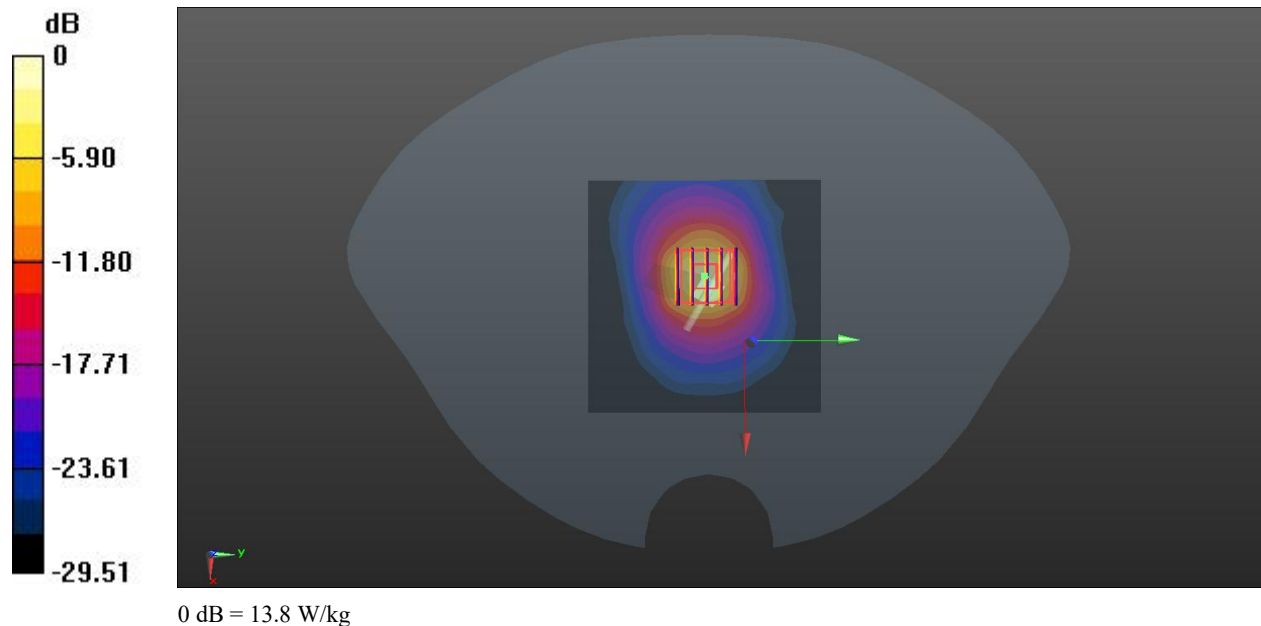

Ti-CC26050303-ASC
System Check:3900Mhz

Date: 2026.06.15

Communication System Band: D3900(3900.0Mhz); Frequency: 3900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 3900$ MHz; $\sigma = 3.291$ S/m; $\epsilon_r = 37.841$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(6.75, 6.75, 6.75); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

CW3900/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 8.55 W/kg

CW3900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=6mm, dy=6mm, dz=4mm

Reference Value = 38.18 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 21.5 W/kg

SAR(1 g) = 6.68 W/kg; SAR(10 g) = 2.31 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 13.9 W/kg

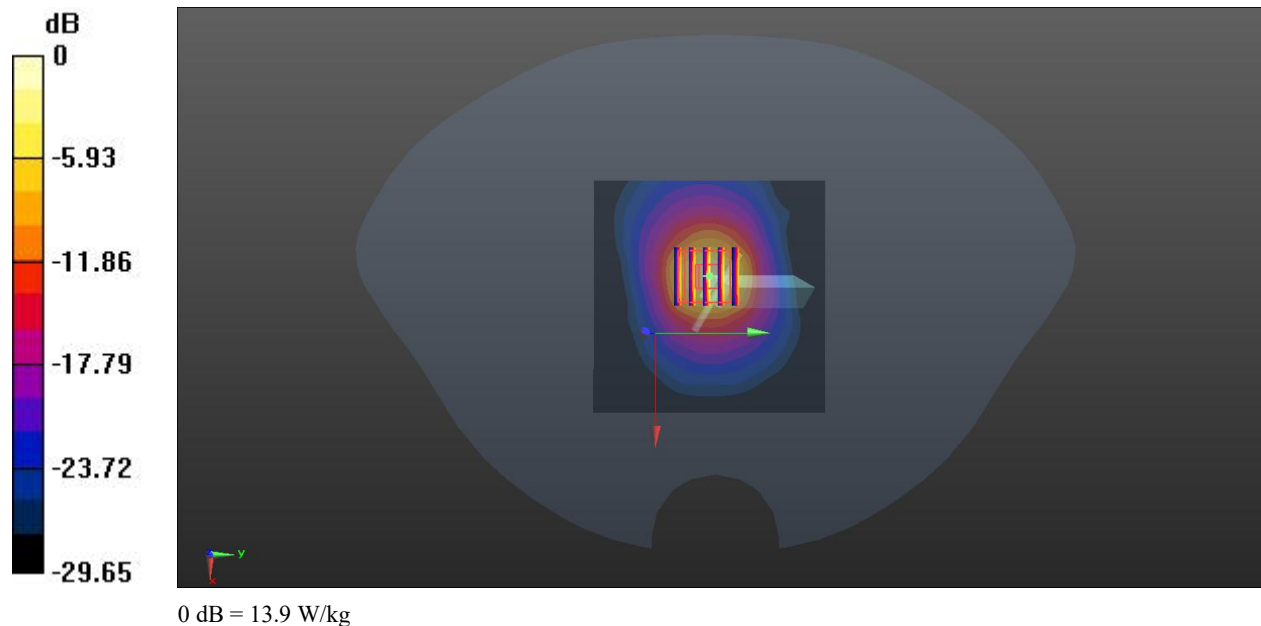

Ti-CC26050303-ASC
System Check:3900Mhz

Date: 2026.06.16

Communication System Band: D3900(3900.0Mhz); Frequency: 3900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 3900$ MHz; $\sigma = 3.344$ S/m; $\epsilon_r = 37.59$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.2°C Liquid Temperature:21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(6.75, 6.75, 6.75); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

CW3900/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 9.08 W/kg

CW3900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=6mm, dy=6mm, dz=4mm

Reference Value = 37.18 V/m; Power Drift = 0.07dB


Peak SAR (extrapolated) = 21.9 W/kg

SAR(1 g) = 6.71 W/kg; SAR(10 g) = 2.35 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 49.1%

Maximum value of SAR (measured) = 14.2 W/kg

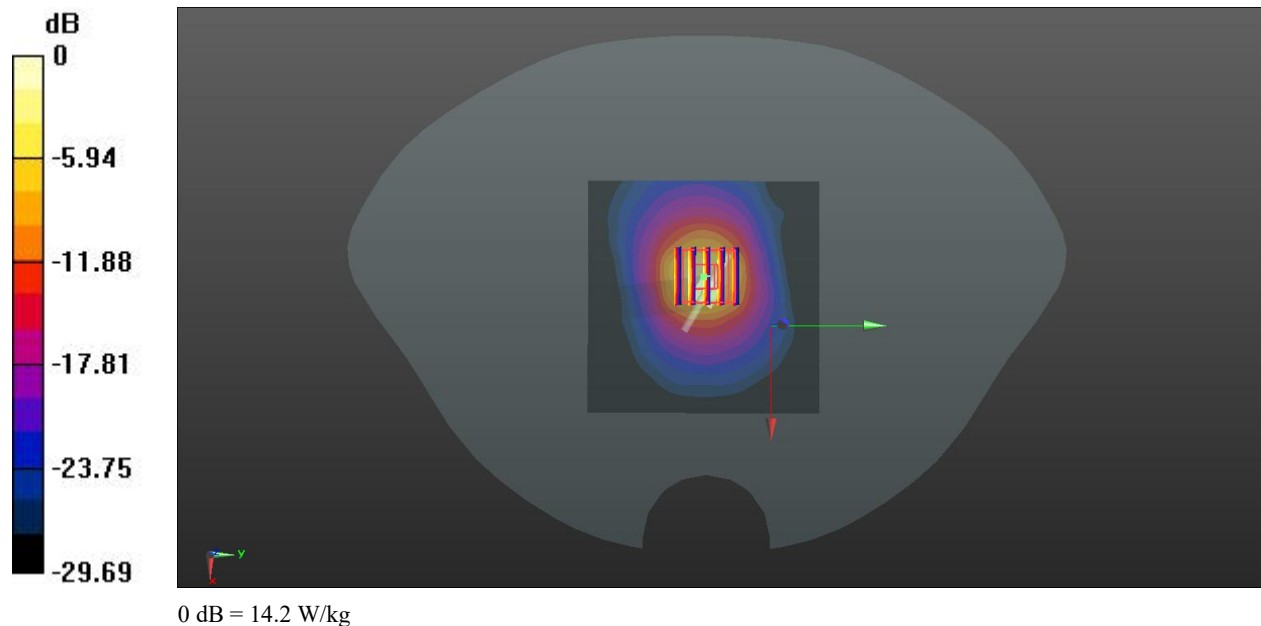

Ti-CC26050303-ASC
System Check:3900Mhz

Date: 2026.06.17

Communication System Band: D3900(3900.0Mhz); Frequency: 3900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 3900$ MHz; $\sigma = 3.311$ S/m; $\epsilon_r = 36.953$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.5°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(6.75, 6.75, 6.75); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

CW3900/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 9.26W/kg

CW3900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=6mm, dy=6mm, dz=4mm

Reference Value = 39.12 V/m; Power Drift = 0.17dB


Peak SAR (extrapolated) = 21.8 W/kg

SAR(1 g) = 6.75 W/kg; SAR(10 g) = 2.38 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 14.6 W/kg

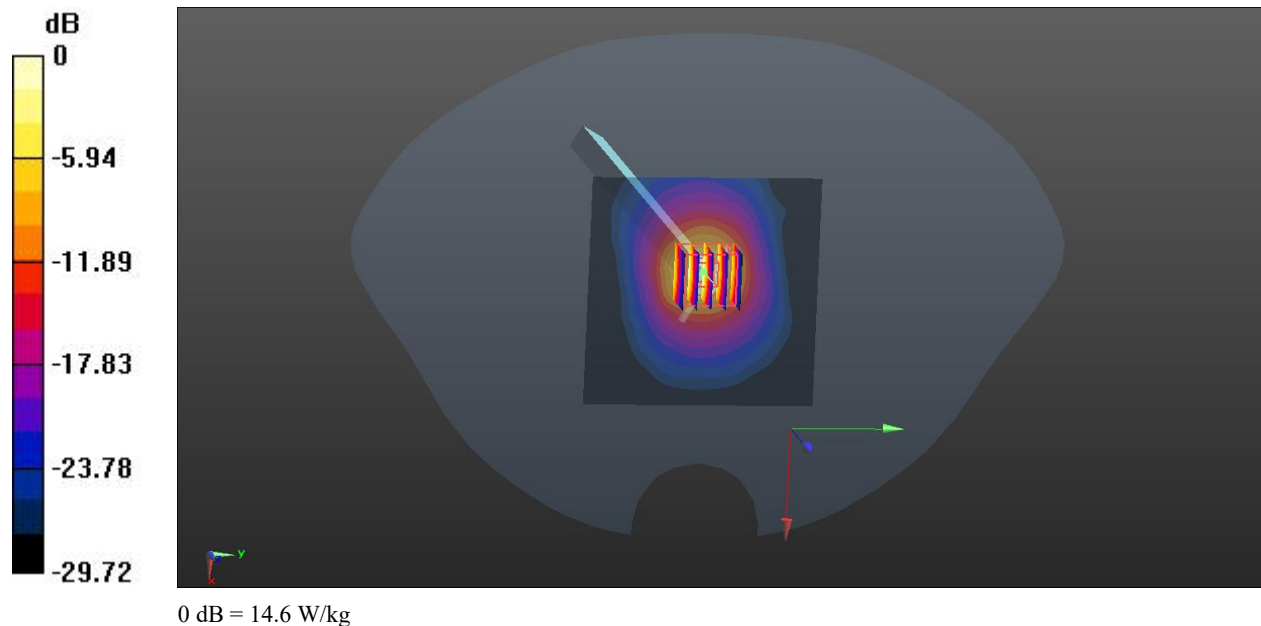

Ti-CC26050303-ASC
System Check:5250Mhz

Date: 2026.06.18

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5250 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.586$ S/m; $\epsilon_r = 36.509$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(5.61, 5.61, 5.61); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

CW5250 100mW/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 15.9 W/kg

CW5250 100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 40.52 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 31.4 W/kg

SAR(1 g) = 7.85 W/kg; SAR(10 g) = 2.25 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 59.7%

Maximum value of SAR (measured) = 16.9 W/kg

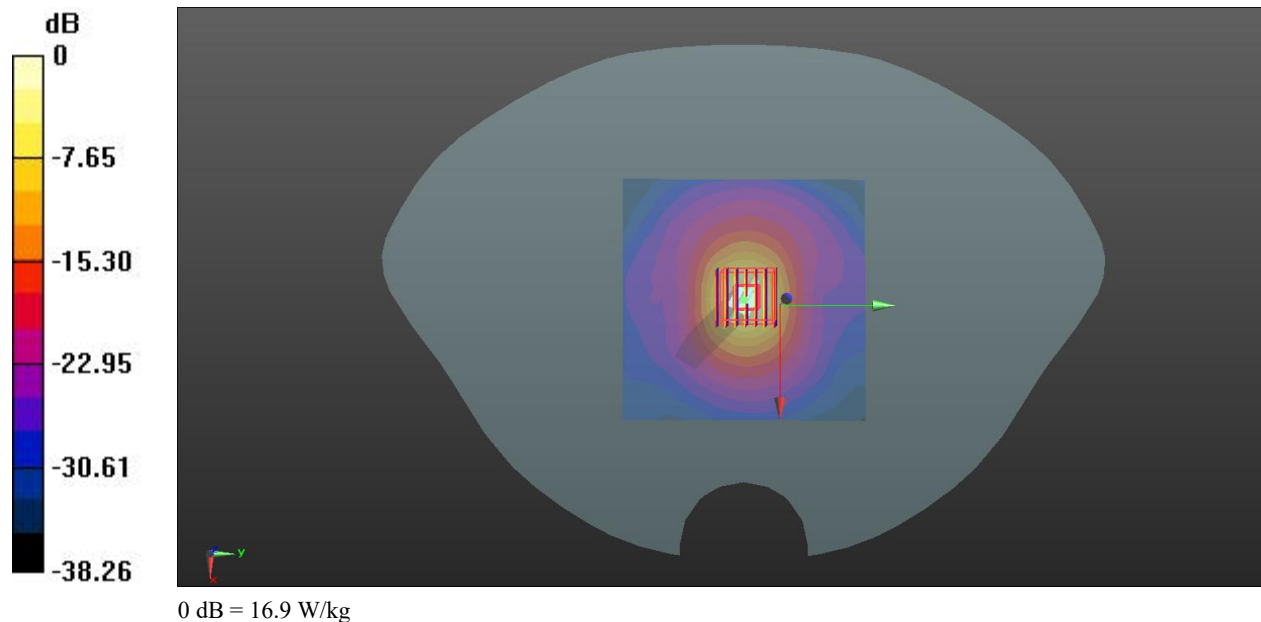

Ti-CC26050303-ASC
System Check:5600Mhz

Date: 2026.06.19

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.078$ S/m; $\epsilon_r = 35.537$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.5°C Liquid Temperature:21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(4.93, 4.93, 4.93); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

CW5600 100mW/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 20.7 W/kg

CW5600 100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 45.21 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 36.4 W/kg

SAR(1 g) = 8.18 W/kg; SAR(10 g) = 2.34 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 50.7%

Maximum value of SAR (measured) = 20.3 W/kg

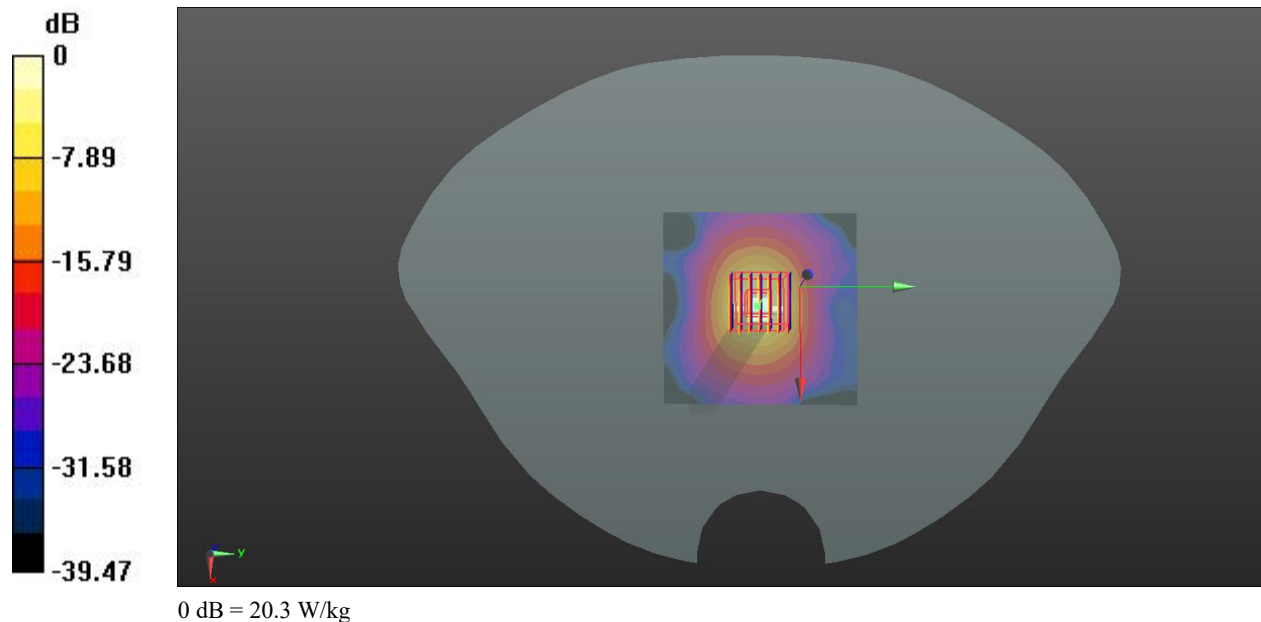

Ti-CC26050303-ASC
System Check:5750Mhz

Date: 2026.06.20

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5750 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.151$ S/m; $\epsilon_r = 35.735$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.7°C Liquid Temperature:21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(5.01, 5.01, 5.01); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn878; Calibrated: 2026.03.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

5750MHz 100mW/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.2 W/kg

5750MHz 100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 40.08 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 32.5 W/kg

SAR(1 g) = 7.96 W/kg; SAR(10 g) = 2.35 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 19.6 W/kg

