

SAR TEST REPORT

Application No.: SUCR2512001232AT
Applicant: Shenzhen Xinguodu Technology Co., Ltd.
Address of Applicant: 17B JinSong Mansion, Terra Industrial & Trade Park Chegongmiao, Futian District, Shenzhen, 518040 China
Manufacturer: Shenzhen Xinguodu Technology Co., Ltd.
Address of Manufacturer: 17B JinSong Mansion, Terra Industrial & Trade Park Chegongmiao, Futian District, Shenzhen, 518040 China
EUT Description: POS Terminal
Model No.: KD69-K3, KD69-K3_V28_T51, KD69-K3_V08_R00_T40, KD69-K3_V28_R00, KD69-K3_V28
Trade Mark: NEXGO
FCC ID: XDQKD69-01
Standards: FCC 47CFR §2.1093
Date of Receipt: 2025-12-26
Date of Test: 2026-01-06 to 2026-01-14
Date of Issue: 2026-01-22

Test Result :
PASS *

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Revision Record			
Version	Description	Date	Remark
00	Original	2026-01-22	/

Authorized for issue by:		
Prepared By		Leon Liu
		Leon Liu/ Project Engineer
Approved By		Nick Hu
		Nick Hu/ Reviewer

TEST SUMMARY

Frequency Band	Maximum Reported SAR(W/kg)
	Extremity 10g SAR
LTE Band 2	1.94
LTE Band 5	1.22
LTE Band 7	3.49
LTE Band 66(4)	1.34
WI-FI (2.4GHz)	0.58
SAR Limited(W/kg)	4.0
Maximum Simultaneous Transmission SAR (W/kg)	
Scenario	Extremity 10g SAR
Sum SAR	3.60
SPLSR	/
SPLSR Limited	0.1

Note:

1) The Simultaneous transmission SAR is the same test position of the WWAN Antenna + WiFi Antenna.
2) According to TCB workshop October, 2014 RF Exposure Procedures Update (Overlapping Bands): SAR for LTE Band 4 is covered by LTE Band 66 due to similar frequency range, same maximum tune up limit and same channel bandwidth.
Because the frequency range is similar, the maximum tuning limit is the same, and the channel bandwidth and other operating parameters for the smaller band is fully supported by the larger band.

Contents

1	General Information	6
1.1	General Description of EUT	6
1.2	Test Specification	7
1.3	RF exposure limits	8
1.4	Test Location	9
1.5	Test Engineer	9
1.6	Test Facility	9
2	Laboratory Environment	10
3	SAR Measurements System Configuraion	11
3.1	The SAR Measurement System	11
3.2	Isotropic E-field Probe EX3DV4	13
3.3	Data Acquisition Electronics (DAE)	14
3.4	SAM Twin Phantom	14
3.5	ELI Phantom	15
3.6	Wrist Phantom	15
3.7	Device Holder for Transmitters	16
3.8	Measurement Procedure	17
3.8.1	Scanning procedure	17
3.8.2	Data storage	19
3.8.3	Data Evaluation by SEMCAD	19
4	SAR measurement variability and uncertainty	21
4.1	SAR measurement variability	21
4.2	SAR measurement uncertainty	21
5	Description of Test Position	22
5.1	Extremity exposure conditions	22
6	SAR System Verificaion Procedure	23
6.1	Tissue Simulate Liquid	23
6.1.1	Recipes for Tissue Simulate Liquid	23
6.1.2	Measurement for Tissue Simulate Liquid	24
6.2	SAR System Check	25
6.2.1	Justification for Extended SAR Dipole Calibrations	26
6.2.2	Summary System Check Result(s)	27
6.2.3	Detailed System Check Results	27
7	Test Configuration	28
7.1	Operation Configurations	28
7.1.1	WIFI Test Configuration	28
7.1.2	LTE Test Configuration	32
8	Test Result	34
8.1	DUT Antenna Locations	34
8.2	Measurement of RF Conducted Power	34
8.2.1	RF Conducted Power Data	34
8.3	Measurement of SAR Data	35
8.3.1	SAR Result of LTE Band 2	36
8.3.2	SAR Result of LTE Band 5	37
8.3.3	SAR Result of LTE Band 7	38
8.3.4	SAR Result of LTE Band 66	39
8.3.5	SAR Result of WIFI 2.4G	40
8.4	Multiple Transmitter Evaluation	41
8.4.1	Simultaneous SAR test evaluation	41
8.4.2	Simultaneous Transmission SAR Summation Scenario	42



9 Equipment list..... 43

10 Calibration certificate 44

11 Photographs 44

Appendix A: Detailed System Check Results 44

Appendix B: Detailed Test Results 44

Appendix C: Calibration certificate..... 44

Appendix D: Photographs 44

Appendix E: Conducted RF Output Power..... 44

1 General Information

1.1 General Description of EUT

Product Phase:	production unit	
Device Type:	portable device	
Exposure Category:	uncontrolled environment / general population	
SN:	KD69R300007 for WIFI KD69R300005 for WWAN	
Hardware Version:	KD69-MAIN-V1.0C	
Software Version:	VCFCR10S240914003	
Antenna Type:	PIFA antenna for LTE, PCB antenna for WIFI	
Device Operating Configurations:		
Test Mode Configuration:	LTE: QPSK,16QAM WIFI: DSSS,OFDM;	
Power Class:	3, tested with power control "max power"(LTE Band)	
Frequency Bands:	Band	Tx(MHz)
	LTE Band 2	1850~1910
	LTE Band 4	1710~1755
	LTE Band 5	824~849
	LTE Band 7	2500~2570
	LTE Band 66	1710~1780
	WIFI 2.4G	2412~2462
RF Cable:	☒ Provided by applicant ☐ Provided by the laboratory	
Battery Information:	Model:	GX07
	Normal Voltage:	DC3.6V
	Rated capacity:	2600mAh
	Manufacturer:	Huarui Lithium Energy(Shenzhen) Co.,Ltd.
Note: Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.		

1.2 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 941225 D05A	LTE Rel.10 KDB Inquiry Sheet v01r02
KDB 248227 D01	SAR Guidance for IEEE 802.11 Wi-Fi SAR v02r02
KDB 447498 D04	Interim General RF Exposure Guidance v01
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03

1.3 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)

1.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)
Pilot Free Trade Zone

No tests were sub-contracted.

1.5 Test Engineer

Test Engineer: Bert Xu

1.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA).

- **FCC (Designation Number: CN1312)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized as an accredited testing laboratory.

Test Firm Registration Number: 717327

- **ISED (CAB Identifier: CN0120)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 27594

2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

3 SAR Measurements System Configuraion

3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-Simulate.


The DASY system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

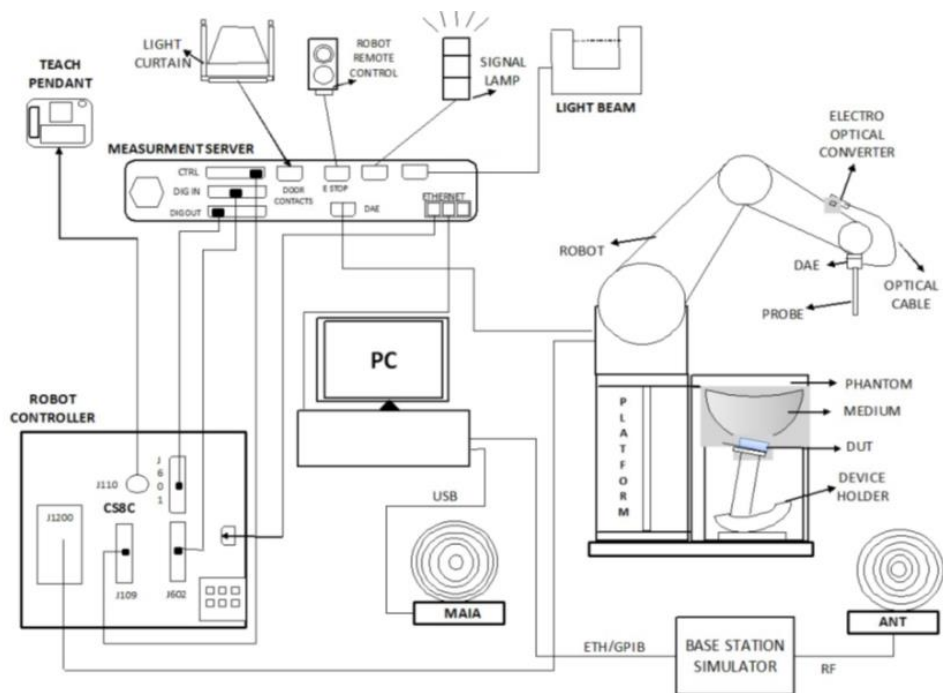


F-1. SAR Measurement System Configuration

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows system.
- DASY software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.

3.2 Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY52 SAR and higher, EASY4/MRI

3.3 Data Acquisition Electronics (DAE)

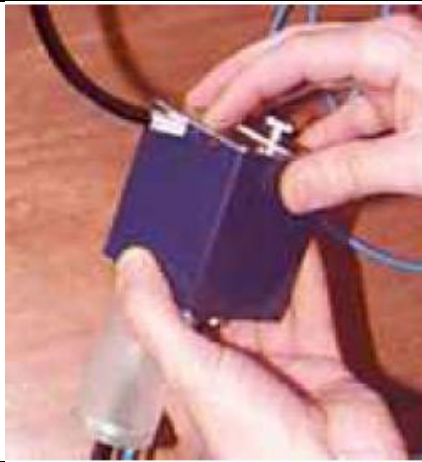Model	DAE	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	
Input Offset Voltage	< 5μV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	

3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	pprox.. 25 liters	
Wooden Support	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.

3.5 ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm(bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	pprox.. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 4 MHz to 10 GHz. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4 but has reinforced top structure.

3.6 Wrist Phantom

Material	Photosensitive acrylate-based resin	
Liquid Compatibility	The phantom shell is compatible with SPEAG's tissue simulating liquids both sugar and oil based. Other liquids may be used however liquids that are corrosive, including liquids containing DGBE, must not be used as they will cause damage to the phantom and render the warranty void (see note or consult SPEAG support).	
Shell Thickness	2 ± 0.2 mm	

3.7 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

3.8 Measurement Procedure

3.8.1 Scanning procedure

Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 32mm*32mm*30mm ($f \leq 2\text{GHz}$), 30mm*30mm*30mm (f for 2-3GHz) and 24mm*24mm*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points ($f \leq 2\text{GHz}$), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

If the zoom scan measured as specified in the preceding paragraphs complies with both i) and ii), or if the psSAR is below 0,1 W/kg, no additional measurements are needed.

i) The smallest horizontal distance from the local SAR peaks to all points 3 dB below the SAR peak shall be larger than the horizontal grid steps in both x- and y-directions (Δx , Δy). This shall be checked for the measured zoom scan plane conformal to the phantom at the distance zM1. The minimum distance shall be recorded in the SAR test report.

ii) The ratio of the SAR at the second measured point (M2) to the SAR at the closest measured point (M1) at the x-y location of the measured maximum SAR value shall be at least 30 %. This ratio (in %) shall be recorded in the SAR test report.

			$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 12 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 12 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 10 \text{ mm}$
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz: } \leq 8 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz: } \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz: } \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 4 \text{ mm}$ $4 - 5 \text{ GHz: } \leq 3 \text{ mm}$ $5 - 6 \text{ GHz: } \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 3 \text{ mm}$ $4 - 5 \text{ GHz: } \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz: } \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz: } \geq 28 \text{ mm}$ $4 - 5 \text{ GHz: } \geq 25 \text{ mm}$ $5 - 6 \text{ GHz: } \geq 22 \text{ mm}$

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max $\pm 5 \%$.

3.8.2 Data storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.8.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ε
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents, or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With V_i = compensated signal of channel I (I = x, y, z)

U_i = input signal of channel I (I = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp I = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i ($i = x, y, z$)

$Norm_i$ = sensor sensitivity of channel i ($i = x, y, z$)

[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ϵ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

4 SAR measurement variability and uncertainty

4.1 SAR measurement variability

Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.


4.2 SAR measurement uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

5 Description of Test Position

5.1 Extremity exposure conditions

When SAR measurement is necessary for hand-held devices that do not transmit while at the head or torso, a flat phantom may be used. To assess this type of device, the device shall be placed directly against the flat phantom as shown in the below Figure, for the sides of the device that are in contact with the hand for the intended use.

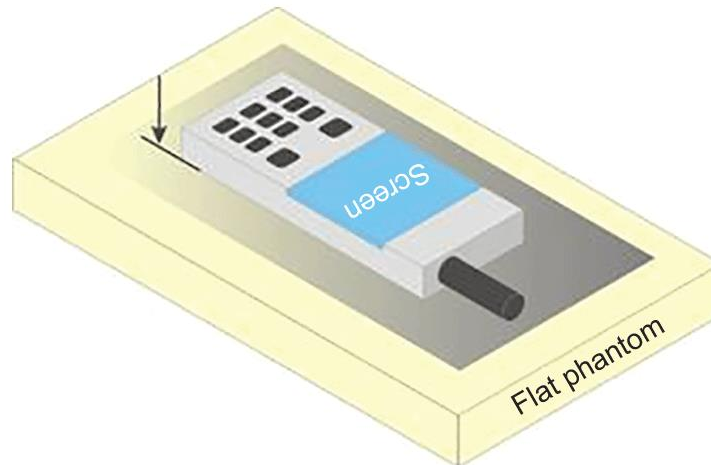

- a) Test position for hand-held devices, not used at the head or torso

6 SAR System Verificaion Procedure

6.1 Tissue Simulate Liquid

6.1.1 Recipes for Tissue Simulate Liquid

The bellowing tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)				
	450	700-1000	1700-2000	2300-2500	2500-2700
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85
Salt: 99+% Pure Sodium Chloride Water: De-ionized, 16 MΩ+ resistivity Tween: Polyoxyethylene (20) sorbitan monolaurate Sucrose: 98+% Pure Sucrose HEC: Hydroxyethyl Cellulose					
Head Tissue Simulate Liquid (HBBL600-10000V6) is composed of the following ingredients: (Manufactured by SPEAG) Water: 50-65% Mineral oil: 10-30% Emulsifiers: 8-25% Sodium salt: 0-1.5%					

Table 1 : Recipe of Tissue Simulate Liquid

6.1.2 Measurement for Tissue Simulate Liquid

The Conductivity (σ) and Permittivity (ϵ_r) are listed in Table 2. For the SAR measurement given in this report.


The temperature variation of the Tissue Simulate Liquids was $22 \pm 2^\circ\text{C}$.

Tissue Type	Measured Frequency (MHz)	Measured Tissue		Target Tissue ($\pm 5\%$)		Deviation (Within $\pm 5\%$)		Liquid Temp. ($^\circ\text{C}$)	Test Date
		ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$		
835 Head	835	40.900	0.894	41.50	0.90	-1.45%	-0.67%	22.7	2026/1/6
1750 Head	1750	40.200	1.380	40.10	1.37	0.25%	0.73%	22.4	2026/1/8
1950 Head	1950	39.900	1.420	40.00	1.40	-0.25%	1.43%	22.5	2026/1/10
2450 Head	2450	39.300	1.820	39.20	1.80	0.26%	1.11%	22.7	2026/1/12
2600 Head	2600	38.800	1.980	39.00	1.96	-0.51%	1.02%	22.7	2026/1/14

Table 2 : Measurement result of Tissue electric parameters

6.2 SAR System Check

The microwave circuit arrangement for system Check is sketched in F-12. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range $22\pm 2^{\circ}\text{C}$, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 ± 0.5 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

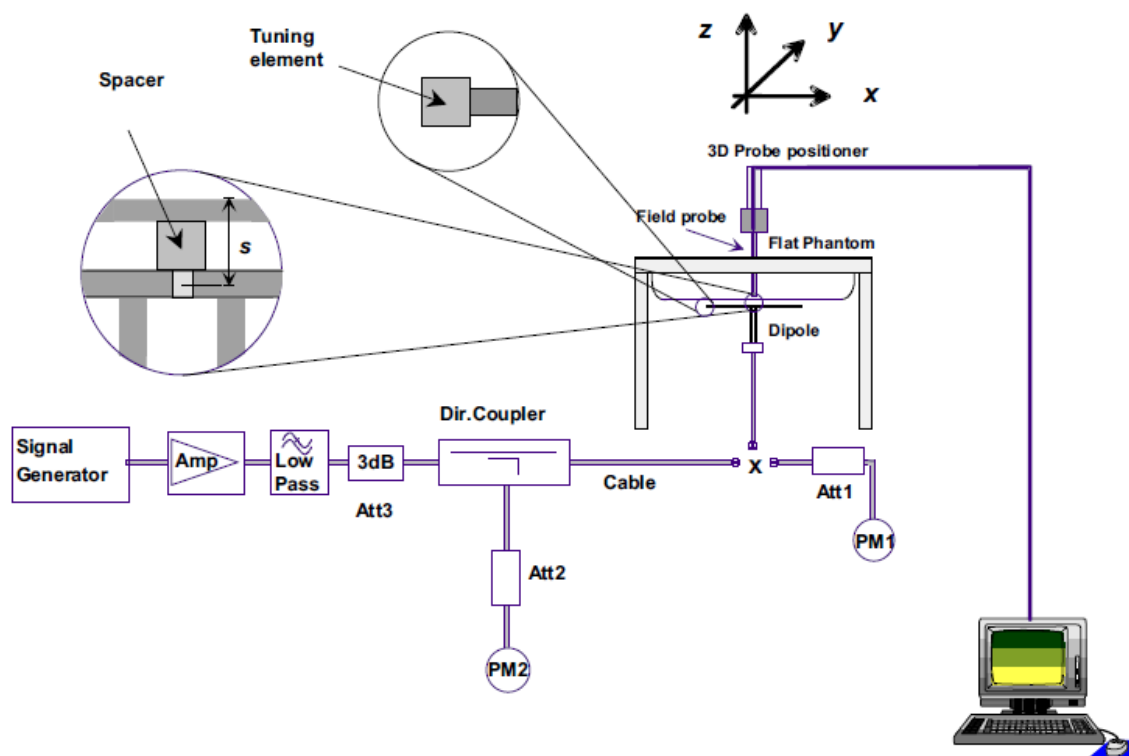

F-12.The microwave circuit arrangement used for SAR system Check

6.2.1 Justification for Extended SAR Dipole Calibrations

1) Instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 20% of calibrated measurement;
- d) Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

6.2.2 Summary System Check Result(s)

Validation Kit	Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W)	Target SAR (normalized to 1W)	Deviation (Within $\pm 10\%$)		Liquid Temp. ($^{\circ}\text{C}$)	Test Date
	1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	1-g(W/kg)	10- g(W/kg)		
D835V2_Head	2.44	1.61	9.76	6.44	9.60	6.16	1.67%	4.55%	22.7	2026/1/6
D1750V2_Head	8.92	4.94	35.68	19.76	36.30	19.30	-1.71%	2.38%	22.4	2026/1/8
D1950V3_Head	10.30	5.39	41.20	21.56	40.40	20.80	1.98%	3.65%	22.5	2026/1/10
D2450V2_Head	13.20	6.29	52.80	25.16	52.70	24.60	0.19%	2.28%	22.7	2026/1/12
D2600V2_Head	13.90	6.28	55.60	25.12	55.20	24.70	0.72%	1.70%	22.7	2026/1/14

Table 3 : SAR System Check Result

6.2.3 Detailed System Check Results

Please see the Appendix A

7 Test Configuration

7.1 Operation Configurations


7.1.1 WIFI Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

7.1.1.1 Duty cycle

1) Wi-Fi 2.4GHz 802.11b:

Duty cycle=100%

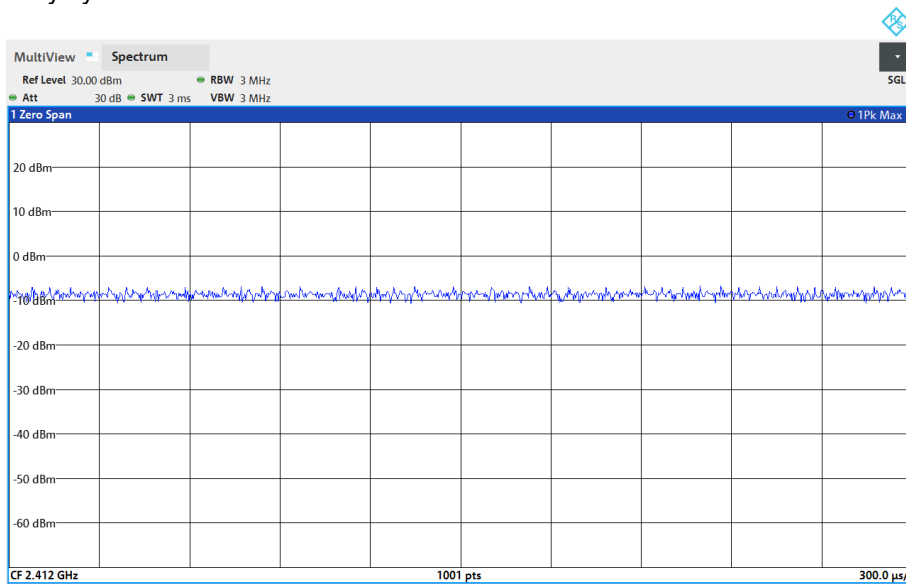

7.1.1.2 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) . When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

7.1.1.3 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- 1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- 2) . When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
 - a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
 - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - a) replace “subsequent test configuration” with “next subsequent test configuration” (i.e., subsequent next highest specified maximum output power configuration)
 - b) replace “initial test configuration” with “all tested higher output power configurations”

7.1.1.4 2.4 GHz WiFi SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

- **802.11b DSSS SAR Test Requirements**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

- **2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

- **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7.1.2 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The Radio Communication Analyzer was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

Calculated Duty Cycle=[Extended cyclic prefix in uplink x (Ts) x # of S + # of U]/10ms

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

Modulation	Channel bandwidth/Transmission bandwidth						MPR (dB)
	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

D) Largest channel bandwidth standalone SAR test requirements

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

The determination threshold for 10g SAR is 2.5 times the threshold for 1g SAR mentioned in the previous section



Report No.: SUCR251200123201

Page: 34 of 44

8 Test Result

8.1 DUT Antenna Locations

The DUT Antenna Locations can be referred to Appendix D

8.2 Measurement of RF Conducted Power

8.2.1 RF Conducted Power Data

The detailed power data can be referred to Appendix E Conducted RF Output Power.

8.3 Measurement of SAR Data

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) For WiFi SAR test, as the highest reported SAR is smaller than 1.2 W/kg , and the tune-up of the other 802.11 modes are not higher than SAR measurement mode, therefore the adjusted SAR is $\leq 1.2\text{ W/kg}$ for other 802.11 modes, SAR test for the other 802.11 modes are not required. For Product specific 10gSAR the highest reported SAR is smaller than 3.0 W/kg , SAR test for the other 802.11 modes are also not required.

8.3.1 SAR Result of LTE Band 2

LTE Band 2 SAR Test Record												
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Extremity Test data (Separate 0mm 1RB)												
Front side	20	QPSK 1_0	19100/1900	1:1	0.591	0.357	0.08	24.45	25.00	1.135	0.405	22.5
Back side	20	QPSK 1_0	19100/1900	1:1	0.524	0.287	-0.19	24.45	25.00	1.135	0.326	22.5
Left side	20	QPSK 1_0	19100/1900	1:1	0.657	0.345	-0.03	24.45	25.00	1.135	0.392	22.5
Right side	20	QPSK 1_0	19100/1900	1:1	2.590	1.390	-0.01	24.45	25.00	1.135	1.578	22.5
Top side	20	QPSK 1_0	19100/1900	1:1	0.050	0.032	0.14	24.45	25.00	1.135	0.036	22.5
Bottom side	20	QPSK 1_0	19100/1900	1:1	0.203	0.104	0.18	24.45	25.00	1.135	0.118	22.5
Side 3	20	QPSK 1_0	19100/1900	1:1	0.504	0.269	0.03	24.45	25.00	1.135	0.305	22.5
Side 4	20	QPSK 1_0	19100/1900	1:1	0.224	0.136	-0.16	24.45	25.00	1.135	0.154	22.5
Back side 0mm with Wrist phantom	20	QPSK 1_0	19100/1900	1:1	2.910	1.710	0.03	24.45	25.00	1.135	1.941	22.5
Extremity Test data (Separate 0mm 50%RB)												
Front side	20	QPSK 50_0	19100/1900	1:1	0.434	0.255	-0.18	23.31	24.00	1.172	0.299	22.5
Back side	20	QPSK 50_0	19100/1900	1:1	0.426	0.233	-0.02	23.31	24.00	1.172	0.273	22.5
Left side	20	QPSK 50_0	19100/1900	1:1	0.580	0.320	0.18	23.31	24.00	1.172	0.375	22.5
Right side	20	QPSK 50_0	19100/1900	1:1	2.010	1.060	-0.04	23.31	24.00	1.172	1.242	22.5
Top side	20	QPSK 50_0	19100/1900	1:1	0.041	0.026	0.07	23.31	24.00	1.172	0.030	22.5
Bottom side	20	QPSK 50_0	19100/1900	1:1	0.120	0.060	-0.14	23.31	24.00	1.172	0.070	22.5
Side 3	20	QPSK 50_0	19100/1900	1:1	0.403	0.213	0.09	23.31	24.00	1.172	0.250	22.5
Side 4	20	QPSK 50_0	19100/1900	1:1	0.174	0.108	0.01	23.31	24.00	1.172	0.127	22.5
Back side 0mm with Wrist phantom	20	QPSK 50_0	19100/1900	1:1	2.380	1.120	0.01	23.31	24.00	1.172	1.313	22.5

8.3.2 SAR Result of LTE Band 5

LTE Band 5 SAR Test Record												
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Extremity Test data (Separate 0mm 1RB)												
Front side	10	QPSK 1_0	20525/836.5	1:1	0.566	0.325	-0.16	23.44	24.00	1.138	0.370	22.7
Back side	10	QPSK 1_0	20525/836.5	1:1	0.210	0.142	0.04	23.44	24.00	1.138	0.162	22.7
Left side	10	QPSK 1_0	20525/836.5	1:1	0.293	0.186	-0.09	23.44	24.00	1.138	0.212	22.7
Right side	10	QPSK 1_0	20525/836.5	1:1	1.690	0.956	-0.03	23.44	24.00	1.138	1.088	22.7
Top side	10	QPSK 1_0	20525/836.5	1:1	0.020	0.012	0.05	23.44	24.00	1.138	0.014	22.7
Bottom side	10	QPSK 1_0	20525/836.5	1:1	0.213	0.113	-0.01	23.44	24.00	1.138	0.129	22.7
Side 3	10	QPSK 1_0	20525/836.5	1:1	0.104	0.063	0.11	23.44	24.00	1.138	0.072	22.7
Side 4	10	QPSK 1_0	20525/836.5	1:1	0.451	0.294	-0.15	23.44	24.00	1.138	0.335	22.7
Back side 0mm with Wrist phantom	10	QPSK 1_0	20525/836.5	1:1	1.740	1.070	0.07	23.44	24.00	1.138	1.218	22.7
Extremity Test data (Separate 0mm 50%RB)												
Front side	10	QPSK 25_0	20525/836.5	1:1	0.486	0.269	0.03	22.42	23.00	1.143	0.307	22.7
Back side	10	QPSK 25_0	20525/836.5	1:1	0.168	0.117	0.14	22.42	23.00	1.143	0.134	22.7
Left side	10	QPSK 25_0	20525/836.5	1:1	0.239	0.153	-0.07	22.42	23.00	1.143	0.175	22.7
Right side	10	QPSK 25_0	20525/836.5	1:1	1.310	0.762	-0.06	22.42	23.00	1.143	0.871	22.7
Top side	10	QPSK 25_0	20525/836.5	1:1	0.016	0.011	-0.02	22.42	23.00	1.143	0.013	22.7
Bottom side	10	QPSK 25_0	20525/836.5	1:1	0.153	0.089	0.06	22.42	23.00	1.143	0.102	22.7
Side 3	10	QPSK 25_0	20525/836.5	1:1	0.085	0.048	0.13	22.42	23.00	1.143	0.055	22.7
Side 4	10	QPSK 25_0	20525/836.5	1:1	0.381	0.241	-0.17	22.42	23.00	1.143	0.275	22.7
Back side 0mm with Wrist phantom	10	QPSK 25_0	20525/836.5	1:1	1.460	0.798	0.08	22.42	23.00	1.143	0.912	22.7

8.3.3 SAR Result of LTE Band 7

LTE Band 7 SAR Test Record												
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Extremity Test data (Separate 0mm 1RB)												
Front side	20	QPSK 1 0	21100/2535	1:1	4.080	1.670	0.10	22.33	23.00	1.167	1.949	22.7
Back side	20	QPSK 1 0	21100/2535	1:1	0.273	0.127	0.13	22.33	23.00	1.167	0.148	22.7
Left side	20	QPSK 1 0	21100/2535	1:1	0.397	0.214	0.10	22.33	23.00	1.167	0.250	22.7
Right side	20	QPSK 1 0	21100/2535	1:1	6.090	2.490	-0.02	22.33	23.00	1.167	2.906	22.7
Right side-Repeated	20	QPSK 1 0	21100/2535	1:1	5.910	2.420	-0.01	22.33	23.00	1.167	2.824	22.7
Top side	20	QPSK 1 0	21100/2535	1:1	0.126	0.059	-0.15	22.33	23.00	1.167	0.069	22.7
Bottom side	20	QPSK 1 0	21100/2535	1:1	0.132	0.058	-0.02	22.33	23.00	1.167	0.068	22.7
Side 3	20	QPSK 1 0	21100/2535	1:1	0.090	0.047	-0.17	22.33	23.00	1.167	0.055	22.7
Side 4	20	QPSK 1 0	21100/2535	1:1	0.106	0.055	0.04	22.33	23.00	1.167	0.064	22.7
Right side	20	QPSK 1 0	20850/2510	1:1	5.770	2.260	0.15	22.08	23.00	1.236	2.793	22.7
Right side	20	QPSK 1 0	21350/2560	1:1	5.910	2.390	0.01	22.17	23.00	1.211	2.894	22.7
Back side 0mm with Wrist phantom	20	QPSK 1_0	21100/2535	1:1	6.610	2.990	0.01	22.33	23.00	1.167	3.489	22.7
Back side 0mm with Wrist phantom-Repeated	20	QPSK 1_0	21100/2535	1:1	6.490	2.920	0.03	22.33	23.00	1.167	3.408	22.7
Back side 0mm with Wrist phantom	20	QPSK 1_0	20850/2510	1:1	5.620	2.480	0.07	22.08	23.00	1.236	3.065	22.7
Back side 0mm with Wrist phantom	20	QPSK 1_0	21350/2560	1:1	5.990	2.670	0.06	22.17	23.00	1.211	3.233	22.7
Extremity Test data (Separate 0mm 50%RB)												
Front side	20	QPSK 50 0	21100/2535	1:1	3.680	1.390	-0.18	21.30	22.00	1.175	1.633	22.7
Back side	20	QPSK 50 0	21100/2535	1:1	0.213	0.101	0.05	21.30	22.00	1.175	0.119	22.7
Left side	20	QPSK 50 0	21100/2535	1:1	0.318	0.169	-0.09	21.30	22.00	1.175	0.199	22.7
Right side	20	QPSK 50 0	21100/2535	1:1	4.810	2.010	0.13	21.30	22.00	1.175	2.362	22.7
Top side	20	QPSK 50 0	21100/2535	1:1	0.101	0.045	-0.02	21.30	22.00	1.175	0.053	22.7
Bottom side	20	QPSK 50 0	21100/2535	1:1	0.107	0.047	0.06	21.30	22.00	1.175	0.055	22.7
Side 3	20	QPSK 50 0	21100/2535	1:1	0.075	0.037	0.01	21.30	22.00	1.175	0.043	22.7
Side 4	20	QPSK 50 0	21100/2535	1:1	0.089	0.043	0.06	21.30	22.00	1.175	0.051	22.7
Right side	20	QPSK 50 0	20850/2510	1:1	4.530	1.760	-0.15	21.08	22.00	1.236	2.175	22.7
Right side	20	QPSK 50 0	21350/2560	1:1	4.620	1.790	-0.06	21.13	22.00	1.222	2.187	22.7
Back side 0mm with Wrist phantom	20	QPSK 50_0	21100/2535	1:1	5.110	2.280	0.05	21.30	22.00	1.175	2.679	22.7
Back side 0mm with Wrist phantom	20	QPSK 50_0	20850/2510	1:1	4.380	1.890	0.09	21.08	22.00	1.236	2.336	22.7
Back side 0mm with Wrist phantom	20	QPSK 50_0	21350/2560	1:1	4.840	2.010	0.01	21.13	22.00	1.222	2.456	22.7
Extremity Test data (Separate 0mm 100%RB)												
Right side	20	QPSK 100 0	21100/2535	1:1	4.230	1.670	0.00	21.26	22.00	1.186	1.981	22.7
Back side 0mm with Wrist phantom	20	QPSK 100_0	21100/2535	1:1	4.810	1.990	0.03	21.26	22.00	1.186	2.360	22.7

Test Position	Test ch./Freq.	Measured SAR (W/kg)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
Right side	21100/2535	2.490	2.420	1.029	N/A	N/A
Back side 0mm with Wrist phantom	21100/2535	2.990	2.920	1.024	N/A	N/A
Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.						
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).						
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .						
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg						
5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.						

8.3.4 SAR Result of LTE Band 66

LTE Band 66 SAR Test Record												
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Extremity Test data (Separate 0mm 1RB)												
Front side	20	QPSK 1_0	132322/1745	1:1	0.904	0.532	0.14	23.89	24.00	1.026	0.546	22.4
Back side	20	QPSK 1_0	132322/1745	1:1	0.335	0.180	0.13	23.89	24.00	1.026	0.185	22.4
Left side	20	QPSK 1_0	132322/1745	1:1	0.552	0.301	0.06	23.89	24.00	1.026	0.309	22.4
Right side	20	QPSK 1_0	132322/1745	1:1	1.940	1.050	0.03	23.89	24.00	1.026	1.077	22.4
Top side	20	QPSK 1_0	132322/1745	1:1	0.069	0.046	-0.04	23.89	24.00	1.026	0.047	22.4
Bottom side	20	QPSK 1_0	132322/1745	1:1	0.198	0.111	0.16	23.89	24.00	1.026	0.114	22.4
Side 3	20	QPSK 1_0	132322/1745	1:1	0.295	0.161	0.10	23.89	24.00	1.026	0.165	22.4
Side 4	20	QPSK 1_0	132322/1745	1:1	0.223	0.122	0.01	23.89	24.00	1.026	0.125	22.4
Back side 0mm with Wrist phantom	20	QPSK 1_0	132322/1745	1:1	2.390	1.310	0.06	23.89	24.00	1.026	1.344	22.4
Extremity Test data (Separate 0mm 50%RB)												
Front side	20	QPSK 50_0	132322/1745	1:1	0.759	0.435	0.12	22.67	23.00	1.079	0.469	22.4
Back side	20	QPSK 50_0	132322/1745	1:1	0.238	0.141	0.16	22.67	23.00	1.079	0.152	22.4
Left side	20	QPSK 50_0	132322/1745	1:1	0.451	0.242	-0.17	22.67	23.00	1.079	0.261	22.4
Right side	20	QPSK 50_0	132322/1745	1:1	1.610	0.859	0.03	22.67	23.00	1.079	0.927	22.4
Top side	20	QPSK 50_0	132322/1745	1:1	0.050	0.033	-0.02	22.67	23.00	1.079	0.036	22.4
Bottom side	20	QPSK 50_0	132322/1745	1:1	0.151	0.087	0.16	22.67	23.00	1.079	0.094	22.4
Side 3	20	QPSK 50_0	132322/1745	1:1	0.231	0.126	-0.15	22.67	23.00	1.079	0.136	22.4
Side 4	20	QPSK 50_0	132322/1745	1:1	0.173	0.095	-0.04	22.67	23.00	1.079	0.103	22.4
Back side 0mm with Wrist phantom	20	QPSK 50_0	132322/1745	1:1	1.760	0.887	0.01	22.67	23.00	1.079	0.957	22.4

8.3.5 SAR Result of WIFI 2.4G

Wi-Fi 2.4G SAR Test Record												
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
Extremity Test data (Separate 0mm)												
Front side	802.11b	6/2437	100.00%	1.000	0.079	0.040	0.13	17.49	18.00	1.125	0.045	22.7
Back side	802.11b	6/2437	100.00%	1.000	0.288	0.143	-0.16	17.49	18.00	1.125	0.161	22.7
Left side	802.11b	6/2437	100.00%	1.000	1.330	0.519	-0.05	17.49	18.00	1.125	0.584	22.7
Right side	802.11b	6/2437	100.00%	1.000	0.061	0.033	0.13	17.49	18.00	1.125	0.037	22.7
Top side	802.11b	6/2437	100.00%	1.000	0.001	0.001	-0.19	17.49	18.00	1.125	0.001	22.7
Bottom side	802.11b	6/2437	100.00%	1.000	0.040	0.011	0.02	17.49	18.00	1.125	0.012	22.7
Side 3	802.11b	6/2437	100.00%	1.000	0.259	0.137	0.13	17.44	18.00	1.138	0.156	22.7
Side 4	802.11b	6/2437	100.00%	1.000	0.106	0.057	0.04	17.41	18.00	1.146	0.065	22.7
Back side 0mm with Wrist phantom	802.11b	6/2437	100.00%	1.000	0.200	0.098	0.03	17.49	18.00	1.125	0.110	22.7



8.4 Multiple Transmitter Evaluation

8.4.1 Simultaneous SAR test evaluation

No.	Simultaneous Tx Combination	Extremity
1	WWAN + WLAN 2.4GHz	Yes

8.4.2 Simultaneous Transmission SAR Summation Scenario

Extremity:

Test position		SARmax (W/kg)		Summed SAR
		WWAN Max	WiFi 2.4G	
		1	2	
LTE B2	Front side	0.405	0.045	0.450
	Back side	0.326	0.161	0.487
	Left side	0.392	0.584	0.976
	Right side	1.578	0.037	1.615
	Top side	0.036	0.001	0.037
	Bottom side	0.118	0.012	0.130
	Side 3	0.305	0.156	0.461
	Side 4	0.154	0.065	0.219
	Back side 0mm with Wrist phantom	1.941	0.110	2.051
LTE B5	Front side	0.370	0.045	0.415
	Back side	0.162	0.161	0.323
	Left side	0.212	0.584	0.796
	Right side	1.088	0.037	1.125
	Top side	0.014	0.001	0.015
	Bottom side	0.129	0.012	0.141
	Side 3	0.072	0.156	0.228
	Side 4	0.335	0.065	0.400
	Back side 0mm with Wrist phantom	1.218	0.110	1.328
LTE B7	Front side	1.949	0.045	1.994
	Back side	0.148	0.161	0.309
	Left side	0.250	0.584	0.834
	Right side	2.906	0.037	2.943
	Top side	0.069	0.001	0.070
	Bottom side	0.068	0.012	0.080
	Side 3	0.055	0.156	0.211
	Side 4	0.064	0.065	0.129
	Back side 0mm with Wrist phantom	3.489	0.110	3.599
LTE B66(4)	Front side	0.546	0.045	0.591
	Back side	0.185	0.161	0.346
	Left side	0.309	0.584	0.893
	Right side	1.077	0.037	1.114
	Top side	0.047	0.001	0.048
	Bottom side	0.114	0.012	0.126
	Side 3	0.165	0.156	0.321
	Side 4	0.125	0.065	0.190
	Back side 0mm with Wrist phantom	1.344	0.110	1.454

9 Equipment list

Test Platform		SPEAG DASY Professional				
Software Reference		cDASY8 V16.4.0.5005				
Hardware Reference						
Equipment		Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
☒	Test Phantom	SPEAG	Wrist Phantom	1050	NCR	NCR
☒	Test Phantom	SPEAG	Twin-SAM V8.0	2155	NCR	NCR
☒	DAE	SPEAG	DAE4ip	1826	2025-02-17	2026-02-16
☒	E-Field Probe	SPEAG	EX3DV4	7735	2025-01-29	2026-01-28
☒	Validation Kits	SPEAG	D835V2	4d161	2023-08-25	2026-08-24
☒	Validation Kits	SPEAG	D1750V2	1105	2023-11-03	2026-11-02
☒	Validation Kits	SPEAG	D1950V3	1218	2023-05-04	2026-05-03
☒	Validation Kits	SPEAG	D2450V2	922	2023-08-28	2026-08-27
☒	Validation Kits	SPEAG	D2600V2	1158	2025-03-31	2028-03-30
☒	Dielectric parameter probes	SPEAG	DAKS-3.5	1120	2025-08-25	2026-08-24
☒	Vector Network Analyzer and Vector Reflectometer	SPEAG	DAKS_VNA R140	50920	2025-08-25	2026-08-24
☒	Universal Radio Communication Tester	R&S	CMW500	111637	2025-09-03	2026-09-02
☒	RF Bi-Directional Coupler	Agilent	86205-60001	MY31400031	NCR	NCR
☒	Signal Generator	R&S	SMB100A	182393	2025-02-05	2026-02-04
☒	Preamplifier	Qiji	YX28980933	202104001	NCR	NCR
☒	USB Average Power Sensor	Keysight	U2002H	MY5639004	2025-09-10	2026-09-09
☒	USB Average Power Sensor	Agilent	U2002H	MY48200110	2025-11-20	2026-11-19
☒	Attenuator	SHX	TS2-3dB	30704	NCR	NCR
☒	Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR
☒	Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR
☒	DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR
☒	Speed reading thermometer	LKM	DTM3000	NA	2025-09-16	2026-09-15
☒	Humidity and Temperature Indicator	MingGao	MingGao	NA	2025-09-16	2026-09-15

Note: All the equipment are within the valid period when the tests are performed.



Report No.: SUCR251200123201
Page: 44 of 44

10 Calibration certificate

Please see the Appendix C

11 Photographs

Please see the Appendix D

Appendix A: Detailed System Check Results

Appendix B: Detailed Test Results

Appendix C: Calibration certificate

Appendix D: Photographs

Appendix E: Conducted RF Output Power

--- End of report ---