

**APPENDIX B - SAR PLOTS****Test Plot 1#: GSM 850 Mid Body Front****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.939$  S/m;  $\epsilon_r = 40.685$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.41, 10.41, 10.41) @ 836.6 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Body Front/GSM 850 Mid/Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.507 W/kg

**Body Front/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.71 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.568 W/kg

**SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.304 W/kg**

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (&gt; 16 mm)

Ratio of SAR at M2 to SAR at M1 = 71.7%

Maximum value of SAR (measured) = 0.503 W/kg

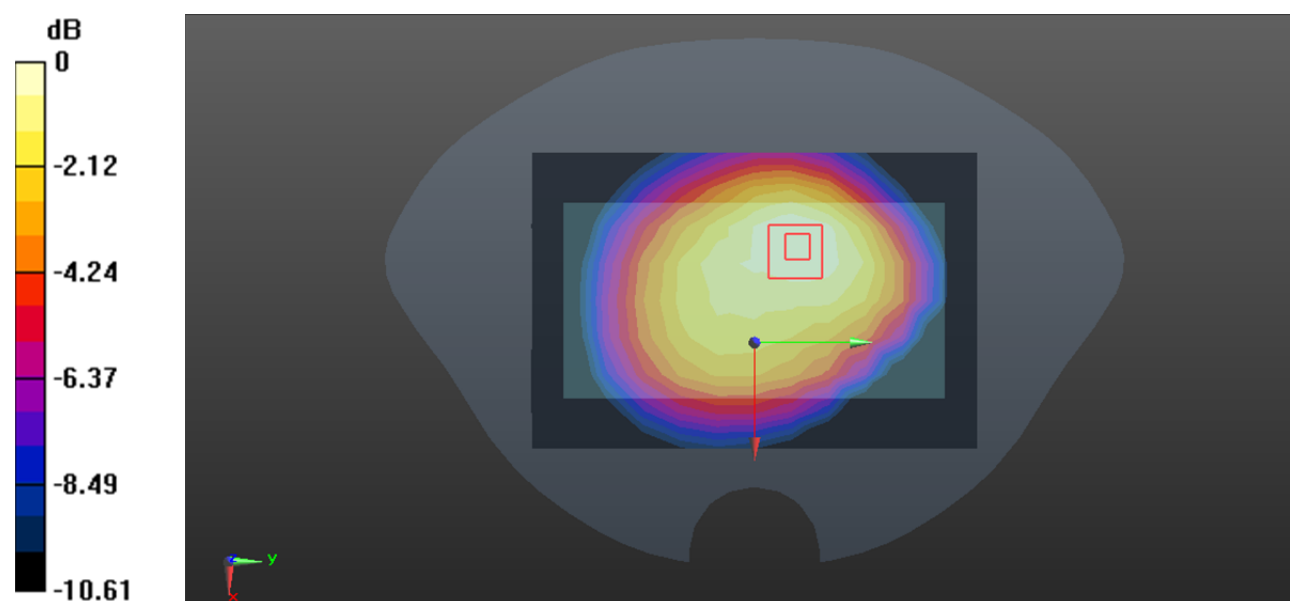

0 dB = 0.503 W/kg = -2.98 dBW/kg

**Test Plot 2#: GSM 850 Mid Limb Front****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.939$  S/m;  $\epsilon_r = 40.685$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.41, 10.41, 10.41) @ 836.6 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Limb Front/GSM 850 Mid/Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.662 W/kg

**Limb Front/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.60 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.761 W/kg

**SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.313 W/kg**

Smallest distance from peaks to all points 3 dB below = 18.1 mm

Ratio of SAR at M2 to SAR at M1 = 64.7%

Maximum value of SAR (measured) = 0.656 W/kg

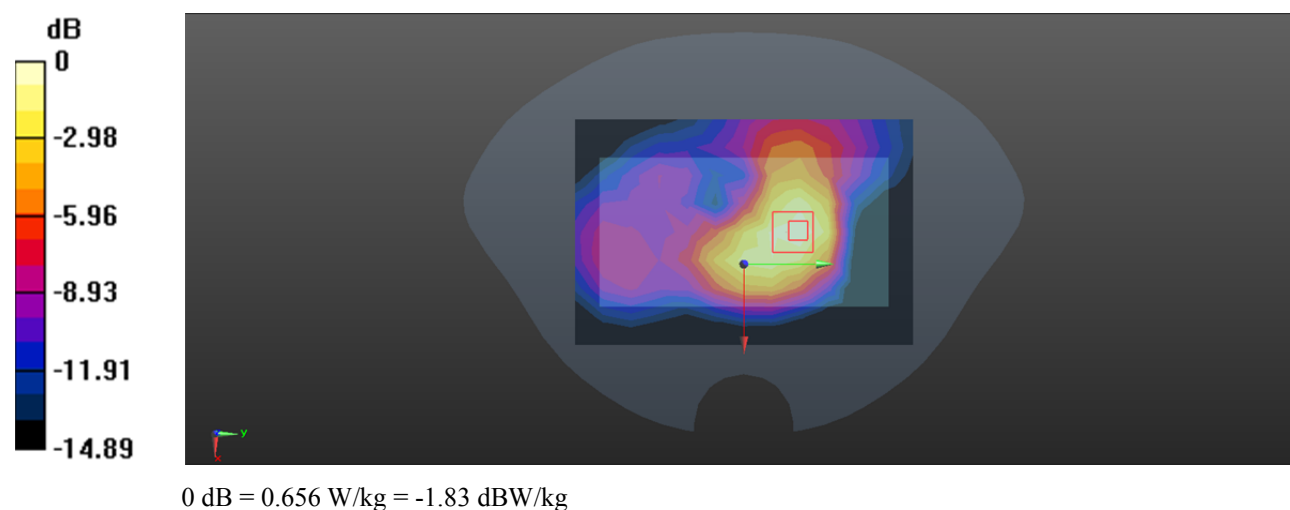

**Test Plot 3#: PCS 1900 Mid Body Left****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 41.154$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.25, 8.25, 8.25) @ 1880 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Body Left/PCS 1900 Mid/Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.758 W/kg

**Body Left/PCS 1900 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.42 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.923 W/kg

**SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.306 W/kg**

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 0.775 W/kg

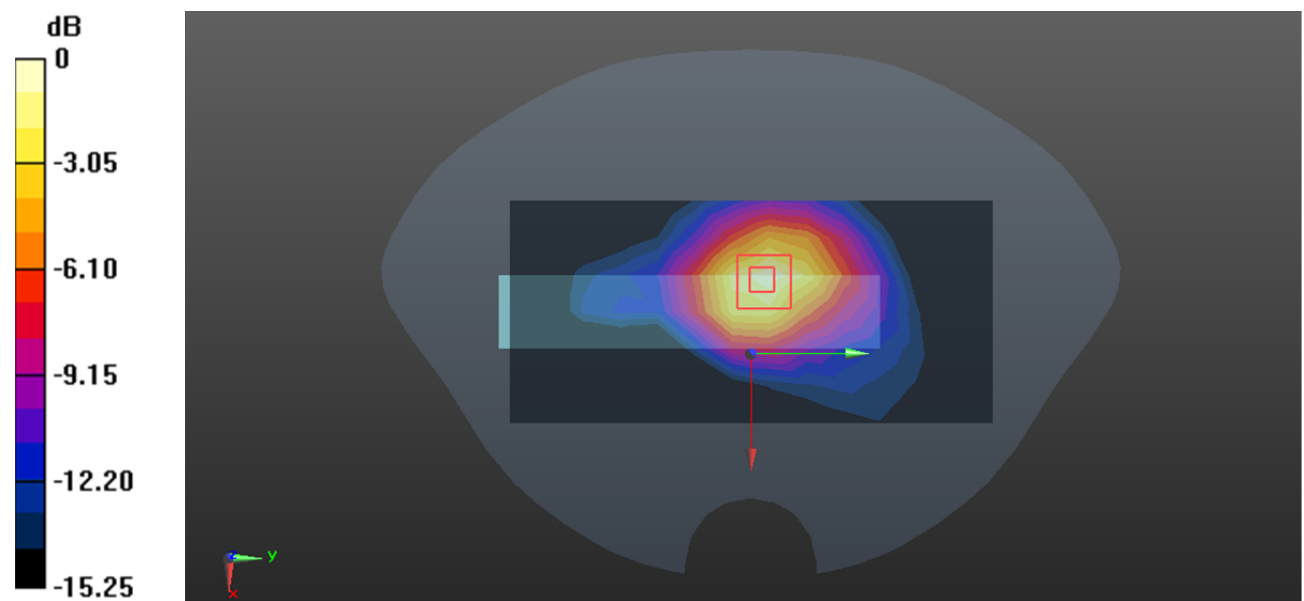

0 dB = 0.775 W/kg = -1.11 dBW/kg

**Test Plot 4#: PCS 1900 Mid Limb Left****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 41.154$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.25, 8.25, 8.25) @ 1880 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Limb Left/PCS 1900 Mid/Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.58 W/kg

**Limb Left/PCS 1900 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.82 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 3.54 W/kg

**SAR(1 g) = 1.76 W/kg; SAR(10 g) = 0.993 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 2.68 W/kg

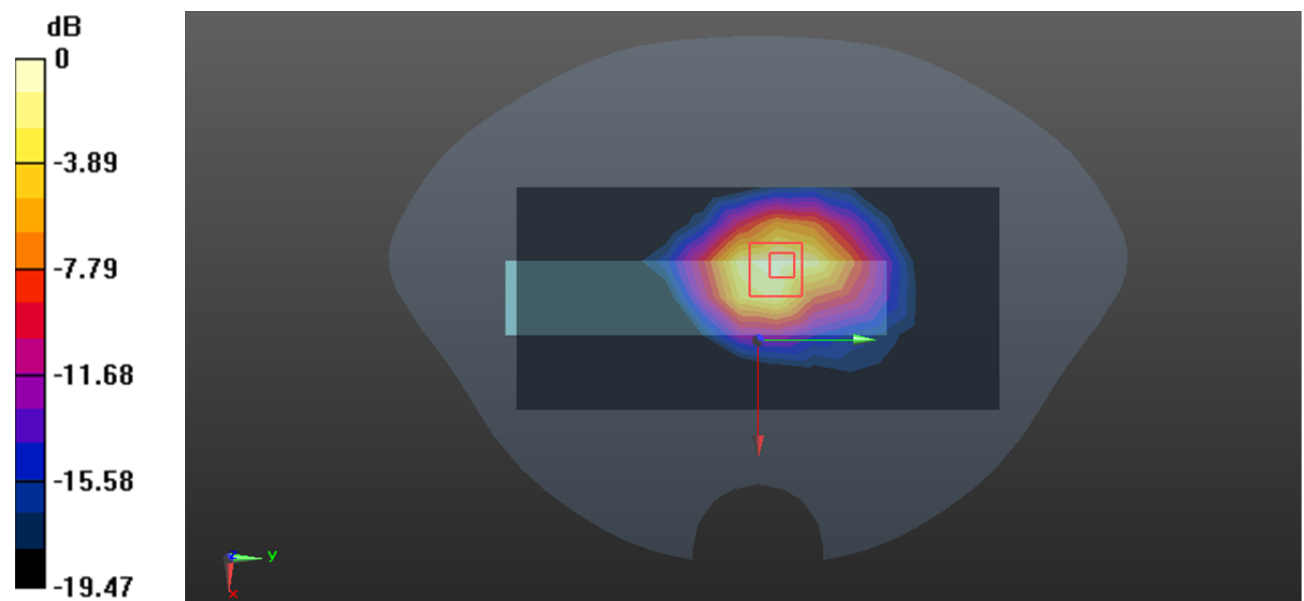

0 dB = 2.68 W/kg = 4.28 dBW/kg

**Test Plot 5#: WCDMA Band 2 Mid Body Left****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 41.154$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.25, 8.25, 8.25) @ 1880 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Body Left/WCDMA Band 2 Mid/Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.11 W/kg

**Body Left/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.03 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.783 W/kg; SAR(10 g) = 0.460 W/kg**

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 59%

Maximum value of SAR (measured) = 1.13 W/kg

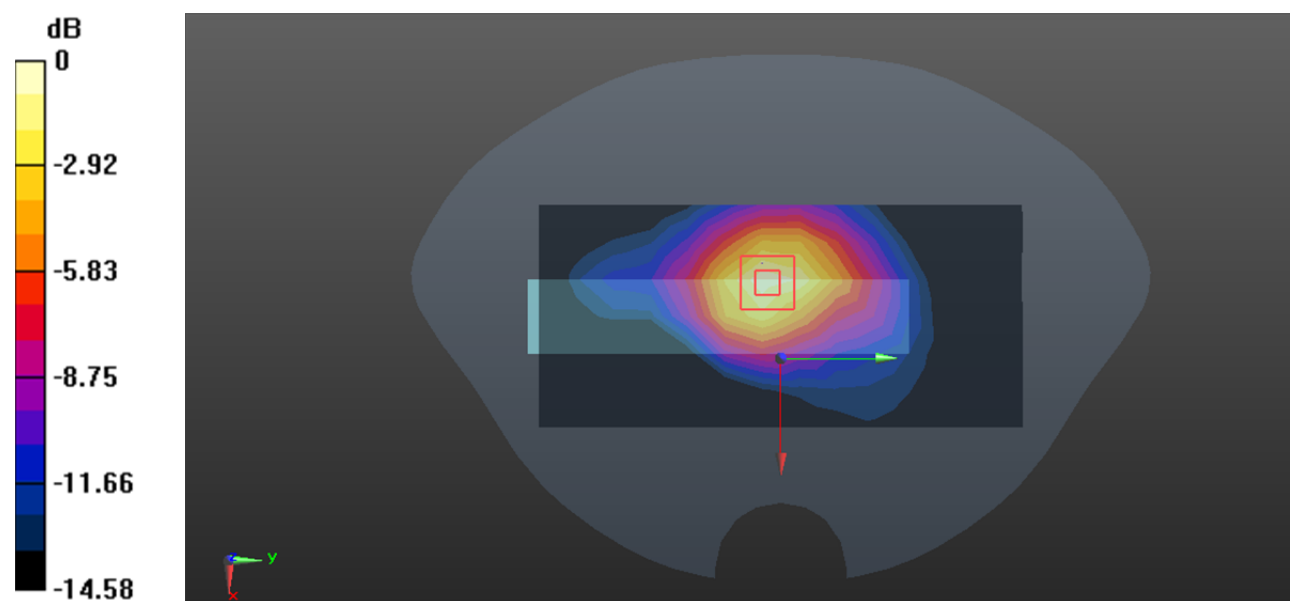

0 dB = 1.13 W/kg = 0.53 dBW/kg

**Test Plot 6#: WCDMA Band 2 Mid Limb Left****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 41.154$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.25, 8.25, 8.25) @ 1880 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Limb Left/WCDMA Band 2 Mid/Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.09 W/kg

**Limb Left/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.00 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 8.95 W/kg

**SAR(1 g) = 3.49 W/kg; SAR(10 g) = 1.9 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 36%

Maximum value of SAR (measured) = 5.86 W/kg

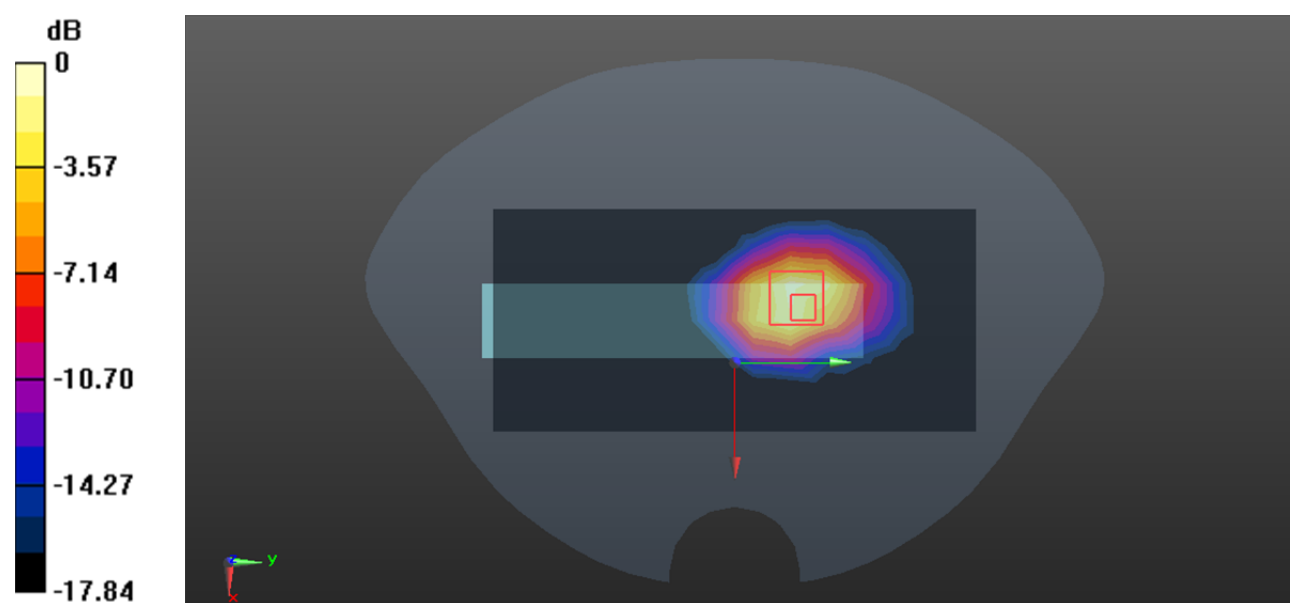

0 dB = 5.86 W/kg = 7.68 dBW/kg

**Test Plot 7#: WCDMA Band 5 Mid Body Back****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.939$  S/m;  $\epsilon_r = 40.685$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.41, 10.41, 10.41) @ 836.6 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Body Back/WCDMA Band 5 Mid/Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.392 W/kg

**Body Back/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.49 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.451 W/kg

**SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.228 W/kg**

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (&gt; 16 mm)

Ratio of SAR at M2 to SAR at M1 = 70.9%

Maximum value of SAR (measured) = 0.402 W/kg

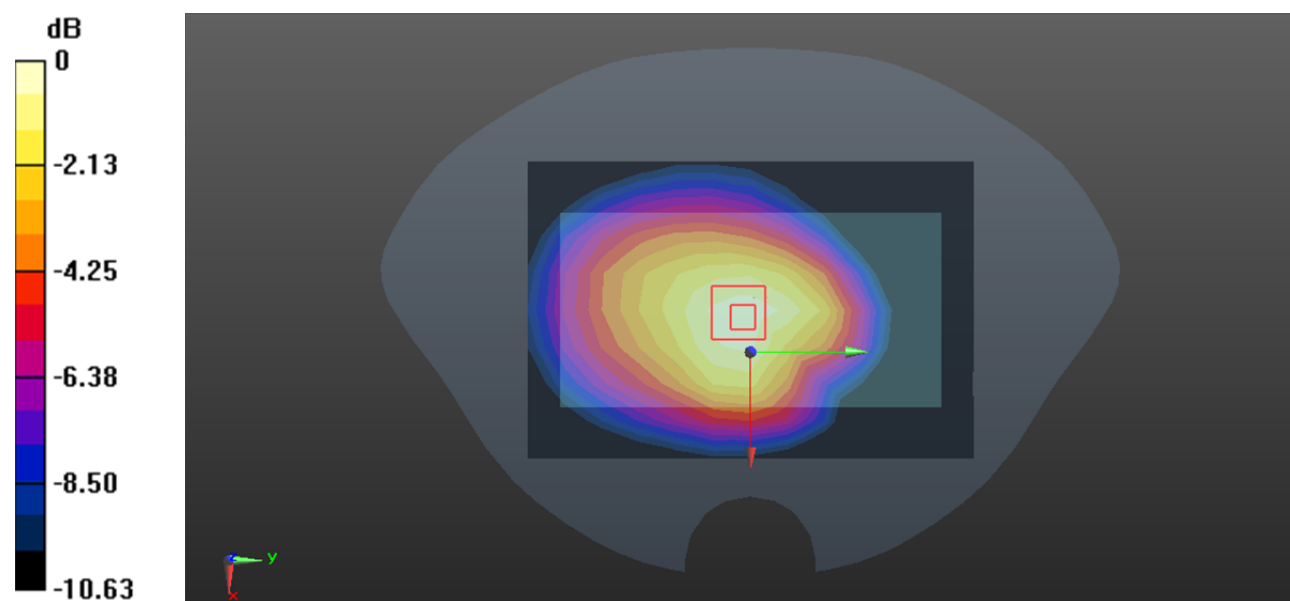

0 dB = 0.402 W/kg = -3.96 dBW/kg

**Test Plot 8#: WCDMA Band 5 Mid Limb Back****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.939$  S/m;  $\epsilon_r = 40.685$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.41, 10.41, 10.41) @ 836.6 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Limb Back/WCDMA Band 5 Mid/Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.764 W/kg

**Limb Back/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.48 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.977 W/kg

**SAR(1 g) = 0.649 W/kg; SAR(10 g) = 0.445 W/kg**

Smallest distance from peaks to all points 3 dB below = 18.1 mm

Ratio of SAR at M2 to SAR at M1 = 68.5%

Maximum value of SAR (measured) = 0.849 W/kg

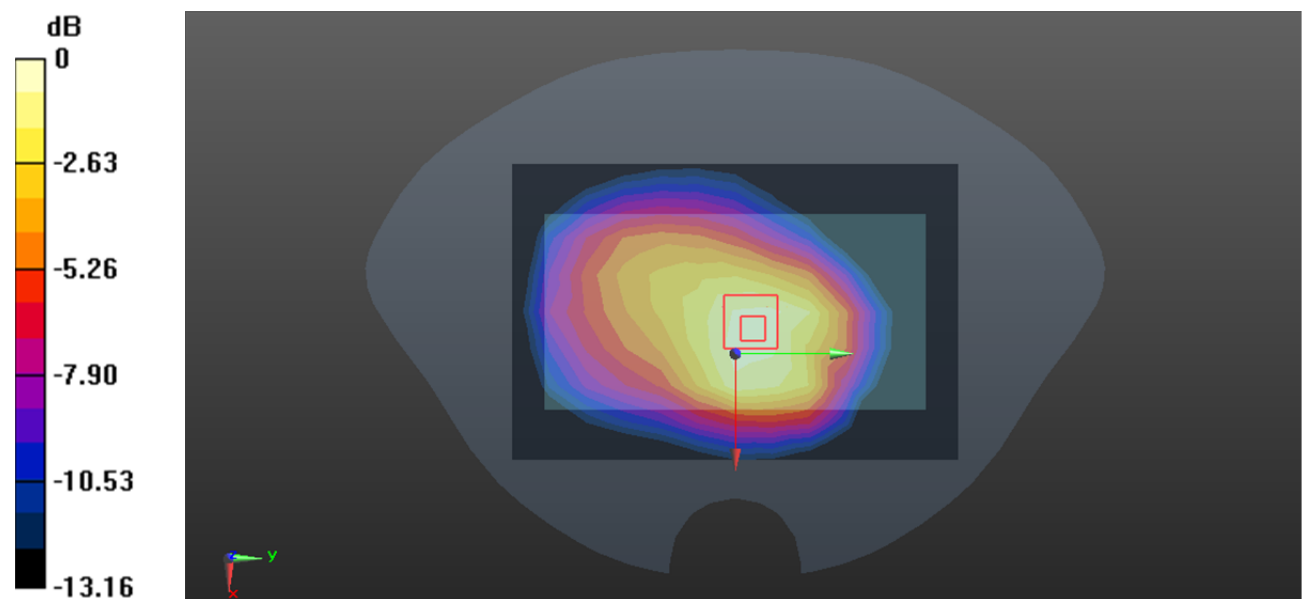

0 dB = 0.849 W/kg = -0.71 dBW/kg

**Test Plot 9#: LTE Band 2 1RB High Body Front****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.422$  S/m;  $\epsilon_r = 41.076$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.25, 8.25, 8.25) @ 1900 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Body Front/LTE Band 2 1RB High/Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.22 W/kg

**Body Front/LTE Band 2 1RB High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.53 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.851 W/kg; SAR(10 g) = 0.559 W/kg**

Smallest distance from peaks to all points 3 dB below = 17.9 mm

Ratio of SAR at M2 to SAR at M1 = 68.7%

Maximum value of SAR (measured) = 1.11 W/kg

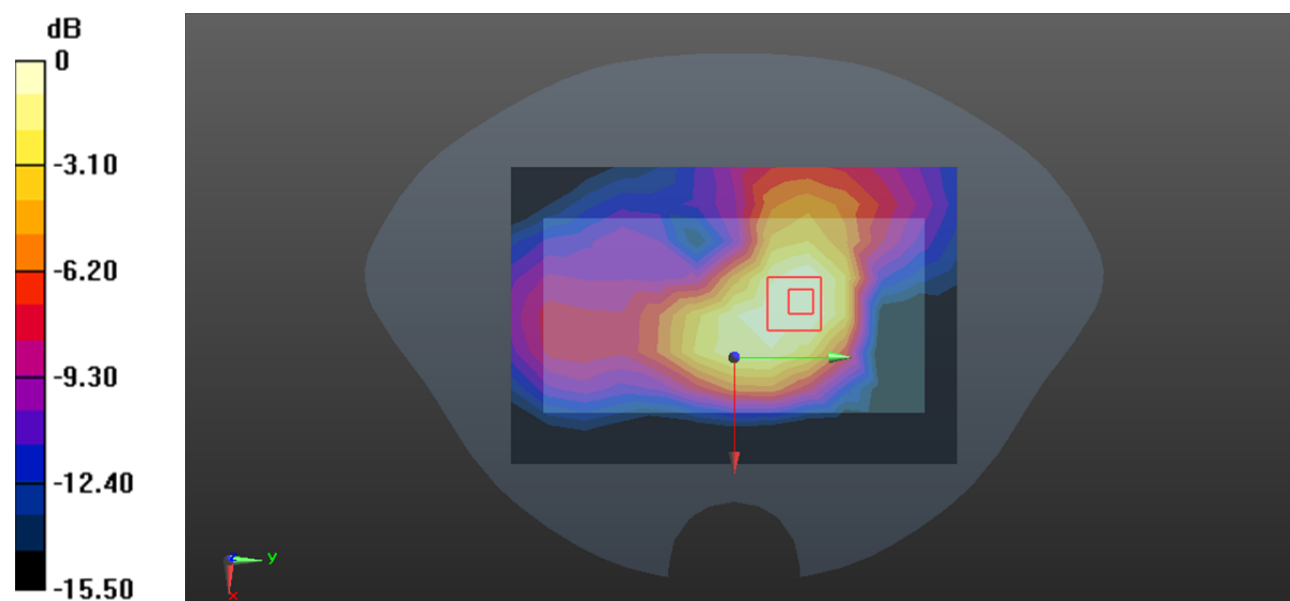

0 dB = 1.11 W/kg = 0.45 dBW/kg

**Test Plot 10#: LTE Band 2 1RB Mid Limb Front****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 41.154$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.25, 8.25, 8.25) @ 1880 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Limb Front/LTE Band 2 1RB Mid/Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.11 W/kg

**Limb Front/LTE Band 2 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.05 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.29 W/kg

**SAR(1 g) = 0.861 W/kg; SAR(10 g) = 0.561 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 68.5%

Maximum value of SAR (measured) = 1.13 W/kg

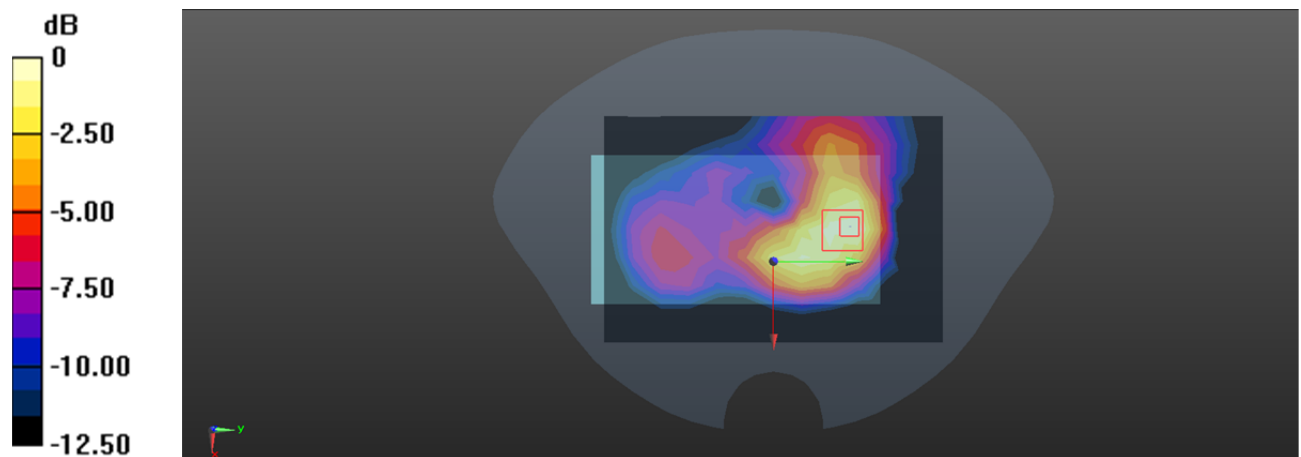

0 dB = 1.13 W/kg = 0.53 dBW/kg

**Test Plot 11#: LTE Band 4 1RB Mid Body Front****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.352$  S/m;  $\epsilon_r = 39.261$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.57, 8.57, 8.57) @ 1732.5 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Body Front/LTE Band 4 1RB Mid/Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.818 W/kg

**Body Front/LTE Band 4 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.71 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.810 W/kg

**SAR(1 g) = 0.572 W/kg; SAR(10 g) = 0.385 W/kg**

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 71.5%

Maximum value of SAR (measured) = 0.723 W/kg

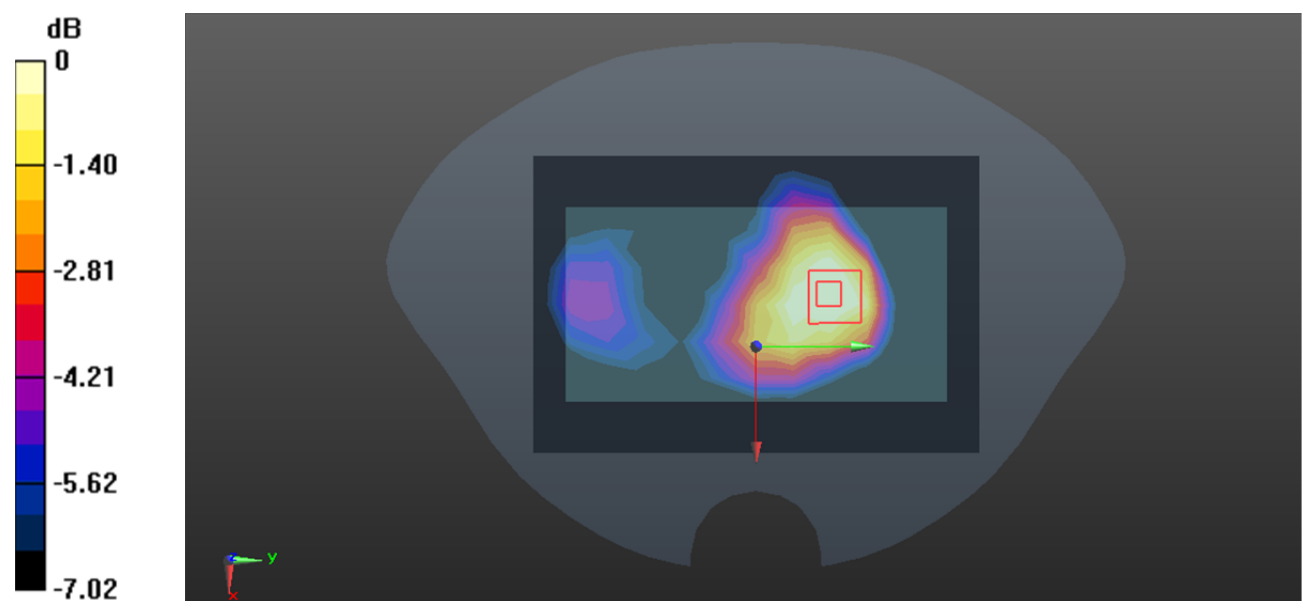

0 dB = 0.723 W/kg = -1.41 dBW/kg

**Test Plot 12#: LTE Band 4 1RB Mid Limb Front****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.352$  S/m;  $\epsilon_r = 39.261$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.57, 8.57, 8.57) @ 1732.5 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Limb Front/LTE Band 4 1RB Mid/Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.850 W/kg

**Limb Front/LTE Band 4 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.63 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.961 W/kg

**SAR(1 g) = 0.679 W/kg; SAR(10 g) = 0.456 W/kg**

Smallest distance from peaks to all points 3 dB below = 20 mm

Ratio of SAR at M2 to SAR at M1 = 71.2%

Maximum value of SAR (measured) = 0.863 W/kg

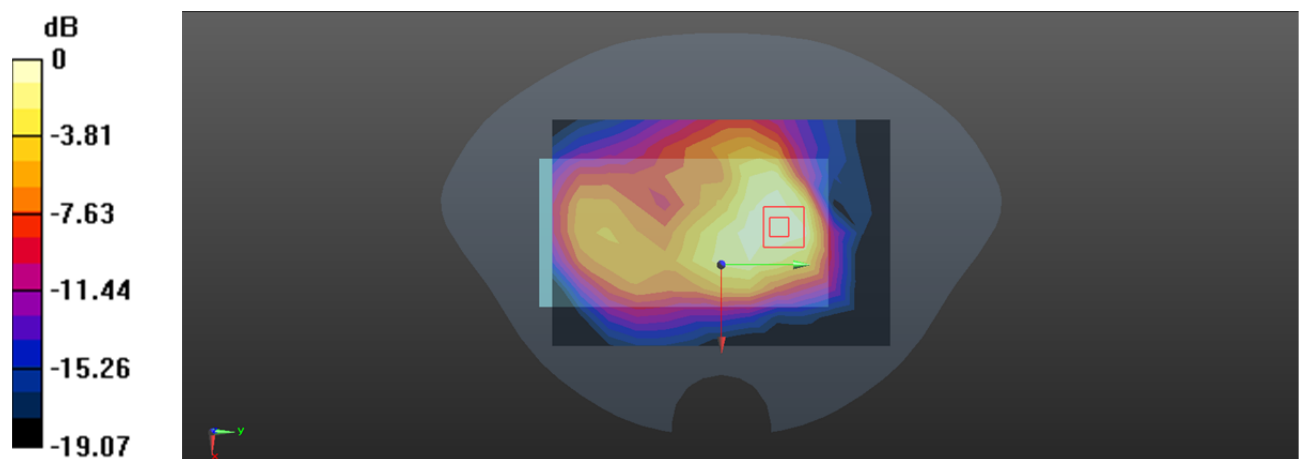

0 dB = 0.863 W/kg = -0.64 dBW/kg

**Test Plot 13#: LTE Band 5 1RB Mid Body Front****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.939$  S/m;  $\epsilon_r = 40.685$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.41, 10.41, 10.41) @ 836.5 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Body Front/LTE Band 5 1RB Mid/Area Scan (9x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.354 W/kg

**Body Front/LTE Band 5 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.91 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 0.391 W/kg

**SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.215 W/kg**

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (&gt; 16 mm)

Ratio of SAR at M2 to SAR at M1 = 72%

Maximum value of SAR (measured) = 0.351 W/kg

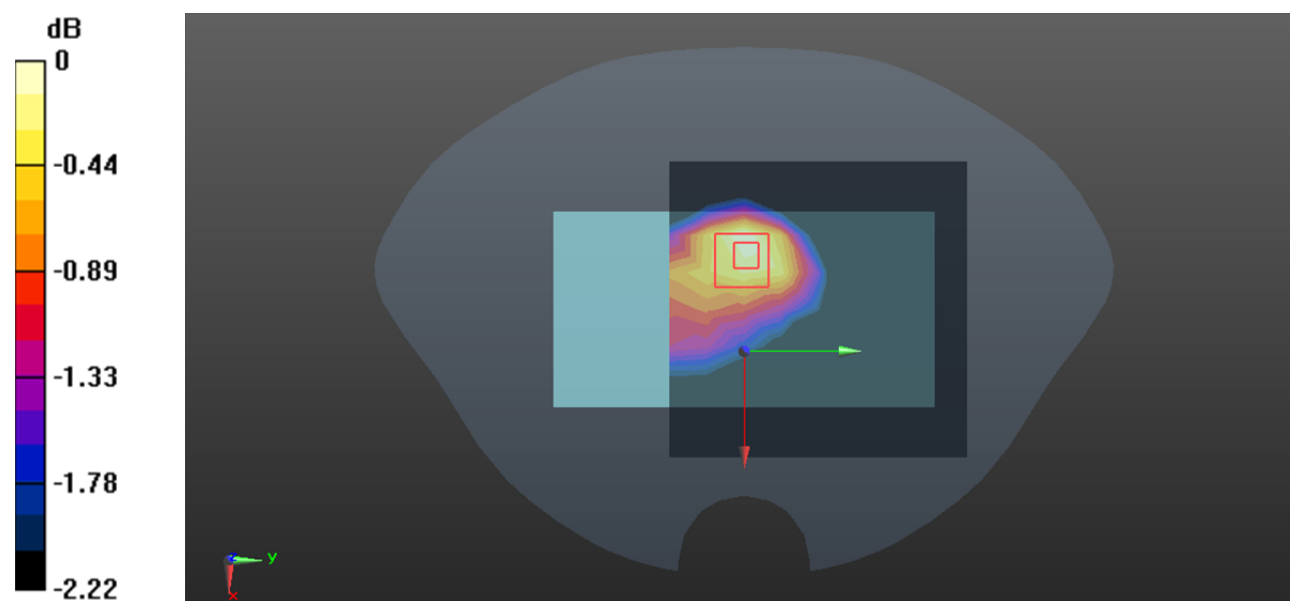

0 dB = 0.351 W/kg = -4.55 dBW/kg

**Test Plot 14#: LTE Band 5 1RB Mid Limb Front****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.939$  S/m;  $\epsilon_r = 40.685$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.41, 10.41, 10.41) @ 836.5 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Limb Front/LTE Band 5 1RB Mid/Area Scan (9x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.621 W/kg

**Limb Front/LTE Band 5 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.28 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.774 W/kg

**SAR(1 g) = 0.441 W/kg; SAR(10 g) = 0.297 W/kg**

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

Maximum value of SAR (measured) = 0.633 W/kg

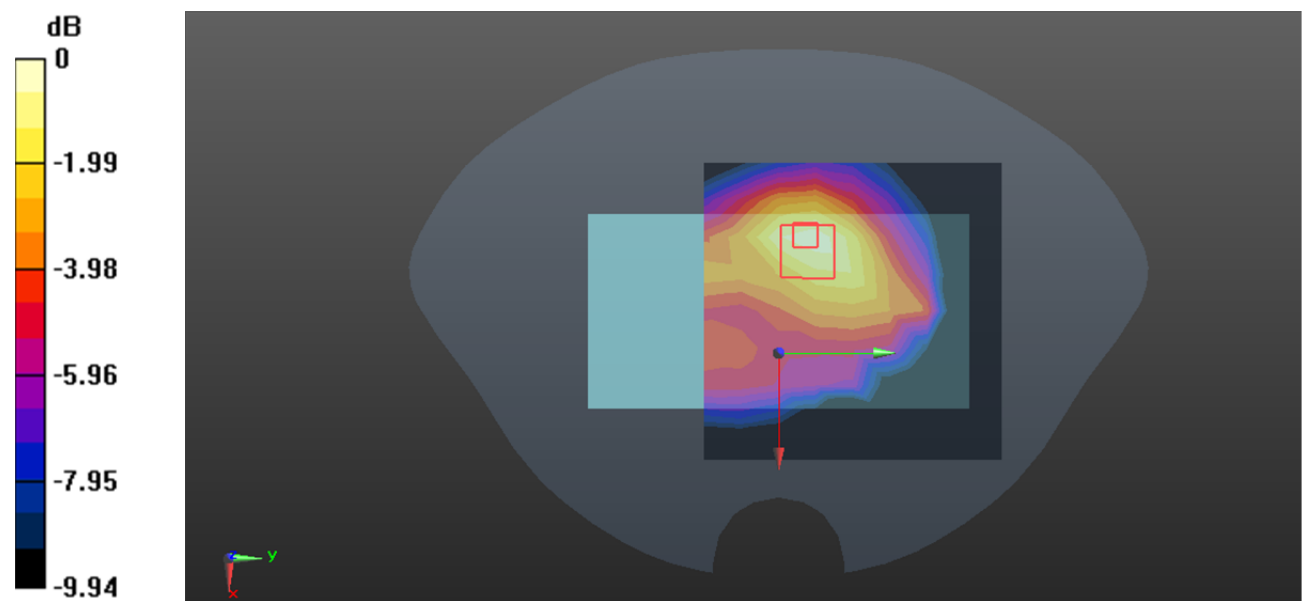

0 dB = 0.633 W/kg = -1.99 dBW/kg

**Test Plot 15#: LTE Band 7 1RB High Body Left****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.946$  S/m;  $\epsilon_r = 38.299$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.6, 7.6, 7.6) @ 2560 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Body Left/LTE Band 7 1RB High/Area Scan (9x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.24 W/kg

**Body Left/LTE Band 7 1RB High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.591 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.67 W/kg

**SAR(1 g) = 0.902 W/kg; SAR(10 g) = 0.475 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 1.38 W/kg

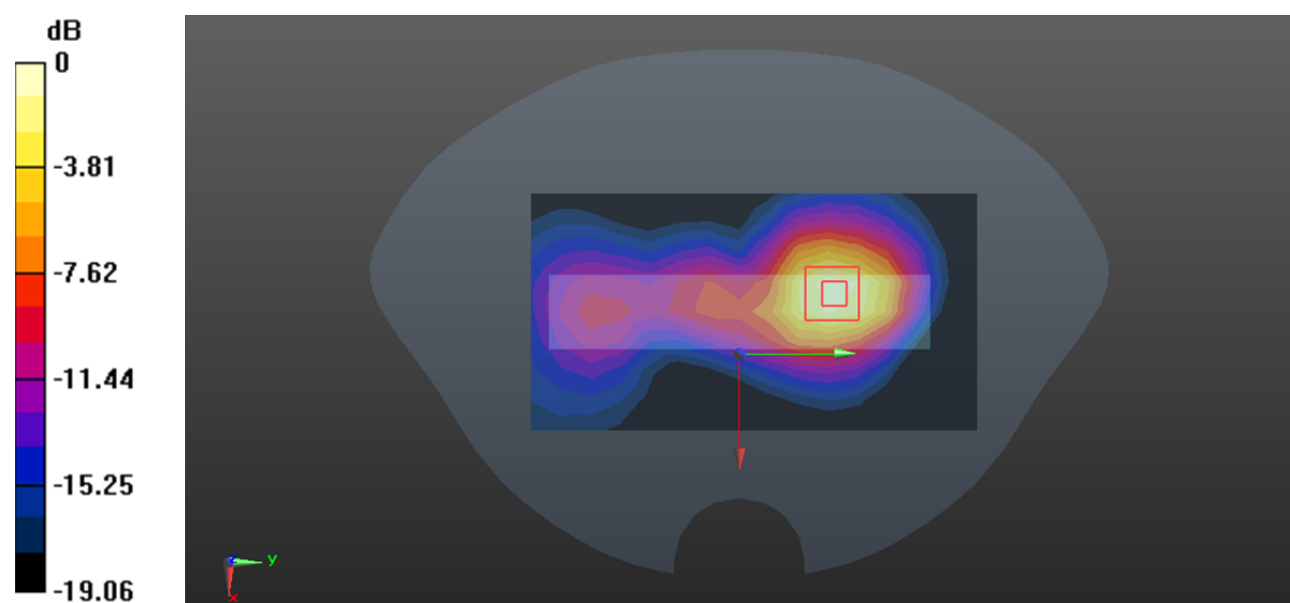

0 dB = 1.38 W/kg = 1.40 dBW/kg

**Test Plot 16#: LTE Band 7 1RB Mid Limb Left****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.911$  S/m;  $\epsilon_r = 38.308$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.6, 7.6, 7.6) @ 2535 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Limb Left/LTE Band 7 1RB Mid/Area Scan (9x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 3.04 W/kg

**Limb Left/LTE Band 7 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.44 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 4.54 W/kg

**SAR(1 g) = 1.91 W/kg; SAR(10 g) = 0.904 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 35.2%

Maximum value of SAR (measured) = 3.27 W/kg

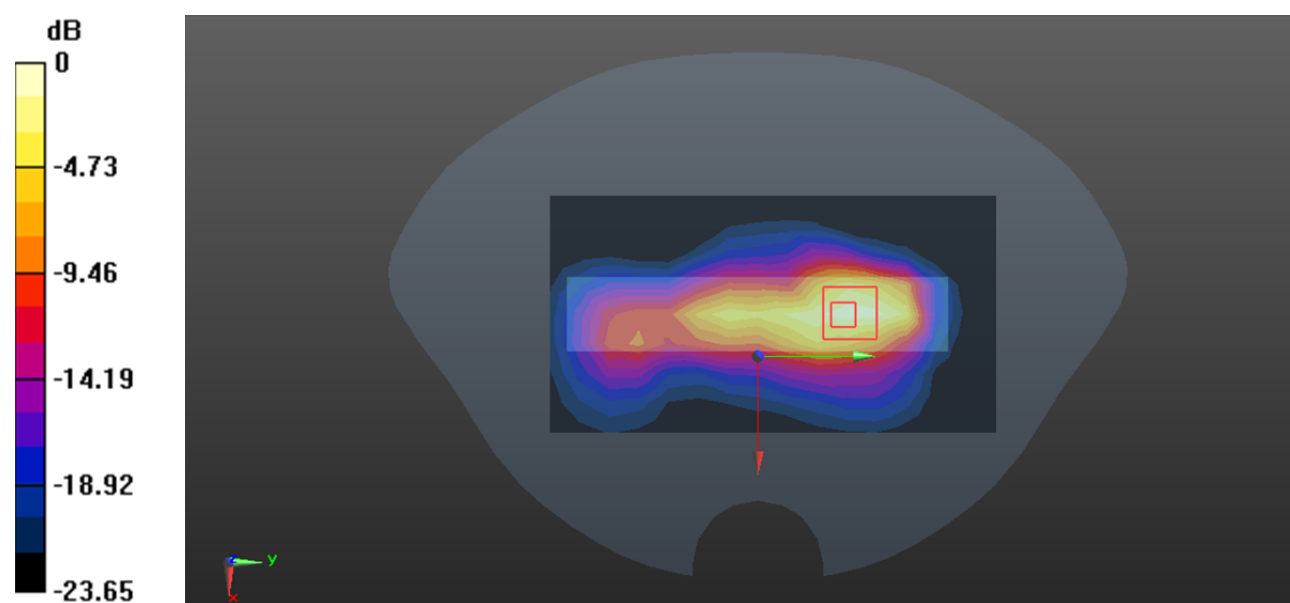

0 dB = 3.27 W/kg = 5.15 dBW/kg

**Test Plot 17#: LTE Band 38 1RB Mid Body Left****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.997$  S/m;  $\epsilon_r = 38.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.6, 7.6, 7.6) @ 2595 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Body Left/LTE Band 38 1RB Mid/Area Scan (8x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.847 W/kg

**Body Left/LTE Band 38 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.175 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.11 W/kg

**SAR(1 g) = 0.586 W/kg; SAR(10 g) = 0.303 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 0.921 W/kg

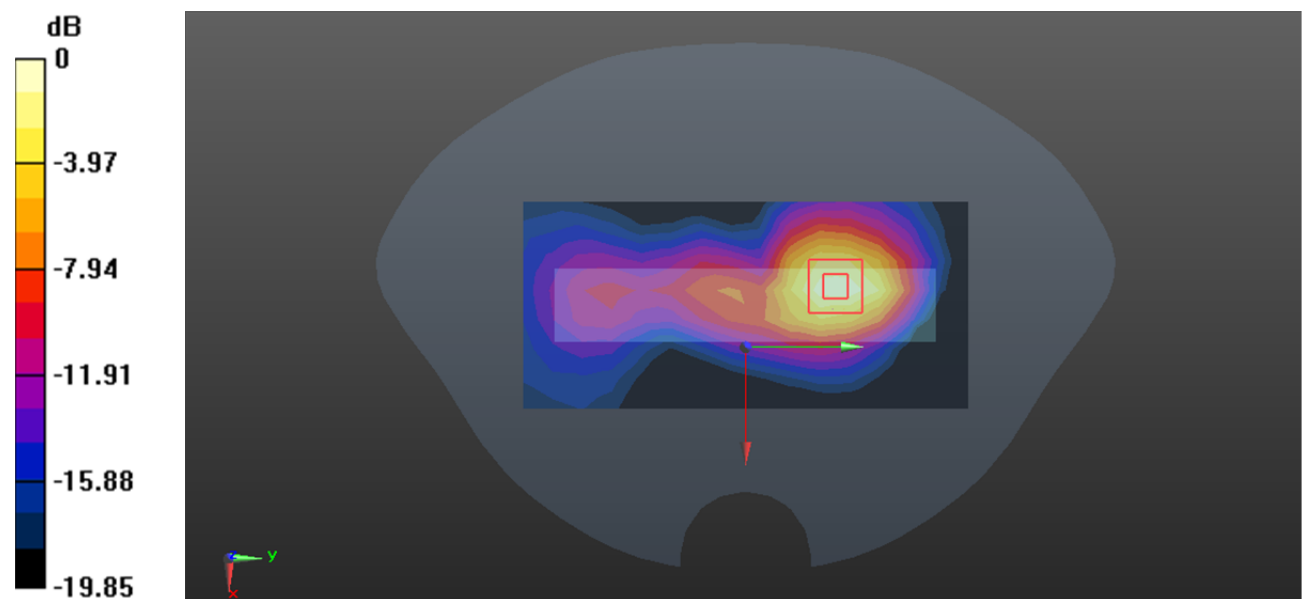

0 dB = 0.921 W/kg = -0.36 dBW/kg

**Test Plot 18#: LTE Band 38 1RB Mid Limb Left****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.997$  S/m;  $\epsilon_r = 38.287$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.6, 7.6, 7.6) @ 2595 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Limb Left/LTE Band 38 1RB Mid/Area Scan (8x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.78 W/kg

**Limb Left/LTE Band 38 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.97 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 3.30 W/kg

**SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.579 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 39.2%

Maximum value of SAR (measured) = 2.43 W/kg

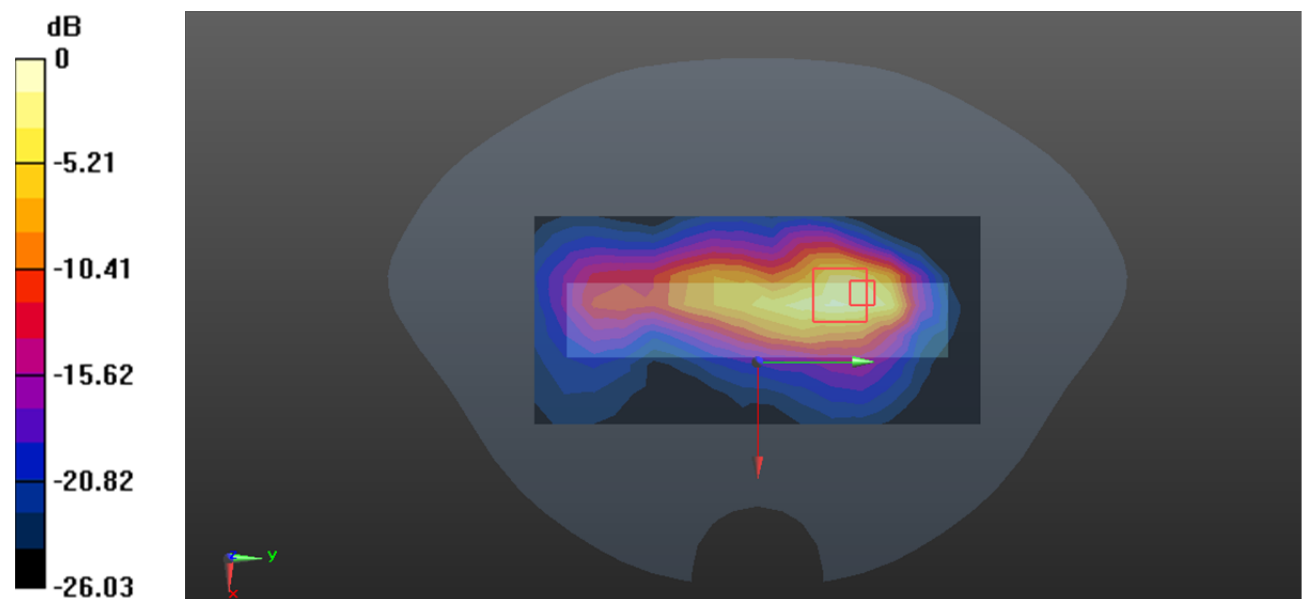

0 dB = 2.43 W/kg = 3.86 dBW/kg

**Test Plot 19#: 2.4G WLAN High Body Right****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.757$  S/m;  $\epsilon_r = 38.222$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.77, 7.77, 7.77) @ 2462 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Body Right/2.4G WLAN High/Area Scan (9x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.330 W/kg

**Body Right/2.4G WLAN High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.70 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.424 W/kg

**SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.127 W/kg**

Smallest distance from peaks to all points 3 dB below = 13.4 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 0.353 W/kg

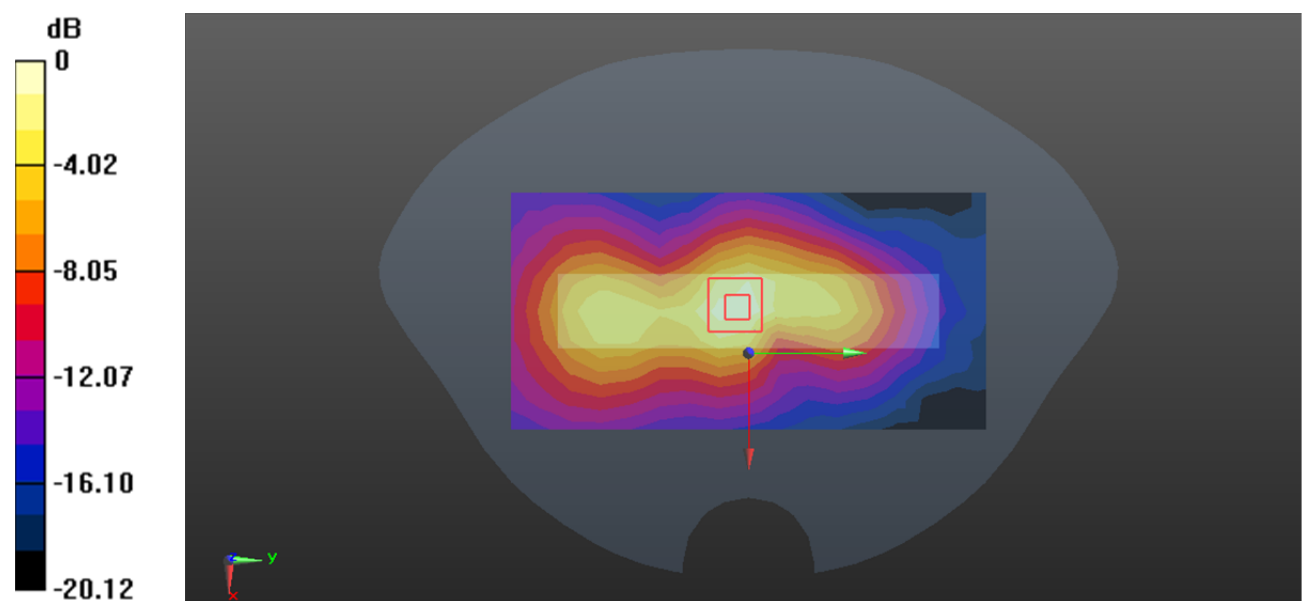

0 dB = 0.353 W/kg = -4.52 dBW/kg

**Test Plot 20#: 2.4G WLAN High Limb Right****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.757$  S/m;  $\epsilon_r = 38.222$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.77, 7.77, 7.77) @ 2462 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Limb Right/2.4G WLAN High/Area Scan (9x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.49 W/kg

**Limb Right/2.4G WLAN High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.46 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 2.15 W/kg

**SAR(1 g) = 0.914 W/kg; SAR(10 g) = 0.404 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 40.3%

Maximum value of SAR (measured) = 1.51 W/kg

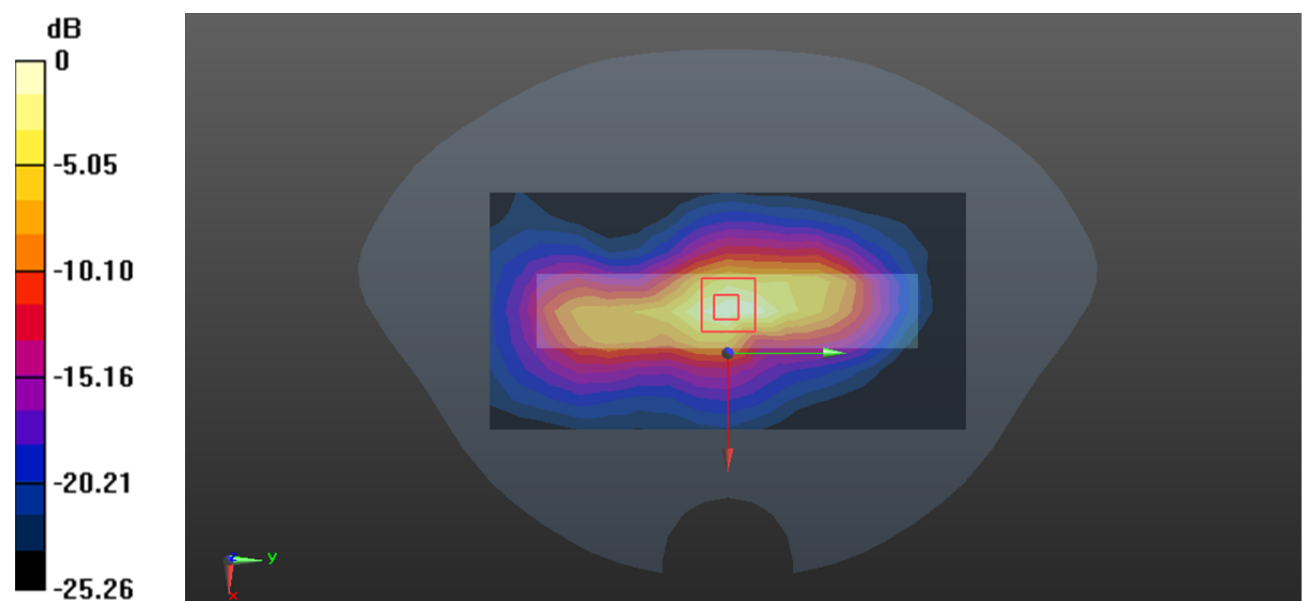

0 dB = 1.51 W/kg = 1.79 dBW/kg

**Test Plot 21#: 5.2G WLAN High Body Right****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, 802.11a (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.758$  S/m;  $\epsilon_r = 36.512$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.42, 5.42, 5.42) @ 5240 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Body Right/5.2G WLAN High/Area Scan (9x17x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.03 W/kg

**Body Right/5.2G WLAN High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.834 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.78 W/kg

**SAR(1 g) = 0.580 W/kg; SAR(10 g) = 0.215 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.7%

Maximum value of SAR (measured) = 1.19 W/kg

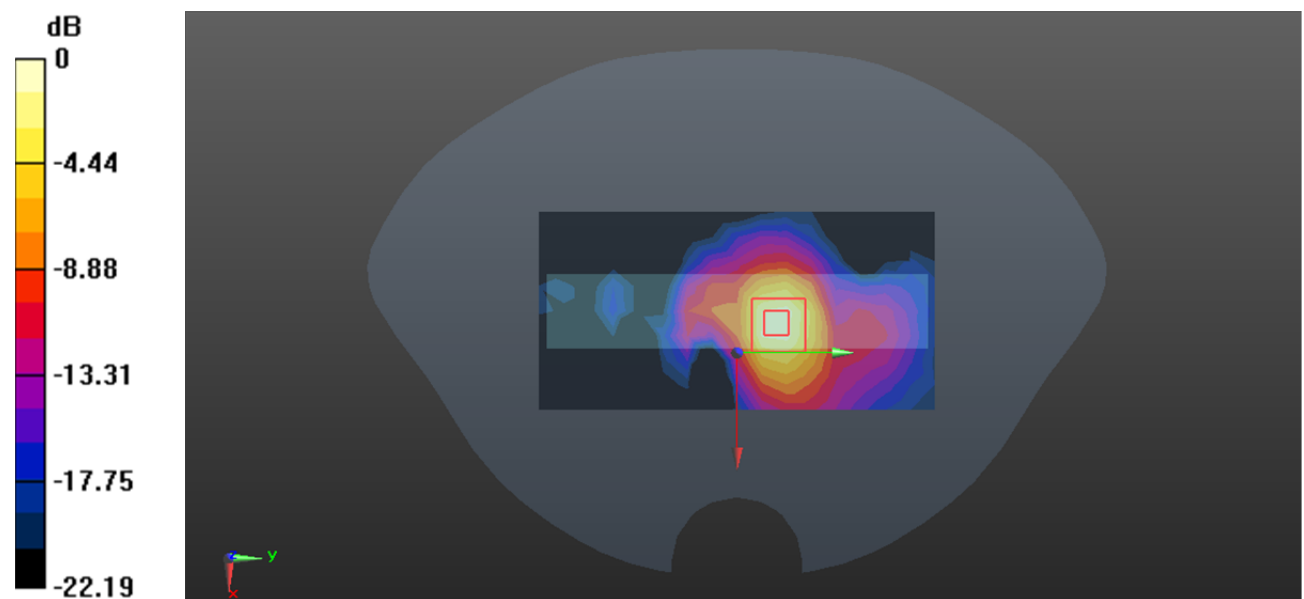

0 dB = 1.19 W/kg = 0.76 dBW/kg

**Test Plot 22#: 5.2G WLAN High Limb Right****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, 802.11a (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.758$  S/m;  $\epsilon_r = 36.512$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.42, 5.42, 5.42) @ 5240 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Limb Right/5.2G WLAN High/Area Scan (9x17x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 4.29 W/kg

**Limb Right/5.2G WLAN High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.326 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 12.2 W/kg

**SAR(1 g) = 3.09 W/kg; SAR(10 g) = 0.795 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 7.69 W/kg

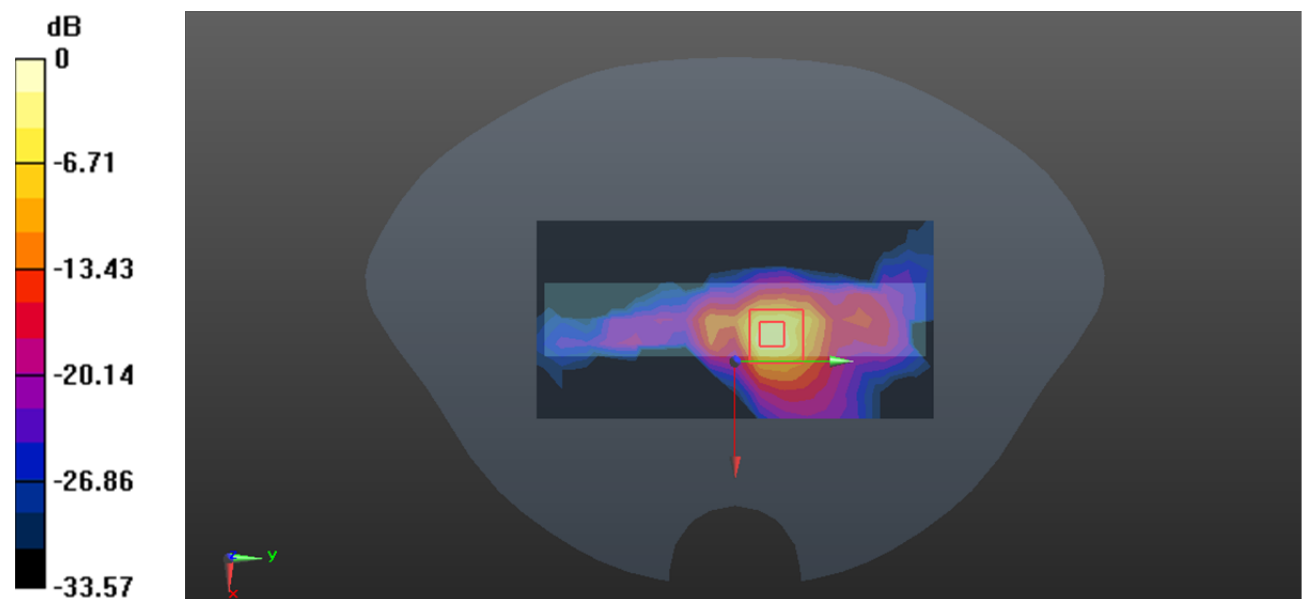

0 dB = 7.69 W/kg = 8.86 dBW/kg

**Test Plot 23#: 5.3G WLAN High Body Right****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, 802.11a (0); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5320$  MHz;  $\sigma = 4.796$  S/m;  $\epsilon_r = 35.817$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.42, 5.42, 5.42) @ 5320 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Body Right/5.3G WLAN High/Area Scan (9x17x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.39 W/kg

**Body Right/5.3G WLAN High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.800 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 2.05 W/kg

**SAR(1 g) = 0.671 W/kg; SAR(10 g) = 0.254 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.6%

Maximum value of SAR (measured) = 1.38 W/kg

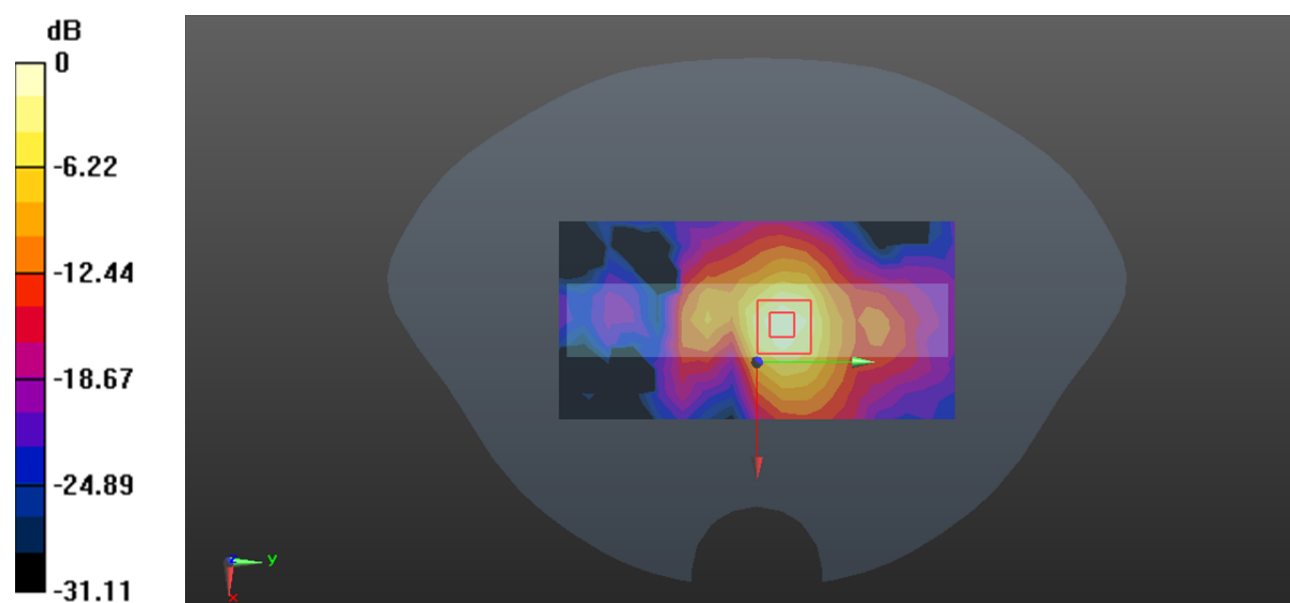

0 dB = 1.38 W/kg = 1.40 dBW/kg

**Test Plot 24#: 5.3G WLAN High Limb Right****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, 802.11a (0); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5320$  MHz;  $\sigma = 4.796$  S/m;  $\epsilon_r = 35.817$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.42, 5.42, 5.42) @ 5320 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Limb Right/5.3G WLAN High/Area Scan (9x17x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 6.98 W/kg

**Limb Right/5.3G WLAN High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.40 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 13.0 W/kg

**SAR(1 g) = 3.2 W/kg; SAR(10 g) = 0.807 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 7.94 W/kg

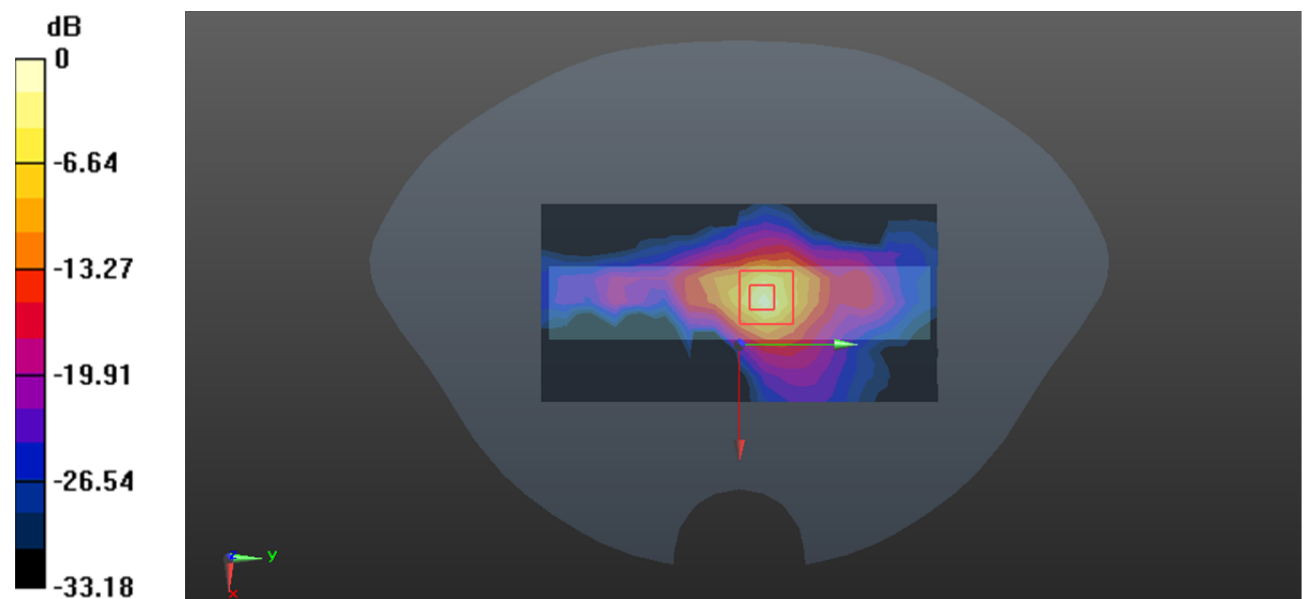

0 dB = 7.94 W/kg = 9.00 dBW/kg

**Test Plot 25#: 5.6G WLAN High Body Right****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, 802.11a (0); Frequency: 5700 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5700$  MHz;  $\sigma = 5.012$  S/m;  $\epsilon_r = 35.797$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.8, 4.8, 4.8) @ 5700 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Body Right/5.6G WLAN High/Area Scan (9x17x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.879 W/kg

**Body Right/5.6G WLAN High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.282 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.49 W/kg

**SAR(1 g) = 0.433 W/kg; SAR(10 g) = 0.149 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 0.991 W/kg

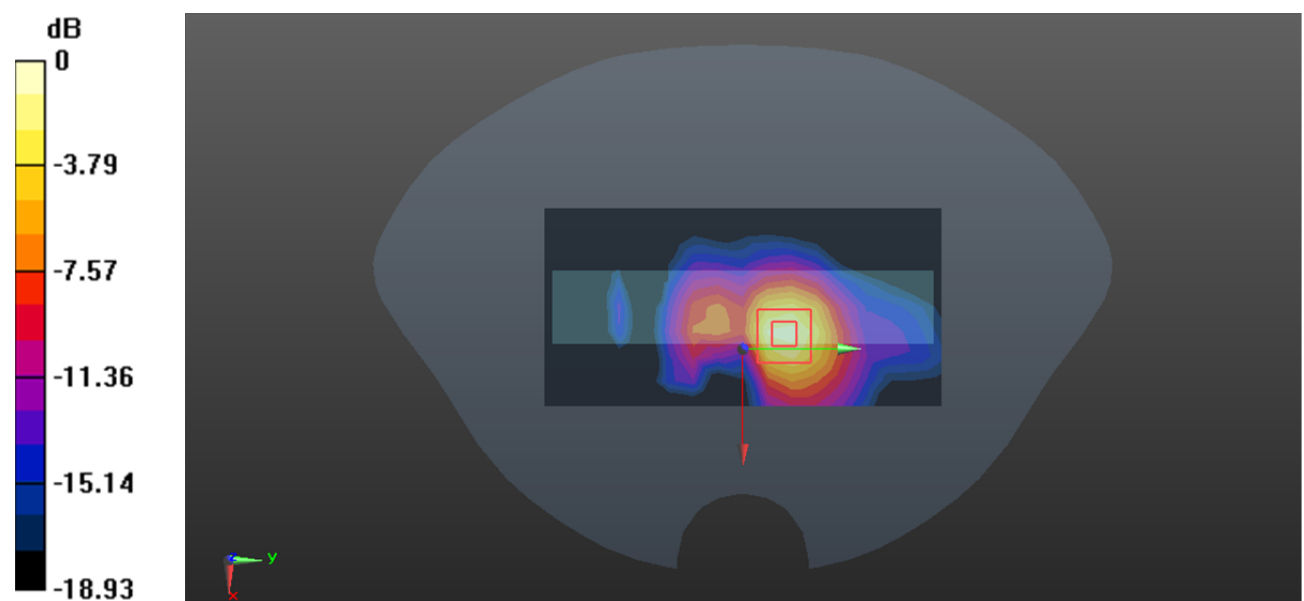

0 dB = 0.991 W/kg = -0.04 dBW/kg

**Test Plot 26#: 5.6G WLAN High Limb Right****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, 802.11a (0); Frequency: 5700 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5700$  MHz;  $\sigma = 5.012$  S/m;  $\epsilon_r = 35.797$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.8, 4.8, 4.8) @ 5700 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Limb Right/5.6G WLAN High/Area Scan (9x17x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 4.28 W/kg

**Limb Right/5.6G WLAN High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.701 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 8.29 W/kg

**SAR(1 g) = 1.91 W/kg; SAR(10 g) = 0.535 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 5.12 W/kg

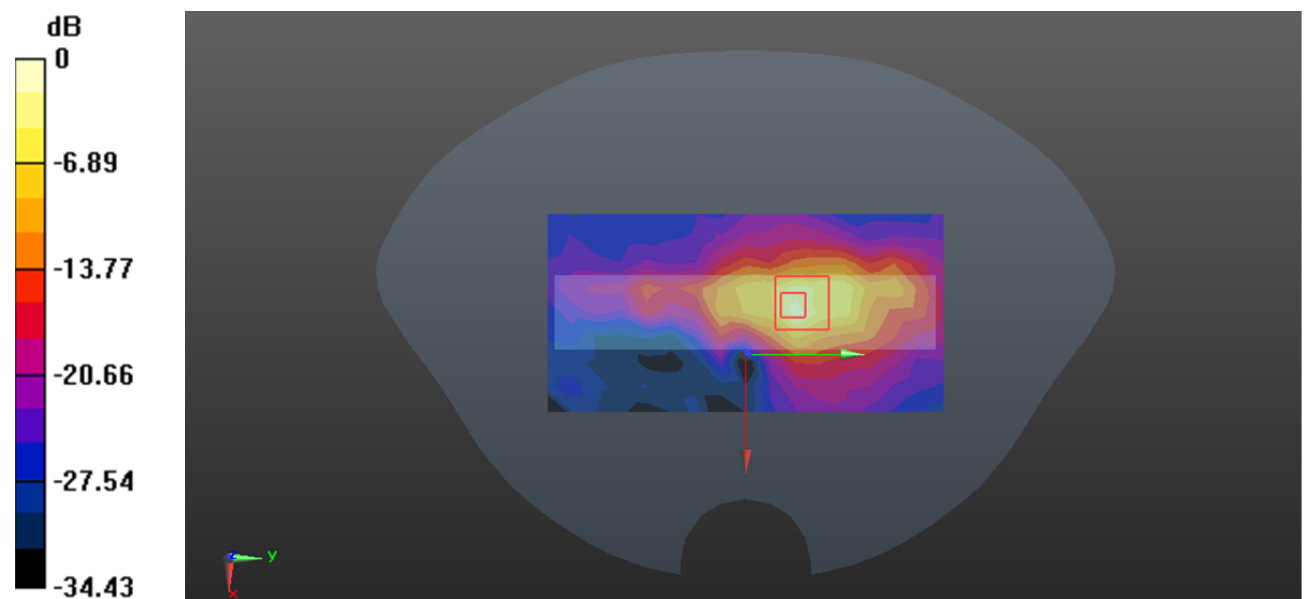

0 dB = 5.12 W/kg = 7.09 dBW/kg

**Test Plot 27#: 5.8G WLAN Low Body Right****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, 802.11n40 (0); Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5755$  MHz;  $\sigma = 5.118$  S/m;  $\epsilon_r = 34.739$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.91, 4.91, 4.91) @ 5755 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Body Right/5.8G WLAN Low/Area Scan (9x17x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.993 W/kg

**Body Right/5.8G WLAN Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.678 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 2.01 W/kg

**SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.163 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 55.9%

Maximum value of SAR (measured) = 1.13 W/kg

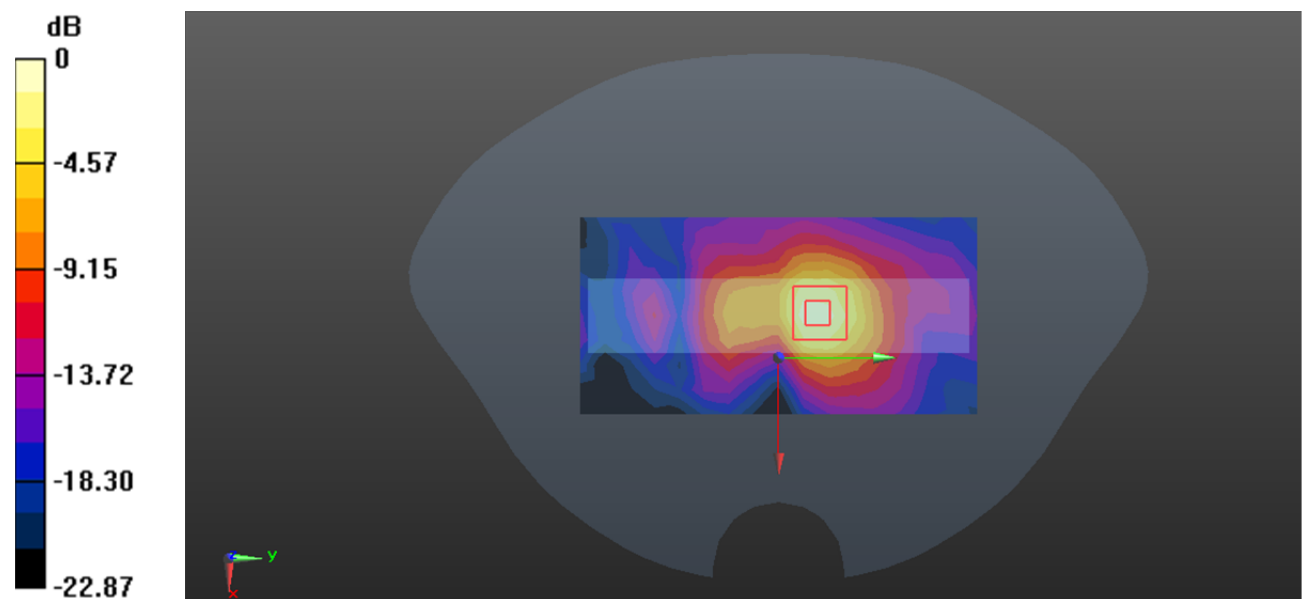

0 dB = 1.13 W/kg = 0.53 dBW/kg

**Test Plot 28#: 5.8G WLAN Low Limb Right****DUT: POS terminal; Type: Mino 1; Serial: 3QZF-1**

Communication System: UID 0, 802.11n40 (0); Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5755$  MHz;  $\sigma = 5.118$  S/m;  $\epsilon_r = 34.739$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.91, 4.91, 4.91) @ 5755 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Limb Right/5.8G WLAN Low/Area Scan (9x17x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.28 W/kg

**Limb Right/5.8G WLAN Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.927 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 7.62 W/kg

**SAR(1 g) = 1.75 W/kg; SAR(10 g) = 0.476 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 53.7%

Maximum value of SAR (measured) = 4.53 W/kg

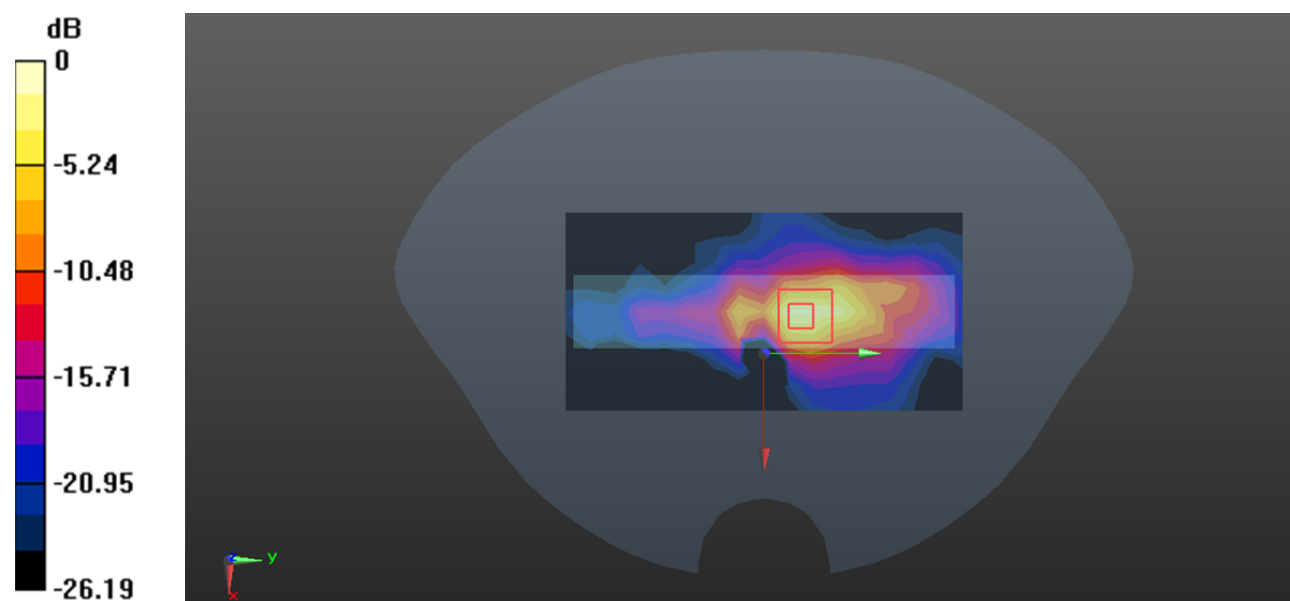

0 dB = 4.53 W/kg = 6.56 dBW/kg