

**Test Plot 1#: GSM 850 High Body Back****DUT: POS TERMINAL; Type: N62; Serial: 2PN0-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 848.8MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 848.8\text{MHz}$ ;  $\sigma = 0.951\text{ S/m}$ ;  $\epsilon_r = 41.125$ ;  $\rho = 1000\text{ kg/m}^3$ ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @ 848.8 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x10x1):**Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 1.26 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 34.18 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.76 W/kg

**SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.704 W/kg**

Maximum value of SAR (measured) = 1.33 W/kg

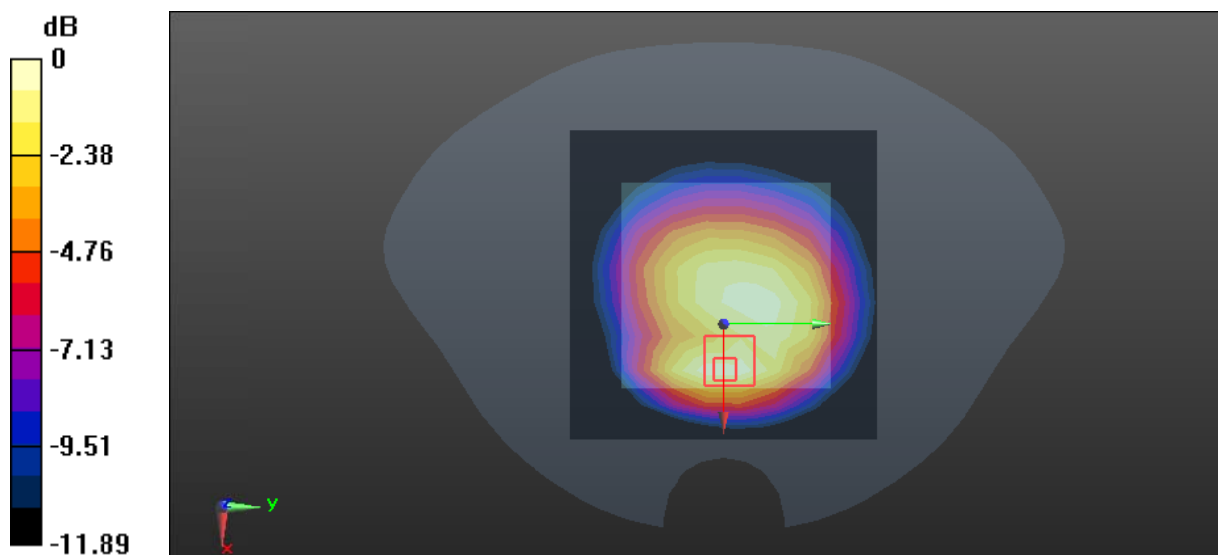

0 dB = 1.33 W/kg = 1.24dBW/kg

**Test Plot 2#: PCS 1900 Mid Body Back****DUT: POS TERMINAL; Type: N62; Serial: 2PN0-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880MHz; Duty Cycle: 1:4  
Medium parameters used:  $f = 1880\text{MHz}$ ;  $\sigma = 1.418\text{ S/m}$ ;  $\epsilon_r = 39.288$ ;  $\rho = 1000\text{ kg/m}^3$ ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @ 1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x10x1):**Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.344 W/kg


**Zoom Scan (5x5x7) /Cube 0:**Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 9.677 V/m; Power Drift = 0.13dB

Peak SAR (extrapolated) = 0.600 W/kg

**SAR(1 g) = 0.325 W/kg; SAR(10 g) = 0.183 W/kg**

Maximum value of SAR (measured) = 0.403 W/kg

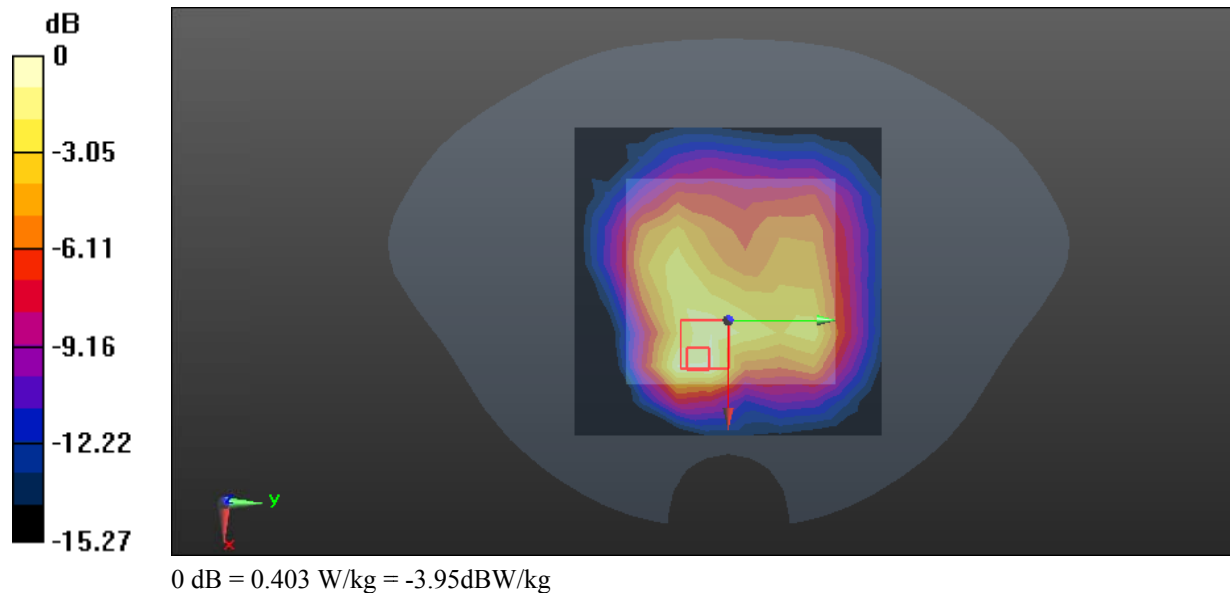

**Test Plot 3#: WCDMA Band 2 Mid Body Back****DUT: POS TERMINAL; Type: N62; Serial: 2PN0-1**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 39.288$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @ 1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.480 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.80 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.807 W/kg

**SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.249 W/kg**

Maximum value of SAR (measured) = 0.552 W/kg

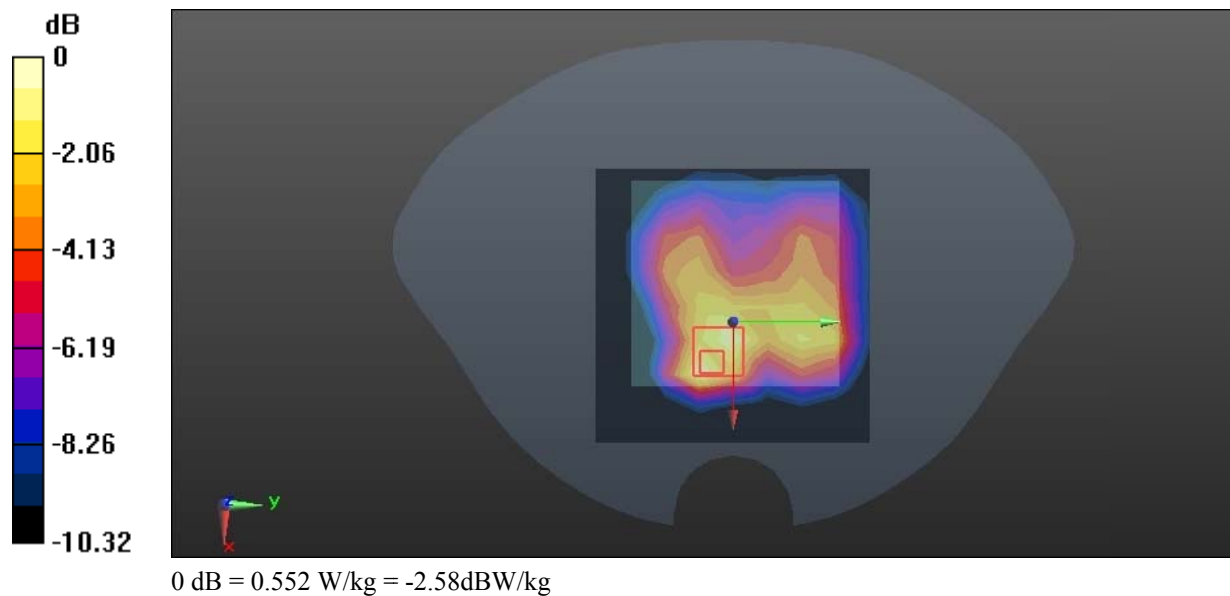

**Test Plot 4#: WCDMA Band 5 Mid Body Back****DUT: POS TERMINAL; Type: N62; Serial: 2PN0-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.935$  S/m;  $\epsilon_r = 41.26$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @ 836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.604 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.45 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.865 W/kg

**SAR(1 g) = 0.534 W/kg; SAR(10 g) = 0.341 W/kg**

Maximum value of SAR (measured) = 0.653 W/kg

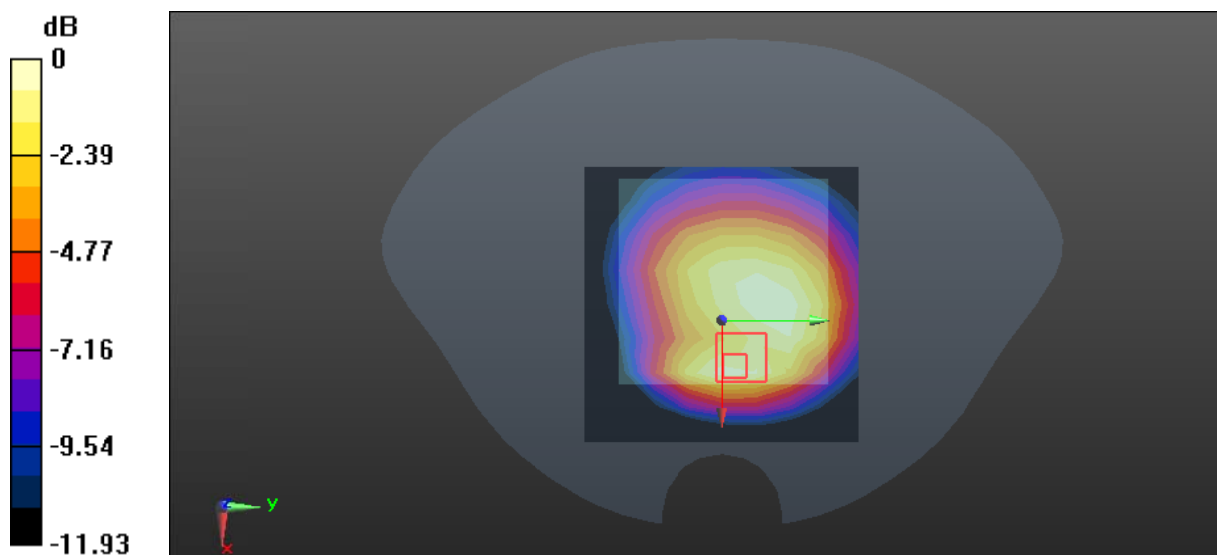

0 dB = 0.653 W/kg = -1.85dBW/kg

**Test Plot 5#: LTE Band 2 1RB Mid Body Back****DUT: POS TERMINAL; Type: N62; Serial: 2PN0-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 39.288$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @ 1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.473 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.04 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.735 W/kg

**SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.239 W/kg**

Maximum value of SAR (measured) = 0.490 W/kg

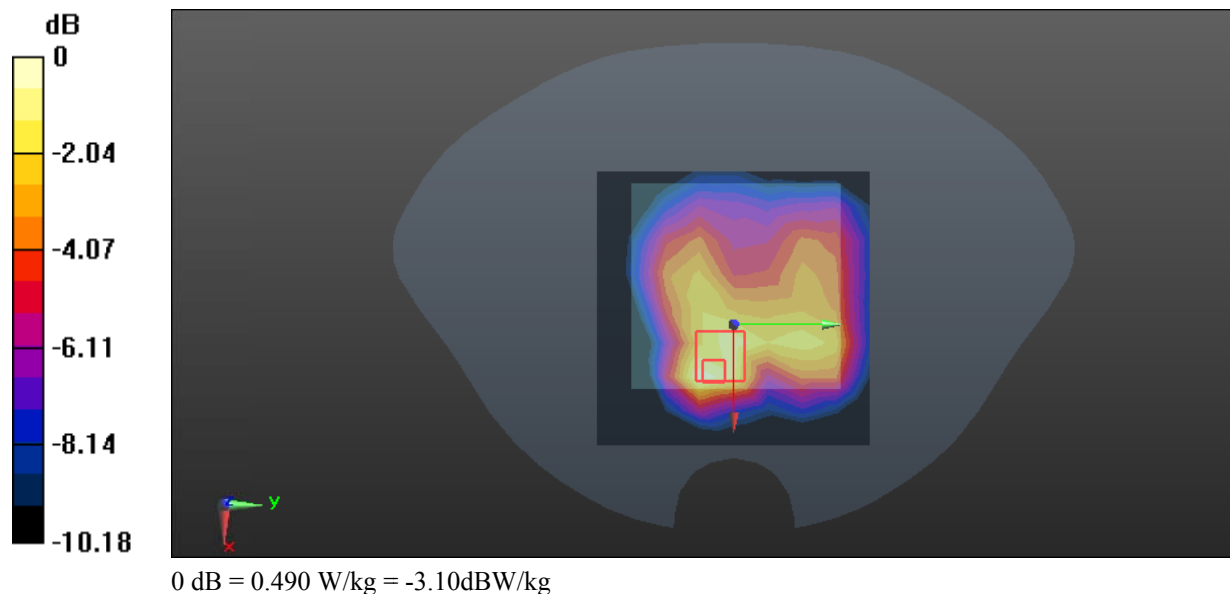

**Test Plot 6#: LTE Band 4 1RB Mid Body Back****DUT: POS TERMINAL; Type: N62; Serial: 2PN0-1**

Communication System: Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.373$  S/m;  $\epsilon_r = 39.399$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71) @ 1732.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.565 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.24 V/m; Power Drift = 0.16dB

Peak SAR (extrapolated) = 0.689 W/kg

**SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.337 W/kg**

Maximum value of SAR (measured) = 0.557 W/kg

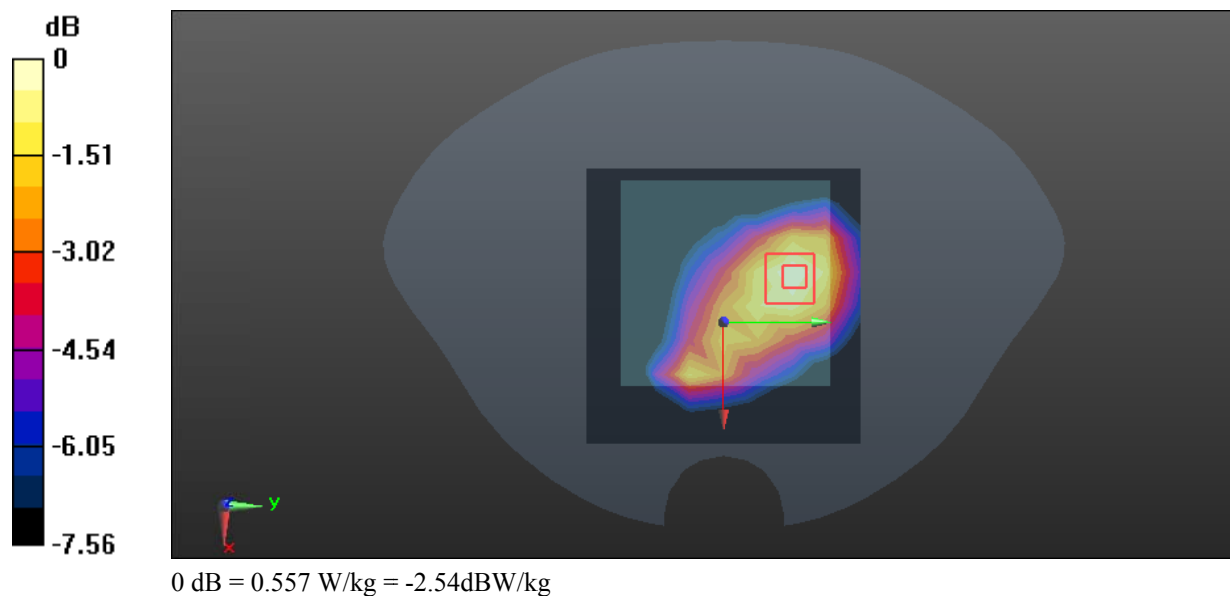

**Test Plot 7#: LTE Band 5 1RB Mid Body Back****DUT: POS TERMINAL; Type: N62; Serial: 2PN0-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.932$  S/m;  $\epsilon_r = 41.261$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @ 836.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.678 W/kg


**Zoom Scan (5x5x7) /Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.09 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.844 W/kg

**SAR(1 g) = 0.633 W/kg; SAR(10 g) = 0.463 W/kg**

Maximum value of SAR (measured) = 0.704 W/kg

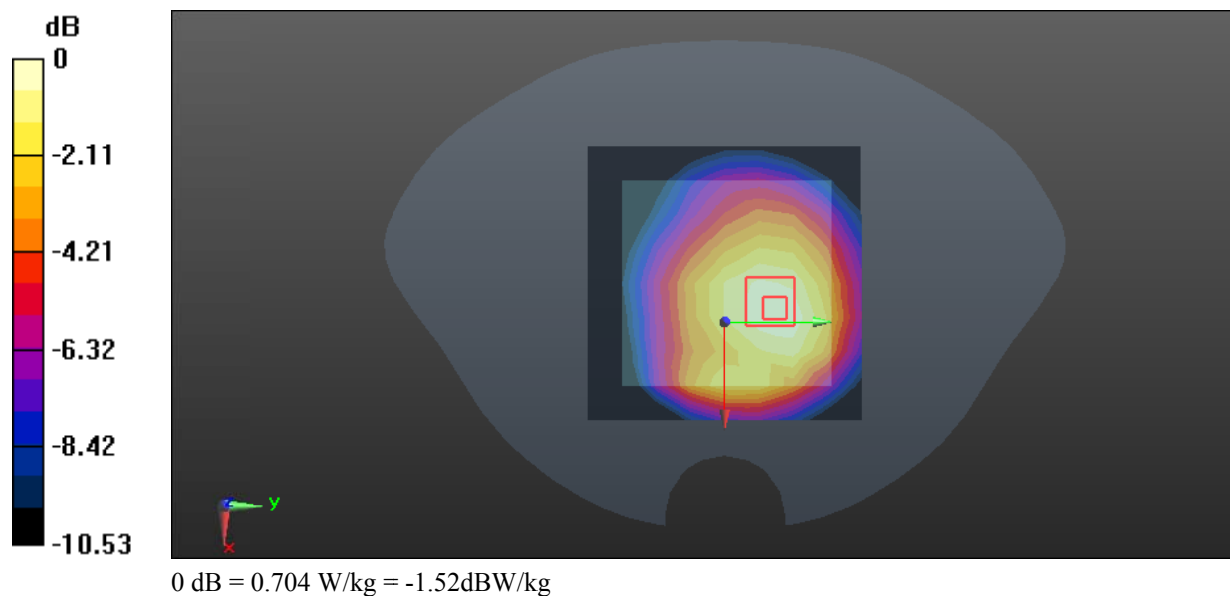

**Test Plot 8#: LTE Band 7 1RB Mid Body Left****DUT: POS TERMINAL; Type: N62; Serial: 2PN0-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.957$  S/m;  $\epsilon_r = 40.321$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @ 2535 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.709 W/kg


**Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.486 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 0.620 W/kg; SAR(10 g) = 0.283 W/kg**

Maximum value of SAR (measured) = 0.845 W/kg

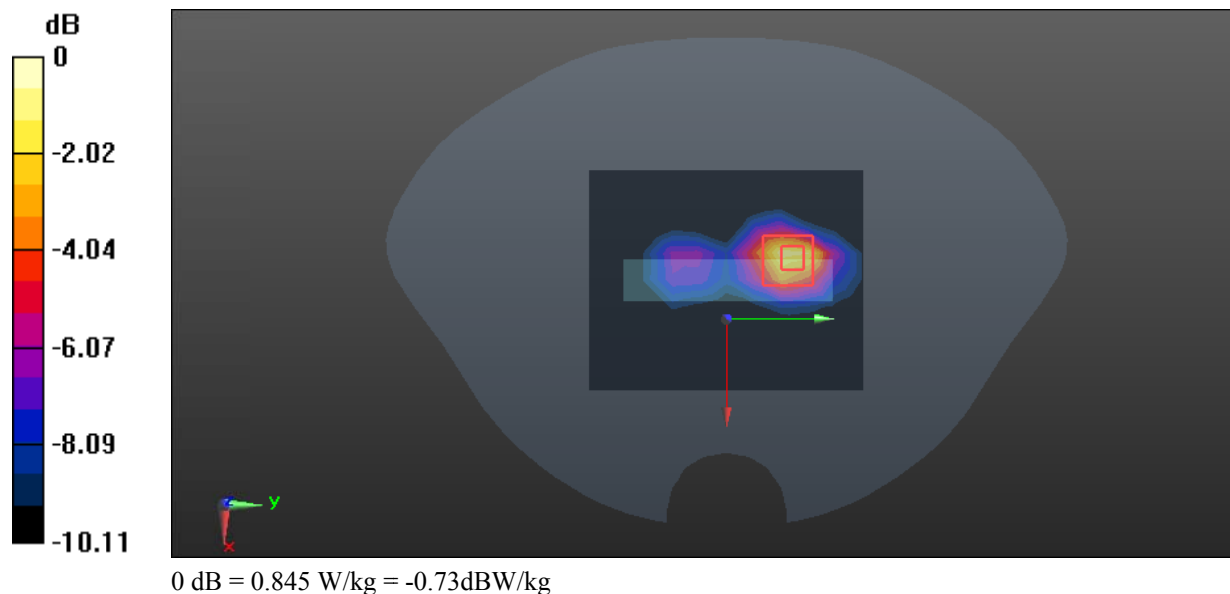

**Test Plot 9#: 2.4G WIFI Mid Body Right****DUT: POS TERMINAL; Type: N62; Serial: 2PN0-1**

Communication System: 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.831$  S/m;  $\epsilon_r = 40.266$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.05, 7.92, 7.22) @ 2437 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.245 W/kg


**Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.721 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.375 W/kg

**SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.108 W/kg**

Maximum value of SAR (measured) = 0.252 W/kg

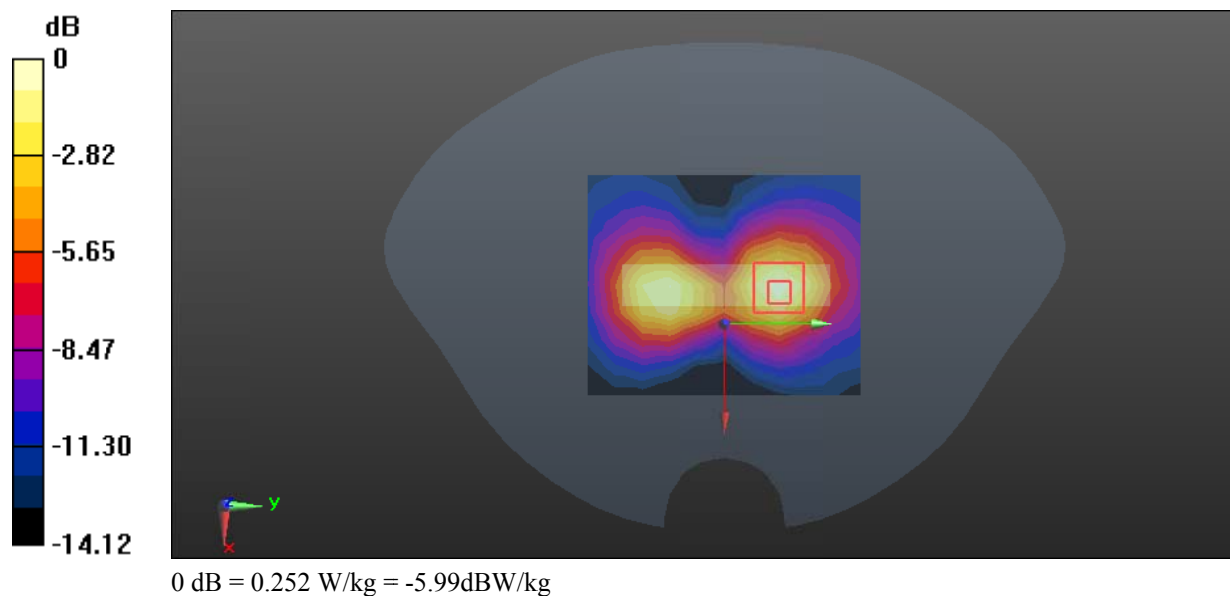

**Test Plot 10#: 5.2G WIFI High Body Back****DUT: POS TERMINAL; Type: N62; Serial: 2PN0-1**

Communication System: 802.11a (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.624$  S/m;  $\epsilon_r = 35.898$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @ 5240 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.742 W/kg


**Zoom Scan (8x8x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.499 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.143 W/kg**

Maximum value of SAR (measured) = 0.799 W/kg

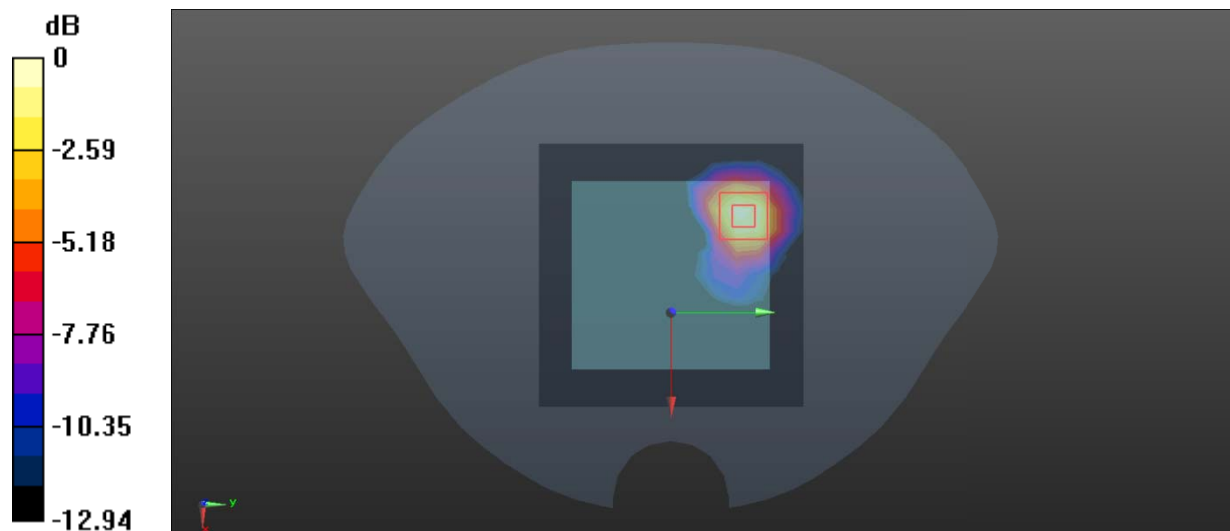

0 dB = 0.799 W/kg = -0.97 dBW/kg

**Test Plot 11#: 5.3G WIFI High Body Back****DUT: POS TERMINAL; Type: N62; Serial: 2PN0-1**

Communication System: 802.11a (0); Frequency: 5320 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5320$  MHz;  $\sigma = 4.704$  S/m;  $\epsilon_r = 35.616$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @ 5320 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.689 W/kg


**Zoom Scan (8x8x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.758 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.136 W/kg**

Maximum value of SAR (measured) = 0.759 W/kg

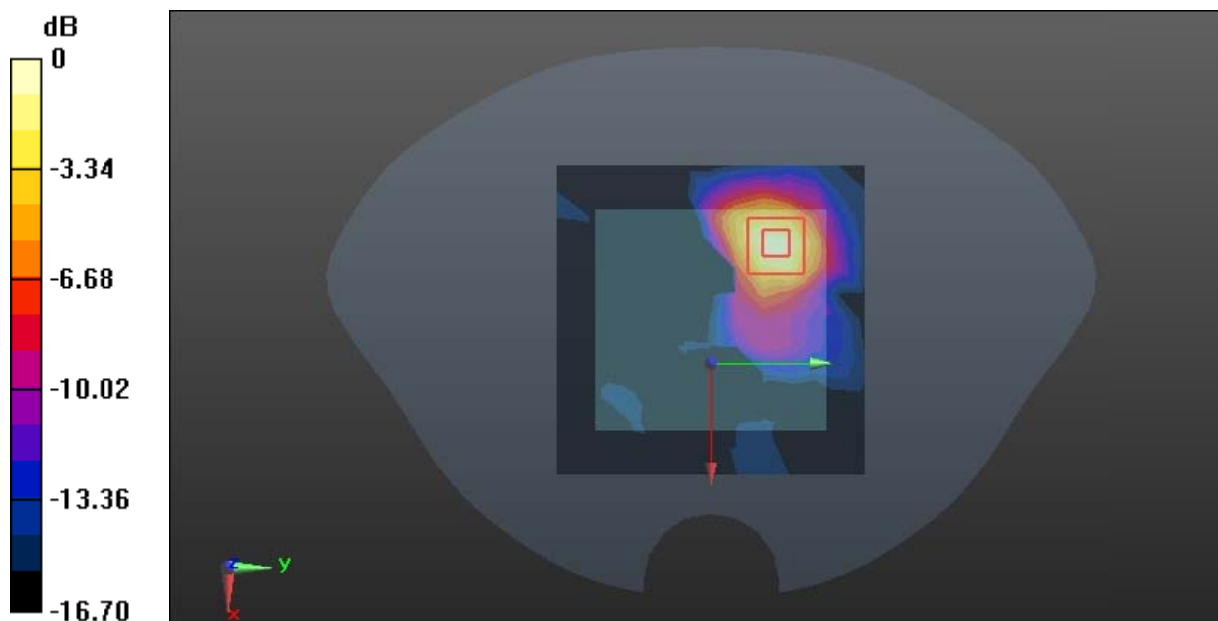

0 dB = 0.759 W/kg = -1.20 dBW/kg

**Test Plot 12#: 5.6G WIFI Mid Body Top****DUT: POS TERMINAL; Type: N62; Serial: 2PN0-1**

Communication System: 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.026$  S/m;  $\epsilon_r = 34.966$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.38, 4.98, 4.56) @ 5580 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x12x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.536 W/kg


**Zoom Scan (8x8x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.222 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.858 W/kg

**SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.122 W/kg**

Maximum value of SAR (measured) = 0.606 W/kg

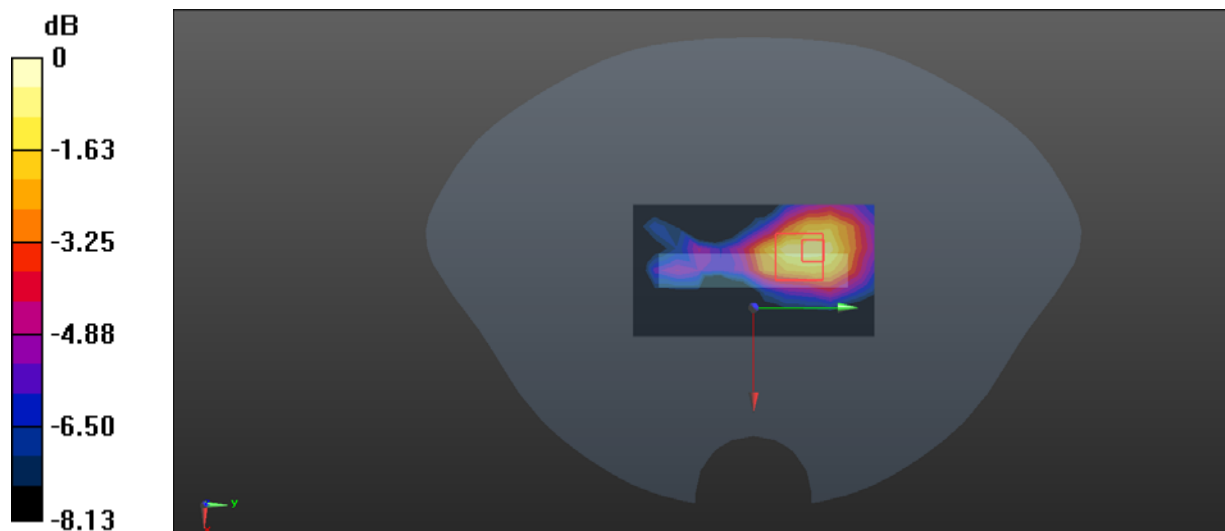

0 dB = 0.606 W/kg = -2.18 dBW/kg

**Test Plot 13#: 5.8G WIFI Low Body Back****DUT: POS TERMINAL; Type: N62; Serial: 2PN0-1**

Communication System: 802.11a (0); Frequency: 5745 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.218$  S/m;  $\epsilon_r = 34.68$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.54, 5.16, 4.7) @ 5745 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (12x12x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.741 W/kg

**Zoom Scan (8x8x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.748 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.120 W/kg**

Maximum value of SAR (measured) = 0.734 W/kg

