


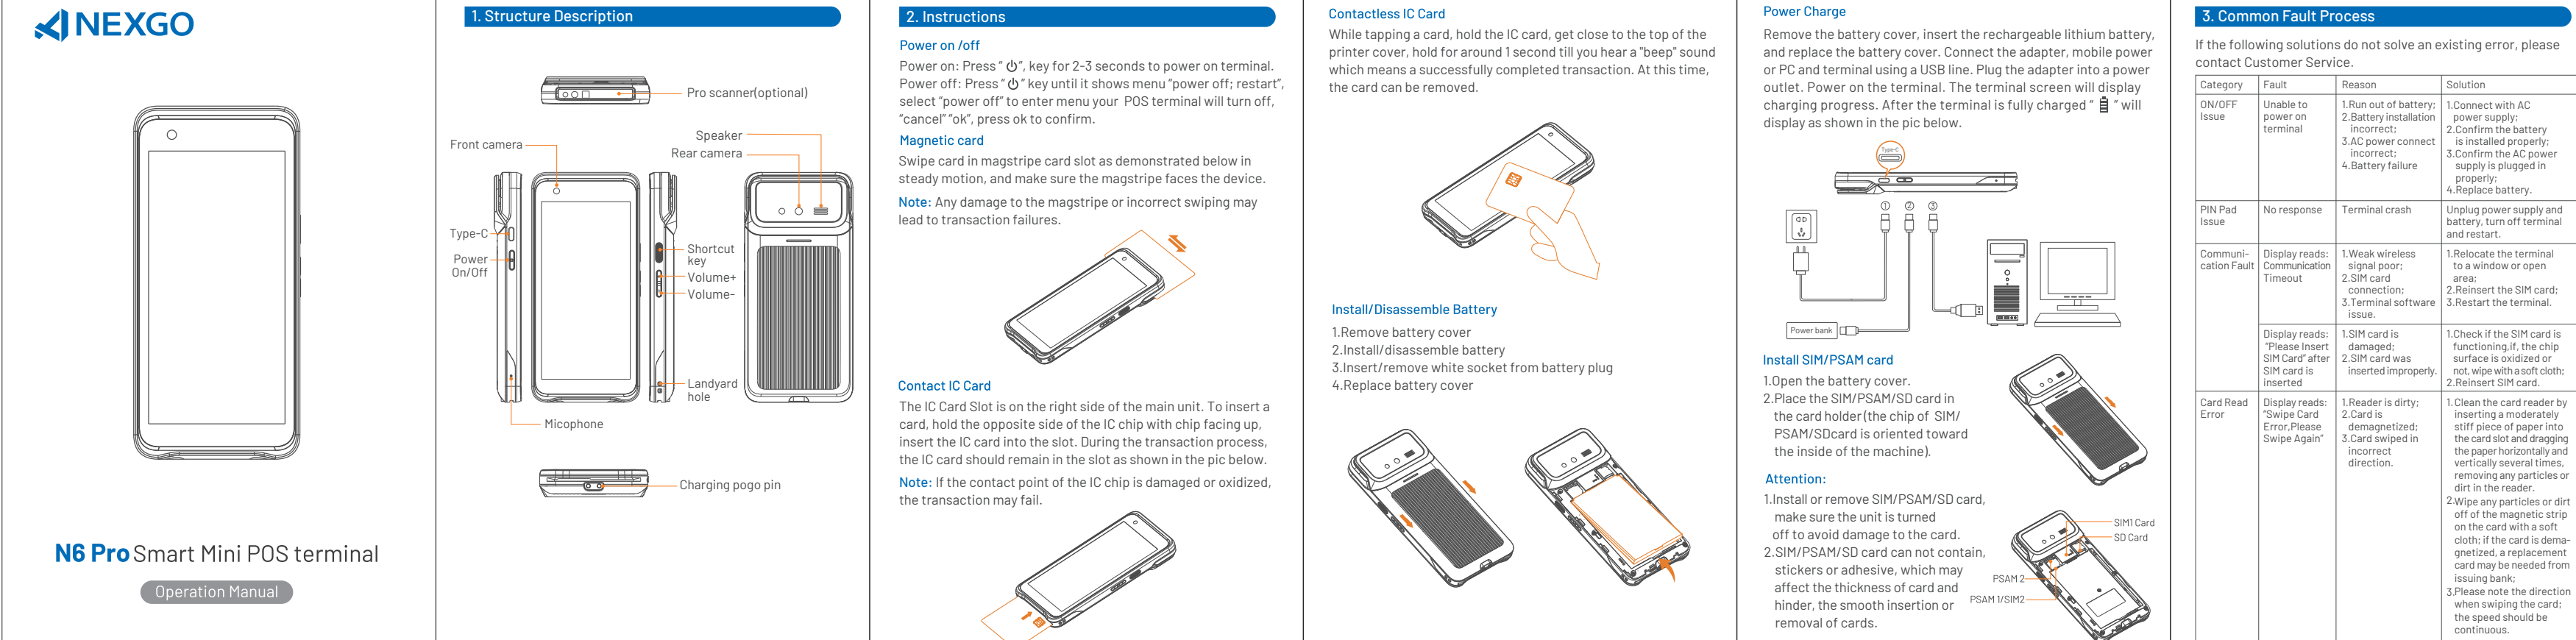

4. Attention Of Installation And Operation

- Please follow the instruction strictly when install and connect the terminal.
- The working temperature range is 0°C ~ 50°C.
- The ambient temperature range is -20°C ~ 70°C.
- The terminal can just use specified power adaptor, cannot replace by other, otherwise it will cause the terminal to work abnormally.
- Do not damage the power cable and power adaptor. It can be used any more if the power cable or power adaptor is damaged.
- Do not touch the terminal with bare hands, otherwise the power outlet matches the set voltage of the device. It is recommended to choose a fuse socket and have a good grounding.
- Do not touch the terminal with bare hands, otherwise it is forbidden to splash any liquid or conductive material, otherwise it will cause a short-circuit or damage the terminal.
- Do not use the original power cable, any other types, otherwise the terminals will be seriously damaged.
- Please contact the professional PGS maintain when the terminal is not installed or used.
- Do not touch the terminal or the power outlet. PGS maintain are not allowed to replace the terminal.
- Please use standard printing paper to prevent paper jam or print error.
- Do not use sharp or flammable the terminal.
- Do not do or place (nails, screws, paints, etc.) near this terminal.

- | Components | Hazardous and noxious substances or | | | | | |
|----------------|-------------------------------------|----|----|--------|-----|------|
| | Pb | Hg | Cd | Cr(VI) | PBB | PBDE |
| PCB Components | o | o | o | o | o | o |

1) Notes:
 1) O means the content of this hazardous and noxious substance in all the homogeneous material of the component is below the requirement of SJ/T 11363-2006 standard.
 2) X means the content of this hazardous and noxious substance at least in certain homogeneous material is higher than the requirements of SJ/T 11363-2006 standard; but the component marked by "X" in the above form are all due to the current industry technology develop level and cannot realize the substitution of the hazardous and noxious substances or elements.

Environmental protection indication:
 For the products which arrives or exceeds the use life, should be recycled used according to "The Management of Electronic and Information Product", cannot discard arbitrarily.

No.	Item	Quantity
1	N6 Pro POS terminal	1
2	N6 Pro Operation Manual	1
3	Power Adapter	1

– Increase the separation between the equipment and receiver.
– Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Hereby, [Shenzhen Xinguo Technology Co., Ltd.] declares that the radio equipment type [N6 Pro] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <https://www.xinguo.com/pdf/?id=213>

In all EU member states, operation of 5150-5350MHz is restricted to indoor use only

NEXGO

INSPECTION CERTIFICATE

INSPECTOR: 

PLACE OF ORIGIN: Shenzhen Xingyudu Technology Co., Ltd.

SHENZHEN XINGYUDU TECHNOLOGY CO.,LTD.

SHENZHEN XINGYUDU TECHNOLOGY CO.,LTD.

Company address: 17B JiuJiang-Songshan, Taiwan 4th Road, Shatou Street,
Futian District, Shenzhen, Guangdong, China.
Hotline: 86-755-25000735
<http://www.nexgo.com>