


1.Product appearance

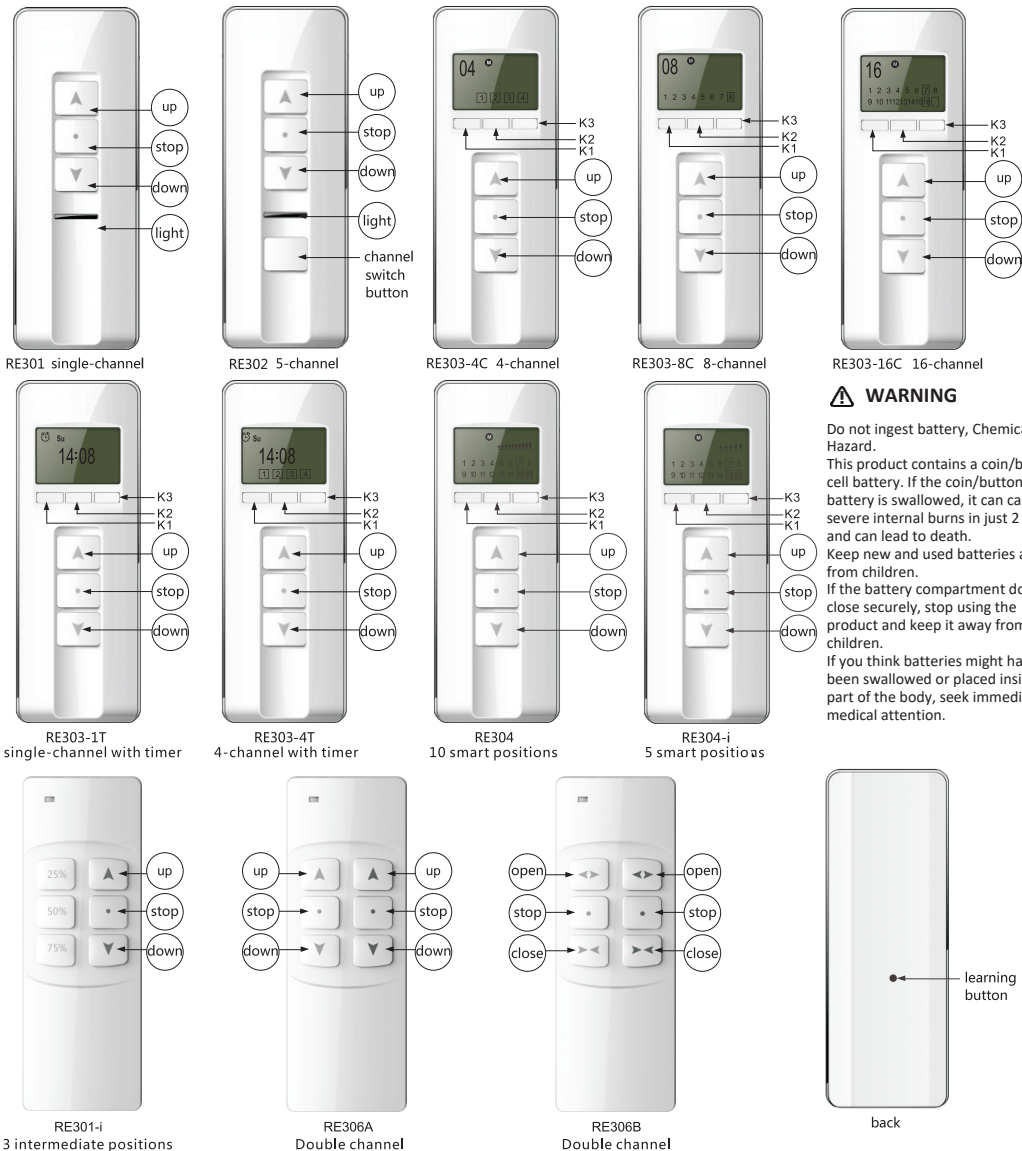

2.Technical data

Power : 3V $\square$ Direct Current model:CR2032
Work temperature : -20°C ~ 60°C (non LCD emitter)
Work temperature : -10°C ~ 60°C (LCD emitter)


Currency : $\leq 12\text{mA}$
Code: rolling code
Frequency : 433.92MHz

3.Code learning


01.Single channel

Press UP and Down buttons simultaneously once, then short press Stop button once.


02.Double-channel emitter

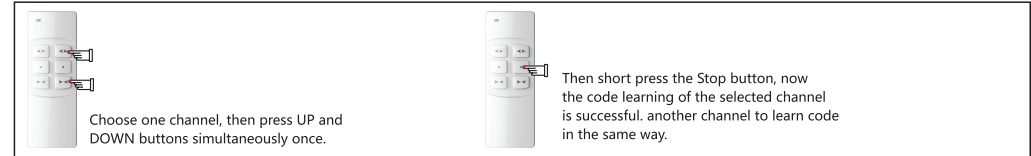

03.5-channel emitter

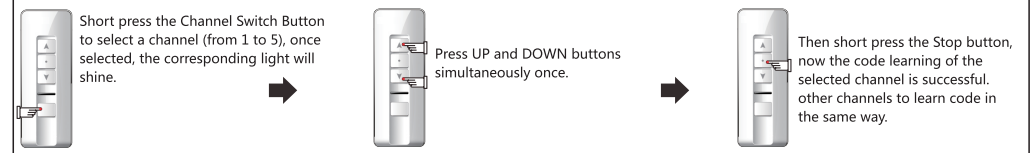


04.LCD Multi-channel(take 8-channel emitter as an example)

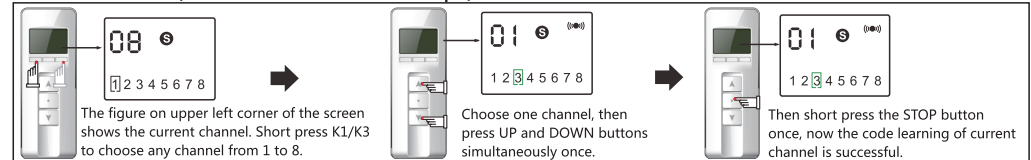


4.Single control

Press K1/K3 button to select a channel, then the corresponding motor can be controlled by the emitter through short pressing UP/STOP/DOWN button.


5.Group control(5-channel emitter)

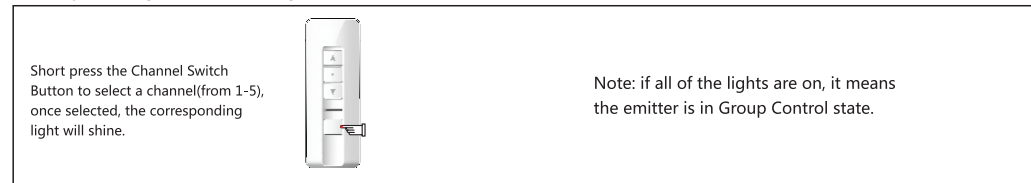

6.Group control(LCD emitter) Short press K2 button to choose group control **M** or single control **S**.

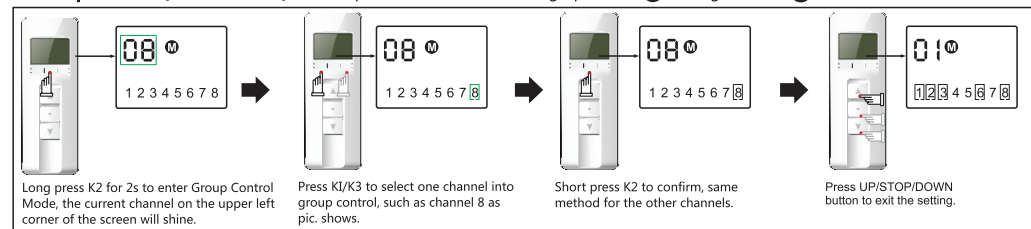


7.Delete Group Control

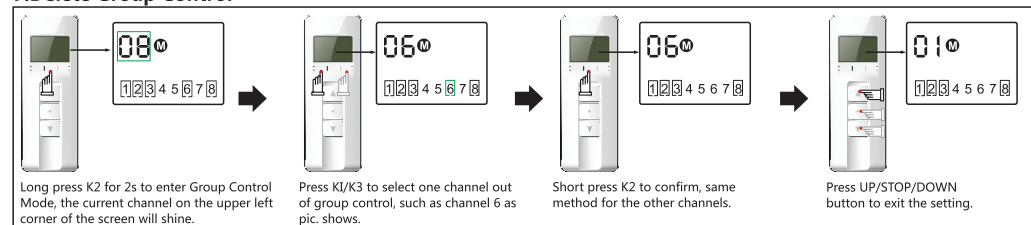

Note: whether in **M** or **S** mode, the current channel is always selected.



8.LCD emitter timer(4-channel)

01.Time setting

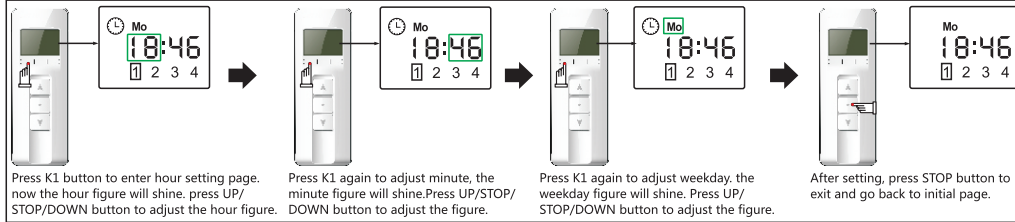


02.Timing setting

In the initial page, press K2 to enter timing setting page, there is a timing clock ⌚ on the upper left corner. You can respectively set 8 opening time point and 8 closing time points, in total 16 point. 1~8 press K2 to cycle among 16 time points. Press K3 to choose the output channels which you want(single channel or 4 channels).

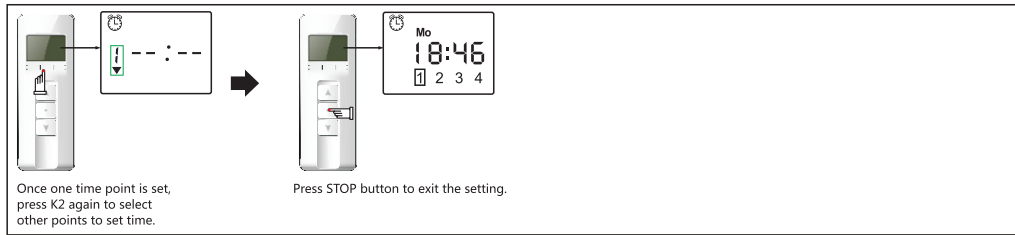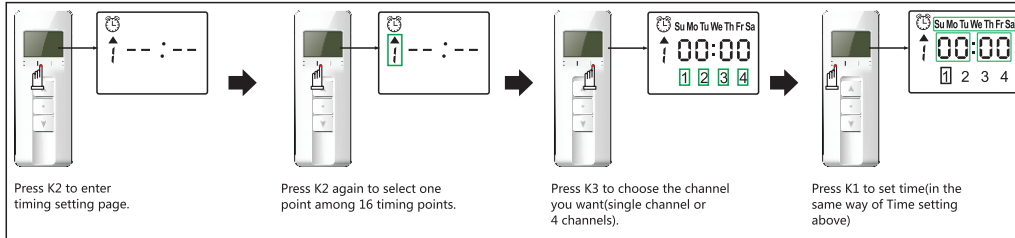


03.Close time function

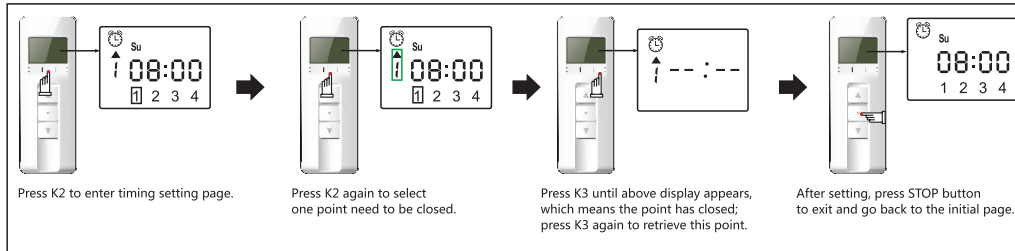


9.LCD emitter timer(single-channel)

01Time setting

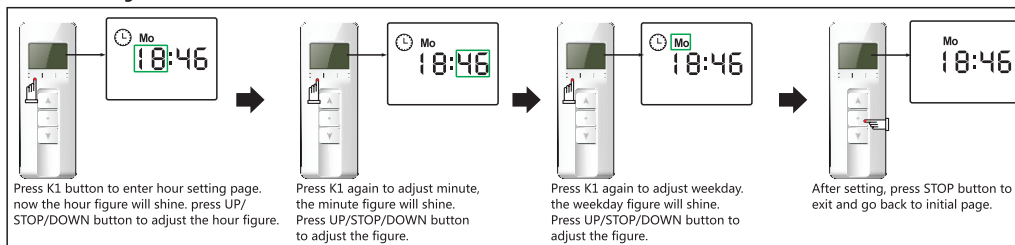


02.Timing setting


In the initial page, press K2 to enter timing setting page, there is a timing clock ⌚ on the upper left corner. You can respectively set 8 opening time point and 8 closing time points, in total 16 point. 1~8 press K2 to cycle among 16 time points.

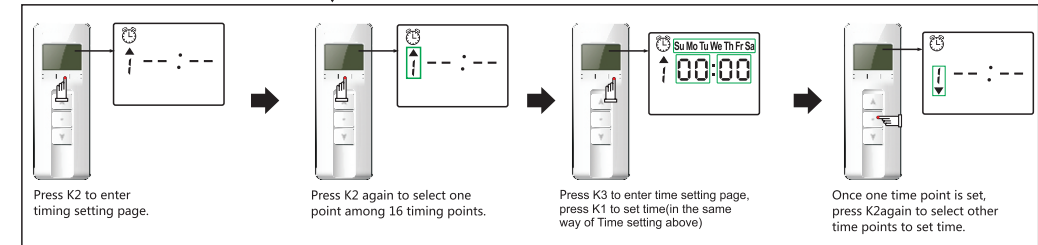

03.Close timing function

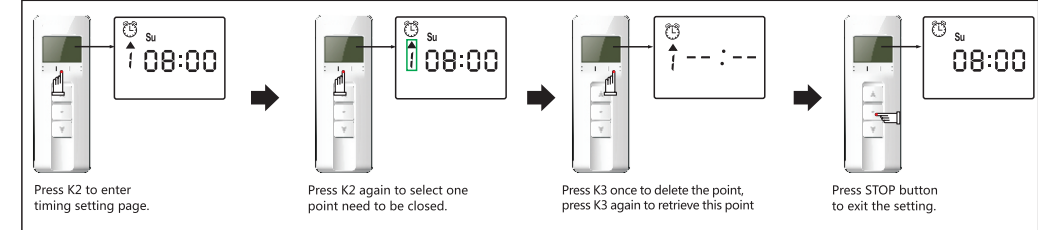

04.Stopwatch function

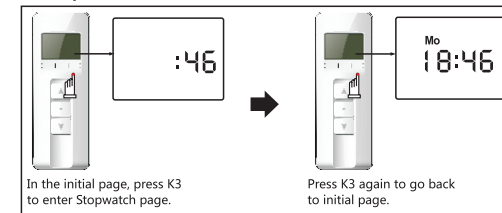


Note:

- The emitter must enter into timing setting page if you want to set timing points (there is a timing clock on the upper left), otherwise, the setting is invalid. If there is no timing clock on the upper left hold STOP button and press K2 within 10 seconds, then the timing clock will be there.
- You'd better not press emitter's buttons too long. Each pressing is about 0.5s, and the pressing interval is about 1s.
- The emitter will stop working if the battery is in low power. Please replace the battery in this case.


10.Smart position mode(only for RE304、RE304-i)

01. S single control mode

Note: Whether in S mode or M mode, only up-and-down limit is setted, smart position function is effective.

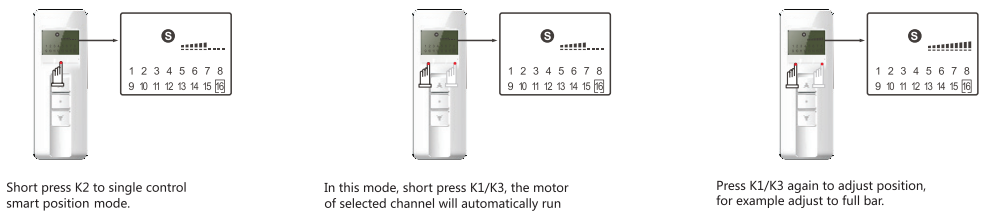

02. M group control mode

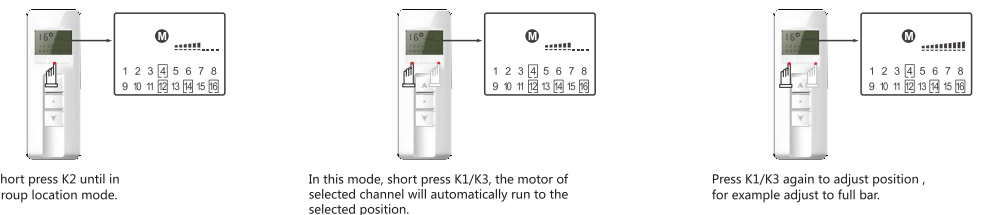

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.