

Sample Approval Sheet

Product Information:

Customer	Acoustic Innovation (Huizhou) Co., Ltd.
Material Description	PCB
Customer's Part number	VA.E.00214880002AR
Specifications	BTH1488 RX Antenna
Supplier's Part number	002B-P4C-000074A
Date	2023-11-29

Supplier:

Prepared By	Checked By	Approved By
LI MING JUN	ZHENG HUI WEN	FANG ZHEN

Customer Approval:

Accepted By	Checked By	Approved By


Results:

- ☐ Full Approval
- ☐ Conditional Approval
- ☐ Unqualified
- ☐ Others:


1、Specification

This report mainly provides the testing status of various electrical and structural performance parameters of BTH1488 RX Antenna

Figure 1 Antenna Placement

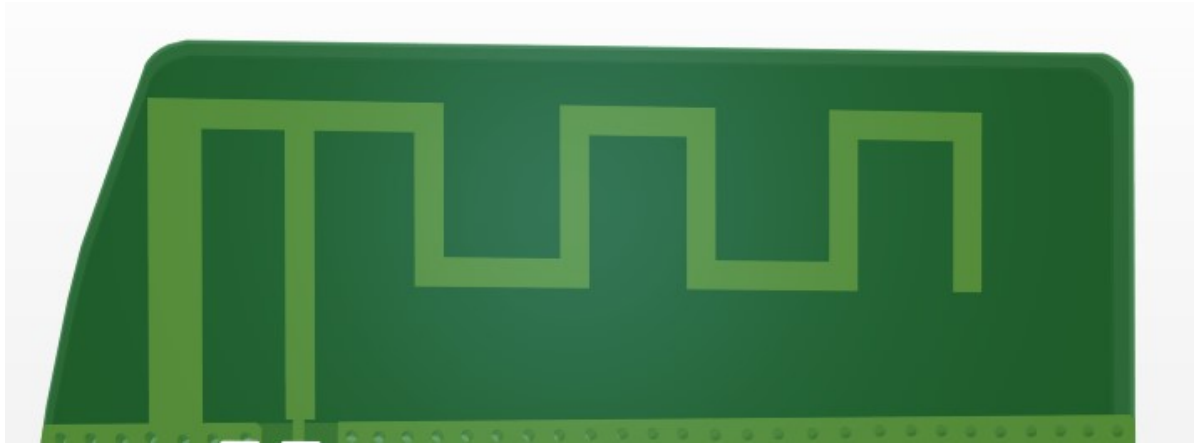

Antenna size diagram

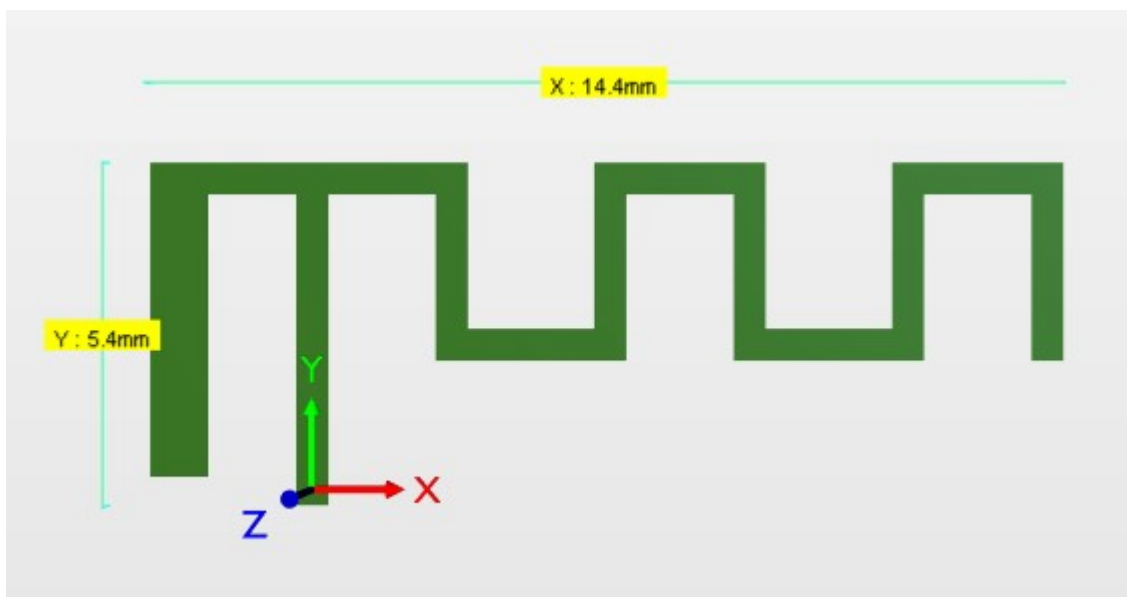

L=14.4mm

W=5.4mm

H=0.035mm


1.1 Electrical specification standard

1.1.1 Electrical Specifications

The antenna operates in the 2400-2480 MHz. The following table is the electrical performance index of the antenna designed by our company.

Antenna	BTH1488 RX Antenna
Frequency Range	2400-2480MHz
VSWR	< 2.0
Efficiency	> 38%
Impedance	50 ohm
Polarization	Linear polarization

1.1.2 Antenna Matching Network

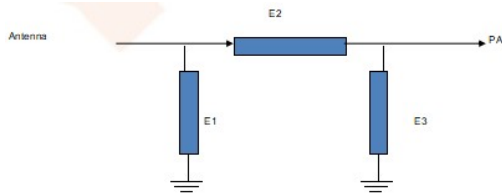

Element	Value
E1(0402)	N/A
E2(0402)	1.5NH
E3(0402)	N/A

2、 Test

The antenna was debugged and tested with the prototype provided by the customer.

2.1 Test of passive S11


2.1.1 Test connection

The passive S11 test device is connected as follows: Network Analyzer → Test Line → Test Fixture.

2.1.2 Passive S11

The following table shows the standing wave ratio values of the edge frequency points of the antenna operating frequency band. The waveform of Return Loss and VSWR obtained by the test is shown as follows.

Frequency (MHz)	2400	2450	2500
VSWR	1.57	1.34	1.55
Return Loss	-13.06	-16.87	-13.34

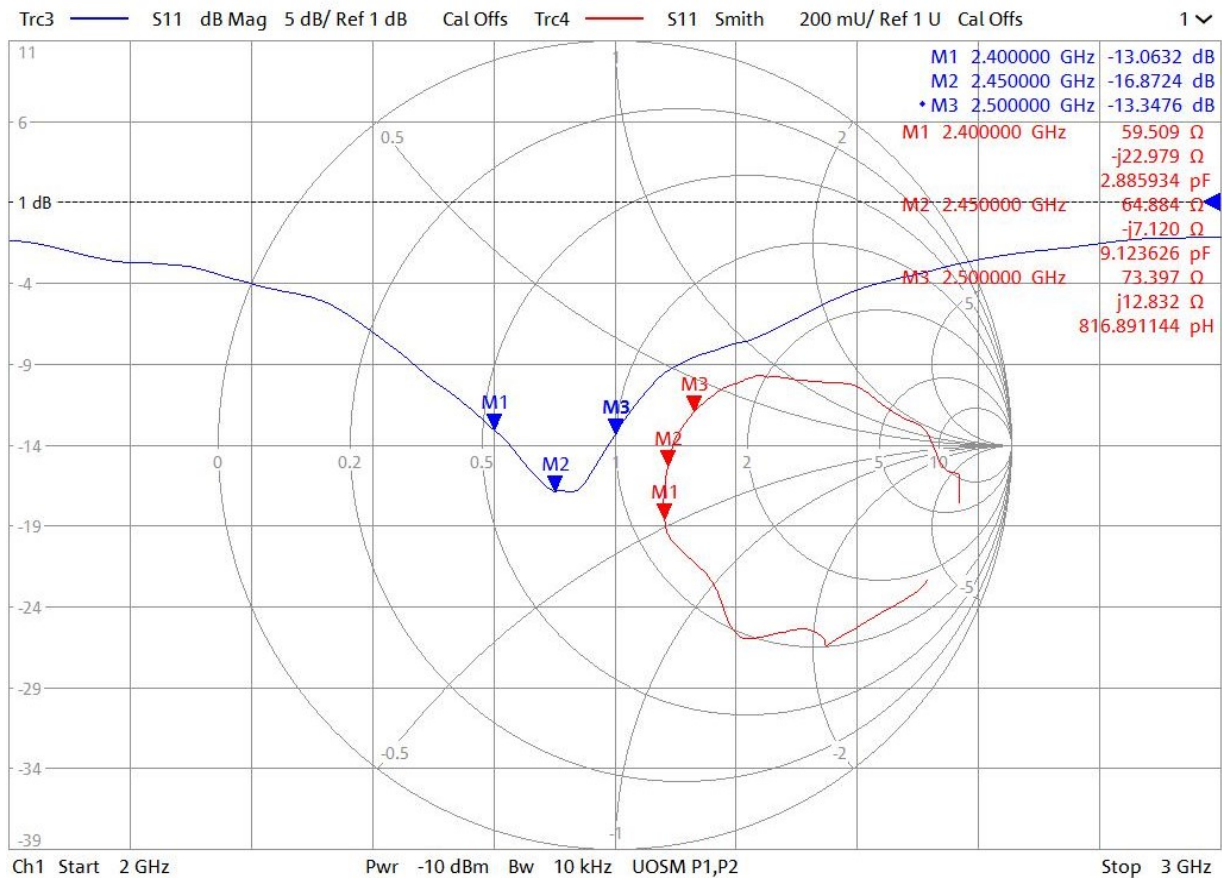

2.2 Gain and efficiency test

2.2.1 Test Position

Yuande microwave anechoic chamber, the test frequency range is 400MHz-6GHz.

2.2.2 Test equipment

Network analyzer, standard horn antenna, multi-probe near field antenna test system, test computer, etc


2.2.3 Results Summary

In the microwave anechoic chamber, the measured values related to efficiency and gain are shown in the table below.


Frequency (MHz)	Gain (dBi)	Efficiency (%)
2400	4.10	39.98
2410	4.18	40.69
2420	4.23	41.13
2430	4.18	40.65
2440	4.12	40.22
2450	4.08	39.83
2460	4.10	40.07
2470	4.08	39.97
2480	3.91	38.47
2490	3.88	38.38
2500	3.95	39.19

2.2.4 Radiation Pattern Results


Antenna matching 3D pattern

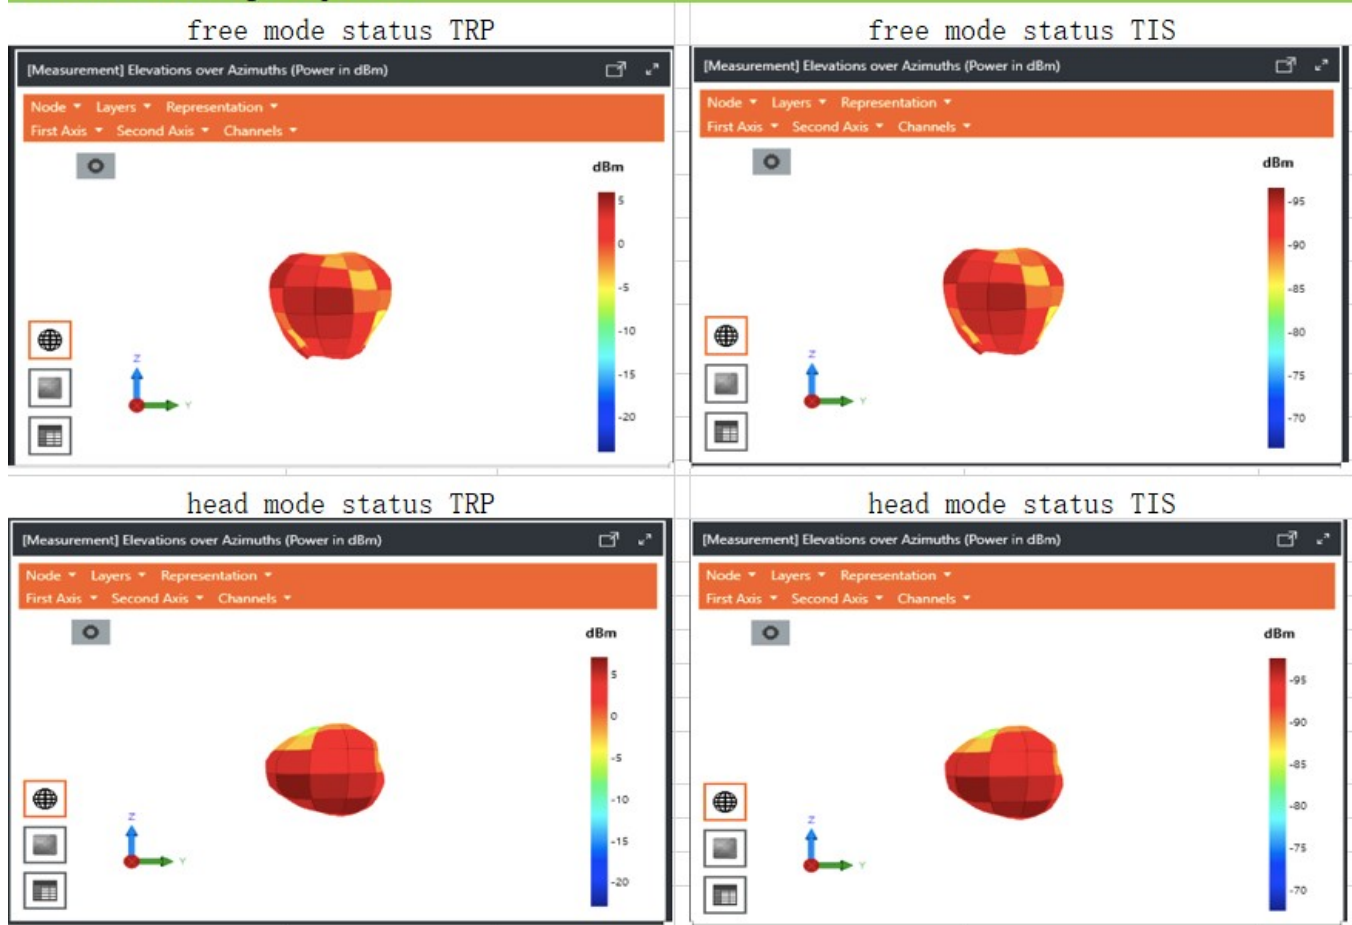


XZ plane

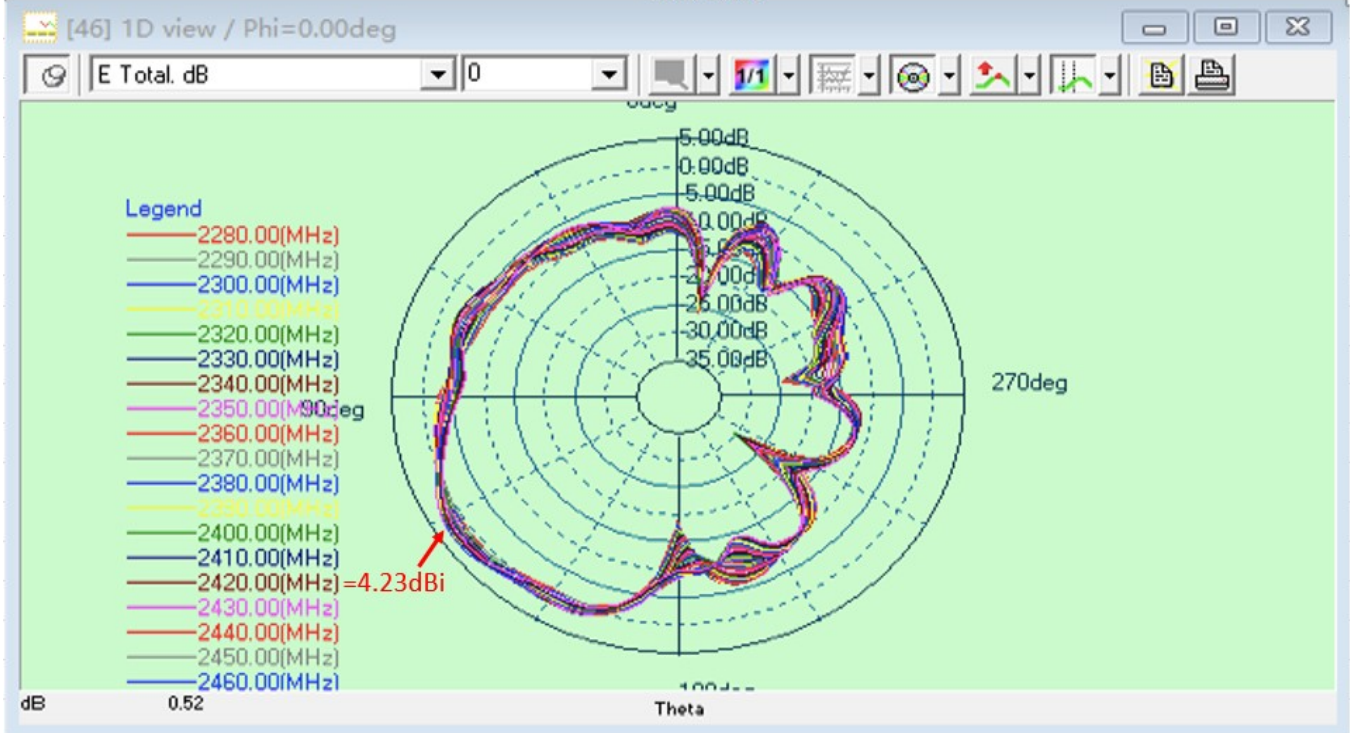

YZ plane

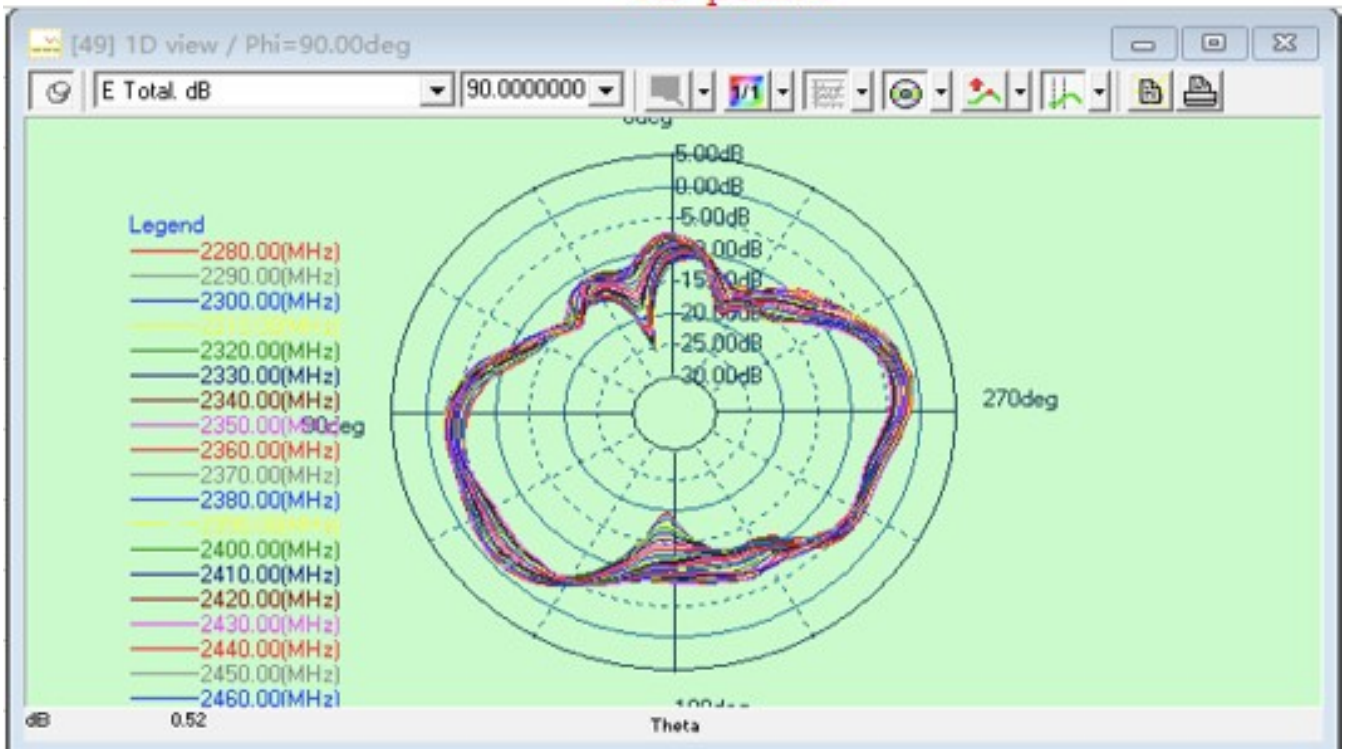

XY plane

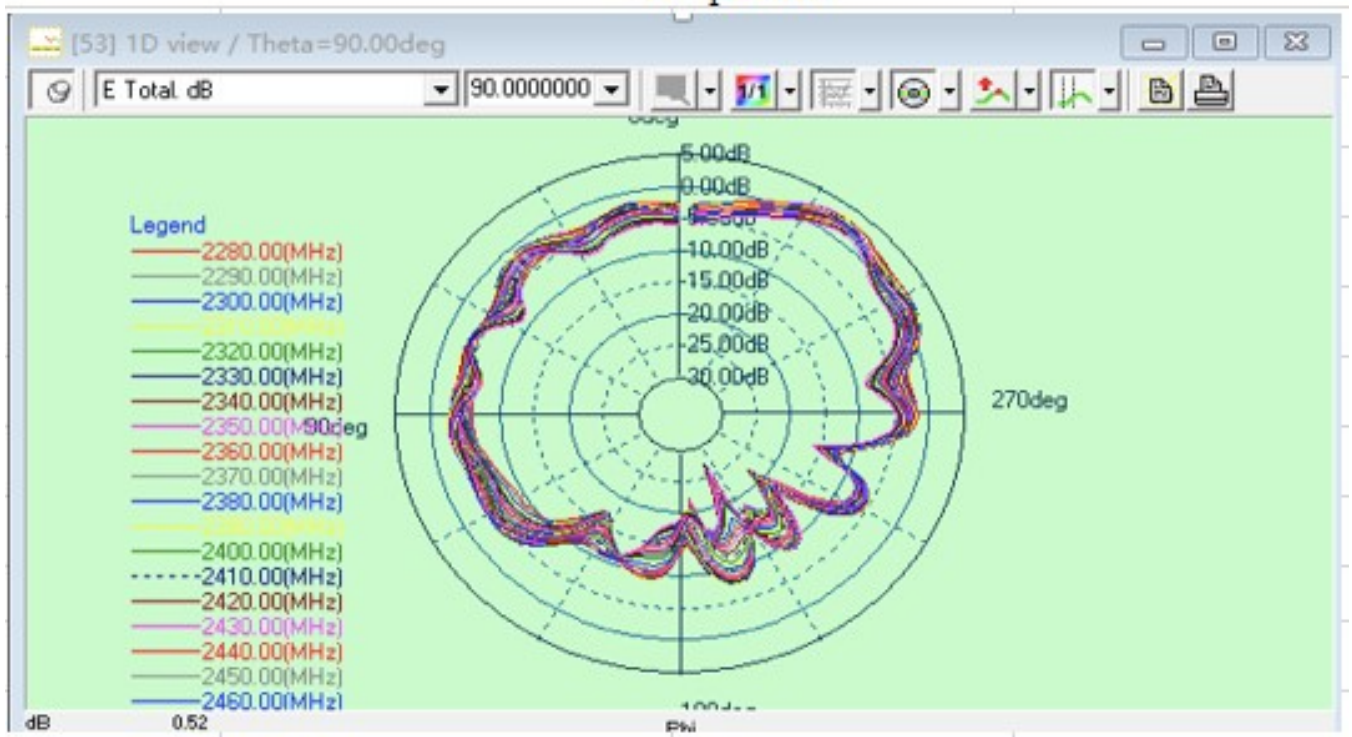

3、 Conclusion

This antenna is designed on the basis of the prototype provided by the customer. The above electrical performance parameters are tested under the environmental treatment conditions of the test prototype. The electrical parameters and structural performance have met the technical requirements. Please confirm!