

# Emissions Test Report

**EUT Name:** Wireless Audio Headset

**Model No.:** Ear Force Stealth 700P RX

CFR 47 Part 15.247:2017 and RSS-247:2017

*Prepared for:*

Voyetra Turtle Beach, Inc.  
100 Summit Lake Drive, Suite 100  
Valhalla, New York, 10595 USA

*Prepared by:*

TUV Rheinland of North America, Inc.  
1279 Quarry Lane, Ste. A  
Pleasanton, CA 94566 U.S.A.  
Tel: (925) 249-9123  
Fax: (925) 249-9124  
<http://www.tuv.com/>

*Report/Issue Date:* October 16, 2017  
*Report Number:* 31763314.001  
*Project Number:* 0000150404  
*Revision Number:* 0

## Revisions

| Revision No. | Date MM/DD/YYYY | Reason for Change | Author |
|--------------|-----------------|-------------------|--------|
| 0            | 10/16/2017      | Original Document | N/A    |
|              |                 |                   |        |
|              |                 |                   |        |
|              |                 |                   |        |
|              |                 |                   |        |
|              |                 |                   |        |
|              |                 |                   |        |
|              |                 |                   |        |
|              |                 |                   |        |
|              |                 |                   |        |
|              |                 |                   |        |
|              |                 |                   |        |
|              |                 |                   |        |
|              |                 |                   |        |
|              |                 |                   |        |

Note: Latest revision report will replace all previous reports.

# Statement of Compliance

**Manufacturer:** Voyetra Turtle Beach, Inc.  
100 Summit Lake Drive, Suite 100  
Valhalla, New York, 10595 USA

**Requester / Applicant:** Tim Blaney

**Name of Equipment:** Wireless Audio Headset

**Model No.** Ear Force Stealth 700P RX (TB300-3770-01)

**Type of Equipment:** Intentional Radiator

**Application of Regulations:** CFR 47 Part 15.247:2017 and RSS-247:2017

**Test Dates:** August 15, 2017 to August 21, 2017

**Guidance Documents:**  
Emissions: ANSI C63.10-2013

**Test Methods:**  
Emissions: ANSI C63.10-2013

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report contains data that are not covered by A2LA accreditation. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.



Jeremy Luong      October 16, 2017  
Test Engineer      Date



David Spencer      October 16, 2017  
Laboratory Signature      Date



**INDUSTRY  
CANADA**

**Testing Cert #3331.02**

**US1131**

**2932M-1**

## Table of Contents

|          |                                                            |           |
|----------|------------------------------------------------------------|-----------|
| <b>1</b> | <b>Executive Summary</b>                                   | <b>7</b>  |
| 1.1      | Scope                                                      | 7         |
| 1.2      | Purpose                                                    | 7         |
| 1.3      | Summary of Test Results                                    | 8         |
| 1.4      | Special Accessories                                        | 8         |
| 1.5      | Equipment Modifications                                    | 8         |
| <b>2</b> | <b>Laboratory Information</b>                              | <b>9</b>  |
| 2.1      | Accreditations & Endorsements                              | 9         |
| 2.1.1    | US Federal Communications Commission                       | 9         |
| 2.1.2    | NIST / A2LA                                                | 9         |
| 2.1.3    | Canada – Industry Canada                                   | 9         |
| 2.1.4    | Japan – VCCI                                               | 9         |
| 2.1.5    | Acceptance by Mutual Recognition Arrangement               | 9         |
| 2.2      | Test Facilities                                            | 10        |
| 2.2.1    | Emission Test Facility                                     | 10        |
| 2.2.2    | Immunity Test Facility                                     | 10        |
| 2.3      | Measurement Uncertainty                                    | 11        |
| 2.3.1    | Sample Calculation – radiated & conducted emissions        | 11        |
| 2.3.2    | Measurement Uncertainty Emissions                          | 11        |
| 2.3.3    | Measurement Uncertainty Immunity                           | 12        |
| 2.4      | Calibration Traceability                                   | 12        |
| <b>3</b> | <b>Product Information</b>                                 | <b>13</b> |
| 3.1      | Product Description                                        | 13        |
| 3.2      | Equipment Configuration                                    | 13        |
| 3.3      | Operating Mode                                             | 13        |
| 3.4      | Unique Antenna Connector                                   | 14        |
| 3.4.1    | Results                                                    | 14        |
| 3.5      | Duty Cycle                                                 | 15        |
| 3.5.1    | Results                                                    | 15        |
| <b>4</b> | <b>Emission Requirements – 2400 MHz to 2483.5 MHz Band</b> | <b>16</b> |
| 4.1      | Output Power Requirements                                  | 16        |
| 4.1.1    | Test Method                                                | 16        |
| 4.1.2    | Results                                                    | 17        |
| 4.2      | Occupied Bandwidth                                         | 25        |
| 4.2.1    | Test Method                                                | 25        |
| 4.2.2    | Results                                                    | 26        |
| 4.3      | Peak Power Spectral Density                                | 33        |
| 4.3.1    | Test Method                                                | 33        |
| 4.3.2    | Results                                                    | 33        |

## Table of Contents

|            |                                          |           |
|------------|------------------------------------------|-----------|
| <b>4.4</b> | <b>Out of Band Emission requirements</b> | <b>37</b> |
| 4.4.1      | Results                                  | 37        |
| <b>4.5</b> | <b>Transmitter Spurious Emissions</b>    | <b>51</b> |
| 4.5.1      | Test Methodology                         | 51        |
| 4.5.2      | Transmitter Spurious Emission Limit      | 52        |
| 4.5.3      | Test Results                             | 52        |
| 4.5.4      | Sample Calculation                       | 83        |
| <b>4.6</b> | <b>AC Conducted Emissions</b>            | <b>84</b> |
| 4.6.1      | Test Methodology                         | 84        |
| 4.6.2      | Test Results                             | 84        |
| <b>5</b>   | <b>Test Equipment Use List</b>           | <b>89</b> |
| <b>5.1</b> | <b>Equipment List</b>                    | <b>89</b> |
| <b>6</b>   | <b>EMC Test Plan</b>                     | <b>90</b> |
| <b>6.1</b> | <b>Introduction</b>                      | <b>90</b> |
| <b>6.2</b> | <b>Customer</b>                          | <b>90</b> |
| <b>6.3</b> | <b>Equipment Under Test (EUT)</b>        | <b>91</b> |
| <b>6.4</b> | <b>Test Specifications</b>               | <b>94</b> |

## Index of Tables

|                                                                                       |    |
|---------------------------------------------------------------------------------------|----|
| <b>Table 1:</b> Summary of Test Results .....                                         | 8  |
| <b>Table 2:</b> RF Output Power at the Antenna Port – Test Results .....              | 17 |
| <b>Table 3:</b> Occupied Bandwidth – Test Results.....                                | 26 |
| <b>Table 4:</b> DTS Occupied Bandwidth – Test Results .....                           | 27 |
| <b>Table 5:</b> Peak Power Spectral Density – Test Results .....                      | 34 |
| <b>Table 6:</b> Band Edge Requirements – Test Results.....                            | 37 |
| <b>Table 7:</b> Transmit Spurious Emission at Restricted Band Edge Requirements ..... | 53 |
| <b>Table 8:</b> AC Conducted Emissions – Test Results.....                            | 84 |
| <b>Table 9:</b> Customer Information .....                                            | 90 |
| <b>Table 10:</b> Technical Contact Information.....                                   | 90 |
| <b>Table 11:</b> EUT Specifications .....                                             | 91 |
| <b>Table 12:</b> Antenna Information .....                                            | 91 |
| <b>Table 13:</b> Interface Specifications.....                                        | 92 |
| <b>Table 14:</b> Supported Equipment.....                                             | 92 |
| <b>Table 15:</b> Description of Sample used for Testing.....                          | 92 |
| <b>Table 16:</b> Description of Test Configuration used for Radiated Measurement..... | 92 |
| <b>Table 17:</b> Final Test Mode for 2402 MHz to 2480MHz Channels.....                | 93 |
| <b>Table 18:</b> Test Specifications .....                                            | 94 |

# **1 Executive Summary**

## **1.1 Scope**

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.247:2017 and RSS-247:2017 based on the results of testing performed on August 15, 2017 to August 21, 2017 on the Wireless Audio Headset Model Ear Force Stealth 700P RX manufactured by Voyetra Turtle Beach, Inc. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

## **1.2 Purpose**

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

The report documents the 2.4 GHz Bluetooth radio characteristics for the Ear Force Stealth 700P RX.

### 1.3 Summary of Test Results

**Table 1:** Summary of Test Results

| Test                                  | Test Method<br>ANSI C63.4:2014/ ANSI C63.10:2013                          | Test Parameters         | Measured Value                                                | Result          |
|---------------------------------------|---------------------------------------------------------------------------|-------------------------|---------------------------------------------------------------|-----------------|
| <b>2402 MHz to 2480 MHz Band</b>      |                                                                           |                         |                                                               |                 |
| Spurious Emission in Transmitted Mode | CFR47 15.209, CFR47 15.247 (d)<br>RSS-GEN Sect.8.9, RSS 247 Sect. 6.2.1.2 | Class B                 | -8.14 dB (Margin)                                             | <b>Complied</b> |
| Restricted Bands of Operation         | CFR47 15.205, RSS-Gen Sect.8.10                                           | Class B                 |                                                               | <b>Complied</b> |
| AC Power Conducted Emission           | CFR47 15.207, RSS-GenSect.8.8                                             | Class B                 | -15.64 dB (Margin)                                            | <b>N/A</b>      |
| Occupied Bandwidth                    | CFR47 15.247 (a1), RSS GEN Sect.6.6                                       | $\geq 500$ kHz          | 20dB BW = 1.305 MHz<br>99% BW = 1.209 MHz<br>DTS BW = 526 kHz | <b>Complied</b> |
| Maximum Transmitted Power             | CFR47 15.247 (b), RSS 247 Sect. 5.4.4, 6.2.4.1                            | 30 dBm w/ 6 dBi antenna | 1.12 mW (0.78 dBm)                                            | <b>Complied</b> |
| Peak Power Spectral Density           | CFR47 15.247 (e),<br>RSS 247 Sect. 5.2.2                                  | 8 dBm/ 3 kHz            | -16.31 dBm                                                    | <b>Complied</b> |
| Out of Band Emission                  | CFR47 15.247 (d), RSS 247 Sect. 5.5                                       | < -20 dBr               | - 21.39 dBr (-40.5 dBm at 7.205 GHz)                          | <b>Complied</b> |

Note: 1. Note: Since Ear Force Stealth 700P RX supports both BLE and FHSS Bluetooth, Ear Force Stealth 700P RX will demonstrate compliance to the rules required for DTS per KDB 453039.  
2. This report is only documented for 2402 – 2480 MHz Bluetooth radio.

### 1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

### 1.5 Equipment Modifications

None

## 2 Laboratory Information

### 2.1 Accreditations & Endorsements

#### 2.1.1 US Federal Communications Commission



TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 is recognized by the commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (US1131). The laboratory scope of accreditation includes: Title 47 CFR Parts 15, 18, and 90. The accreditation is updated every 3 years.

#### 2.1.2 NIST / A2LA



TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:2005 and ISO 9002 (Lab Code 3331.02). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

#### 2.1.3 Canada – Industry Canada



TUV Rheinland of North America at the 1279 Quarry Ln, Pleasanton, CA 94566 address is accredited by Industry Canada for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by Industry Canada (File Number 2932M). This reference number is the indication to the Industry Canada Certification Officers that the site meets the requirements of RSS 212, Issue 1 (Provisional). The accreditation is updated every 3 years.

#### 2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 has been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0268

#### 2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member country.

---

## **2.2 Test Facilities**

All of the test facilities are located at 1279 Quarry Lane, Pleasanton, California 94566, USA.

### **2.2.1 Emission Test Facility**

The Semi-Anechoic chamber and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:1992. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2014, at a test distance of 3 and 5 meters. The site is listed with the FCC and accredited by A2LA (Lab Code 3331.02). The 3/5-meter semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2014, at a test distance of 3 meter and 5 meters. A report detailing this site can be obtained from TUV Rheinland of North America.

### **2.2.2 Immunity Test Facility**

ESD, EFT, Surge, PQF: These tests are performed in an environmentally controlled room with a 3.7 m x 4.8 m x 3.175 mm thick aluminum floor connected to PE ground.

For ESD testing, tabletop equipment is placed on an insulated mat with a surface resistivity of  $10^9$  Ohms/square on a 1.6 m x 0.8 m x 0.8 m high non-conductive table with a 3.175 mm aluminum top (Horizontal Coupling Plane). The HCP is connected to the main ground plane via a low impedance ground strap through two 470-k $\Omega$  resistors. The Vertical Coupling Plane consists of an aluminum plate 50 cm x 50 cm x 3.175 mm thick. The VCP is connected to the main ground plane via a low impedance ground strap through two 470-k $\Omega$  resistors.

For EFT, Surge, PQF, the HCP and VCP are removed.

RF Field Immunity testing is performed in a 7.3m x 4.3m x 4.1m anechoic chamber.

RF Conducted and Magnetic Field Immunity testing is performed on a 4.8m x 3.7m x 3.175mm thick aluminum ground plane.

All test areas allow a minimum distance of 1 meter from the EUT to walls or conducting objects.

## 2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1<sup>st</sup> Edition, 1995.

*The Combined Standard Uncertainty* is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

### 2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB $\mu$ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

#### Sample radiated emissions calculation @ 30 MHz

**Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)**

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

### 2.3.2 Measurement Uncertainty Emissions

| Per CISPR 16-4-2                               | U <sub>lab</sub> | U <sub>cispr</sub> |
|------------------------------------------------|------------------|--------------------|
| <b>Radiated Disturbance @ 10 meters</b>        |                  |                    |
| 30 – 1,000 MHz                                 | 2.25 dB          | 4.51 dB            |
| <b>Radiated Disturbance @ 3 meters</b>         |                  |                    |
| 30 – 1,000 MHz                                 | 2.26 dB          | 4.52 dB            |
| 1 – 6 GHz                                      | 2.12 dB          | 4.25 dB            |
| 6 – 18 GHz                                     | 2.47 dB          | 4.93 dB            |
| <b>Conducted Disturbance @ Mains Terminals</b> |                  |                    |
| 150 kHz – 30 MHz                               | 1.09 dB          | 2.18 dB            |
| <b>Disturbance Power</b>                       |                  |                    |
| 30 MHz – 300 MHz                               | 3.92 dB          | 4.3 dB             |

### Voltech PM6000A

|                                                                                                            |                          |
|------------------------------------------------------------------------------------------------------------|--------------------------|
| The estimated combined standard uncertainty for harmonic current and flicker measurements is $\pm 5.0\%$ . | Per CISPR 16-4-2 Methods |
|------------------------------------------------------------------------------------------------------------|--------------------------|

## 2.3.3 Measurement Uncertainty Immunity

|                                                                                                           |                   |
|-----------------------------------------------------------------------------------------------------------|-------------------|
| The estimated combined standard uncertainty for ESD immunity measurements is $\pm 8.2\%$ .                | Per IEC 61000-4-2 |
| The estimated combined standard uncertainty for radiated immunity measurements is $\pm 4.10$ dB.          | Per IEC 61000-4-3 |
| The estimated combined standard uncertainty for conducted immunity measurements with CDN is $\pm 3.66$ dB | Per IEC 61000-4-6 |
| The estimated combined standard uncertainty for power frequency magnetic field immunity is $\pm 11.6\%$ . | Per IEC 61000-4-8 |

### Thermo KeyTek EMC Pro

|                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------|
| The estimated combined standard uncertainty for EFT fast transient immunity measurements is $\pm 5.84\%$ .        |
| The estimated combined standard uncertainty for surge immunity measurements is $\pm 5.84\%$ .                     |
| The estimated combined standard uncertainty for voltage variation and interruption measurements is $\pm 3.48\%$ . |

### Measurement Uncertainty – Radio Testing

|                                                                                                              |
|--------------------------------------------------------------------------------------------------------------|
| The estimated combined standard uncertainty for frequency error measurements is $\pm 3.88$ Hz                |
| The estimated combined standard uncertainty for carrier power measurements is $\pm 0.7$ dB.                  |
| The estimated combined standard uncertainty for adjacent channel power measurements is $\pm 1.47$ dB.        |
| The estimated combined standard uncertainty for modulation frequency response measurements is $\pm 0.46$ dB. |
| The estimated combined standard uncertainty for transmitter conducted emission measurements is $\pm 2.06$ dB |

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

## 2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005.

## **3 Product Information**

### **3.1 Product Description**

The Ear Force Stealth 700P Wireless Gaming System consists of two main communication modules, the Stealth 700P RX (“Headset”) and the Stealth 700P TX (“Transmitter”). These two modules comprise a closed-loop wireless audio gaming system that utilize a proprietary 5.2 GHz communication technology to offer wireless streaming audio and chat/talkback capabilities. The devices are designed to operate with a PS4 gaming console or PC-based system.

The Stealth 700P RX has 50mm drivers, fixed omni-directional gooseneck microphone with flip up microphone mute and microphone monitoring. Additional advanced functionality includes a Bluetooth radio that provides simultaneous connection to a Turtle Beach mobile app and device for streaming audio. Other audio processing features and controls include Superhuman Hearing, Virtual Surround, a Master Volume Wheel, a Microphone Monitor Wheel and EQ Presets Button on the headset.

### **3.2 Equipment Configuration**

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of a EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

### **3.3 Operating Mode**

A description of the operation mode is given in the Test Plan Section. In the case of a EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.


The final operating mode was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

### 3.4 Unique Antenna Connector

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

#### 3.4.1 Results

The Ear Force Stealth 700P RX uses the permanently attached PCB trace antenna inside the device for operation at 2.4 GHz. See EUT Photo for details. There is no external antenna connection available.

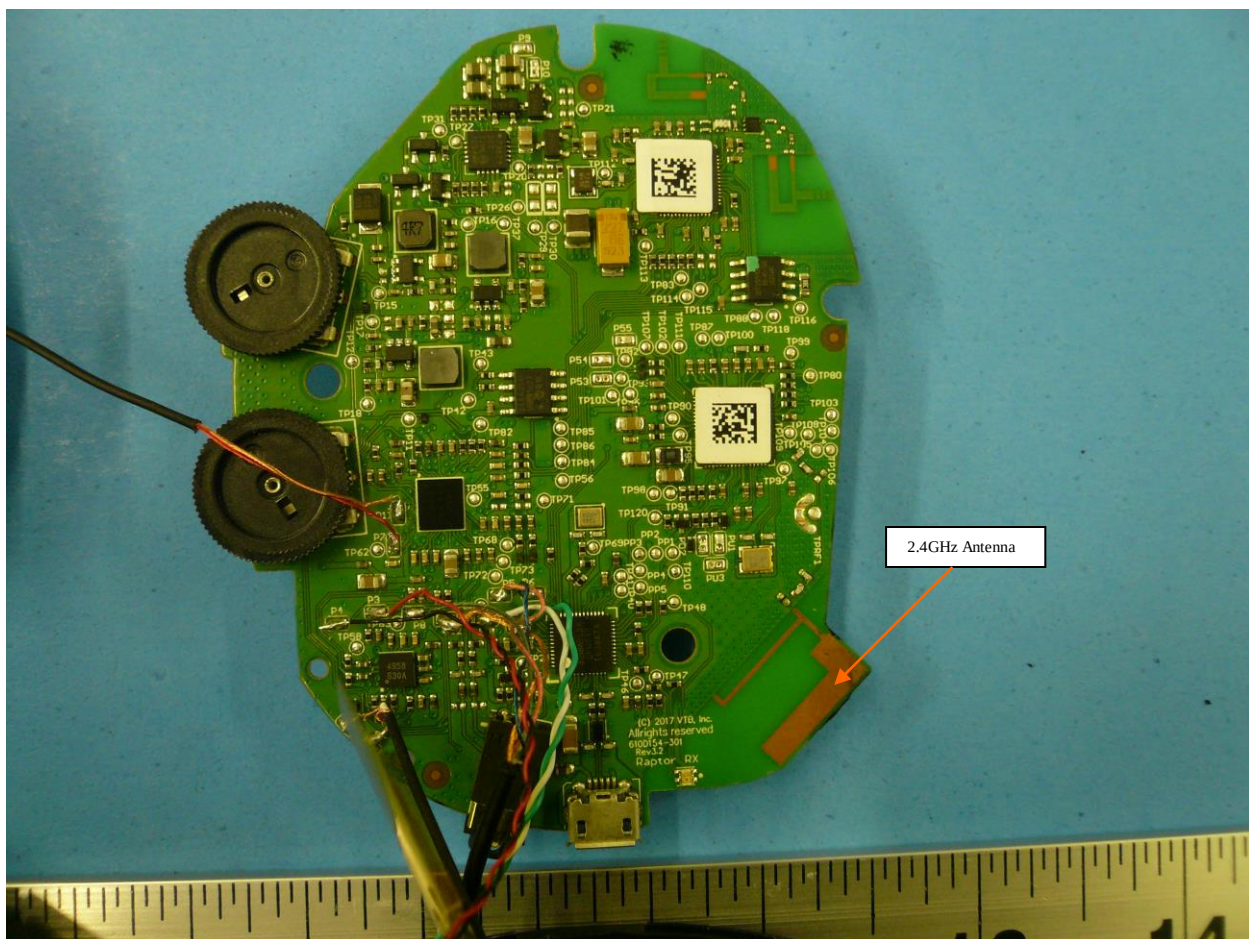

### 3.5 Duty Cycle

The Ear Force Stealth 700P RX, SN: PP #1 was measured.

#### 3.5.1 Results

| Mode                                                                                             | Duty Cycle (%) | Duty Factor (dB) |
|--------------------------------------------------------------------------------------------------|----------------|------------------|
| DH1                                                                                              | 30.5           | 5.16             |
| DH3                                                                                              | 65.5           | 1.84             |
| DH5                                                                                              | 76.9           | 1.14             |
| 2DH1                                                                                             | 31.1           | 5.07             |
| 2DH3                                                                                             | 65.6           | 1.83             |
| 2DH5                                                                                             | 77.0           | 1.14             |
| 3DH1                                                                                             | 31.0           | 5.09             |
| 3DH3                                                                                             | 65.6           | 1.83             |
| 3DH5                                                                                             | 77.1           | 1.13             |
| BLE                                                                                              | 15.2           | 8.18             |
| Notes: These modes represent the maximum duty cycle; in which the Bluetooth module will operate. |                |                  |

## 4 Emission Requirements – 2400 MHz to 2483.5 MHz Band

Testing was performed in accordance with CFR 47 Part 15.247: 2017 and RSS 247 2017. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in Section 8 of the standard were used.

### 4.1 Output Power Requirements

*The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.*

*The maximum output power and harmonics shall not exceed CFR47 Part 15.247 (b):2017 and RSS 247: 2017 Sect. 5.4.4.*


*The maximum transmitted power in the band 2400-2483.5 MHz: 1 W*

#### 4.1.1 Test Method

The ANSI C63.10-2013 Section 11.9.2.2.2. Conducted method was used to measure the channel power output. The preliminary investigation was performed at different data rate to determine the highest power output for each mode. This test was conducted on 3 channels on Ear Force Stealth 700P RX, SN: PP #1. The worst mode result indicated below.

Note: Since Ear Force Stealth 700P RX supports both BLE and FHSS Bluetooth, Ear Force Stealth 700P RX will demonstrate compliance to the rules required for DTS per KDB 453039.

Test Setup:

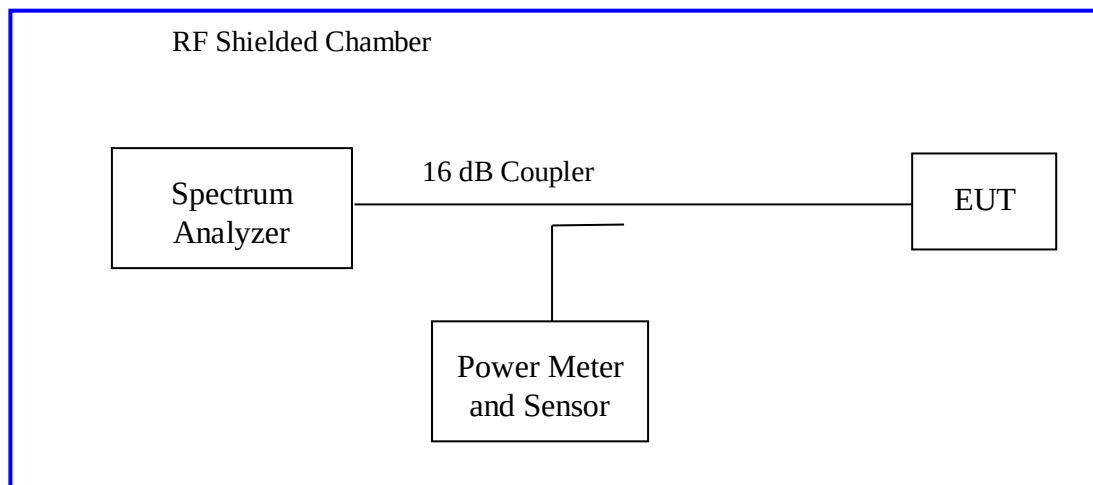

#### 4.1.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 2:** RF Output Power at the Antenna Port – Test Results

|                                                            |                   |             |                             |             |
|------------------------------------------------------------|-------------------|-------------|-----------------------------|-------------|
| Test Conditions: Conducted Measurement, Normal Temperature |                   |             | Date: August 15, 2017       |             |
| Antenna Type: Integrated Antenna                           |                   |             | Power Setting: Fixed        |             |
| Max. Antenna Gain: 2.8 dBi                                 |                   |             | Signal State: Modulated     |             |
| Duty Cycle: See Sect. 3.5                                  |                   |             | Data Rate: BDR, EDR and BLE |             |
| Ambient Temp.: 23° C                                       |                   |             | Relative Humidity: 40 %RH   |             |
| Results                                                    |                   |             |                             |             |
| Mode                                                       | Operating Channel | Limit [dBm] | Power [dBm]                 | Margin [dB] |
| DH1                                                        | 2402 MHz          | +30.00      | 0.00                        | -30.00      |
|                                                            | 2442 MHz          | +30.00      | -0.50                       | -30.50      |
|                                                            | 2480 MHz          | +30.00      | -0.79                       | -30.79      |
| DH3                                                        | 2402 MHz          | +30.00      | -0.13                       | -30.13      |
|                                                            | 2442 MHz          | +30.00      | -0.64                       | -30.64      |
|                                                            | 2480 MHz          | +30.00      | -0.92                       | -30.92      |
| DH5                                                        | 2402 MHz          | +30.00      | -0.22                       | -30.22      |
|                                                            | 2442 MHz          | +30.00      | -0.68                       | -30.68      |
|                                                            | 2480 MHz          | +30.00      | -0.97                       | -30.97      |
| 2-DH1                                                      | 2402 MHz          | +30.00      | 0.78                        | -29.22      |
|                                                            | 2442 MHz          | +30.00      | 0.29                        | -29.71      |
|                                                            | 2480 MHz          | +30.00      | -0.13                       | -30.13      |
| 2-DH3                                                      | 2402 MHz          | +30.00      | 0.63                        | -29.37      |
|                                                            | 2442 MHz          | +30.00      | 0.16                        | -29.84      |
|                                                            | 2480 MHz          | +30.00      | -0.15                       | -30.15      |
| 2-DH5                                                      | 2402 MHz          | +30.00      | 0.61                        | -29.39      |
|                                                            | 2442 MHz          | +30.00      | 0.13                        | -29.87      |
|                                                            | 2480 MHz          | +30.00      | -0.19                       | -30.19      |

|       |          |        |       |        |
|-------|----------|--------|-------|--------|
| 3-DH1 | 2402 MHz | +30.00 | 0.64  | -29.36 |
|       | 2442 MHz | +30.00 | 0.22  | -29.78 |
|       | 2480 MHz | +30.00 | -0.08 | -30.08 |
| 3-DH3 | 2402 MHz | +30.00 | 0.70  | -29.30 |
|       | 2442 MHz | +30.00 | 0.21  | -29.79 |
|       | 2480 MHz | +30.00 | -0.12 | -30.12 |
| 3-DH5 | 2402 MHz | +30.00 | 0.63  | -29.37 |
|       | 2442 MHz | +30.00 | 0.17  | -29.83 |
|       | 2480 MHz | +30.00 | -0.17 | -30.17 |
| BLE   | 2402 MHz | +30.00 | 0.74  | -29.26 |
|       | 2442 MHz | +30.00 | 0.35  | -29.65 |
|       | 2480 MHz | +30.00 | 0.02  | -29.98 |

**Note:** The headset is capable to transmit at BDR, EDR and BLE. The worst case condition at low, middle and high frequencies is shown below using a peak detector.



Figure 1: Maximum Transmitted Power at 2402 MHz, DH1

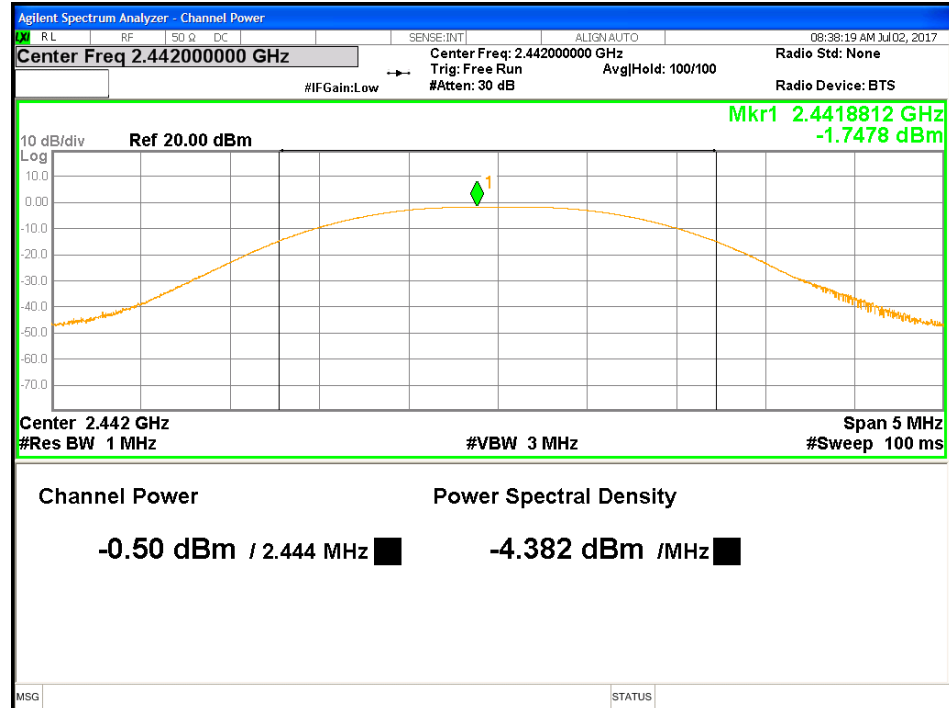


Figure 2: Maximum Transmitted Power at 2442 MHz, DH1



Figure 3: Maximum Transmitted Power at 2480 MHz, DH1

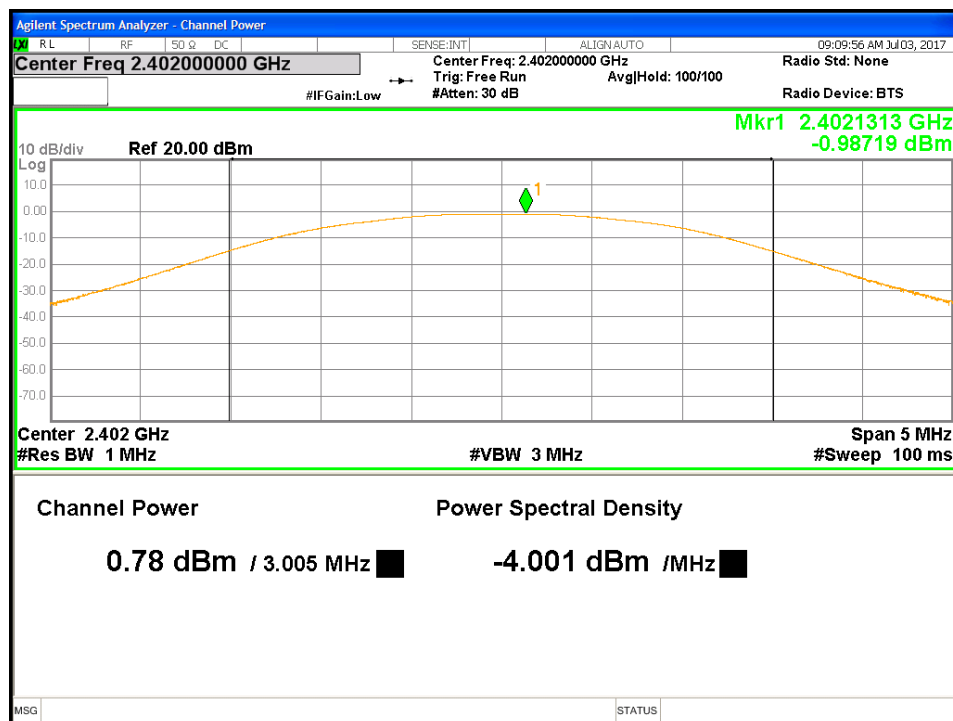


Figure 4: Maximum Transmitted Power at 2402 MHz, 2DH1



Figure 5: Maximum Transmitted Power at 2442 MHz, 2DH1

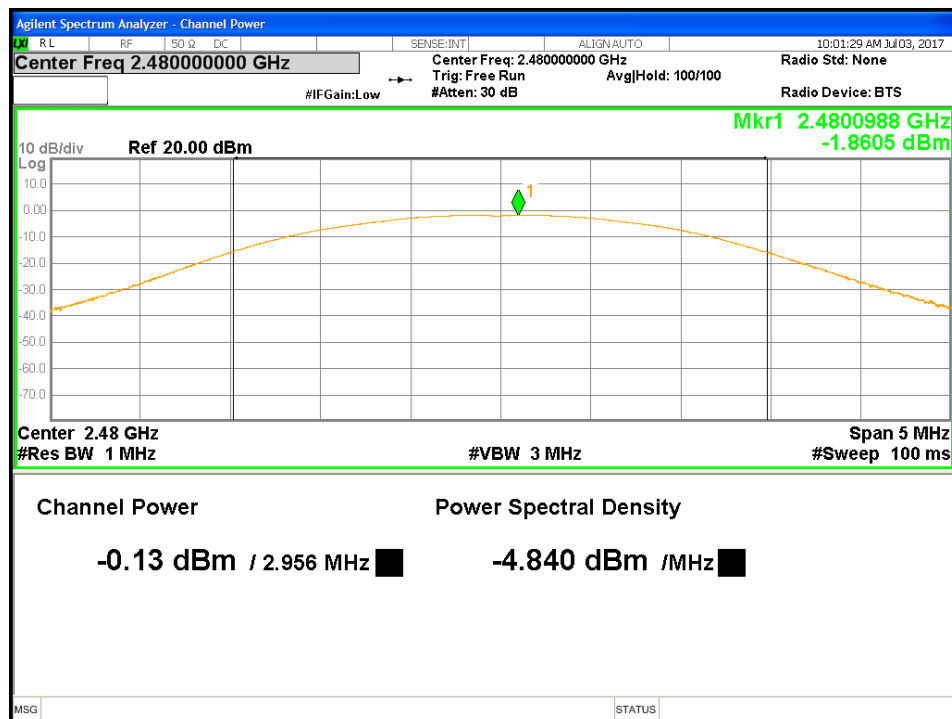


Figure 6: Maximum Transmitted Power at 2480 MHz, 2DH1

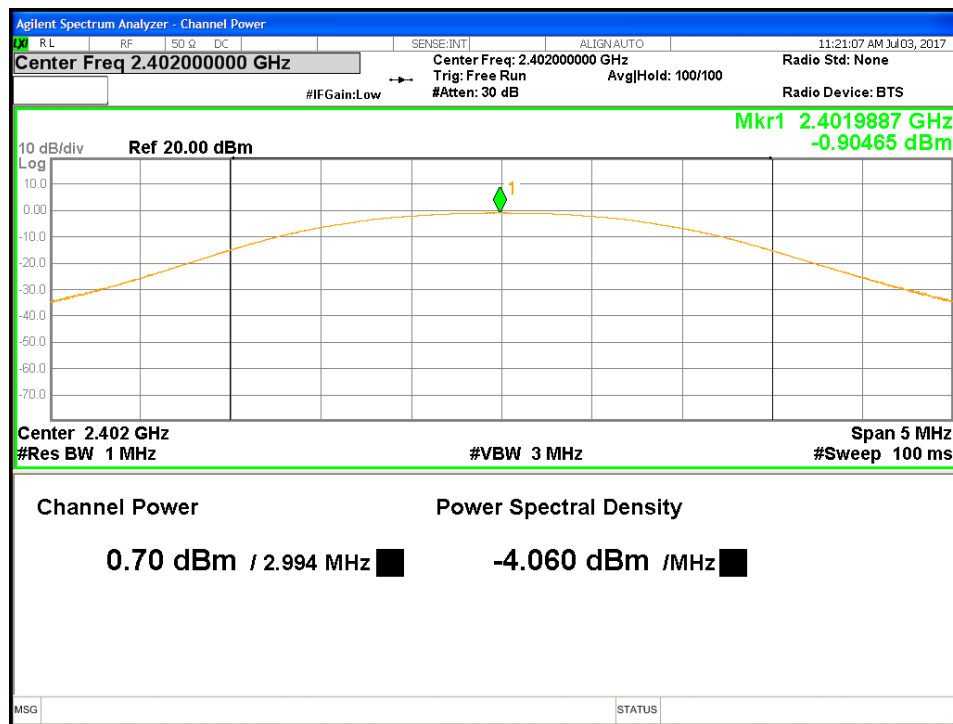


Figure 7: Maximum Transmitted Power at 2402 MHz, 3DH3

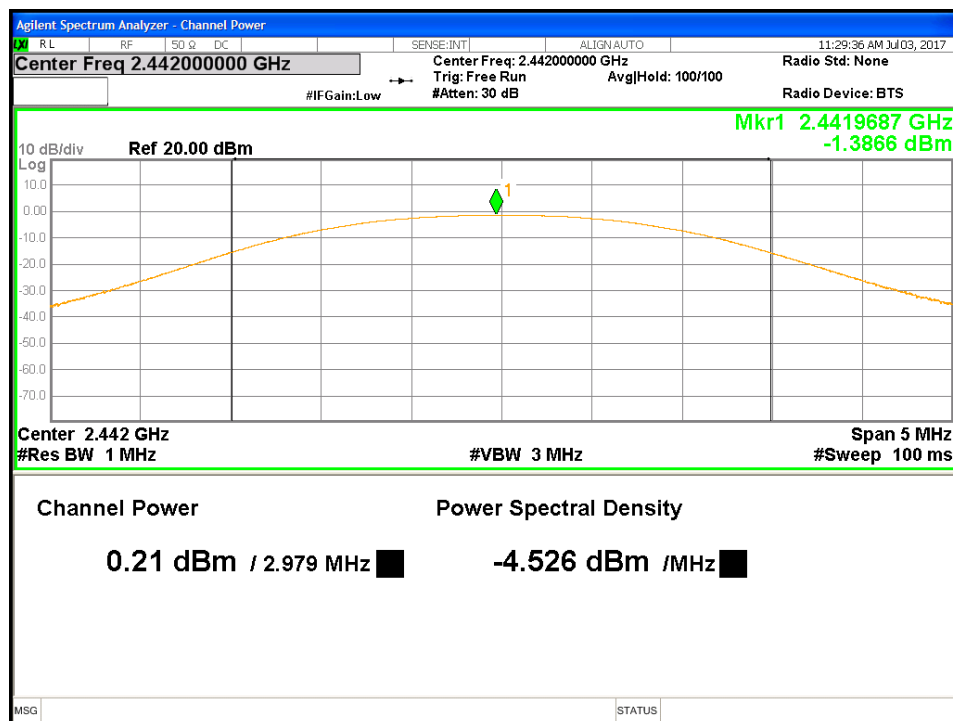


Figure 8: Maximum Transmitted Power at 2442 MHz, 3DH3



Figure 9: Maximum Transmitted Power at 2480 MHz, 3DH3

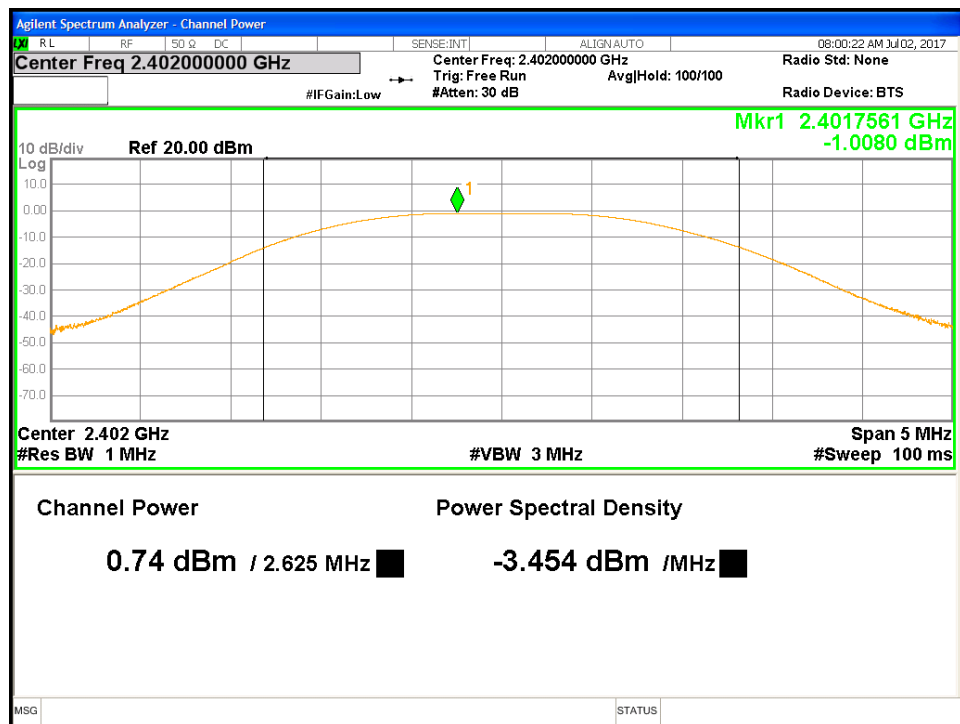


Figure 10: Maximum Transmitted Power at 2402 MHz, BLE

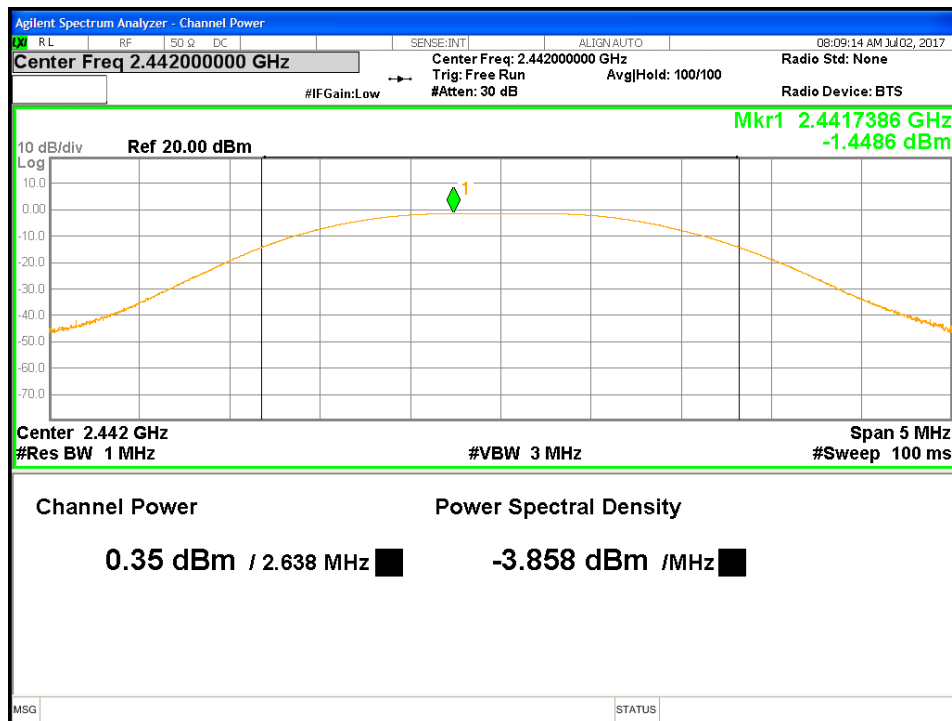


Figure 11: Maximum Transmitted Power at 2442 MHz, BLE

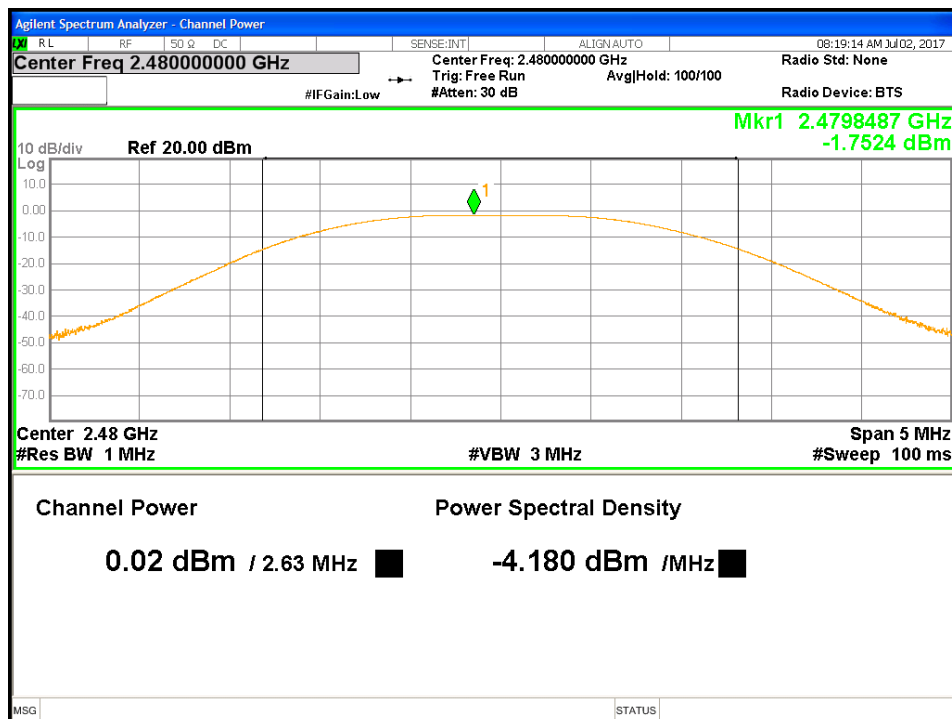


Figure 12: Maximum Transmitted Power at 2480 MHz, BLE

## 4.2 Occupied Bandwidth

*The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.*

*The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.*

*20 dB bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.*

*The 6dB bandwidth is defined the bandwidth of 6dBr from highest transmitted level of the fundamental frequency.*


*The minimum 6 dB bandwidth shall be at least 500 kHz per Section CFR47 15.247(a2) 2017 and RSS-247 Sect. 5.3(a) Issue 2, 2017.*

### 4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth according to ANSI C63.10:2013 Section 11.8. The measurement was performed with modulation per CFR47 15.247 (a) (2) 2016 and RSS Gen Sect. 6.6 2014. This test was conducted on 3 channels on Ear Force Stealth 700P RX, SN: PP #1. The worst sample result indicated below.

Note: Since Ear Force Stealth 700P RX supports both BLE and FHSS Bluetooth, Ear Force Stealth 700P RX will demonstrate compliance to the rules required for DTS per KDB 453039.

Test Setup:

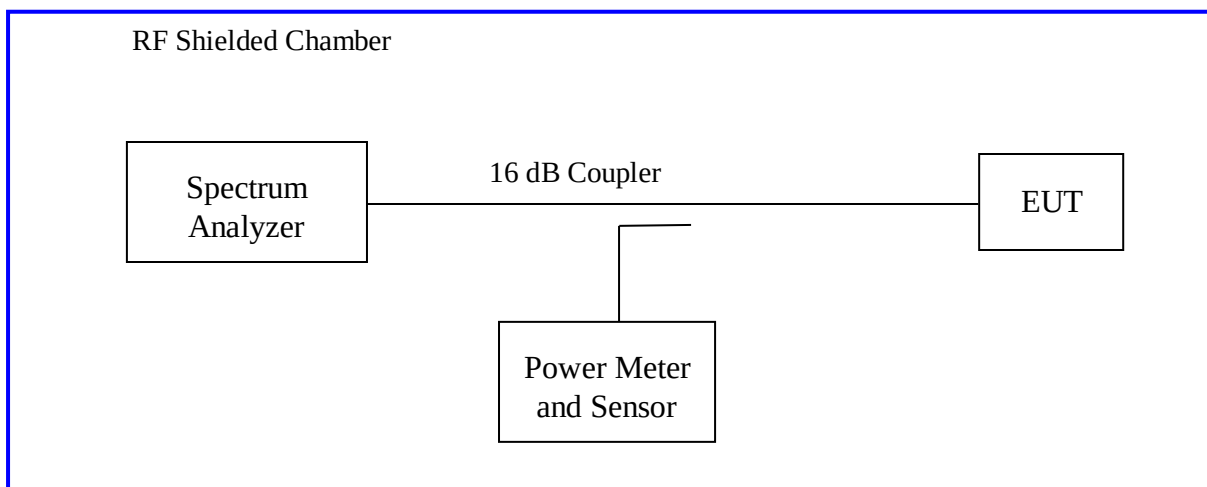

## 4.2.2 Results

These measurements were used for information only

**Table 3:** Occupied Bandwidth – Test Results

|                                                                             |             |                           |                   |
|-----------------------------------------------------------------------------|-------------|---------------------------|-------------------|
| Test Conditions: Conducted Measurement, Normal Temperature and Voltage only |             | Date: August 15, 2017     |                   |
| Antenna Type: Integrated Antenna                                            |             | Power Setting: Fixed.     |                   |
| Max. Antenna Gain: +2.8 dBi                                                 |             | Signal State: Modulated   |                   |
| Duty Cycle: See Sect. 3.5                                                   |             | Data Rate: see below      |                   |
| Ambient Temp.: 23° C                                                        |             | Relative Humidity: 40 %RH |                   |
| Bandwidth for BDR and EDR                                                   |             |                           |                   |
| Package                                                                     | Freq. (MHz) | 20dB Bandwidth MHz        | 99% Bandwidth MHz |
| DH1                                                                         | 2402        | 0.870                     | 0.823             |
|                                                                             | 2442        | 0.867                     | 0.824             |
|                                                                             | 2480        | 0.908                     | 0.822             |
| DH3                                                                         | 2402        | 0.935                     | 0.867             |
|                                                                             | 2442        | 0.931                     | 0.869             |
|                                                                             | 2480        | 0.931                     | 0.868             |
| DH5                                                                         | 2402        | 0.933                     | 0.869             |
|                                                                             | 2442        | 0.933                     | 0.871             |
|                                                                             | 2480        | 0.934                     | 0.868             |
| 2-DH1                                                                       | 2402        | 1.239                     | 1.174             |
|                                                                             | 2442        | 1.242                     | 1.175             |
|                                                                             | 2480        | 1.241                     | 1.172             |
| 2-DH3                                                                       | 2402        | 1.303                     | 1.192             |
|                                                                             | 2442        | 1.304                     | 1.189             |
|                                                                             | 2480        | 1.288                     | 1.187             |
| 2-DH5                                                                       | 2402        | 1.305                     | 1.197             |

|                                                                                      |      |       |       |
|--------------------------------------------------------------------------------------|------|-------|-------|
|                                                                                      | 2442 | 1.300 | 1.196 |
|                                                                                      | 2480 | 1.302 | 1.191 |
| 3-DH1                                                                                | 2402 | 1.203 | 1.159 |
|                                                                                      | 2442 | 1.205 | 1.158 |
|                                                                                      | 2480 | 1.209 | 1.157 |
| 3-DH3                                                                                | 2402 | 1.268 | 1.197 |
|                                                                                      | 2442 | 1.266 | 1.193 |
|                                                                                      | 2480 | 1.262 | 1.191 |
| 3-DH5                                                                                | 2402 | 1.277 | 1.209 |
|                                                                                      | 2442 | 1.264 | 1.208 |
|                                                                                      | 2480 | 1.262 | 1.203 |
| <b>Note:</b> 99% bandwidth and 20dB bandwidth measurements are for information only. |      |       |       |

**Table 4: DTS Occupied Bandwidth – Test Results**

|                                                     |             |        |                           |         |
|-----------------------------------------------------|-------------|--------|---------------------------|---------|
| Test Conditions: Conducted Measurement              |             |        | Date: August 15, 2017     |         |
| Antenna Type: Integrated Antenna                    |             |        | Power Setting: Fixed.     |         |
| Max. Antenna Gain: +2.8 dBi                         |             |        | Signal State: Modulated   |         |
| Duty Cycle: See Sect. 3.5                           |             |        | Data Rate: see below      |         |
| Ambient Temp.: 23° C                                |             |        | Relative Humidity: 40 %RH |         |
| Bandwidth (MHz) for BLE                             |             |        |                           |         |
| Frequency (MHz)                                     | Limit (kHz) | 99% BW | 6 dB BW                   | Results |
| 2402                                                | 500         | 1.039  | 0.526                     | Pass    |
| 2442                                                | 500         | 1.039  | 0.537                     | Pass    |
| 2480                                                | 500         | 1.039  | 0.545                     | Pass    |
| Note: The DTS bandwidths were observed in BLE mode. |             |        |                           |         |

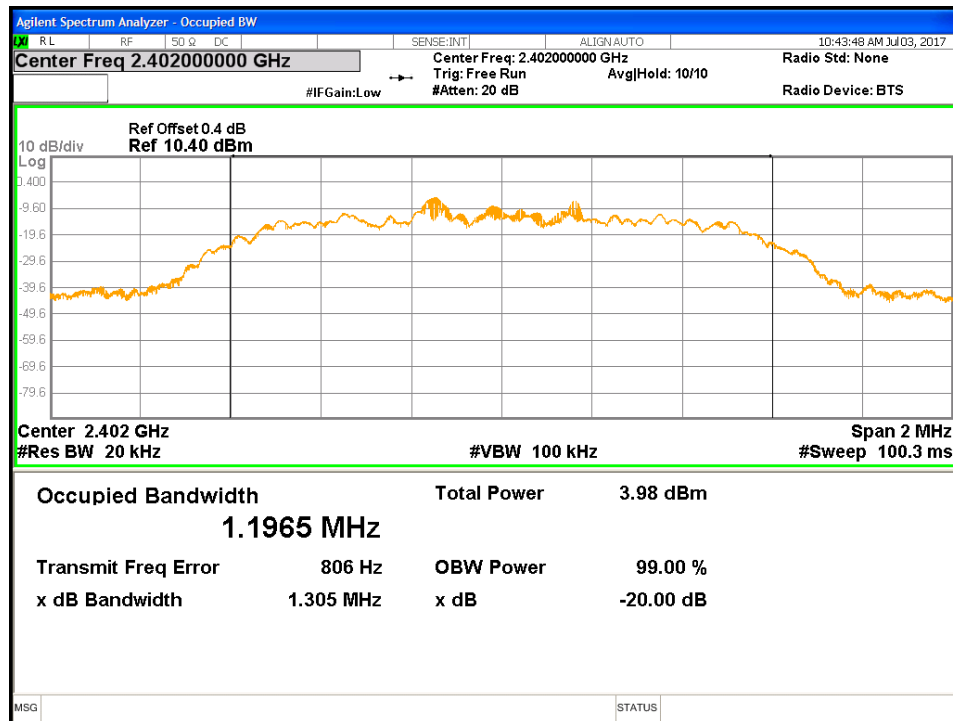


Figure 13: Occupied Bandwidth at 2402 MHz, 2DH5

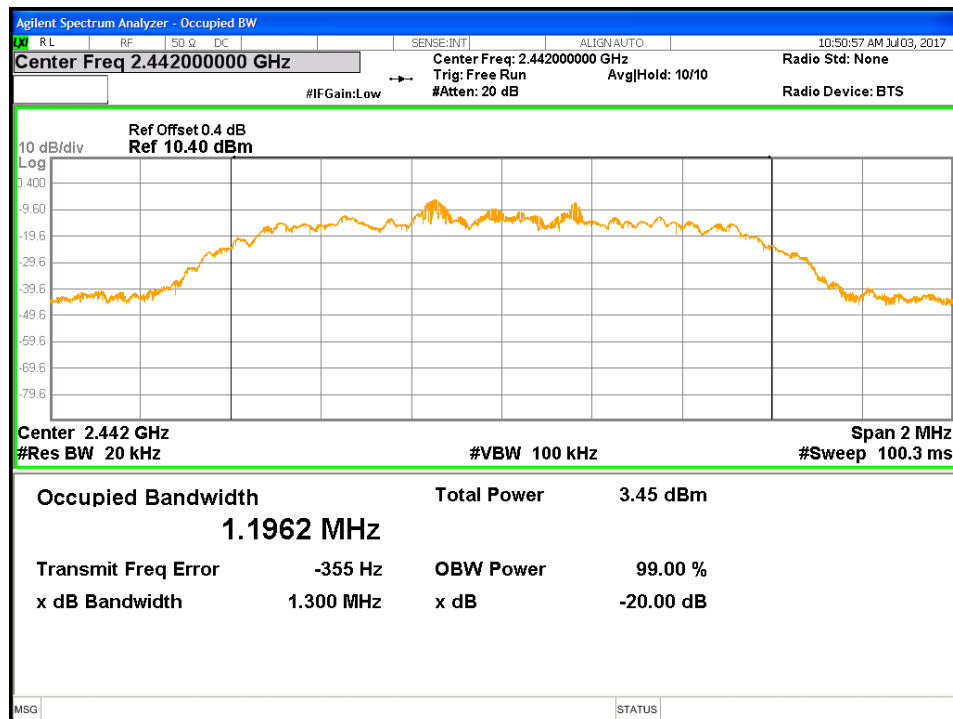


Figure 14: Occupied Bandwidth at 2442 MHz, 2DH5

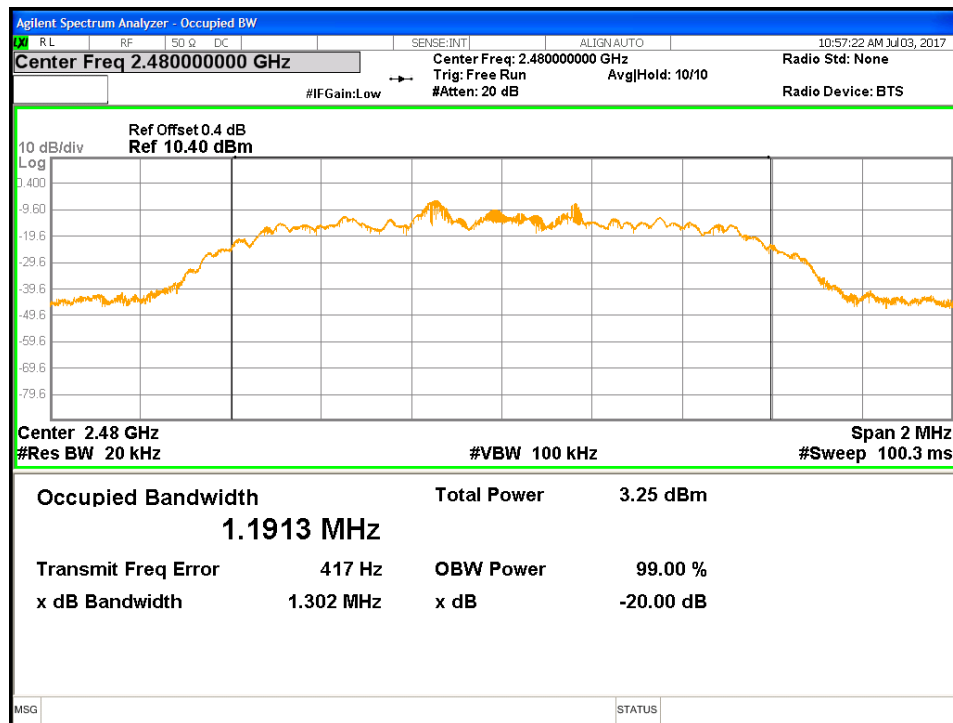


Figure 15: Occupied Bandwidth at 2480 MHz, 2DH5

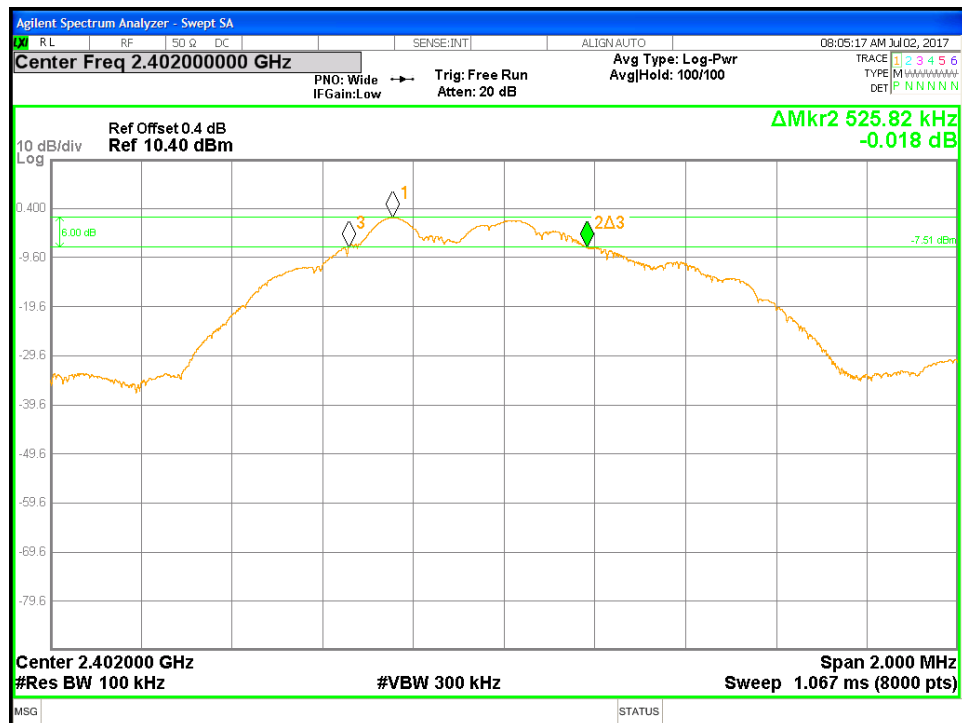


Figure 16: DTS Bandwidth-BLE-2402 MHz

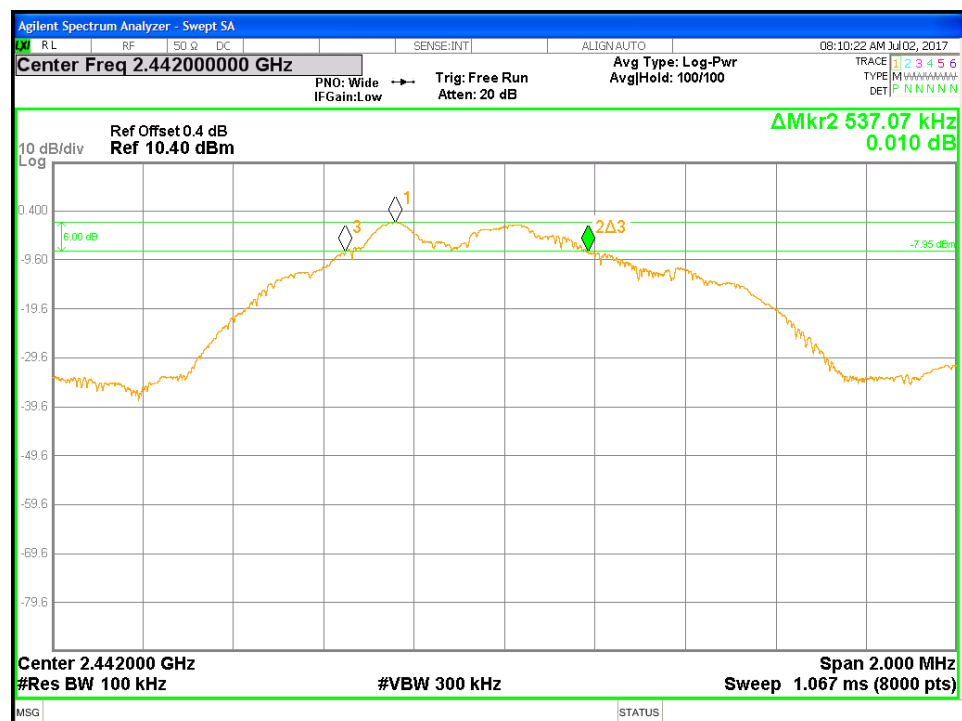


Figure 17: DTS Bandwidth-BLE-2442 MHz

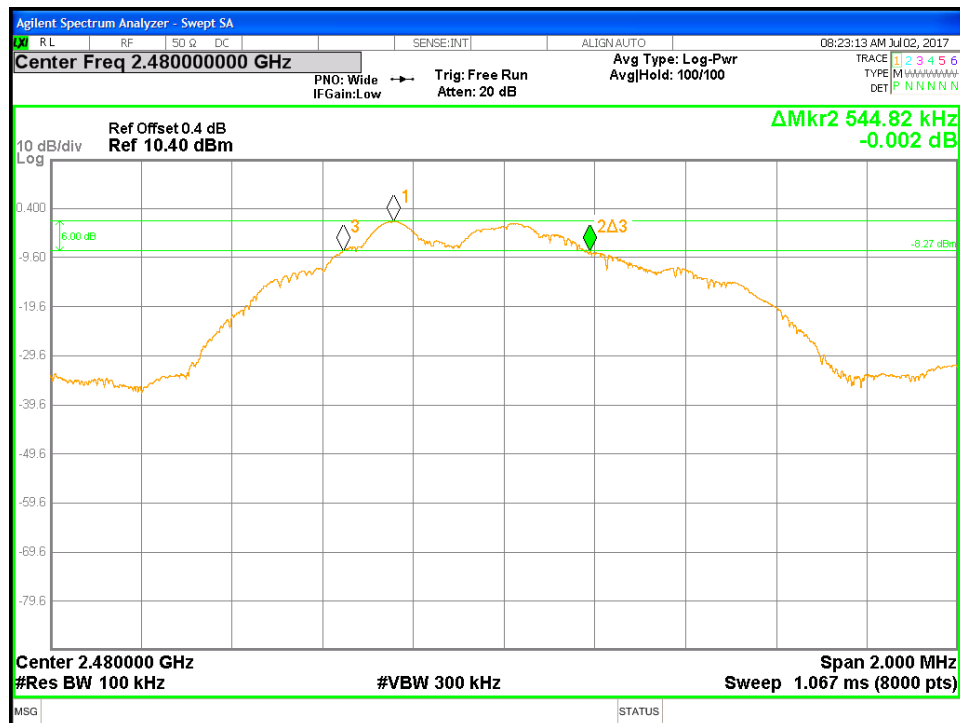


Figure 18: DTS Bandwidth-BLE-2480 MHz

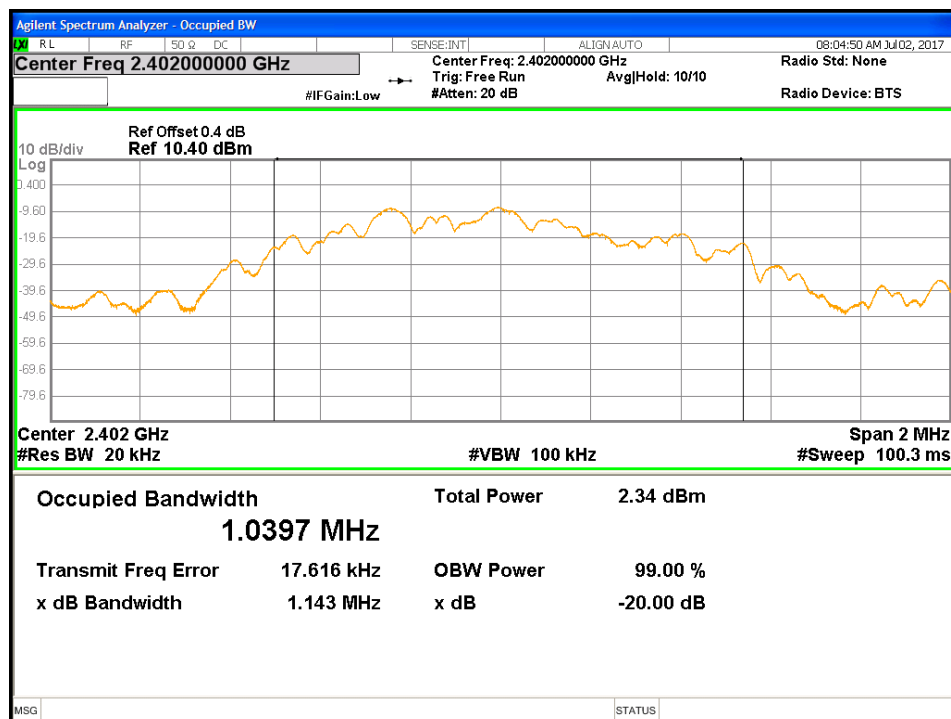


Figure 19: 99% Bandwidth-BLE-2402 MHz

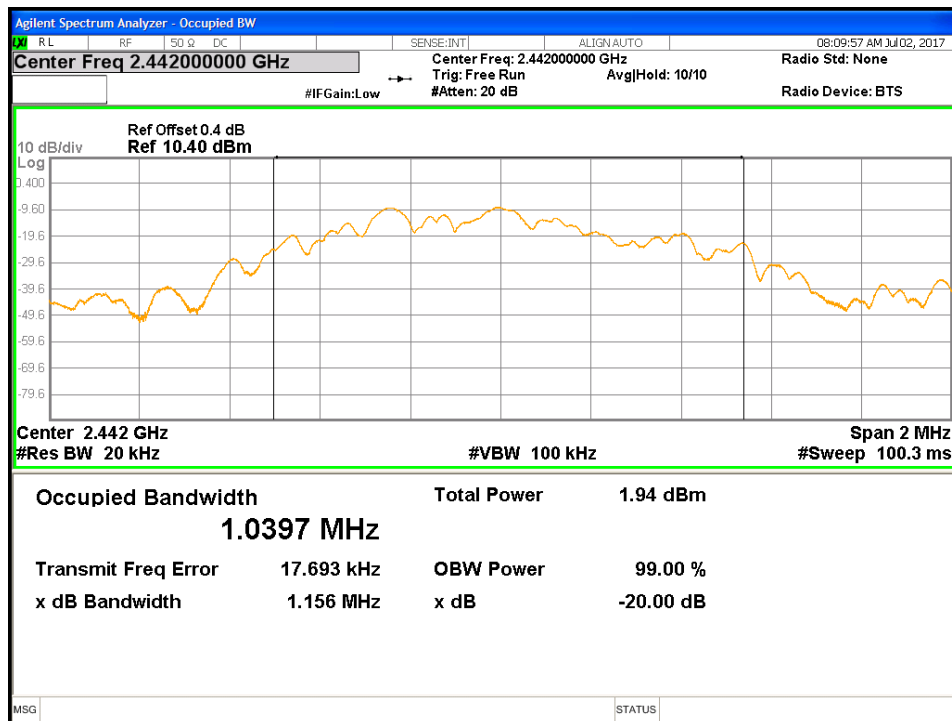


Figure 20: 99% Bandwidth-BLE-2442 MHz

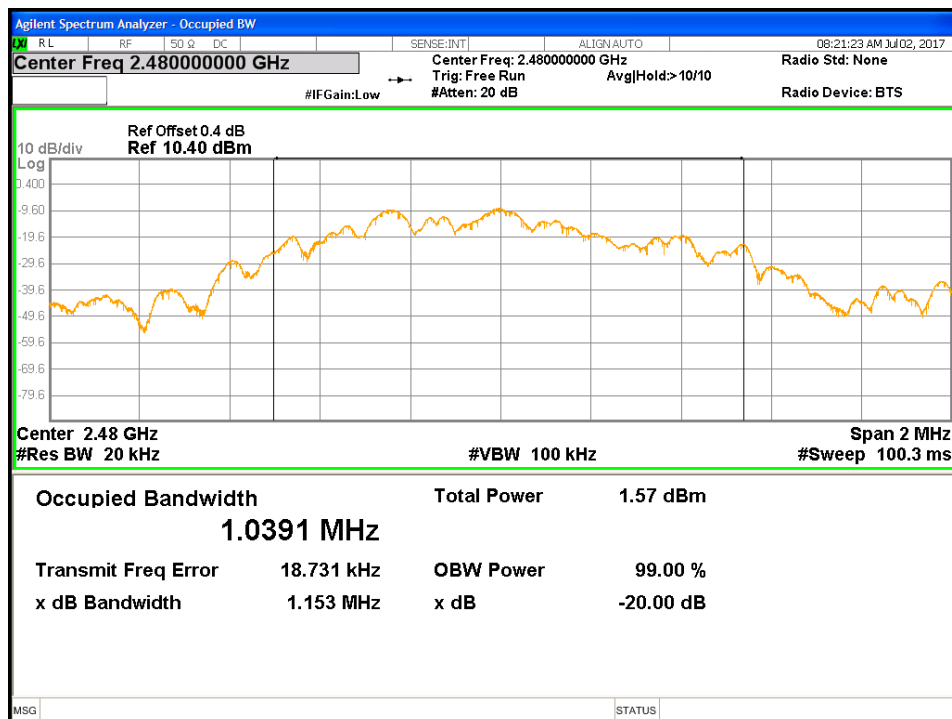


Figure 21: 99% Bandwidth-BLE-2480 MHz

### 4.3 Peak Power Spectral Density


According to the CFR47 Part 15.247 (e) and RSS 247 Sect.5.2 (b), the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.1 Test Method

The conducted method was used to measure the channel power output per ANSI C63.10-2013 Section 11.10.3. The measurement was performed with modulation per CFR47 Part 15.247 (e) and RSS 247 Sect.5.2 (b). The pre-evaluation was performed to find the worst modes. The worst findings were conducted on 3 channels in each operating frequency range of 2400 MHz to 2483.5 MHz. The worst sample result indicated below.

Note: Since Ear Force Stealth 700P RX supports both BLE and FHSS Bluetooth, Ear Force Stealth 700P RX will demonstrate compliance to the rules required for DTS per KDB 453039

Test Setup:

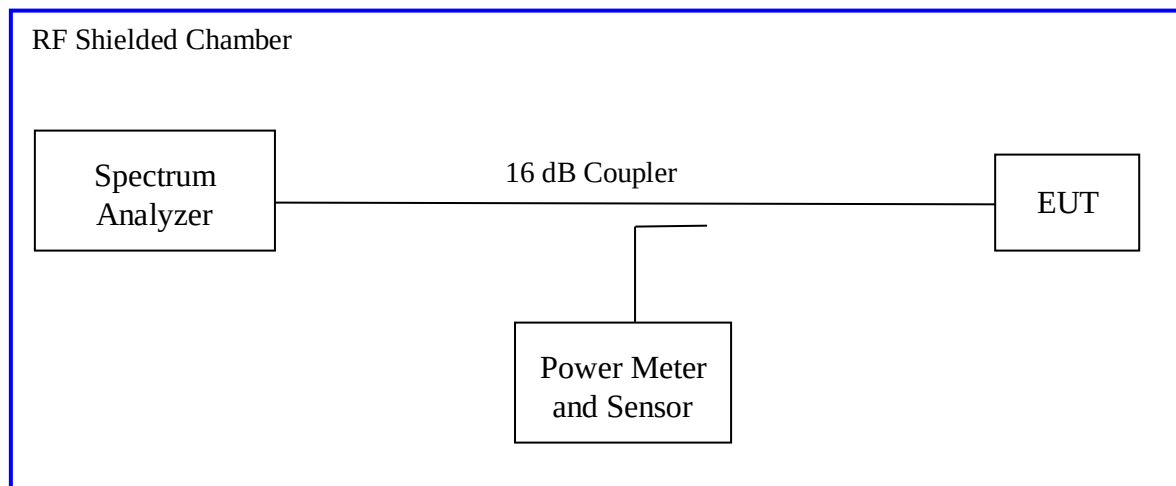

Method AVGSA-1 of “KDB 558074 – DTS Measurement Guidance v04” applies since the EUT continuously transmits with duty cycle greater than 98%. Sample detector was used.

#### 4.3.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 5: Peak Power Spectral Density – Test Results**

|                                                                                                                                                                        |             |              |         |                           |             |             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------------|---------|---------------------------|-------------|-------------|
| Test Conditions: Conducted Measurement, Normal Temperature and Voltage only                                                                                            |             |              |         | Date: August 16, 2017     |             |             |
| Antenna Type: Integrated Antenna                                                                                                                                       |             |              |         | Power Setting: Fixed      |             |             |
| Max. Antenna Gain: +2.8 dBi                                                                                                                                            |             |              |         | Signal State: Modulated   |             |             |
| Duty Cycle: See Sect. 3.5                                                                                                                                              |             |              |         | Data Rate: BDR, EDR, BLE  |             |             |
| Ambient Temp.: 23° C                                                                                                                                                   |             |              |         | Relative Humidity: 40 %RH |             |             |
| Peak Power Spectral Density                                                                                                                                            |             |              |         |                           |             |             |
| Mode                                                                                                                                                                   | Freq. (MHz) | Output [dBm] | CF [dB] | Max. PPSD [dBm]           | Limit [dBm] | Margin [dB] |
| DH1                                                                                                                                                                    | 2402        | -1.40        | -15.23  | -16.63                    | 8.00        | -24.63      |
|                                                                                                                                                                        | 2442        | -1.89        | -15.23  | -17.12                    | 8.00        | -25.12      |
|                                                                                                                                                                        | 2480        | -2.23        | -15.23  | -17.46                    | 8.00        | -25.46      |
| DH3                                                                                                                                                                    | 2402        | -1.57        | -15.23  | -16.80                    | 8.00        | -24.80      |
|                                                                                                                                                                        | 2442        | -2.03        | -15.23  | -17.26                    | 8.00        | -25.26      |
|                                                                                                                                                                        | 2480        | -2.36        | -15.23  | -17.59                    | 8.00        | -25.59      |
| DH5                                                                                                                                                                    | 2402        | -1.61        | -15.23  | -16.84                    | 8.00        | -24.84      |
|                                                                                                                                                                        | 2442        | -2.09        | -15.23  | -17.32                    | 8.00        | -25.32      |
|                                                                                                                                                                        | 2480        | -2.22        | -15.23  | -17.45                    | 8.00        | -25.45      |
| 2DH1                                                                                                                                                                   | 2402        | -1.40        | -15.23  | -16.63                    | 8.00        | -24.63      |
|                                                                                                                                                                        | 2442        | -1.92        | -15.23  | -17.15                    | 8.00        | -25.15      |
|                                                                                                                                                                        | 2480        | -2.27        | -15.23  | -17.50                    | 8.00        | -25.50      |
| 2DH3                                                                                                                                                                   | 2402        | -1.55        | -15.23  | -16.78                    | 8.00        | -24.78      |
|                                                                                                                                                                        | 2442        | -2.03        | -15.23  | -17.26                    | 8.00        | -25.26      |
|                                                                                                                                                                        | 2480        | -2.35        | -15.23  | -17.58                    | 8.00        | -25.58      |
| 2DH5                                                                                                                                                                   | 2402        | -1.61        | -15.23  | -16.84                    | 8.00        | -24.84      |
|                                                                                                                                                                        | 2442        | -2.09        | -15.23  | -17.32                    | 8.00        | -25.32      |
|                                                                                                                                                                        | 2480        | -2.39        | -15.23  | -17.62                    | 8.00        | -25.62      |
| 3DH1                                                                                                                                                                   | 2402        | -1.54        | -15.23  | -16.77                    | 8.00        | -24.77      |
|                                                                                                                                                                        | 2442        | -1.95        | -15.23  | -17.18                    | 8.00        | -25.18      |
|                                                                                                                                                                        | 2480        | -2.26        | -15.23  | -17.49                    | 8.00        | -25.49      |
| 3DH3                                                                                                                                                                   | 2402        | -1.56        | -15.23  | -16.79                    | 8.00        | -24.79      |
|                                                                                                                                                                        | 2442        | -2.03        | -15.23  | -17.26                    | 8.00        | -25.26      |
|                                                                                                                                                                        | 2480        | -2.35        | -15.23  | -17.58                    | 8.00        | -25.58      |
| 3DH5                                                                                                                                                                   | 2402        | -1.70        | -15.23  | -16.93                    | 8.00        | -24.93      |
|                                                                                                                                                                        | 2442        | -2.09        | -15.23  | -17.32                    | 8.00        | -25.32      |
|                                                                                                                                                                        | 2480        | -2.41        | -15.23  | -17.64                    | 8.00        | -25.64      |
| BLE                                                                                                                                                                    | 2402        | -1.08        | -15.23  | -16.31                    | 8.00        | -24.31      |
|                                                                                                                                                                        | 2442        | -1.55        | -15.23  | -16.78                    | 8.00        | -24.78      |
|                                                                                                                                                                        | 2480        | -1.83        | -15.23  | -17.06                    | 8.00        | -25.06      |
| Note: CF accounted for the measured RBW. The bandwidth ratio is 10*log (3kHz/100kHz) or -15.23 dB.<br>Peak detector was used.<br>The worst case plots are shown below. |             |              |         |                           |             |             |

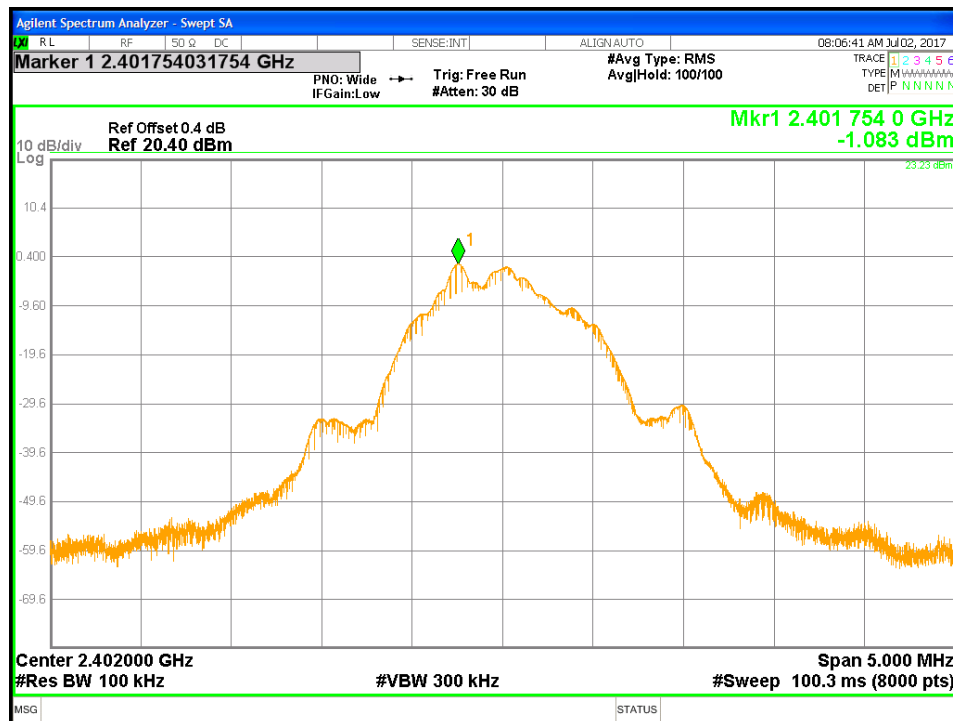


Figure 22: Maximum Power Spectral Density-2402 MHz-BLE

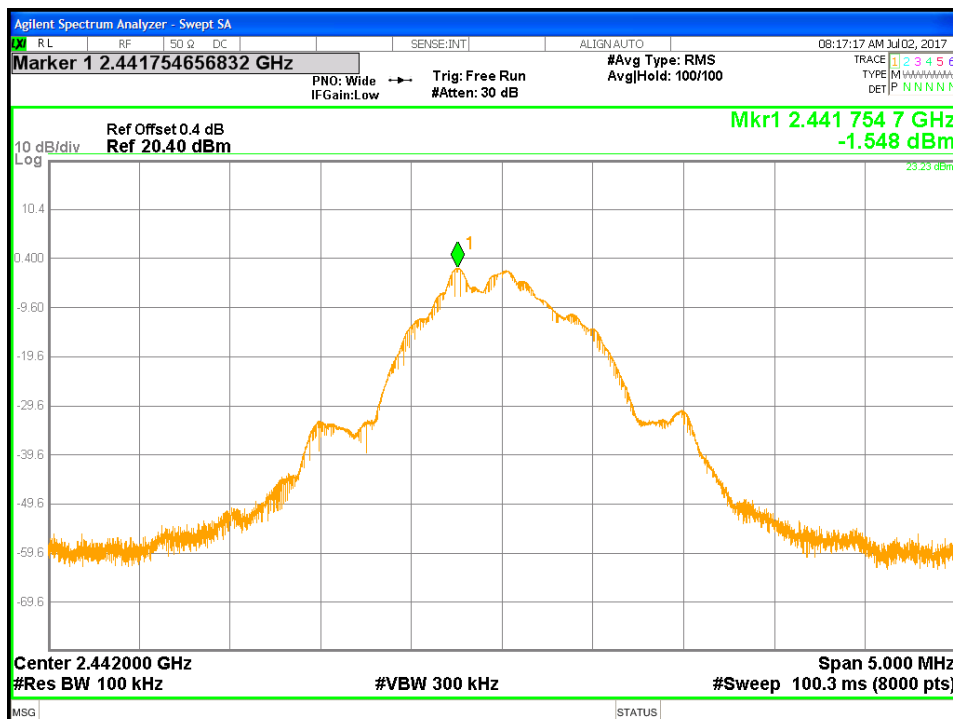


Figure 23: Maximum Power Spectral Density-2442 MHz-BLE

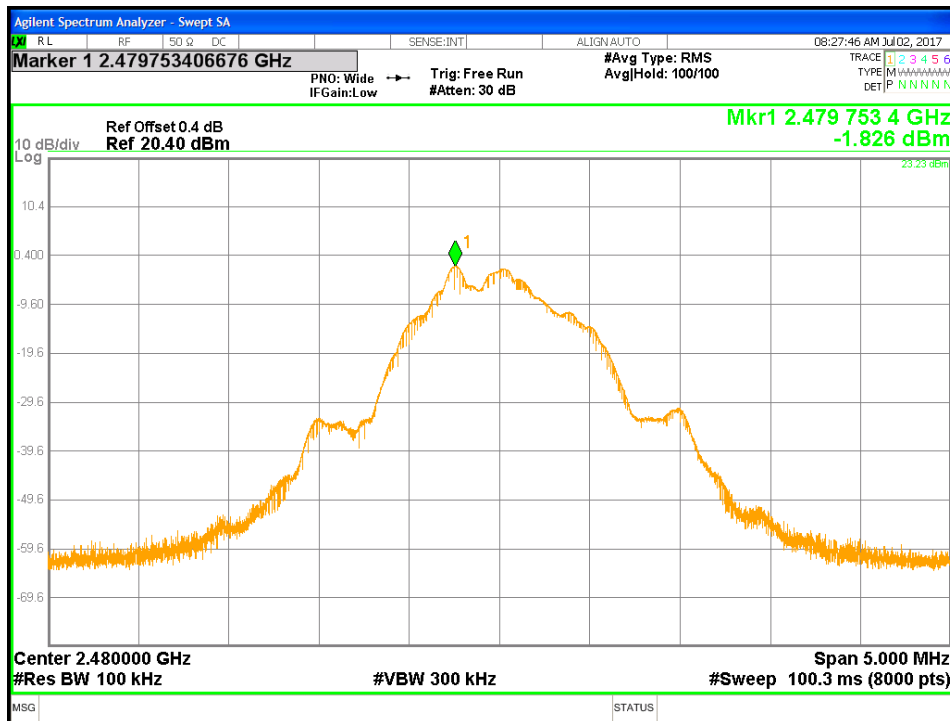


Figure 24: Maximum Power Spectral Density-2480 MHz-BLE

#### 4.4 Out of Band Emission requirements

The setup was identical to RF output power measurement. Intentional radiators operating under the alternative provisions to the general emission limits, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If the frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

*Any frequency outside the band of 2400 MHz to 2483.5 MHz, the power output level must be below 20 dB from the in-band transmitting signal; CFR 47 Part 15.215, 15.247(d) and RSS 247 Sect.5.5.*

Note: Since Ear Force Stealth 700P RX supports both BLE and FHSS Bluetooth, Ear Force Stealth 700P RX will demonstrate compliance to the rules required for DTS per KDB 453039

The setup was identical to RF output power measurement.

This test was conducted on 3 channels on Ear Force Stealth 700P RX, SN: PP #1.

##### 4.4.1 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 6:** Band Edge Requirements – Test Results

|                                                                                    |                        |                                  |                             |               |
|------------------------------------------------------------------------------------|------------------------|----------------------------------|-----------------------------|---------------|
| <b>Test Conditions:</b> Conducted Measurement, Normal Temperature and Voltage only |                        | <b>Date:</b> August 16, 2017     |                             |               |
| <b>Antenna Type:</b> Integrated Antenna                                            |                        | <b>Power Setting:</b> Fixed      |                             |               |
| <b>Max. Antenna Gain:</b> +2.8 dBi                                                 |                        | <b>Signal State:</b> Modulated   |                             |               |
| <b>Duty Cycle:</b> See Sect. 3.5                                                   |                        | <b>Data Rate:</b> see below      |                             |               |
| <b>Ambient Temp.:</b> 23° C                                                        |                        | <b>Relative Humidity:</b> 40 %RH |                             |               |
| <b>-20 dBr Band Edge Results</b>                                                   |                        |                                  |                             |               |
| <b>Mode</b>                                                                        | <b>Operating Freq.</b> | <b>Limit (dBm)</b>               | <b>Measured Value (dBm)</b> | <b>Result</b> |
| DH1                                                                                | 2402 MHz               | -21.36                           | -56.08                      | Pass          |
|                                                                                    | 2442 MHz               | -21.84                           | -62.69                      | Pass          |
|                                                                                    | 2480 MHz               | -22.24                           | -61.88                      | Pass          |
| 2-DH1                                                                              | 2402 MHz               | -21.39                           | -54.10                      | Pass          |

|       |          |        |        |      |
|-------|----------|--------|--------|------|
|       | 2442 MHz | -21.84 | -62.21 | Pass |
|       | 2480 MHz | -22.25 | -62.19 | Pass |
| 3-DH3 | 2402 MHz | -21.59 | -53.36 | Pass |
|       | 2442 MHz | -21.97 | -61.56 | Pass |
|       | 2480 MHz | -22.29 | -61.39 | Pass |
| BLE   | 2402 MHz | -21.12 | -57.62 | Pass |
|       | 2442 MHz | -21.84 | -60.81 | Pass |
|       | 2480 MHz | -22.55 | -62.62 | Pass |

**Note:** The stated limits for 20 dBr are relative to each individual output per KDB 662911 Method.  
The worst case for each data rate is plotted below.

| Out of Band Emission |                 |             |                         |        |
|----------------------|-----------------|-------------|-------------------------|--------|
| Mode                 | Operating Freq. | Limit (dBm) | Measured Value (dBm)    | Result |
| DH1                  | 2402 MHz        | -21.36      | -41.38 dBm (7.205 GHz)  | Pass   |
|                      | 2442 MHz        | -21.84      | -44.27 dBm (7.325 GHz)  | Pass   |
|                      | 2480 MHz        | -22.24      | -45.58 dBm (7.439 GHz)  | Pass   |
| 2-DH1                | 2402 MHz        | -21.39      | -40.50 dBm (7.205 GHz)  | Pass   |
|                      | 2442 MHz        | -21.84      | -44.30 dBm (7.326 GHz)  | Pass   |
|                      | 2480 MHz        | -22.25      | -45.96 dBm (7.440 GHz)  | Pass   |
| 3-DH3                | 2402 MHz        | -21.59      | -42.37 dBm (7.206 GHz)  | Pass   |
|                      | 2442 MHz        | -21.97      | -48.06 dBm (23.719 GHz) | Pass   |
|                      | 2480 MHz        | -22.29      | -49.32 dBm (25.492 GHz) | Pass   |
| BLE                  | 2402 MHz        | -21.12      | -45.65 dBm (7.206 GHz)  | Pass   |
|                      | 2442 MHz        | -21.84      | -46.36 dBm (7.326 GHz)  | Pass   |
|                      | 2480 MHz        | -22.55      | -47.96 dBm (4.959 GHz)  | Pass   |

**Note:** The stated limits are relative to each individual output per KDB 662911 Method.

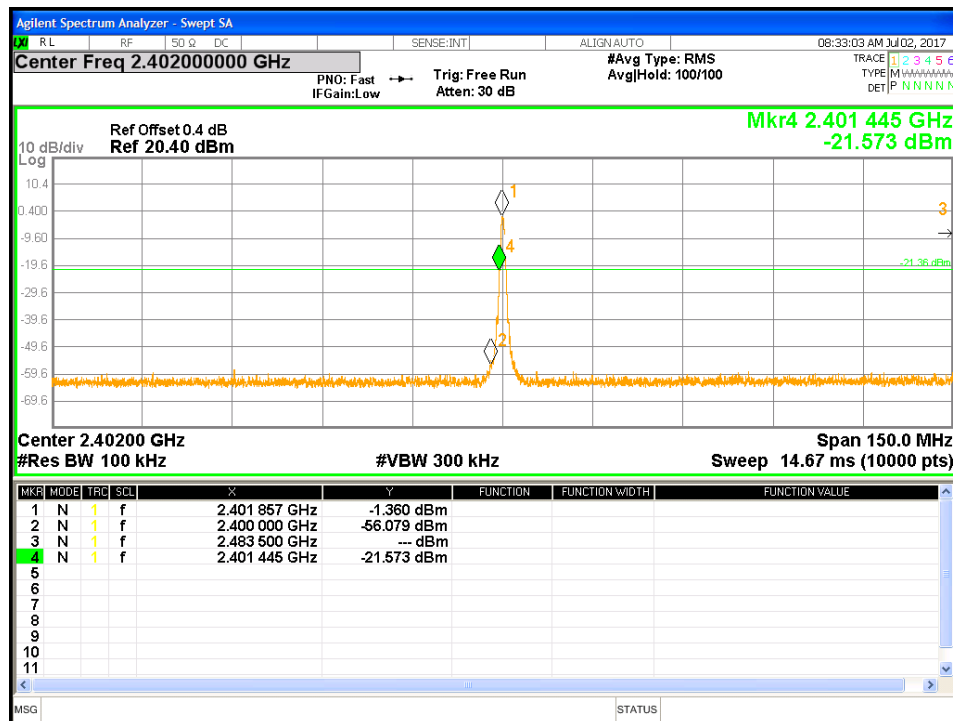


Figure 25: Band Edge Requirements at 2402 MHz – DH1

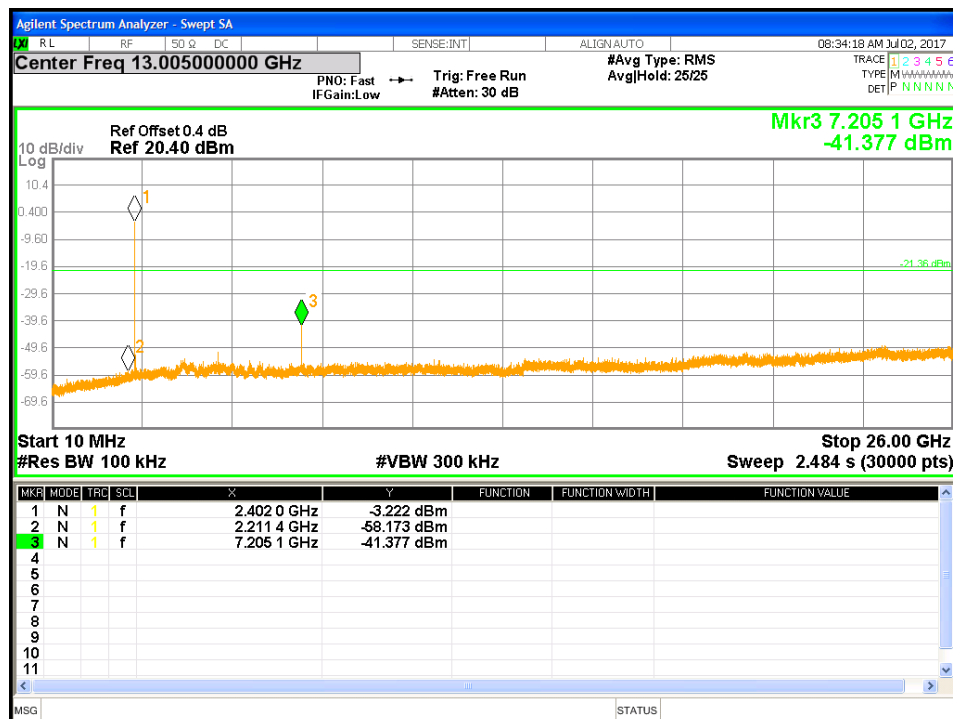


Figure 26: Out of Band Emission Requirements at 2402 MHz – DH1

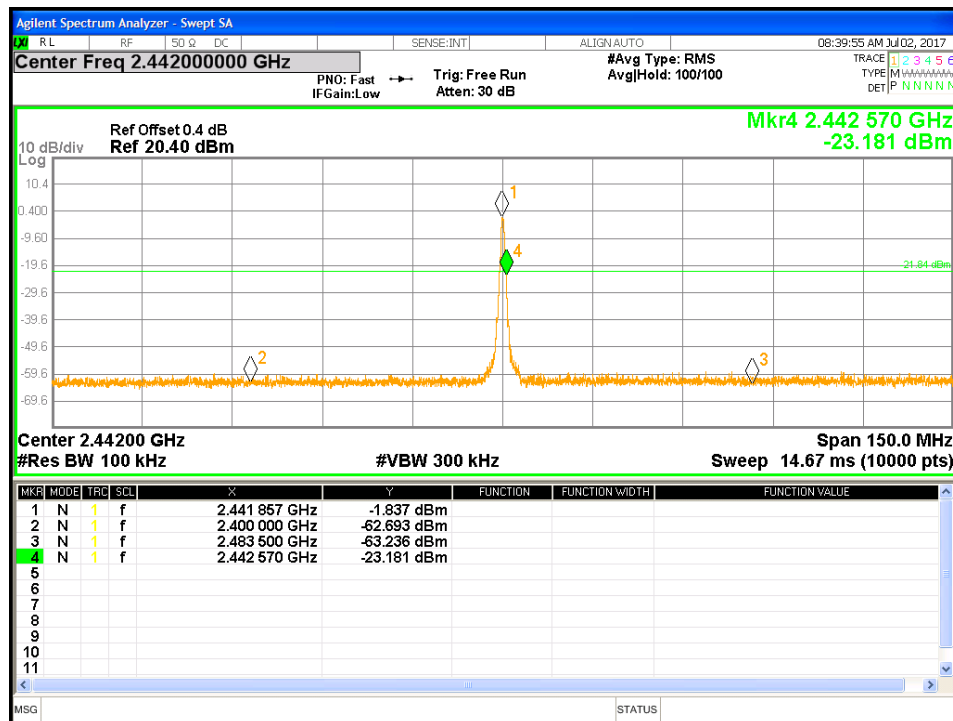


Figure 27: Band Edge Requirements at 2442 MHz – DH1

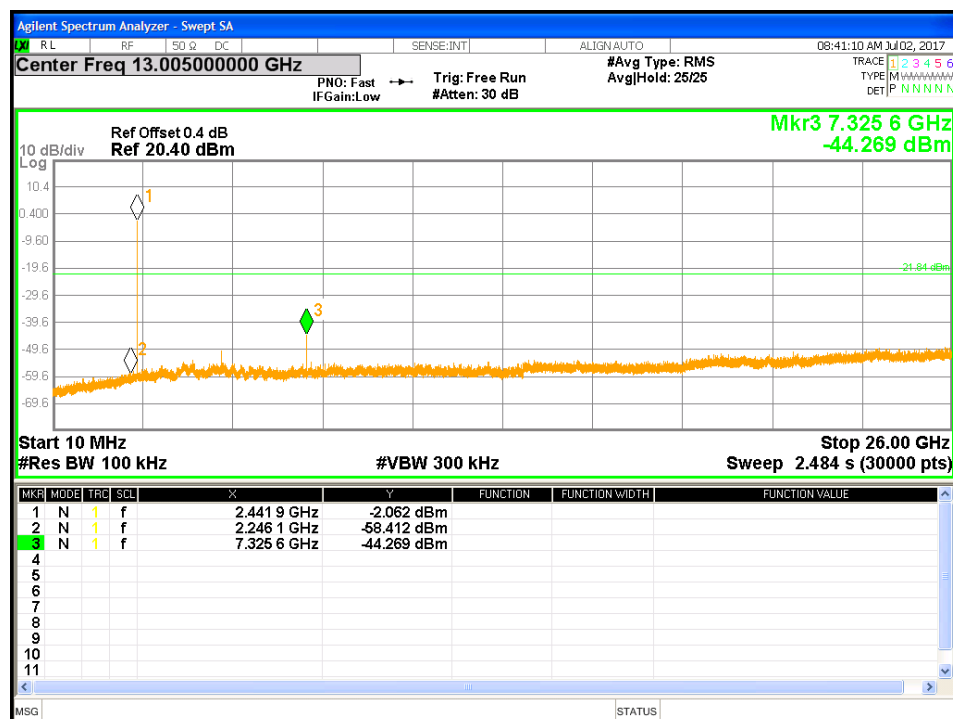


Figure 28: Out of Band Emission Requirements at 2442 MHz – DH1

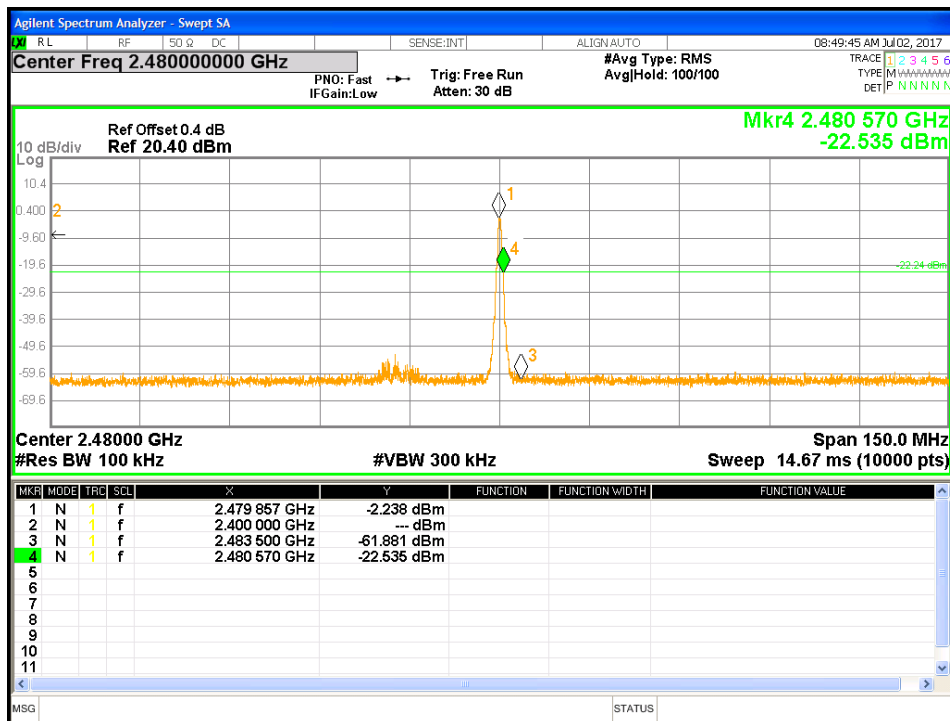


Figure 29: Band Edge Requirements at 2480 MHz – DH1

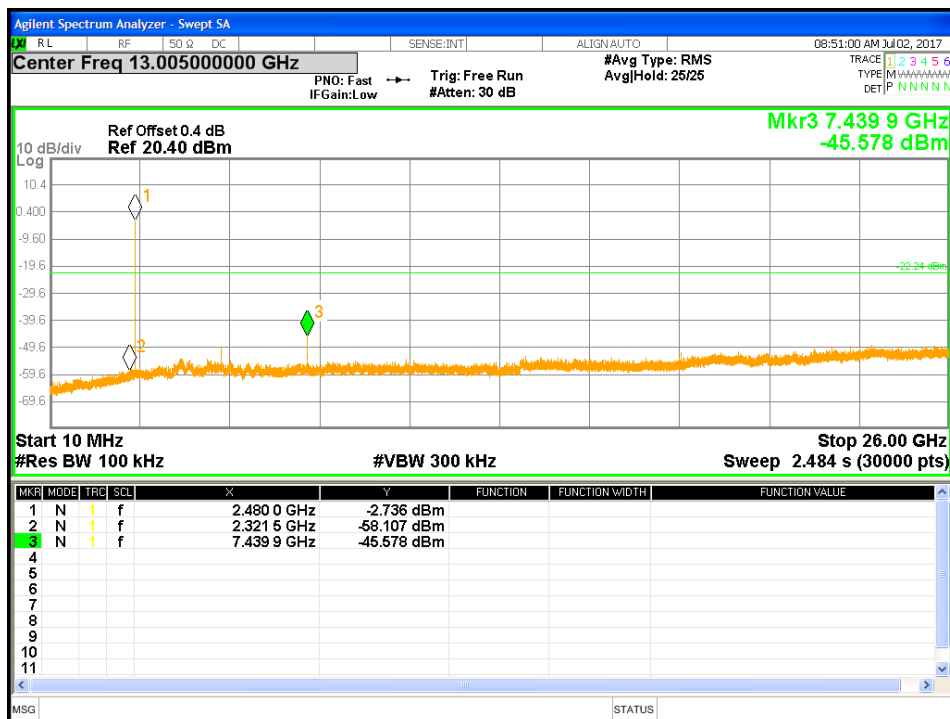


Figure 30: Out of Band Emission Requirements at 2480 MHz – DH1

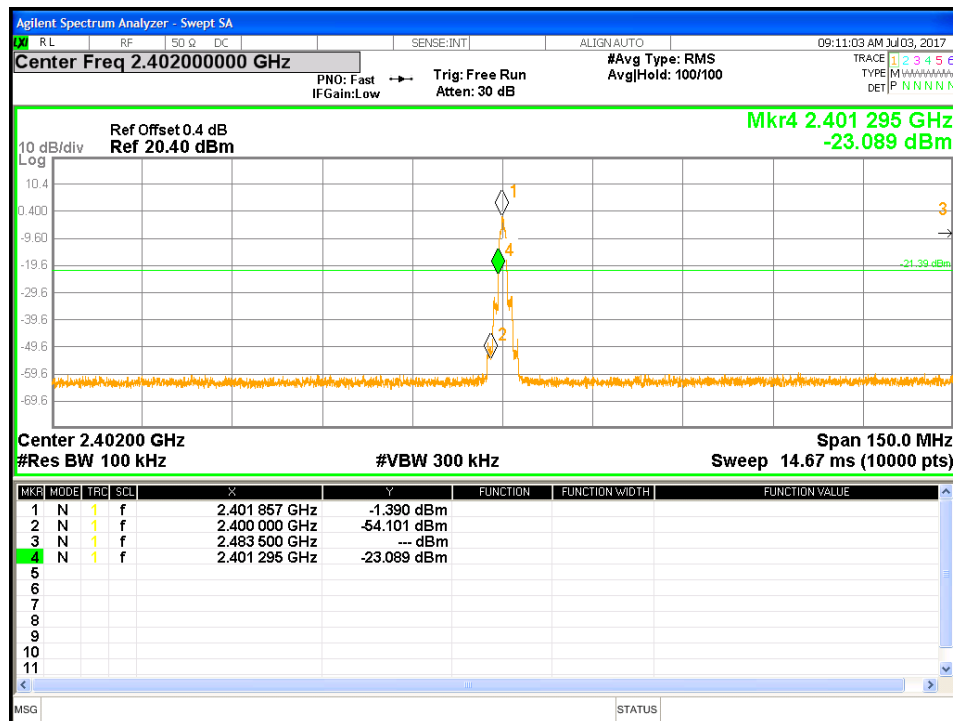


Figure 31: Band Edge Requirements at 2402 MHz – 2DH1

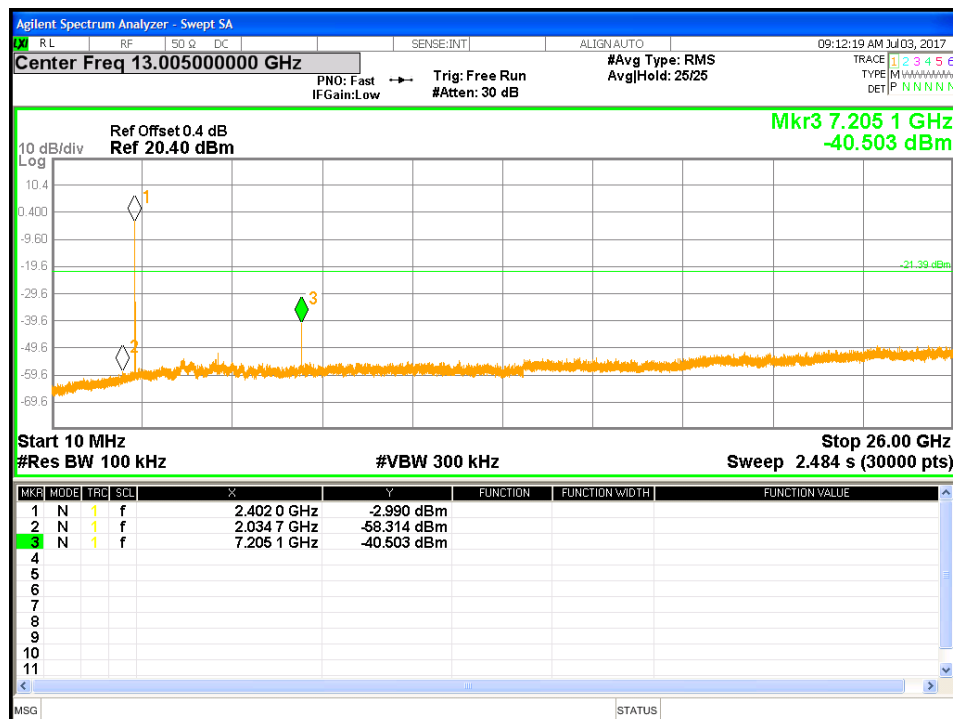


Figure 32: Out of Band Emission Requirements at 2402 MHz – 2DH1

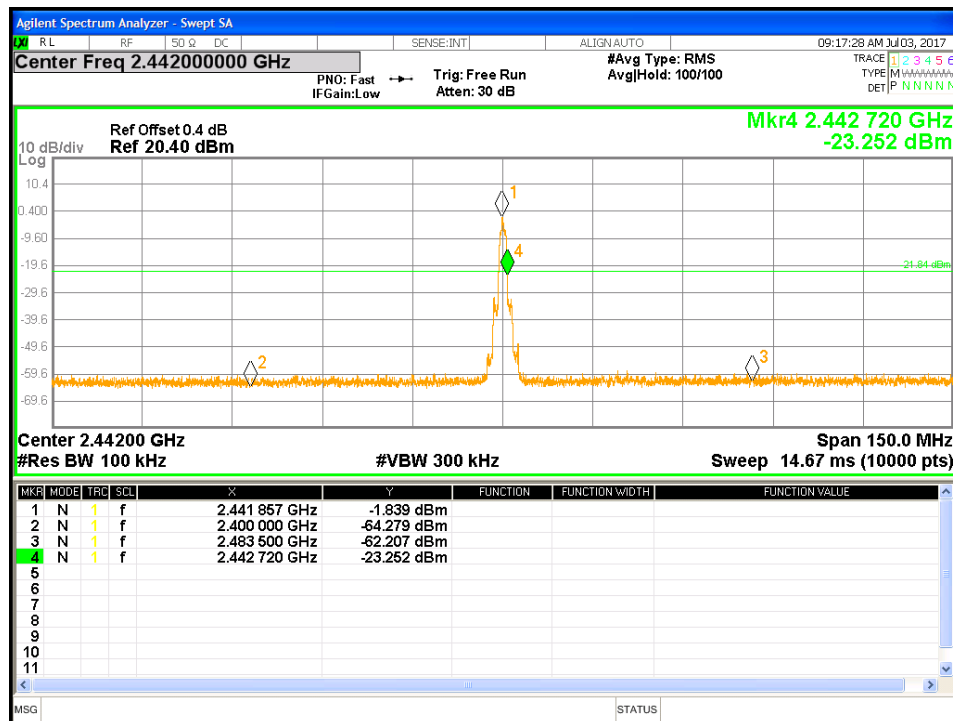


Figure 33: Band Edge Requirements at 2442 MHz – 2DH1

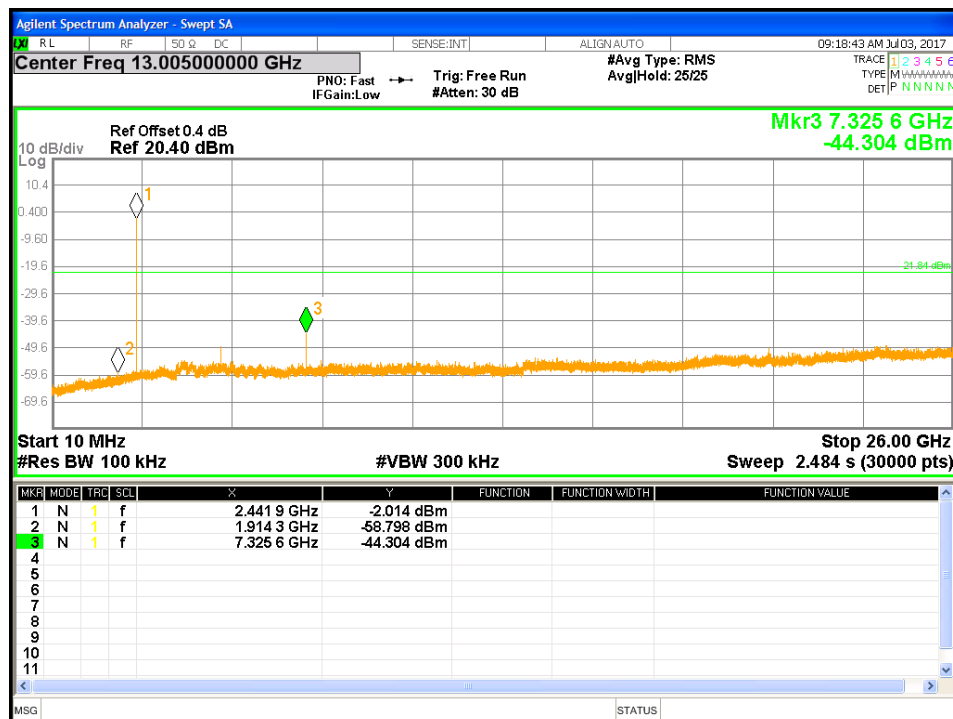


Figure 34: Out of Band Emission Requirements at 2442 MHz – 2DH1

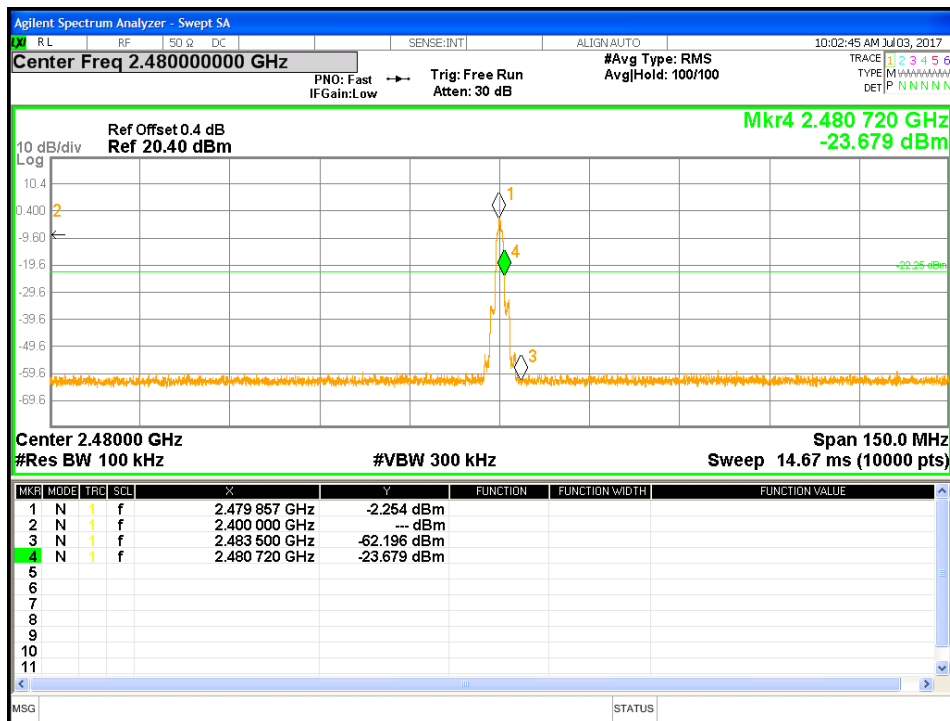


Figure 35: Band Edge Requirements at 2480 MHz – 2DH1

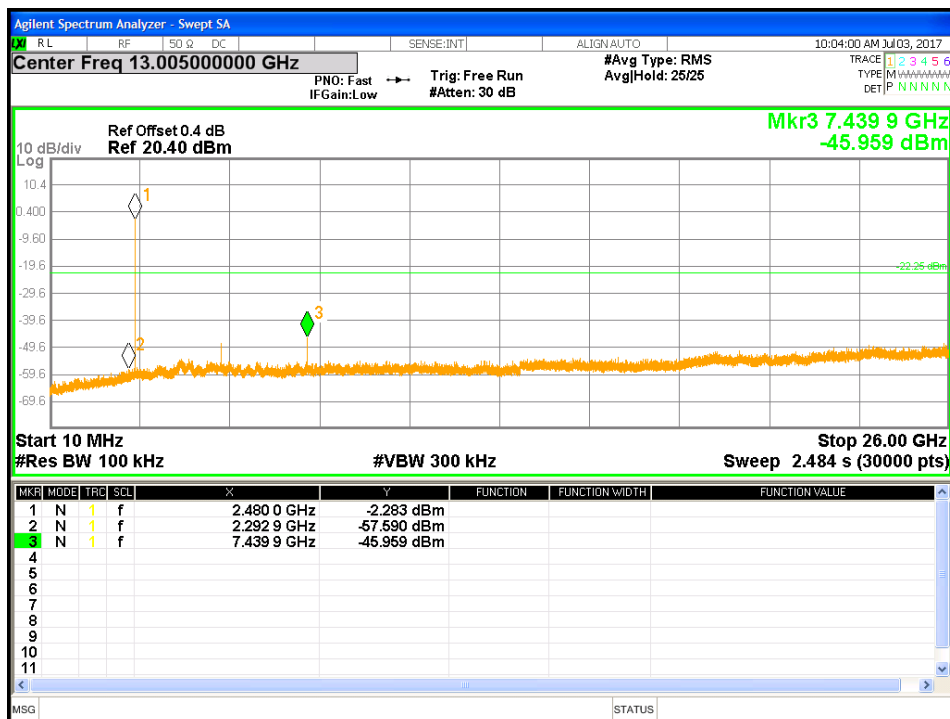


Figure 36: Out of Band Emission Requirements at 2480 MHz – 2DH1

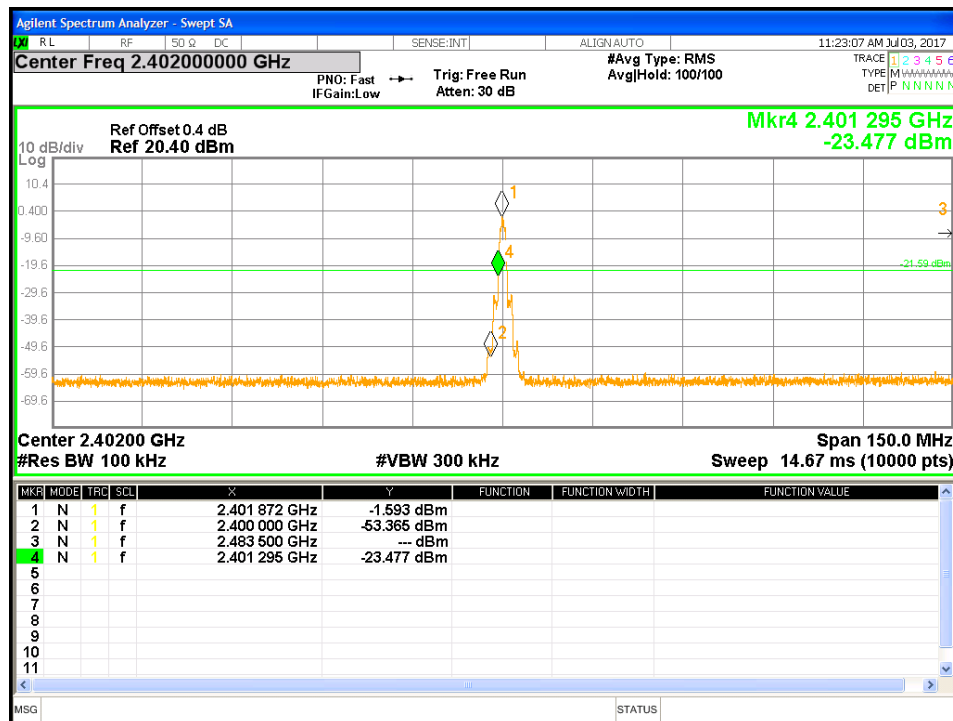


Figure 37: Band Edge Requirements at 2402 MHz – 3DH3

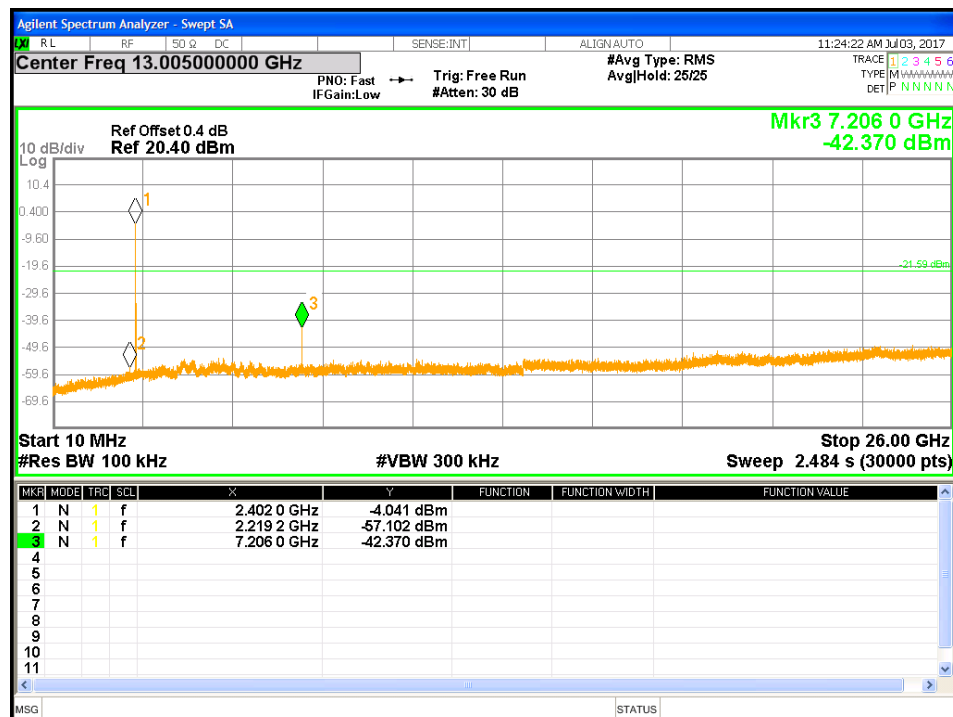


Figure 38: Out of Band Emission Requirements at 2402 MHz – 3DH3

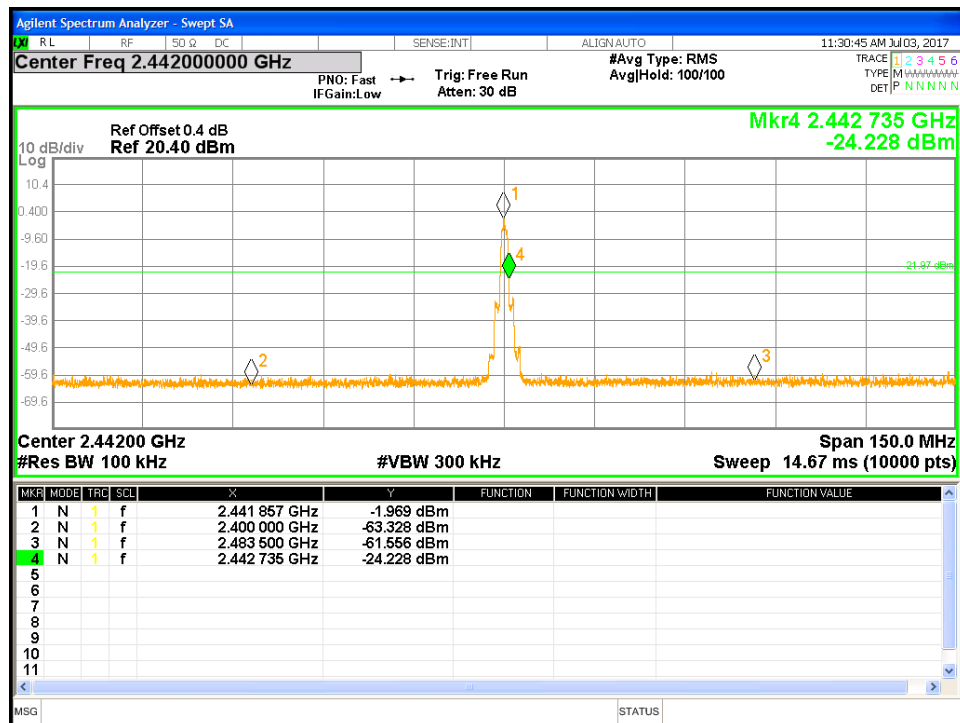


Figure 39: Band Edge Requirements at 2442 MHz – 3DH3

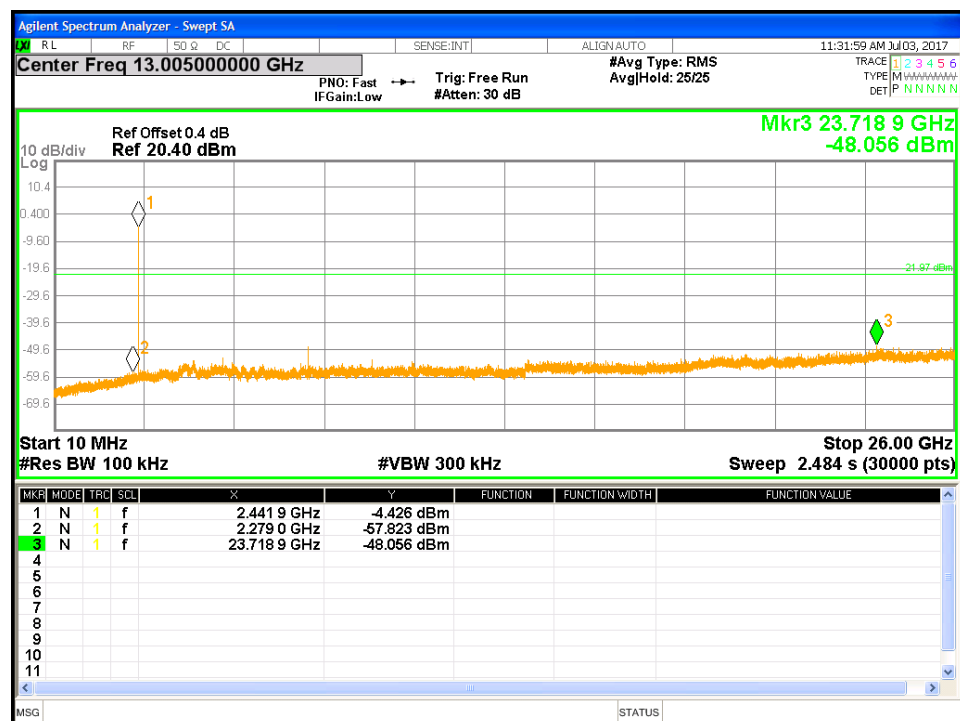


Figure 40: Out of Band Emission Requirements at 2442 MHz – 3DH3

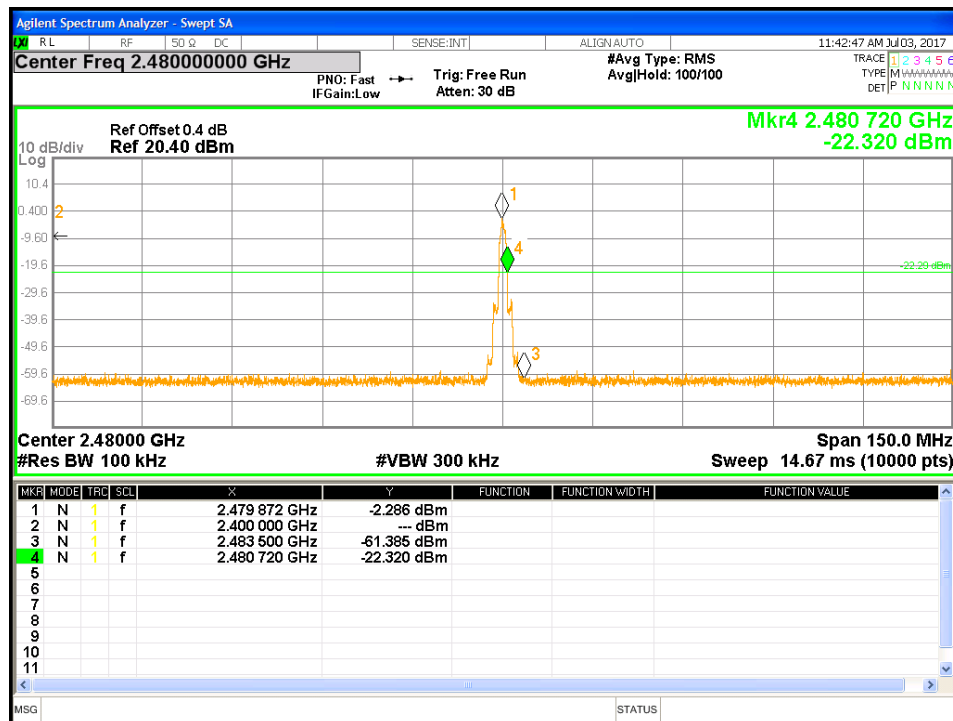


Figure 41: Band Edge Requirements at 2480 MHz – 3DH3

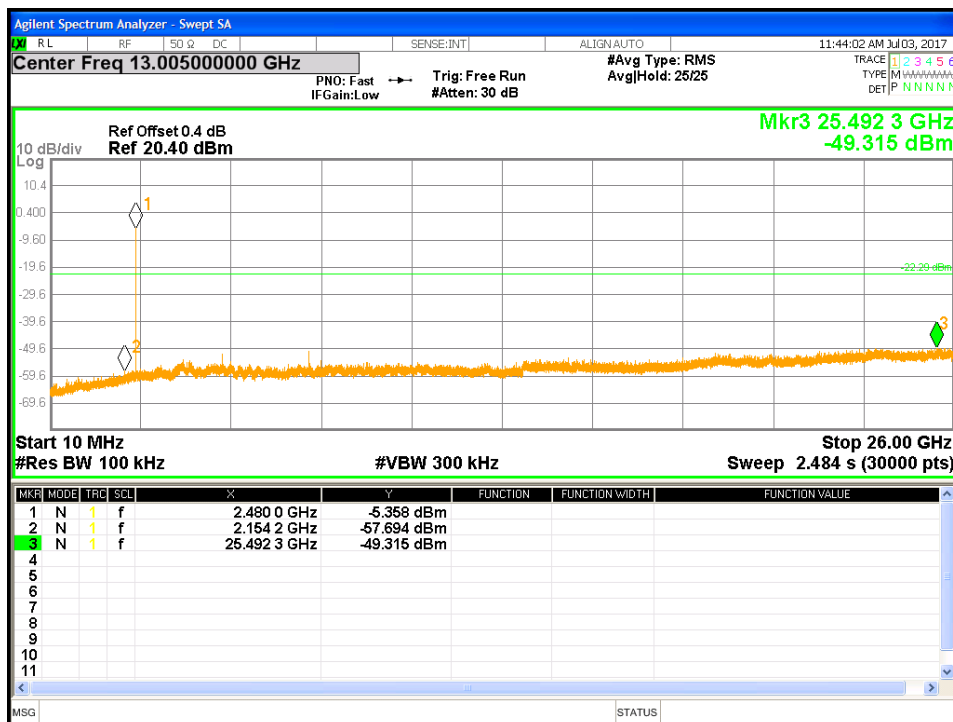


Figure 42: Out of Band Emission Requirements at 2480 MHz – 3DH3

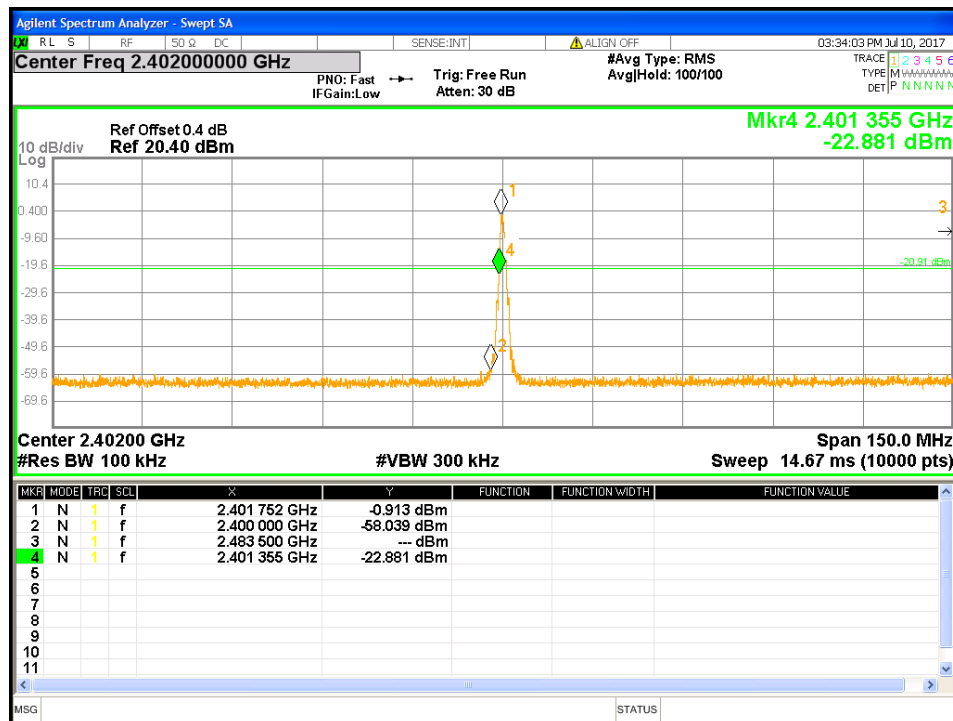


Figure 43: Band Edge Requirements at 2402 MHz – BLE

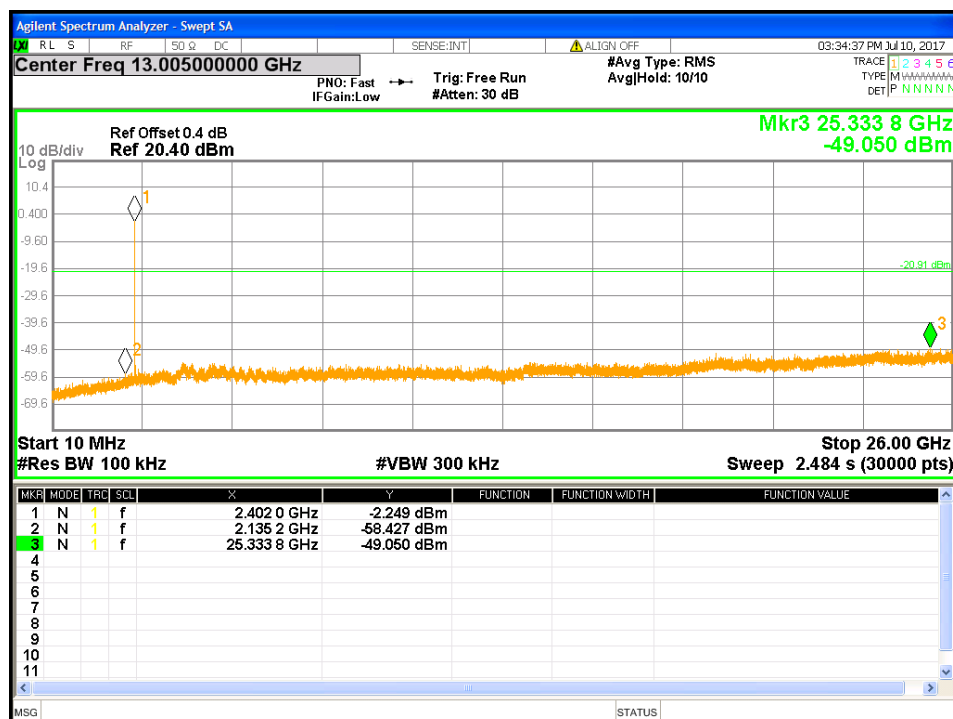


Figure 44: Out of Band Emission Requirements at 2402 MHz – BLE

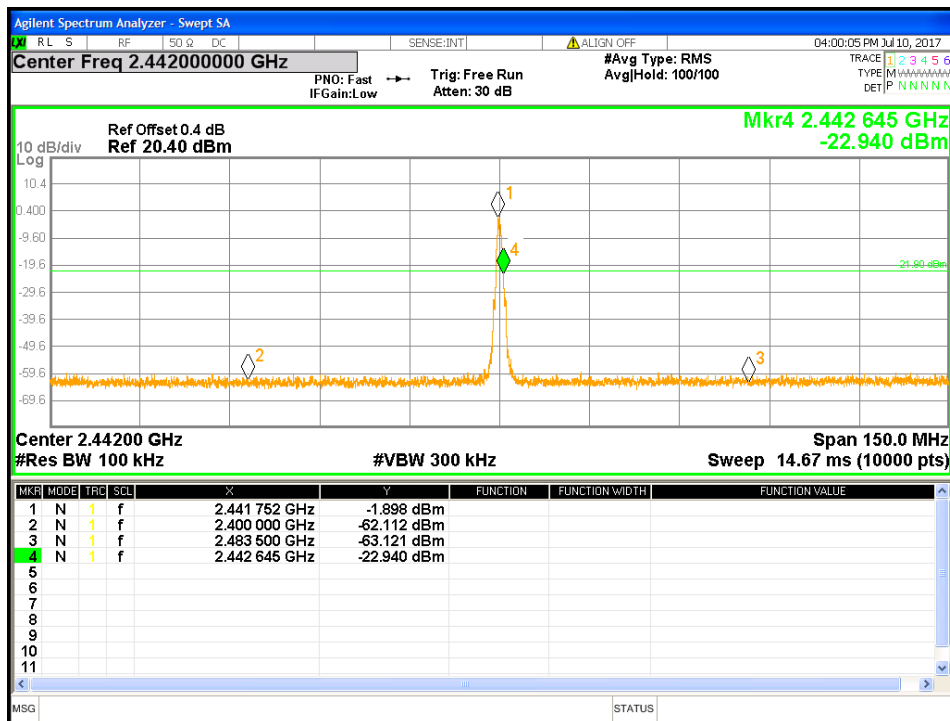


Figure 45: Band Edge Requirements at 2442 MHz – BLE

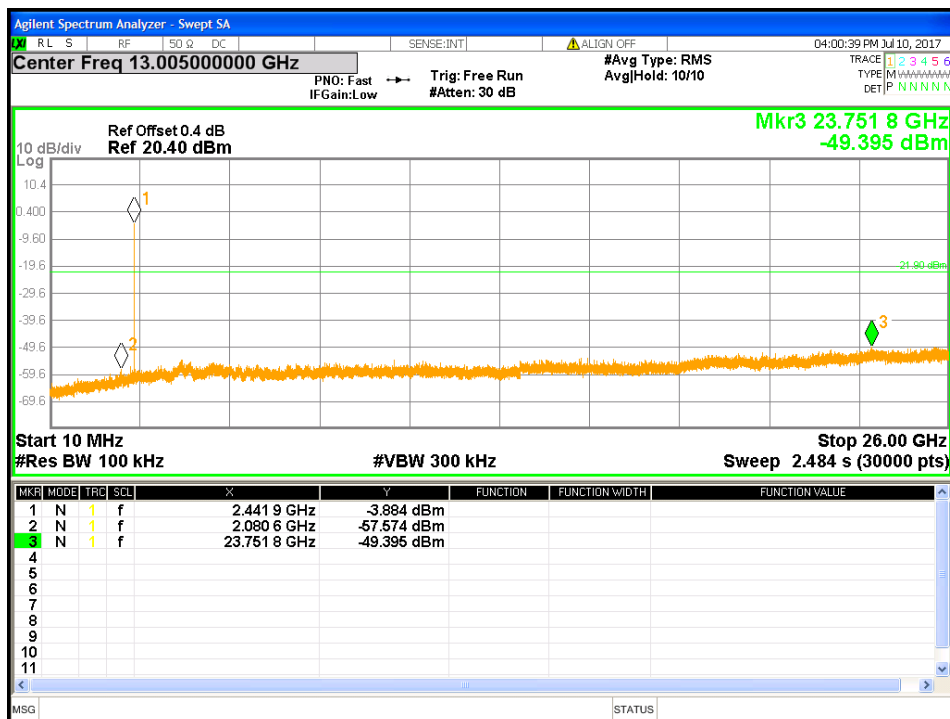


Figure 46: Out of Band Emission Requirements at 2442 MHz – BLE

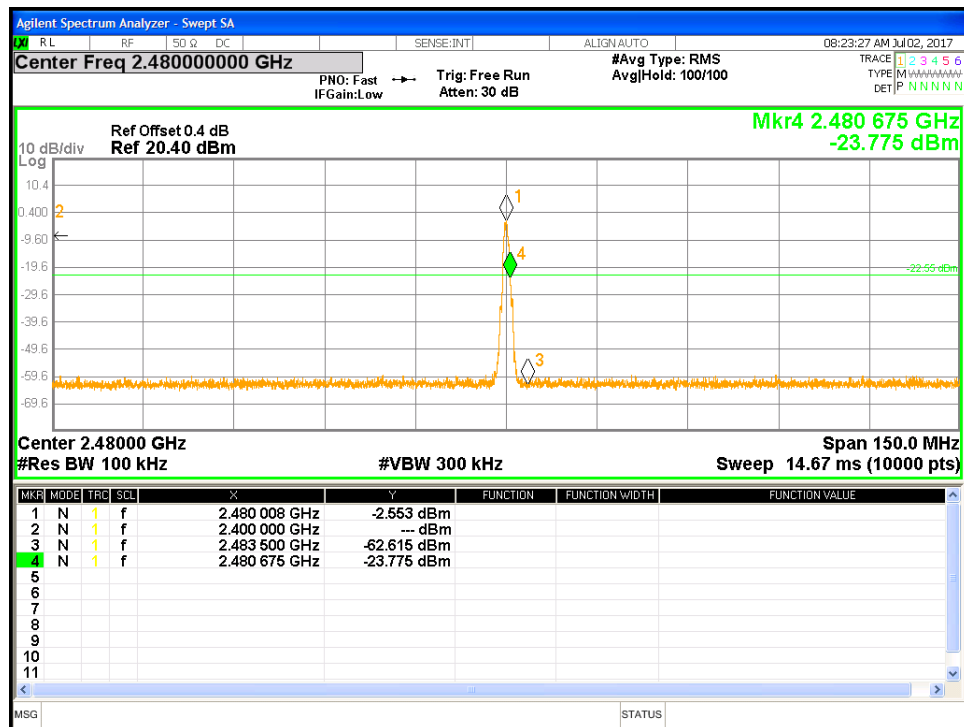


Figure 47: Band Edge Requirements at 2480 MHz – BLE

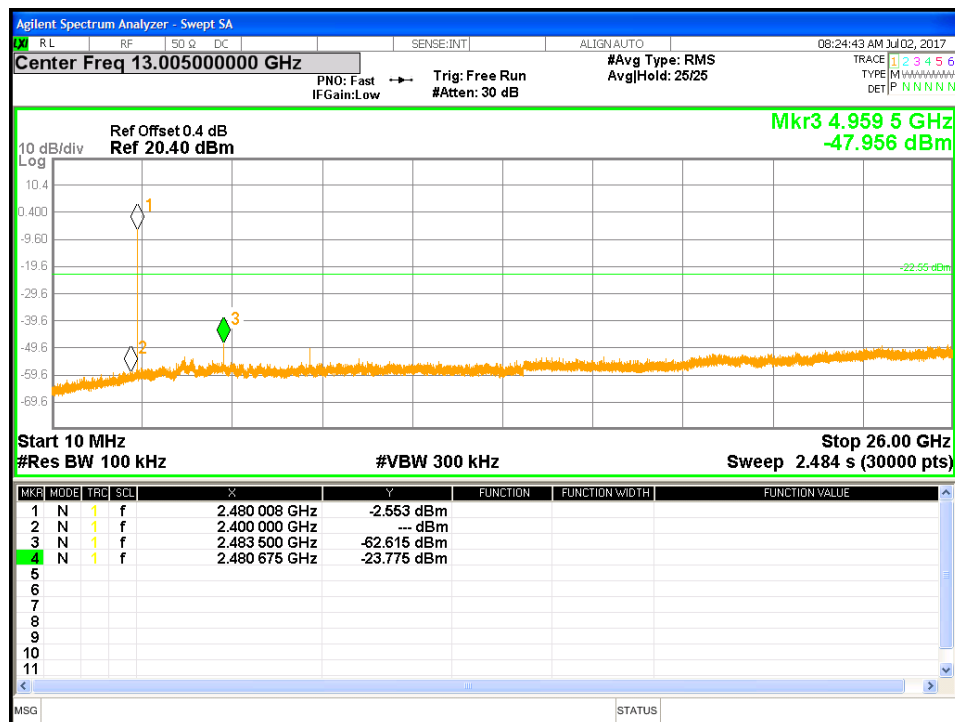


Figure 48: Out of Band Emission Requirements at 2480 MHz – BLE

## **4.5 Transmitter Spurious Emissions**

*Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmitting mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS-Gen Sect. 6.13*

### **4.5.1 Test Methodology**

#### **4.5.1.1 Preliminary Test**

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table, 80cm above the floor for 30 MHz to 1 GHz and 150cm above the floor for 1 GHz to 26 GHz. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.


#### **4.5.1.2 Final Test**

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, then the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table, 80cm above the floor for 30 MHz to 1 GHz and 150cm above the floor for 1 GHz to 26 GHz. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

The final scans performed on the worst axis, Y-Axis, for three operating channels: 2402 MHz, 2442 MHz and 2480 MHz at 2DH1.

#### 4.5.1.3 Test Setup

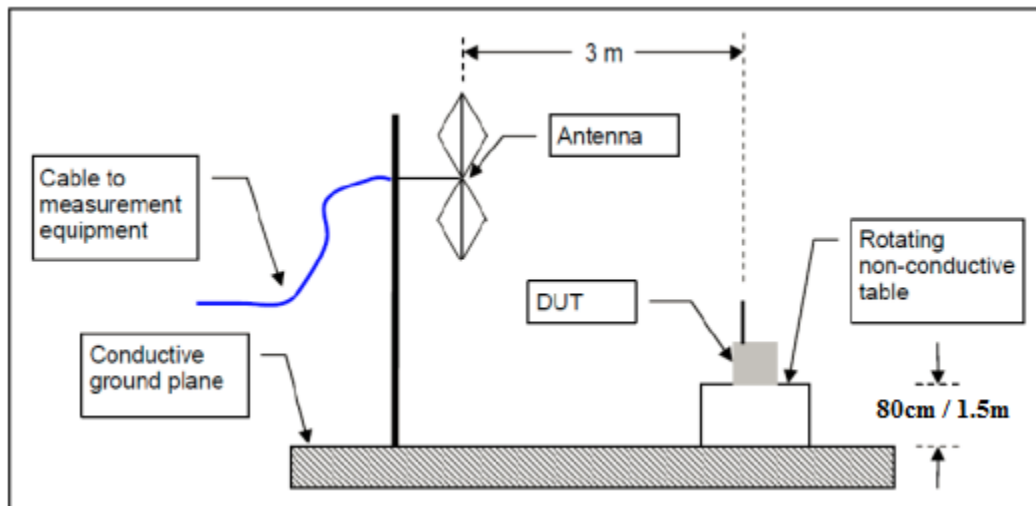

#### 4.5.1.4 Deviations

None.

#### 4.5.2 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2017 and RSS –Gen Sect.6.13: 2014.

| Frequency (MHz)  | Field strength (microvolts/meter) | Measurement distance (meters) |
|------------------|-----------------------------------|-------------------------------|
| 0.009-0.490..... | 2400/F (kHz)                      | 300                           |
| 0.490-1.705..... | 24000/F (kHz)                     | 30                            |
| 1.705-30.0.....  | 30                                | 30                            |
| 30-88.....       | 100 **                            | 3                             |
| 88-216.....      | 150 **                            | 3                             |
| 216-960.....     | 200 **                            | 3                             |
| Above 960.....   | 500                               | 3                             |

All harmonics and spurious emission which are outside of the restricted band shall be 20 dB below the in-band emission.

#### 4.5.3 Test Results

The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and Test Plan.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 7: Transmit Spurious Emission at Restricted Band Edge Requirements**

|                                                   |                 |             |                                   |        |                           |                 |              |                                                |
|---------------------------------------------------|-----------------|-------------|-----------------------------------|--------|---------------------------|-----------------|--------------|------------------------------------------------|
| Test Conditions: Radiated Measurement at 3 meters |                 |             |                                   |        | Date: August 22, 2017     |                 |              |                                                |
| Antenna Type: Integrated Antenna                  |                 |             |                                   |        | Power Setting: Fixed.     |                 |              |                                                |
| Max. Antenna Gain: +2.8 dBi                       |                 |             |                                   |        | Signal State: Modulated   |                 |              |                                                |
| Duty Cycle: See Section 3.5                       |                 |             |                                   |        | Data Rate: see below      |                 |              |                                                |
| Ambient Temp.: 23° C                              |                 |             |                                   |        | Relative Humidity: 34 %RH |                 |              |                                                |
| Band Edge Results                                 |                 |             |                                   |        |                           |                 |              |                                                |
| Freq.<br>MHz                                      | Level<br>dBuV/m | Pol.<br>V/H | 15.209/15.247<br>Limit     Margin |        | Detector<br>Pk/QP/Avg     | Azimuth<br>Deg. | Height<br>cm | Comments                                       |
| 2390.0                                            | 55.25           | H           | 74.00                             | -18.75 | Pk                        | 131             | 278          | 700P RX - 2402 MHz - BT                        |
| 2390.0                                            | 45.28           | H           | 54.00                             | -8.72  | Ave                       | 131             | 278          | 700P RX - 2402 MHz - BT                        |
| 2390.0                                            | 54.74           | H           | 74.00                             | -19.26 | Pk                        | 131             | 278          | 700P RX - 2402 MHz - BT-2MHz Span              |
| 2390.0                                            | 45.28           | H           | 54.00                             | -8.72  | Ave                       | 131             | 278          | 700P RX - 2402 MHz - BT-2MHz Span              |
| 2390.0                                            | 56.20           | V           | 74.00                             | -17.80 | Pk                        | 0               | 278          | 700P RX - 2402 MHz - BT                        |
| 2390.0                                            | 44.98           | V           | 54.00                             | -9.02  | Ave                       | 0               | 278          | 700P RX - 2402 MHz - BT                        |
| 2390.0                                            | 55.03           | V           | 74.00                             | -18.97 | Pk                        | 0               | 278          | 700P RX - 2402 MHz - BT-2MHz Span              |
| 2390.0                                            | 45.28           | V           | 54.00                             | -8.72  | Ave                       | 0               | 278          | 700P RX - 2402 MHz - BT-2MHz Span              |
| 2483.5                                            | 56.64           | H           | 74.00                             | -17.36 | Pk                        | 235             | 242          | 700P RX - 2480 MHz - BT                        |
| 2483.5                                            | 46.14           | H           | 54.00                             | -7.86  | Ave                       | 235             | 242          | 700P RX - 2480 MHz - BT                        |
| 2483.5                                            | 55.85           | H           | 74.00                             | -18.15 | Pk                        | 235             | 242          | 700P RX - 2480 MHz - BT-2MHz Span              |
| 2483.5                                            | 45.58           | H           | 54.00                             | -8.42  | Ave                       | 235             | 242          | 700P RX - 2480 MHz - BT-2MHz Span              |
| 2483.5                                            | 56.07           | V           | 74.00                             | -17.93 | Pk                        | 4               | 261          | 700P RX - 2480 MHz - BT                        |
| 2483.5                                            | 45.86           | V           | 54.00                             | -8.14  | Ave                       | 4               | 261          | 700P RX - 2480 MHz - BT                        |
| 2483.5                                            | 55.98           | V           | 74.00                             | -18.02 | Pk                        | 4               | 261          | 700P RX - 2480 MHz - BT-2MHz Span              |
| 2483.5                                            | 45.86           | V           | 54.00                             | -8.14  | Ave                       | 4               | 261          | 700P RX - 2480 MHz - BT-2MHz Span              |
| 2483.5                                            | 55.54           | V           | 74.00                             | -18.46 | Pk                        | 4               | 261          | 700P RX -BT - Hopping                          |
| 2483.5                                            | 45.28           | V           | 54.00                             | -8.72  | Ave                       | 4               | 261          | 700P RX -BT - Hopping                          |
| 2390.0                                            | 54.70           | V           | 74.00                             | -19.30 | Pk                        | 4               | 261          | 700P RX -BT - Hopping - 2MHz Span at 2390MHz   |
| 2390.0                                            | 45.28           | V           | 54.00                             | -8.72  | Ave                       | 4               | 261          | 700P RX -BT - Hopping - 2MHz Span at 2390MHz   |
| 2483.5                                            | 55.88           | V           | 74.00                             | -18.12 | Pk                        | 4               | 261          | 700P RX -BT - Hopping - 2MHz Span at 2483.5MHz |

|        |       |   |       |        |     |     |     |                                                |
|--------|-------|---|-------|--------|-----|-----|-----|------------------------------------------------|
| 2483.5 | 45.58 | V | 54.00 | -8.42  | Ave | 4   | 261 | 700P RX -BT - Hopping - 2MHz Span at 2483.5MHz |
| 2390.0 | 56.21 | H | 74.00 | -17.79 | Pk  | 236 | 242 | 700P RX -BT - Hopping                          |
| 2390.0 | 45.86 | H | 54.00 | -8.14  | Ave | 236 | 242 | 700P RX -BT - Hopping                          |
| 2390.0 | 55.22 | H | 74.00 | -18.78 | Pk  | 236 | 242 | 700P RX -BT - Hopping - 2MHz Span at 2390MHz   |
| 2390.0 | 45.58 | H | 54.00 | -8.42  | Ave | 236 | 242 | 700P RX -BT - Hopping - 2MHz Span at 2390MHz   |
| 2483.5 | 55.35 | H | 74.00 | -18.65 | Pk  | 236 | 242 | 700P RX -BT - Hopping - 2MHz Span at 2483.5MHz |
| 2483.5 | 45.28 | H | 54.00 | -8.72  | Ave | 236 | 242 | 700P RX -BT - Hopping - 2MHz Span at 2483.5MHz |
| 2390.0 | 55.43 | H | 74.00 | -18.57 | Pk  | 133 | 220 | 700P RX -2402MH - BLE                          |
| 2390.0 | 45.28 | H | 54.00 | -8.72  | Ave | 133 | 220 | 700P RX -2402MH - BLE                          |
| 2390.0 | 55.62 | H | 74.00 | -18.38 | Pk  | 133 | 220 | 700P RX -2402MH - BLE-2MHz Span                |
| 2390.0 | 45.28 | H | 54.00 | -8.72  | Ave | 133 | 220 | 700P RX -2402MH - BLE-2MHz Span                |
| 2390.0 | 55.71 | V | 74.00 | -18.29 | Pk  | 343 | 282 | 700P RX -2402MH - BLE                          |
| 2390.0 | 44.98 | V | 54.00 | -9.02  | Ave | 343 | 282 | 700P RX -2402MH - BLE                          |
| 2390.0 | 54.83 | V | 74.00 | -19.17 | Pk  | 343 | 282 | 700P RX -2402MH - BLE-2MHz Span                |
| 2390.0 | 45.58 | V | 54.00 | -8.42  | Ave | 343 | 282 | 700P RX -2402MH - BLE-2MHz Span                |
| 2483.5 | 56.16 | H | 74.00 | -17.84 | Pk  | 119 | 192 | 700P RX -2480MH - BLE                          |
| 2483.5 | 45.28 | H | 54.00 | -8.72  | Ave | 119 | 192 | 700P RX -2480MH - BLE                          |
| 2483.5 | 55.79 | H | 74.00 | -18.21 | Pk  | 119 | 192 | 700P RX -2480MH - BLE- 2MHz Span               |
| 2483.5 | 45.58 | H | 54.00 | -8.42  | Ave | 119 | 192 | 700P RX -2480MH - BLE- 2MHz Span               |
| 2483.5 | 54.38 | V | 74.00 | -19.62 | Pk  | 159 | 173 | 700P RX -2480MH - BLE                          |
| 2483.5 | 44.98 | V | 54.00 | -9.02  | Ave | 159 | 173 | 700P RX -2480MH - BLE                          |
| 2483.5 | 55.00 | V | 74.00 | -19.00 | Pk  | 159 | 173 | 700P RX -2480MH - BLE- 2MHz Span               |
| 2483.5 | 45.86 | V | 54.00 | -8.14  | Ave | 159 | 173 | 700P RX -2480MH - BLE- 2MHz Span               |
| 2390.0 | 55.25 | H | 74.00 | -18.75 | Pk  | 131 | 278 | 700P RX - 2402 MHz - BT                        |
| 2390.0 | 45.28 | H | 54.00 | -8.72  | Ave | 131 | 278 | 700P RX - 2402 MHz - BT                        |

Note: 1. FHSS, worst Case 2DH1 and BLE are evaluated.

2. All the band-edge measurements met the restricted band requirements of CFR47 15.205.

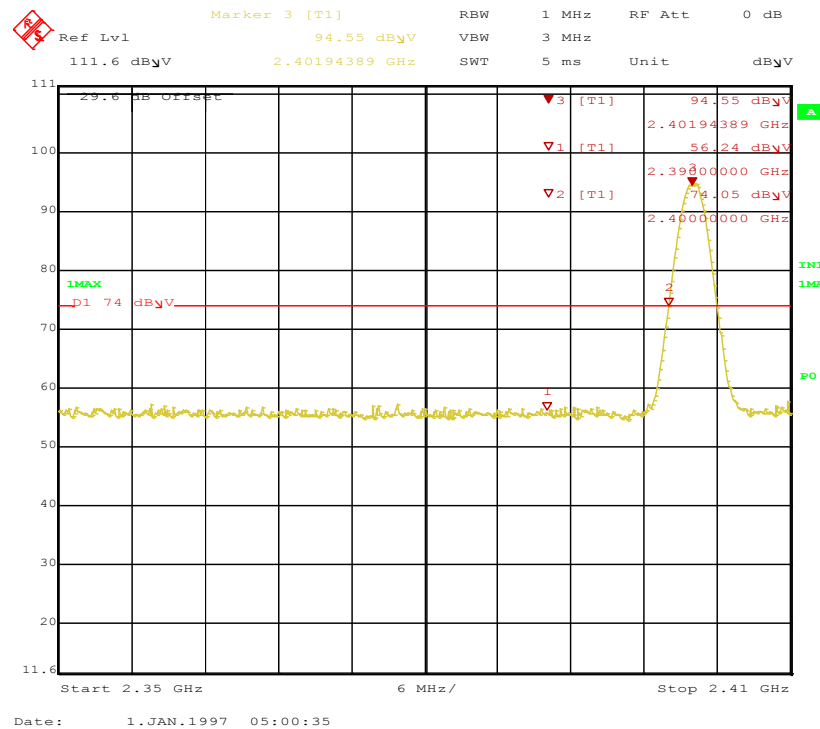


Figure 49: Radiated Emission at the Edge at 2DH1 - 2402 MHz – Horizontal (Peak)

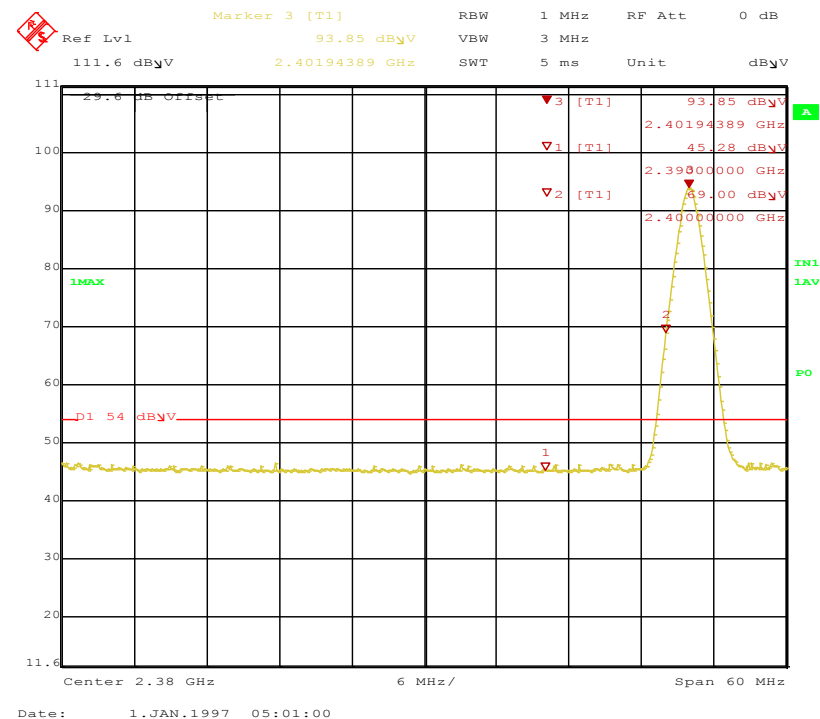


Figure 50: Radiated Emission at the Edge at 2DH1 - 2402 MHz – Horizontal (Avg)

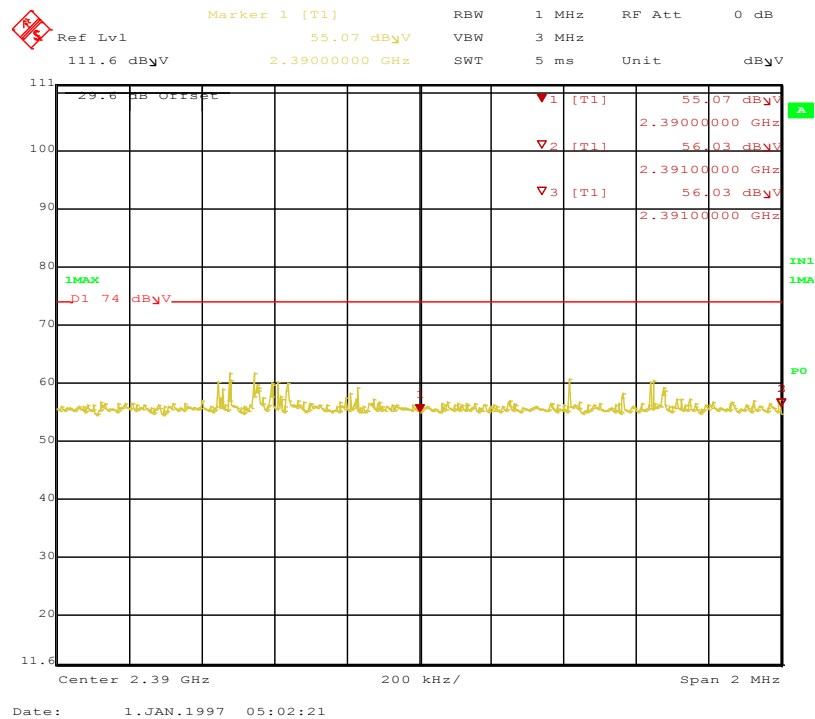


Figure 51: Radiated Emission at the Edge at 2DH1 - 2402 MHz – 2 MHz Span – Horz. (Pk)

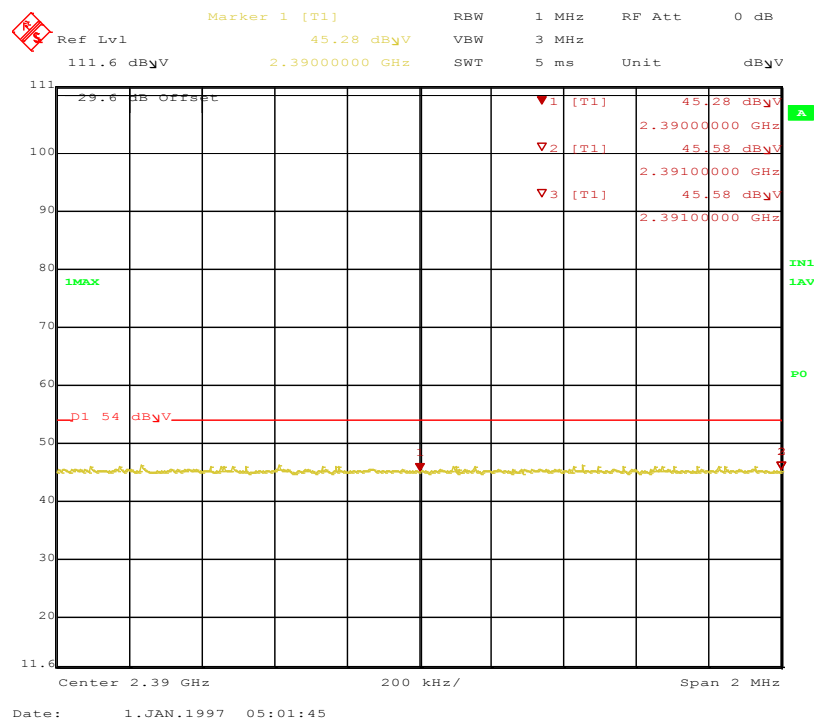


Figure 52: Radiated Emission at the Edge at 2DH1 - 2402 MHz – 2 MHz Span – Horz. (avg)

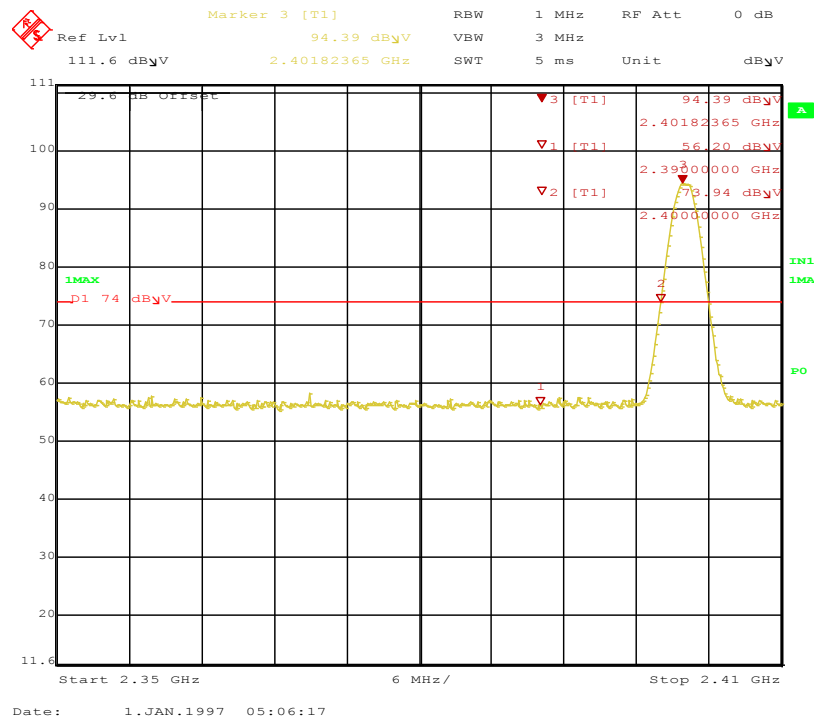


Figure 53: Radiated Emission at the Edge at 2DH1 - 2402 MHz – Vertical (Pk)

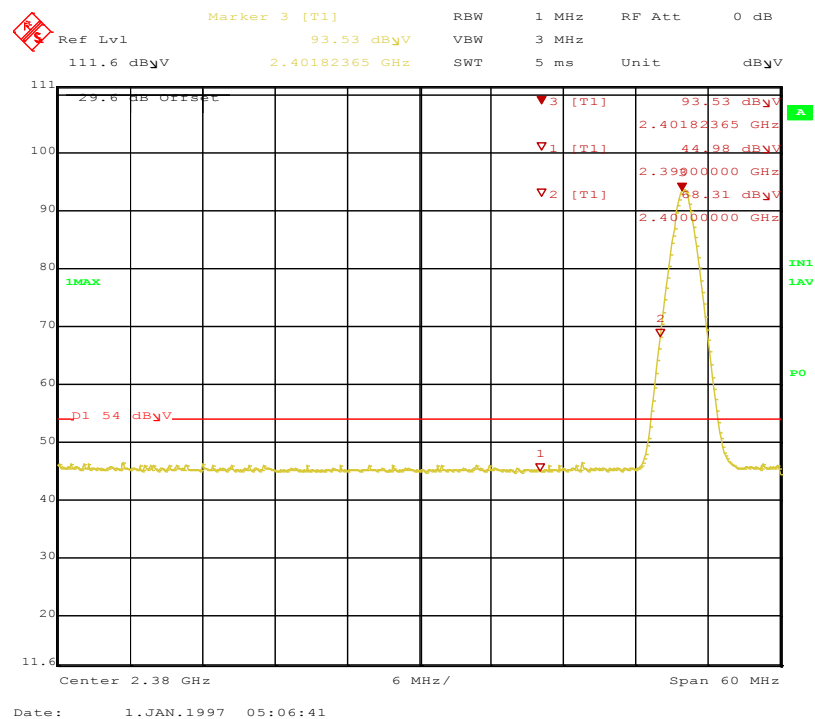


Figure 54: Radiated Emission at the Edge 2DH1 - 2402 MHz – Vertical (Avg)

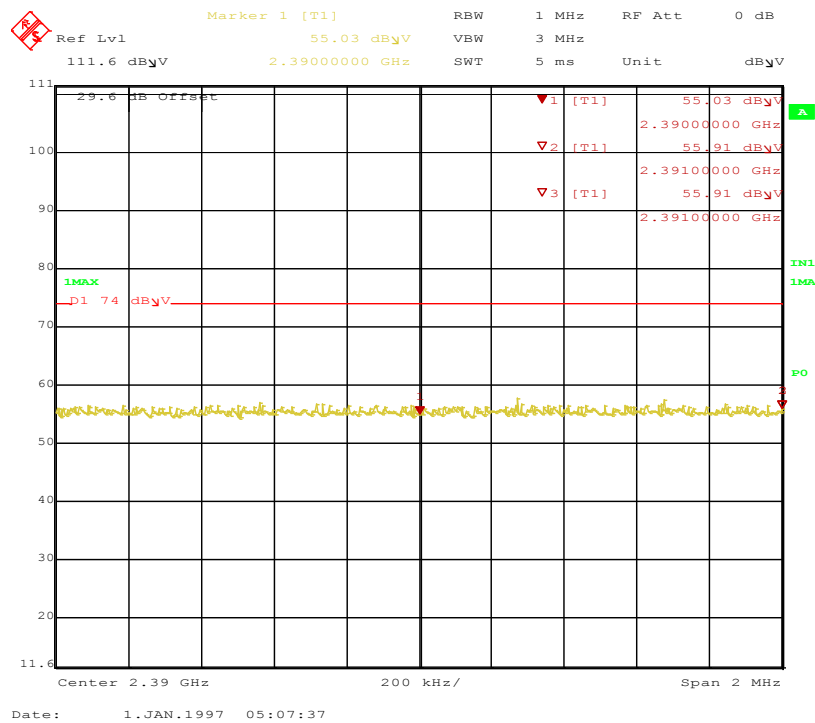


Figure 55: Radiated Emission at the Edge at 2DH1 - 2402 MHz – 2 MHz Span – Vertical (Pk)

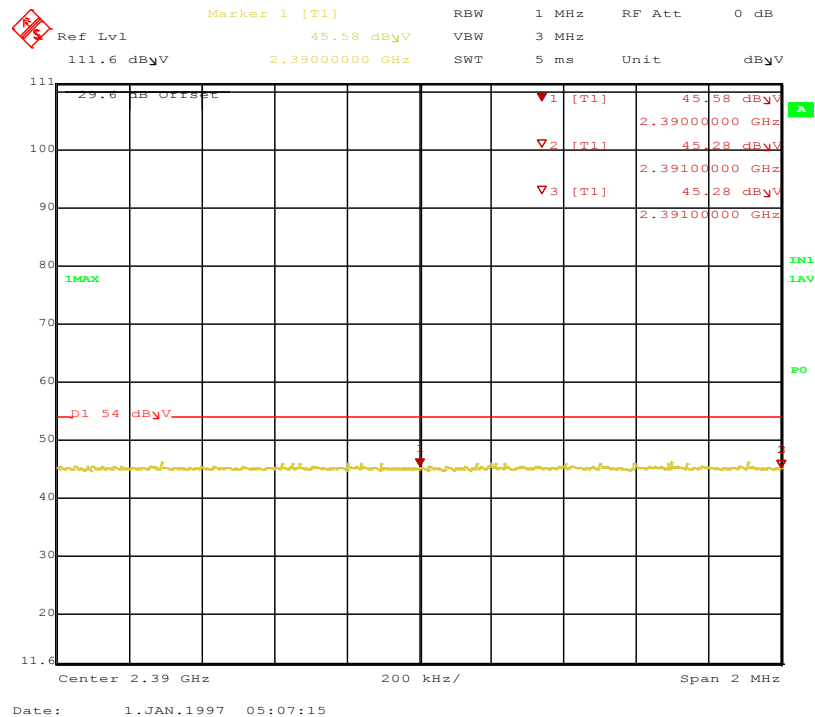


Figure 56: Radiated Emission at the Edge at 2DH1 - 2402 MHz – 2 MHz Span – Vertical (Avg)

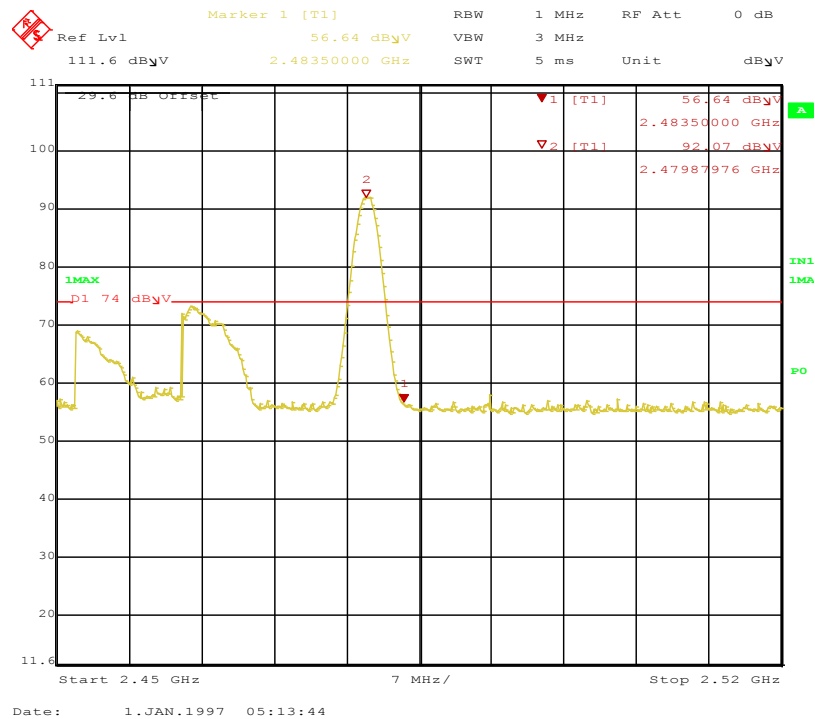


Figure 57: Radiated Emission at the Edge at 2DH1 - 2480 MHz – Horizontal (Peak)

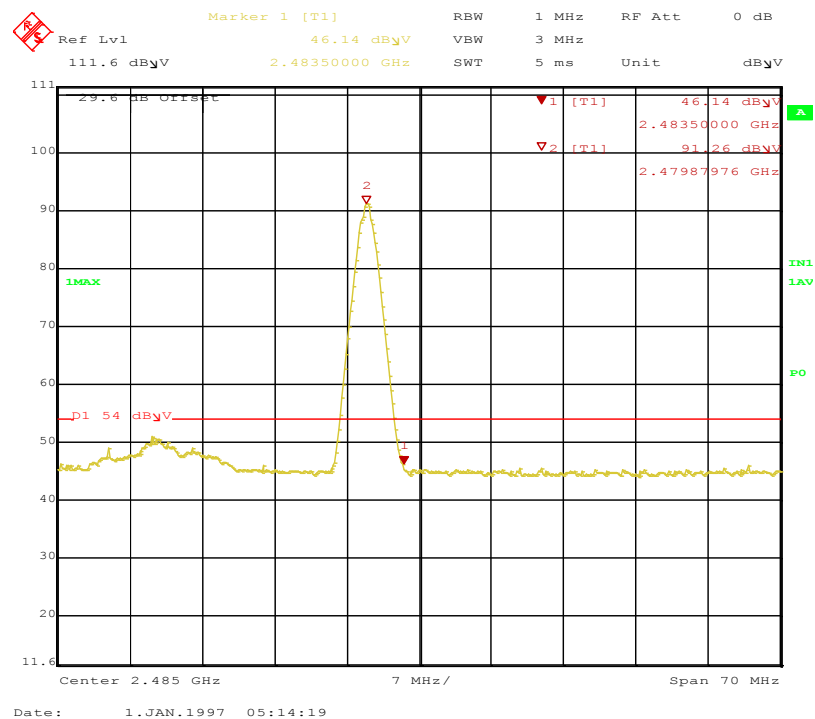


Figure 58: Radiated Emission at the Edge at 2DH1 - 2480 MHz – Horizontal (Avg)

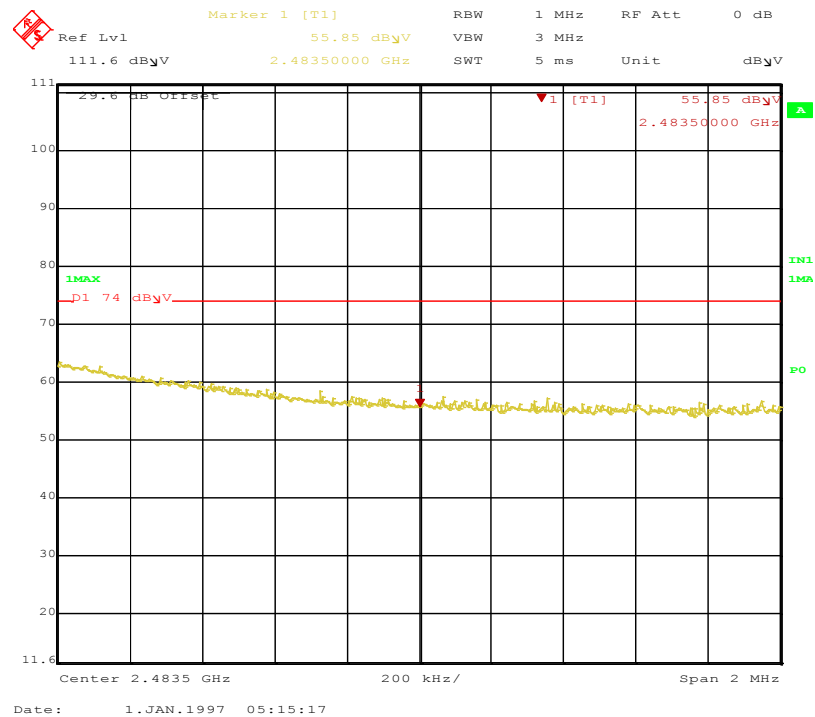


Figure 59: Radiated Emission at the Edge at 2DH1 - 2480 MHz – 2 MHz Span – Horz. (Pk)

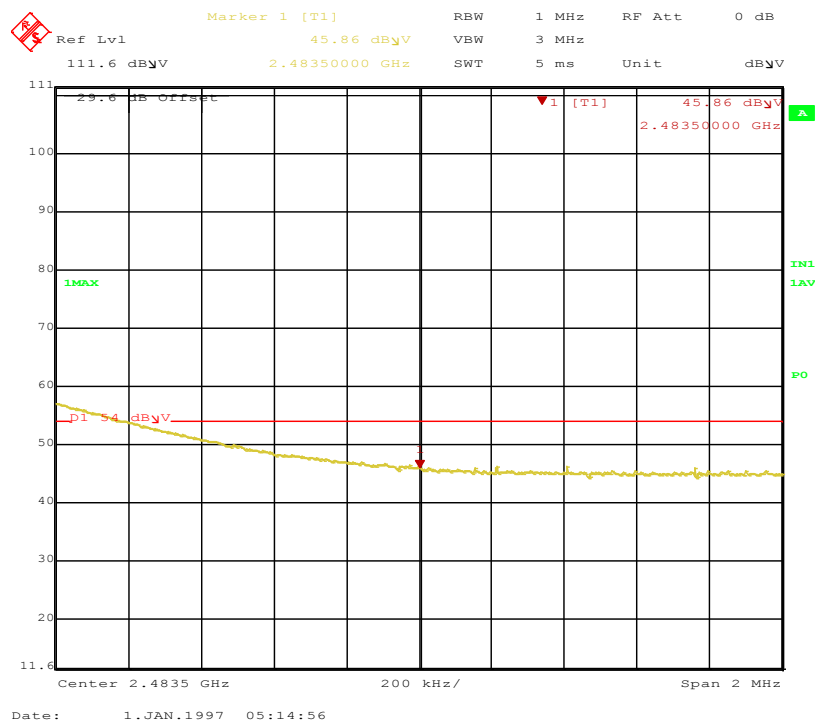


Figure 60: Radiated Emission at the Edge at 2DH1 - 2480 MHz – 2 MHz Span – Horz. (avg)

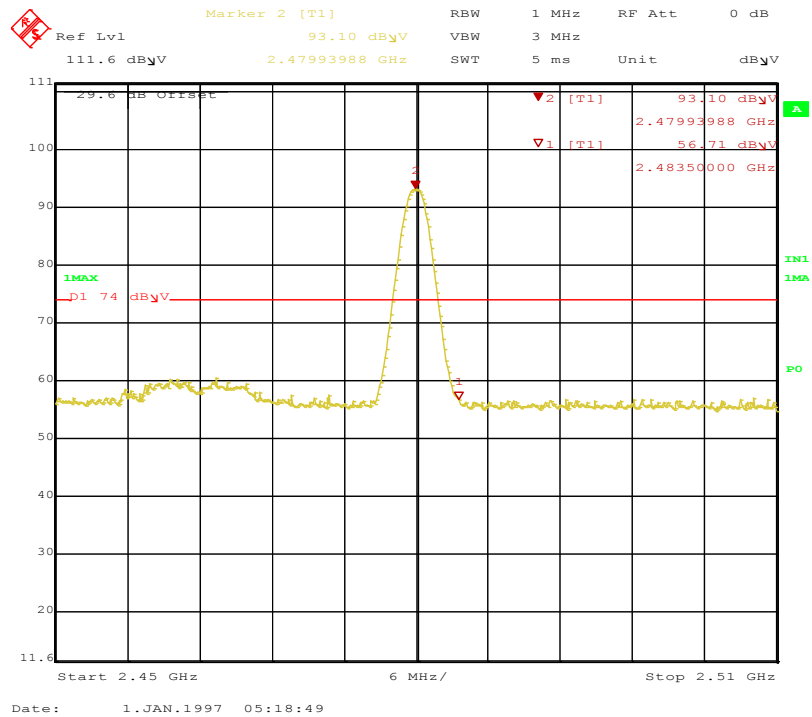


Figure 61: Radiated Emission at the Edge at 2DH1 - 2480 MHz – Vertical (Pk)

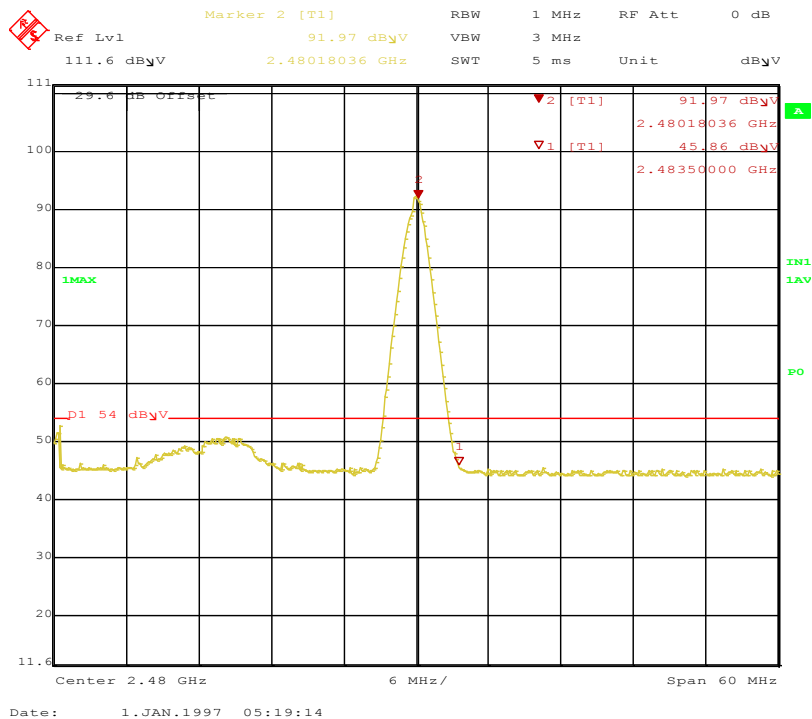


Figure 62: Radiated Emission at the Edge 2DH1 - 2480 MHz – Vertical (Avg)

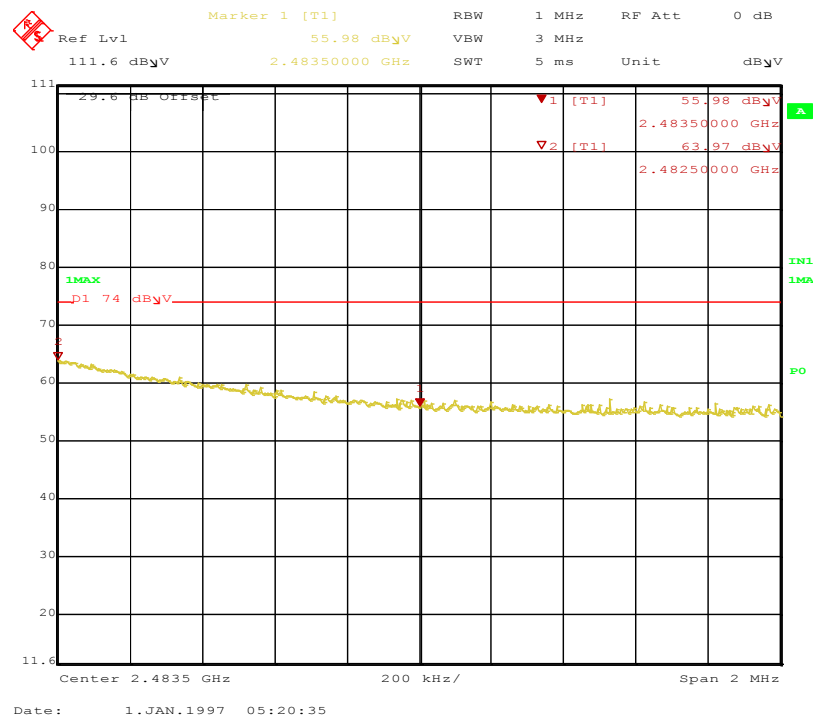


Figure 63: Radiated Emission at the Edge at 2DH1 - 2480 MHz – 2 MHz Span – Vertical (Pk)

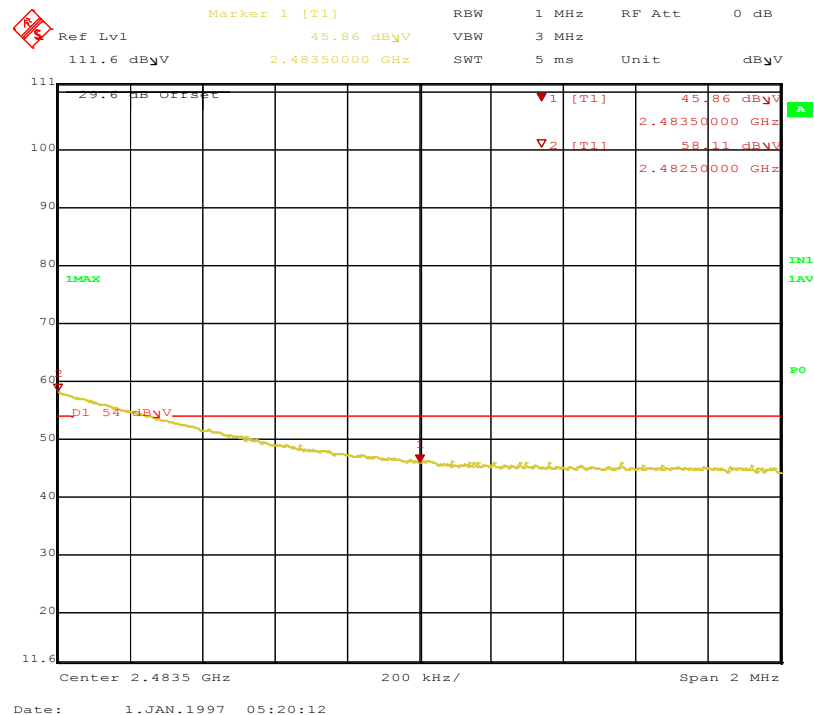


Figure 64: Radiated Emission at the Edge at 2DH1 - 2480 MHz – 2 MHz Span – Vertical (Avg)

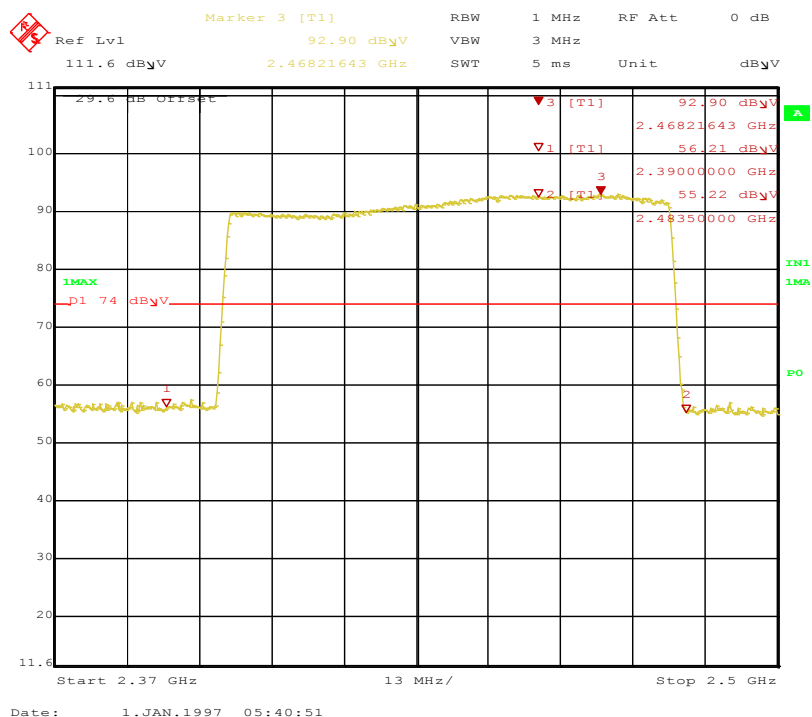


Figure 65: Radiated Emission at the Edge for 2DH1 Hopping – Horizontal (Pk)

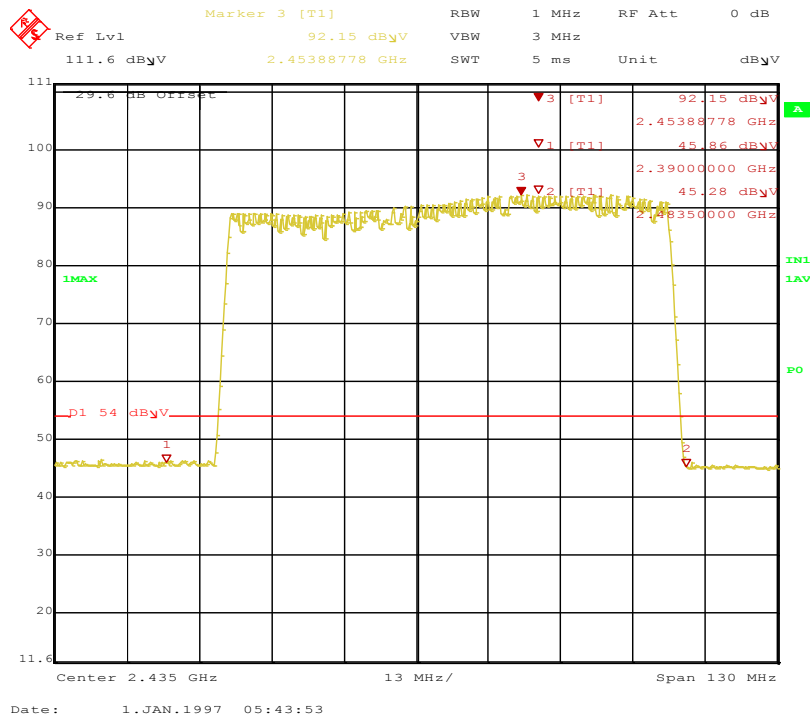


Figure 66: Radiated Emission at the Edge for 2DH1 Hopping – Horizontal (Avg)

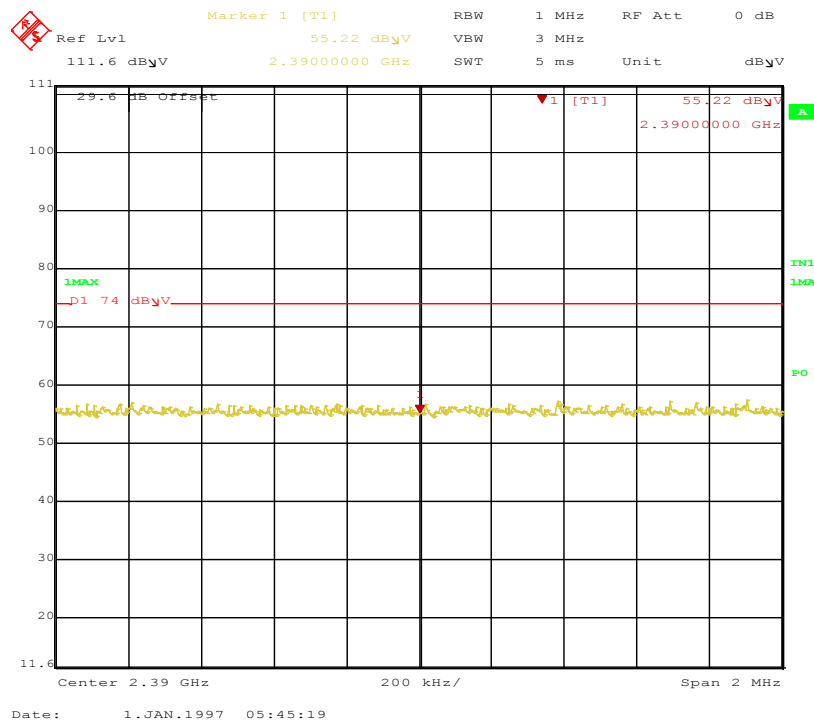


Figure 67: Radiated Emission at the Edge for 2DH1 Hopping at 2390 MHz – 2 MHz Span – Horizontal (Pk)

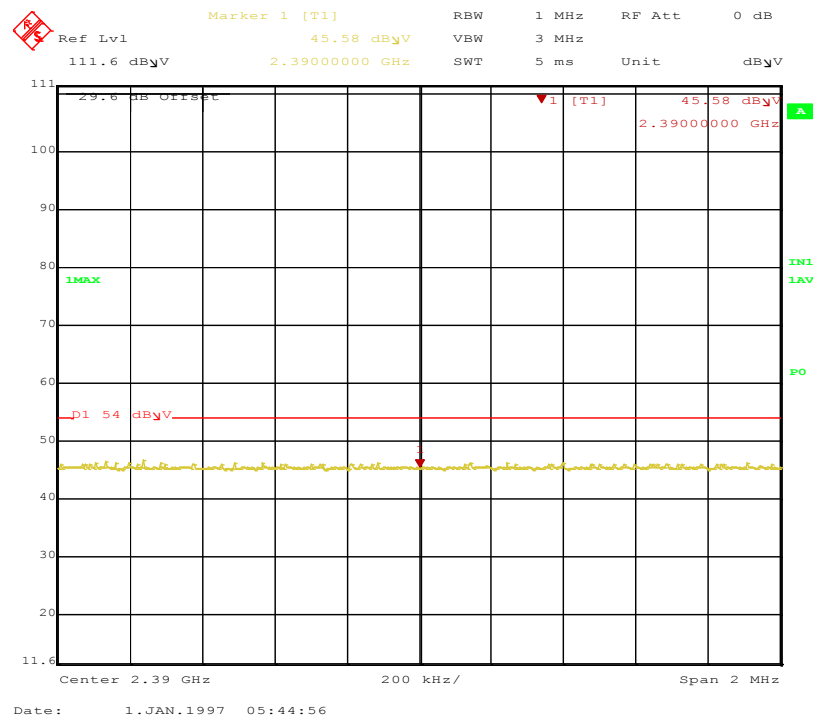


Figure 68: Radiated Emission at the Edge for 2DH1 Hopping at 2390 MHz – 2 MHz Span – Horizontal (Avg)

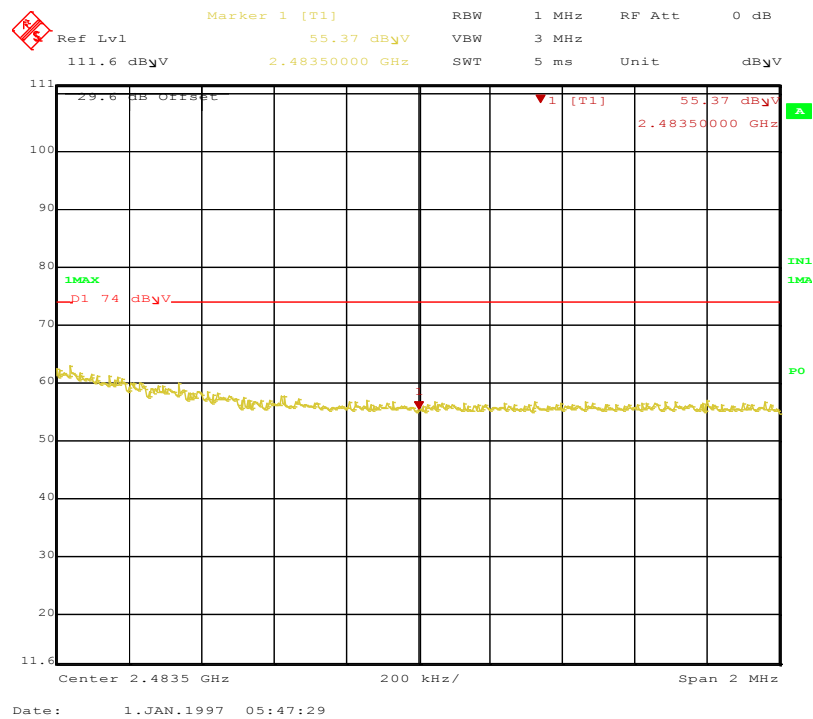


Figure 69: Radiated Emission at the Edge for 2DH1 Hopping at 2483.5 MHz – 2 MHz Span – Horizontal (Pk)

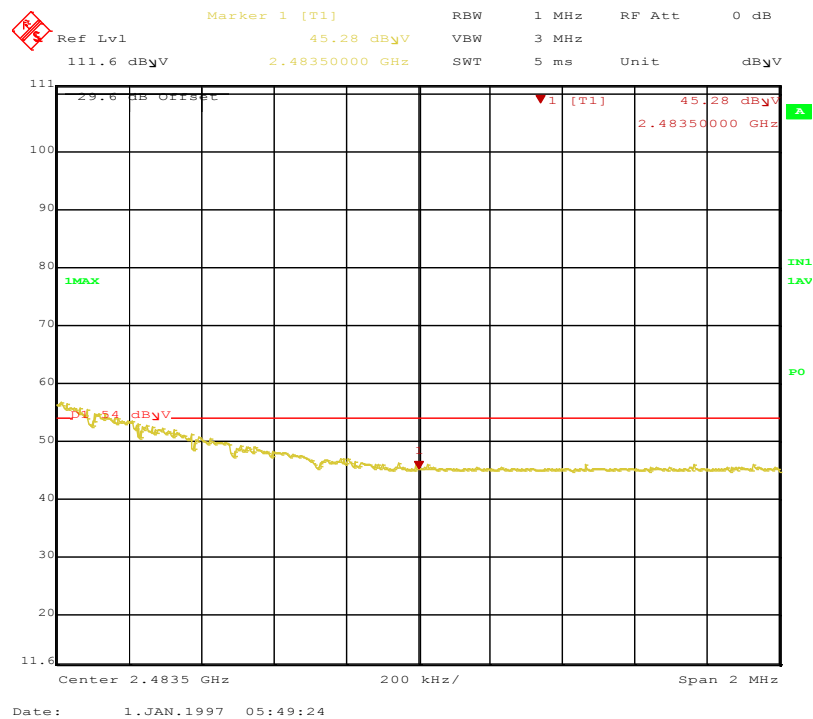
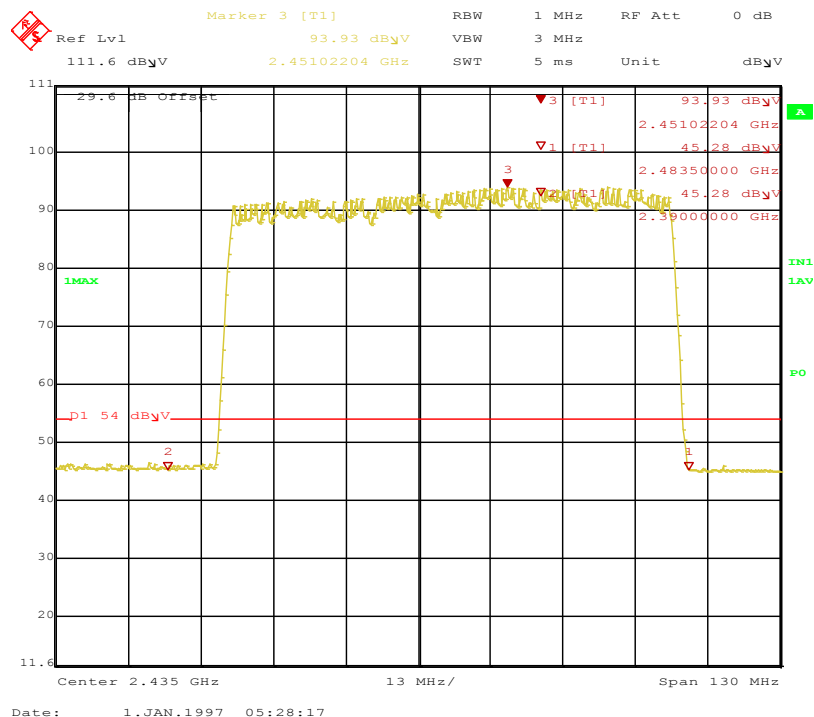
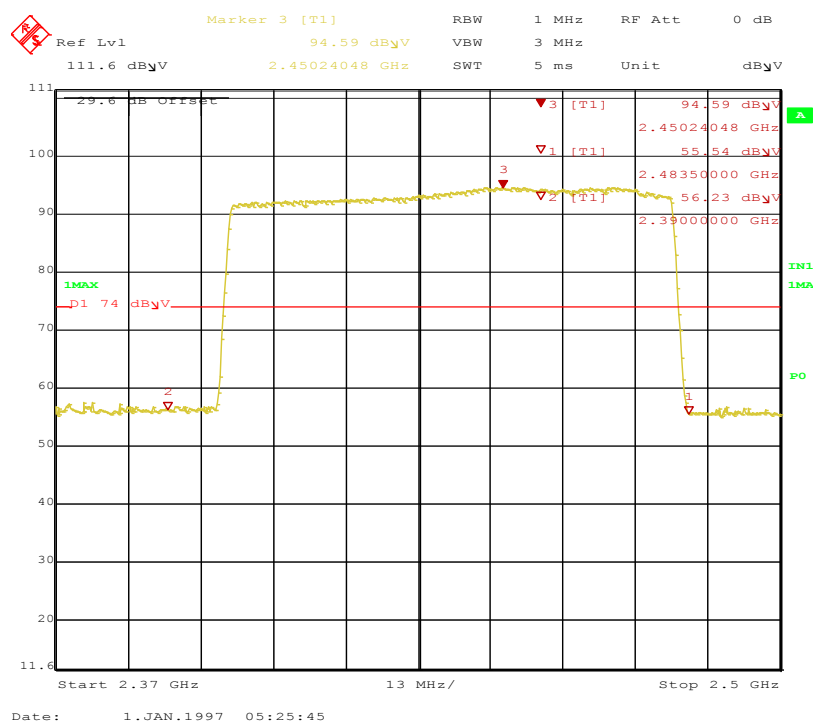


Figure 70: Radiated Emission at the Edge for 2DH1 Hopping at 2483.5 MHz – 2 MHz Span – Horizontal (Avg)



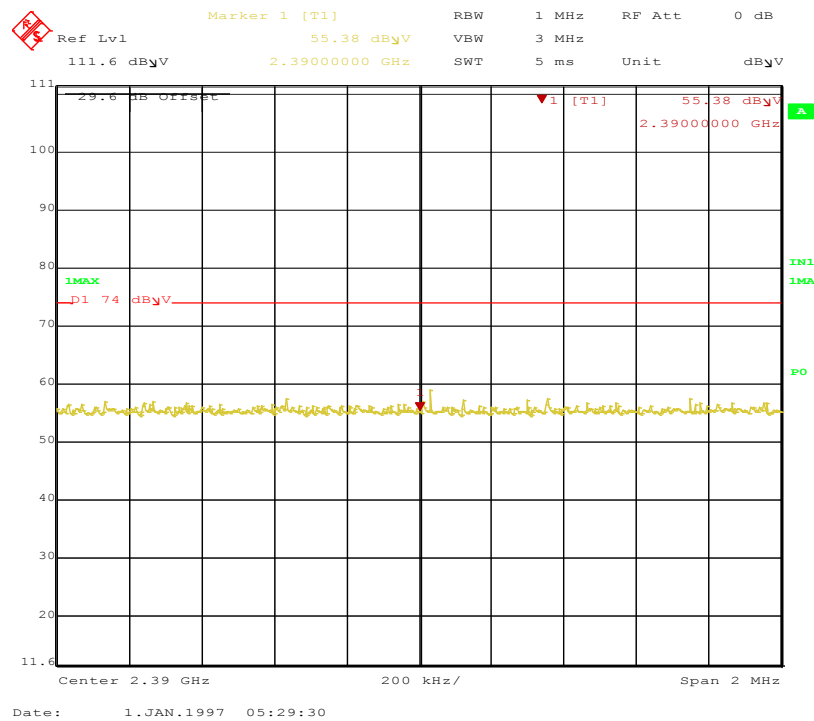


Figure 73: Radiated Emission at the Edge for 2DH1 Hopping at 2390 MHz – 2 MHz Span – Vertical (Pk)

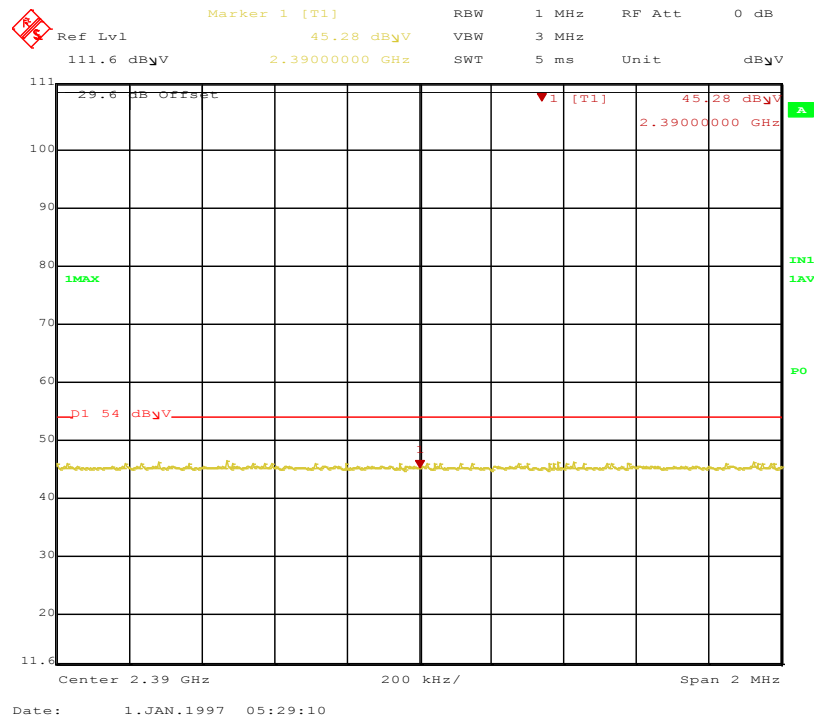


Figure 74: Radiated Emission at the Edge for 2DH1 Hopping at 2390 MHz – 2 MHz Span – Vertical (Avg)

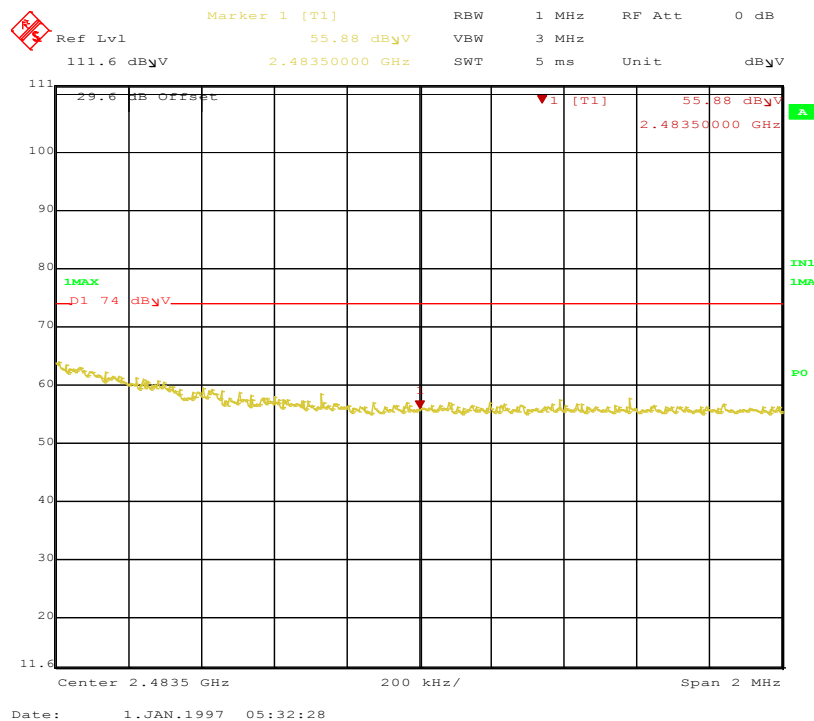


Figure 75: Radiated Emission at the Edge for 2DH1 Hopping at 2483.5 MHz – 2 MHz Span – Vertical (Pk)

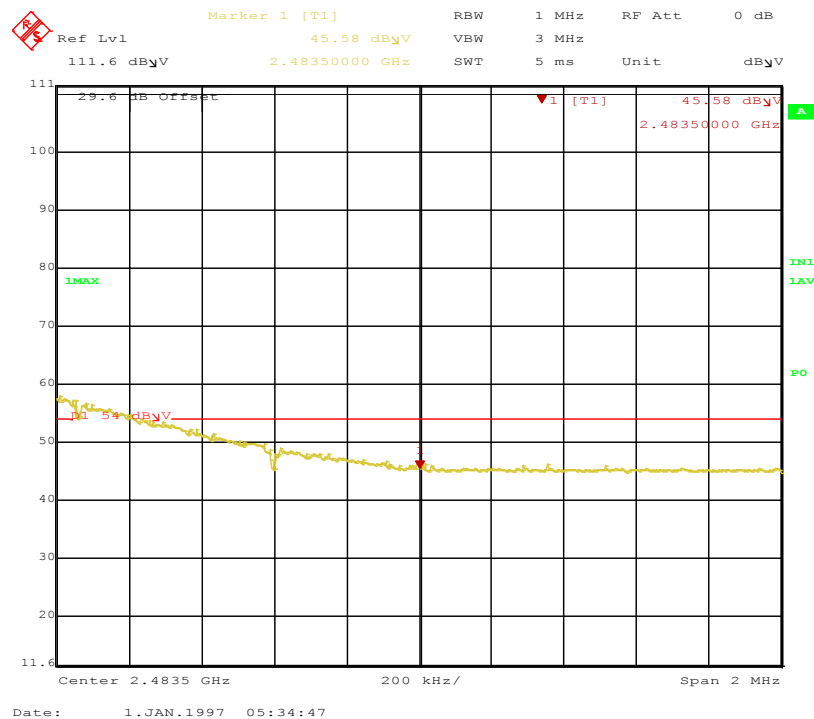


Figure 76: Radiated Emission at the Edge for 2DH1 Hopping at 2483.5 MHz – 2 MHz Span – Vertical (Avg)

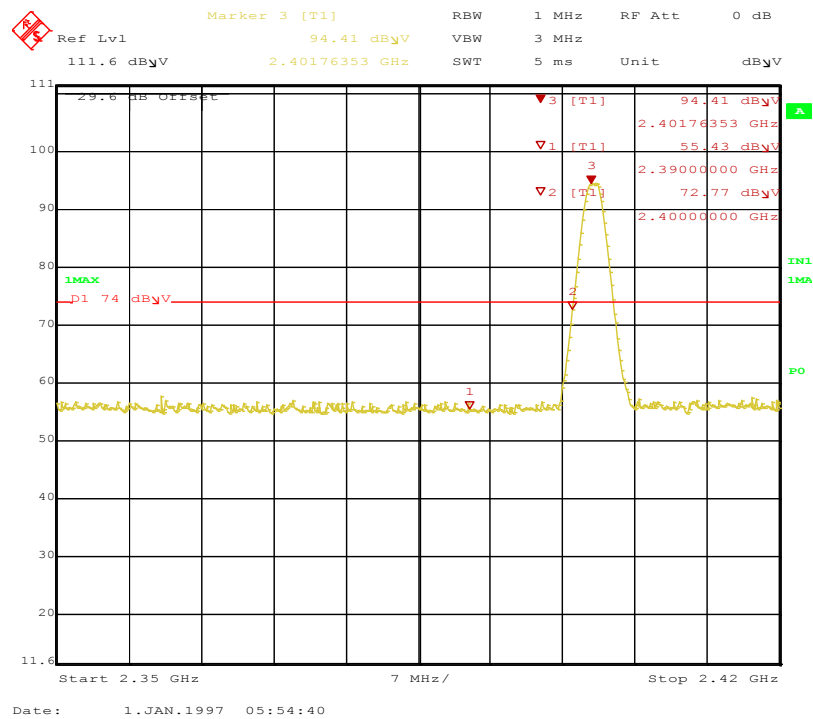


Figure 77: Radiated Emission at the Edge for BLE, 2402 MHz – Horizontal (Pk)

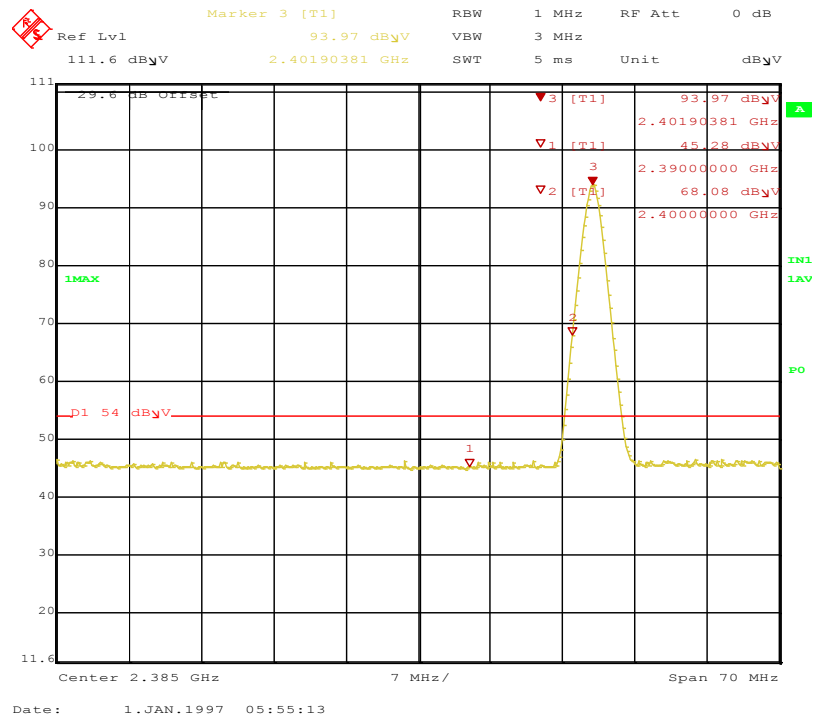


Figure 78: Radiated Emission at the Edge for BLE, 2402 MHz – Horizontal (Avg)

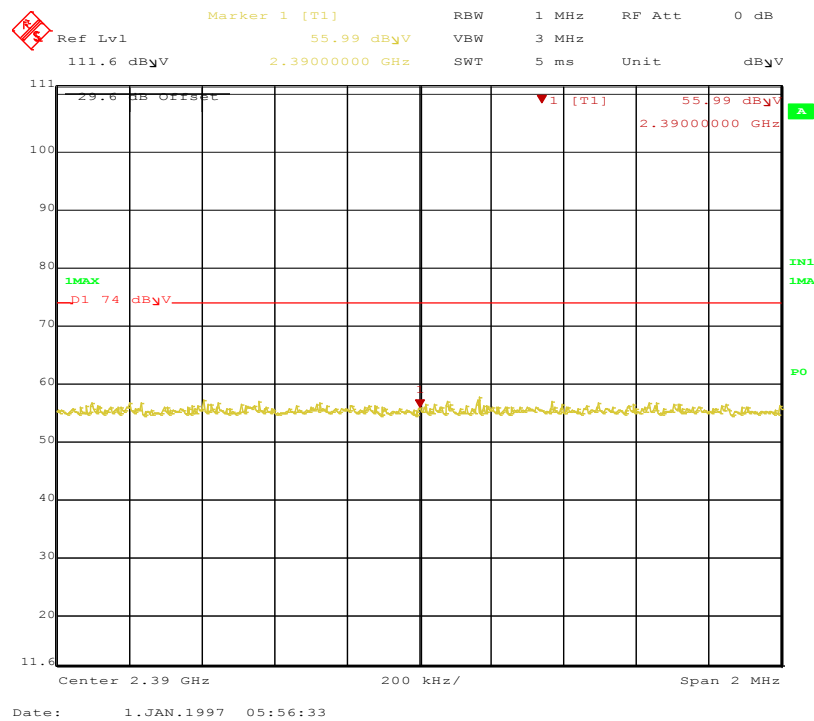


Figure 79: Radiated Emission at the Edge for BLE, 2402 MHz – 2 MHz Span – Horizontal (Pk)

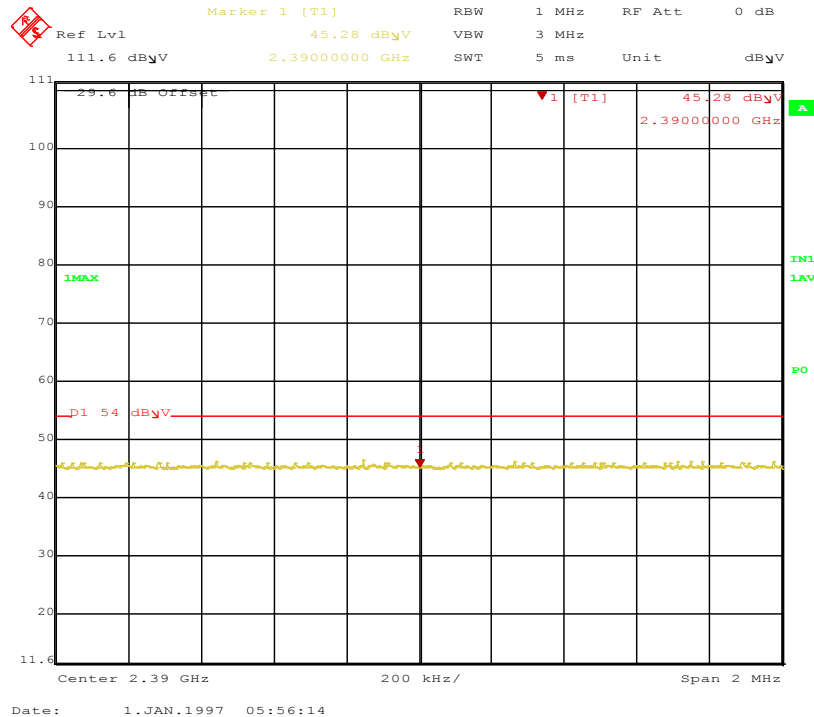


Figure 80: Radiated Emission at the Edge for BLE, 2402 MHz – 2 MHz Span – Horizontal (Avg)

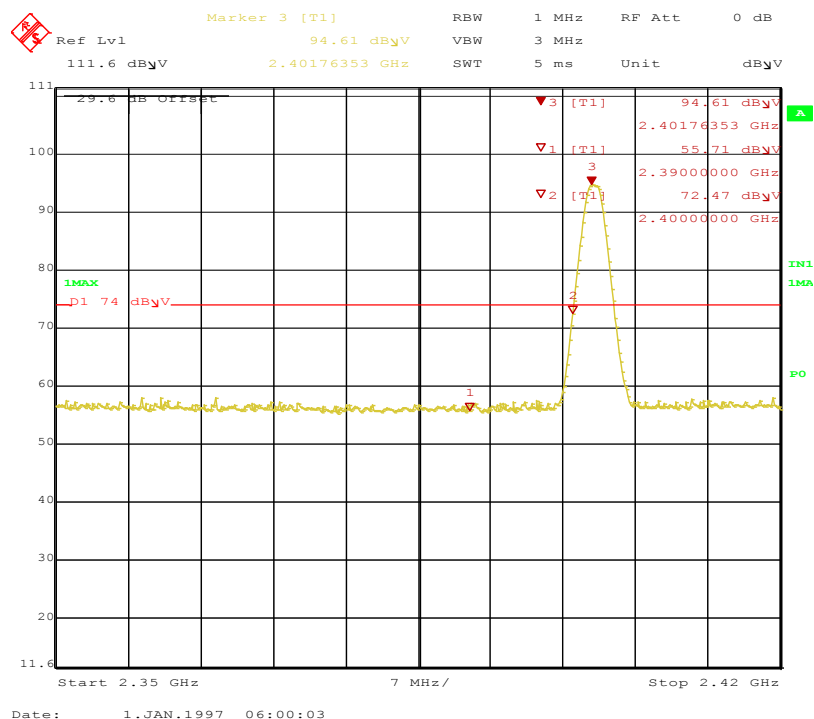


Figure 81: Radiated Emission at the Edge for BLE, 2402 MHz – Vertical (Pk)

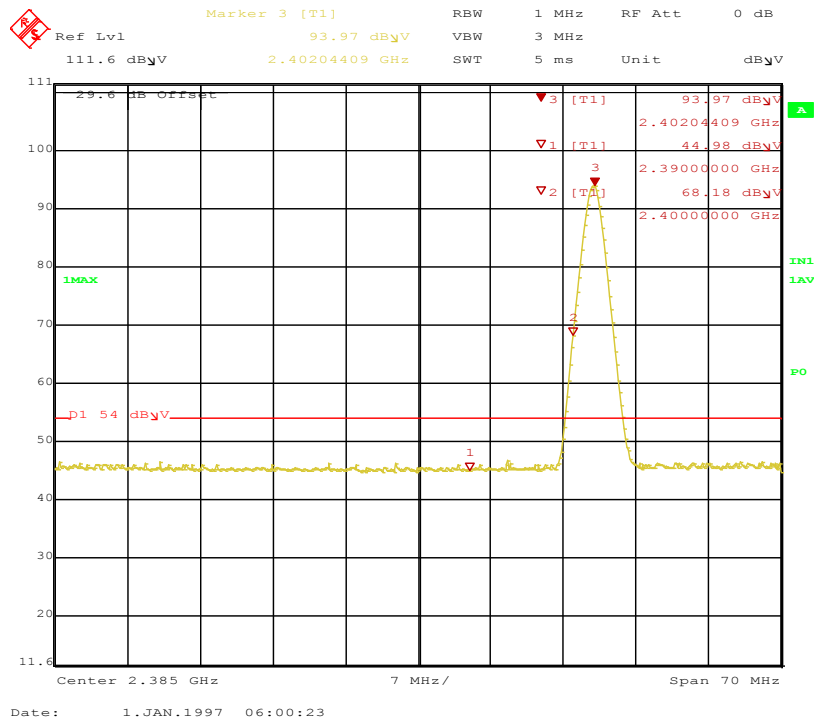


Figure 82: Radiated Emission at the Edge for BLE, 2402 MHz – Vertical (Avg)

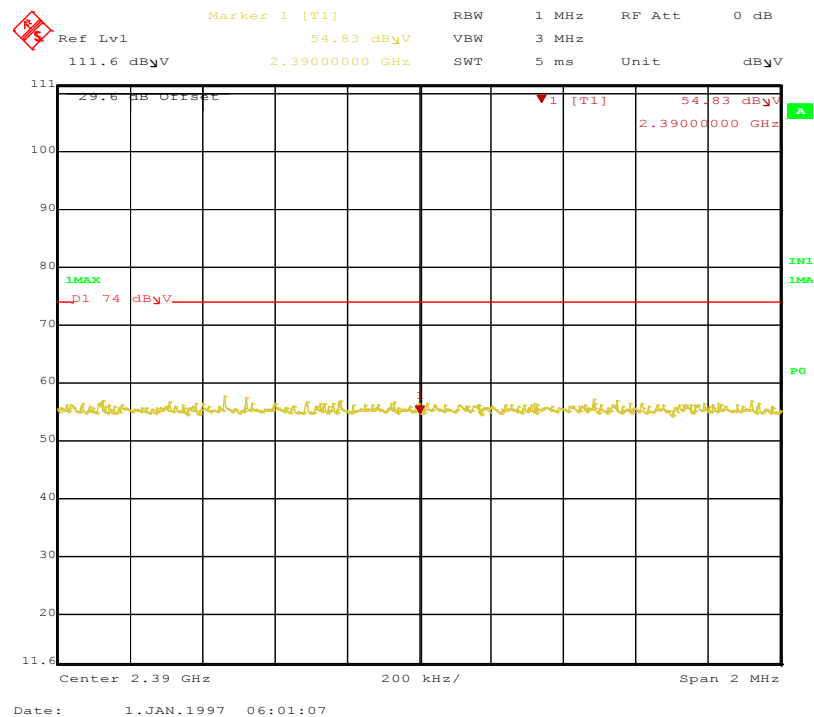


Figure 83: Radiated Emission at the Edge for BLE, 2402 MHz – 2 MHz Span –Vertical (Pk)

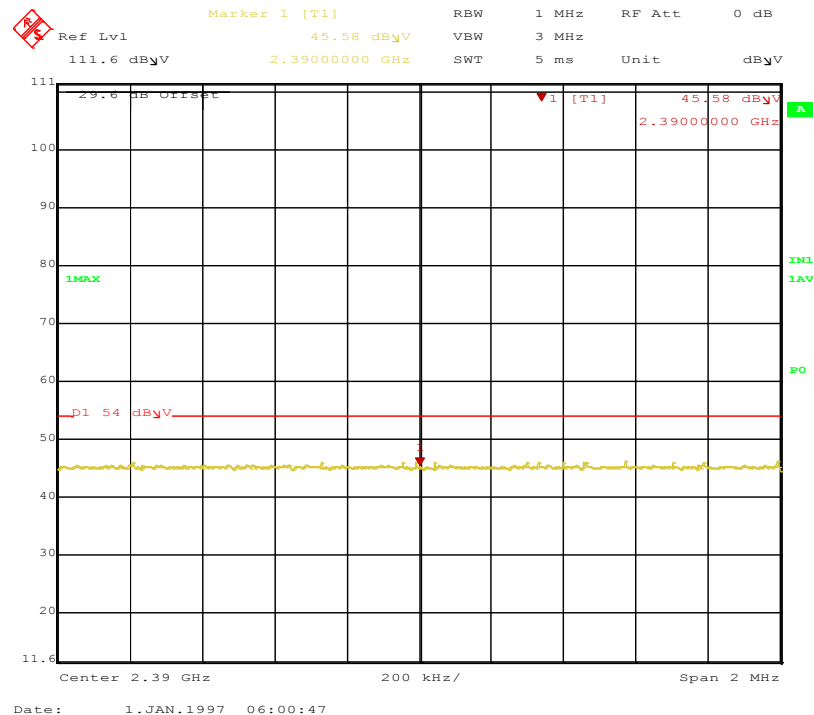


Figure 84: Radiated Emission at the Edge for BLE, 2402 MHz – 2 MHz Span –Vertical (Avg)

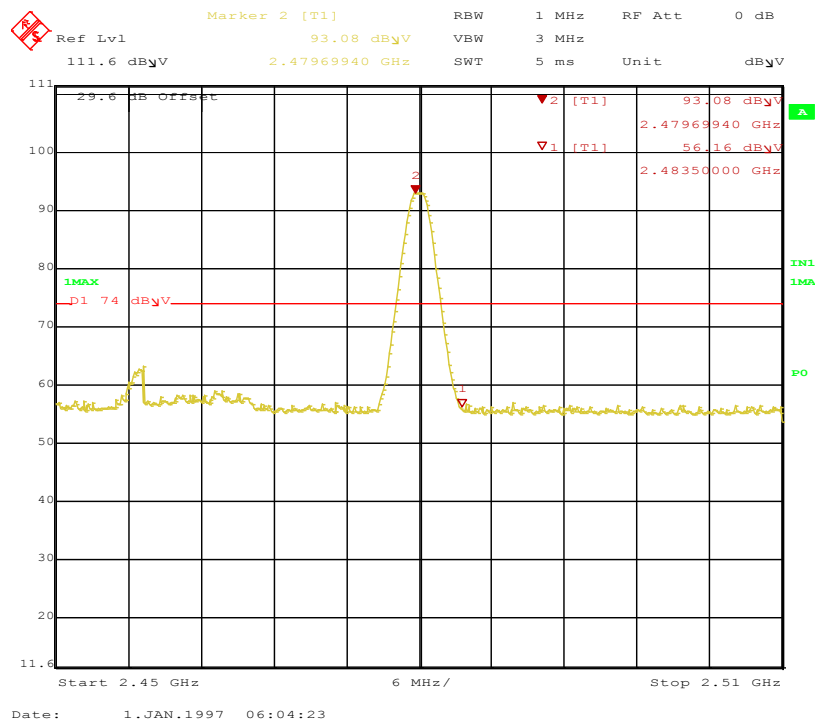


Figure 85: Radiated Emission at the Edge for BLE, 2480 MHz – Horizontal (Pk)

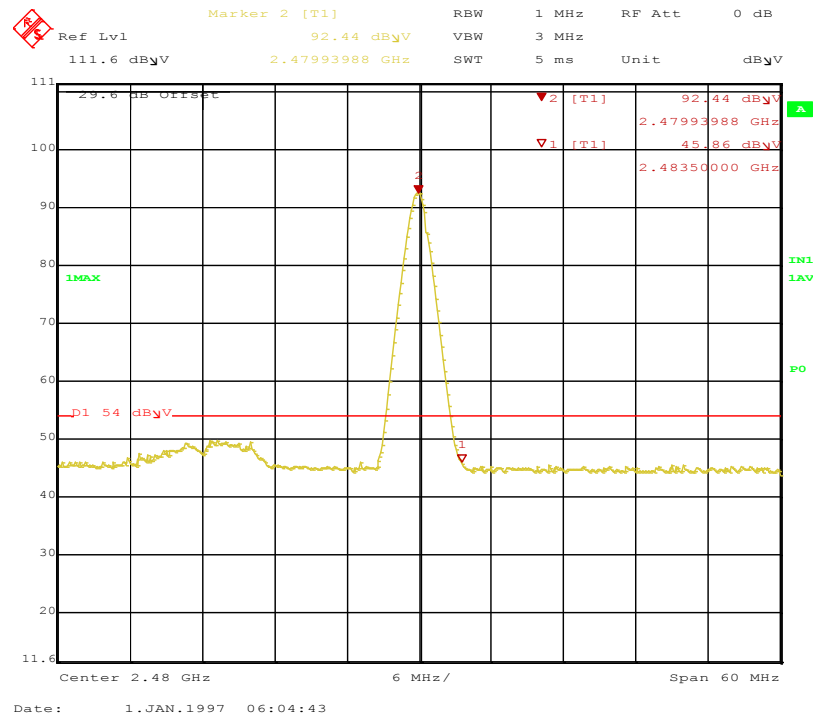


Figure 86: Radiated Emission at the Edge for BLE, 2480 MHz – Horizontal (Avg)

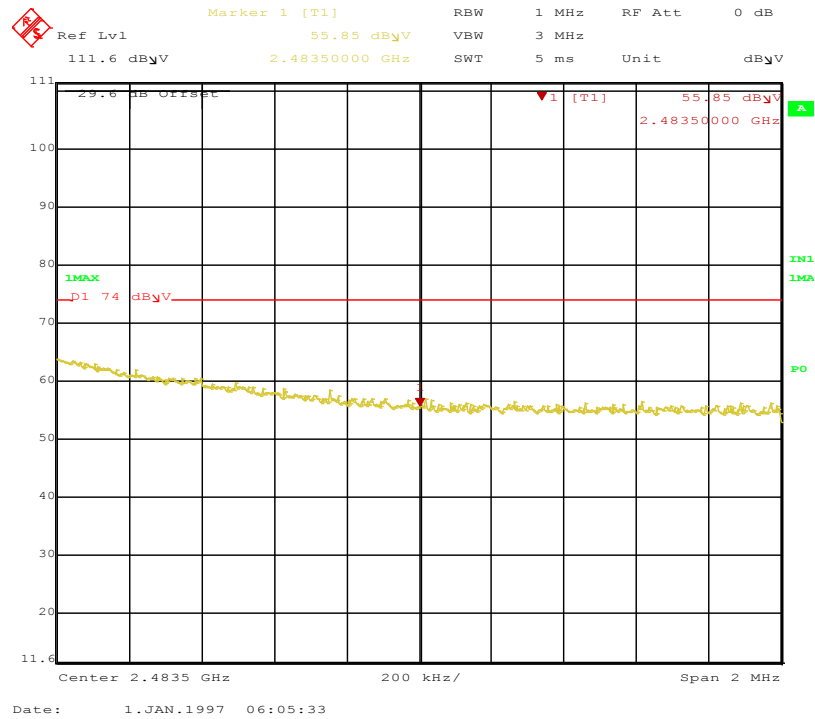


Figure 87: Radiated Emission at the Edge for BLE, 2480 MHz – 2 MHz Span – Horizontal (Pk)

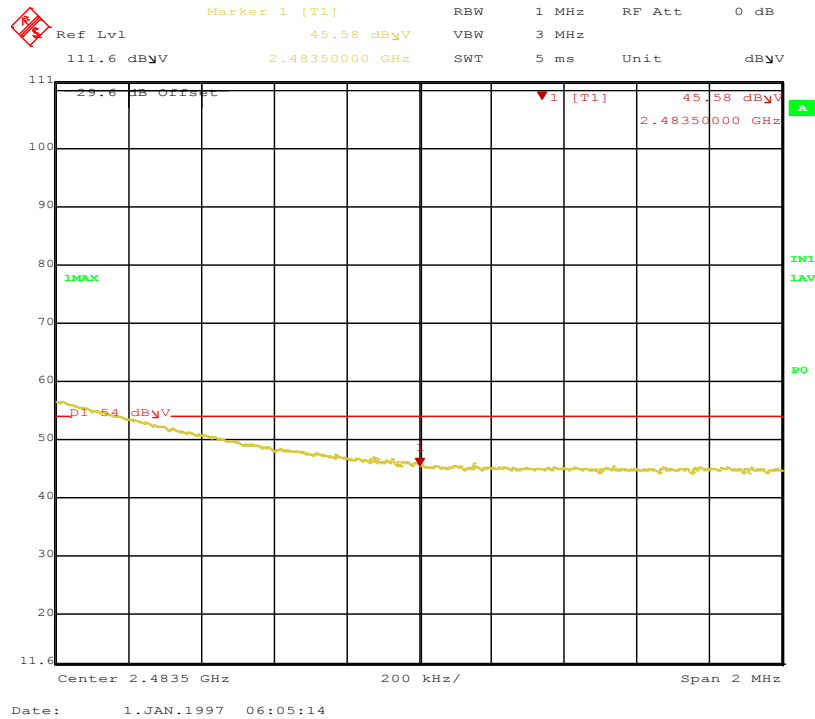


Figure 88: Radiated Emission at the Edge for BLE, 2480 MHz – 2 MHz Span – Horizontal (Avg)

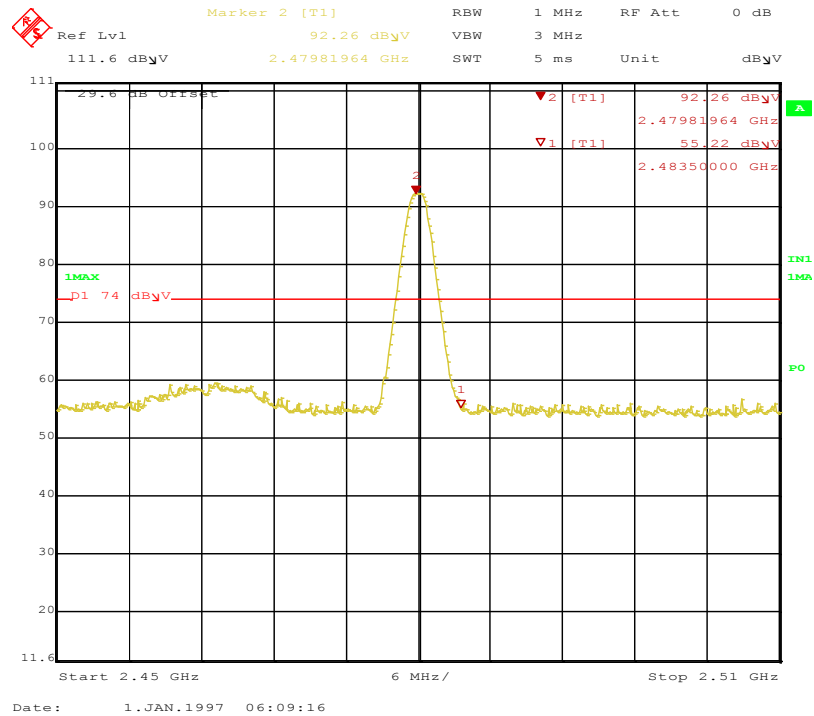


Figure 89: Radiated Emission at the Edge for BLE, 2480 MHz – Vertical (Pk)

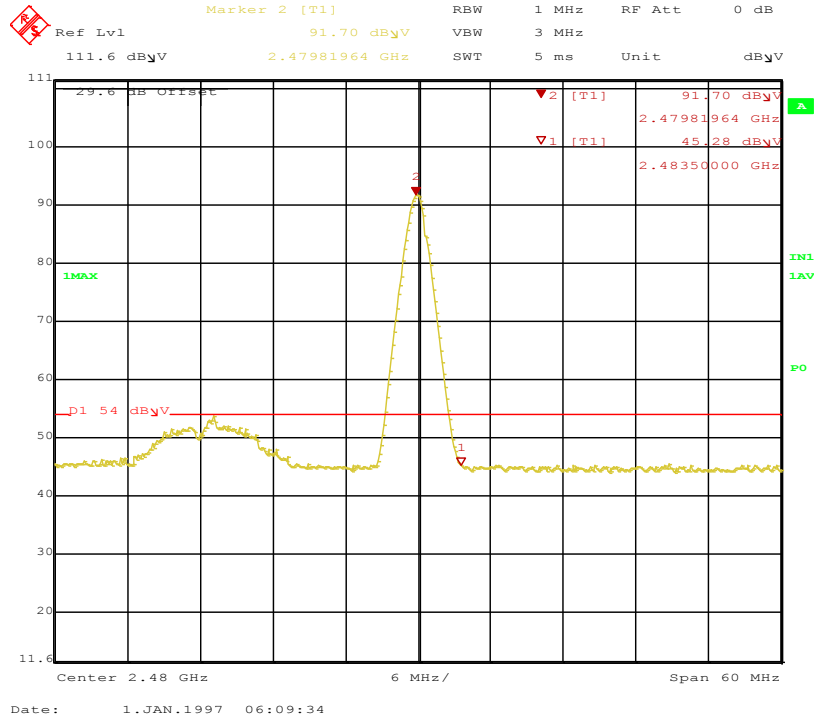


Figure 90: Radiated Emission at the Edge for BLE, 2480 MHz – Vertical (Avg)

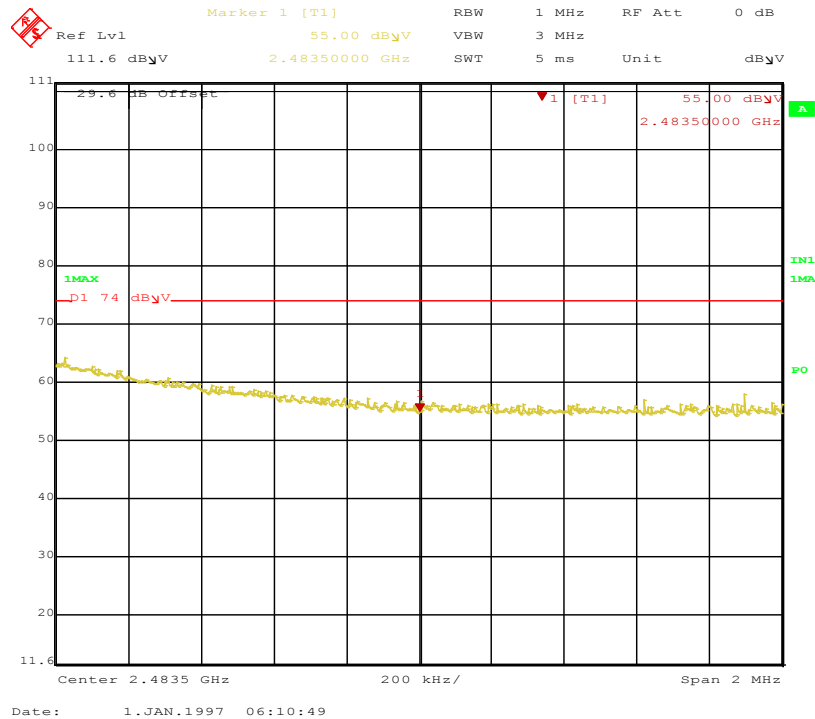


Figure 91: Radiated Emission at the Edge for BLE, 2480 MHz – 2 MHz Span –Vertical (Pk)

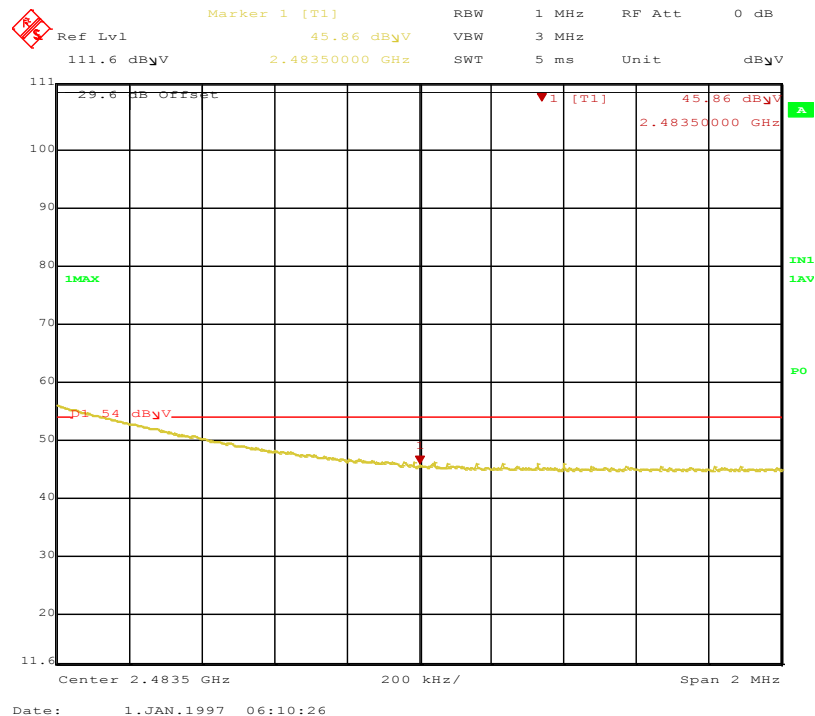


Figure 92: Radiated Emission at the Edge for BLE, 2480 MHz – 2 MHz Span –Vertical (Avg)



|                                                                                                                     |                              |       |        |        |          |                                     |                 |     |       |        |        |
|---------------------------------------------------------------------------------------------------------------------|------------------------------|-------|--------|--------|----------|-------------------------------------|-----------------|-----|-------|--------|--------|
| SOP 1 Radiated Emissions                                                                                            |                              |       |        |        |          | Tracking # 31763314.001 Page 1 of 6 |                 |     |       |        |        |
| EUT Name                                                                                                            | Wireless Audio Headset       |       |        |        |          | Date                                | August 30, 2017 |     |       |        |        |
| EUT Model                                                                                                           | Ear Force Stealth 700P RX    |       |        |        |          | Temp / Hum in                       | 23°C / 35%rh    |     |       |        |        |
| EUT Serial                                                                                                          | PP #2                        |       |        |        |          | Temp / Hum out                      | N/A             |     |       |        |        |
| EUT Comfit.                                                                                                         | Integrated Antenna on Y-Axis |       |        |        |          | Line AC / Freq                      | 3.7 VDC         |     |       |        |        |
| Standard                                                                                                            | CFR47 Part 15 Subpart C      |       |        |        |          | RBW / VBW                           | 120 kHz/300 kHz |     |       |        |        |
| Dist/Ant Used                                                                                                       | 3m /JB3                      |       |        |        |          | Performed by                        | Jeremy Luong    |     |       |        |        |
| 30 -1000 MHz radiated emission at 2442 MHz                                                                          |                              |       |        |        |          |                                     |                 |     |       |        |        |
| Freq                                                                                                                | Raw                          | Cable | AF     | Level  | Detector | Pol                                 | Hgt             | Azt | Limit | Margin | Result |
| MHz                                                                                                                 | dBuV/m                       | dB    | dB     | dBuV/m | Peak     | -                                   | cm              | Deg | dBuV  | dB     |        |
| 119.99                                                                                                              | 39.09                        | 3.17  | -14.47 | 27.79  | QP       | H                                   | 171             | 175 | 43.50 | -15.71 | Pass   |
| 128.00                                                                                                              | 37.94                        | 3.21  | -14.27 | 26.88  | QP       | H                                   | 186             | 348 | 43.50 | -16.62 | Pass   |
| 35.99                                                                                                               | 32.33                        | 2.62  | -11.34 | 23.62  | QP       | V                                   | 164             | 276 | 40.00 | -16.38 | Pass   |
| 48.01                                                                                                               | 40.03                        | 2.72  | -18.93 | 23.81  | QP       | V                                   | 146             | 64  | 40.00 | -16.19 | Pass   |
| 72.00                                                                                                               | 39.56                        | 2.89  | -20.11 | 22.34  | QP       | V                                   | 102             | 142 | 40.00 | -17.66 | Pass   |
| 960.04                                                                                                              | 26.74                        | 5.66  | -3.34  | 29.07  | QP       | V                                   | 135             | 278 | 54.00 | -24.94 | Pass   |
| Spec Margin = Level – Limit, Level = Raw + Cable + AF ± Uncertainty                                                 |                              |       |        |        |          |                                     |                 |     |       |        |        |
| AF= Amp Gain + ANT Factor                                                                                           |                              |       |        |        |          |                                     |                 |     |       |        |        |
| Combined Standard Uncertainty $u_c(y) = \pm 4.52$ dB Expanded Uncertainty $U = k u_c(y)$ $k = 2$ for 95% confidence |                              |       |        |        |          |                                     |                 |     |       |        |        |
| Note: 1. Worst case was observed on Mid channel of the Bluetooth radio.                                             |                              |       |        |        |          |                                     |                 |     |       |        |        |
| 2. No significant emission was observed below 30 MHz.                                                               |                              |       |        |        |          |                                     |                 |     |       |        |        |

# SOP 1 Radiated Emissions

Tracking # 31763314.001 Page 2 of 6

|                      |                              |                       |                 |
|----------------------|------------------------------|-----------------------|-----------------|
| <b>EUT Name</b>      | Wireless Audio Headset       | <b>Date</b>           | August 30, 2017 |
| <b>EUT Model</b>     | Ear Force Stealth 700P RX    | <b>Temp / Hum in</b>  | 23°C / 35%rh    |
| <b>EUT Serial</b>    | PP #2                        | <b>Temp / Hum out</b> | N/A             |
| <b>EUT Comfit.</b>   | Integrated Antenna on Y-Axis | <b>Line AC / Freq</b> | 3.7 VDC         |
| <b>Standard</b>      | CFR47 Part 15 Subpart C      | <b>RBW / VBW</b>      | 120 kHz/300 kHz |
| <b>Dist/Ant Used</b> | 3m / 6505 and JB3            | <b>Performed by</b>   | Jeremy Luong    |

## 9 kHz to 1000 MHz Plot for Transmit at 2442 MHz

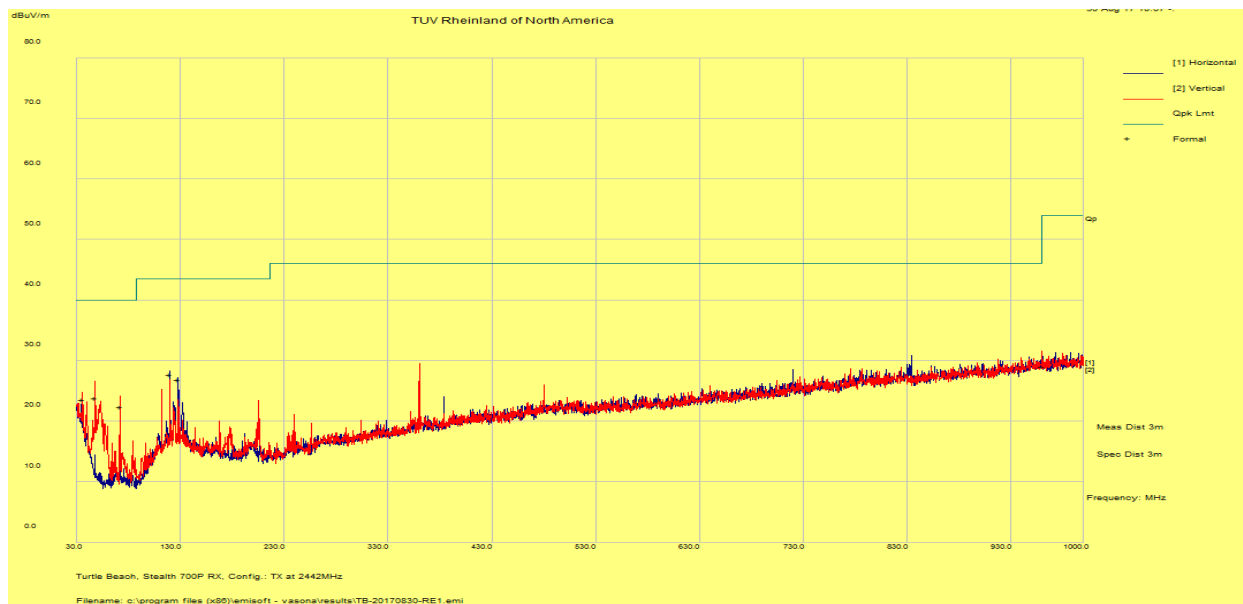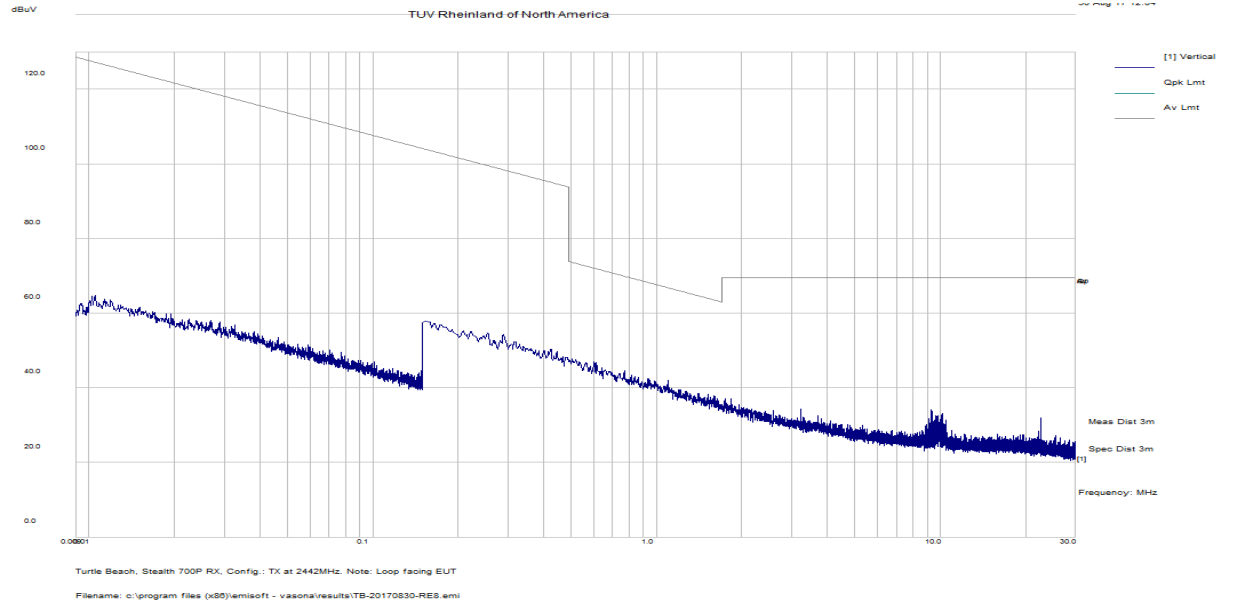

Note: Plot was scanned in the peak mode.



| SOP 1 Radiated Emissions                                                                                           |        |                                   |        |        |      |      | Tracking # 31763314.001 Page 3 of 6 |     |                 |        |        |
|--------------------------------------------------------------------------------------------------------------------|--------|-----------------------------------|--------|--------|------|------|-------------------------------------|-----|-----------------|--------|--------|
| EUT Name                                                                                                           |        | Wireless Audio Headset            |        |        |      |      | Date                                |     | August 30, 2017 |        |        |
| EUT Model                                                                                                          |        | Ear Force Stealth 700P RX         |        |        |      |      | Temp / Hum in                       |     | 23°C / 35%rh    |        |        |
| EUT Serial                                                                                                         |        | PP #2                             |        |        |      |      | Temp / Hum out                      |     | N/A             |        |        |
| EUT Comfit.                                                                                                        |        | Integrated Antenna on Y-Axis      |        |        |      |      | Line AC / Freq                      |     | 3.7 VDC         |        |        |
| Standard                                                                                                           |        | CFR47 Part 15 Subpart C           |        |        |      |      | RBW / VBW                           |     | 1 MHz / 3 MHz   |        |        |
| Dist/Ant Used                                                                                                      |        | 3m – DRH-118 / 1m - RA42-K-F-4B-C |        |        |      |      | Performed by                        |     | Jeremy Luong    |        |        |
| Freq.                                                                                                              | Raw    | Cbl                               | AF     | Level  | Det. | Pol. | Hght.                               | Azt | Limit           | Margin | Result |
| MHz                                                                                                                | dBuV/m | dB                                | dB     | dBuV/m |      | H/V  | cm                                  | deg | dBuV/m          | dB     |        |
| Above 1 GHz Radiated Emission at 2402 MHz, 2DH1                                                                    |        |                                   |        |        |      |      |                                     |     |                 |        |        |
| 14421.79                                                                                                           | 23.79  | 3.42                              | 11.47  | 38.67  | Ave  | H    | 214                                 | 50  | 54.00           | -15.33 | Pass   |
| 4803.97                                                                                                            | 36.10  | 1.90                              | -1.00  | 37.00  | Ave  | V    | 109                                 | 0   | 54.00           | -17.00 | Pass   |
| 17961.33                                                                                                           | 24.62  | 4.20                              | 15.91  | 44.73  | Ave  | V    | 198                                 | 338 | 54.00           | -9.27  | Pass   |
| Above 1 GHz Radiated Emission at 2442 MHz, 2DH1                                                                    |        |                                   |        |        |      |      |                                     |     |                 |        |        |
| 9997.61                                                                                                            | 24.32  | 3.04                              | 6.84   | 34.20  | Ave  | H    | 220                                 | 349 | 54.00           | -19.80 | Pass   |
| 17933.81                                                                                                           | 24.72  | 4.20                              | 15.83  | 44.75  | Ave  | H    | 204                                 | 224 | 54.00           | -9.26  | Pass   |
| 4884.77                                                                                                            | 32.41  | 1.90                              | -1.00  | 33.30  | Ave  | V    | 111                                 | 348 | 54.00           | -20.70 | Pass   |
| 14499.65                                                                                                           | 23.35  | 3.54                              | 11.97  | 38.87  | Ave  | V    | 185                                 | 160 | 54.00           | -15.13 | Pass   |
| 24103.41                                                                                                           | 36.60  | 8.10                              | -12.30 | 32.40  | Ave  | V    | 170                                 | 38  | 54.00           | -21.60 | Pass   |
| Above 1 GHz Radiated Emission at 2480 MHz, 2DH1                                                                    |        |                                   |        |        |      |      |                                     |     |                 |        |        |
| 9971.05                                                                                                            | 24.18  | 3.00                              | 6.92   | 34.10  | Ave  | H    | 172                                 | 256 | 54.00           | -19.90 | Pass   |
| 14474.93                                                                                                           | 23.46  | 3.49                              | 11.61  | 38.56  | Ave  | H    | 104                                 | 304 | 54.00           | -15.44 | Pass   |
| 4959.96                                                                                                            | 30.72  | 1.84                              | -0.89  | 31.68  | Ave  | V    | 231                                 | 354 | 54.00           | -22.32 | Pass   |
| 17972.64                                                                                                           | 24.57  | 4.20                              | 15.98  | 44.75  | Ave  | V    | 188                                 | 140 | 54.00           | -9.25  | Pass   |
| Spec Margin = Level – Limit, Level = Raw + Cable + AF ± Uncertainty                                                |        |                                   |        |        |      |      |                                     |     |                 |        |        |
| AF= Amp Gain + ANT Factor                                                                                          |        |                                   |        |        |      |      |                                     |     |                 |        |        |
| Combined Standard Uncertainty $u_c(y) = \pm 4.52$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence |        |                                   |        |        |      |      |                                     |     |                 |        |        |
| Note Worst case was observed at 3DH1.                                                                              |        |                                   |        |        |      |      |                                     |     |                 |        |        |
| All emissions met restricted band limits.                                                                          |        |                                   |        |        |      |      |                                     |     |                 |        |        |

## SOP 1 Radiated Emissions

Tracking # 31763314.001 Page 4 of 6

|                      |                                   |                       |                 |
|----------------------|-----------------------------------|-----------------------|-----------------|
| <b>EUT Name</b>      | Wireless Audio Headset            | <b>Date</b>           | August 30, 2017 |
| <b>EUT Model</b>     | Ear Force Stealth 700P RX         | <b>Temp / Hum in</b>  | 23°C / 35%rh    |
| <b>EUT Serial</b>    | PP #2                             | <b>Temp / Hum out</b> | N/A             |
| <b>EUT Config.</b>   | Integrated Antenna on Y-Axis      | <b>Line AC</b>        | 3.7 VDC         |
| <b>Standard</b>      | CFR47 Part 15 Subpart C           | <b>RBW / VBW</b>      | 1 MHz/ 3 MHz    |
| <b>Dist/Ant Used</b> | 3m – DRH-118 / 1m - RA42-K-F-4B-C | <b>Performed by</b>   | Jeremy Luong    |

### Above 1 GHz Radiated Emission Plot for Transmit Mode at 2402 MHz, 2DH1

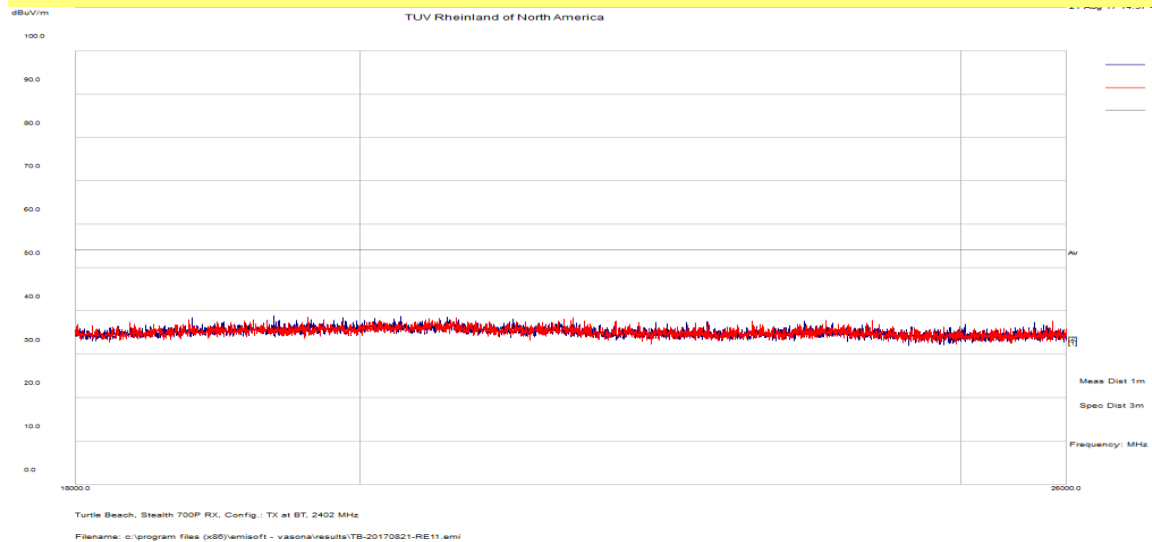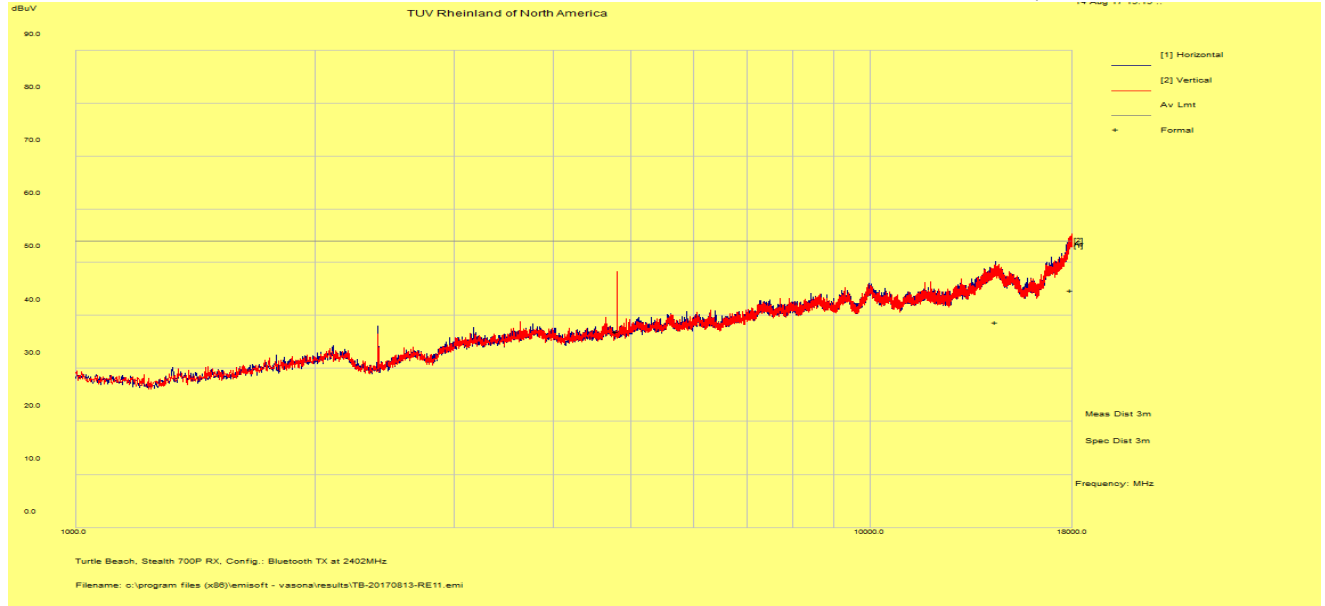


Notes: 1 GHz – 26 GHz was scanned at 1m distance.

# SOP 1 Radiated Emissions

Tracking # 31763314.001 Page 5 of 6

|                      |                                   |                       |                 |
|----------------------|-----------------------------------|-----------------------|-----------------|
| <b>EUT Name</b>      | Wireless Audio Headset            | <b>Date</b>           | August 30, 2017 |
| <b>EUT Model</b>     | Ear Force Stealth 700P RX         | <b>Temp / Hum in</b>  | 23°C / 35%rh    |
| <b>EUT Serial</b>    | PP #2                             | <b>Temp / Hum out</b> | N/A             |
| <b>EUT Config.</b>   | Integrated Antenna on Y-Axis      | <b>Line AC</b>        | 3.7 VDC         |
| <b>Standard</b>      | CFR47 Part 15 Subpart C           | <b>RBW / VBW</b>      | 1 MHz/ 3 MHz    |
| <b>Dist/Ant Used</b> | 3m – DRH-118 / 1m - RA42-K-F-4B-C | <b>Performed by</b>   | Jeremy Luong    |

## Above 1 GHz Radiated Emission Plot for Transmit Mode at 2442 MHz, 2DH1

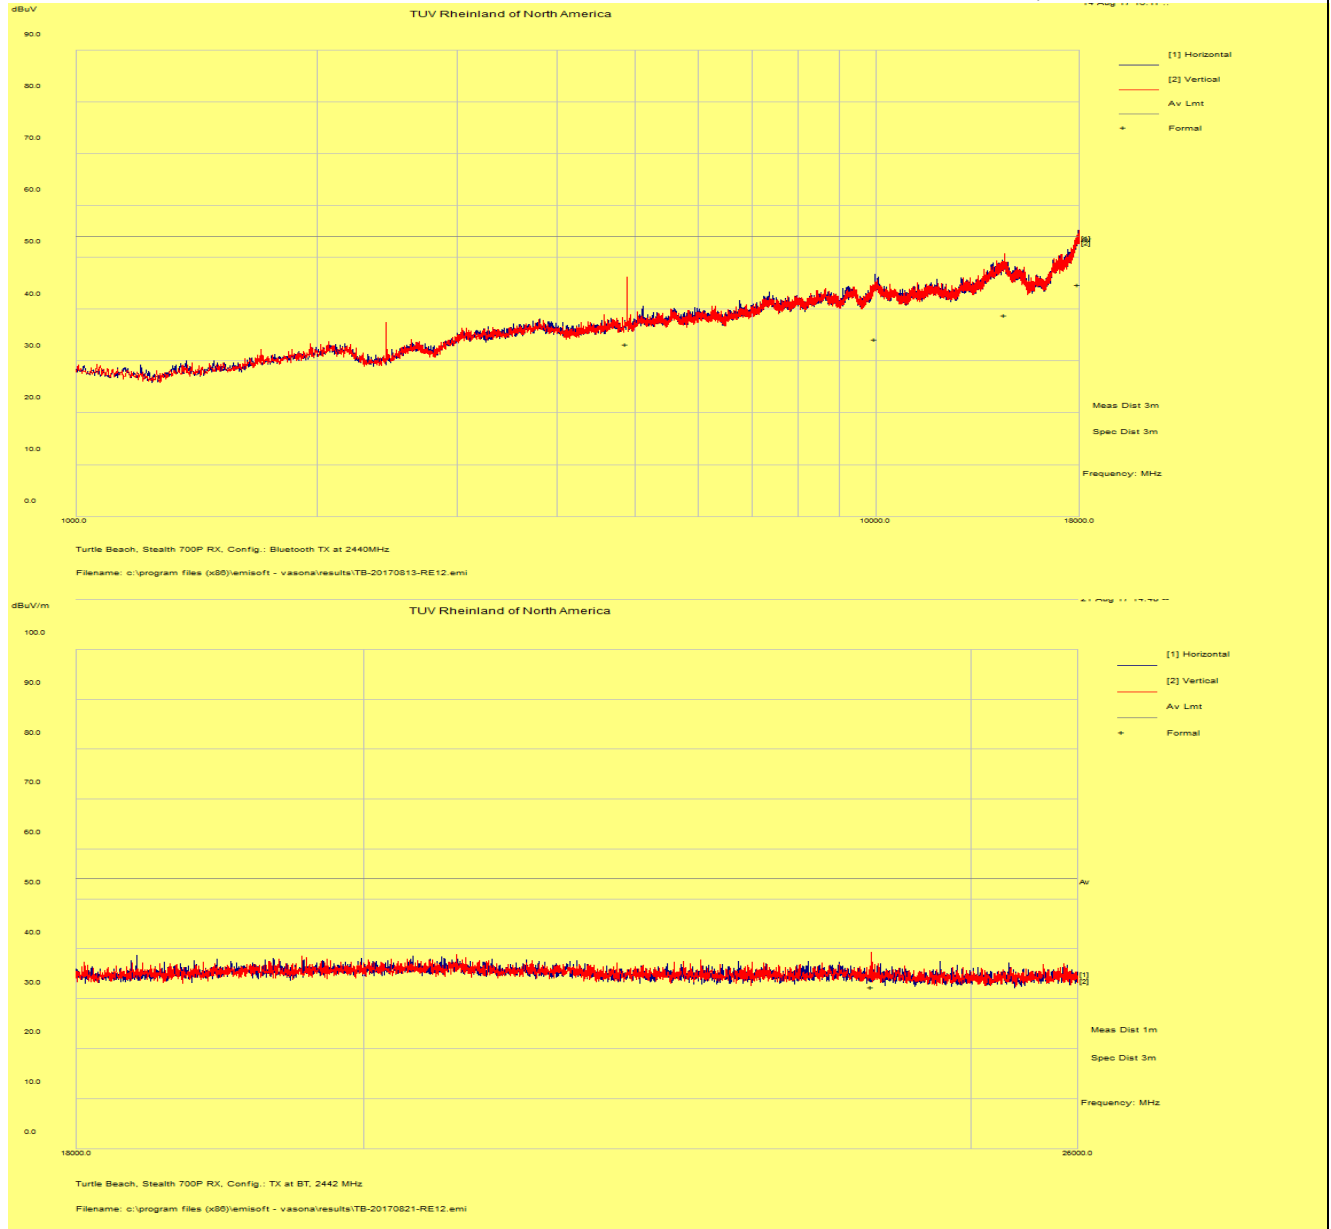



Notes: 1 GHz – 26 GHz was scanned at 1m distance.

# SOP 1 Radiated Emissions

Tracking # 31763314.001 Page 6 of 6

|                      |                                   |                       |                 |
|----------------------|-----------------------------------|-----------------------|-----------------|
| <b>EUT Name</b>      | Wireless Audio Headset            | <b>Date</b>           | August 30, 2017 |
| <b>EUT Model</b>     | Ear Force Stealth 700P RX         | <b>Temp / Hum in</b>  | 23°C / 35%rh    |
| <b>EUT Serial</b>    | PP #2                             | <b>Temp / Hum out</b> | N/A             |
| <b>EUT Config.</b>   | Integrated Antenna on Y-Axis      | <b>Line AC</b>        | 3.7 VDC         |
| <b>Standard</b>      | CFR47 Part 15 Subpart C           | <b>RBW / VBW</b>      | 1 MHz/ 3 MHz    |
| <b>Dist/Ant Used</b> | 3m – DRH-118 / 1m - RA42-K-F-4B-C | <b>Performed by</b>   | Jeremy Luong    |

## Above 1 GHz Plots for Transmit Mode at 2480 MHz 2DH1

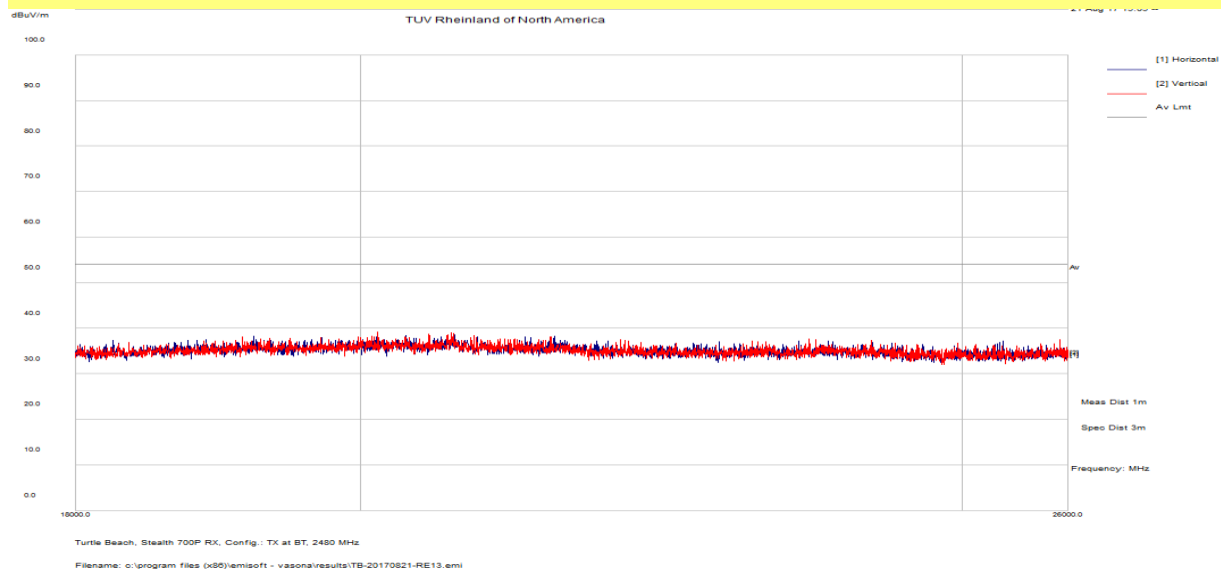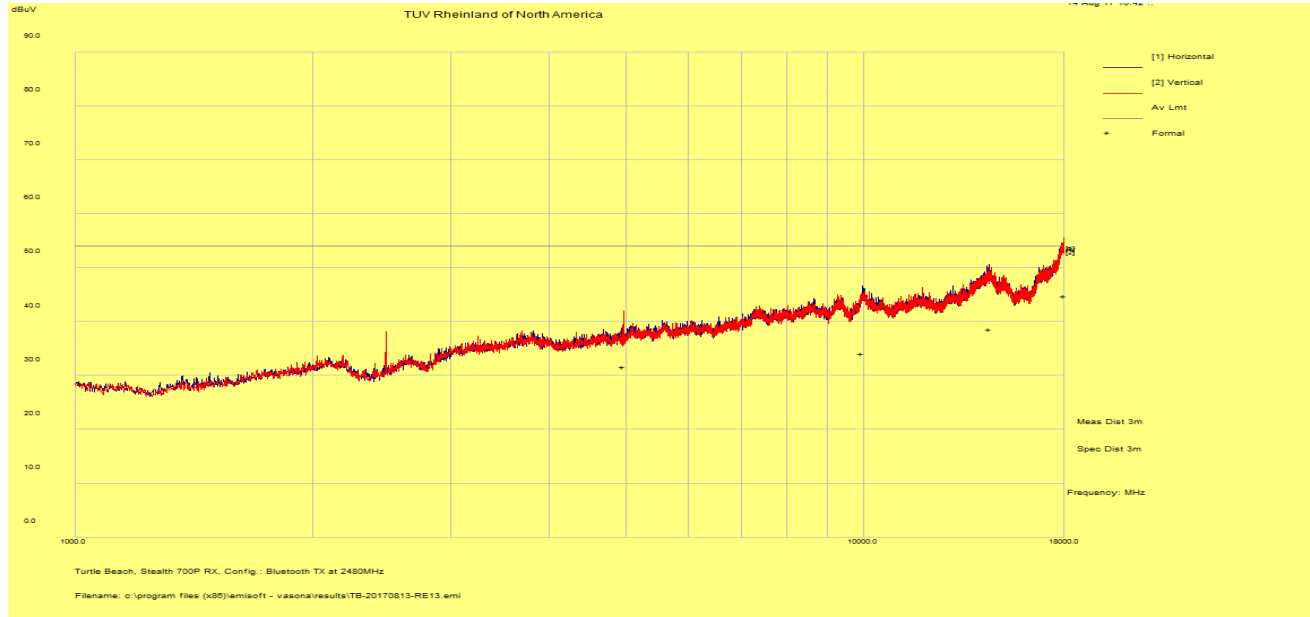

Notes: 1 GHz – 26 GHz was scanned at 1m distance.

#### 4.5.4 Sample Calculation

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{FIM} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where:

FIM = Field Intensity Meter (dB $\mu$ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V} / \text{m}}{20}}$$

## 4.6 AC Conducted Emissions

Testing was performed in accordance with ANSI C63.10: 2013. These test methods are listed under the laboratory's A2LA Scope of Accreditation.

This test measures the levels emanating from the EUT's AC input port, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

The AC conducted emissions of equipment under test shall not exceed the values in CFR47 Part 15.207 and RSS-GEN. Sect. 8.8.

### 4.6.1 Test Methodology

A test program that controls instrumentation and data logging was used to automate the AC Power Line Conducted emission test procedure. The frequency range of interest was divided into sub-ranges such as to yield a frequency resolution of 9 kHz. Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a set of 50µH / 50Ω LISNs.

Testing is performed in Lab 5. The setup photographs clearly identify which site was used. The vertical ground plane used in the semi-anechoic chamber is a 2m x 2m solid aluminum frame and panel, and it is bonded to the horizontal ground plane.

In the case of tabletop equipment, the EUT is placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane and 40cm from a vertical ground reference plane. The rear of the EUT was positioned flush with the backside of the table and directly over the LISNs. The power and I/O cables were routed over the edge of the table and bundled approximately 40cm from the ground plane. Support equipment was powered from a separate LISN.

Preliminary test performed on all modes in the Ear Force Stealth 700P RX. The worst case observed at 2DH1.

#### 4.6.1.1 Deviations

There were no deviations from this test methodology.

### 4.6.2 Test Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 8:** AC Conducted Emissions – Test Results


| <b>Test Conditions:</b> Conducted Measurement at Normal Conditions only |                 | August 12, 2017                   |
|-------------------------------------------------------------------------|-----------------|-----------------------------------|
| <b>Antenna Type:</b> Integrated                                         |                 | <b>Power Level:</b> See Test Plan |
| <b>AC Power:</b> 110 Vac/60 Hz at host device                           |                 | <b>Configuration:</b> Tabletop    |
| <b>Ambient Temperature:</b> 22° C                                       |                 | <b>Relative Humidity:</b> 42% RH  |
| Configuration                                                           | Frequency Range | Test Result                       |
| Line 1 (Hot)                                                            | 0.15 to 30 MHz  | Pass                              |
| Line 2 (Neutral)                                                        | 0.15 to 30 MHz  | Pass                              |

| SOP 2 Conducted Emissions                                                                                          |                               |         |           |       |          | Tracking # 31763314.001 Page 1 of 4 |                      |        |        |
|--------------------------------------------------------------------------------------------------------------------|-------------------------------|---------|-----------|-------|----------|-------------------------------------|----------------------|--------|--------|
| <b>EUT Name</b>                                                                                                    | Wireless Audio Headset        |         |           |       |          | <b>Date</b>                         | August 12, 2017      |        |        |
| <b>EUT Model</b>                                                                                                   | Ear Force Stealth 700P RX     |         |           |       |          | <b>Temp / Hum in</b>                | 22° C / 42% rh       |        |        |
| <b>EUT Serial</b>                                                                                                  | PP#2                          |         |           |       |          | <b>Temp / Hum out</b>               | N/A                  |        |        |
| <b>EUT Config.</b>                                                                                                 | TX mode                       |         |           |       |          | <b>Line AC / Freq</b>               | 110Vac / 60Hz (host) |        |        |
| <b>Standard</b>                                                                                                    | CFR47 Part 15.207 and RSS Gen |         |           |       |          | <b>RBW / VBW</b>                    | 9 kHz / 30 kHz       |        |        |
| <b>Lab/LISN</b>                                                                                                    | Lab #5 /Com-Power, Line 1     |         |           |       |          | <b>Performed by</b>                 | Jeremy Luong         |        |        |
| Frequency                                                                                                          | Raw                           | Limiter | Ins. Loss | Level | Detector | Line                                | Limit                | Margin | Result |
| MHz                                                                                                                | dBuV                          | dB      | dB        | dBuV  |          |                                     | dBuV                 | dB     |        |
| 0.154                                                                                                              | 39.88                         | 9.82    | 0.06      | 49.75 | QP       | Live                                | 65.80                | -16.04 | Pass   |
| 0.154                                                                                                              | 30.28                         | 9.82    | 0.06      | 40.15 | Ave      | Live                                | 55.80                | -15.64 | Pass   |
| 0.236                                                                                                              | 33.42                         | 9.83    | 0.04      | 43.29 | QP       | Live                                | 62.24                | -18.94 | Pass   |
| 0.236                                                                                                              | 18.38                         | 9.83    | 0.04      | 28.25 | Ave      | Live                                | 52.24                | -23.98 | Pass   |
| 0.307                                                                                                              | 31.63                         | 9.83    | 0.03      | 41.49 | QP       | Live                                | 60.05                | -18.56 | Pass   |
| 0.307                                                                                                              | 19.82                         | 9.83    | 0.03      | 29.68 | Ave      | Live                                | 50.05                | -20.37 | Pass   |
| 0.464                                                                                                              | 24.76                         | 9.84    | 0.03      | 34.63 | QP       | Live                                | 56.62                | -21.99 | Pass   |
| 0.464                                                                                                              | 16.74                         | 9.84    | 0.03      | 26.61 | Ave      | Live                                | 46.62                | -20.01 | Pass   |
| 0.569                                                                                                              | 27.46                         | 9.85    | 0.03      | 37.34 | QP       | Live                                | 56.00                | -18.66 | Pass   |
| 0.569                                                                                                              | 16.60                         | 9.85    | 0.03      | 26.48 | Ave      | Live                                | 46.00                | -19.52 | Pass   |
| 7.979                                                                                                              | 29.98                         | 9.96    | 0.03      | 39.97 | QP       | Live                                | 60.00                | -20.03 | Pass   |
| 7.979                                                                                                              | 11.71                         | 9.96    | 0.03      | 21.70 | Ave      | Live                                | 50.00                | -28.30 | Pass   |
| 8.450                                                                                                              | 30.14                         | 9.96    | 0.02      | 40.13 | QP       | Live                                | 60.00                | -19.87 | Pass   |
| 8.450                                                                                                              | 12.83                         | 9.96    | 0.02      | 22.82 | Ave      | Live                                | 50.00                | -27.18 | Pass   |
| Spec Margin = QP./Ave. - Limit, ± Uncertainty                                                                      |                               |         |           |       |          |                                     |                      |        |        |
| Combined Standard Uncertainty $u_c(y) = \pm 1.2$ dB Expanded Uncertainty $U = k u_c(y)$ $k = 2$ for 95% confidence |                               |         |           |       |          |                                     |                      |        |        |
| Notes: EUT was setup as table top equipment (worse case configuration).                                            |                               |         |           |       |          |                                     |                      |        |        |

## SOP 2 Conducted Emissions

Tracking # 31763314.001 Page 2 of 4

|                    |                               |                       |                      |
|--------------------|-------------------------------|-----------------------|----------------------|
| <b>EUT Name</b>    | Wireless Audio Headset        | <b>Date</b>           | August 12, 2017      |
| <b>EUT Model</b>   | Ear Force Stealth 700P RX     | <b>Temp / Hum in</b>  | 22° C / 42% rh       |
| <b>EUT Serial</b>  | PP#2                          | <b>Temp / Hum out</b> | N/A                  |
| <b>EUT Config.</b> | TX mode                       | <b>Line AC</b>        | 110Vac / 60Hz (host) |
| <b>Standard</b>    | CFR47 Part 15.207 and RSS Gen | <b>RBW / VBW</b>      | 9 kHz / 30 kHz       |
| <b>Lab/LISN</b>    | Lab #5 /Com-Power, Line 1     | <b>Performed by</b>   | Jeremy Luong         |

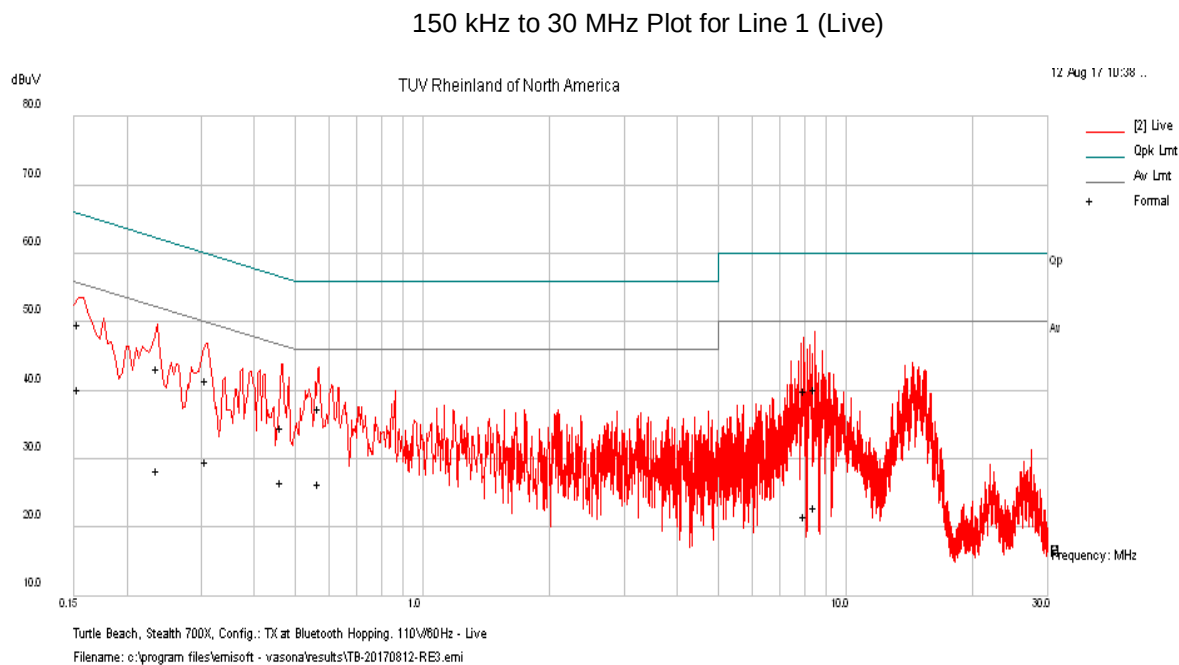


Note: Met FCC Class B limit.

| SOP 2 Conducted Emissions                                                                                          |                               |         |           |       |          | Tracking # 31763314.001 Page 3 of 4 |                      |        |        |
|--------------------------------------------------------------------------------------------------------------------|-------------------------------|---------|-----------|-------|----------|-------------------------------------|----------------------|--------|--------|
| <b>EUT Name</b>                                                                                                    | Wireless Audio Headset        |         |           |       |          | <b>Date</b>                         | August 12, 2017      |        |        |
| <b>EUT Model</b>                                                                                                   | Ear Force Stealth 700P RX     |         |           |       |          | <b>Temp / Hum in</b>                | 22° C / 42% rh       |        |        |
| <b>EUT Serial</b>                                                                                                  | PP#2                          |         |           |       |          | <b>Temp / Hum out</b>               | N/A                  |        |        |
| <b>EUT Config.</b>                                                                                                 | TX mode                       |         |           |       |          | <b>Line AC / Freq</b>               | 110Vac / 60Hz (host) |        |        |
| <b>Standard</b>                                                                                                    | CFR47 Part 15.207 and RSS Gen |         |           |       |          | <b>RBW / VBW</b>                    | 9 kHz / 30 kHz       |        |        |
| <b>Lab/LISN</b>                                                                                                    | Lab #5 /Com-Power, Line 2     |         |           |       |          | <b>Performed by</b>                 | Jeremy Luong         |        |        |
| Frequency                                                                                                          | Raw                           | Limiter | Ins. Loss | Level | Detector | Line                                | Limit                | Margin | Result |
| MHz                                                                                                                | dBuV                          | dB      | dB        | dBuV  |          |                                     | dBuV                 | dB     |        |
| 0.154                                                                                                              | 35.39                         | 9.82    | 0.06      | 45.26 | QP       | Neutral                             | 65.80                | -20.53 | Pass   |
| 0.154                                                                                                              | 24.88                         | 9.82    | 0.06      | 34.76 | Ave      | Neutral                             | 55.80                | -21.04 | Pass   |
| 0.262                                                                                                              | 27.32                         | 9.83    | 0.04      | 37.18 | QP       | Neutral                             | 61.36                | -24.18 | Pass   |
| 0.262                                                                                                              | 17.69                         | 9.83    | 0.04      | 27.56 | Ave      | Neutral                             | 51.36                | -23.80 | Pass   |
| 0.427                                                                                                              | 23.19                         | 9.84    | 0.03      | 33.06 | QP       | Neutral                             | 57.32                | -24.26 | Pass   |
| 0.427                                                                                                              | 10.59                         | 9.84    | 0.03      | 20.46 | Ave      | Neutral                             | 47.32                | -26.86 | Pass   |
| 0.632                                                                                                              | 21.76                         | 9.85    | 0.03      | 31.64 | QP       | Neutral                             | 56.00                | -24.36 | Pass   |
| 0.632                                                                                                              | 9.42                          | 9.85    | 0.03      | 19.30 | Ave      | Neutral                             | 46.00                | -26.70 | Pass   |
| 7.740                                                                                                              | 26.16                         | 9.96    | 0.03      | 36.14 | QP       | Neutral                             | 60.00                | -23.86 | Pass   |
| 7.740                                                                                                              | 6.91                          | 9.96    | 0.03      | 16.90 | Ave      | Neutral                             | 50.00                | -33.10 | Pass   |
| 8.211                                                                                                              | 26.64                         | 9.96    | 0.03      | 36.63 | QP       | Neutral                             | 60.00                | -23.37 | Pass   |
| 8.211                                                                                                              | 8.60                          | 9.96    | 0.03      | 18.59 | Ave      | Neutral                             | 50.00                | -31.41 | Pass   |
| 8.495                                                                                                              | 21.26                         | 9.97    | 0.02      | 31.24 | QP       | Neutral                             | 60.00                | -28.76 | Pass   |
| 8.495                                                                                                              | 5.58                          | 9.97    | 0.02      | 15.56 | Ave      | Neutral                             | 50.00                | -34.44 | Pass   |
| Spec Margin = QP./Ave. - Limit, ± Uncertainty                                                                      |                               |         |           |       |          |                                     |                      |        |        |
| Combined Standard Uncertainty $u_c(y) = \pm 1.2$ dB Expanded Uncertainty $U = k u_c(y)$ $k = 2$ for 95% confidence |                               |         |           |       |          |                                     |                      |        |        |
| Notes: EUT was setup as table top equipment (worse case configuration).                                            |                               |         |           |       |          |                                     |                      |        |        |

**SOP 2 Conducted Emissions**

Tracking # 31763314.001 Page 4 of 4

|                    |                               |                       |                      |
|--------------------|-------------------------------|-----------------------|----------------------|
| <b>EUT Name</b>    | Wireless Audio Headset        | <b>Date</b>           | August 12, 2017      |
| <b>EUT Model</b>   | Ear Force Stealth 700P RX     | <b>Temp / Hum in</b>  | 22° C / 42% rh       |
| <b>EUT Serial</b>  | PP#2                          | <b>Temp / Hum out</b> | N/A                  |
| <b>EUT Config.</b> | TX mode                       | <b>Line AC</b>        | 110Vac / 60Hz (host) |
| <b>Standard</b>    | CFR47 Part 15.207 and RSS Gen | <b>RBW / VBW</b>      | 9 kHz / 30 kHz       |
| <b>Lab/LISN</b>    | Lab #5 /Com-Power, Line 2     | <b>Performed by</b>   | Jeremy Luong         |

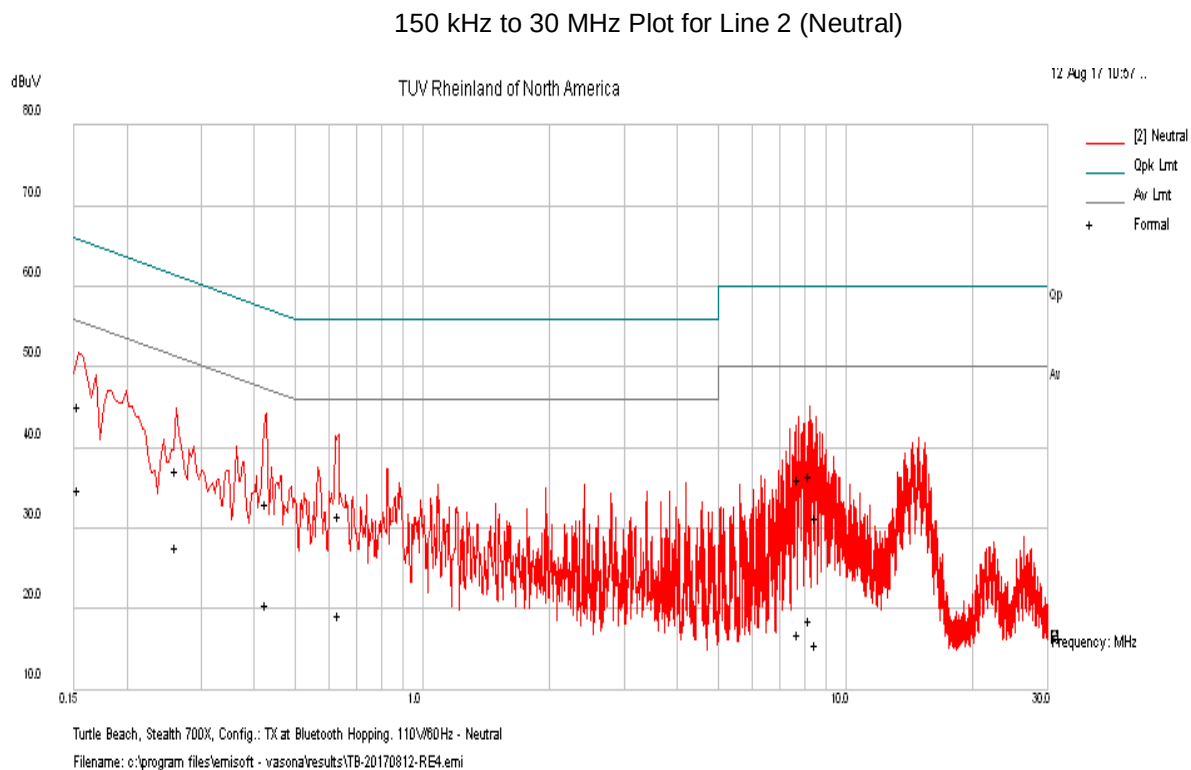

Note: Met FCC Class B Limit.

## 5 Test Equipment Use List

### 5.1 Equipment List

| Equipment         | Manufacturer       | Model #       | Serial/Inst # | Last Cal<br>mm/dd/yyyy | Next Cal<br>mm/dd/yyyy |
|-------------------|--------------------|---------------|---------------|------------------------|------------------------|
| Bilog Antenna     | Sunol Sciences     | JB3           | A102606       | 06/15/2016             | 06/15/2018             |
| Horn Antenna      | Sunol Science      | DRH118        | A040806       | 11/11/2016             | 11/11/2018             |
| Horn Antenna      | Com-Power          | AHA-840       | 105005        | 05/26/2017             | 05/26/2019             |
| Loop Antenna      | EMCO               | 6502          | 9110-2683     | 07/20/2017             | 07/20/2019             |
| Spectrum Analyzer | Rohde & Schwarz    | FSL6          | 100169        | 01/13/2017             | 01/13/2018             |
| Spectrum Analyzer | Agilent            | N9038A        | MY552260210   | 01/16/2017             | 01/16/2018             |
| Spectrum Analyzer | Rohde Schwarz      | ESIB40        | 832427/002    | 01/16/2017             | 01/16/2018             |
| Spectrum Analyzer | Rohde Schwarz      | FSV40         | 1321.3008K40  | 09/19/2017             | 09/19/2018             |
| Amplifier         | Sonoma Instruments | 310           | 165516        | 01/19/2017             | 01/19/2018             |
| Amplifier         | Miteq              | TTA1800-30-HG | 2020728       | 11/12/2016             | 11/12/2017             |
| Amplifier         | Rohde & Schwarz    | TS-PR26       | 100011        | 11/04/2017             | 11/04/2018             |
| Amplifier         | Rohde & Schwarz    | TS-PR40       | 100012        | 08/02/2017             | 08/02/2018             |
| Power Meter       | Agilent            | E4418B        | MY45103902    | 01/11/2017             | 01/11/2018             |
| Power Sensor      | Hewlett Packard    | 8482A         | 1925A04647    | 01/01/2017             | 01/01/2018             |
| Thermometer       | Fluke              | 52II          | 88650033      | 11/04/2016             | 11/04/2017             |
| Thermo Chamber    | Espec              | BTZ-133       | 0613436       | 06/01/2017             | 06/01/2018             |
| Multimeter        | Fluke              | 177           | 92780312      | 01/11/2017             | 01/11/2018             |
| DC Power Supply   | Agilent            | E3634A        | MY400004331   | 01/12/2017             | 01/12/2018             |
| Notch Filter      | Micro-Tronics      | BRM50702      | 037           | 01/19/2017             | 01/19/2018             |
| Signal Generator  | Anritsu            | MG3694A       | 42803         | 01/13/2017             | 01/13/2018             |
| Signal Generator  | Rohde & Schwarz    | SMF100A       | 1167.0000K02  | 09/19/2017             | 09/19/2018             |
| Signal Generator  | Rohde & Schwarz    | SMBV100A      | 1407.6004K02  | 09/19/2017             | 09/19/2018             |
| Power Sensors     | Rohde & Schwarz    | OSP120        | 1520.9010.02  | 09/19/2017             | 09/19/2018             |

\* Calibration of equipment past due for re-calibration will be performed expeditiously. If any equipment is found to be out of tolerance at that time, affected customers will be notified accordingly.

## 6 EMC Test Plan

### 6.1 Introduction

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

### 6.2 Customer

**Table 9:** Customer Information

|                         |                                  |
|-------------------------|----------------------------------|
| <b>Company Name</b>     | Voyetra Turtle Beach, Inc.       |
| <b>Address</b>          | 100 Summit Lake Drive, Suite 100 |
| <b>City, State, Zip</b> | Valhalla, New York 10595         |
| <b>Country</b>          | U.S.A.                           |

**Table 10:** Technical Contact Information

|               |                   |
|---------------|-------------------|
| <b>Name</b>   | Tim Blaney        |
| <b>E-mail</b> | tim@commcepts.net |
| <b>Phone</b>  | (530) 277-3482    |

### 6.3 Equipment Under Test (EUT)

**Table 11:** EUT Specifications

| EUT Specifications                                                                                                                                          |                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Dimensions                                                                                                                                                  | 225mm (8.9") x 252mm (9.9") x 115mm (4.5")                                          |
| DC Input                                                                                                                                                    | Headset Input Voltage: 3.7 Vdc (battery)                                            |
| Environment                                                                                                                                                 | Indoor                                                                              |
| Operating Temperature Range:                                                                                                                                | 0 to 50 degrees C                                                                   |
| Multiple Feeds:                                                                                                                                             | <input type="checkbox"/> Yes and how many<br><input checked="" type="checkbox"/> No |
| Product Marketing Name (PMN)                                                                                                                                | Ear Force Stealth 700P RX                                                           |
| Hardware Version Identification Number (HVIN)                                                                                                               | Stealth 700P RX                                                                     |
| Firmware Version Identification Number (FVIN)                                                                                                               | 1.0.6                                                                               |
| Bluetooth Radio                                                                                                                                             |                                                                                     |
| Operating Mode                                                                                                                                              | BDR, EDR, and BLE                                                                   |
| Transmitter Frequency Band                                                                                                                                  | 2402 MHz to 2480 MHz                                                                |
| Operating Bandwidth                                                                                                                                         | 1 MHz                                                                               |
| Max. Power Output                                                                                                                                           | 0.78 dBm                                                                            |
| Power Setting @ Operating Channel                                                                                                                           | Fixed                                                                               |
| Antenna Type                                                                                                                                                | 1 integrated PCB antenna                                                            |
| Antenna Gain                                                                                                                                                | 2.8 dBi                                                                             |
| Modulation Type                                                                                                                                             | GFSK, $\pi/4$ -DQPSK and 8DPSK                                                      |
| Data Rate                                                                                                                                                   | 1 Mbps, 2 Mbps and 3 Mbps                                                           |
| <b>Note:</b> This report only documents the Bluetooth radio characteristics for the 2402 - 2480 MHz band and the RF output power is fixed for this chipset. |                                                                                     |

**Table 12:** Antenna Information

| Number    | Antenna Type   | Description               | Max Gain (dBi) |
|-----------|----------------|---------------------------|----------------|
| Antenna 1 | Integrated PCB | Max. peak gain at 2.4 GHz | +2.8           |

**Table 13:** Interface Specifications

| Interface Type | Cabled with what type of cable? | Is the cable shielded?                 | Maximum potential length of the cable?          | Metallic (M), Coax (C), Fiber (F), or Not Applicable? |
|----------------|---------------------------------|----------------------------------------|-------------------------------------------------|-------------------------------------------------------|
| USB            | USB                             | <input checked="" type="checkbox"/> No | <input checked="" type="checkbox"/> Metric: 1 m | <input checked="" type="checkbox"/> M                 |

**Table 14:** Supported Equipment

| Equipment          | Manufacturer | Model    | Serial      | Used for                     |
|--------------------|--------------|----------|-------------|------------------------------|
| Laptop             | Dell         | Latitude | 35521341769 | Setup EUT operating channel  |
| Interface Board    | Turtle Beach | N.A      | N.A         | Access 2.4 GHz radio chipset |
| <b>Note:</b> None. |              |          |             |                              |

**Table 15:** Description of Sample used for Testing

| Device                                                                                                                                                                                                          | Serial | RF Connection             | CFR47 Part 15.247                                                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|---------------------------|-------------------------------------------------------------------------------|
| Ear Force Stealth 700P RX                                                                                                                                                                                       | PP #2  | Integrated Antenna        | TX Emissions, Rad. Band-edge.                                                 |
|                                                                                                                                                                                                                 | PP #1  | Direct via SMA Connection | Transmit Power, Occupied Bandwidth, Out of Band Emission, Hopping Requirement |
|                                                                                                                                                                                                                 | PP #3  | Integrated Antenna        | AC Conducted Emission <sup>(*)</sup>                                          |
| <b>Note:</b> (*) Performed on Model Stealth 700P RX; similar model.<br>Both Stealth 700X and Stealth 700P RX utilize the same Bluetooth chipset and they both have the same electrical design and RF filtering. |        |                           |                                                                               |

**Table 16:** Description of Test Configuration used for Radiated Measurement.

| Device                                                                                                                                                        | Antenna    | Mode     | Setup Photo (X-Axis) | Setup Photo (Y-Axis) | Setup Photo (Z-Axis) |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------|----------------------|----------------------|----------------------|
| Ear Force Stealth 700P RX                                                                                                                                     | Integrated | Transmit | N/A                  | EUT upright          | N/A                  |
| <b>Note:</b> The Ear Force Stealth 700P RX is designed and intended to be worn upright. All emission scans performed on the Y-Axis; worst case configuration. |            |          |                      |                      |                      |

**Table 17:** Final Test Mode for 2402 MHz to 2480MHz Channels

| Test                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 802.11a                                                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
| Occupied Bandwidth<br>CFR 47 15.247(a1), RSS Gen Sect. 4.4.                                                                                                                                                                                                                                                                                                                                                                                                                   | 2402, 2442, 2480 MHz at BDR, EDR, and BLE                        |
| Output Power<br>CFR47 15.247 (b1), RSS 210 Sect. A.8.1                                                                                                                                                                                                                                                                                                                                                                                                                        | 2402, 2442, 2480 MHz at BDR, EDR, and BLE                        |
| Out of Band Emission<br>CFR47 15.247 (d), RSS 210 Sect. A.8.5                                                                                                                                                                                                                                                                                                                                                                                                                 | 2402, 2442, 2480 MHz at BDR, EDR, and BLE                        |
| Hopping Requirements<br>CFR47 15.247 (a1), RSS 210 Sect. A.8.1                                                                                                                                                                                                                                                                                                                                                                                                                | 2402, 2442, 2480 MHz at BDR and EDR                              |
| Band-Edge (Radiated)<br>FCC Part 15.205, 15.209                                                                                                                                                                                                                                                                                                                                                                                                                               | 2402, 2480 MHz at EDR and BLE                                    |
| Transmitted Spurious Emission<br>(30 MHz – 1GHz)<br>FCC Part 15.205, 15.209                                                                                                                                                                                                                                                                                                                                                                                                   | 2442 MHz at 2DH1 (Worst Case)                                    |
| Transmitted Spurious Emission<br>(Above 1GHz)<br>FCC Part 15.205, 15.209                                                                                                                                                                                                                                                                                                                                                                                                      | 2402, 2442, 2480 MHz at 2DH1 (Worst Case)                        |
| AC Conducted Emission<br>FCC Part 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                      | Prescan both hopping mode and BLE.<br>Perform on the worst case. |
| <b>Note:</b> <ol style="list-style-type: none"> <li>1. Pretest showed 2DH1 was the worst case configuration.</li> <li>2. All radiated emission tests were performed on the Y-Axis.</li> <li>3. All tests were pre-scanned for worst case configuration before final testing.</li> <li>4. Since Ear Force Stealth 700P RX supports both BLE and FHSS Bluetooth, Ear Force Stealth 700P RX will demonstrate compliance to the rules required for DTS per KDB 453039.</li> </ol> |                                                                  |

## 6.4 Test Specifications

Testing requirements

**Table 18:** Test Specifications

| Emissions and Immunity   |             |
|--------------------------|-------------|
| Standard                 | Requirement |
| CFR 47 Part 15.247: 2017 | All         |
| RSS 247 Issue 2, 2017    | All         |

**END OF REPORT**