**CETECOMTM****CETECOM ICT Services**

consulting - testing - certification >>>

TEST REPORT

Test Report No.: 1-9470/15-01-02

Deutsche
Akkreditierungsstelle
D-PL-12076-01-00

Testing Laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 – 10

66117 Saarbrücken/Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.cetecom.com>e-mail: ict@cetecom.com**Accredited Test Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-00

Applicant

Coppernic SAS

185 avenue archimede

13100 Aix-en-Provence, Cedex 3/Frankreich

Phone: ---

Contact: Philippe Porte

e-mail: Philippe.Porte@coppernic.fr

Phone: +33 4 42 65 25 77

Fax: ---

Manufacturer

Coppernic SAS

185 avenue archimede

13100 Aix-en-Provence, Cedex 3/Frankreich

Test Item

Kind of test item: RFID Module
Device type: portable device
Model name: **Motorola Workabout Pro4**
S/N serial number: WPQACE240073C1
FCC-ID: XGKSE3210
IC: 8402A-SE3210
Hardware status: Model SE3210
Software status: XW2DMT
Frequency: WLAN 2.4 and 5 GHz
Antenna: integrated antenna
Battery option: 3.7V / 4400 mAh
Accessories: ---
Test sample status: identical prototype
Exposure category: general population / uncontrolled environment



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test Report authorised:

cn=Oleksandr Hnatovskiy, o=CETECOM
ICT, ou=HNA-100728,
email=Oleksandr.Hnatovskiy@cetecom.
com, c=DE
2015.03.09 09:10:40 +01'00'

Oleksandr Hnatovskiy
Radio Communications & EMC

Test performed:

cn=Marco Scigliano, o=CETECOM ICT
Services GmbH, ou=SCI-120430,
email=Marco.Scigliano@Cetecom.com,
c=DE
2015.03.09 09:08:55 +01'00'

Marco Scigliano
Radio Communications & EMC

1 Table of contents

1	Table of contents.....	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	RF exposure limits	4
3	Test Environment	4
4	Test Set-up.....	5
4.1	Measurement system.....	5
4.1.1	System Description.....	5
4.1.2	Test environment.....	6
4.1.3	Probe description.....	6
4.1.4	Phantom description.....	7
4.1.5	Device holder description	7
4.1.6	Laptop Extension Kit for Device holder	7
4.1.7	Scanning procedure	8
4.1.8	Spatial Peak SAR Evaluation	9
4.1.9	Data Storage and Evaluation.....	10
4.1.10	Tissue simulating liquids: dielectric properties	12
4.1.11	Tissue simulating liquids: parameters	13
4.1.12	Measurement uncertainty evaluation for SAR test.....	14
4.1.13	Measurement uncertainty evaluation for System Check.....	19
4.1.14	System check	21
4.1.15	System check procedure	22
4.1.16	System validation	23
5	SAR test results.....	24
5.1	Results overview	24
5.2	General description of test procedures	24
6	Test equipment and ancillaries used for tests.....	25
7	Observations	25
Annex A:	System performance check.....	26
Annex B:	DASY5 measurement results.....	30
Annex B.1:	WLAN 2450MHz	30
Annex B.2:	WLAN 5GHz.....	38
Annex B.3:	Liquid depth.....	46
Annex C:	Photo documentation.....	47
Annex D:	Calibration parameters.....	54
Annex E:	Document History.....	55
Annex F:	Further Information	55

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

2.2 Application details

Date of receipt of order:	2015-02-25
Date of receipt of test item:	2015-02-25
Start of test:	2015-02-27
End of test:	2015-03-04
Person(s) present during the test:	

2.3 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain and Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Table 1: RF exposure limits

The limit applied in this test report is shown in bold letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

3 Test Environment


Ambient temperature:	20 – 24 °C
Tissue Simulating liquid:	20 – 24 °C
Relative humidity content:	40 – 50 %
Air pressure:	not relevant for this kind of testing
Power supply:	230 V / 50 Hz

Exact temperature values for each test are shown in the table(s) under 7.1 and/or on the measurement plots.

4 Test Set-up

4.1 Measurement system

4.1.1 System Description

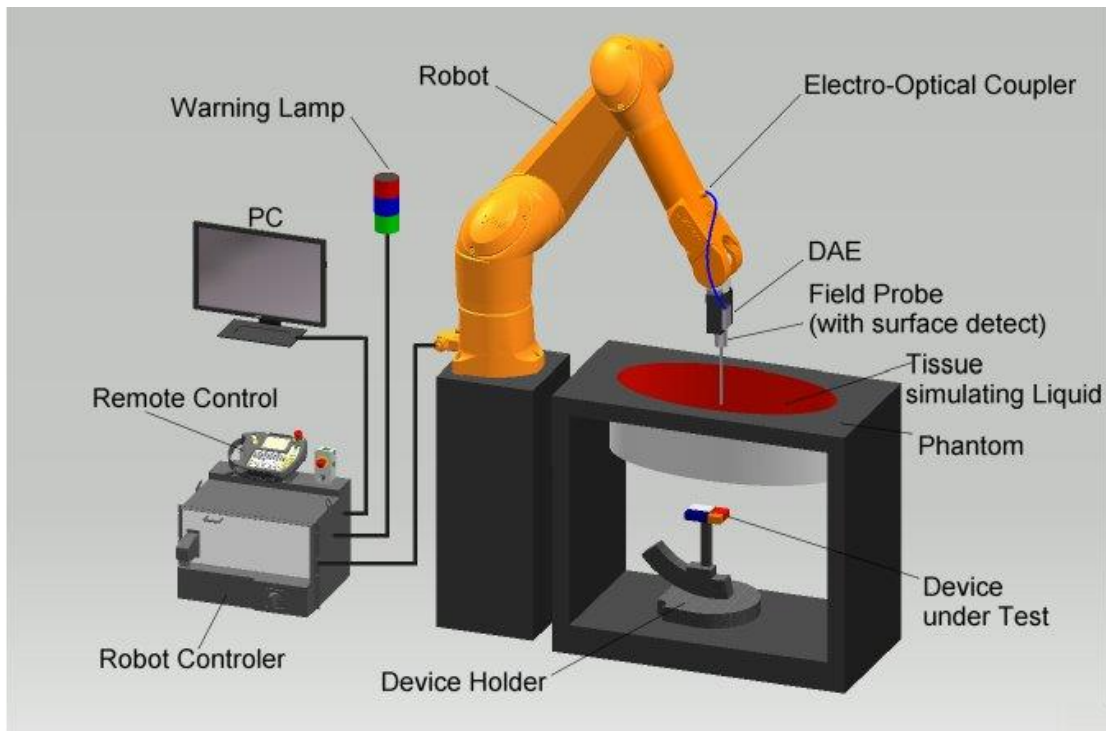

- The DASY system for performing compliance tests consists of the following items:
- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY measurement server.
- The DASY measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DASY software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

4.1.2 Test environment

The DASY measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m³, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m² array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.

The system allows the measurement of SAR values larger than 0.005 mW/g.

4.1.3 Probe description

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements	
Technical data according to manufacturer information	
Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to >6 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic range	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically <1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20mm) Tip length: 2.5 mm (Body: 12mm) Typical distance from probe tip to dipole centers: 1mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

4.1.4 Phantom description

The used ELI4 Phantom meets the requirements specified in KDB865664 D01 for Specific Absorption Rate (SAR) measurements. The phantom consists of a fibreglass shell integrated in a wooden table.



The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6 GHz. ELI4 is fully compatible with the standard IEC 62209-2 and all known tissue simulating liquids.

4.1.5 Device holder description




The DASY device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.

Larger DUT's (e.g. notebooks) cannot be tested using the device holder without the extension kit described below.

4.1.6 Laptop Extension Kit for Device holder

SPEAG released a simple but effective extension for their Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc).

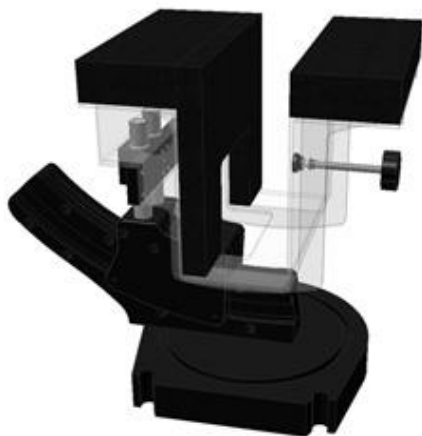

The extension is lightweight and made of POM, PET-G acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner.

4.1.7 Scanning procedure

- The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.
- The „reference“ and „drift“ measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. +/- 5 %.
- The „surface check“ measurement tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The „area scan“ measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension. If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in annex 2.
- A „7x7x7 zoom scan“ measures the field in a volume around the 2D peak SAR value acquired in the previous „coarse“ scan. This is a fine 7x7 grid where the robot additionally moves the probe in 7 steps along the z-axis away from the bottom of the Phantom. Grid spacing for the cube measurement is 5 mm / 4 mm in x and y-direction and 5 mm / 2 mm in z-direction. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in annex 2. Test results relevant for the specified standard (see section 3) are shown in table form in section 7.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in annex 2.

4.1.8 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 7 x 7 x 7 points. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

4.1.9 Data Storage and Evaluation

Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4", ".DA5x". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with V_i = compensated signal of channel i (i = x, y, z)
 U_i = input signal of channel i (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

with V_i = compensated signal of channel i (i = x, y, z)
 $Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

4.1.10 Tissue simulating liquids: dielectric properties

The following materials are used for producing the tissue-equivalent materials.

(Liquids used for tests described in section 7. are marked with ☒) :

Ingredients (% of weight)	Frequency (MHz)								
	☐ 450	☐ 750	☐ 835	☐ 900	☐ 1450	☐ 1750	☐ 1900	☒ 2450	☒ 5000
frequency band									
Water	51.16	51.7	52.4	56.0	71.40	71.45	71.56	71.65	64 - 78
Salt (NaCl)	1.49	0.9	1.40	0.76	0.55	0.5	0.39	0.3	2 - 3
Sugar	46.78	47.2	45.0	41.76	0.0	0.0	0.0	0.0	0.0
HEC	0.52	0.0	1.0	1.21	0.0	0.0	0.0	0.0	0.0
Bactericide	0.05	0.1	0.1	0.27	0.1	0.1	0.1	0.1	0.0
Tween 20	0.0	0.0	0.0	0.0	27.95	27.95	27.95	27.95	0.0
Emulsifiers	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	9 - 15
Mineral Oil	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	11 - 18

Table 2: Body tissue dielectric properties

Salt: 99+% Pure Sodium Chloride

Water: De-ionized, 16MΩ+ resistivity

Sugar: 98+% Pure Sucrose

HEC: Hydroxyethyl Cellulose

Tween 20: Polyoxyethylene (20) sorbitan monolaurate

4.1.11 Tissue simulating liquids: parameters

Liquid MSL	Freq. (MHz)	Target body tissue		Measurement body tissue					Measurement date
		Permittivity	Conductivity (S/m)	Permittivity	Dev. %	Conductivity		Dev. %	
						ε"	(S/m)		
2450 2600	2412	52.75	1.91	51.8	-1.9%	14.31	1.92	0.3%	2015-03-02
	2437	52.72	1.94	51.6	-2.0%	14.39	1.95	0.7%	
	2442	52.71	1.94	51.6	-2.1%	14.40	1.96	0.7%	
	2450	52.70	1.95	51.6	-2.0%	14.44	1.97	0.9%	
	2462	52.68	1.97	51.6	-2.0%	14.51	1.99	1.0%	
	2472	52.67	1.98	51.6	-2.0%	14.57	2.00	1.1%	
	2502	52.63	2.02	51.5	-2.2%	14.55	2.02	0.1%	
	2510	52.62	2.04	51.4	-2.3%	14.56	2.03	-0.1%	
	2535	52.59	2.07	51.3	-2.5%	14.54	2.05	-1.0%	
	2560	52.56	2.11	51.3	-2.5%	14.66	2.09	-0.9%	
	2568	52.55	2.12	51.2	-2.5%	14.72	2.10	-0.7%	
	2600	52.51	2.16	51.1	-2.7%	14.78	2.14	-1.2%	
5GHz	5180	49.04	5.28	50.6	3.1%	17.95	5.17	-2.0%	2015-03-03
	5200	49.01	5.30	50.5	3.0%	17.92	5.18	-2.2%	
	5220	48.99	5.32	50.5	3.0%	17.97	5.22	-2.0%	
	5240	48.96	5.35	50.4	2.9%	17.97	5.24	-2.0%	
	5260	48.93	5.37	50.3	2.9%	18.00	5.27	-1.9%	
	5280	48.91	5.39	50.3	2.9%	18.08	5.31	-1.5%	
	5300	48.88	5.42	50.3	3.0%	18.07	5.33	-1.6%	
	5320	48.85	5.44	50.3	3.0%	18.09	5.35	-1.6%	
	5500	48.61	5.65	50.0	2.9%	18.24	5.58	-1.2%	
	5520	48.58	5.67	50.0	2.9%	18.32	5.63	-0.8%	
	5540	48.55	5.70	49.9	2.8%	18.35	5.65	-0.7%	
	5560	48.53	5.72	50.0	2.9%	18.41	5.69	-0.5%	
	5580	48.50	5.74	49.9	2.9%	18.34	5.69	-0.9%	
	5600	48.47	5.77	49.9	2.9%	18.40	5.73	-0.6%	
	5620	48.44	5.79	49.8	2.7%	18.40	5.75	-0.7%	
	5640	48.42	5.81	49.8	2.8%	18.42	5.78	-0.6%	
	5660	48.39	5.84	49.7	2.7%	18.45	5.81	-0.5%	
	5680	48.36	5.86	49.7	2.8%	18.52	5.85	-0.1%	
	5700	48.34	5.88	49.7	2.8%	18.54	5.88	-0.1%	
	5745	48.27	5.94	49.5	2.6%	18.50	5.91	-0.4%	
	5765	48.25	5.96	49.5	2.6%	18.57	5.95	-0.1%	
	5785	48.22	5.98	49.5	2.7%	18.63	5.99	0.2%	
	5800	48.20	6.00	49.5	2.7%	18.66	6.02	0.3%	
	5805	48.20	6.00	49.5	2.7%	18.68	6.03	0.5%	
	5825	48.20	6.00	49.5	2.6%	18.62	6.03	0.6%	

Table 3: Parameter of the body tissue simulating liquid

Note: The dielectric properties have been measured using the contact probe method at 22°C.

4.1.12 Measurement uncertainty evaluation for SAR test

DASY5 Uncertainty Budget										
According to IEEE 1528/2003 and IEC 62209-1 for the 30 MHz - 3 GHz range										
Source of uncertainty	Uncertainty Value ± %		Probability Distribution	Divisor	c _i (1g)	c _i (10g)	Standard Uncertainty		v _i ² or v _{eff}	
							± %, (1g)	± %, (10g)		
Measurement System										
Probe calibration	± 6.0 %		Normal	1	1	1	± 6.0 %		± 6.0 %	∞
Axial isotropy	± 4.7 %		Rectangular	√ 3	0.7	0.7	± 1.9 %		± 1.9 %	∞
Hemispherical isotropy	± 9.6 %		Rectangular	√ 3	0.7	0.7	± 3.9 %		± 3.9 %	∞
Boundary effects	± 1.0 %		Rectangular	√ 3	1	1	± 0.6 %		± 0.6 %	∞
Probe linearity	± 4.7 %		Rectangular	√ 3	1	1	± 2.7 %		± 2.7 %	∞
System detection limits	± 1.0 %		Rectangular	√ 3	1	1	± 0.6 %		± 0.6 %	∞
Readout electronics	± 0.3 %		Normal	1	1	1	± 0.3 %		± 0.3 %	∞
Response time	± 0.8 %		Rectangular	√ 3	1	1	± 0.5 %		± 0.5 %	∞
Integration time	± 2.6 %		Rectangular	√ 3	1	1	± 1.5 %		± 1.5 %	∞
RF ambient noise	± 3.0 %		Rectangular	√ 3	1	1	± 1.7 %		± 1.7 %	∞
RF ambient reflections	± 3.0 %		Rectangular	√ 3	1	1	± 1.7 %		± 1.7 %	∞
Probe positioner	± 0.4 %		Rectangular	√ 3	1	1	± 0.2 %		± 0.2 %	∞
Probe positioning	± 2.9 %		Rectangular	√ 3	1	1	± 1.7 %		± 1.7 %	∞
Max.SAR evaluation	± 1.0 %		Rectangular	√ 3	1	1	± 0.6 %		± 0.6 %	∞
Test Sample Related										
Device positioning	± 2.9 %		Normal	1	1	1	± 2.9 %		± 2.9 %	145
Device holder uncertainty	± 3.6 %		Normal	1	1	1	± 3.6 %		± 3.6 %	5
Power drift	± 5.0 %		Rectangular	√ 3	1	1	± 2.9 %		± 2.9 %	∞
Phantom and Set-up										
Phantom uncertainty	± 4.0 %		Rectangular	√ 3	1	1	± 2.3 %		± 2.3 %	∞
Liquid conductivity (target)	± 5.0 %		Rectangular	√ 3	0.64	0.43	± 1.8 %		± 1.2 %	∞
Liquid conductivity (meas.)	± 5.0 %		Rectangular	√ 3	0.64	0.43	± 1.8 %		± 1.2 %	∞
Liquid permittivity (target)	± 5.0 %		Rectangular	√ 3	0.6	0.49	± 1.7 %		± 1.4 %	∞
Liquid permittivity (meas.)	± 5.0 %		Rectangular	√ 3	0.6	0.49	± 1.7 %		± 1.4 %	∞
Combined Std.							± 11.1 %		± 10.8 %	387
Expanded Std.							± 22.1 %		± 21.6 %	

Table 4: Measurement uncertainties

Worst-Case uncertainty budget for DASY5 assessed according to IEEE 1528/2003.

The budget is valid for 2G and 3G communication signals and frequency range 300MHz - 3 GHz.

For these conditions it represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerable smaller.

Relative DASY5 Uncertainty Budget for SAR Tests														
According to IEEE 1528/2013 and IEC62209/2011 for the 0.3 - 3GHz range														
Error Description	Uncertainty Value ± %			Probability Distribution	Divisor	c _i (1g)	c _i (10g)	Standard Uncertainty				v _i ² or v _{eff}		
								± %, (1g)		± %, (10g)				
Measurement System														
Probe calibration	±	6.0	%	Normal	1	1	1	±	6.0	%	±	6.0	%	∞
Axial isotropy	±	4.7	%	Rectangular	√ 3	0.7	0.7	±	1.9	%	±	1.9	%	∞
Hemispherical isotropy	±	9.6	%	Rectangular	√ 3	0.7	0.7	±	3.9	%	±	3.9	%	∞
Boundary effects	±	1.0	%	Rectangular	√ 3	1	1	±	0.6	%	±	0.6	%	∞
Probe linearity	±	4.7	%	Rectangular	√ 3	1	1	±	2.7	%	±	2.7	%	∞
System detection limits	±	1.0	%	Rectangular	√ 3	1	1	±	0.6	%	±	0.6	%	∞
Modulation Response	±	2.4	%	Rectangular	√ 3	1	1	±	1.4	%	±	1.4	%	∞
Readout electronics	±	0.3	%	Normal	1	1	1	±	0.3	%	±	0.3	%	∞
Response time	±	0.8	%	Rectangular	√ 3	1	1	±	0.5	%	±	0.5	%	∞
Integration time	±	2.6	%	Rectangular	√ 3	1	1	±	1.5	%	±	1.5	%	∞
RF ambient noise	±	3.0	%	Rectangular	√ 3	1	1	±	1.7	%	±	1.7	%	∞
RF ambient reflections	±	3.0	%	Rectangular	√ 3	1	1	±	1.7	%	±	1.7	%	∞
Probe positioner	±	0.4	%	Rectangular	√ 3	1	1	±	0.2	%	±	0.2	%	∞
Probe positioning	±	2.9	%	Rectangular	√ 3	1	1	±	1.7	%	±	1.7	%	∞
Max. SAR evaluation	±	2.0	%	Rectangular	√ 3	1	1	±	1.2	%	±	1.2	%	∞
Test Sample Related														
Device positioning	±	2.9	%	Normal	1	1	1	±	2.9	%	±	2.9	%	145
Device holder uncertainty	±	3.6	%	Normal	1	1	1	±	3.6	%	±	3.6	%	5
Power drift	±	5.0	%	Rectangular	√ 3	1	1	±	2.9	%	±	2.9	%	∞
Phantom and Set-up														
Phantom uncertainty	±	6.1	%	Rectangular	√ 3	1	1	±	3.5	%	±	3.5	%	∞
SAR correction	±	1.9	%	Rectangular	√ 3	1	0.84	±	1.1	%	±	0.9	%	∞
Liquid conductivity (meas.)	±	5.0	%	Rectangular	√ 3	0.78	0.71	±	2.3	%	±	2.0	%	∞
Liquid permittivity (meas.)	±	5.0	%	Rectangular	√ 3	0.26	0.26	±	0.8	%	±	0.8	%	∞
Temp. Unc. - Conductivity	±	3.4	%	Rectangular	√ 3	0.78	0.71	±	1.5	%	±	1.4	%	∞
Temp. Unc. - Permittivity	±	0.4	%	Rectangular	√ 3	0.23	0.26	±	0.1	%	±	0.1	%	∞
Combined Uncertainty								± 11.3 %		± 11.3 %		330		
Expanded Std. Uncertainty								± 22.7 %		± 22.5 %				

Table 5: Measurement uncertainties

Worst-Case uncertainty budget for DASY5 assessed according to IEEE 1528/2013 and IEC 62209-1/2011 standards. The budget is valid for the frequency range 300MHz -3 GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerable smaller.

DASY5 Uncertainty Budget														
According to IEC 62209-2/2010 for the 30 MHz - 6 GHz range														
Source of uncertainty	Uncertainty Value ± %			Probability Distribution	Divisor	c _i (1g)	c _i (10g)	Standard Uncertainty				v _i ² or v _{eff}		
								± %, (1g)		± %, (10g)				
Measurement System														
Probe calibration	±	6.6	%	Normal	1	1	1	±	6.6	%	±	6.6	%	∞
Axial isotropy	±	4.7	%	Rectangular	√ 3	0.7	0.7	±	1.9	%	±	1.9	%	∞
Hemispherical isotropy	±	9.6	%	Rectangular	√ 3	0.7	0.7	±	3.9	%	±	3.9	%	∞
Boundary effects	±	2.0	%	Rectangular	√ 3	1	1	±	1.2	%	±	1.2	%	∞
Probe linearity	±	4.7	%	Rectangular	√ 3	1	1	±	2.7	%	±	2.7	%	∞
System detection limits	±	1.0	%	Rectangular	√ 3	1	1	±	0.6	%	±	0.6	%	∞
Modulation Response	±	2.4	%	Rectangular	√ 3	1	1	±	1.4	%	±	1.4	%	∞
Readout electronics	±	0.3	%	Normal	1	1	1	±	0.3	%	±	0.3	%	∞
Response time	±	0.8	%	Rectangular	√ 3	1	1	±	0.5	%	±	0.5	%	∞
Integration time	±	2.6	%	Rectangular	√ 3	1	1	±	1.5	%	±	1.5	%	∞
RF ambient noise	±	3.0	%	Rectangular	√ 3	1	1	±	1.7	%	±	1.7	%	∞
RF ambient reflections	±	3.0	%	Rectangular	√ 3	1	1	±	1.7	%	±	1.7	%	∞
Probe positioner	±	0.8	%	Rectangular	√ 3	1	1	±	0.5	%	±	0.5	%	∞
Probe positioning	±	6.7	%	Rectangular	√ 3	1	1	±	3.9	%	±	3.9	%	∞
Post-processing	±	4.0	%	Rectangular	√ 3	1	1	±	2.3	%	±	2.3	%	∞
Test Sample Related														
Device positioning	±	2.9	%	Normal	1	1	1	±	2.9	%	±	2.9	%	145
Device holder uncertainty	±	3.6	%	Normal	1	1	1	±	3.6	%	±	3.6	%	5
Power drift	±	5.0	%	Rectangular	√ 3	1	1	±	2.9	%	±	2.9	%	∞
Phantom and Set-up														
Phantom uncertainty	±	7.9	%	Rectangular	√ 3	1	1	±	4.6	%	±	4.6	%	∞
SAR correction	±	1.9	%	Rectangular	√ 3	1	0.84	±	1.1	%	±	0.9	%	∞
Liquid conductivity (meas.)	±	5.0	%	Rectangular	√ 3	0.78	0.71	±	2.3	%	±	2.0	%	∞
Liquid permittivity (meas.)	±	5.0	%	Rectangular	√ 3	0.26	0.26	±	0.8	%	±	0.8	%	∞
Temp. Unc. - Conductivity	±	3.4	%	Rectangular	√ 3	0.78	0.71	±	1.5	%	±	1.4	%	∞
Temp. Unc. - Permittivity	±	0.4	%	Rectangular	√ 3	0.23	0.26	±	0.1	%	±	0.1	%	∞
Combined Uncertainty								± 12.7 %		± 12.6 %		330		
Expanded Std. Uncertainty								± 25.4 %		± 25.3 %				

Table 6: Measurement uncertainties.

Worst-Case uncertainty budget for DASY5 assessed according to IEC 62209-2/2010 standard. The budget is valid for the frequency range 30MHz - 6 GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerable smaller.

Relative DASY5 Uncertainty Budget for SAR Tests									
According to IEEE 1528/2003 and IEC 62209-1 for the 3 - 6 GHz range									
Error Description	Uncertainty Value	Probability Distribution	Divisor	c _i	c _i	Standard Uncertainty		v _i ² or v _{eff}	
				(1g)	(10g)	± %, (1g)	± %, (10g)		
Measurement System									
Probe calibration	± 6.6 %	Normal	1	1	1	± 6.6 %	± 6.6 %	∞	
Axial isotropy	± 4.7 %	Rectangular	√ 3	0.7	0.7	± 1.9 %	± 1.9 %	∞	
Hemispherical isotropy	± 9.6 %	Rectangular	√ 3	0.7	0.7	± 3.9 %	± 3.9 %	∞	
Boundary effects	± 2.0 %	Rectangular	√ 3	1	1	± 1.2 %	± 1.2 %	∞	
Probe linearity	± 4.7 %	Rectangular	√ 3	1	1	± 2.7 %	± 2.7 %	∞	
System detection limits	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞	
Readout electronics	± 0.3 %	Normal	1	1	1	± 0.3 %	± 0.3 %	∞	
Response time	± 0.8 %	Rectangular	√ 3	1	1	± 0.5 %	± 0.5 %	∞	
Integration time	± 2.6 %	Rectangular	√ 3	1	1	± 1.5 %	± 1.5 %	∞	
RF ambient noise	± 3.0 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞	
RF ambient reflections	± 3.0 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞	
Probe positioner	± 0.8 %	Rectangular	√ 3	1	1	± 0.5 %	± 0.5 %	∞	
Probe positioning	± 6.7 %	Rectangular	√ 3	1	1	± 3.9 %	± 3.9 %	∞	
Max. SAR evaluation	± 4.0 %	Rectangular	√ 3	1	1	± 2.3 %	± 2.3 %	∞	
Test Sample Related									
Device positioning	± 2.9 %	Normal	1	1	1	± 2.9 %	± 2.9 %	145	
Device holder uncertainty	± 3.6 %	Normal	1	1	1	± 3.6 %	± 3.6 %	5	
Power drift	± 5.0 %	Rectangular	√ 3	1	1	± 2.9 %	± 2.9 %	∞	
Phantom and Set-up									
Phantom uncertainty	± 4.0 %	Rectangular	√ 3	1	1	± 2.3 %	± 2.3 %	∞	
Liquid conductivity (target)	± 5.0 %	Rectangular	√ 3	0.64	0.43	± 1.8 %	± 1.2 %	∞	
Liquid conductivity (meas.)	± 5.0 %	Rectangular	√ 3	0.64	0.43	± 1.8 %	± 1.2 %	∞	
Liquid permittivity (target)	± 5.0 %	Rectangular	√ 3	0.6	0.49	± 1.7 %	± 1.4 %	∞	
Liquid permittivity (meas.)	± 5.0 %	Rectangular	√ 3	0.6	0.49	± 1.7 %	± 1.4 %	∞	
Combined Uncertainty						± 12.1 %	± 11.9 %	330	
Expanded Std. Uncertainty						± 24.3 %	± 23.8 %		

Table 7: Measurement uncertainties

Worst-Case uncertainty budget for DASY5 valid for 3G communication signals and frequency range 3 - 6 GHz.

Probe calibration error reflects uncertainty of the EX3D probe. For specific tests and configurations, the uncertainty could be considerable smaller.

Relative DASY5 Uncertainty Budget for SAR Tests										
According to IEEE 1528/2013 and IEC62209-1/2011 (3-6GHz range)										
Error Description	Uncertainty Value		Probability Distribution	Divisor	c_i (1g)	c_i (10g)	Standard Uncertainty		v_i^2 or v_{eff}	
							± %, (1g)	± %, (10g)		
Measurement System										
Probe calibration	± 6.6 %		Normal	1	1	1	± 6.6 %	± 6.6 %	∞	
Axial isotropy	± 4.7 %		Rectangular	√ 3	0.7	0.7	± 1.9 %	± 1.9 %	∞	
Hemispherical isotropy	± 9.6 %		Rectangular	√ 3	0.7	0.7	± 3.9 %	± 3.9 %	∞	
Boundary effects	± 2.0 %		Rectangular	√ 3	1	1	± 1.2 %	± 1.2 %	∞	
Probe linearity	± 4.7 %		Rectangular	√ 3	1	1	± 2.7 %	± 2.7 %	∞	
System detection limits	± 1.0 %		Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞	
Modulation Response	± 2.4 %		Rectangular	√ 3	1	1	± 1.4 %	± 1.4 %	∞	
Readout electronics	± 0.3 %		Normal	1	1	1	± 0.3 %	± 0.3 %	∞	
Response time	± 0.8 %		Rectangular	√ 3	1	1	± 0.5 %	± 0.5 %	∞	
Integration time	± 2.6 %		Rectangular	√ 3	1	1	± 1.5 %	± 1.5 %	∞	
RF ambient noise	± 3.0 %		Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞	
RF ambient reflections	± 3.0 %		Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞	
Probe positioner	± 0.8 %		Rectangular	√ 3	1	1	± 0.5 %	± 0.5 %	∞	
Probe positioning	± 6.7 %		Rectangular	√ 3	1	1	± 3.9 %	± 3.9 %	∞	
Max. SAR evaluation	± 4.0 %		Rectangular	√ 3	1	1	± 2.3 %	± 2.3 %	∞	
Test Sample Related										
Device positioning	± 2.9 %		Normal	1	1	1	± 2.9 %	± 2.9 %	145	
Device holder uncertainty	± 3.6 %		Normal	1	1	1	± 3.6 %	± 3.6 %	5	
Power drift	± 5.0 %		Rectangular	√ 3	1	1	± 2.9 %	± 2.9 %	∞	
Phantom and Set-up										
Phantom uncertainty	± 6.6 %		Rectangular	√ 3	1	1	± 3.8 %	± 3.8 %	∞	
SAR correction	± 1.9 %		Rectangular	√ 3	1	0.84	± 1.1 %	± 0.9 %	∞	
Liquid conductivity (meas.)	± 5.0 %		Rectangular	√ 3	0.78	0.71	± 2.3 %	± 2.0 %	∞	
Liquid permittivity (meas.)	± 5.0 %		Rectangular	√ 3	0.26	0.26	± 0.8 %	± 0.8 %	∞	
Temp. Unc. - Conductivity	± 3.4 %		Rectangular	√ 3	0.78	0.71	± 1.5 %	± 1.4 %	∞	
Temp. Unc. - Permittivity	± 0.4 %		Rectangular	√ 3	0.23	0.26	± 0.1 %	± 0.1 %	∞	
Combined Uncertainty							± 12.4 %	± 12.4 %	330	
Expanded Std. Uncertainty							± 24.9 %	± 24.8 %		

Table 8: Measurement uncertainties

Worst-Case uncertainty budget for DASY5 assessed according to IEEE 1528/2013 and IEC 62209-1/2011 standards. The budget is valid for the frequency range 3GHz -6GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerable smaller.

4.1.13 Measurement uncertainty evaluation for System Check

Uncertainty of a System Performance Check with DASY5 System for the 0.3 - 3 GHz range								
Source of uncertainty	Uncertainty Value	Probability Distribution	Divisor	c _i	c _i	Standard Uncertainty		v _i ² or
				(1g)	(10g)	± %, (1g)	± %, (10g)	v _{eff}
Measurement System								
Probe calibration	± 6.0 %	Normal	1	1	1	± 6.0 %	± 6.0 %	∞
Axial isotropy	± 4.7 %	Rectangular	√ 3	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical isotropy	± 0.0 %	Rectangular	√ 3	0.7	0.7	± 0.0 %	± 0.0 %	∞
Boundary effects	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Probe linearity	± 4.7 %	Rectangular	√ 3	1	1	± 2.7 %	± 2.7 %	∞
System detection limits	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Readout electronics	± 0.3 %	Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response time	± 0.0 %	Rectangular	√ 3	1	1	± 0.0 %	± 0.0 %	∞
Integration time	± 0.0 %	Rectangular	√ 3	1	1	± 0.0 %	± 0.0 %	∞
RF ambient conditions	± 3.0 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
Probe positioner	± 0.4 %	Rectangular	√ 3	1	1	± 0.2 %	± 0.2 %	∞
Probe positioning	± 2.9 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
Max. SAR evaluation	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Test Sample Related								
Dev. of experimental dipole	± 0.0 %	Rectangular	√ 3	1	1	± 0.0 %	± 0.0 %	∞
Source to liquid distance	± 2.0 %	Rectangular	√ 3	1	1	± 1.2 %	± 1.2 %	∞
Power drift	± 3.4 %	Rectangular	√ 3	1	1	± 2.0 %	± 2.0 %	∞
Phantom and Set-up								
Phantom uncertainty	± 4.0 %	Rectangular	√ 3	1	1	± 2.3 %	± 2.3 %	∞
SAR correction	± 1.9 %	Rectangular	√ 3	1	0.84	± 1.1 %	± 0.9 %	∞
Liquid conductivity (meas.)	± 5.0 %	Normal	1	0.78	0.71	± 3.9 %	± 3.6 %	∞
Liquid permittivity (meas.)	± 5.0 %	Normal	1	0.26	0.26	± 1.3 %	± 1.3 %	∞
Temp. unc. - Conductivity	± 1.7 %	Rectangular	√ 3	0.78	0.71	± 0.8 %	± 0.7 %	∞
Temp. unc. - Permittivity	± 0.3 %	Rectangular	√ 3	0.23	0.26	± 0.0 %	± 0.0 %	∞
Combined Uncertainty						± 9.1 %	± 8.9 %	330
Expanded Std. Uncertainty						± 18.2 %	± 17.9 %	

Table 9: Measurement uncertainties of the System Check with DASY5 (0.3-3GHz)

Uncertainty of a System Performance Check with DASY5 System for the 3 - 6 GHz range								
Source of uncertainty	Uncertainty Value	Probability Distribution	Divisor	c _i	c _i	Standard Uncertainty		v _i ² or
				(1g)	(10g)	± %, (1g)	± %, (10g)	v _{eff}
Measurement System								
Probe calibration	± 6.6 %	Normal	1	1	1	± 6.6 %	± 6.6 %	∞
Axial isotropy	± 4.7 %	Rectangular	√ 3	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical isotropy	± 0.0 %	Rectangular	√ 3	0.7	0.7	± 0.0 %	± 0.0 %	∞
Boundary effects	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Probe linearity	± 4.7 %	Rectangular	√ 3	1	1	± 2.7 %	± 2.7 %	∞
System detection limits	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Readout electronics	± 0.3 %	Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response time	± 0.0 %	Rectangular	√ 3	1	1	± 0.0 %	± 0.0 %	∞
Integration time	± 0.0 %	Rectangular	√ 3	1	1	± 0.0 %	± 0.0 %	∞
RF ambient conditions	± 3.0 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
Probe positioner	± 0.8 %	Rectangular	√ 3	1	1	± 0.5 %	± 0.5 %	∞
Probe positioning	± 6.7 %	Rectangular	√ 3	1	1	± 3.9 %	± 3.9 %	∞
Max. SAR evaluation	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Test Sample Related								
Dev. of experimental dipole	± 0.0 %	Rectangular	√ 3	1	1	± 0.0 %	± 0.0 %	∞
Source to liquid distance	± 2.0 %	Rectangular	√ 3	1	1	± 1.2 %	± 1.2 %	∞
Power drift	± 3.4 %	Rectangular	√ 3	1	1	± 2.0 %	± 2.0 %	∞
Phantom and Set-up								
Phantom uncertainty	± 4.0 %	Rectangular	√ 3	1	1	± 2.3 %	± 2.3 %	∞
SAR correction	± 1.9 %	Rectangular	√ 3	1	0.84	± 1.1 %	± 0.9 %	∞
Liquid conductivity (meas.)	± 5.0 %	Normal	1	0.78	0.71	± 3.9 %	± 3.6 %	∞
Liquid permittivity (meas.)	± 5.0 %	Normal	1	0.26	0.26	± 1.3 %	± 1.3 %	∞
Temp. unc. - Conductivity	± 1.7 %	Rectangular	√ 3	0.78	0.71	± 0.8 %	± 0.7 %	∞
Temp. unc. - Permittivity	± 0.3 %	Rectangular	√ 3	0.23	0.26	± 0.0 %	± 0.0 %	∞
Combined Uncertainty						± 10.1 %	± 10.0 %	330
Expanded Std. Uncertainty						± 20.2 %	± 19.9 %	

Table 10: Measurement uncertainties of the System Check with DASY5 (3-6GHz)

Note: Worst case probe calibration uncertainty has been applied for all probes used during the measurements.

4.1.14 System check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE 1528. The following table shows system check results for all frequency bands and tissue liquids used during the tests (plot(s) see annex A).


System performance check (1000 mW)								
System validation Kit	Frequency	Target SAR _{1g} /mW/g (+/- 10%)	Target SAR _{10g} /mW/g (+/- 10%)	Measured SAR _{1g} / mW/g	SAR _{1g} dev.	Measured SAR _{10g} / mW/g	SAR _{10g} dev.	Measured date
D2450V2 S/N: 710	2450 MHz body	51.00	23.80	54.40	6.7%	25.20	5.9%	2015-03-02
D2450V2 S/N: 710	2450 MHz body	51.00	23.80	52.80	3.5%	24.40	2.5%	2015-03-03
D5GHzV2 S/N: 1055	5200 MHz body	74.20	20.80	74.40	0.3%	21.30	2.4%	2015-03-03
D5GHzV2 S/N: 1055	5200 MHz body	74.20	20.80	75.10	1.2%	21.30	2.4%	2015-03-04

Table 11: Results system check

4.1.15 System check procedure

The system check is performed by using a validation dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 1000 mW for frequencies below 2 GHz or 100 mW for frequencies above 2 GHz. To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

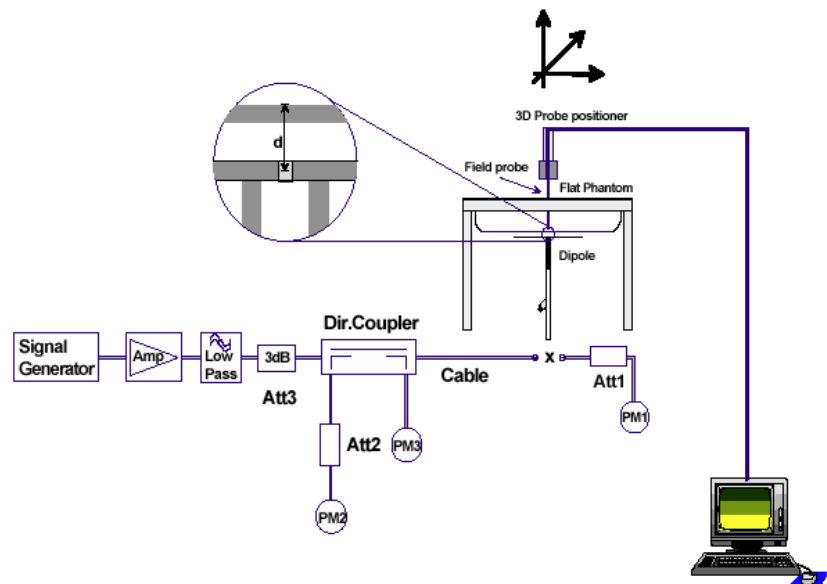

4.1.16 System validation

The system validation is performed in a similar way as a system check. It needs to be performed once a SAR measurement system has been established and allows an evaluation of the system accuracy with all components used together with the specified system. It has to be repeated at least once a year or when new system components are used (DAE, probe, phantom, dipole, liquid type).

In addition to the procedure used during system check a system validation also includes checks of probe isotropy, probe modulation factor and RF signal.

The following table lists the system validations relevant for this test report:

Frequency (MHz)	Test System	DASY SW	Dipole Type /SN	Probe Type / SN	Calibrated signal type(s)	DAE unit Type / SN	head validation	body validation
2450	Saarbrücken / SAR-1	V52.8.7	D2450V2 / 710	EX3DV4 / 3944	CW	DAE3/ 477	2014-07-26	2014-07-26
5200	Saarbrücken / SAR-1	V52.8.7	D5GHzV2 / 1055	EX3DV4 / 3944	CW	DAE3/ 477	2014-09-05	2014-09-02

5 SAR test results

5.1 Results overview

measured / extrapolated SAR numbers - Body worn - WLAN 2450 MHz													
Ch.	Freq. (MHz)	test cond.	Position	Antenna	cond. P _{max} (dBm)		SAR _{1g} (W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)	dist. (mm)
					decl.**	meas.	meas.	extrap.	meas.	extrap.			
6	2437	1Mbit/s	rear	main	18.5	18.1	0.131	0.143	0.075	0.082	0.020	21.9	15
6	2437	1Mbit/s	left side	main	18.5	18.1	0.238	0.260	0.130	0.142	0.010	21.9	20
6	2437	1Mbit/s	rear	aux	18.5	17.9	0.086	0.099	0.045	0.052	-0.120	21.9	15
6	2437	1Mbit/s	right side	aux	18.5	17.9	0.112	0.129	0.062	0.072	0.010	21.9	20

Table 12: Test results body worn SAR WLAN 2.4 MHz

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Extremities - WLAN 2450 MHz (Limit for 10g: 4W/Kg)													
Ch.	Freq. (MHz)	test cond.	Position	Antenna	cond. P _{max} (dBm)		SAR _{1g} (W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)	dist. (mm)
					decl.**	meas.	meas.	extrap.	meas.	extrap.			
6	2437	1Mbit/s	rear	main	18.5	18.1	0.443	0.485	0.187	0.205	-0.180	21.8	0
6	2437	1Mbit/s	left side	main	18.5	18.1	3.330	3.643	1.290	1.411	0.050	21.9	0
6	2437	1Mbit/s	rear	aux	18.5	17.9	0.249	0.286	0.134	0.154	-0.120	21.9	0
6	2437	1Mbit/s	right side	aux	18.5	17.9	1.600	1.837	0.646	0.742	-0.020	21.9	0

Table 13: Test results extremities SAR WLAN 2.4 MHz

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Body worn - WLAN 5 GHz													
Ch.	Freq. (MHz)	test cond.	Position	Antenna	cond. P _{max} (dBm)		SAR _{1g} (W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)	dist. (mm)
					decl.**	meas.	meas.	extrap.	meas.	extrap.			
56	5280	6Mbit/s	rear	main	15.5	15.4	0.144	0.149	0.054	0.056	-0.110	21.8	15
56	5280	6Mbit/s	left side	main	15.5	15.4	0.194	0.200	0.075	0.077	0.010	21.8	20
52	5260	6Mbit/s	rear	aux	15.5	15.3	0.078	0.082	0.028	0.029	-0.050	22.0	15
52	5260	6Mbit/s	right side	aux	15.5	15.3	0.145	0.153	0.053	0.056	0.040	22.0	20

Table 14: Test results body worn SAR WLAN 5 GHz

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Extremities - WLAN 5 GHz (Limit for 10g: 4W/Kg)													
Ch.	Freq. (MHz)	test cond.	Position	Antenna	cond. P _{max} (dBm)		SAR _{1g} (W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)	dist. (mm)
					decl.**	meas.	meas.	extrap.	meas.	extrap.			
56	5280	6Mbit/s	rear	main	15.5	15.4	0.219	0.226	0.080	0.082	-0.080	21.8	0
56	5280	6Mbit/s	left side	main	15.5	15.4	1.470	1.518	0.365	0.377	-0.100	21.8	0
52	5260	6Mbit/s	rear	aux	15.5	15.3	0.168	0.177	0.056	0.059	-0.150	22.0	0
52	5260	6Mbit/s	right side	aux	15.5	15.3	1.380	1.452	0.330	0.347	0.180	22.0	0

Table 15: Test results extremities SAR WLAN 5 GHz

** - maximum possible output power declared by manufacturer

5.2 General description of test procedures

The tests were performed according to customer request.

6 Test equipment and ancillaries used for tests

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

Equipment	Type	Manufacturer	Serial No.	Last Calibration	Frequency (months)
Dosimetric E-Field Probe	EX3DV4	Schmid & Partner Engineering AG	3944	August 19, 2014	12
2450 MHz System Validation Dipole	D2450V2	Schmid & Partner Engineering AG	710	August 11, 2014	24
5 GHz System Validation Dipole	D5GHzV2	Schmid & Partner Engineering AG	1055	August 19, 2013	24
Data acquisition electronics	DAE3V1	Schmid & Partner Engineering AG	413	January 15, 2015	12
Software	DASY52 52.8.7	Schmid & Partner Engineering AG	---	N/A	--
Phantom ELI 4.0	QDOVA001BA	Schmid & Partner Engineering AG	1046	N/A	--
Universal Radio Communication Tester	CMU 200	Rohde & Schwarz	106826	January 27, 2014	24
Network Analyser 300 kHz to 6 GHz	8753ES	Hewlett Packard)*	US39174436	January 28, 2014	24
Dielectric Probe Kit	85070C	Hewlett Packard	US99360146	N/A	12
Signal Generator	8671B	Hewlett Packard	2823A00656	January 22, 2014	24
Amplifier	25S1G4 (25 Watt)	Amplifier Research	20452	N/A	--
Power Meter	NRP	Rohde & Schwarz	101367	January 21, 2014	24
Power Meter Sensor	NRP Z22	Rohde & Schwarz	100227	January 21, 2014	12
Power Meter Sensor	NRP Z22	Rohde & Schwarz	100234	January 21, 2014	12
Directional Coupler	778D	Hewlett Packard	19171	January 21, 2014	12

)* : Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

7 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A: System performance check

Date/Time: 02.03.2015 08:21:56

SystemPerformanceCheck-D2450 body 2015-03-02

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 710

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.968$ S/m; $\epsilon_r = 51.63$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(7.43, 7.43, 7.43); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL2450/d=10mm, Pin=250 mW, dist=2.0mm/Area Scan (81x81x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 20.9 W/kg

MSL2450/d=10mm, Pin=250 mW, dist=2.0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 95.143 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 27.8 W/kg

SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.3 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

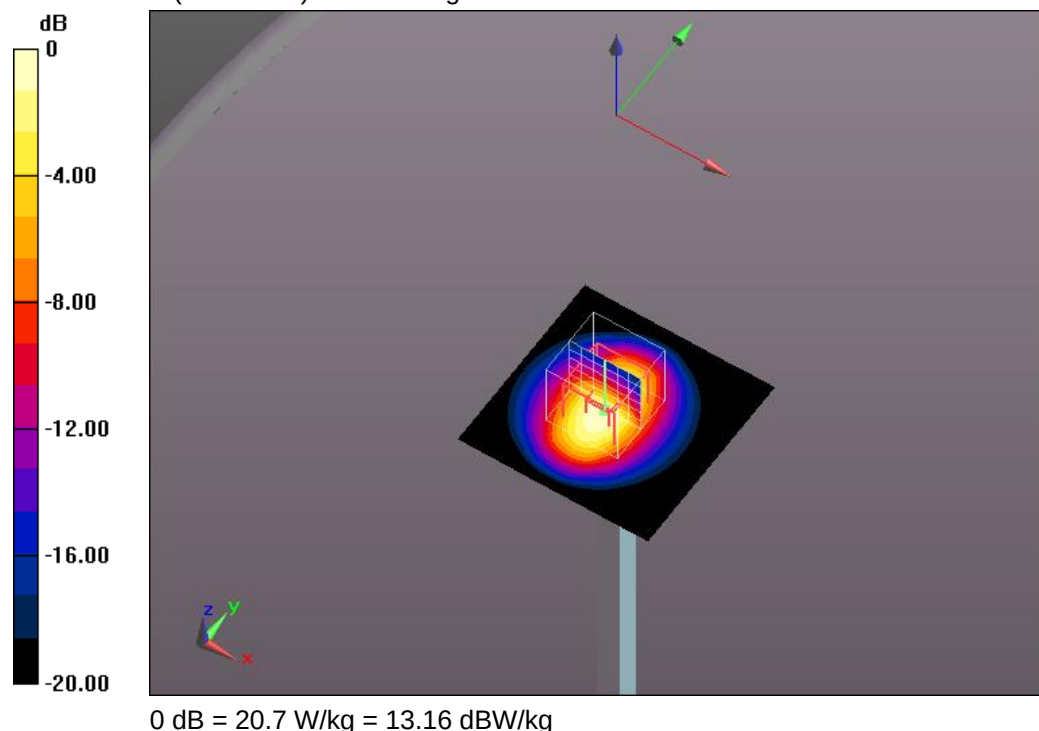

Additional information:

ambient temperature: 22.7°C; liquid temperature: 21.8°C

Date/Time: 03.03.2015 08:48:33

SystemPerformanceCheck-D2450 body 2015-03-03**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 710**

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.968$ S/m; $\epsilon_r = 51.63$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(7.43, 7.43, 7.43); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL2450/d=10mm, Pin=250 mW, dist=2.0mm/Area Scan (81x81x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 20.4 W/kg


MSL2450/d=10mm, Pin=250 mW, dist=2.0mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 102.6 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 27.1 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.1 W/kg

Maximum value of SAR (measured) = 20.1 W/kg

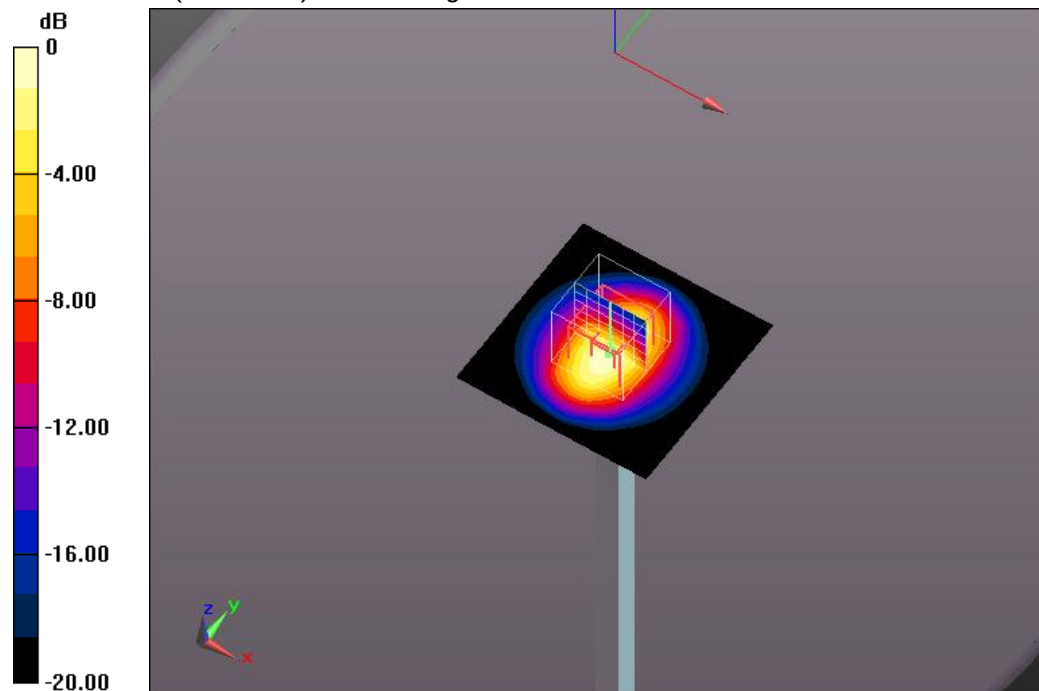

0 dB = 20.1 W/kg = 13.03 dBW/kg

Additional information:

ambient temperature: 22.8°C; liquid temperature: 21.9°C

Date/Time: 03.03.2015 13:06:23

SystemPerformanceCheck-D5GHz body 2015-03-03**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1055**

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.183$ S/m; $\epsilon_r = 50.481$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(4.56, 4.56, 4.56); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL 5GHz/d=10mm, Pin=100mW 5.2GHz/Area Scan (61x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 15.9 W/kg


MSL 5GHz/d=10mm, Pin=100mW 5.2GHz/Zoom Scan (7x7x12)/Cube 0:Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 60.391 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 29.3 W/kg

SAR(1 g) = 7.44 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 15.2 W/kg

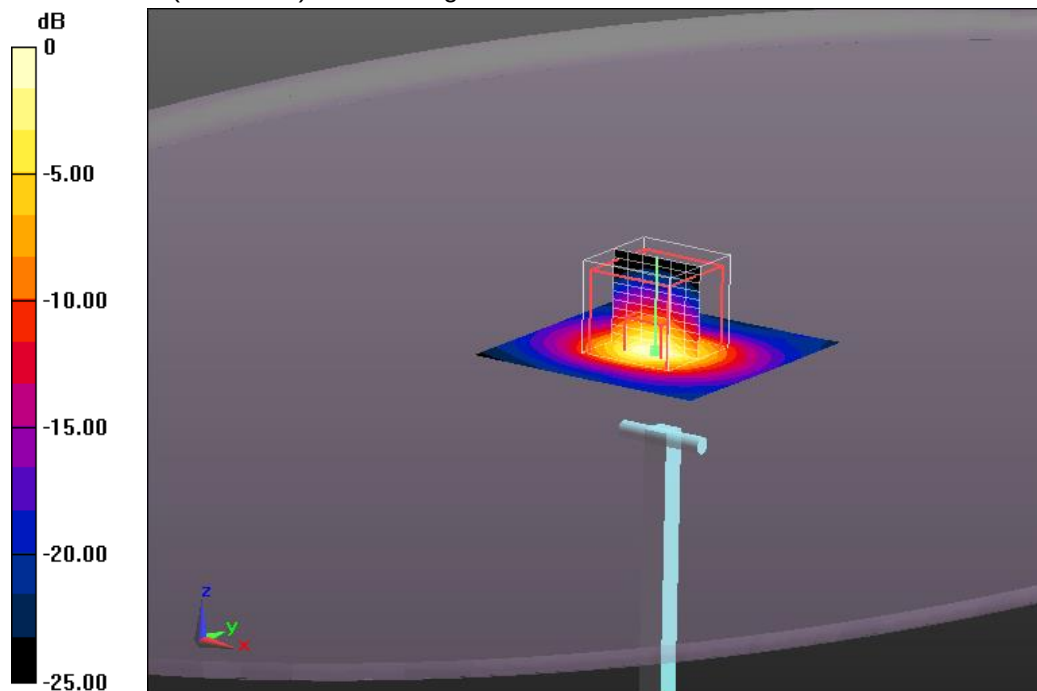

0 dB = 15.2 W/kg = 11.82 dBW/kg

Additional information:

ambient temperature: 22.3°C; liquid temperature: 21.8°C

Date/Time: 04.03.2015 08:51:45

SystemPerformanceCheck-D5GHz body 2015-03-04**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1055**

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.183$ S/m; $\epsilon_r = 50.481$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(4.56, 4.56, 4.56); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL 5GHz/d=10mm, Pin=100mW 5.2GHz/Area Scan (61x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 16.0 W/kg


MSL 5GHz/d=10mm, Pin=100mW 5.2GHz/Zoom Scan (8x8x12)/Cube 0:Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 59.263 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 29.5 W/kg

SAR(1 g) = 7.51 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 15.1 W/kg

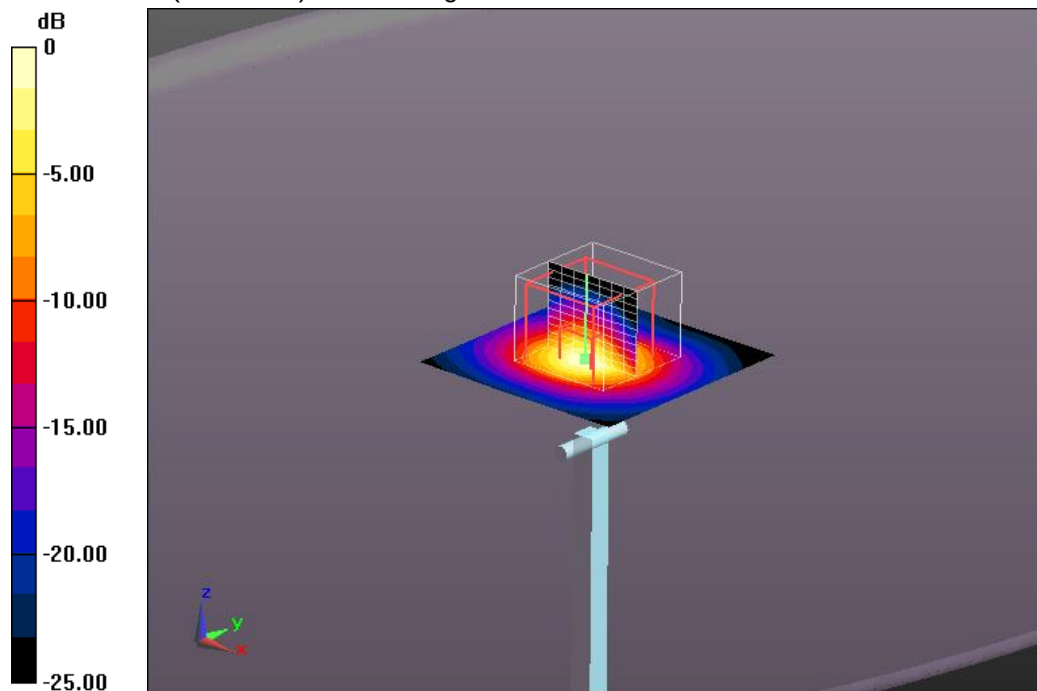

0 dB = 15.1 W/kg = 11.79 dBW/kg

Additional information:

ambient temperature: 22.4°C; liquid temperature: 22.0°C

Annex B: DASY5 measurement results**Annex B.1: WLAN 2450MHz**

Date/Time: 27.02.2015 11:16:56

FCC_EN62209-2 WLAN2450 body worn**DUT: Motorola; Type: Workabout Pro4; Serial: WPQACE240073C1**

Communication System: UID 0, WLAN 2450 (0); Communication System Band: 2.4 GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 51.642$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(7.43, 7.43, 7.43); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL2450/Rear Middle 15mm (Main Antenna) (MNB 0)/Area Scan**(161x301x1):** Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.177 W/kg


MSL2450/Rear Middle 15mm (Main Antenna) (MNB 0)/Zoom Scan**(7x7x7)/Cube 0:** Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.693 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.234 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.182 W/kg

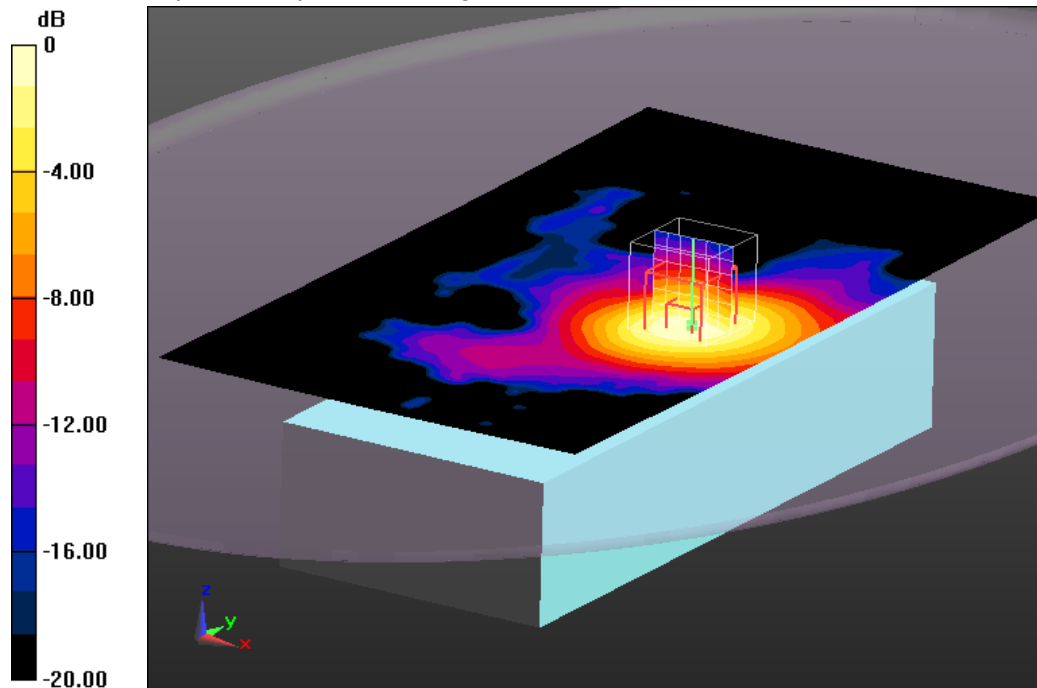

0 dB = 0.182 W/kg = -7.40 dBW/kg

Additional information:

position or distance of DUT to SAM: 15mm

ambient temperature: 22.0°C; liquid temperature: 21.9°C

FCC_EN62209-2 WLAN2450 body worn**DUT: Motorola; Type: Workabout Pro4; Serial: WPQACE240073C1**

Communication System: UID 0, WLAN 2450 (0); Communication System Band: 2.4 GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 51.642$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(7.43, 7.43, 7.43); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL2450/Left Side Middle 20mm (Main Antenna) (MNB 1)/Area Scan**(111x301x1):** Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.318 W/kg


MSL2450/Left Side Middle 20mm (Main Antenna) (MNB 1)/Zoom Scan**(7x7x7)/Cube 0:** Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.396 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.130 W/kg

Maximum value of SAR (measured) = 0.333 W/kg

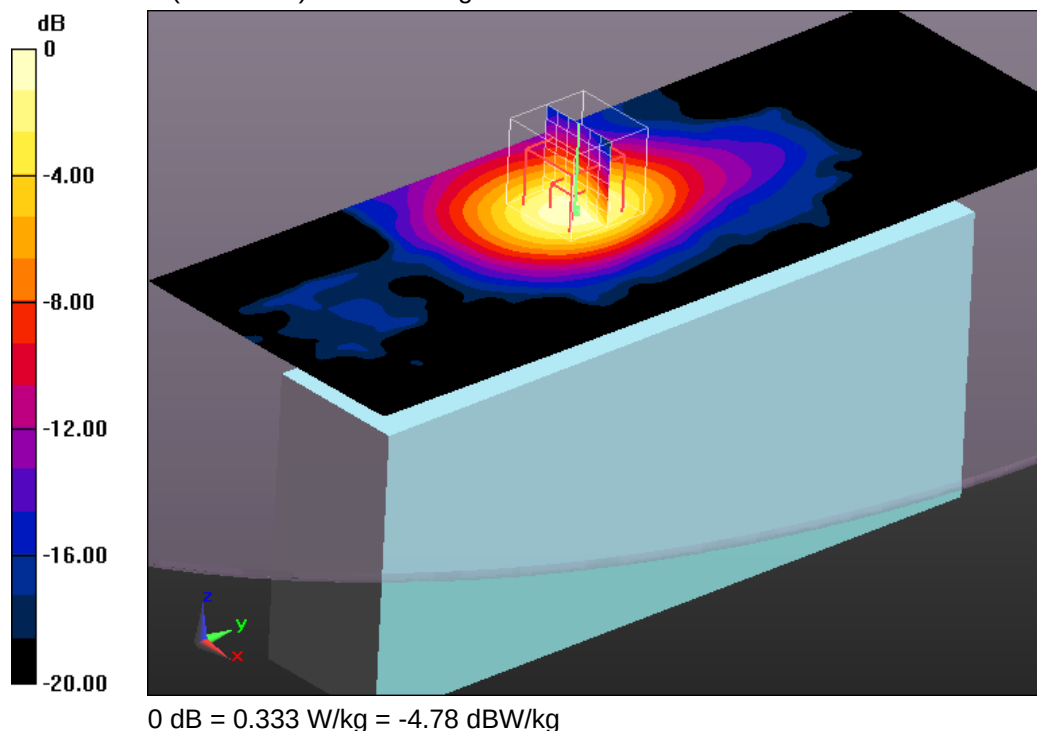**Additional information:**

position or distance of DUT to SAM: 20mm

ambient temperature: 22.0°C; liquid temperature: 21.9°C

FCC_EN62209-2 WLAN2450 body worn**DUT: Motorola; Type: Workabout Pro4; Serial: WPQACE240073C1**

Communication System: UID 0, WLAN 2450 (0); Communication System Band: 2.4 GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 51.642$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(7.43, 7.43, 7.43); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL2450/Rear Middle 15mm (Aux Antenna) (MNB 2)/Area Scan**(161x301x1):** Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.100 W/kg


MSL2450/Rear Middle 15mm (Aux Antenna) (MNB 2)/Zoom Scan**(7x7x7)/Cube 0:** Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.247 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

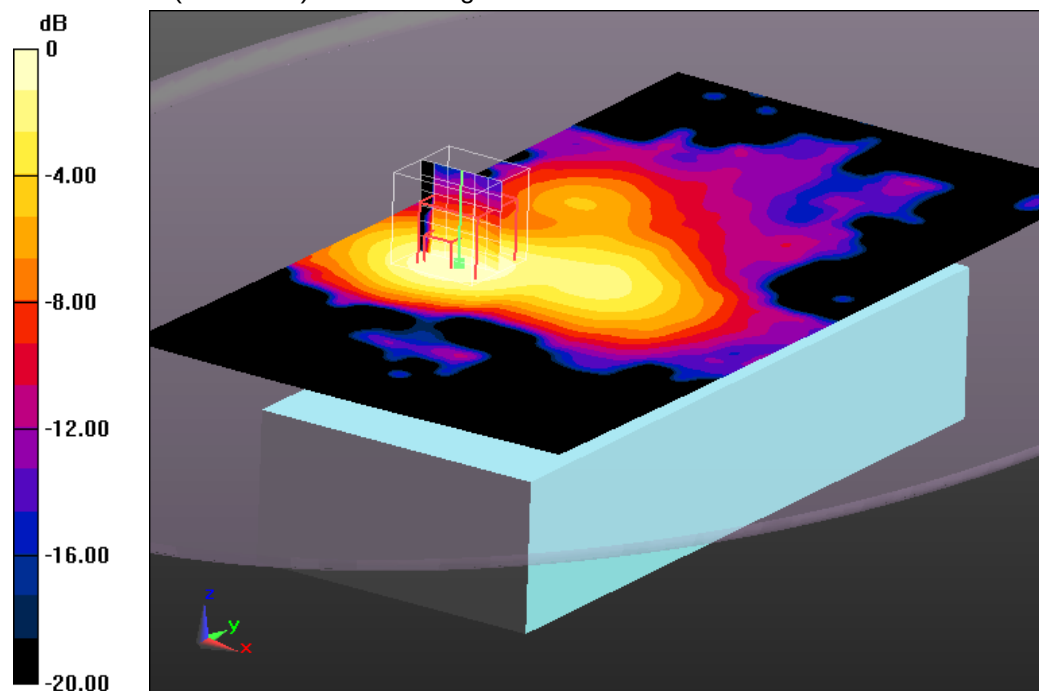

0 dB = 0.102 W/kg = -9.91 dBW/kg

Additional information:

position or distance of DUT to SAM: 15mm

ambient temperature: 22.8°C; liquid temperature: 21.9°C

FCC_EN62209-2 WLAN2450 body worn**DUT: Motorola; Type: Workabout Pro4; Serial: WPQACE240073C1**

Communication System: UID 0, WLAN 2450 (0); Communication System Band: 2.4 GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 51.642$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(7.43, 7.43, 7.43); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL2450/Right Side Middle 20mm (Aux Antenna) (MNB 3)/Area Scan**(111x301x1):** Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.160 W/kg


MSL2450/Right Side Middle 20mm (Aux Antenna) (MNB 3)/Zoom Scan**(7x7x7)/Cube 0:** Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.761 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.157 W/kg

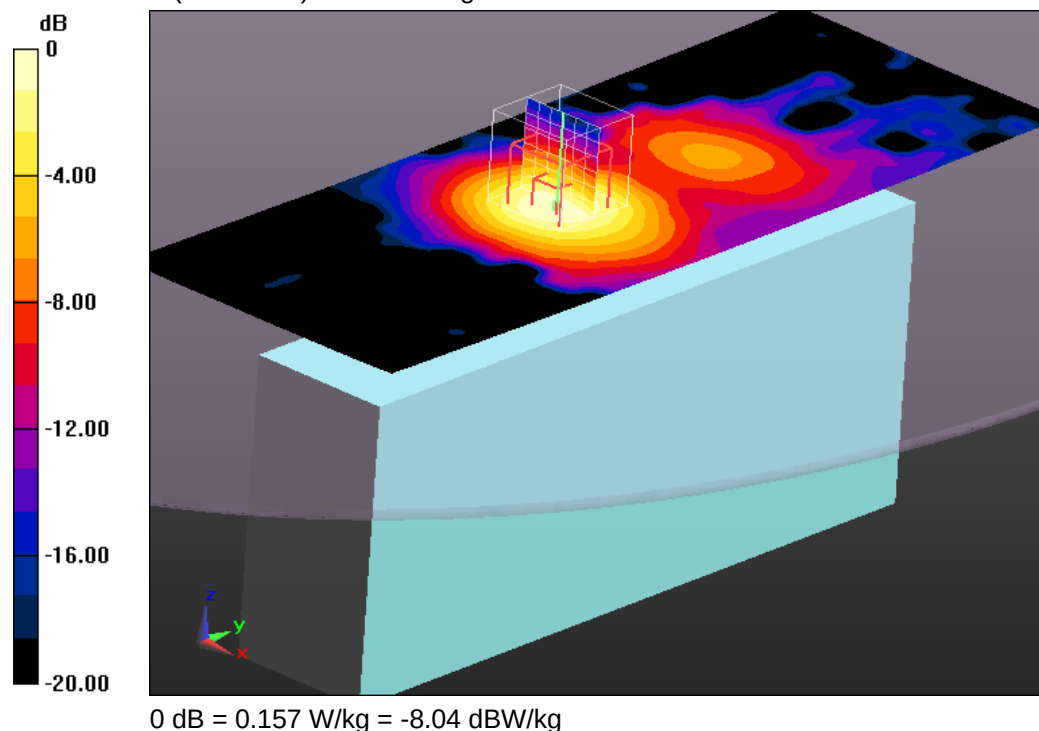**Additional information:**

position or distance of DUT to SAM: 20mm

ambient temperature: 22.8°C; liquid temperature: 21.9°C

Date/Time: 02.03.2015 17:28:25

FCC_EN62209-2 WLAN2450 body worn

DUT: Motorola; Type: Workabout Pro4; Serial: WPQACE240073C1

Communication System: UID 0, WLAN 2450 (0); Communication System Band: 2.4 GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 51.642$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(7.43, 7.43, 7.43); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL2450/Rear Middle 0mm (Main Antenna) (MNB 4)/Area Scan

(161x301x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.716 W/kg

MSL2450/Rear Middle 0mm (Main Antenna) (MNB 4)/Zoom Scan


(8x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.780 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.443 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.658 W/kg

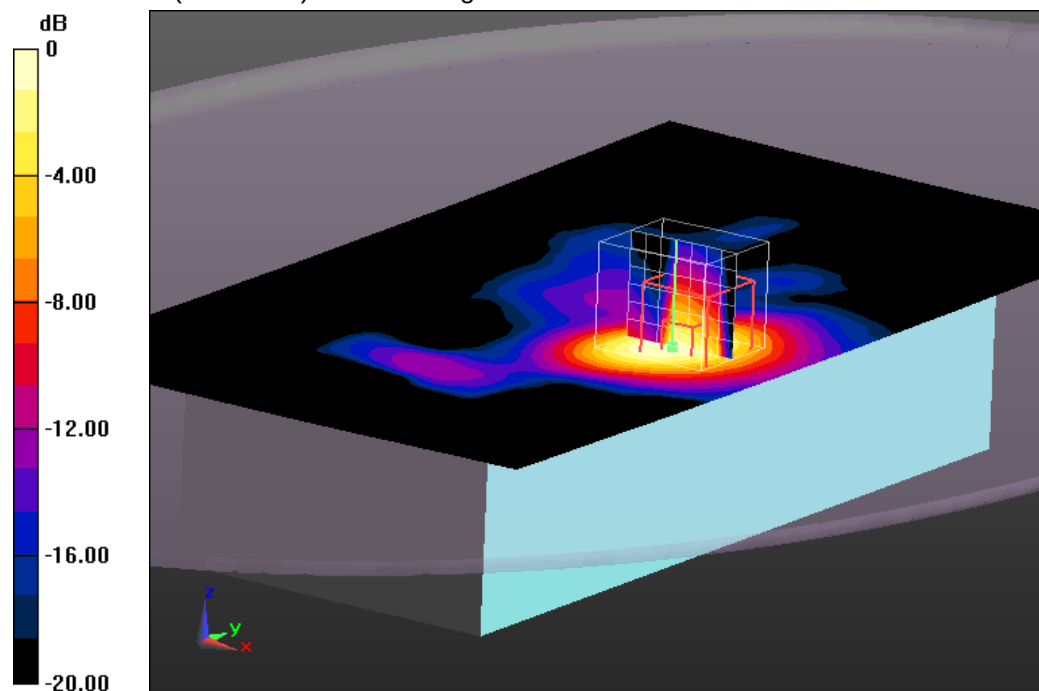

0 dB = 0.658 W/kg = -1.82 dBW/kg

Additional information:

position or distance of DUT to SAM: 0mm

ambient temperature: 22.7°C; liquid temperature: 21.8°C

FCC_EN62209-2 WLAN2450 body worn**DUT: Motorola; Type: Workabout Pro4; Serial: WPQACE240073C1**

Communication System: UID 0, WLAN 2450 (0); Communication System Band: 2.4 GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 51.642$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(7.43, 7.43, 7.43); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL2450/Left Side Middle 0mm (Main Antenna) (MNB 5)/Area Scan**(111x301x1):** Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 5.72 W/kg


MSL2450/Left Side Middle 0mm (Main Antenna) (MNB 5)/Zoom Scan**(7x7x7)/Cube 0:** Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 44.525 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 7.64 W/kg

SAR(1 g) = 3.33 W/kg; SAR(10 g) = 1.29 W/kg

Maximum value of SAR (measured) = 5.50 W/kg

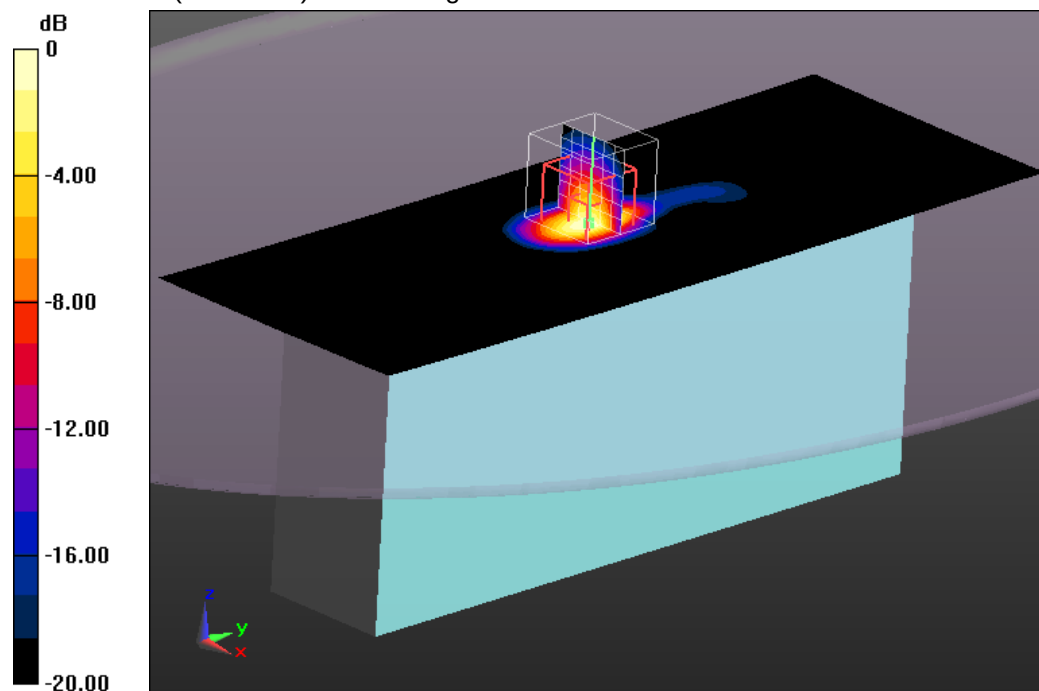

0 dB = 5.50 W/kg = 7.40 dBW/kg

Additional information:

position or distance of DUT to SAM: 0mm

ambient temperature: 22.0°C; liquid temperature: 21.9°C

FCC_EN62209-2 WLAN2450 body worn**DUT: Motorola; Type: Workabout Pro4; Serial: WPQACE240073C1**

Communication System: UID 0, WLAN 2450 (0); Communication System Band: 2.4 GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 51.642$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(7.43, 7.43, 7.43); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL2450/Rear Middle 0mm (Aux Antenna) (MNB 6)/Area Scan (161x301x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.385 W/kg


MSL2450/Rear Middle 0mm (Aux Antenna) (MNB 6)/Zoom Scan**(7x7x7)/Cube 0:** Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.599 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.458 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.351 W/kg

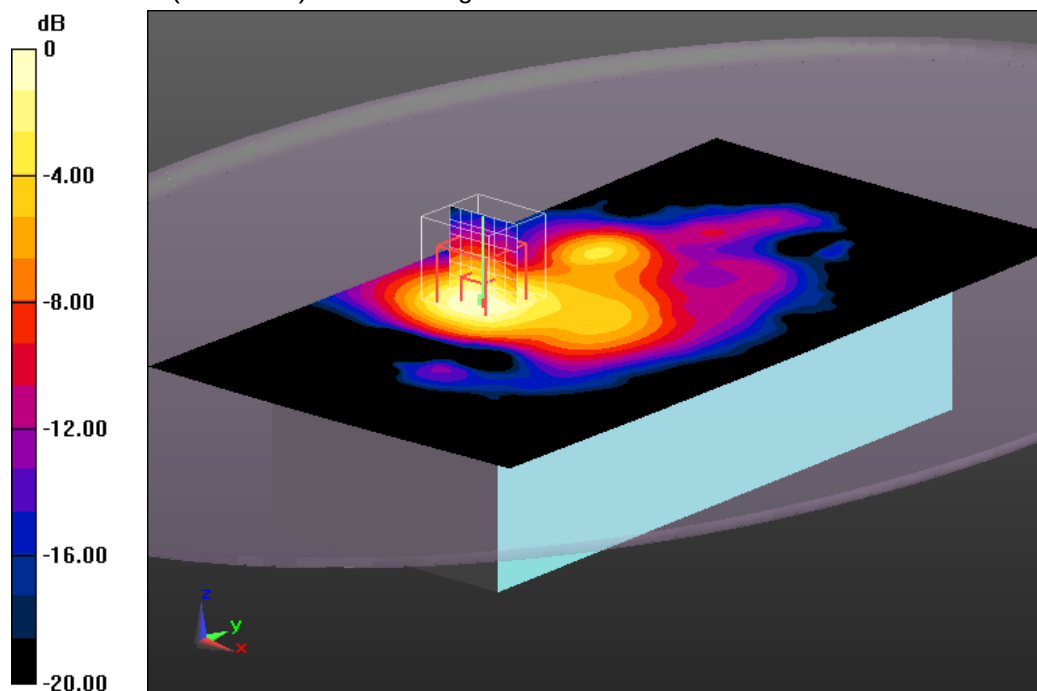

0 dB = 0.351 W/kg = -4.55 dBW/kg

Additional information:

position or distance of DUT to SAM: 0mm

ambient temperature: 22.8°C; liquid temperature: 21.9°C

Date/Time: 03.03.2015 10:52:26

FCC_EN62209-2 WLAN2450 body worn

DUT: Motorola; Type: Workabout Pro4; Serial: WPQACE240073C1

Communication System: UID 0, WLAN 2450 (0); Communication System Band: 2.4 GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 51.642$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(7.43, 7.43, 7.43); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL2450/Right Side Middle 0mm (Aux Antenna) (MNB 7)/Area Scan

(111x301x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.52 W/kg

MSL2450/Right Side Middle 0mm (Aux Antenna) (MNB 7)/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 27.836 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.63 W/kg

SAR(1 g) = 1.6 W/kg; SAR(10 g) = 0.646 W/kg

Maximum value of SAR (measured) = 2.64 W/kg

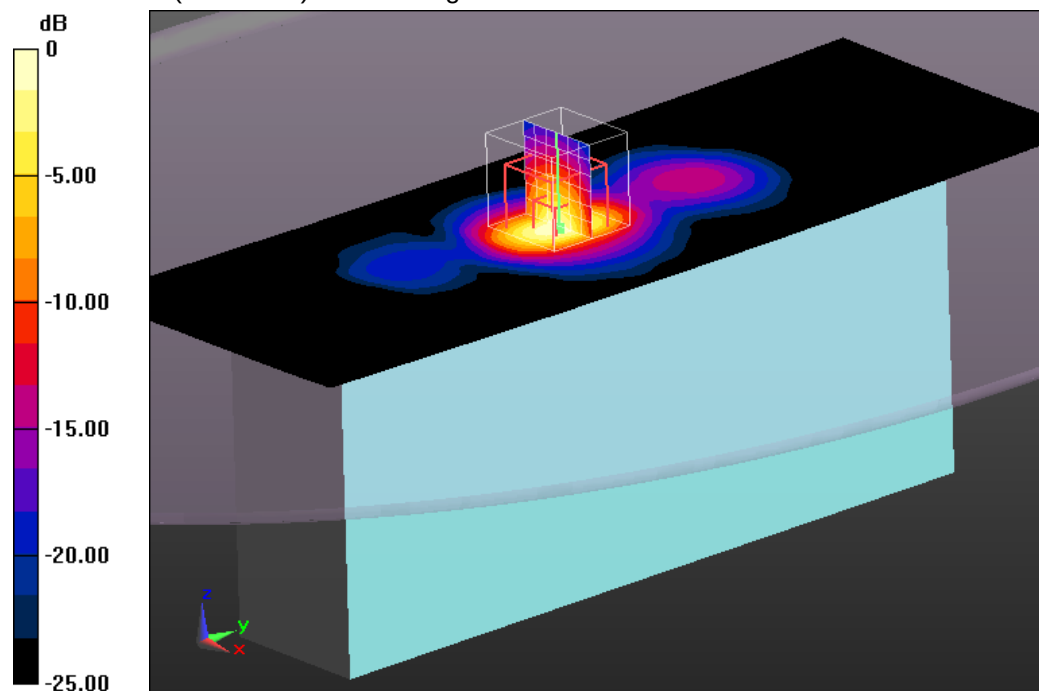

0 dB = 2.64 W/kg = 4.22 dBW/kg

Additional information:

position or distance of DUT to SAM: 0mm

ambient temperature: 22.8°C; liquid temperature: 21.9°C

Annex B.2: WLAN 5GHz

Date/Time: 03.03.2015 14:57:53

FCC_EN62209-2 WLAN 5GHz body worn

DUT: Motorola; Type: Workabout Pro4; Serial: WPQACE240073C1

Communication System: UID 0, WLAN 5GHz (0); Communication System Band: 5 GHz Band; Frequency: 5280 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 50.31$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(4.4, 4.4, 4.4); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL5000/Rear Middle 15mm (Main Antenna)/Area Scan (161x301x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.209 W/kg

MSL5000/Rear Middle 15mm (Main Antenna)/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.940 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.503 W/kg

SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.251 W/kg

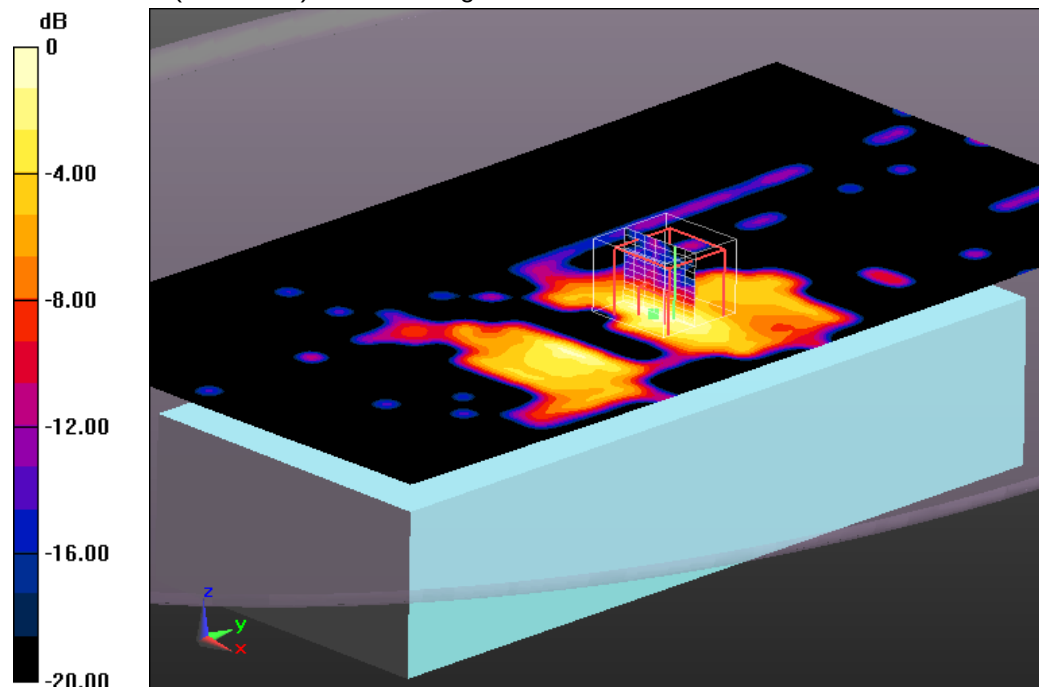

0 dB = 0.251 W/kg = -6.00 dBW/kg

Additional information:

position or distance of DUT to SAM: 15mm

ambient temperature: 22.3°C; liquid temperature: 21.8°C

FCC_EN62209-2 WLAN 5GHz body worn**DUT: Motorola; Type: Workabout Pro4; Serial: WPQACE240073C1**

Communication System: UID 0, WLAN 5GHz (0); Communication System Band: 5 GHz Band; Frequency: 5280 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 50.31$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(4.4, 4.4, 4.4); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL5000/Left Side Middle 20mm (Main Antenna)/Area Scan (111x301x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.255 W/kg


MSL5000/Left Side Middle 20mm (Main Antenna)/Zoom Scan (8x8x12)/Cube**0:** Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 8.439 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.671 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.341 W/kg

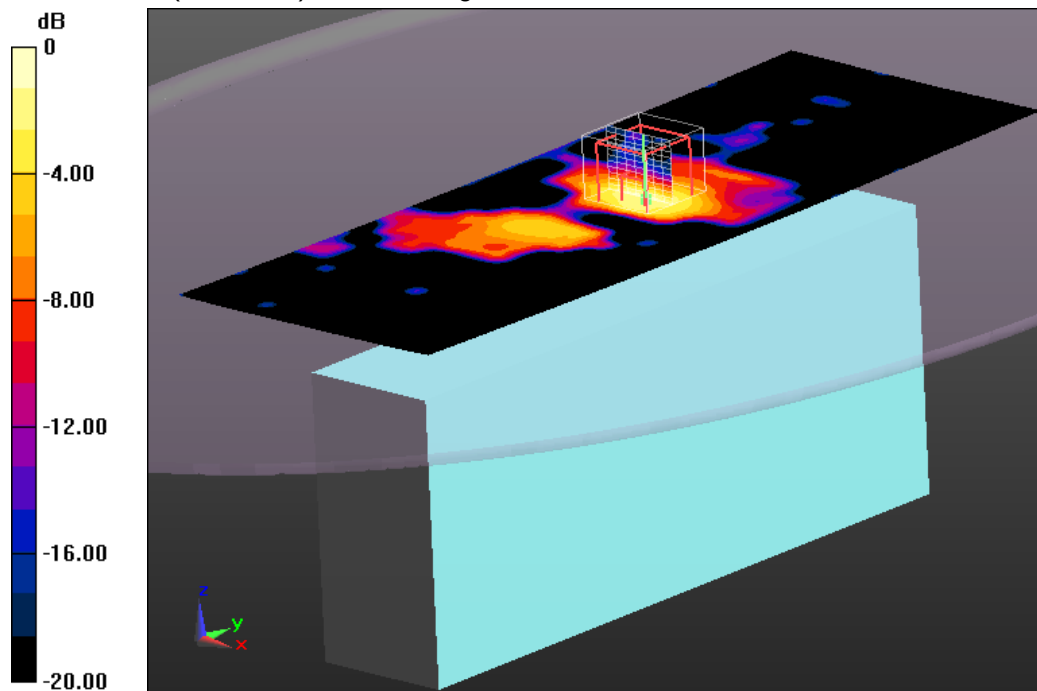

0 dB = 0.341 W/kg = -4.67 dBW/kg

Additional information:

position or distance of DUT to SAM: 20mm

ambient temperature: 22.3°C; liquid temperature: 21.8°C

Date/Time: 04.03.2015 10:20:08

FCC_EN62209-2 WLAN 5GHz body worn**DUT: Motorola; Type: Workabout Pro4; Serial: WPQACE240073C1**

Communication System: UID 0, WLAN 5GHz (0); Communication System Band: 5 GHz Band; Frequency: 5260 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.268$ S/m; $\epsilon_r = 50.327$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(4.4, 4.4, 4.4); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL5000/Rear Middle 15mm (Aux Antenna)/Area Scan (161x301x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.196 W/kg


MSL5000/Rear Middle 15mm (Aux Antenna)/Zoom Scan (12x9x12)/Cube 0:Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.503 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.155 W/kg

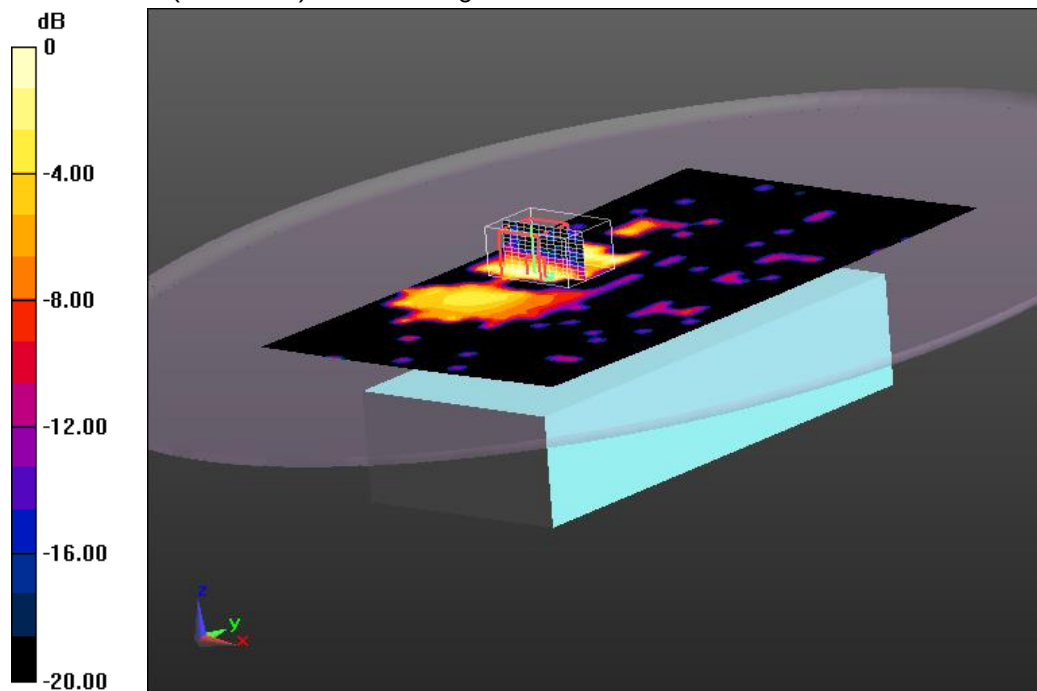

0 dB = 0.155 W/kg = -8.10 dBW/kg

Additional information:

position or distance of DUT to SAM: 15mm

ambient temperature: 22.4°C; liquid temperature: 22.0°C

FCC_EN62209-2 WLAN 5GHz body worn**DUT: Motorola; Type: Workabout Pro4; Serial: WPQACE240073C1**

Communication System: UID 0, WLAN 5GHz (0); Communication System Band: 5 GHz Band; Frequency: 5260 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.268$ S/m; $\epsilon_r = 50.327$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(4.4, 4.4, 4.4); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL5000/Right Side Middle 20mm (Aux Antenna)/Area Scan (111x301x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.197 W/kg


MSL5000/Right Side Middle 20mm (Aux Antenna)/Zoom Scan**(8x8x12)/Cube 0:** Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.491 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.520 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.268 W/kg

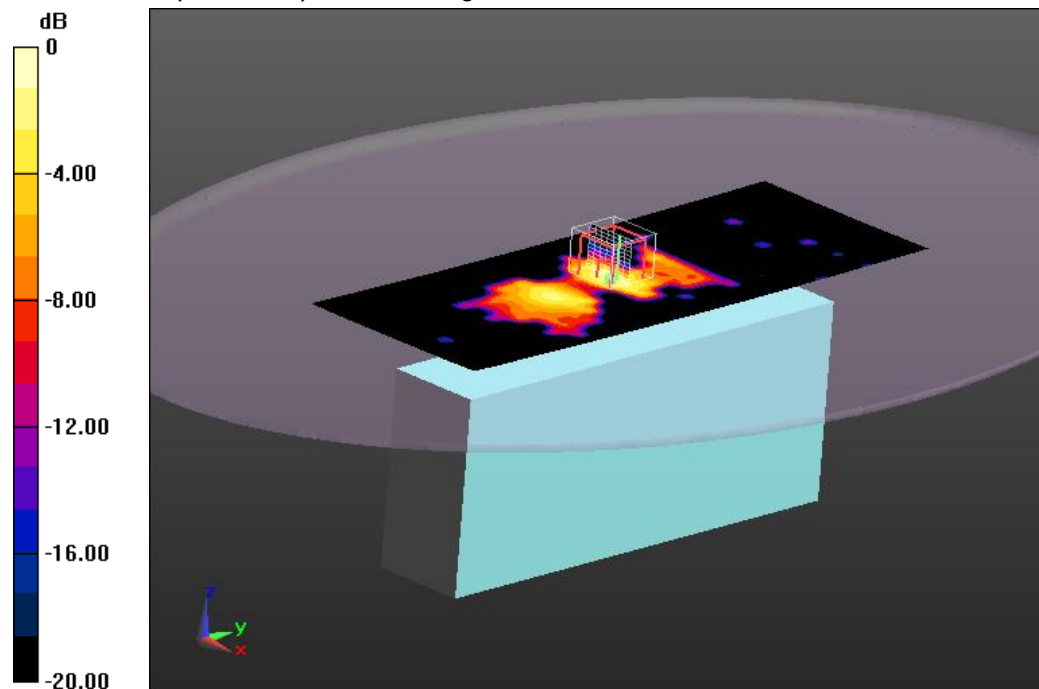

0 dB = 0.268 W/kg = -5.72 dBW/kg

Additional information:

position or distance of DUT to SAM: 20mm

ambient temperature: 22.4°C; liquid temperature: 22.0°C

FCC_EN62209-2 WLAN 5GHz body worn**DUT: Motorola; Type: Workabout Pro4; Serial: WPQACE240073C1**

Communication System: UID 0, WLAN 5GHz (0); Communication System Band: 5 GHz Band; Frequency: 5280 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 50.31$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(4.4, 4.4, 4.4); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL5000/Rear Middle 0mm (Main Antenna)/Area Scan (161x301x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.371 W/kg


MSL5000/Rear Middle 0mm (Main Antenna)/Zoom Scan (8x9x12)/Cube 0:Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 9.191 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.756 W/kg

SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.386 W/kg

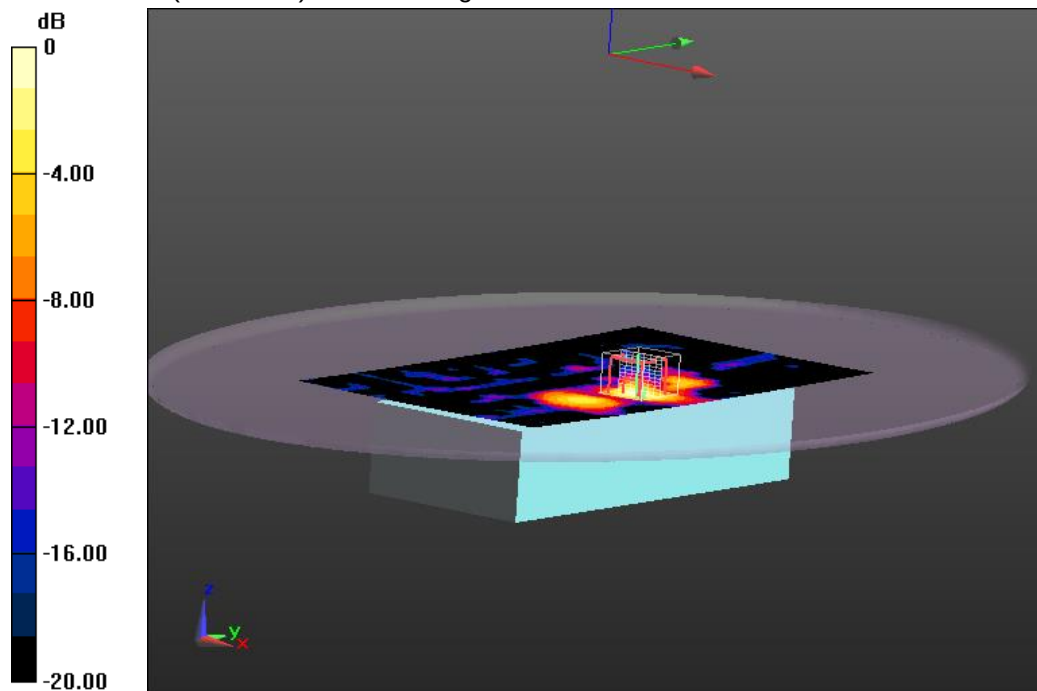

0 dB = 0.386 W/kg = -4.13 dBW/kg

Additional information:

position or distance of DUT to SAM: 0mm

ambient temperature: 22.3°C; liquid temperature: 21.8°C

FCC_EN62209-2 WLAN 5GHz body worn**DUT: Motorola; Type: Workabout Pro4; Serial: WPQACE240073C1**

Communication System: UID 0, WLAN 5GHz (0); Communication System Band: 5 GHz Band; Frequency: 5280 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 50.31$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(4.4, 4.4, 4.4); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL5000/Left Side Middle 0mm (Main Antenna)/Area Scan (111x301x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.17 W/kg


MSL5000/Left Side Middle 0mm (Main Antenna)/Zoom Scan (8x8x12)/Cube**0:** Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 24.574 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 6.83 W/kg

SAR(1 g) = 1.47 W/kg; SAR(10 g) = 0.365 W/kg

Maximum value of SAR (measured) = 3.11 W/kg

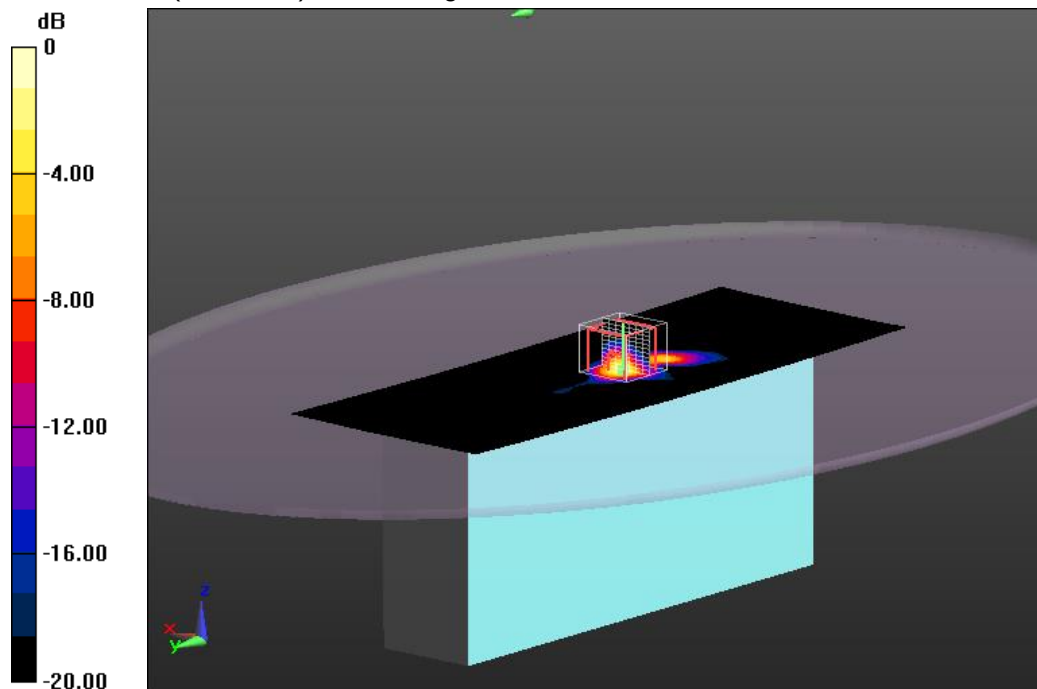

0 dB = 3.11 W/kg = 4.93 dBW/kg

Additional information:

position or distance of DUT to SAM: 0mm

ambient temperature: 22.3°C; liquid temperature: 21.8°C

Date/Time: 04.03.2015 09:29:27

FCC_EN62209-2 WLAN 5GHz body worn**DUT: Motorola; Type: Workabout Pro4; Serial: WPQACE240073C1**

Communication System: UID 0, WLAN 5GHz (0); Communication System Band: 5 GHz Band; Frequency: 5260 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.268$ S/m; $\epsilon_r = 50.327$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(4.4, 4.4, 4.4); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL5000/Rear Middle 0mm (Aux Antenna)/Area Scan (161x301x1): Interpolatedgrid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.301 W/kg


MSL5000/Rear Middle 0mm (Aux Antenna)/Zoom Scan (9x9x12)/Cube 0:Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 8.343 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.567 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.314 W/kg

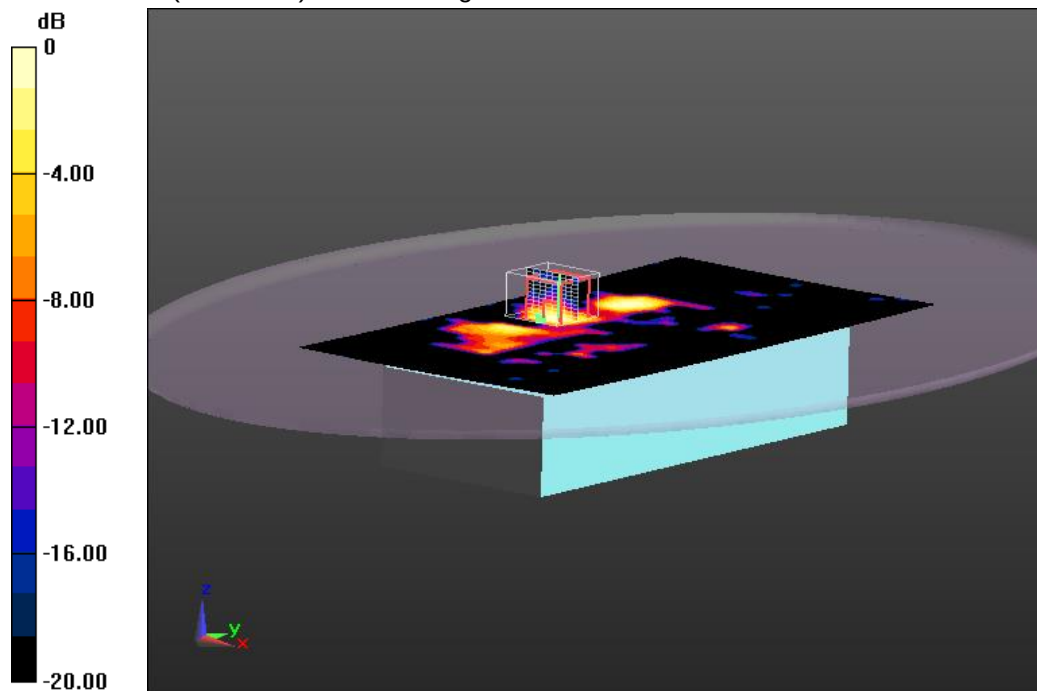

0 dB = 0.314 W/kg = -5.03 dBW/kg

Additional information:

position or distance of DUT to SAM: 0mm

ambient temperature: 22.4°C; liquid temperature: 22.0°C

Date/Time: 04.03.2015 11:20:26

FCC_EN62209-2 WLAN 5GHz body worn**DUT: Motorola; Type: Workabout Pro4; Serial: WPQACE240073C1**

Communication System: UID 0, WLAN 5GHz (0); Communication System Band: 5 GHz Band; Frequency: 5260 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.268$ S/m; $\epsilon_r = 50.327$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3944; ConvF(4.4, 4.4, 4.4); Calibrated: 19.08.2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL5000/Right Side Middle 0mm (Aux Antenna)/Area Scan (111x301x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.52 W/kg


MSL5000/Right Side Middle 0mm (Aux Antenna)/Zoom Scan (8x8x12)/Cube**0:** Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 20.653 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 6.57 W/kg

SAR(1 g) = 1.38 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 2.97 W/kg

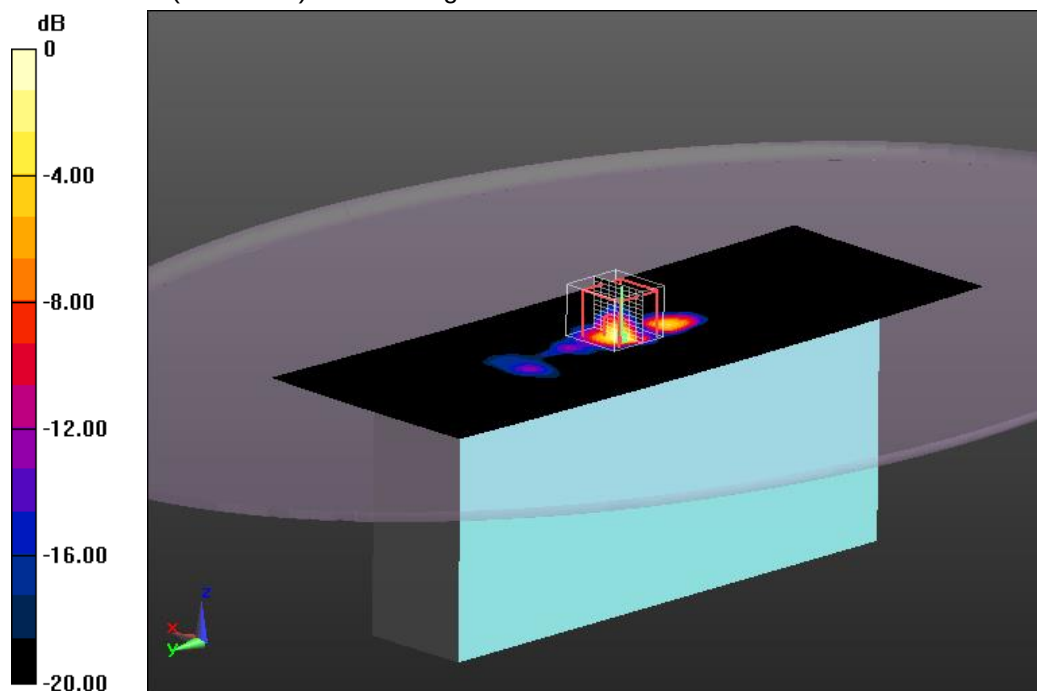

0 dB = 2.97 W/kg = 4.73 dBW/kg

Additional information:

position or distance of DUT to SAM: 0mm

ambient temperature: 22.4°C; liquid temperature: 22.0°C

Annex B.3: Liquid depth

Photo 1: Liquid depth 2450 MHz body simulating liquid


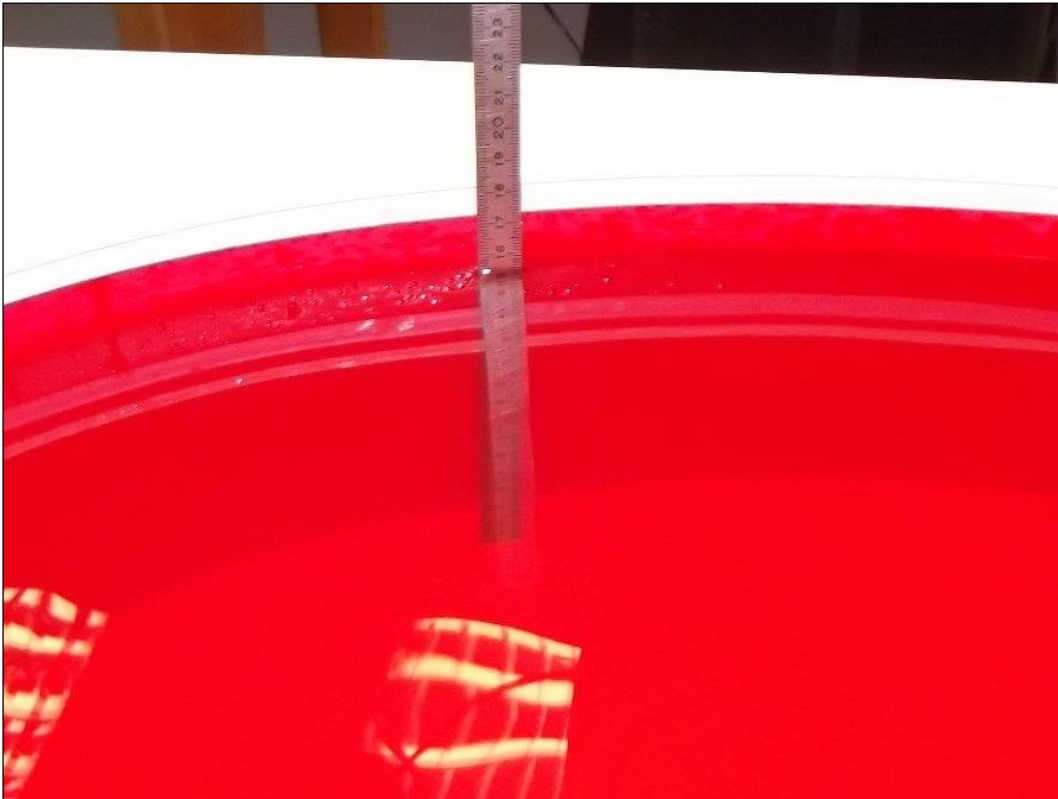


Photo 2: Liquid depth 5 GHz body simulating liquid

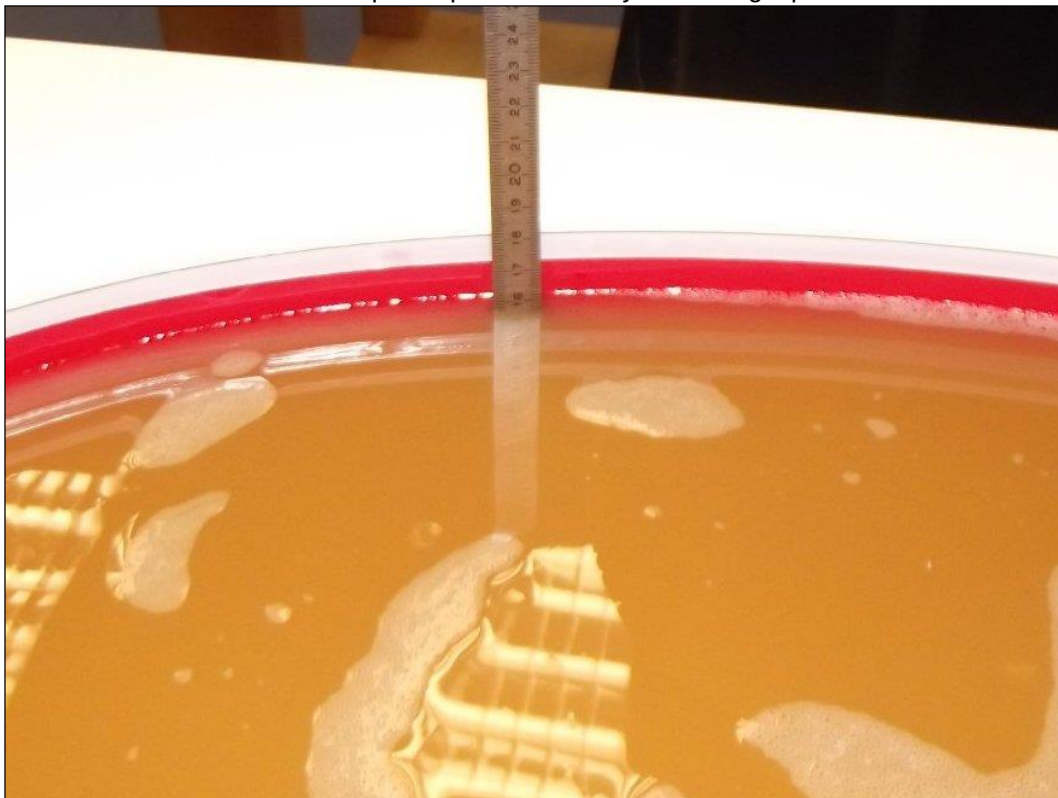

Annex C: Photo documentation

Photo 1: Measurement System DASY 5

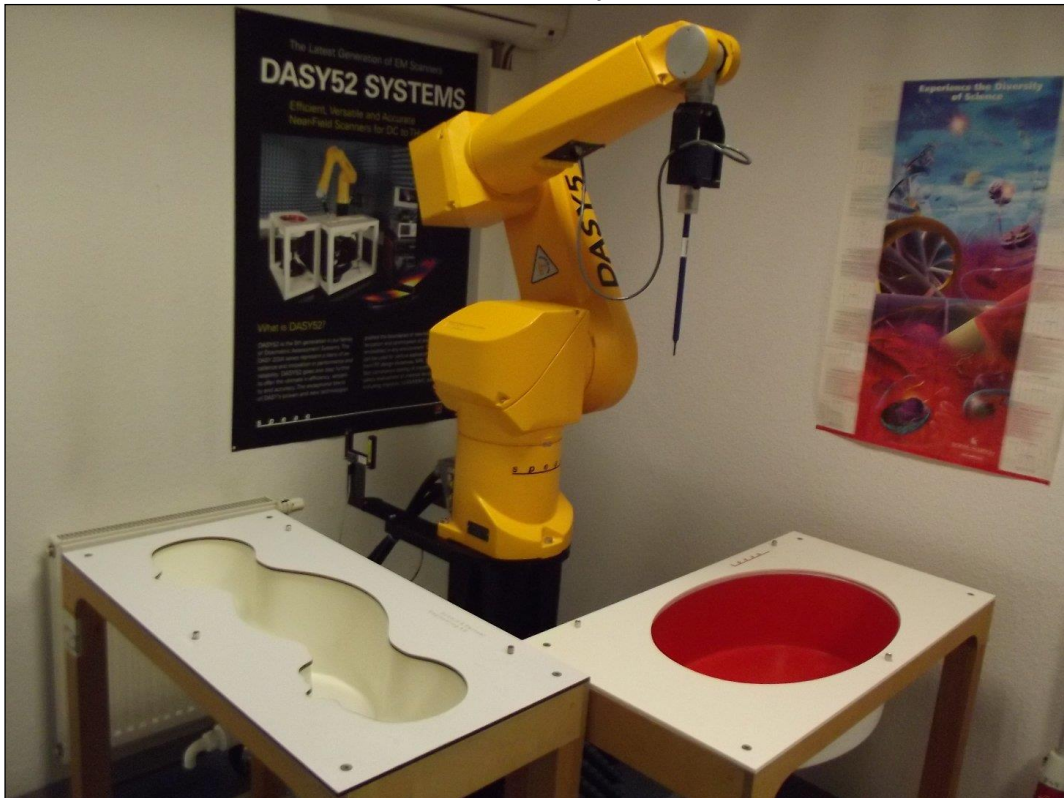


Photo 2: DUT - front view



Photo 3: DUT - side view



Photo 4: DUT - bottom view



Photo 5: DUT - rear view



Photo 6: DUT - rear view (open with battery)



Photo 7: DUT - rear view (open without battery)



Photo 8: DUT - label



Photo 9: Test position body rear with 15 mm distance

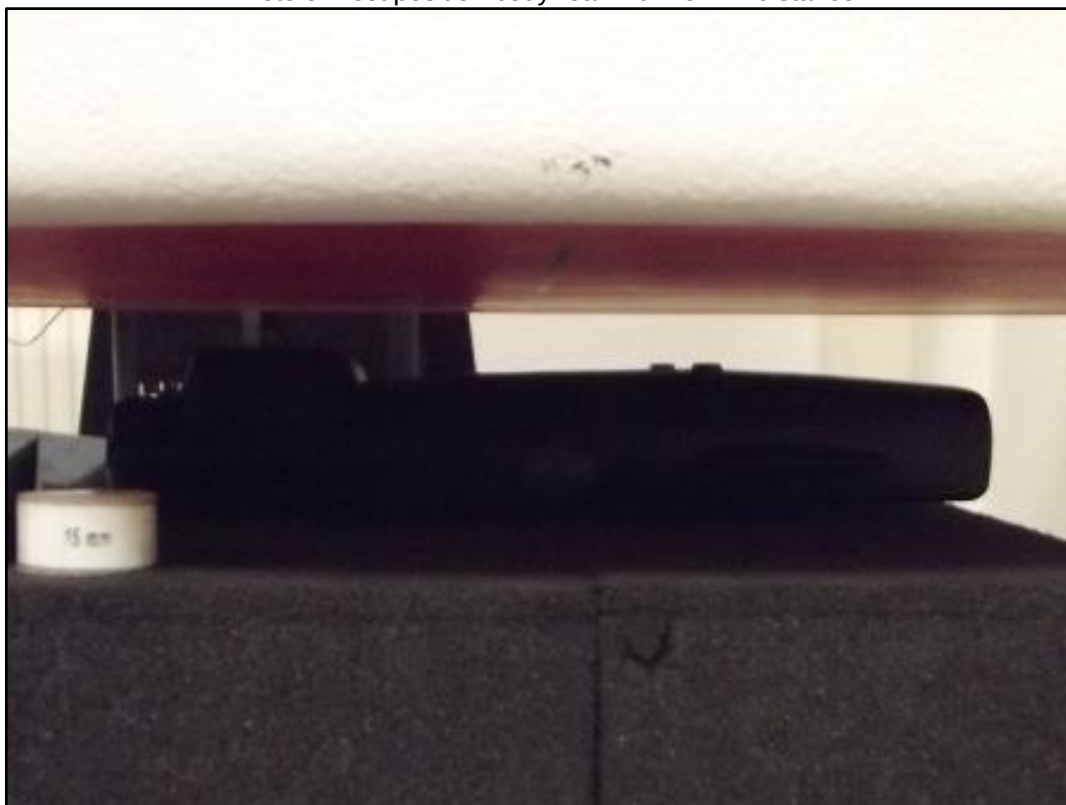


Photo 10: Test position body left side with 20 mm distance



Photo 11: Test position body right side with 20 mm distance



Photo 12: Test position body rear with 0 mm distance



Photo 13: Test position left side with 0 mm distance



Photo 14: Test position right side with 0 mm distance



Annex D: Calibration parameters

Calibration parameters are described in the additional document:

Appendix to test report no. 1-9470/15-01-02
Calibration data, Phantom certificate
and detail information of the DASY5 System

Annex E: Document History

Version	Applied Changes	Date of Release
	Initial Release	2015-03-05

Annex F: Further Information**Glossary**

BW	-	Bandwidth
DTS	-	Distributed Transmission System
DUT	-	Device under Test
EUT	-	Equipment under Test
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
LTE	-	Long Term Evolution
N/A	-	not applicable
PCE	-	Personal Consumption Expenditure
OET	-	Office of Engineering and Technology
RB	-	resource block(s)
SAR	-	Specific Absorption Rate
S/N	-	Serial Number
SPLSR _i	-	SAR-to-(peak-locations spacing) ratio
SW	-	Software
UNII	-	Unlicensed National Information Infrastructure