








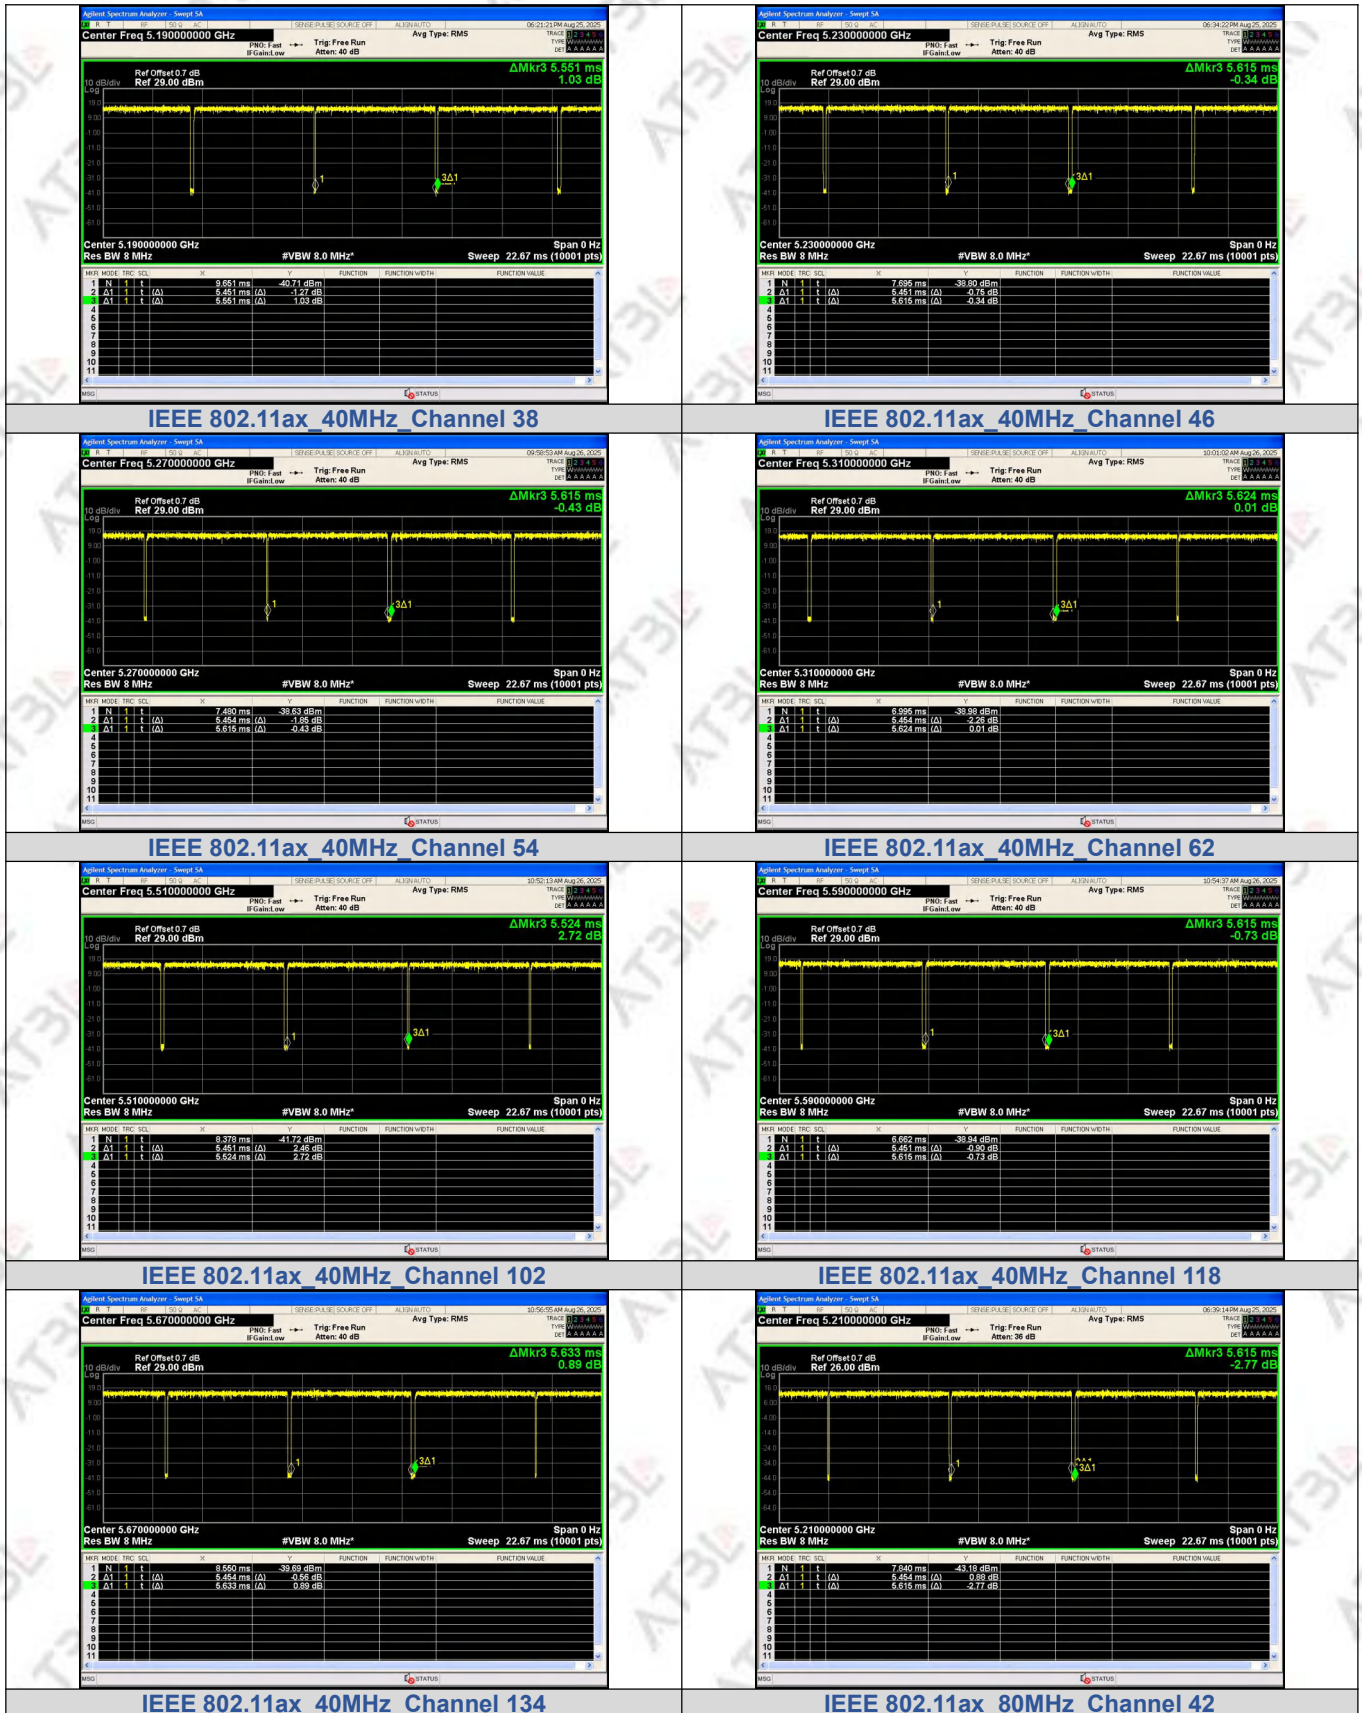


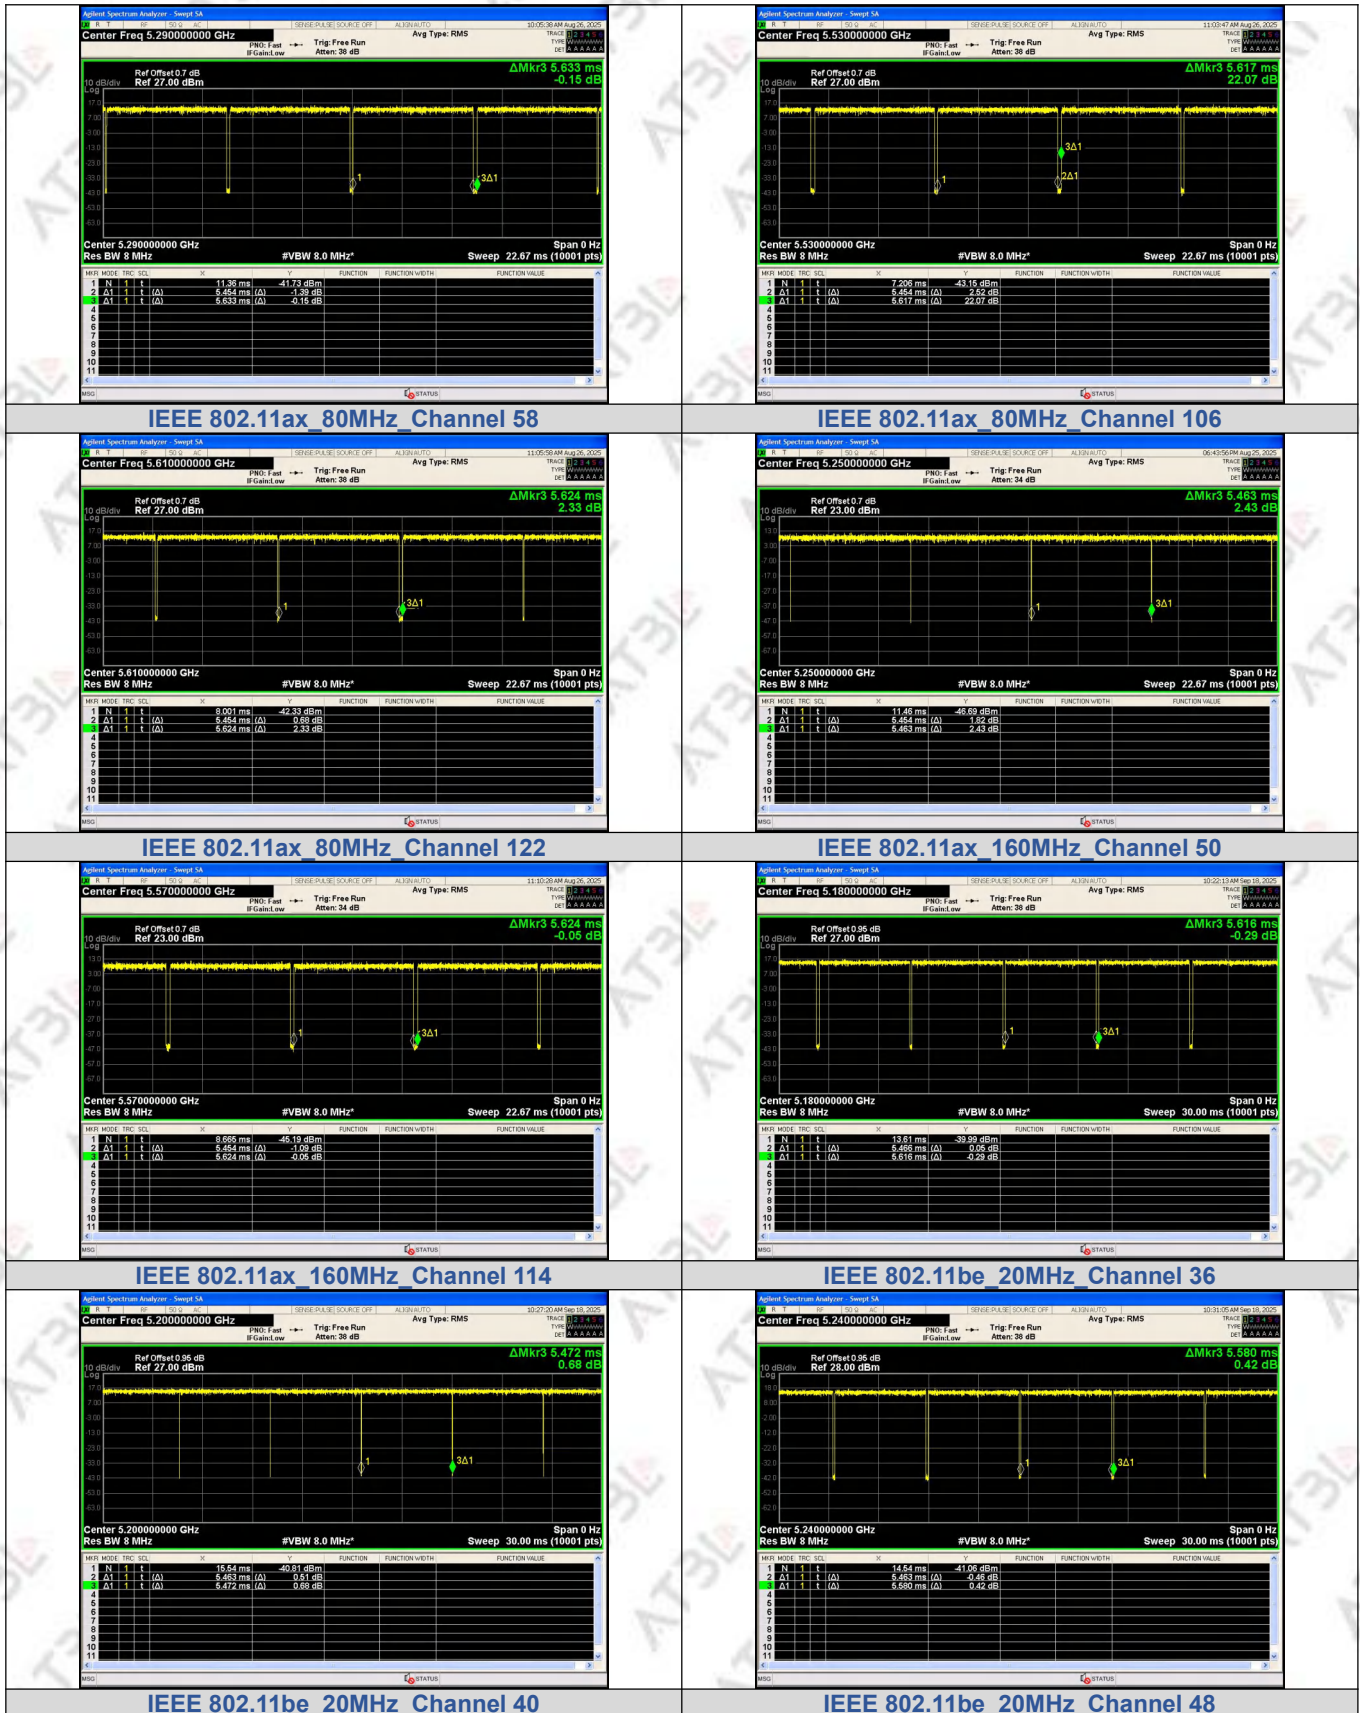


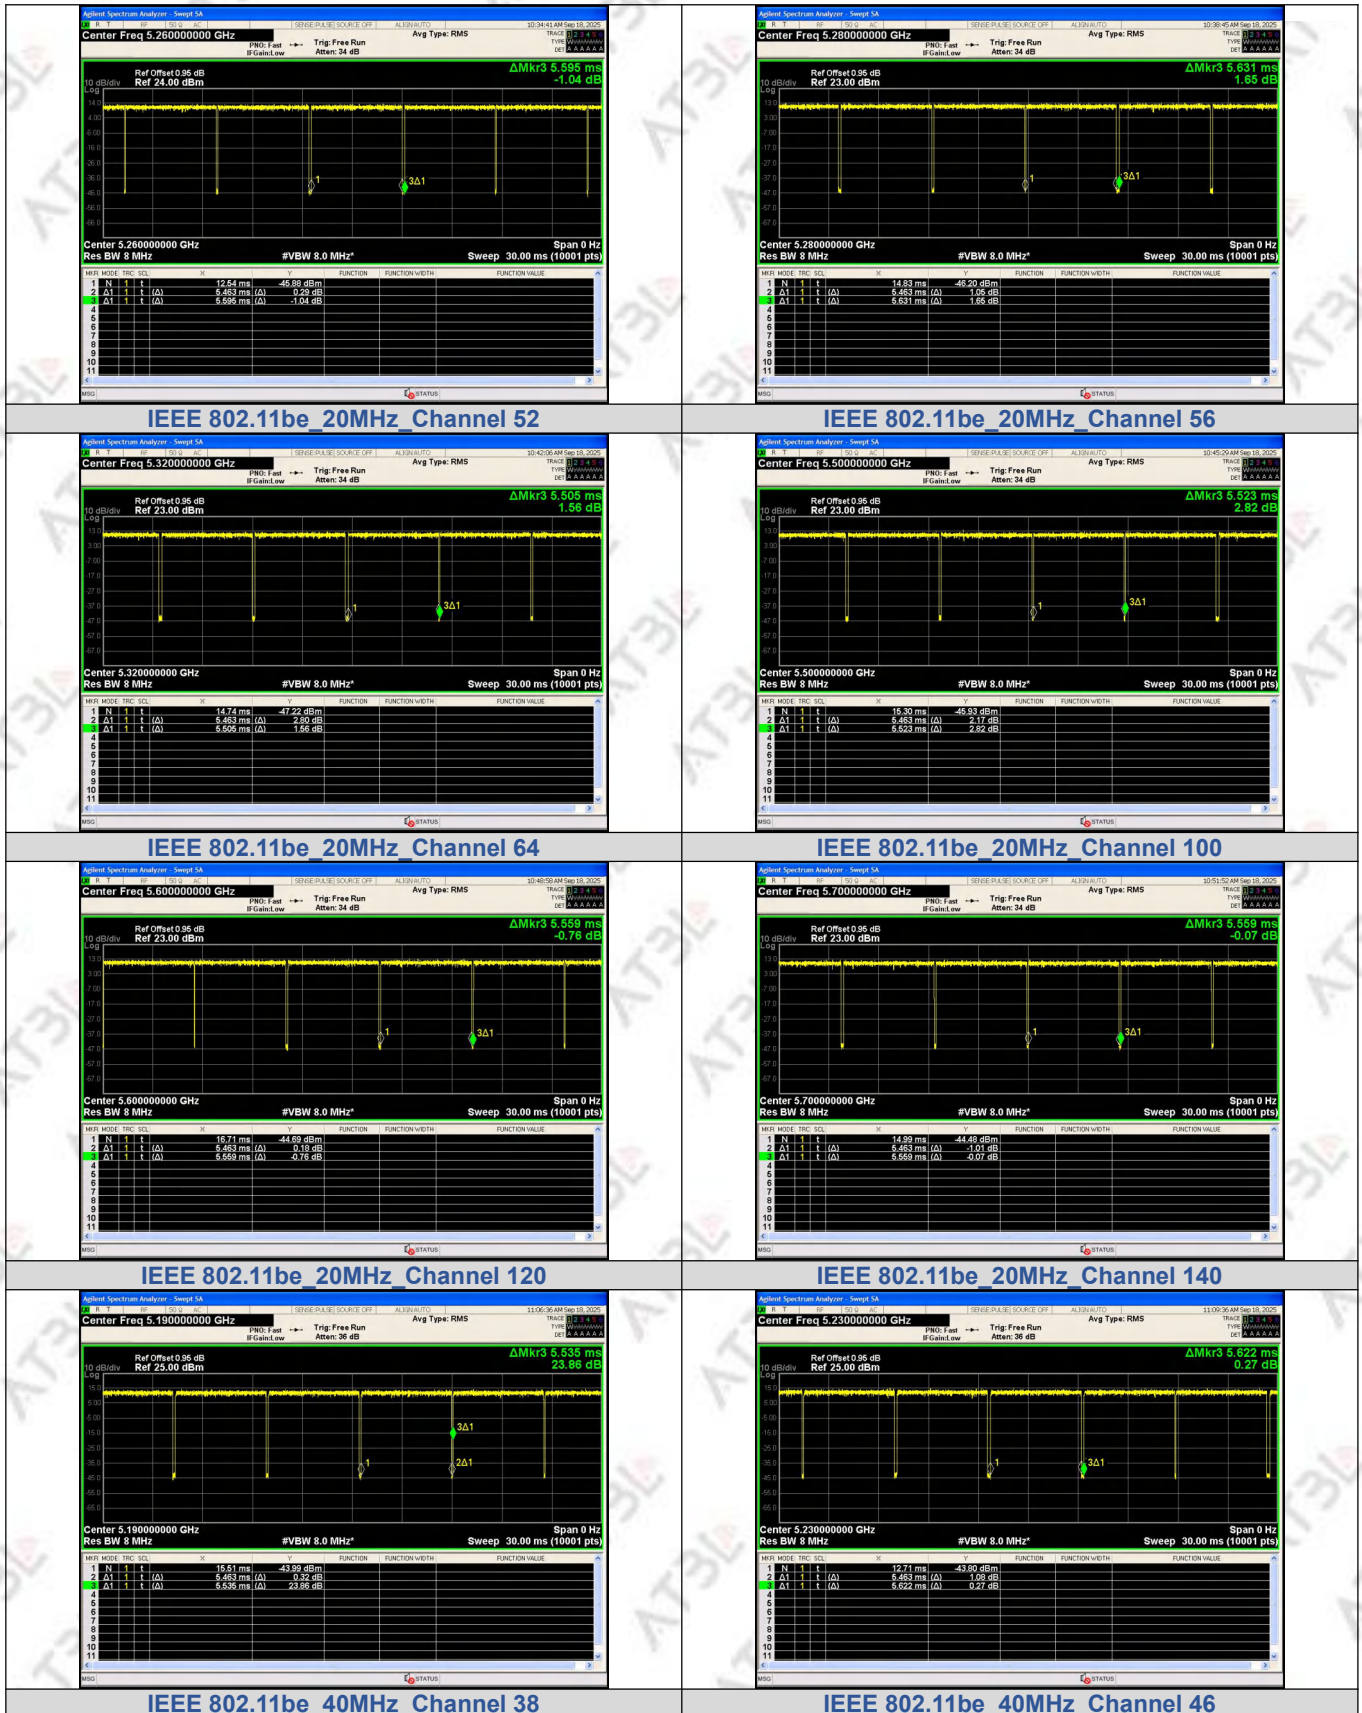

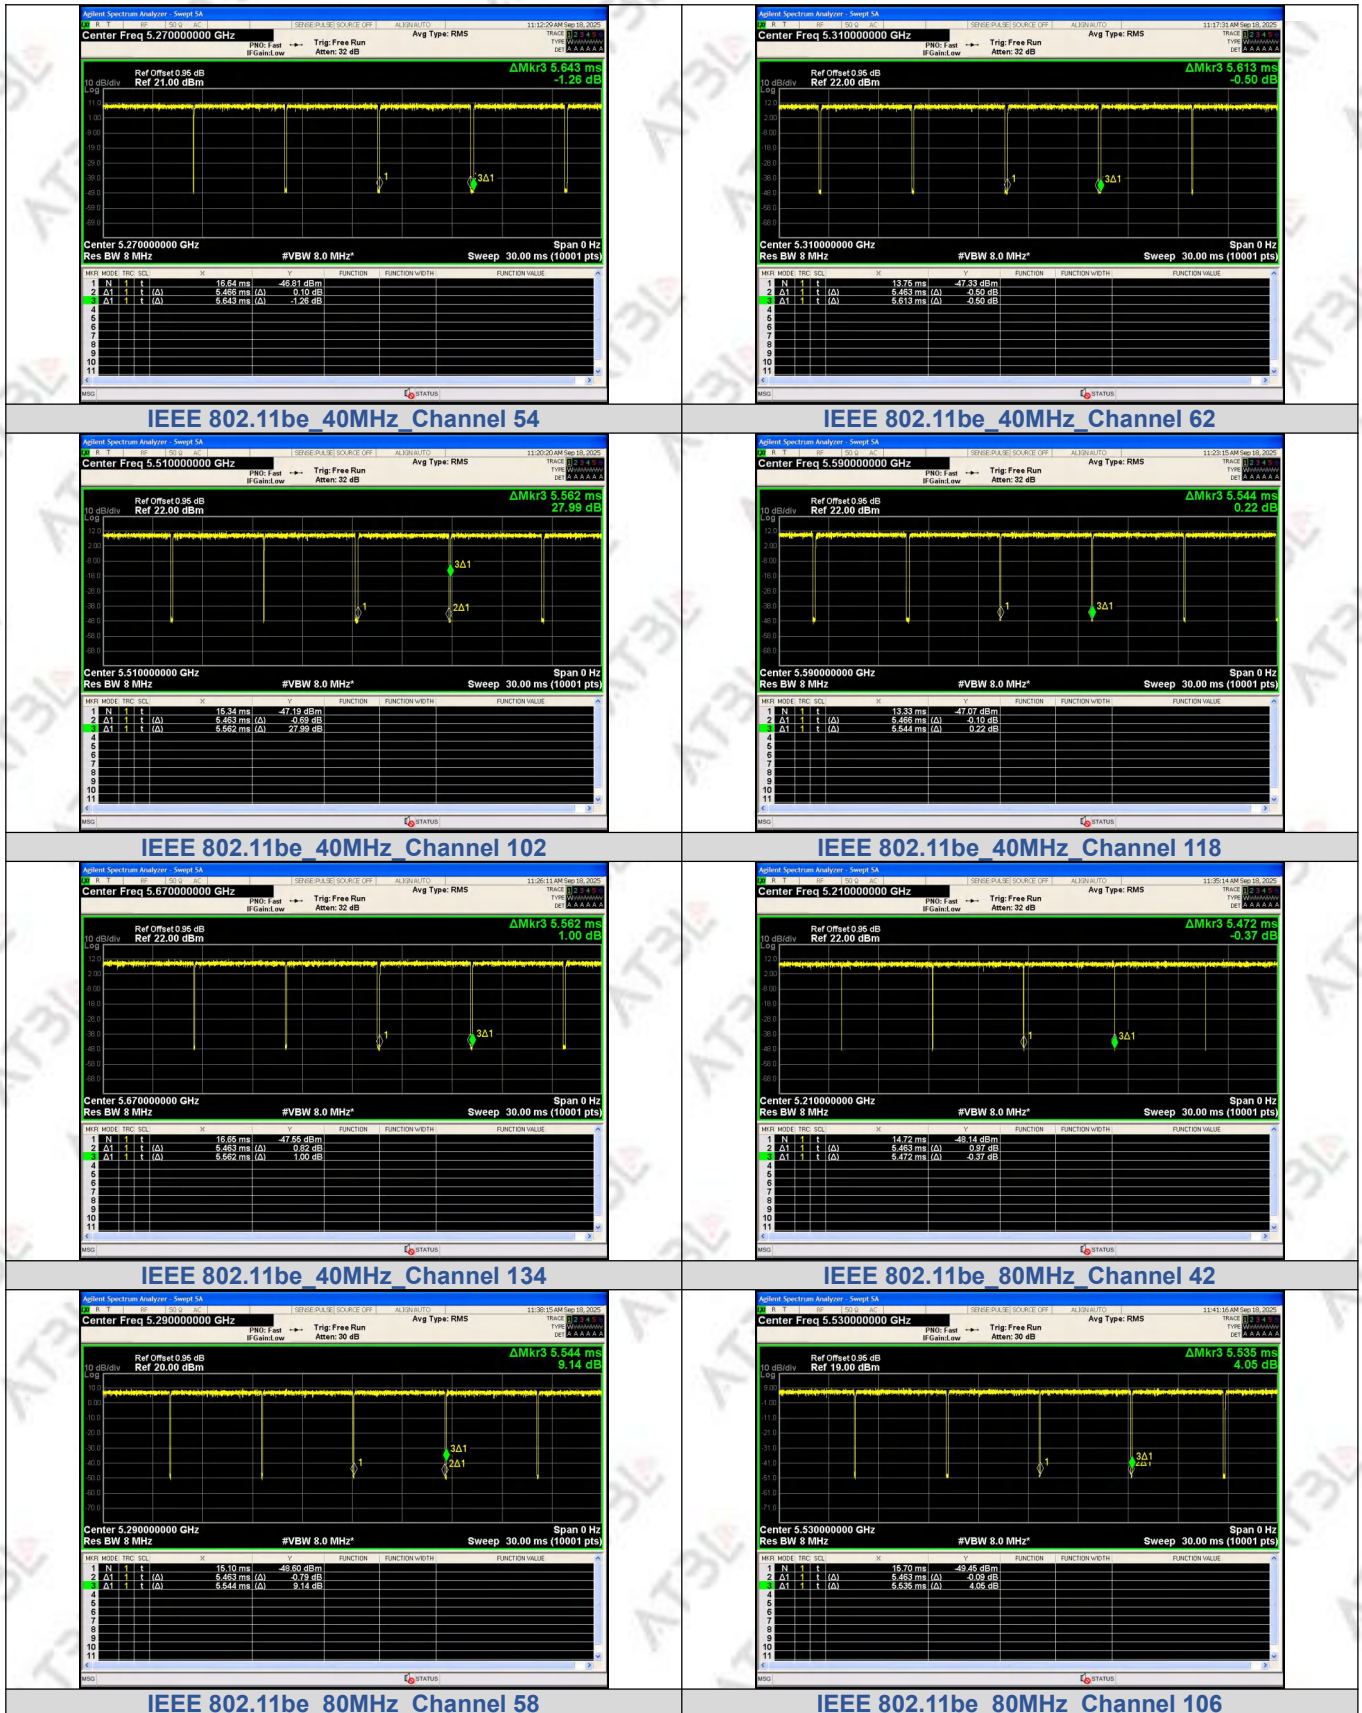


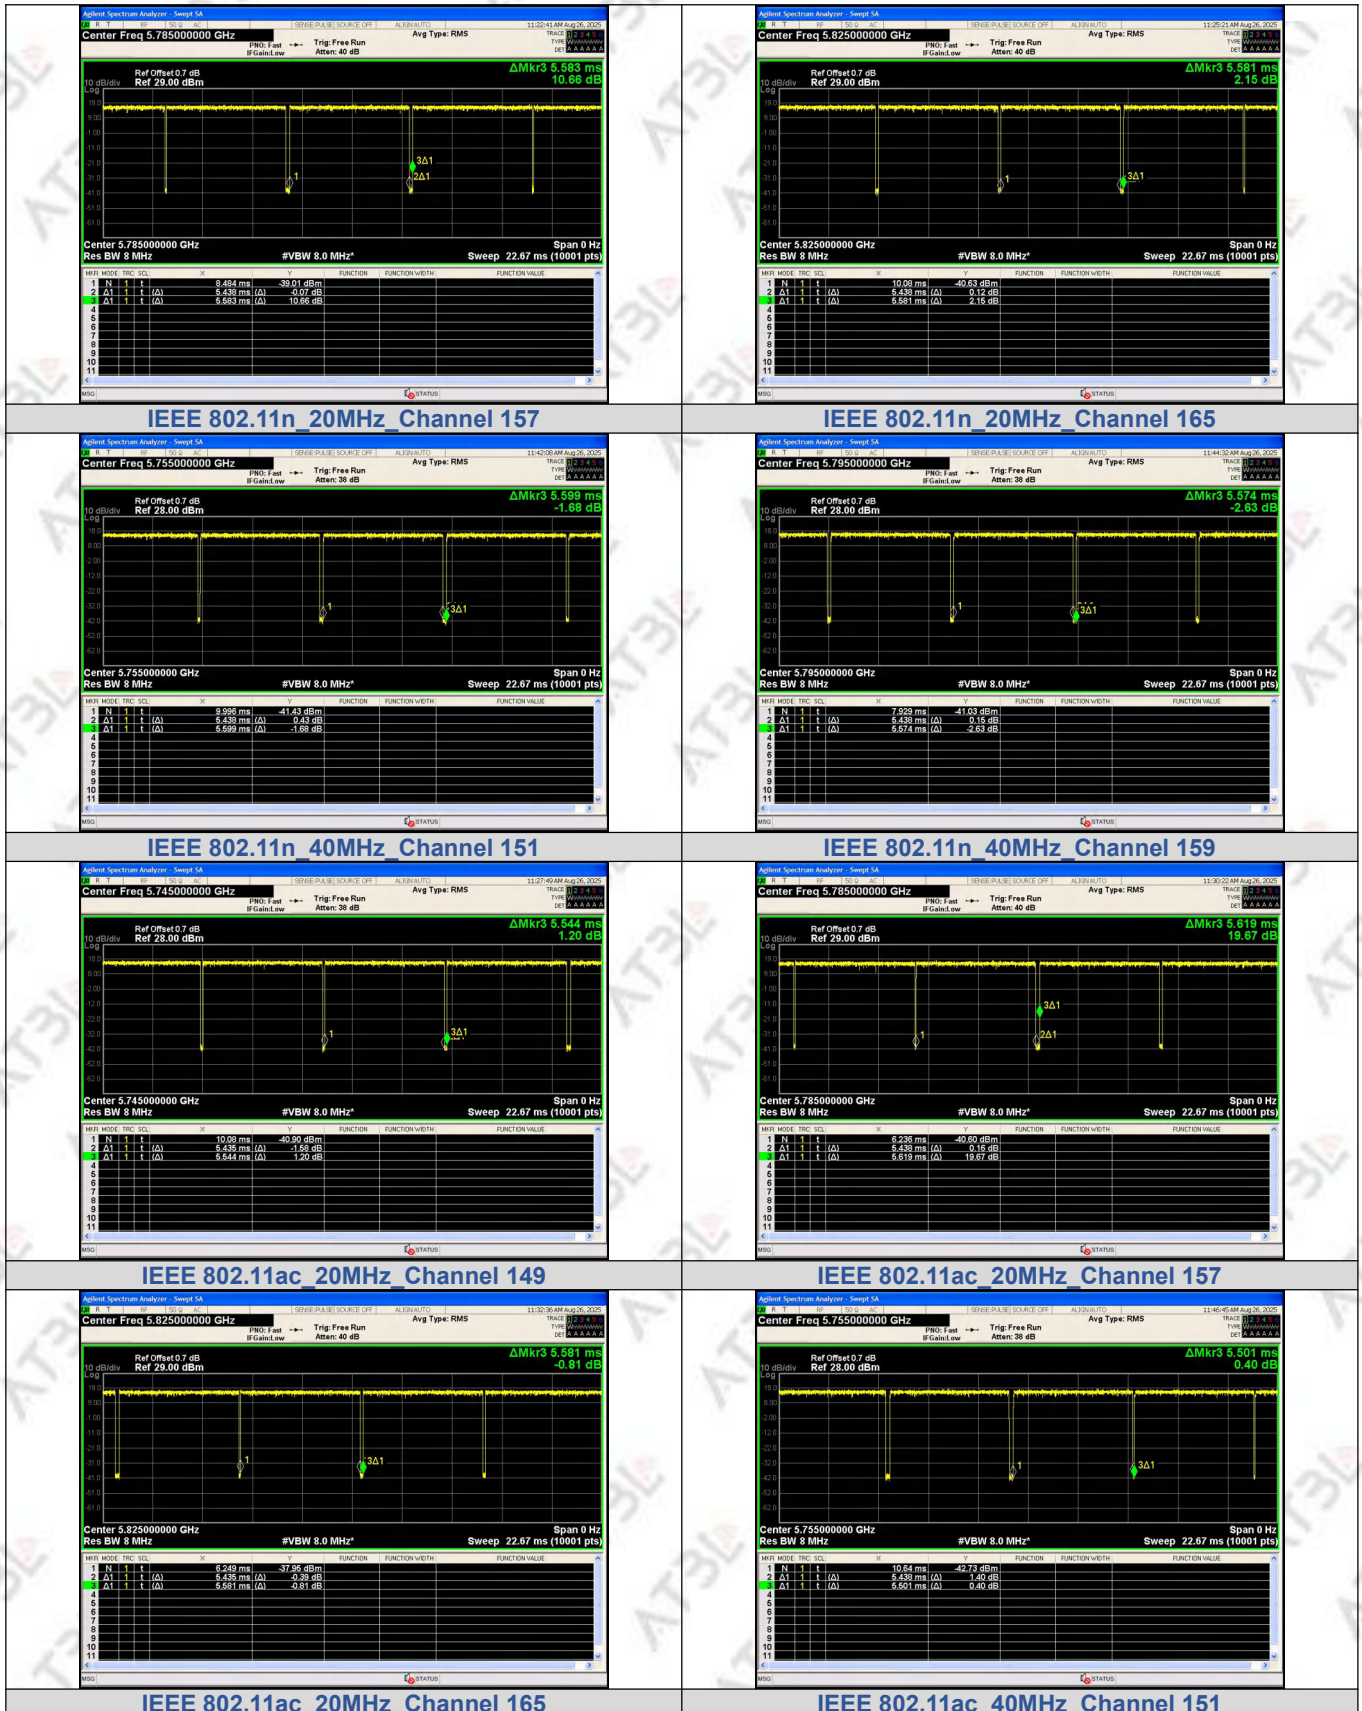

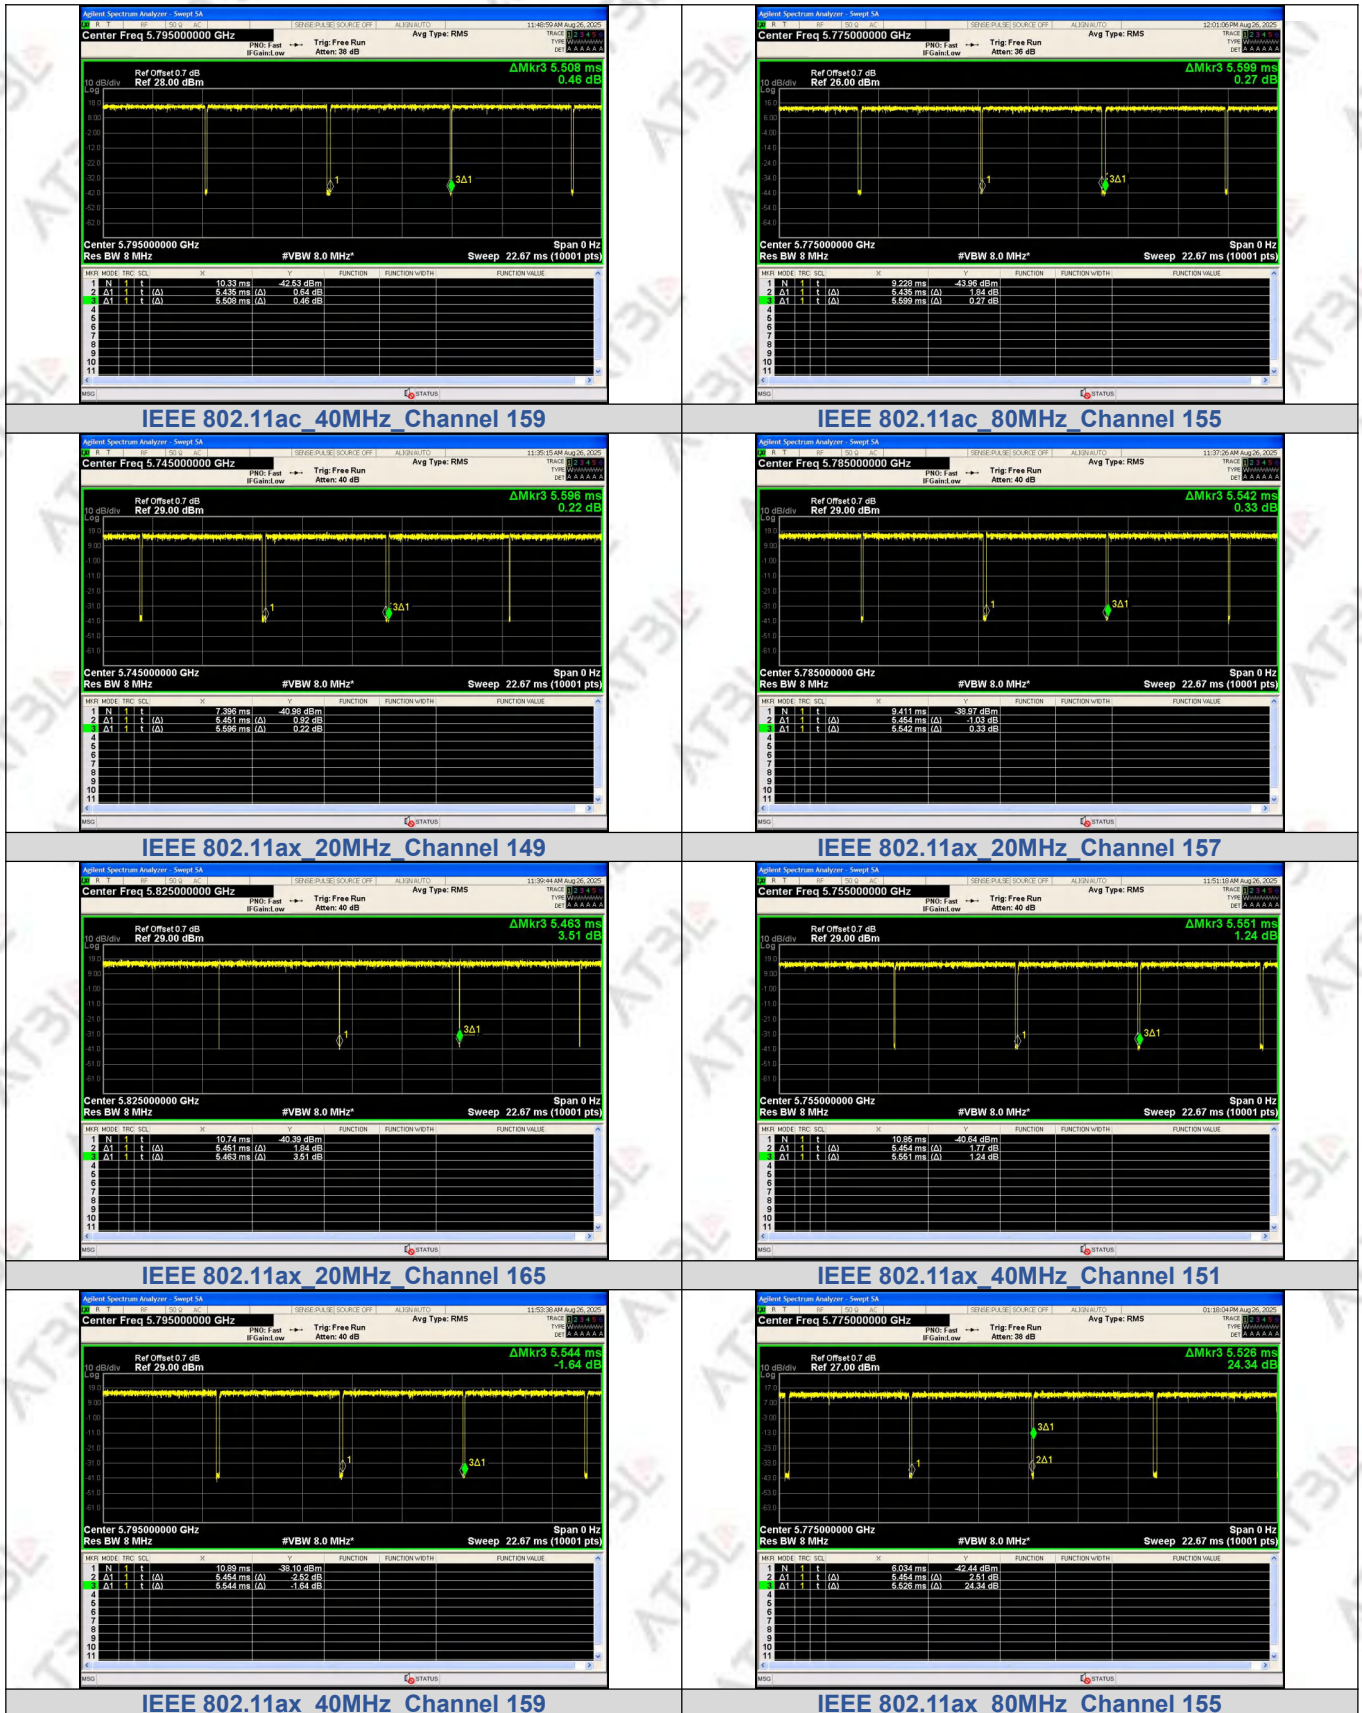


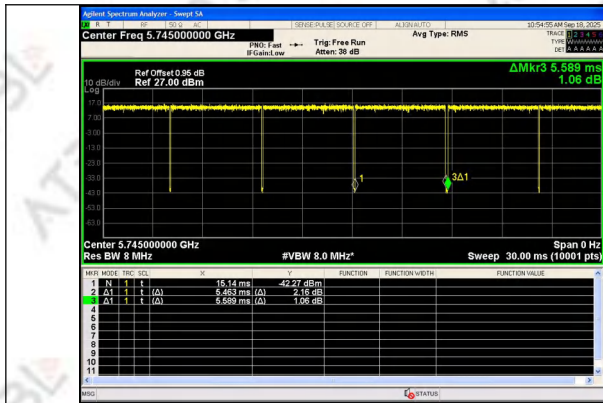


IEEE 802.11be 20MHz Channel 149

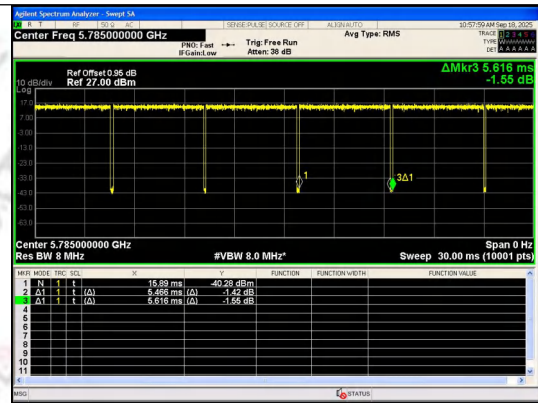


IEEE 802.11be 20MHz Channel 157

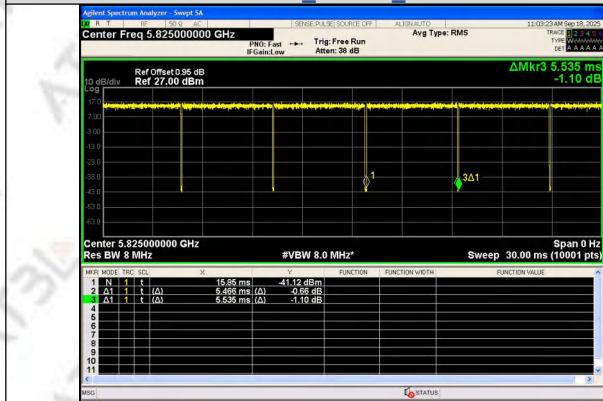


IEEE 802.11be 20MHz Channel 165

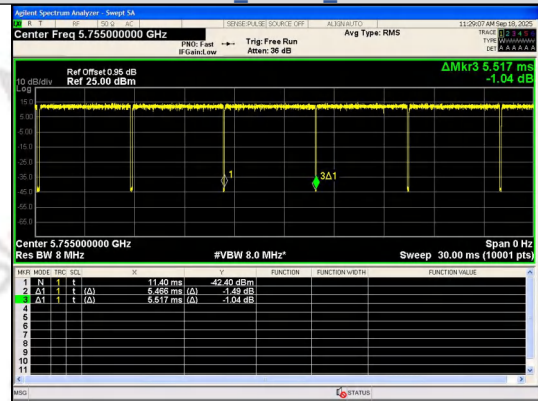

IEEE 802.11be 40MHz Channel 151

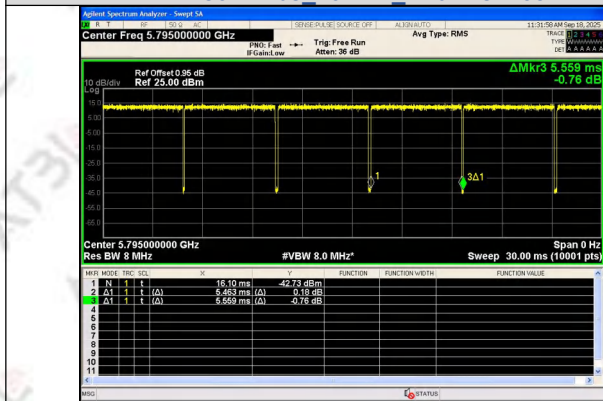

IEEE 802.11be 40MHz Channel 159

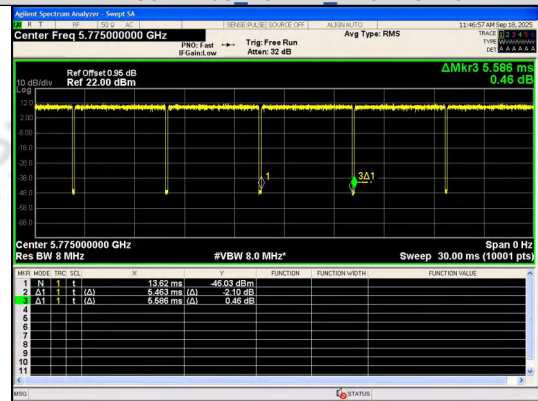

IEEE 802.11be 80MHz Channel 155

2.Maximum Conducted Average Output Power and TPC Power

Test Results:

Note:

1.For 5.25-5.35 GHz ,5.5 GHz-5.7 GHz Limit:

11dBm + 10 log B(26 dB emission bandwidth >20M) >23.98dBm;

2.KDB662911 D01

d) *Unequal antenna gains, with equal transmit powers.* For antenna gains given by $G_1, G_2, \dots, G_N$ dBi

(i) If transmit signals are *correlated*, then

Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi [Note the “20”s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

3.directional gain is calculated as follows:

- For power measurements on all devices,

5180~5250MHz:

Directional Gain=8.19dBi;

5260~5320MHz:

Directional Gain=8.11dBi;

5500 ~ 5700MHz:

Directional Gain=8.38dBi;

5745 ~ 5825MHz:

Directional Gain=8.07dBi;

The POWER calculation limits are as follows:

For 5180~5250MHz=30-(8.19-6)=**27.81dBm**; For 5260~5320MHz=23.89-(8.11-6)=**21.78dBm**;

For 5500 ~ 5700MHz=23.89-(8.38-6)=**21.51dBm**; For 5745 ~ 5825MHz=30-(8.07-6)=**27.93dBm**

Mode	Channel	RU & Index	Ant. 1 (dBm)	Ant. 2 (dBm)	Total (dBm)	Limit (dBm)	Result
IEEE 802.11a	36	N/A	19.08	19.08	22.090	≤27.81	PASS
	40		19.01	19.01	22.020	≤27.81	PASS
	48		19.25	19.25	22.260	≤27.81	PASS
	52		14.79	14.79	17.800	≤21.78	PASS
	56		14.65	14.65	17.660	≤21.78	PASS
	64		15.1	15.1	18.110	≤21.78	PASS
	100		14.21	14.21	17.220	≤21.51	PASS
	120		14.57	14.57	17.580	≤21.51	PASS
	140		14.85	14.85	17.860	≤21.51	PASS
	149		20.4	18.69	22.639	≤27.93	PASS
	157		20.34	19.24	22.835	≤27.93	PASS
	165		20.16	19.49	22.848	≤27.93	PASS
IEEE 802.11n_20	36	N/A	19.3	19.3	22.310	≤27.81	PASS
	40		19.16	19.16	22.170	≤27.81	PASS
	48		19.65	19.65	22.660	≤27.81	PASS
	52		14.89	14.89	17.900	≤21.78	PASS
	56		14.77	14.77	17.780	≤21.78	PASS
	64		14.36	14.36	17.370	≤21.78	PASS
	100		14.48	14.48	17.490	≤21.51	PASS
	120		13.96	13.96	16.970	≤21.51	PASS
	140		14.2	14.2	17.210	≤21.51	PASS
	149		20.42	18.8	22.695	≤27.93	PASS
	157		20.3	19.25	22.817	≤27.93	PASS
	165		20.25	19.47	22.888	≤27.93	PASS
IEEE 802.11n_40	38	N/A	22.04	22.04	25.050	≤27.81	PASS
	46		22.46	22.46	25.470	≤27.81	PASS
	54		15.32	15.32	18.330	≤21.78	PASS

	62		15.17	15.17	18.180	≤21.78	PASS
	102		14.64	14.64	17.650	≤21.51	PASS
	118		15.16	15.16	18.170	≤21.51	PASS
	134		15.42	15.42	18.430	≤21.51	PASS
	151		22.98	21.26	25.215	≤27.93	PASS
	159		22.7	21.82	25.293	≤27.93	PASS
IEEE 802.11ac_20	36		19.08	19.08	22.090	≤27.81	PASS
	40		19.14	19.14	22.150	≤27.81	PASS
	48		19.45	19.45	22.460	≤27.81	PASS
	52		13.91	13.91	16.920	≤21.78	PASS
	56		13.83	13.83	16.840	≤21.78	PASS
	64		14.31	14.31	17.320	≤21.78	PASS
	100		14.45	14.45	17.460	≤21.51	PASS
	120		13.81	13.81	16.820	≤21.51	PASS
	140		14.07	14.07	17.080	≤21.51	PASS
	149		20.32	18.68	22.587	≤27.93	PASS
	157		20.34	19.21	22.822	≤27.93	PASS
	165		20.15	19.48	22.838	≤27.93	PASS
IEEE 802.11ac_40	38		22.02	22.02	25.030	≤27.81	PASS
	46		22.15	22.15	25.160	≤27.81	PASS
	54		15.12	15.12	18.130	≤21.78	PASS
	62		14.93	14.93	17.940	≤21.78	PASS
	102		14.48	14.48	17.490	≤21.51	PASS
	118		15.05	15.05	18.060	≤21.51	PASS
	134		15.32	15.32	18.330	≤21.51	PASS
	151		22.74	21.23	25.061	≤27.93	PASS
	159		22.45	21.52	25.020	≤27.93	PASS
IEEE 802.11ac_80	42		22.23	22.23	25.240	≤27.81	PASS
	58		14.95	14.95	17.960	≤21.78	PASS
	106		14.56	14.56	17.570	≤21.51	PASS
	122		14.82	14.82	17.830	≤21.51	PASS
	155		22.57	21.28	24.983	≤27.93	PASS
IEEE 802.11ac_160	50		21.75	21.75	24.760	≤27.81	PASS
	114		14.51	14.51	17.520	≤27.62	PASS
IEEE 802.11ax_20	36		19.23	19.23	22.240	≤27.81	PASS
	40		19.36	19.36	22.370	≤27.81	PASS
	48		19.93	19.93	22.940	≤27.81	PASS
	52		14.05	14.05	17.060	≤21.78	PASS
	56		13.9	13.9	16.910	≤21.78	PASS
	64		14.41	14.41	17.420	≤21.78	PASS
	100		14.56	14.56	17.570	≤21.51	PASS
	120		13.99	13.99	17.000	≤21.51	PASS
	140		14.21	14.21	17.220	≤21.51	PASS
	149		20.48	18.92	22.780	≤27.93	PASS
	157		20.48	19.19	22.893	≤27.93	PASS
	165		20.44	19.57	23.037	≤27.93	PASS
IEEE 802.11ax_40	38	SU	22.16	22.16	25.170	≤27.81	PASS
	46		22.56	22.56	25.570	≤27.81	PASS
	54		15.11	15.11	18.120	≤21.78	PASS
	62		14.98	14.98	17.990	≤21.78	PASS
	102		14.44	14.44	17.450	≤27.62	PASS
	118		15.04	15.04	18.050	≤27.62	PASS
	134		15.32	15.32	18.330	≤27.62	PASS
	151		22.72	21.23	25.049	≤27.93	PASS
	159		22.58	21.68	25.164	≤27.93	PASS
IEEE 802.11ax_80	42		21.92	21.92	24.930	≤27.81	PASS
	58		14.86	14.86	17.870	≤21.78	PASS
	106		14.58	14.58	17.590	≤21.51	PASS
	122		14.82	14.82	17.830	≤21.51	PASS
	155		22.54	20.98	24.840	≤27.93	PASS
IEEE 802.11ax_160	50		21.87	21.87	24.880	≤27.81	PASS
	114		14.52	14.52	17.530	≤21.51	PASS
IEEE 802.11be_20	36		18.39	18.39	21.400	≤27.81	PASS
	40		18.53	18.53	21.540	≤27.81	PASS
	48		18.19	18.19	21.200	≤27.81	PASS
	52		14.8	14.8	17.810	≤21.78	PASS
	56		14.84	14.84	17.850	≤21.78	PASS

	64		14.43	14.43	17.440	≤21.78	PASS
	100		14.39	14.39	17.400	≤21.51	PASS
	120		14.74	14.74	17.750	≤21.51	PASS
	140		14.05	14.05	17.060	≤21.51	PASS
	149		19.42	17.55	21.595	≤27.93	PASS
	157		19.59	16.93	21.471	≤27.93	PASS
	165		18.79	18.28	21.553	≤27.93	PASS
IEEE 802.11be_40	38		17.38	17.38	20.390	≤27.81	PASS
	46		17.99	17.99	21.000	≤27.81	PASS
	54		15.16	15.16	18.170	≤21.78	PASS
	62		14.96	14.96	17.970	≤21.78	PASS
	102		14.55	14.55	17.560	≤21.51	PASS
	118		14.91	14.91	17.920	≤21.51	PASS
	134		15.36	15.36	18.370	≤27.62	PASS
	151		19.65	18.0	21.913	≤27.93	PASS
IEEE 802.11be_80	159		19.64	18.37	22.062	≤27.93	PASS
	42		18.35	18.35	21.360	≤27.81	PASS
	58		14.94	14.94	17.950	≤21.78	PASS
	106		14.58	14.58	17.590	≤21.51	PASS
	122		14.85	14.85	17.860	≤21.51	PASS
IEEE 802.11be_160	155		19.59	17.91	21.841	≤27.93	PASS
	50		18.18	18.18	21.190	≤27.81	PASS
	114		14.05	14.05	17.060	≤21.51	PASS

Transmit Power Control (TPC):

Transmit Power Control (TPC)									
Mode	Frequency (MHz)	Conducted Power		Total (dBm)	Max. Antenna Directional Gain (dBi)	BF. (dBi)	TPC Low Power E.I.R.P. (dBm)	TPC Low Power Limit (dBm)	Results
		Antenna 1 Abs AV Power(dBm)	Antenna 2 Abs AV Power(dBm)						
11a20	5260	6.31	7.47	9.939	8.11	/	18.049	24	Pass
11a20	5300	7.15	8.75	11.034	8.11	/	19.144	24	Pass
11a20	5320	7.30	8.37	10.878	8.11	/	18.988	24	Pass
11n20	5260	7.76	8.08	10.933	8.11	3.0	22.043	24	Pass
11n20	5300	6.87	7.78	10.359	8.11	3.0	21.469	24	Pass
11n20	5320	6.25	7.38	9.862	8.11	3.0	20.972	24	Pass
11n40	5270	7.78	7.97	10.886	8.11	3.0	21.996	24	Pass
11n40	5310	6.96	7.81	10.416	8.11	3.0	21.526	24	Pass
11ac20	5260	7.12	7.42	10.283	8.11	3.0	21.393	24	Pass
11ac20	5300	7.37	7.24	10.316	8.11	3.0	21.426	24	Pass
11ac20	5320	6.31	8.24	10.392	8.11	3.0	21.502	24	Pass
11ac40	5270	7.11	7.40	10.268	8.11	3.0	21.378	24	Pass
11ac40	5310	7.17	8.61	10.960	8.11	3.0	22.07	24	Pass
11ac80	5290	6.59	8.69	10.776	8.11	3.0	21.886	24	Pass
11ac160	5250	6.92	7.63	10.300	8.11	3.0	21.41	24	Pass
11ac160	5570	6.94	7.48	10.229	8.11	3.0	21.339	24	Pass
11ax20	5260	7.34	7.90	10.639	8.11	3.0	21.749	24	Pass
11ax20	5300	6.48	8.27	10.477	8.11	3.0	21.587	24	Pass
11ax20	5320	6.88	8.18	10.589	8.11	3.0	21.699	24	Pass
11ax40	5270	7.62	8.54	11.115	8.11	3.0	22.225	24	Pass
11ax40	5310	7.02	8.77	10.993	8.11	3.0	22.103	24	Pass
11ax80	5290	6.93	7.93	10.469	8.11	3.0	21.579	24	Pass
11ax160	5250	7.44	7.58	10.521	8.11	3.0	21.631	24	Pass
11ax160	5570	7.47	8.14	10.828	8.11	3.0	21.938	24	Pass
11be20	5260	7.70	8.84	11.318	8.11	3.0	22.428	24	Pass
11be20	5300	7.12	8.00	10.593	8.11	3.0	21.703	24	Pass
11be20	5320	6.33	7.57	10.004	8.11	3.0	21.114	24	Pass
11be40	5270	7.60	8.01	10.820	8.11	3.0	21.93	24	Pass
11be40	5310	7.67	7.51	10.601	8.11	3.0	21.711	24	Pass
11be80	5290	7.66	7.64	10.660	8.11	3.0	21.77	24	Pass
11be160	5250	7.81	7.70	10.766	8.11	3.0	21.876	24	Pass
11be160	5570	6.95	7.33	10.154	8.11	3.0	21.264	24	Pass

Transmit Power Control (TPC)									
Mode	Frequency (MHz)	Conducted Power		Total (dBm)	Max. Antenna Directional Gain (dBi)	BF. (dBi)	TPC Low Power E.I.R.P. (dBm)	TPC Low Power Limit (dBm)	Results
		Antenna 1 Abs AV Power(dBm)	Antenna 2 Abs AV Power(dBm)						
11a20	5500	7.08	8.76	11.011	8.38	/	19.391	24	Pass
11a20	5580	6.94	8.18	10.614	8.38	/	18.994	24	Pass
11a20	5700	7.37	8.10	10.761	8.38	/	19.141	24	Pass
11n20	5500	7.10	8.69	10.978	8.38	3.0	22.358	24	Pass
11n20	5580	7.58	8.15	10.885	8.38	3.0	22.265	24	Pass
11n20	5700	7.15	8.14	10.683	8.38	3.0	22.063	24	Pass
11n40	5510	7.35	7.61	10.492	8.38	3.0	21.872	24	Pass
11n40	5550	7.52	7.85	10.698	8.38	3.0	22.078	24	Pass
11n40	5670	6.97	8.59	10.865	8.38	3.0	22.245	24	Pass
11ac20	5500	7.39	7.91	10.668	8.38	3.0	22.048	24	Pass
11ac20	5580	7.37	8.03	10.723	8.38	3.0	22.103	24	Pass
11ac20	5700	6.64	8.55	10.709	8.38	3.0	22.089	24	Pass
11ac40	5510	7.29	8.02	10.681	8.38	3.0	22.061	24	Pass
11ac40	5550	6.78	8.72	10.868	8.38	3.0	22.248	24	Pass
11ac40	5670	7.94	7.85	10.906	8.38	3.0	22.286	24	Pass
11ac80	5530	7.57	7.39	10.491	8.38	3.0	21.871	24	Pass
11ac80	5610	6.74	8.77	10.883	8.38	3.0	22.263	24	Pass
11ac160	5250	6.87	7.12	10.007	8.38	3.0	21.387	24	Pass
11ac160	5570	7.07	8.70	10.971	8.38	3.0	22.351	24	Pass
11ax20	5500	6.74	8.09	10.478	8.38	3.0	21.858	24	Pass
11ax20	5580	7.00	8.31	10.715	8.38	3.0	22.095	24	Pass
11ax20	5700	7.02	8.12	10.615	8.38	3.0	21.995	24	Pass
11ax40	5510	7.19	7.20	10.205	8.38	3.0	21.585	24	Pass
11ax40	5550	7.30	8.27	10.822	8.38	3.0	22.202	24	Pass
11ax40	5670	7.29	8.48	10.936	8.38	3.0	22.316	24	Pass
11ax80	5530	7.14	7.06	10.110	8.38	3.0	21.49	24	Pass
11ax80	5610	7.14	6.68	9.926	8.38	3.0	21.306	24	Pass
11ax160	5250	7.30	8.27	10.822	8.38	3.0	22.202	24	Pass
11ax160	5570	7.30	8.22	10.795	8.38	3.0	22.175	24	Pass
11be20	5500	7.29	8.81	11.126	8.38	3.0	22.506	24	Pass
11be20	5580	7.14	8.76	11.035	8.38	3.0	22.415	24	Pass
11be20	5700	7.14	8.36	10.803	8.38	3.0	22.183	24	Pass
11be40	5510	7.30	8.15	10.756	8.38	3.0	22.136	24	Pass
11be40	5550	7.30	8.00	10.674	8.38	3.0	22.054	24	Pass
11be40	5670	7.07	7.67	10.391	8.38	3.0	21.771	24	Pass
11be80	5530	7.23	8.62	10.991	8.38	3.0	22.371	24	Pass
11be80	5610	6.78	7.59	10.214	8.38	3.0	21.594	24	Pass
11be160	5250	6.81	7.91	10.405	8.38	3.0	21.785	24	Pass
11be160	5570	7.01	8.22	10.667	8.38	3.0	22.047	24	Pass

3. Power Spectral Density

Test Results:

Note:

KDB662911 D01

d) *Unequal antenna gains, with equal transmit powers.* For antenna gains given by $G_1, G_2, \dots, G_N$ dBi

(i) If transmit signals are *correlated*, then

Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi [Note the “20”s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

For CDD transmissions, directional gain is calculated as follows:

- For power spectral density (PSD) measurements on all devices,

5180~5250MHz:

Directional Gain=8.19dBi;

5260~5320MHz:

Directional Gain=8.11dBi;

5500 ~ 5700MHz:

Directional Gain=8.38dBi;

5745 ~ 5825MHz:

Directional Gain=8.07dBi;

The PSD calculation limits are as follows:

For 5180~5240MHz=17-(8.19-6)=**14.81dBm/MHz**; For 5260~5320MHz=11-(8.11-6)=**8.89dBm/MHz**;

For 5500 ~ 5700MHz=11-(8.38-6)=**8.62dBm/MHz**; For 5745 ~ 5825MHz=30-(8.07-6)=**27.93dBm/MHz**

Mode	Channel	RU & Index	Ant. 1 Meas PSD With Duty Cycle Factor (dBm/MHz)	Ant. 2 Meas PSD With Duty Cycle Factor (dBm/MHz)	Total (dBm/MHz)	Limit (dBm/MHz)	Result
IEEE 802.11a	36	N/A	9.49	8.98	12.26	14.81	PASS
	40		9.39	8.96	12.19	14.81	PASS
	48		9.55	9.37	12.47	14.81	PASS
	52		4.07	4.27	7.18	8.89	PASS
	56		3.76	4.31	7.06	8.89	PASS
	64		4.15	3.93	7.06	8.89	PASS
	100		3.80	3.88	6.85	8.62	PASS
	120		3.72	3.49	6.62	8.62	PASS
	140		3.82	3.93	6.89	8.62	PASS
IEEE 802.11n_20	36		9.32	8.69	12.03	14.81	PASS
	40		9.09	8.79	11.95	14.81	PASS
	48		9.77	9.20	12.51	14.81	PASS
	52		4.66	4.43	7.56	8.89	PASS
	56		4.64	4.57	7.62	8.89	PASS
	64		4.39	4.34	7.38	8.89	PASS
	100		4.34	4.02	7.19	8.62	PASS
	120		4.01	4.45	7.25	8.62	PASS
	140		4.12	4.07	7.11	8.62	PASS
IEEE 802.11n_40	38		9.09	7.88	11.54	14.81	PASS
	46		9.51	8.28	11.95	14.81	PASS
	54		2.43	1.67	5.08	8.89	PASS
	62		2.22	1.84	5.05	8.89	PASS
	102		1.71	1.04	4.40	8.62	PASS
	118		2.25	1.74	5.02	8.62	PASS
	134		2.62	1.20	4.98	8.62	PASS
IEEE 802.11ac_20	36		9.34	8.76	12.07	14.81	PASS
	40		9.00	8.68	11.85	14.81	PASS
	48		9.25	9.19	12.23	14.81	PASS
	52		3.91	4.39	7.16	8.89	PASS

	56		3.71	4.54	7.15	8.89	PASS
	64		4.37	4.26	7.32	8.89	PASS
	100		4.42	4.19	7.31	8.62	PASS
	120		3.99	4.48	7.25	8.62	PASS
	140		4.41	3.91	7.17	8.62	PASS
IEEE 802.11ac_40	38		9.09	7.91	11.55	14.81	PASS
	46		9.22	8.32	11.80	14.81	PASS
	54		2.33	1.73	5.05	8.89	PASS
	62		2.38	1.79	5.10	8.89	PASS
	102		1.60	1.31	4.47	8.62	PASS
	118		2.16	1.60	4.90	8.62	PASS
	134		2.35	1.03	4.75	8.62	PASS
IEEE 802.11ac_80	42		6.66	4.81	8.84	14.81	PASS
	58		-0.85	-1.25	1.96	8.89	PASS
	106		-1.35	-1.59	1.54	8.62	PASS
	122		-0.81	-1.36	1.93	8.62	PASS
IEEE 802.11ac_160	50		3.41	2.02	5.78	14.81	PASS
	114		-4.78	-4.35	-1.55	8.62	PASS
IEEE 802.11ax_20	36		8.89	8.82	11.87	14.81	PASS
	40		9.36	8.64	12.03	14.81	PASS
	48		9.70	8.92	12.34	14.81	PASS
	52		3.86	4.51	7.21	8.89	PASS
	56		3.63	4.62	7.17	8.89	PASS
	64		4.26	4.25	7.27	8.89	PASS
	100		4.36	3.77	7.09	8.62	PASS
	120		3.84	4.58	7.24	8.62	PASS
	140		4.17	3.78	6.99	8.62	PASS
IEEE 802.11ax_40	38		9.18	8.17	11.72	14.81	PASS
	46		9.61	8.15	11.95	14.81	PASS
	54		2.13	1.83	4.99	8.89	PASS
	62		2.30	1.64	4.99	8.89	PASS
	102		1.84	1.25	4.57	8.62	PASS
	118		2.40	1.67	5.06	8.62	PASS
	134		2.40	0.97	4.76	8.62	PASS
IEEE 802.11ax_80	42		5.88	4.78	8.37	14.81	PASS
	58		-0.92	-1.38	1.87	8.89	PASS
	106		-1.51	-1.71	1.41	8.62	PASS
	122		-0.97	-1.29	1.89	8.62	PASS
IEEE 802.11ax_160	50		3.08	2.61	5.86	14.81	PASS
	114		-4.52	-4.00	-1.24	8.62	PASS
IEEE 802.11be_20	36		8.39	8.06	11.24	14.81	PASS
	40		8.35	7.99	11.18	14.81	PASS
	48		7.77	8.36	11.08	14.81	PASS
	52		3.90	4.37	7.15	8.89	PASS
	56		4.50	4.26	7.39	8.89	PASS
	64		4.07	4.11	7.10	8.89	PASS
	100		4.18	3.68	6.95	8.62	PASS
	120		4.55	3.80	7.20	8.62	PASS
	140		4.08	3.56	6.84	8.62	PASS
IEEE 802.11be_40	38		4.32	4.57	7.46	14.81	PASS
	46		4.99	5.09	8.05	14.81	PASS
	54		2.13	2.55	5.36	8.89	PASS
	62		2.33	2.69	5.52	8.89	PASS
	102		1.82	2.11	4.98	8.62	PASS
	118		2.01	2.70	5.38	8.62	PASS
	134		2.56	2.12	5.36	8.62	PASS
IEEE 802.11be_80	42		2.53	1.86	5.22	14.81	PASS
	58		-0.92	-0.56	2.27	8.89	PASS
	106		-1.20	-0.83	2.00	8.62	PASS
	122		-0.93	-0.30	2.41	8.62	PASS
IEEE 802.11be_160	50		-0.51	-0.83	2.34	14.81	PASS
	114		-4.63	-4.43	-1.52	8.62	PASS

Mode	Channel	RU & Index	Ant. 1 Meas PSD With Duty Cycle Factor (dBm/0.5MHz)	Ant. 2 Meas PSD With Duty Cycle Factor (dBm/0.5MHz)	Total (dBm/0.5M Hz)	Limit (dBm/0.5MHz)	Result
IEEE 802.11a	149	N/A	7.883	6.323	10.18	27.93	PASS
	157		8.053	6.993	10.57	27.93	PASS
	165		7.693	7.433	10.58	27.93	PASS
IEEE 802.11n_20	149		7.636	6.193	9.98	27.93	PASS
	157		7.516	6.353	9.98	27.93	PASS
	165		7.567	6.633	10.14	27.93	PASS
IEEE 802.11n_40	151		7.094	5.397	9.34	27.93	PASS
	159		6.924	6.257	9.61	27.93	PASS
IEEE 802.11ac_20	149		7.67	6.034	9.94	27.93	PASS
	157		7.67	6.574	10.17	27.93	PASS
	165		7.56	6.714	10.17	27.93	PASS
IEEE 802.11ac_40	151		6.896	5.658	9.33	27.93	PASS
	159		6.496	5.868	9.20	27.93	PASS
IEEE 802.11ac_80	155		3.903	2.638	6.33	27.93	PASS
IEEE 802.11ax_20	149	SU	7.695	6.079	9.97	27.93	PASS
	157		7.735	6.279	10.078	27.93	PASS
	165		7.375	6.559	9.996	27.93	PASS
IEEE 802.11ax_40	151		7.1	5.532	9.397	27.93	PASS
	159		6.88	5.822	9.393	27.93	PASS
IEEE 802.11ax_80	155		4.068	2.547	6.384	27.93	PASS
IEEE 802.11be_20	149		6.787	4.595	8.838	27.93	PASS
	157		6.887	4.035	8.701	27.93	PASS
	165		5.987	5.505	8.763	27.93	PASS
IEEE 802.11be_40	151		3.784	2.446	6.177	27.93	PASS
	159		3.954	2.596	6.338	27.93	PASS
IEEE 802.11be_80	155		0.945	-0.713	3.205	27.93	PASS

Antenna 1:

Test Graphs

