

FCC LTE REPORT

Certification

Applicant Name:
Franklin Technology Inc.**Date of Issue:**

April 04, 2019

Location:

HCT CO., LTD.,

Address:906 JEI Platz, 186, Gasan digital 1-ro,
Geumcheon-gu, Seoul, Korea, (08502)

74, Seoicheon-ro 578beon-gil, Majang-myeon,

Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-1808-FC003-R1**FCC ID:** XHG-LT711**APPLICANT:** Franklin Technology Inc.**Model(s):** LT711**EUT Type:** Pet Tracker**FCC Classification:** PCS Licensed Transmitter (PCB)**FCC Rule Part(s):** §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band12 (1.4)	699.7 – 715.3	1M10G7D	QPSK	0.053	17.27
		1M10W7D	16QAM	0.042	16.24
LTE – Band12 (3)	700.5 – 714.5	2M71G7D	QPSK	0.053	17.21
		2M71W7D	16QAM	0.039	15.92
LTE – Band12 (5)	701.5 – 713.5	4M52G7D	QPSK	0.053	17.26
		4M51W7D	16QAM	0.040	16.00
LTE – Band12 (10)	704.0 – 711.0	8M98G7D	QPSK	0.053	17.25
		2M52W7D	16QAM	0.040	16.01

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

**Report prepared by : Jae Ryang Do**
Engineer of Telecommunication Testing Center**Report approved by : Kwon Jeong**
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1808-FC003	August 08, 2018	- First Approval Report
HCT-RF-1808-FC003-R1	April 04, 2019	- Revised on EUT type

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION.....	5
2.1. DESCRIPTION OF EUT	5
2.2. MEASURING INSTRUMENT CALIBRATION.....	5
2.3. TEST FACILITY.....	5
3. DESCRIPTION OF TESTS	6
3.1 TEST PROCEDURE.....	6
3.2 CONDUCTED OUTPUT POWER.....	7
3.3 RADIATED POWER.....	8
3.4 RADIATED SPURIOUS EMISSIONS.....	9
3.5 OCCUPIED BANDWIDTH.....	10
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	11
3.7 BAND EDGE	12
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	13
3.9 WORST CASE(RADIATED TEST).....	14
3.10 WORST CASE(CONDUCTED TEST).....	15
4. LIST OF TEST EQUIPMENT	16
5. MEASUREMENT UNCERTAINTY	17
6. SUMMARY OF TEST RESULTS	18
7. SAMPLE CALCULATION	19
8. TEST DATA	21
8.1 CONDUCTED OUTPUT POWER.....	21
8.2 EFFECTIVE RADIATED POWER	25
8.3 RADIATED SPURIOUS EMISSIONS.....	27
8.4 OCCUPIED BANDWIDTH.....	31
8.5 CONDUCTED SPURIOUS EMISSIONS	32
8.6 BAND EDGE	32
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	33
9. TEST PLOTS	45
10. Annex A_ TEST SETUP PHOTO	92

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	Franklin Technology Inc.
Address:	906 JEI Platz, 186, Gasan digital 1-ro, Geumcheon-gu, Seoul, Korea, (08502)
FCC ID:	XHG-LT711
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§27, §2
EUT Type:	Pet Tracker
Model(s):	LT711
Tx Frequency:	699.7 MHz – 715.3 MHz (LTE – Band 12 (1.4 MHz)) 700.5 MHz – 714.5 MHz (LTE – Band 12 (3 MHz)) 701.5 MHz – 713.5 MHz (LTE – Band 12 (5 MHz)) 704.0 MHz – 711.0 MHz (LTE – Band 12 (10 MHz))
Date(s) of Tests:	July 16, 2018 ~ July 31, 2018
UE category:	1
Modulation:	QPSK, 16QAM
Support for RB size:	<u>QPSK</u> - 1.4MHz : 1 ~ 6 - 3MHz : 1 ~ 15 - 5MHz : 1 ~ 25 - 10MHz : 1 ~ 50 <u>16QAM</u> - 1.4MHz : 1 ~ 6 - 3MHz : 1 ~ 15 - 5MHz : 1 ~ 25 - 10MHz : 1 ~ 12

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Pet Tracker with LTE.

It also supports IEEE 802.11b/g/n (HT20), BTLE & Bluetooth and GPS.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY


The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 – Section 5.2
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 CONDUCTED OUTPUT POWER

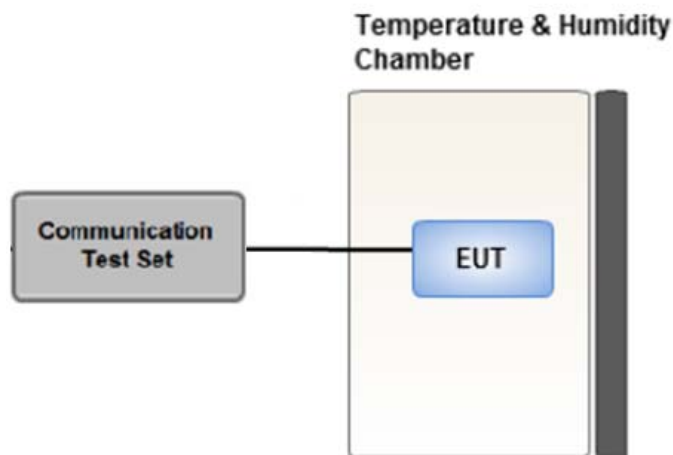

Test setup

Test Overview

When an average power meter is used to perform RF output power measurements, the fundamental condition that measurements be performed only over durations of active transmissions at maximum output power level applies.

Conducted Output Power was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v03r01, Section 5.2.

3.3 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.4 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.


Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets,
and channel bandwidth configurations shown in the test data

3.5 OCCUPIED BANDWIDTH.

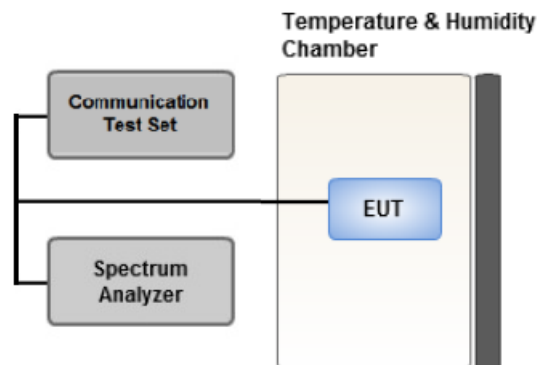

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

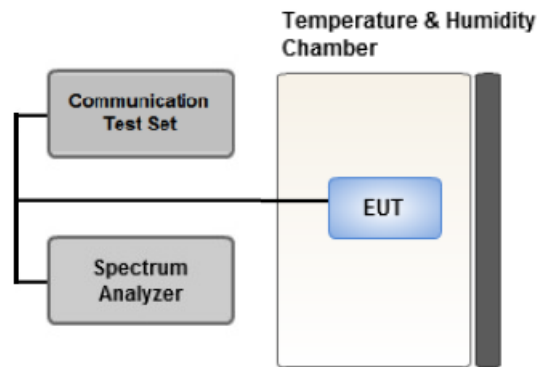

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

3.7 BAND EDGE

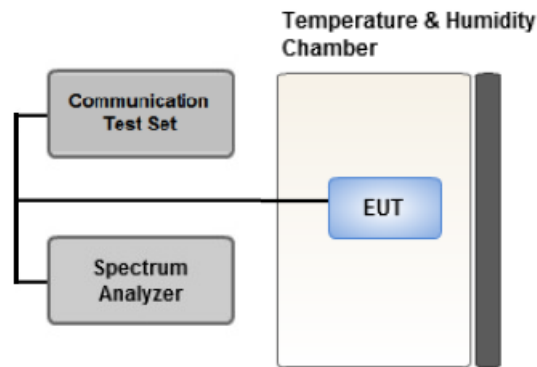

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

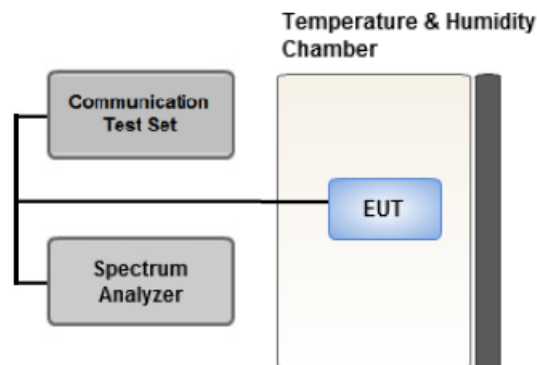

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM	1	0	Y
Radiated Spurious and Harmonic Emissions	QPSK	1	0	X

3.10 WORST CASE(CONDUCTED TEST)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM	1.4, 3, 5, 10	Low, Mid, High	Full RB	0
Band Edge	* QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		1.4, 3, 5, 10	Low, High	Full RB	0
Channel Edge	* QPSK	1.4, 3, 5, 10	Low, Mid, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	* QPSK	1	Low, Mid, High	1	0

* Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/17/2018	Annual	04/17/2019
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/04/2018	Annual	04/04/2019
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/04/2018	Annual	04/04/2019
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	5001	06/07/2018	Annual	06/07/2019
Agilent	E3632A/DC Power Supply	KR75303243	05/09/2018	Annual	05/09/2019
Schwarzbeck	UHAP/ Dipole Antenna	557	03/31/2017	Biennial	03/31/2019
Schwarzbeck	UHAP/ Dipole Antenna	558	03/31/2017	Biennial	03/31/2019
ESPEC	SU-642 / Chamber	93000718	03/30/2018	Annual	03/30/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/09/2016	Biennial	09/09/2018
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/14/2016	Biennial	10/14/2018
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/25/2017	Biennial	04/25/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	04/25/2017	Biennial	04/25/2019
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY52090906	06/08/2018	Annual	06/08/2019
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/21/2018	Annual	06/21/2019
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/30/2017	Annual	10/30/2018
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/26/2017	Annual	09/26/2018
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/19/2017	Biennial	04/19/2019
Schwarzbeck	VULB9160/ Bilog Antenna	3150	09/30/2016	Biennial	09/30/2018
Schwarzbeck	VULB9160/ Bilog Antenna	9360-3368	10/14/2016	Biennial	10/14/2018
Schwarzbeck	VULB9160/ Hybrid Antenna	760	04/06/2017	Biennial	04/06/2019
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6200863156	02/13/2018	Annual	02/13/2019
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	02/08/2018	Annual	02/08/2019
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/19/2018	Annual	07/19/2019
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer	100931	10/30/2017	Annual	10/30/2018
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	08/16/2017	Annual	08/16/2018
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(g)	$< 43 + 10\log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	PASS
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§27.50(c)(10)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(g)	$< 43 + 10\log_{10} (P[\text{Watts}])$ for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 CONDUCTED OUTPUT POWER

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 12	1.4	699.7	23017	1	0	23.36	22.38
				1	3	23.48	22.27
				1	5	23.34	22.00
				3	0	23.44	22.39
				3	1	23.48	22.44
				3	3	23.43	22.39
				6	0	22.49	21.33
		707.5	23095	1	0	23.25	22.20
				1	3	23.46	22.47
				1	5	23.36	22.35
				3	0	23.19	22.19
				3	1	23.44	22.31
				3	3	23.35	22.46
				6	0	22.37	21.26
		715.3	23173	1	0	23.33	22.30
				1	3	23.27	22.45
				1	5	23.25	22.41
				3	0	23.33	22.29
				3	1	23.49	22.36
				3	3	23.48	22.33
				6	0	22.33	21.34

LTE Conducted Average Output Powers (1.4 MHz Band 12 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 12	3	700.5	23025	1	0	23.42	22.38
				1	7	23.46	22.14
				1	14	23.28	22.17
				8	0	22.49	21.43
				8	3	22.37	21.49
				8	7	22.40	21.48
				15	0	22.32	21.31
		707.5	23095	1	0	23.33	22.18
				1	7	23.48	22.11
				1	14	23.30	22.17
				8	0	22.37	21.39
				8	3	22.39	21.48
				8	7	22.41	21.47
				15	0	22.42	21.38
		714.5	23165	1	0	23.42	22.36
				1	7	23.46	22.34
				1	14	23.41	22.41
				8	0	22.46	21.49
				8	3	22.48	21.37
				8	7	22.46	21.48
				15	0	22.42	21.17

LTE Conducted Average Output Powers (3 MHz Band 12 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 12	5	701.5	23035	1	0	23.45	22.27
				1	12	23.35	22.07
				1	24	23.39	21.97
				12	0	22.36	21.28
				12	6	22.32	21.26
				12	11	22.23	21.26
				25	0	22.18	21.31
		707.5	23095	1	0	23.27	22.14
				1	12	23.36	22.10
				1	24	23.29	22.14
				12	0	22.27	21.17
				12	6	22.39	21.35
				12	11	22.41	21.29
				25	0	22.28	21.29
		713.5	23155	1	0	23.37	21.96
				1	12	23.49	22.23
				1	24	23.35	22.03
				12	0	22.36	21.33
				12	6	22.43	21.40
				12	11	22.40	21.24
				25	0	22.29	21.30

LTE Conducted Average Output Powers (5 MHz Band 12 LTE)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 12	10	704.0	23060	1	0	22.96	21.96
				1	24	23.16	22.14
				1	49	23.20	22.16
				25(12)	0(0)	21.94	22.32
				25(12)	12(19)	22.09	22.14
				25(12)	24(38)	22.08	22.32
				50	0	22.04	-
		707.5	23095	1	0	22.89	21.79
				1	24	23.41	22.15
				1	49	23.19	22.14
				25(12)	0(0)	22.05	22.20
				25(12)	12(19)	21.93	22.32
				25(12)	24(38)	22.10	22.14
				50	0	22.06	-
		711.0	23130	1	0	23.03	21.86
				1	24	23.47	22.14
				1	49	23.15	22.19
				25(12)	0(0)	22.16	22.23
				25(12)	12(19)	22.21	22.43
				25(12)	24(38)	22.14	22.30
				50	0	22.09	-

LTE Conducted Average Output Powers (10 MHz Band 12 LTE)

Note:

- () : 16QAM RB Size/ Offset

Note : Detecting mode is average.

8.2 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
699.7	LTE B12 (1.4 MHz)	QPSK	-33.30	28.62	-10.16	1.20	V	< 3.00	0.053	17.26
		16-QAM	-34.41	27.51	-10.16	1.20	V		0.041	16.15
707.5		QPSK	-32.77	28.69	-10.21	1.21	V		0.053	17.27
		16-QAM	-33.83	27.63	-10.21	1.21	V		0.042	16.21
715.3		QPSK	-32.78	28.37	-10.25	1.22	V		0.049	16.90
		16-QAM	-33.44	27.71	-10.25	1.22	V		0.042	16.24

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
700.5	LTE B12 (3 MHz)	QPSK	-33.29	28.59	-10.17	1.21	V	< 3.00	0.053	17.21
		16-QAM	-34.66	27.22	-10.17	1.21	V		0.038	15.84
707.5		QPSK	-32.89	28.57	-10.21	1.21	V		0.052	17.15
		16-QAM	-34.17	27.29	-10.21	1.21	V		0.039	15.87
714.5		QPSK	-32.69	28.52	-10.24	1.22	V		0.051	17.06
		16-QAM	-33.83	27.38	-10.24	1.22	V		0.039	15.92

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
701.5	LTE B12 (5 MHz)	QPSK	-33.23	28.65	-10.18	1.21	V	< 3.00	0.053	17.26
		16-QAM	-34.66	27.22	-10.18	1.21	V		0.038	15.83
707.5		QPSK	-33.01	28.45	-10.21	1.21	V		0.050	17.03
		16-QAM	-34.04	27.42	-10.21	1.21	V		0.040	16.00
713.5		QPSK	-32.70	28.53	-10.24	1.22	V		0.051	17.07
		16-QAM	-33.89	27.34	-10.24	1.22	V		0.039	15.88

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
704.0	LTE B12 (10 MHz)	QPSK	-33.16	28.43	-10.19	1.21	V	< 3.00	0.050	17.03
		16-QAM	-34.32	27.27	-10.19	1.21	V		0.039	15.87
707.5		QPSK	-32.79	28.67	-10.21	1.21	V		0.053	17.25
		16-QAM	-34.03	27.43	-10.21	1.21	V		0.040	16.01
711.0		QPSK	-32.83	28.45	-10.23	1.22	V		0.050	17.00
		16-QAM	-33.97	27.31	-10.23	1.22	V		0.039	15.86

8.3 RADIATED SPURIOUS EMISSIONS

- OPERATING FREQUENCY: 707.50 MHz
- MEASURED OUTPUT POWER: 17.27 dBm = 0.053 W
- MODE: LTE B12
- MODULATION SIGNAL: 1.4 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 30.27 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23017 (699.7)	1,399.40	-30.07	7.96	-40.31	1.72	H	-34.07	51.34
	2,099.10	-54.22	10.43	-63.88	2.14	V	-55.59	72.86
	2,798.80	-53.42	11.17	-61.35	2.49	V	-52.67	69.94
23095 (707.5)	1,415.00	-33.31	8.06	-43.46	1.74	H	-37.14	54.41
	2,122.50	-52.28	10.46	-61.30	2.15	H	-52.99	70.26
	2,830.00	-55.10	11.19	-63.12	2.53	H	-54.46	71.73
23173 (715.3)	1,430.60	-28.19	8.15	-38.63	1.75	H	-32.23	49.50
	2,145.90	-47.26	10.50	-55.73	2.17	H	-47.40	64.67
	2,861.20	-53.56	11.20	-61.44	2.52	H	-52.76	70.03

- OPERATING FREQUENCY: 700.50 MHz
- MEASURED OUTPUT POWER: 17.21 dBm = 0.053 W
- MODE: LTE B12
- MODULATION SIGNAL: 3 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10} (W) =$ 30.21 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23025 (700.5)	1,401.00	-29.71	7.96	-39.95	1.73	H	-33.72	50.93
	2,101.50	-53.98	10.43	-63.58	2.15	H	-55.30	72.51
	2,802.00	-56.51	11.17	-64.45	2.50	H	-55.78	72.99
23095 (707.5)	1,415.00	-30.86	8.06	-41.01	1.74	H	-34.69	51.90
	2,122.50	-52.95	10.46	-61.97	2.15	H	-53.66	70.87
	2,830.00	-54.43	11.19	-62.45	2.53	H	-53.79	71.00
23165 (714.5)	1,429.00	-31.14	8.15	-41.59	1.74	H	-35.18	52.39
	2,143.50	-48.75	10.50	-57.20	2.17	H	-48.87	66.08
	2,858.00	-52.55	11.20	-60.43	2.52	H	-51.75	68.96

- OPERATING FREQUENCY: 701.50 MHz
- MEASURED OUTPUT POWER: 17.26 dBm = 0.053 W
- MODE: LTE B12
- MODULATION SIGNAL: 5 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10} (W) =$ 30.26 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23035 (701.5)	1,403.00	-30.59	7.99	-40.82	1.73	H	-34.56	51.82
	2,104.50	-53.65	10.44	-63.13	2.15	H	-54.84	72.10
	2,806.00	-55.12	11.18	-63.05	2.51	H	-54.38	71.64
23095 (707.5)	1,415.00	-28.69	8.06	-38.84	1.74	H	-32.52	49.78
	2,122.50	-55.21	10.46	-64.23	2.15	H	-55.92	73.18
	2,830.00	-53.46	11.19	-61.48	2.53	H	-52.82	70.08
23155 (713.5)	1,427.00	-36.32	8.14	-46.72	1.74	H	-40.32	57.58
	2,140.50	-51.12	10.49	-59.54	2.17	H	-51.22	68.48
	2,854.00	-56.06	11.20	-63.97	2.52	H	-55.29	72.55

- OPERATING FREQUENCY: 707.50 MHz
- MEASURED OUTPUT POWER: 17.25 dBm = 0.053 W
- MODE: LTE B12
- MODULATION SIGNAL: 10 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10} (W) =$ 30.25 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23060 (704.0)	1,408.00	-29.38	8.00	-39.53	1.73	H	-33.26	50.51
	2,112.00	-54.31	10.44	-63.50	2.15	H	-55.21	72.46
	2,816.00	-54.68	11.18	-62.68	2.52	H	-54.02	71.27
23095 (707.5)	1,415.00	-28.21	8.06	-38.36	1.74	H	-32.04	49.29
	2,122.50	-52.83	10.46	-61.85	2.15	H	-53.54	70.79
	2,830.00	-56.32	11.19	-64.34	2.53	H	-55.68	72.93
23130 (711.0)	1,422.00	-33.01	8.11	-43.25	1.74	H	-36.88	54.13
	2,133.00	-53.09	10.47	-61.84	2.16	H	-53.53	70.78
	2,844.00	-54.58	11.19	-62.48	2.53	H	-53.82	71.07

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
12	1.4 MHz	707.5	QPSK	6	0	1.0980
			16-QAM	6	0	1.0974
	3 MHz		QPSK	15	0	2.7147
			16-QAM	15	0	2.7121
	5 MHz		QPSK	25	0	4.5241
			16-QAM	25	0	4.5123
	10 MHz		QPSK	50	0	8.9807
			16-QAM	12	0	2.5238

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 46 ~ 53.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
12	1.4	699.7	1.3994	27.976	-58.605	-30.629	-13.00
		707.5	1.4148	27.976	-62.097	-34.121	
		715.3	1.4323	27.976	-61.536	-33.560	
	3	700.5	1.3989	27.976	-58.277	-30.301	
		707.5	1.4128	27.976	-62.779	-34.803	
		714.5	1.4323	27.976	-61.949	-33.973	
	5	701.5	1.3994	27.976	-58.701	-30.725	
		707.5	1.4113	27.976	-62.386	-34.410	
		713.5	1.4318	27.976	-62.087	-34.111	
	10	704.0	1.3999	27.976	-58.627	-30.651	
		707.5	1.4069	27.976	-61.063	-33.087	
		711.0	1.4313	27.976	-61.314	-33.338	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 80 ~ 91.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 54 ~ 79.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- MODE: LTE B12
- OPERATING FREQUENCY: 699,700,000 Hz
- CHANNEL: 23017 (1.4 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	699 699 993	0.0	0.000 000	0.000
100%		-30	699 699 989	-3.5	-0.000 001	-0.005
100%		-20	699 699 986	-6.5	-0.000 001	-0.009
100%		-10	699 699 986	-6.3	-0.000 001	-0.009
100%		0	699 699 996	3.7	0.000 001	0.005
100%		+10	699 699 986	-6.6	-0.000 001	-0.009
100%		+30	699 699 988	-5.2	-0.000 001	-0.007
100%		+40	699 699 998	5.4	0.000 001	0.008
100%		+50	699 699 986	-6.6	-0.000 001	-0.009
Batt. Endpoint	3.40	+20	699 699 987	-5.9	-0.000 001	-0.008

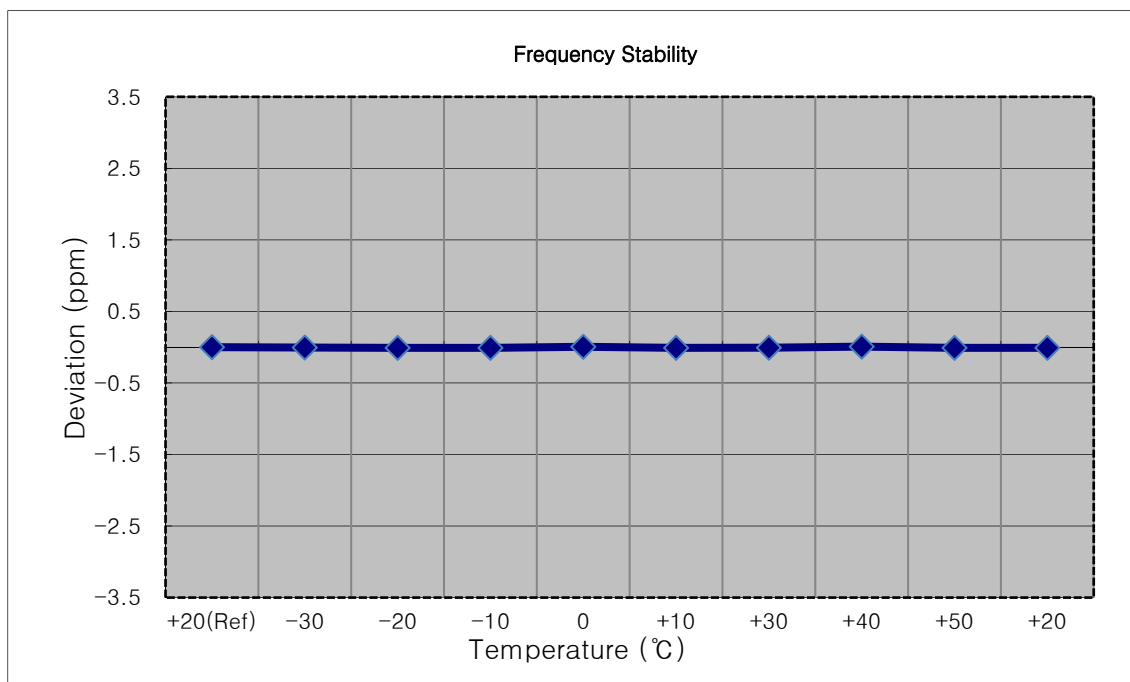


- MODE: LTE B12
- OPERATING FREQUENCY: 700,500,000 Hz
- CHANNEL: 23025 (3 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	700 499 995	0.0	0.000 000	0.000
100%		-30	700 499 991	-4.0	-0.000 001	-0.006
100%		-20	700 499 993	-1.9	0.000 000	-0.003
100%		-10	700 499 992	-3.2	0.000 000	-0.005
100%		0	700 499 999	4.2	0.000 001	0.006
100%		+10	700 499 989	-6.3	-0.000 001	-0.009
100%		+30	700 500 001	5.6	0.000 001	0.008
100%		+40	700 499 990	-4.9	-0.000 001	-0.007
100%		+50	700 499 991	-3.9	-0.000 001	-0.006
Batt. Endpoint	3.40	+20	700 499 998	2.8	0.000 000	0.004

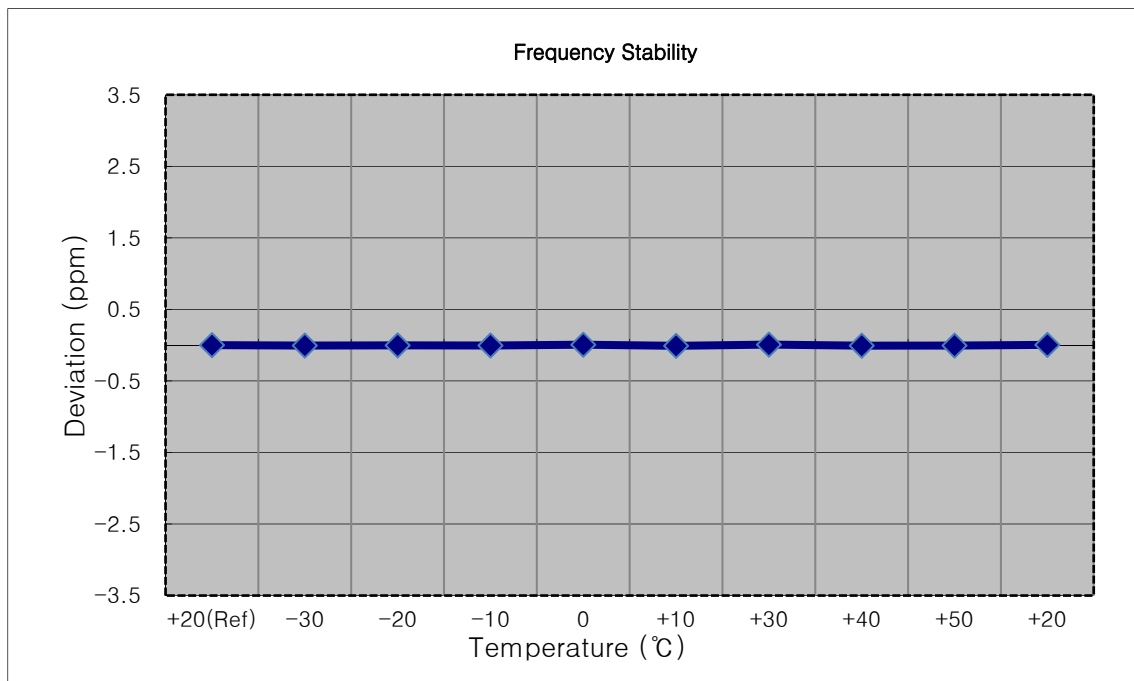


- MODE: LTE B12
- OPERATING FREQUENCY: 701,500,000 Hz
- CHANNEL: 23035 (5 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	701 499 997	0.0	0.000 000	0.000
100%		-30	701 499 992	-4.7	-0.000 001	-0.007
100%		-20	701 499 991	-6.1	-0.000 001	-0.009
100%		-10	701 499 992	-5.0	-0.000 001	-0.007
100%		0	701 499 990	-6.6	-0.000 001	-0.009
100%		+10	701 499 993	-3.8	-0.000 001	-0.005
100%		+30	701 499 993	-4.1	-0.000 001	-0.006
100%		+40	701 499 992	-4.9	-0.000 001	-0.007
100%		+50	701 499 992	-4.6	-0.000 001	-0.007
Batt. Endpoint	3.40	+20	701 499 993	-3.8	-0.000 001	-0.005

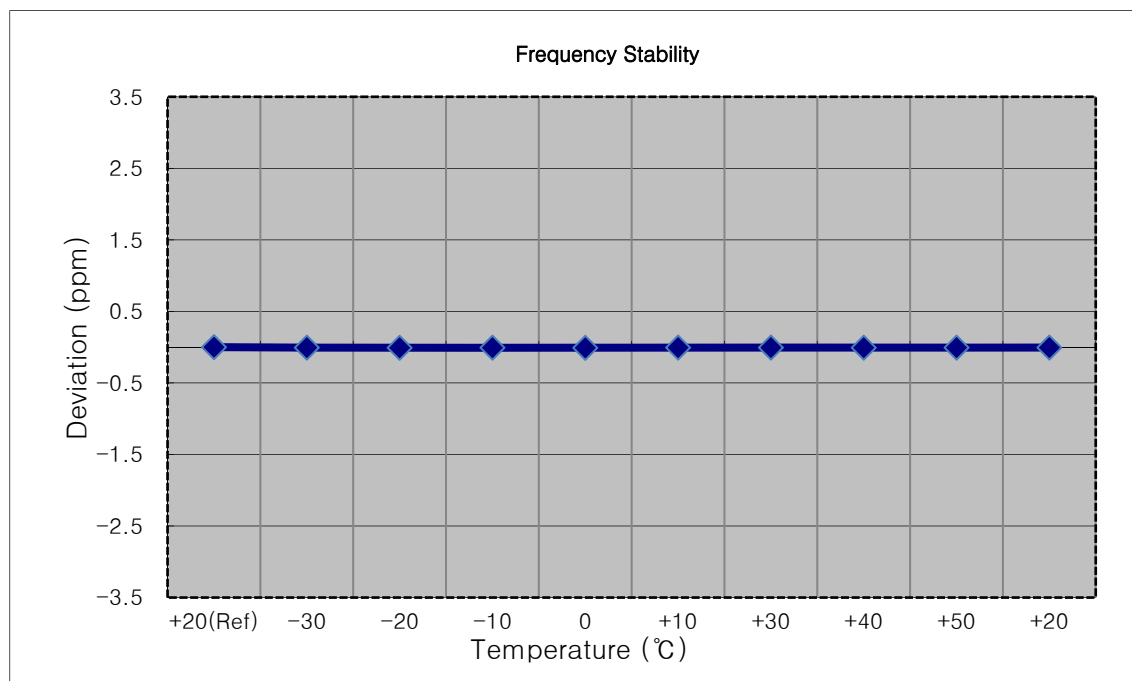


- MODE: LTE B12
- OPERATING FREQUENCY: 704,000,000 Hz
- CHANNEL: 23060 (10 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	703 999 997	0.0	0.000 000	0.000
100%		-30	703 999 993	-3.8	-0.000 001	-0.005
100%		-20	704 000 000	3.4	0.000 000	0.005
100%		-10	703 999 990	-6.5	-0.000 001	-0.009
100%		0	704 000 000	3.8	0.000 001	0.005
100%		+10	703 999 991	-5.7	-0.000 001	-0.008
100%		+30	703 999 994	-2.6	0.000 000	-0.004
100%		+40	703 999 993	-3.8	-0.000 001	-0.005
100%		+50	704 000 000	3.3	0.000 000	0.005
Batt. Endpoint	3.40	+20	703 999 999	2.5	0.000 000	0.004

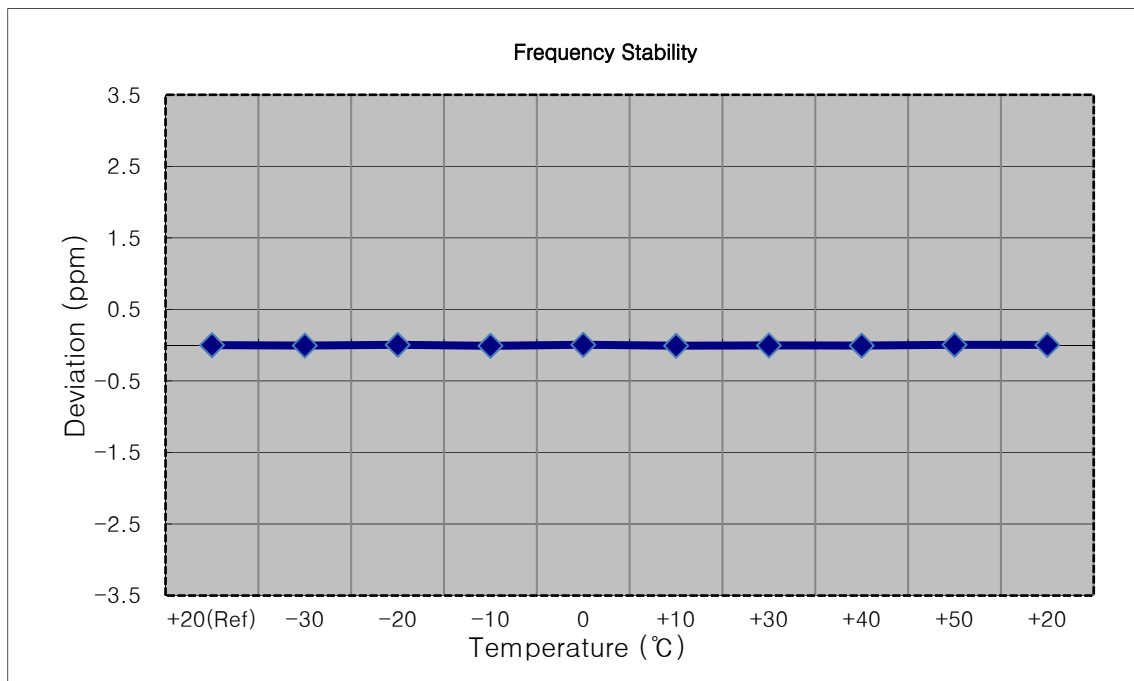


- MODE: LTE B12
- OPERATING FREQUENCY: 707,500,000 Hz
- CHANNEL: 23095 (1.4 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	707 499 997	0.0	0.000 000	0.000
100%		-30	707 499 992	-4.8	-0.000 001	-0.007
100%		-20	707 499 993	-4.1	-0.000 001	-0.006
100%		-10	707 499 991	-6.1	-0.000 001	-0.009
100%		0	707 499 993	-3.3	0.000 000	-0.005
100%		+10	707 500 000	3.4	0.000 000	0.005
100%		+30	707 500 001	4.3	0.000 001	0.006
100%		+40	707 499 993	-3.4	0.000 000	-0.005
100%		+50	707 500 000	2.9	0.000 000	0.004
Batt. Endpoint	3.40	+20	707 500 001	4.0	0.000 001	0.006

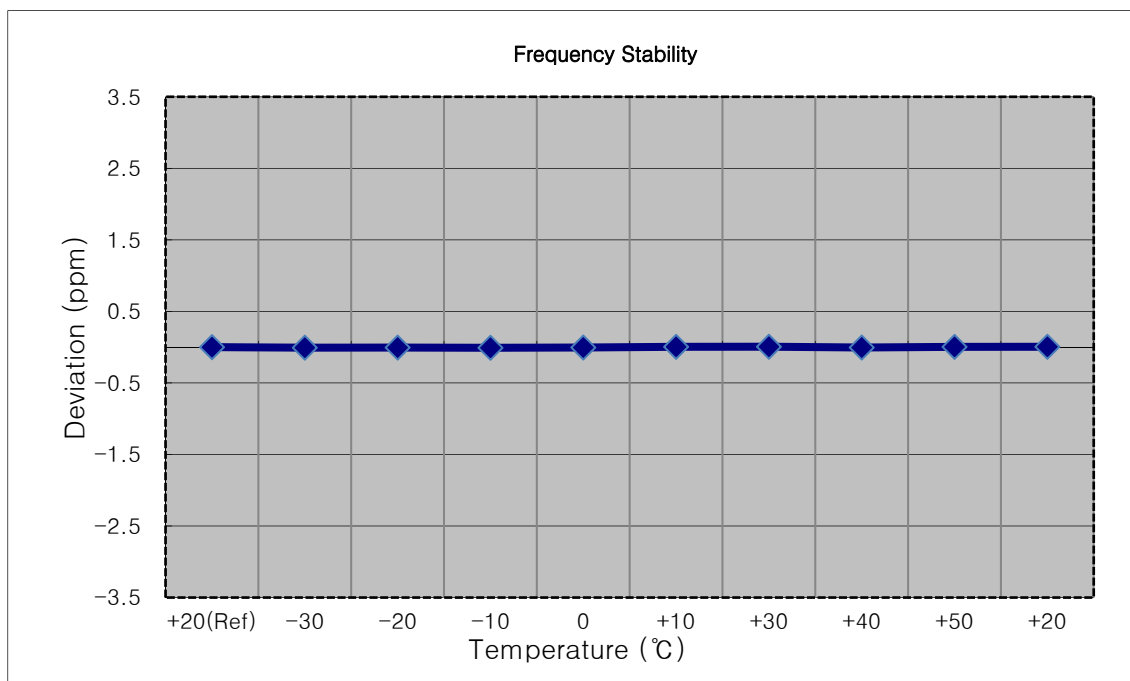


- MODE: LTE B12
- OPERATING FREQUENCY: 707,500,000 Hz
- CHANNEL: 23095 (3 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	707 499 997	0.0	0.000 000	0.000
100%		-30	707 499 993	-3.5	0.000 000	-0.005
100%		-20	707 499 994	-3.2	0.000 000	-0.005
100%		-10	707 499 994	-2.7	0.000 000	-0.004
100%		0	707 499 994	-3.1	0.000 000	-0.004
100%		+10	707 499 992	-4.8	-0.000 001	-0.007
100%		+30	707 499 994	-2.8	0.000 000	-0.004
100%		+40	707 499 991	-5.9	-0.000 001	-0.008
100%		+50	707 499 992	-5.3	-0.000 001	-0.007
Batt. Endpoint	3.40	+20	707 499 993	-3.5	0.000 000	-0.005

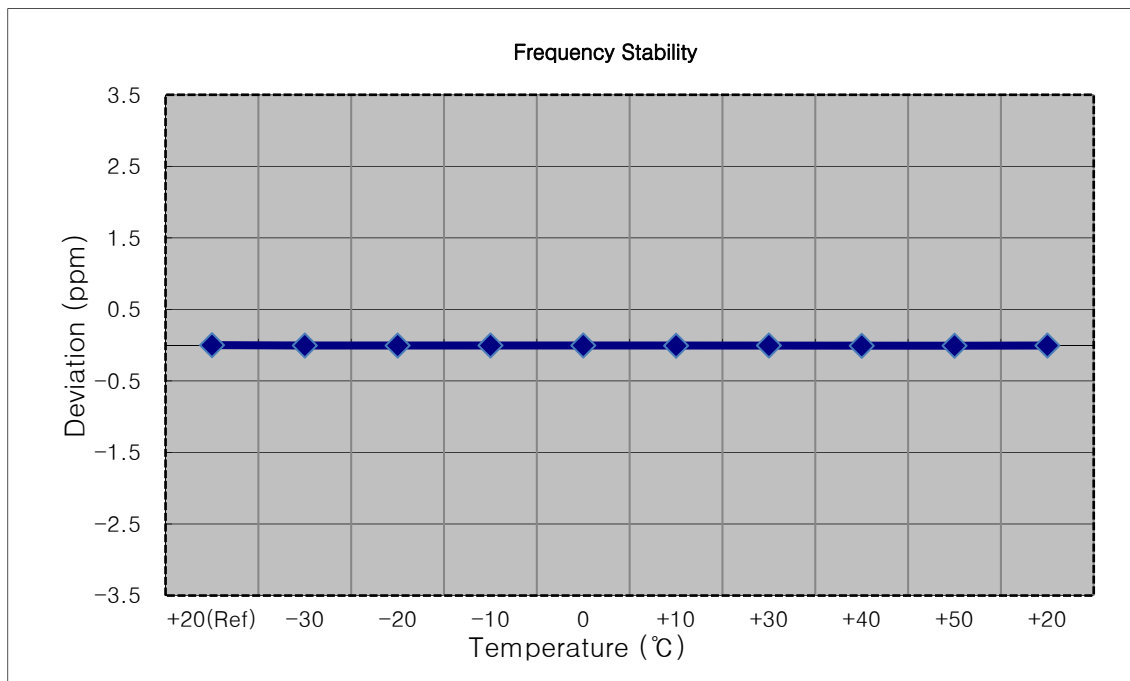


- MODE: LTE B12
- OPERATING FREQUENCY: 707,500,000 Hz
- CHANNEL: 23095 (5 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	707 499 996	0.0	0.000 000	0.000
100%		-30	707 500 002	6.1	0.000 001	0.009
100%		-20	707 499 999	2.8	0.000 000	0.004
100%		-10	707 499 991	-4.6	-0.000 001	-0.007
100%		0	707 499 993	-3.2	0.000 000	-0.005
100%		+10	707 499 991	-4.7	-0.000 001	-0.007
100%		+30	707 499 993	-2.6	0.000 000	-0.004
100%		+40	707 499 998	2.2	0.000 000	0.003
100%		+50	707 499 993	-3.0	0.000 000	-0.004
Batt. Endpoint	3.40	+20	707 499 991	-5.1	-0.000 001	-0.007

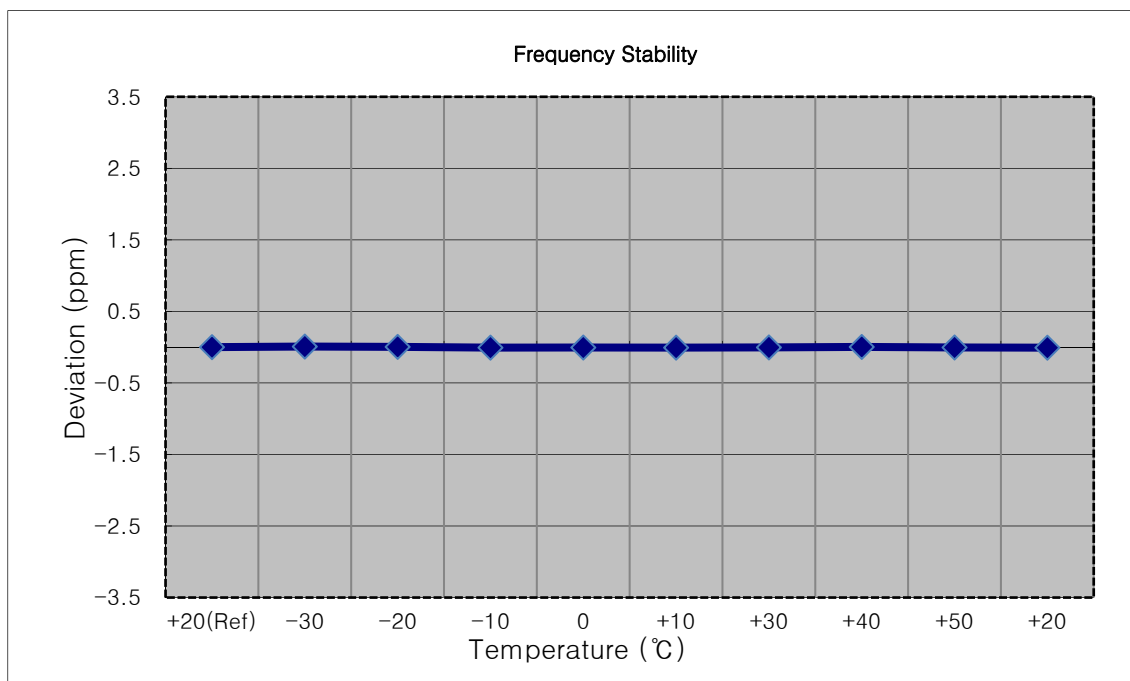


- MODE: LTE B12
- OPERATING FREQUENCY: 707,500,000 Hz
- CHANNEL: 23095 (10 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	707 499 997	0.0	0.000 000	0.000
100%		-30	707 499 994	-3.1	0.000 000	-0.004
100%		-20	707 499 992	-4.7	-0.000 001	-0.007
100%		-10	707 499 994	-2.9	0.000 000	-0.004
100%		0	707 499 994	-3.0	0.000 000	-0.004
100%		+10	707 500 001	4.6	0.000 001	0.007
100%		+30	707 499 993	-3.8	-0.000 001	-0.005
100%		+40	707 499 999	2.6	0.000 000	0.004
100%		+50	707 499 999	2.4	0.000 000	0.003
Batt. Endpoint	3.40	+20	707 499 993	-4.1	-0.000 001	-0.006

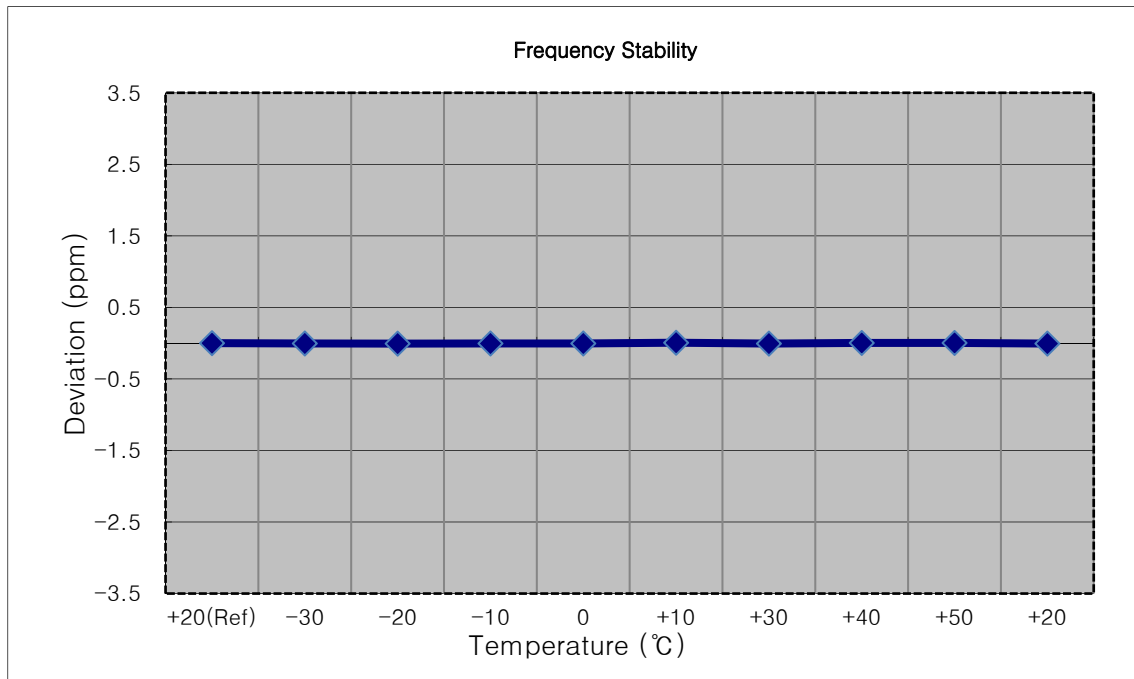


- MODE: LTE B12
- OPERATING FREQUENCY: 715,300,000 Hz
- CHANNEL: 23173 (1.4 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	715 300 009	0.0	0.000 000	0.000
100%		-30	715 300 014	5.0	0.000 001	0.007
100%		-20	715 300 003	-6.6	-0.000 001	-0.009
100%		-10	715 300 005	-4.0	-0.000 001	-0.006
100%		0	715 300 007	-2.9	0.000 000	-0.004
100%		+10	715 300 005	-4.1	-0.000 001	-0.006
100%		+30	715 300 015	5.4	0.000 001	0.008
100%		+40	715 300 015	5.6	0.000 001	0.008
100%		+50	715 300 016	6.3	0.000 001	0.009
Batt. Endpoint	3.40	+20	715 300 004	-5.5	-0.000 001	-0.008

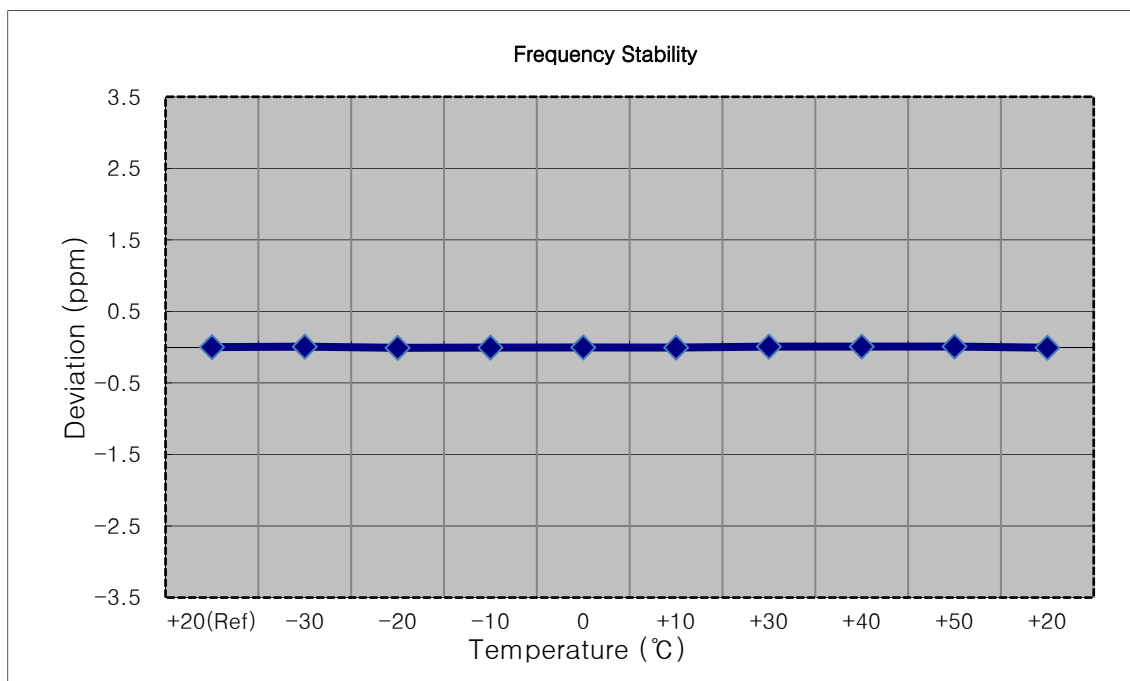


- MODE: LTE B12
- OPERATING FREQUENCY: 714,500,000 Hz
- CHANNEL: 23165 (3 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	714 500 009	0.0	0.000 000	0.000
100%		-30	714 500 019	10.0	0.000 001	0.014
100%		-20	714 500 000	-9.5	-0.000 001	-0.013
100%		-10	714 500 018	8.3	0.000 001	0.012
100%		0	714 500 018	9.1	0.000 001	0.013
100%		+10	714 500 017	7.4	0.000 001	0.010
100%		+30	714 500 001	-7.9	-0.000 001	-0.011
100%		+40	714 500 000	-9.7	-0.000 001	-0.014
100%		+50	714 500 020	10.5	0.000 001	0.015
Batt. Endpoint	3.40	+20	714 500 001	-7.8	-0.000 001	-0.011

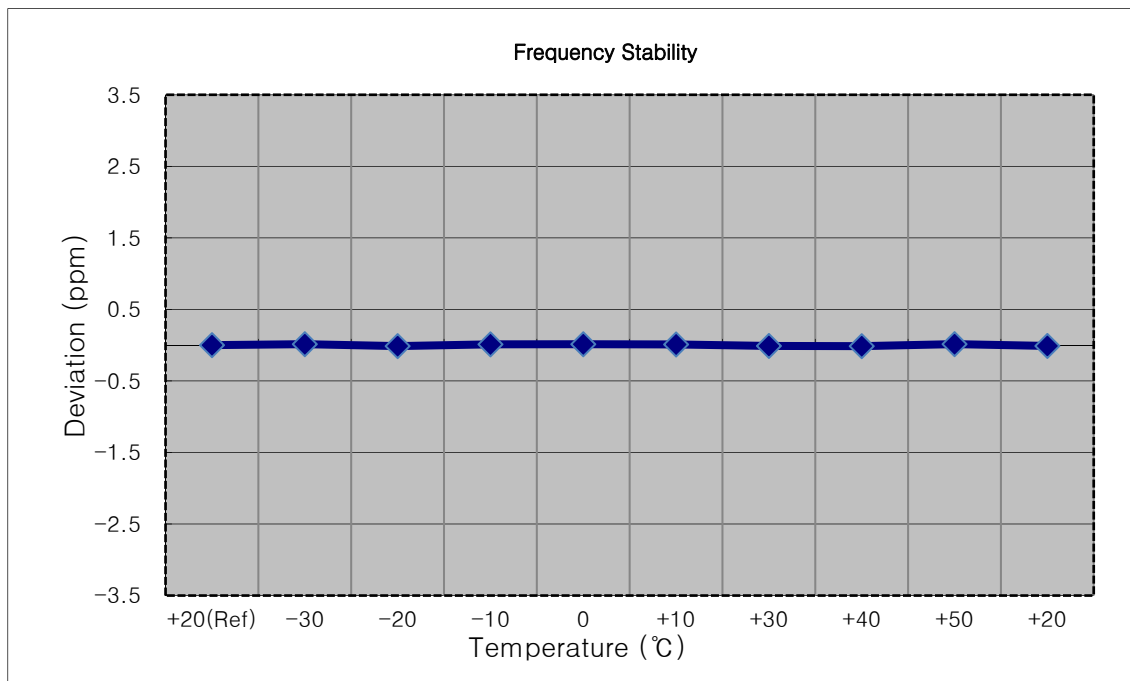


- MODE: LTE B12
- OPERATING FREQUENCY: 713,500,000 Hz
- CHANNEL: 23155 (5 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	713 499 997	0.0	0.000 000	0.000
100%		-30	713 499 993	-4.3	-0.000 001	-0.006
100%		-20	713 500 004	6.4	0.000 001	0.009
100%		-10	713 499 992	-5.6	-0.000 001	-0.008
100%		0	713 500 002	5.0	0.000 001	0.007
100%		+10	713 500 002	4.8	0.000 001	0.007
100%		+30	713 500 002	4.6	0.000 001	0.006
100%		+40	713 500 001	4.0	0.000 001	0.006
100%		+50	713 500 002	4.8	0.000 001	0.007
Batt. Endpoint	3.40	+20	713 499 992	-5.7	-0.000 001	-0.008

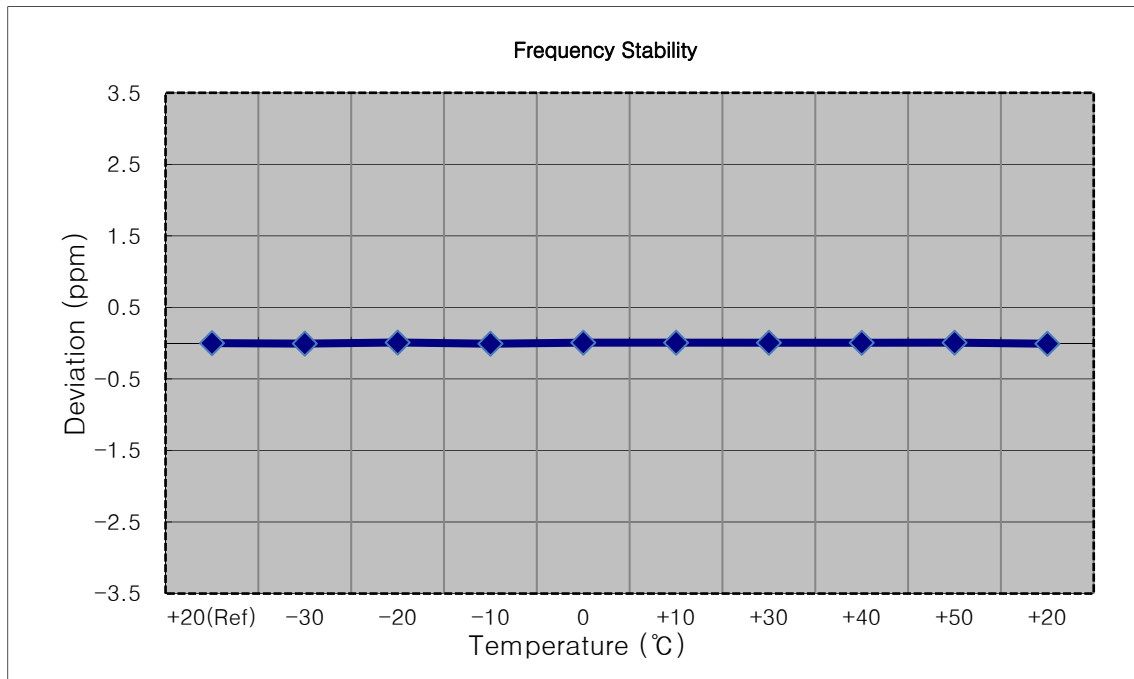


- MODE: LTE B12
- OPERATING FREQUENCY: 711,000,000 Hz
- CHANNEL: 23130 (10 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	710 999 994	0.0	0.000 000	0.000
100%		-30	710 999 997	3.3	0.000 000	0.005
100%		-20	710 999 999	4.6	0.000 001	0.006
100%		-10	710 999 990	-4.4	-0.000 001	-0.006
100%		0	710 999 990	-3.7	-0.000 001	-0.005
100%		+10	710 999 986	-7.8	-0.000 001	-0.011
100%		+30	710 999 998	3.6	0.000 001	0.005
100%		+40	710 999 990	-4.2	-0.000 001	-0.006
100%		+50	710 999 996	2.5	0.000 000	0.004
Batt. Endpoint	3.40	+20	710 999 997	3.0	0.000 000	0.004

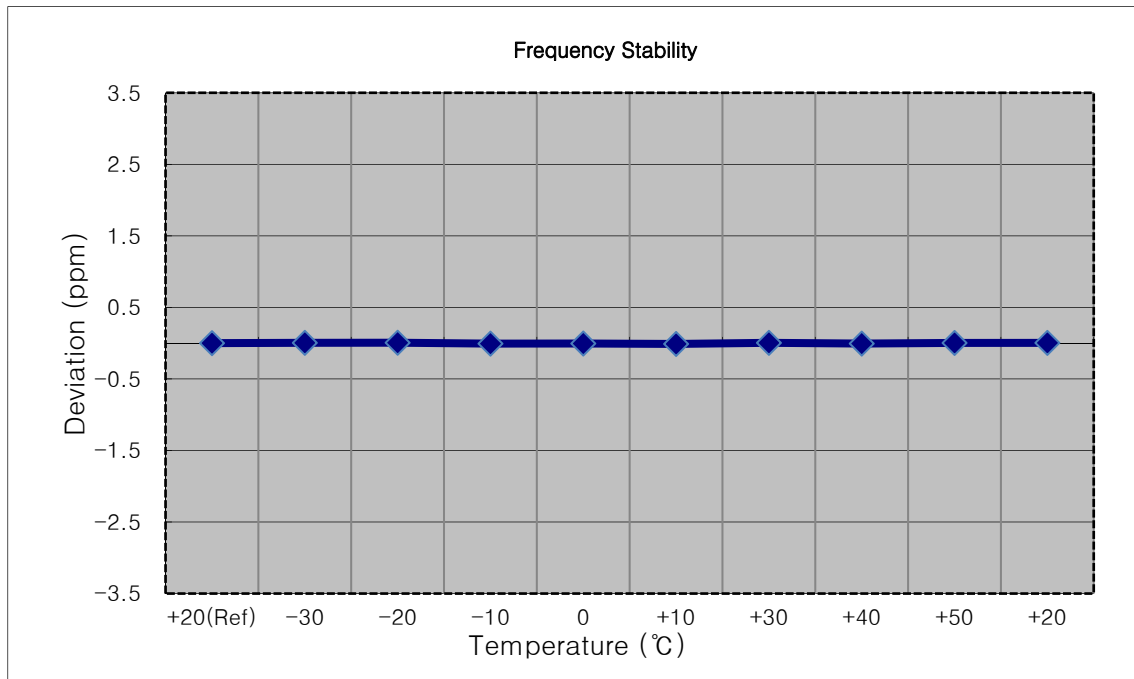


9. TEST PLOTS


BAND 12. Occupied Bandwidth Plot (1.4M BW Ch.23095 QPSK_RB6_0)

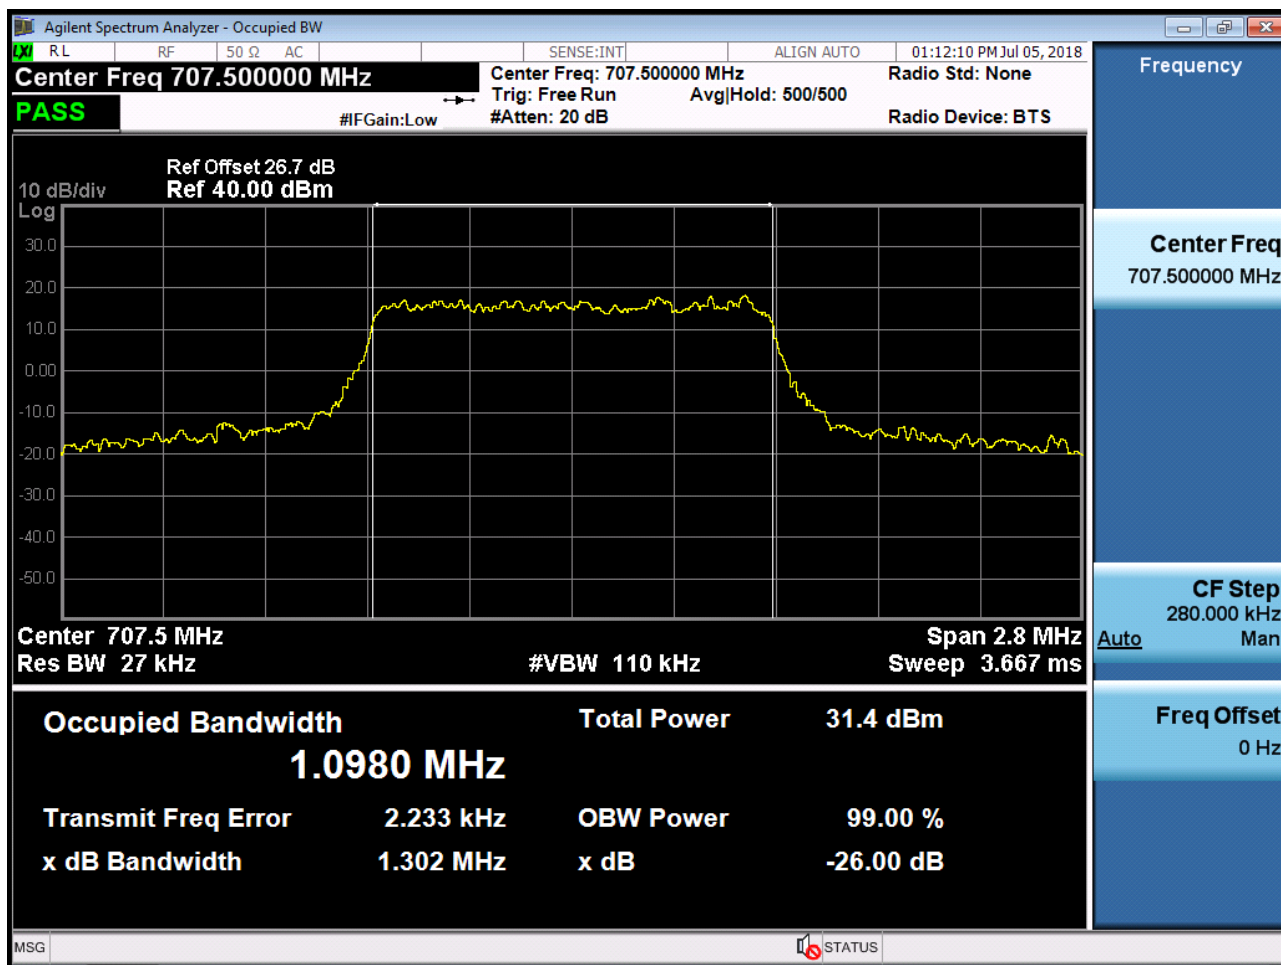


BAND 12. Occupied Bandwidth Plot (1.4M BW Ch.23095 16QAM_RB6_0)

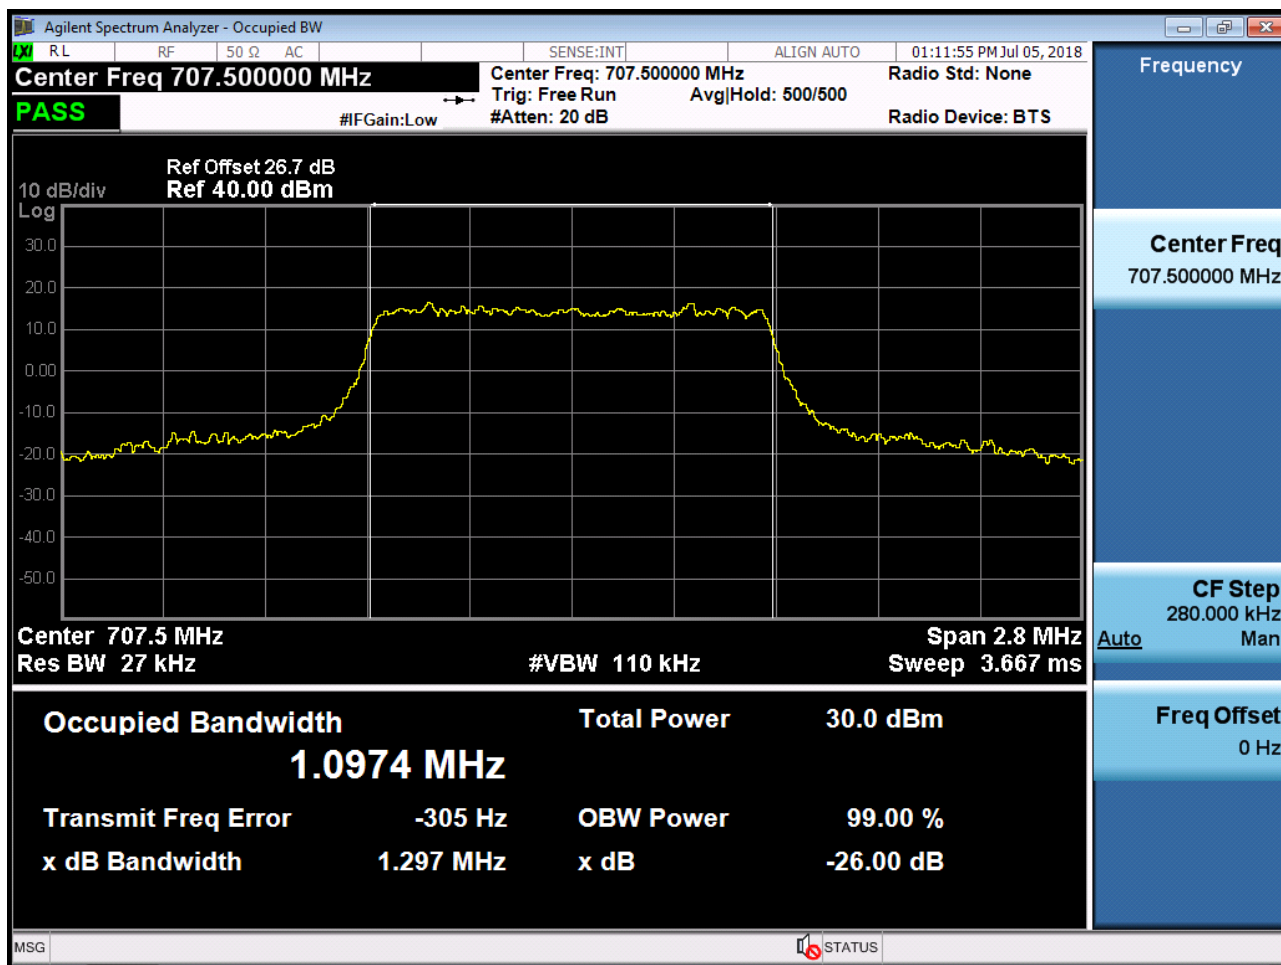


BAND 12. Occupied Bandwidth Plot (3M BW Ch.23095 QPSK_RB15_0)

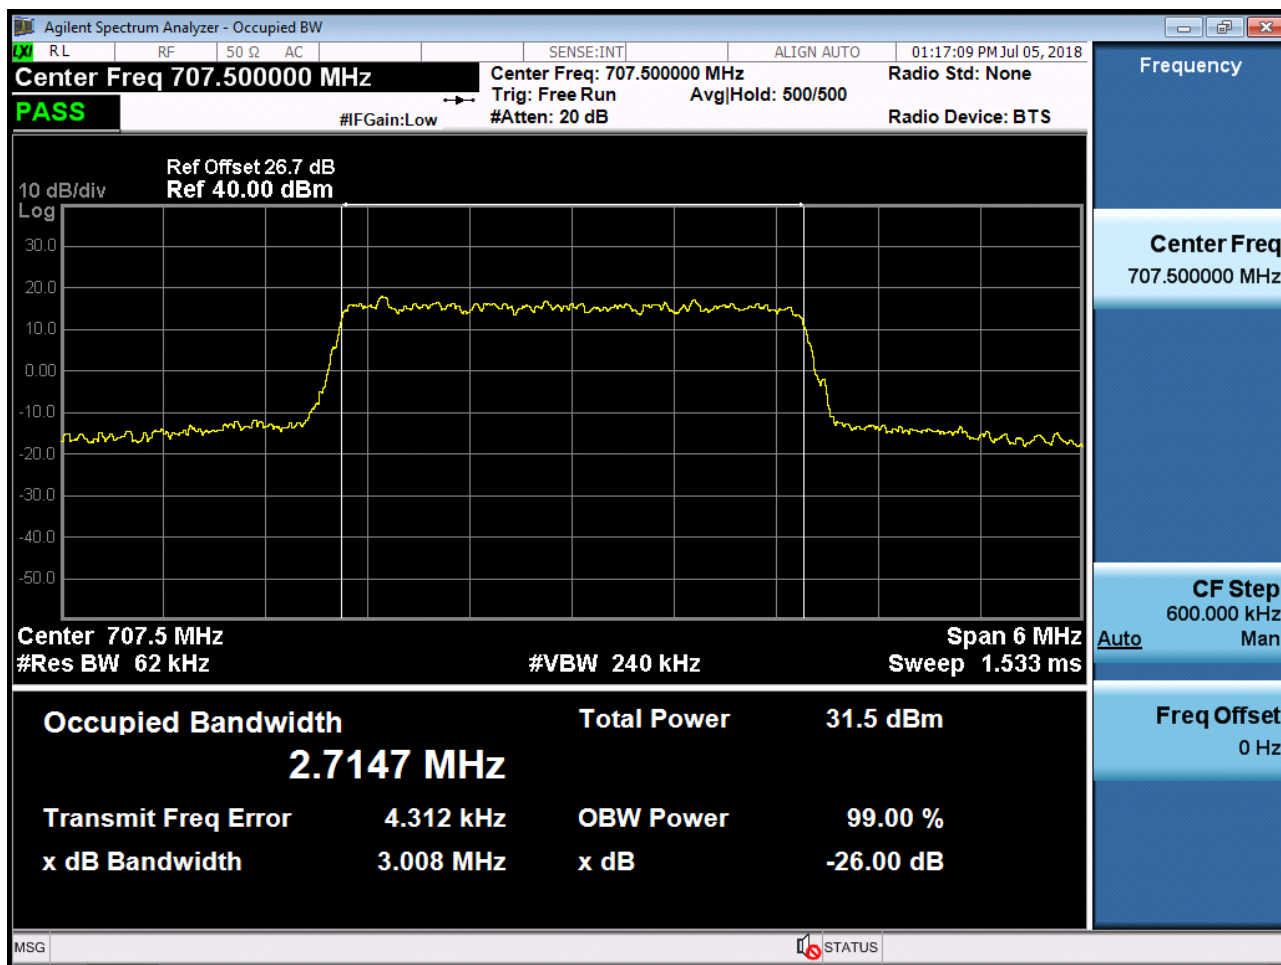


BAND 12. Occupied Bandwidth Plot (3M BW Ch.23095 16QAM_RB15_0)

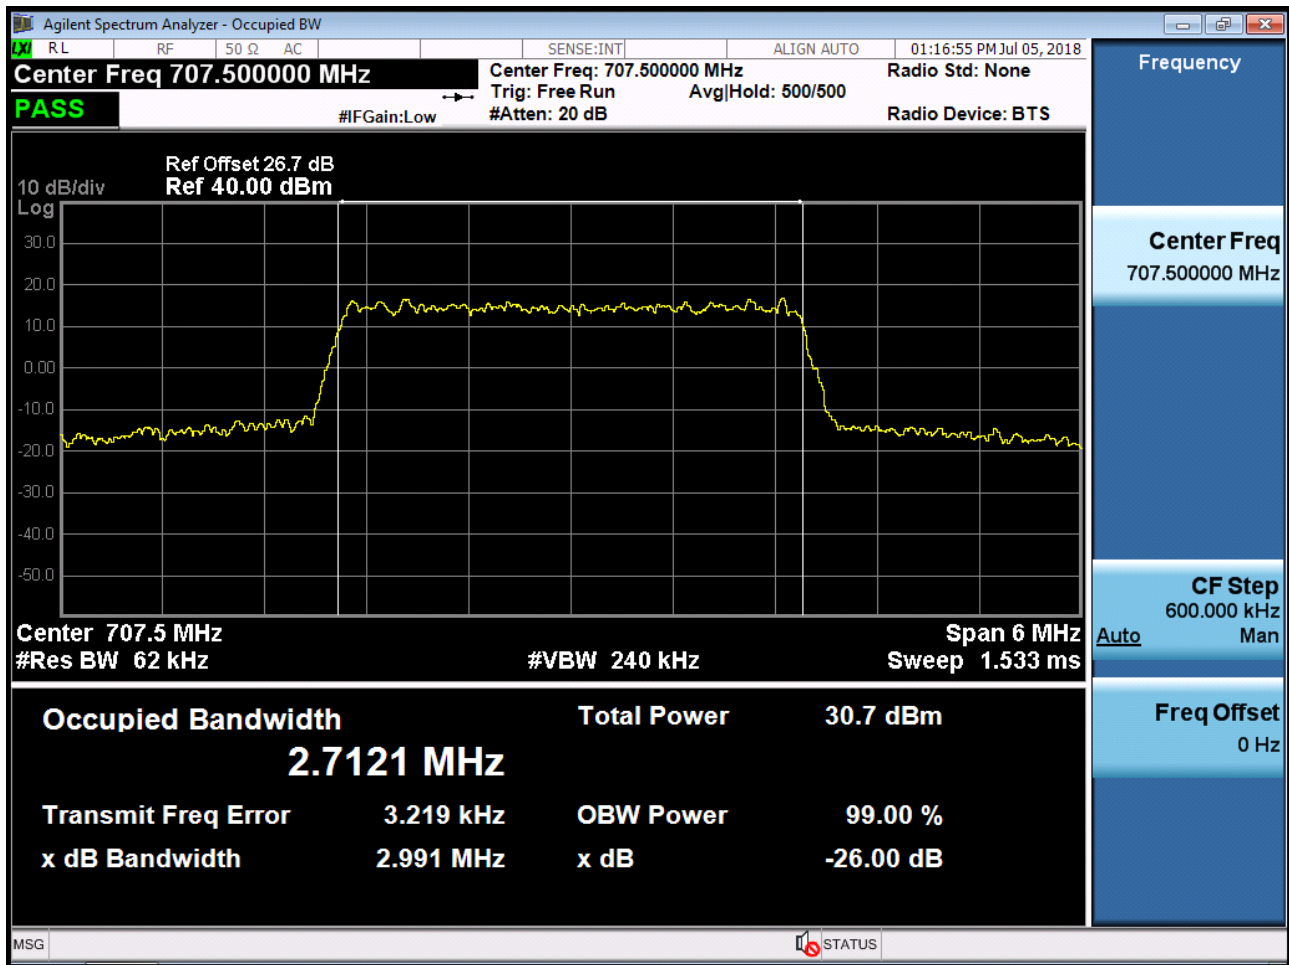


BAND 12. Occupied Bandwidth Plot (5M BW Ch.23095 QPSK_RB25_0)

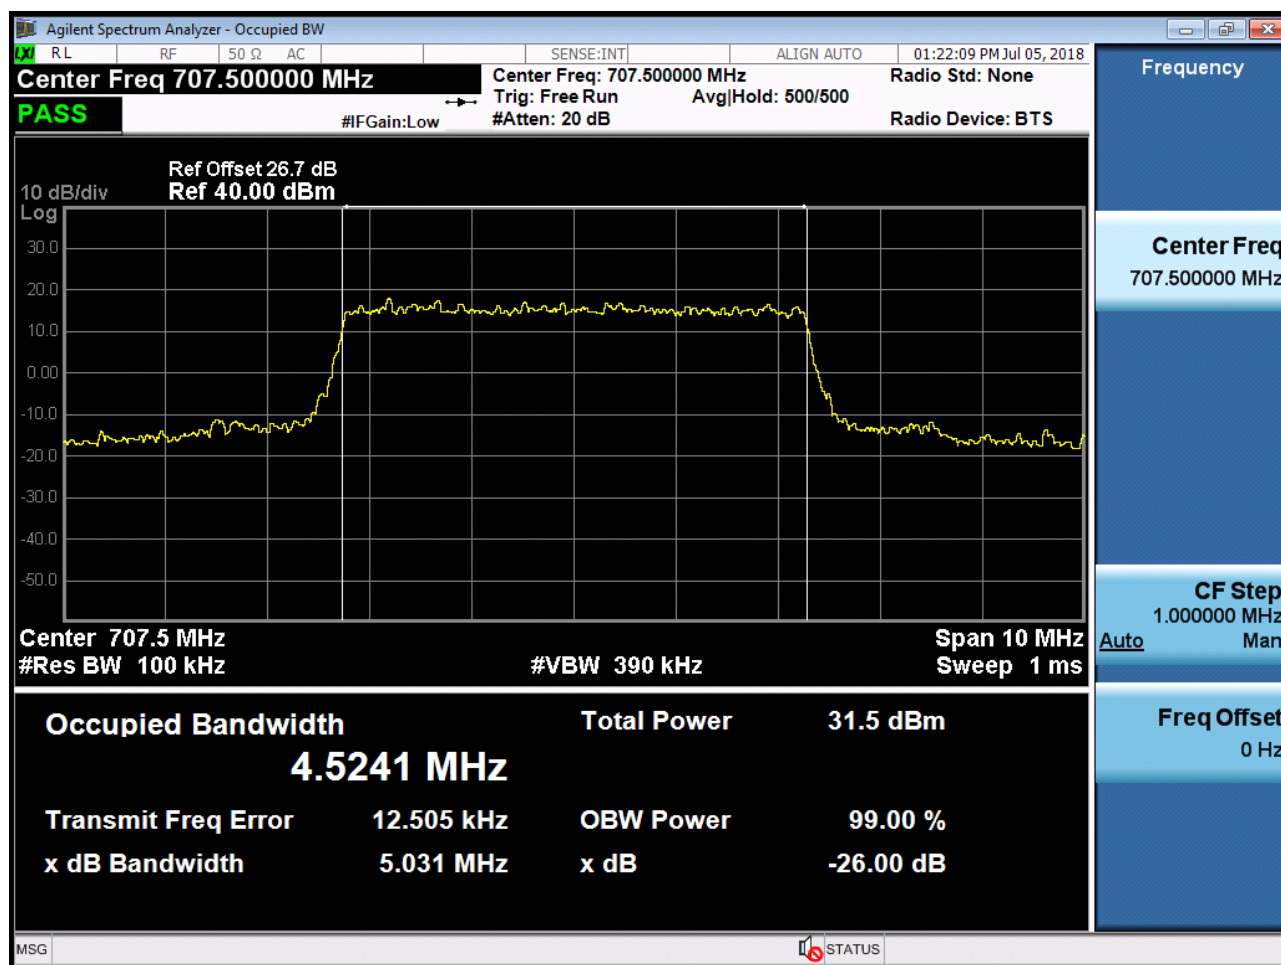


BAND 12. Occupied Bandwidth Plot (5M BW Ch.23095 16QAM_RB25_0)

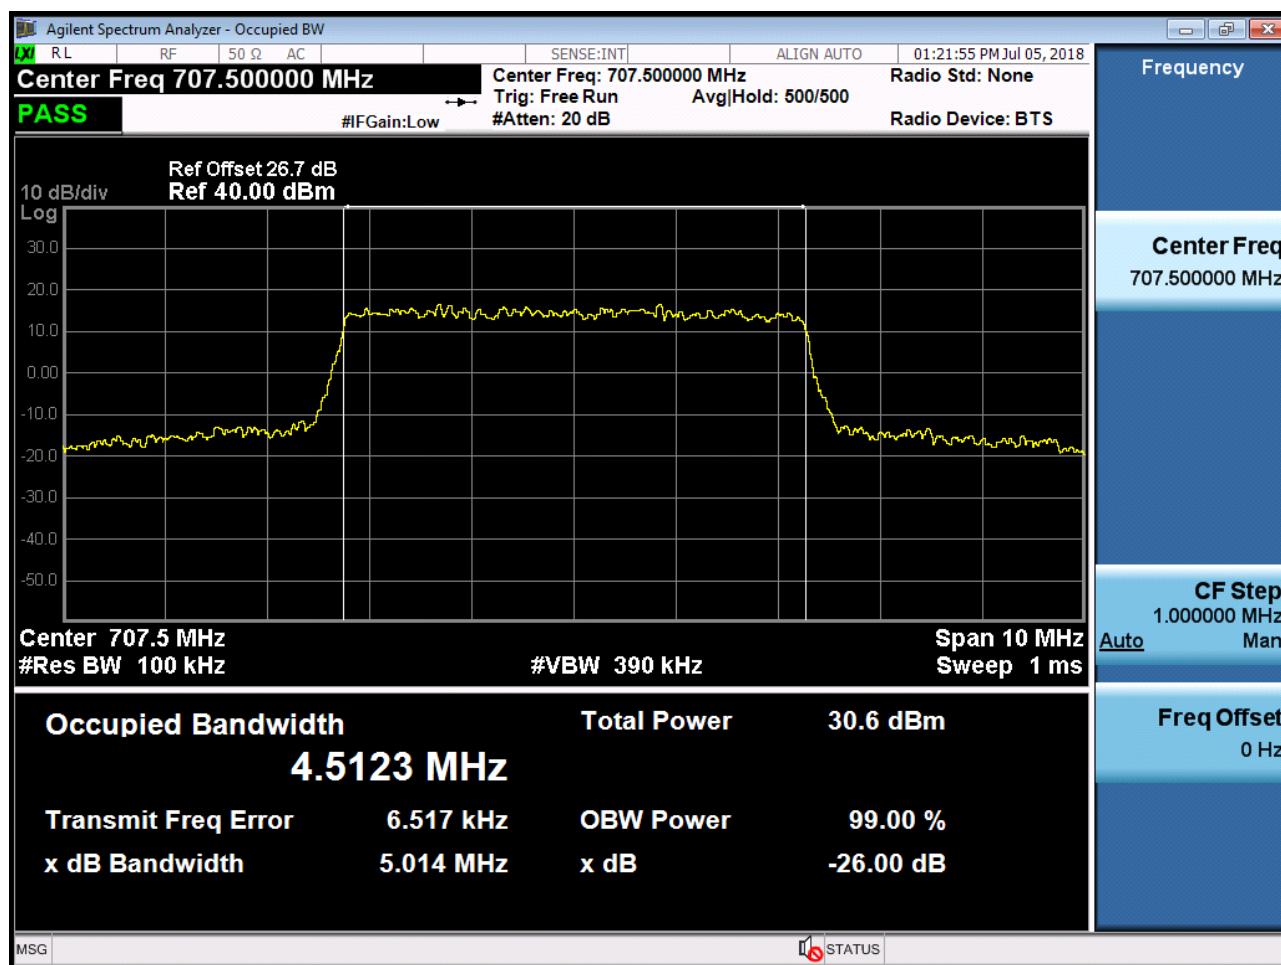


BAND 12. Occupied Bandwidth Plot (10M BW Ch.23095 QPSK_RB50_0)

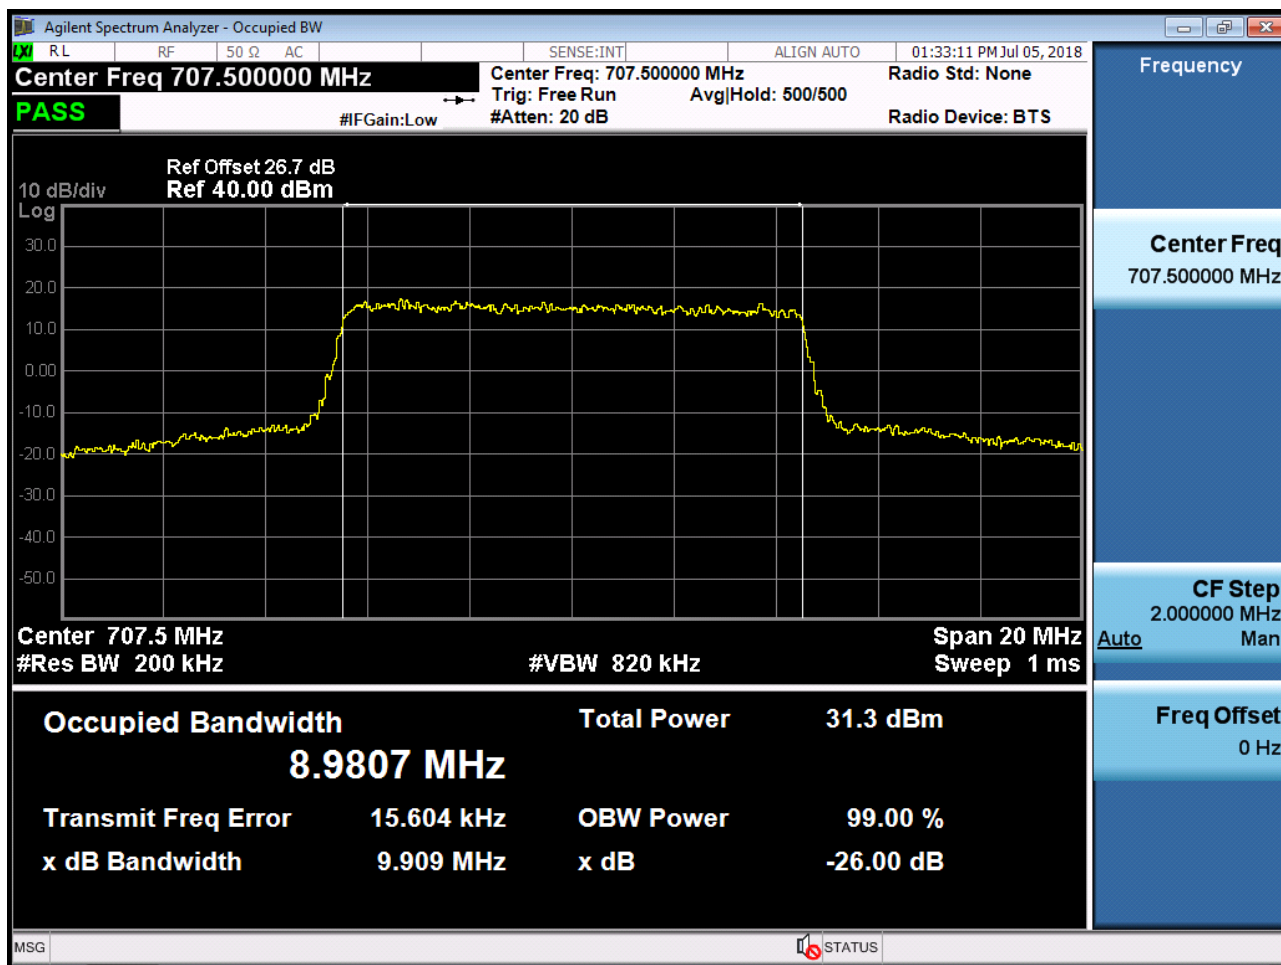

BAND 12. Occupied Bandwidth Plot (10M BW Ch.23095 16QAM_RB12_0) Partial

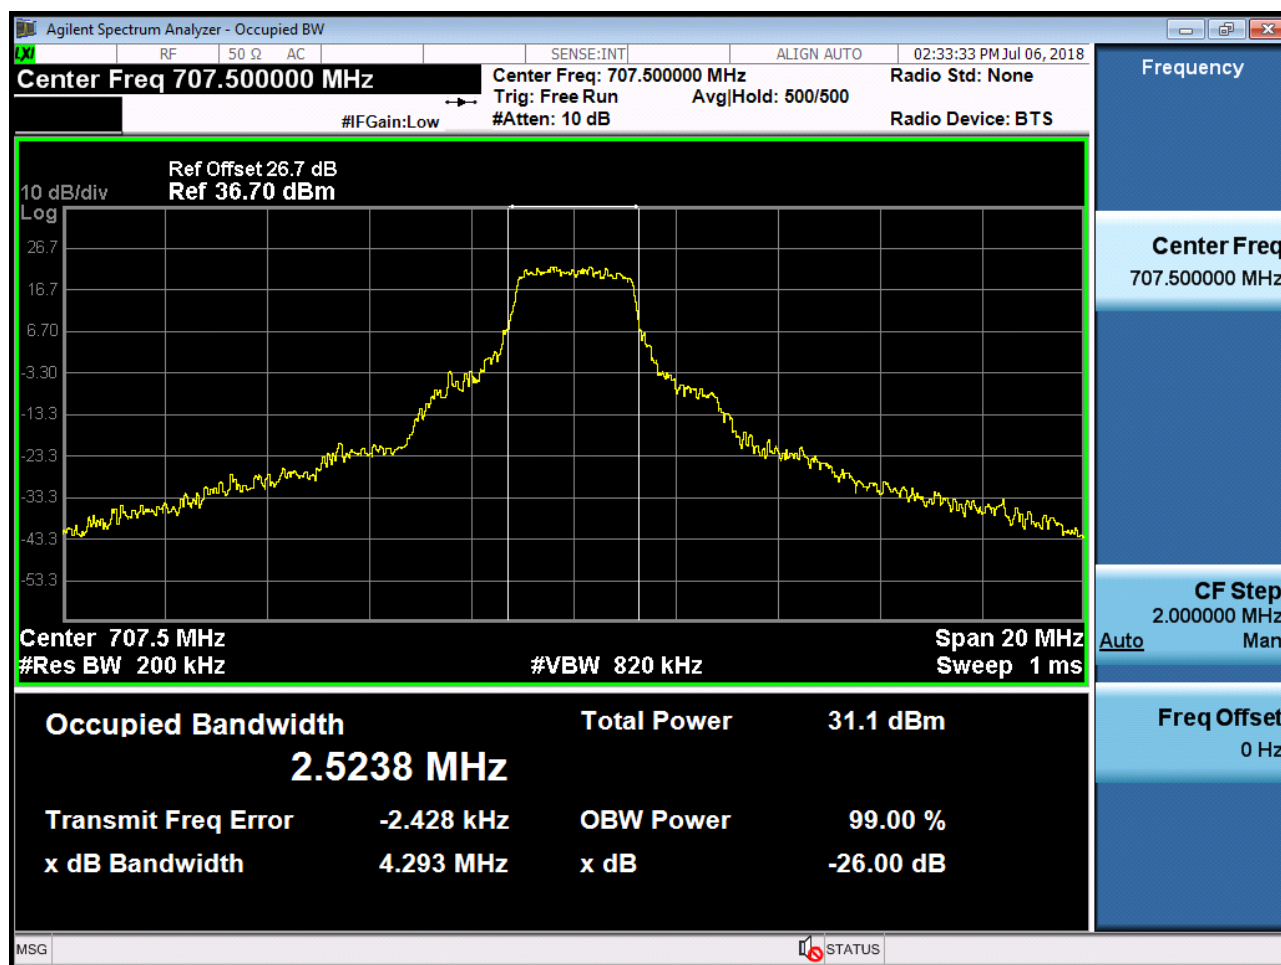

BAND 12. Lower Band Edge Plot (1.4M BW Ch.23017 QPSK_RB1_Offset 0)

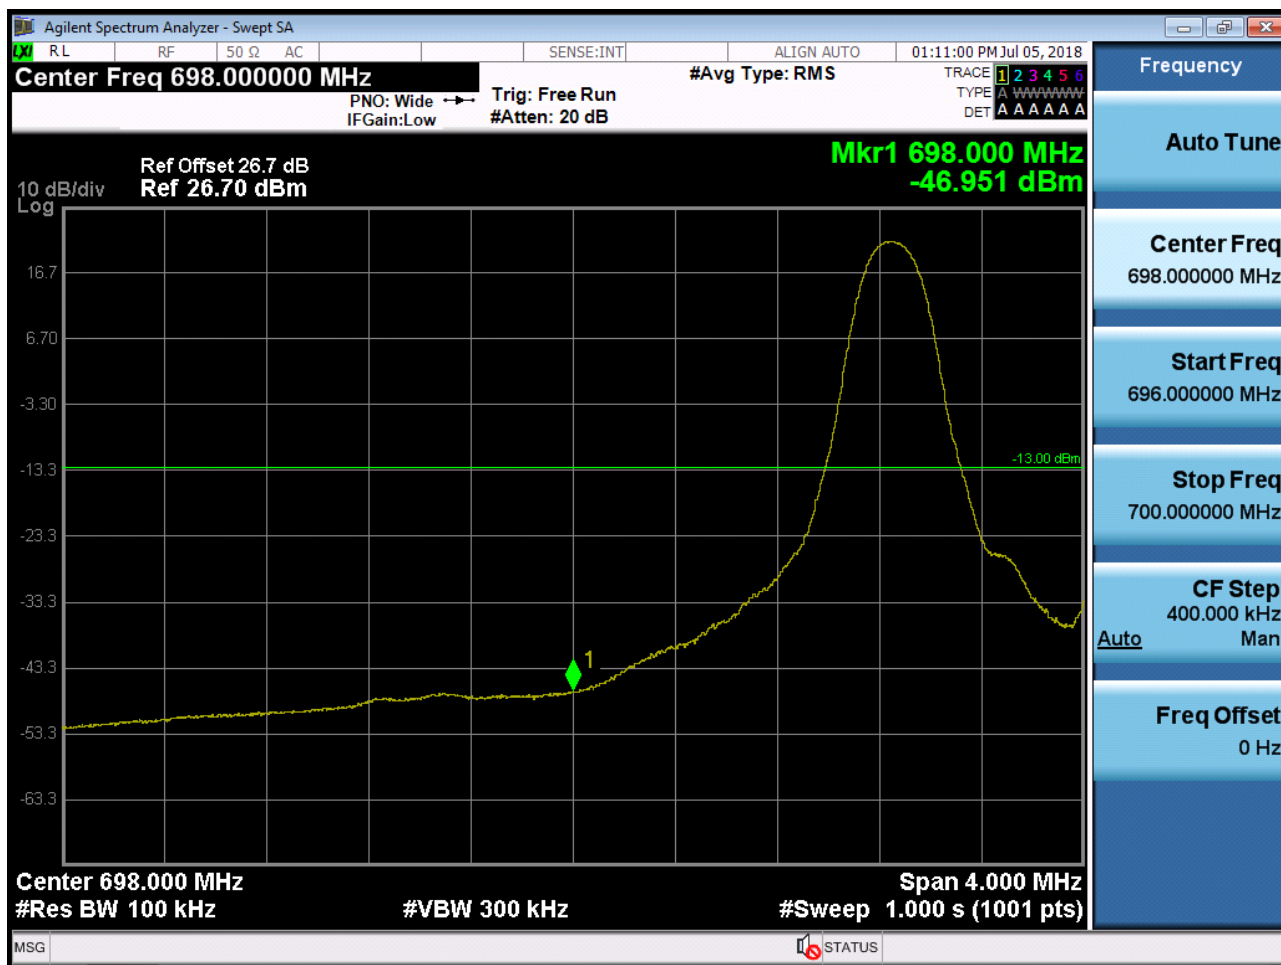


BAND 12. Lower Band Edge Plot (1.4M BW Ch.23017 QPSK_RB6_Offset 0)




BAND 12. Lower Extended Band Edge Plot (1.4M BW Ch.23017 QPSK_RB6_0)



BAND 12. Lower Band Edge Plot (3M BW Ch.23025 QPSK_RB1_Offset 0)

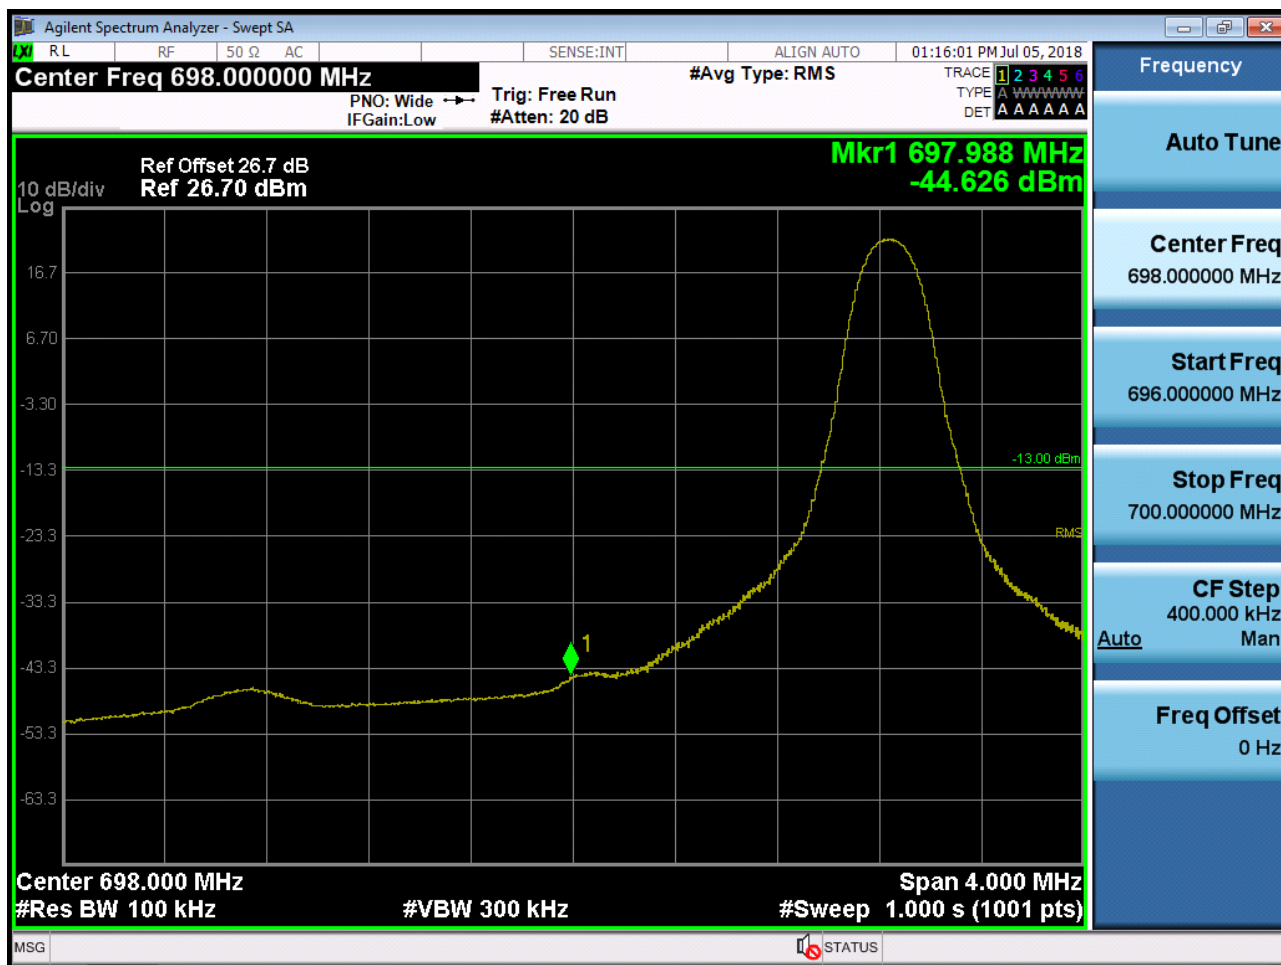


BAND 12. Lower Band Edge Plot (3M BW Ch.23025 QPSK_RB15_Offset 0)

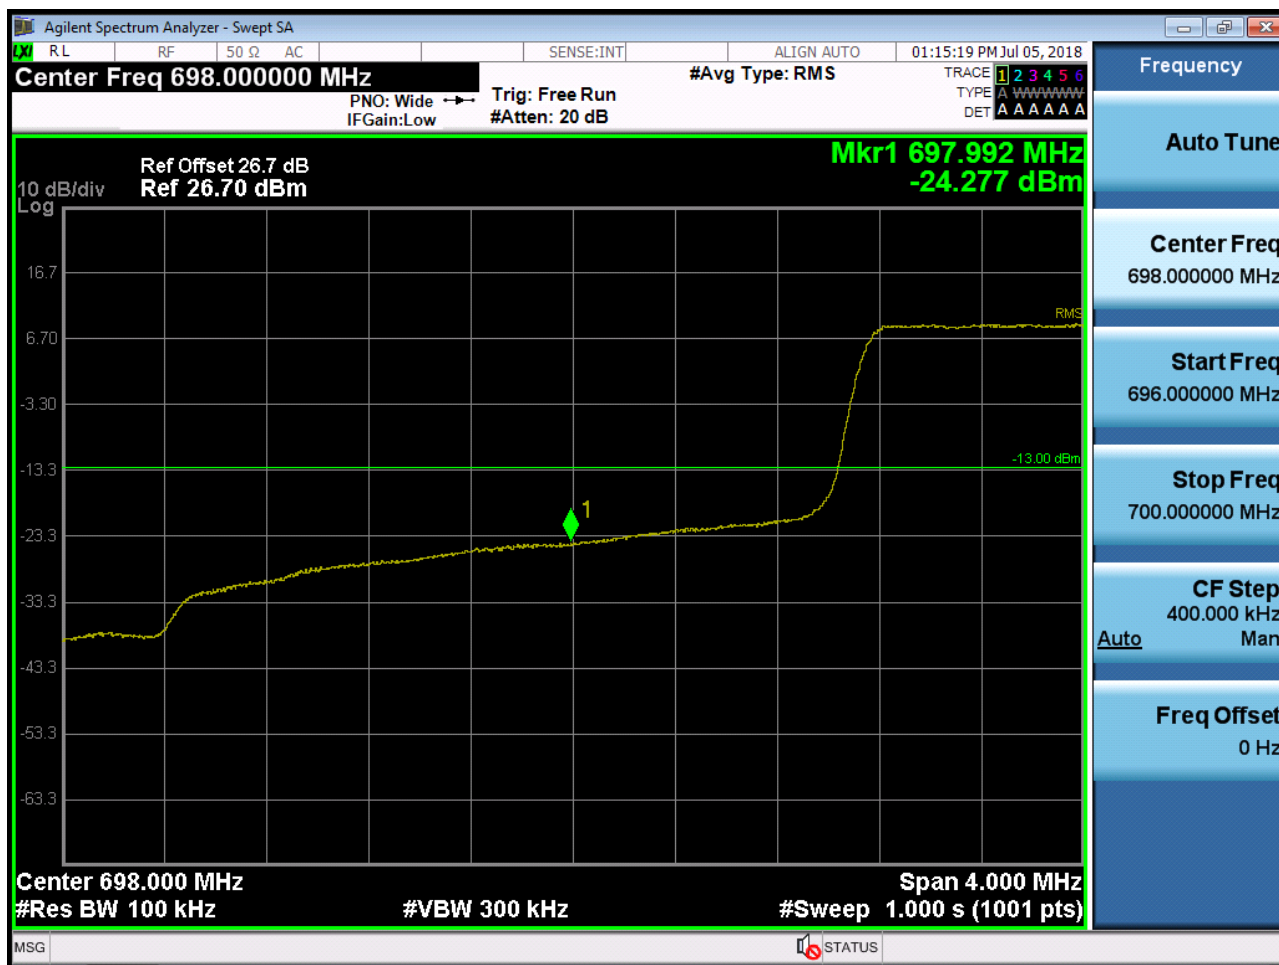

BAND 12. Lower Extended Band Edge Plot (3M BW Ch.23025 QPSK_RB15_0)



BAND 12. Lower Band Edge Plot (5M BW Ch.23035 QPSK_RB1_Offset 0)

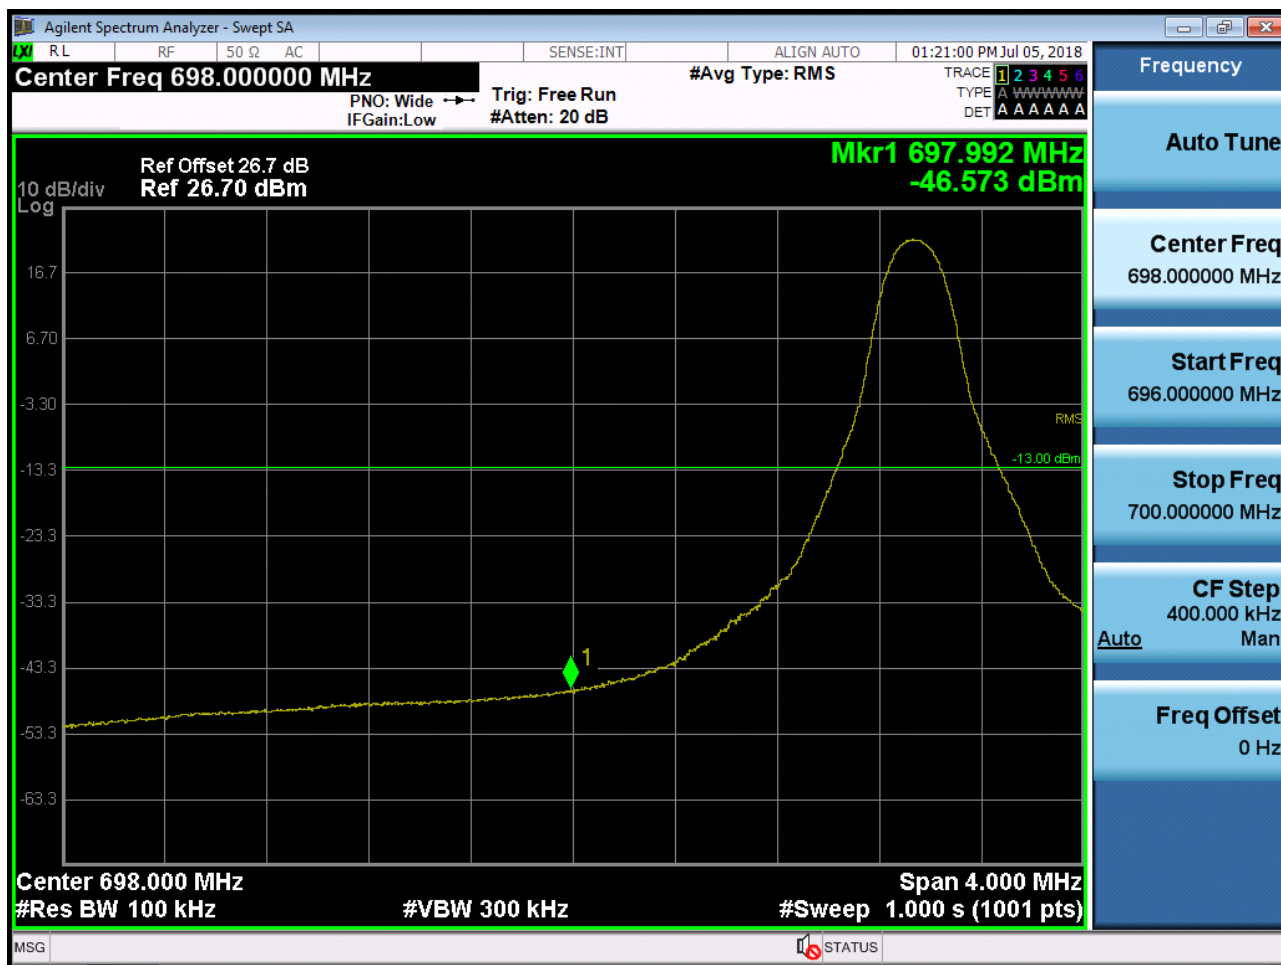


BAND 12. Lower Band Edge Plot (5M BW Ch.23035 QPSK_RB25_Offset 0)



BAND 12. Lower Extended Band Edge Plot (5M BW Ch.23035 QPSK_RB25_0)



BAND 12. Lower Band Edge Plot (10M BW Ch.23060 QPSK_RB1_Offset 0)

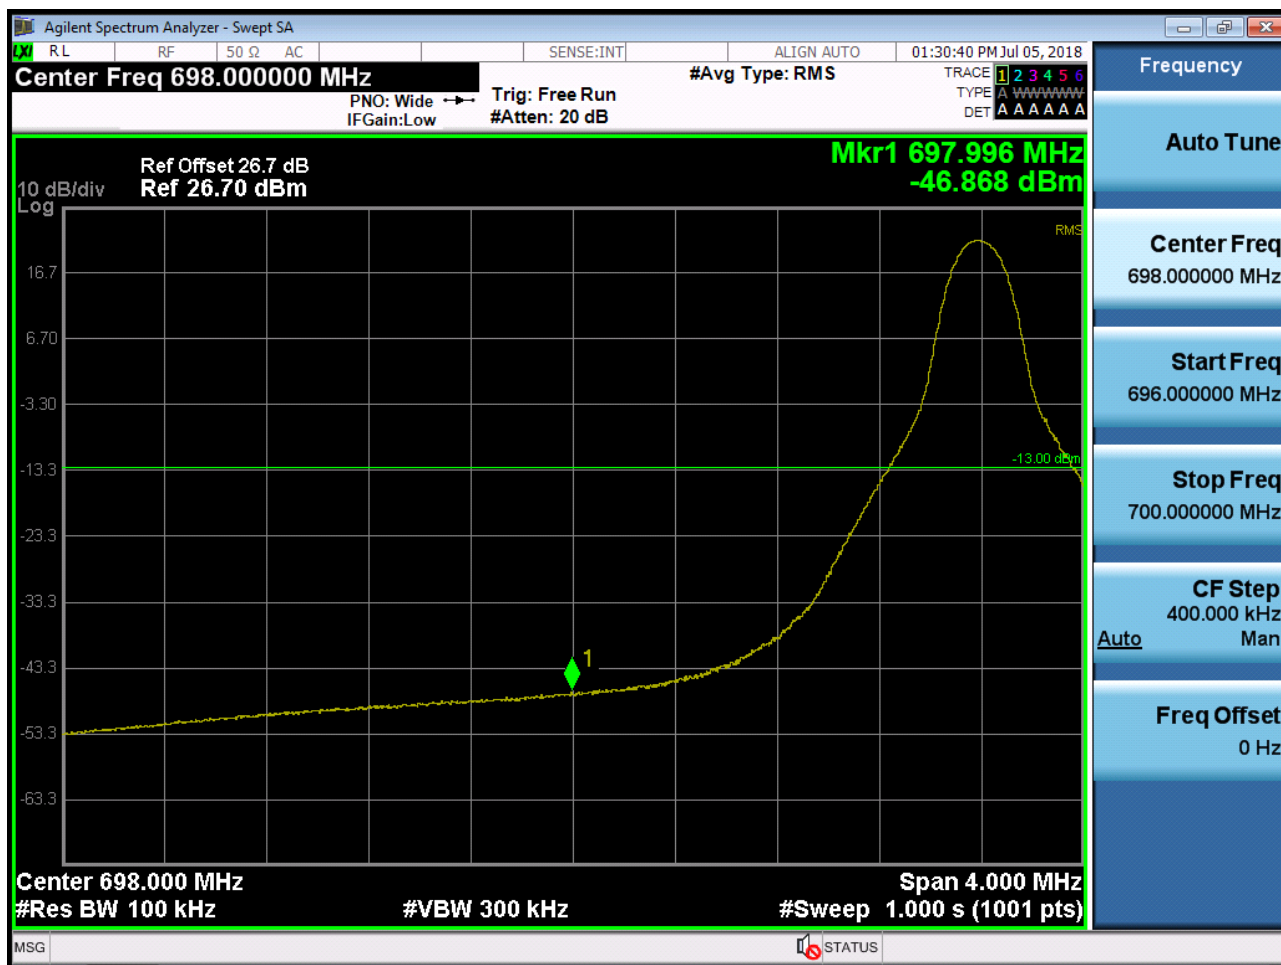


BAND 12. Lower Band Edge Plot (10M BW Ch.23060 QPSK_RB50_Offset 0)



BAND 12. Lower Extended Band Edge Plot (10M BW Ch.23060 QPSK_RB50_0)



BAND 12. Upper Band Edge Plot (1.4M BW Ch.23173 QPSK_RB1_Offset 5)-1

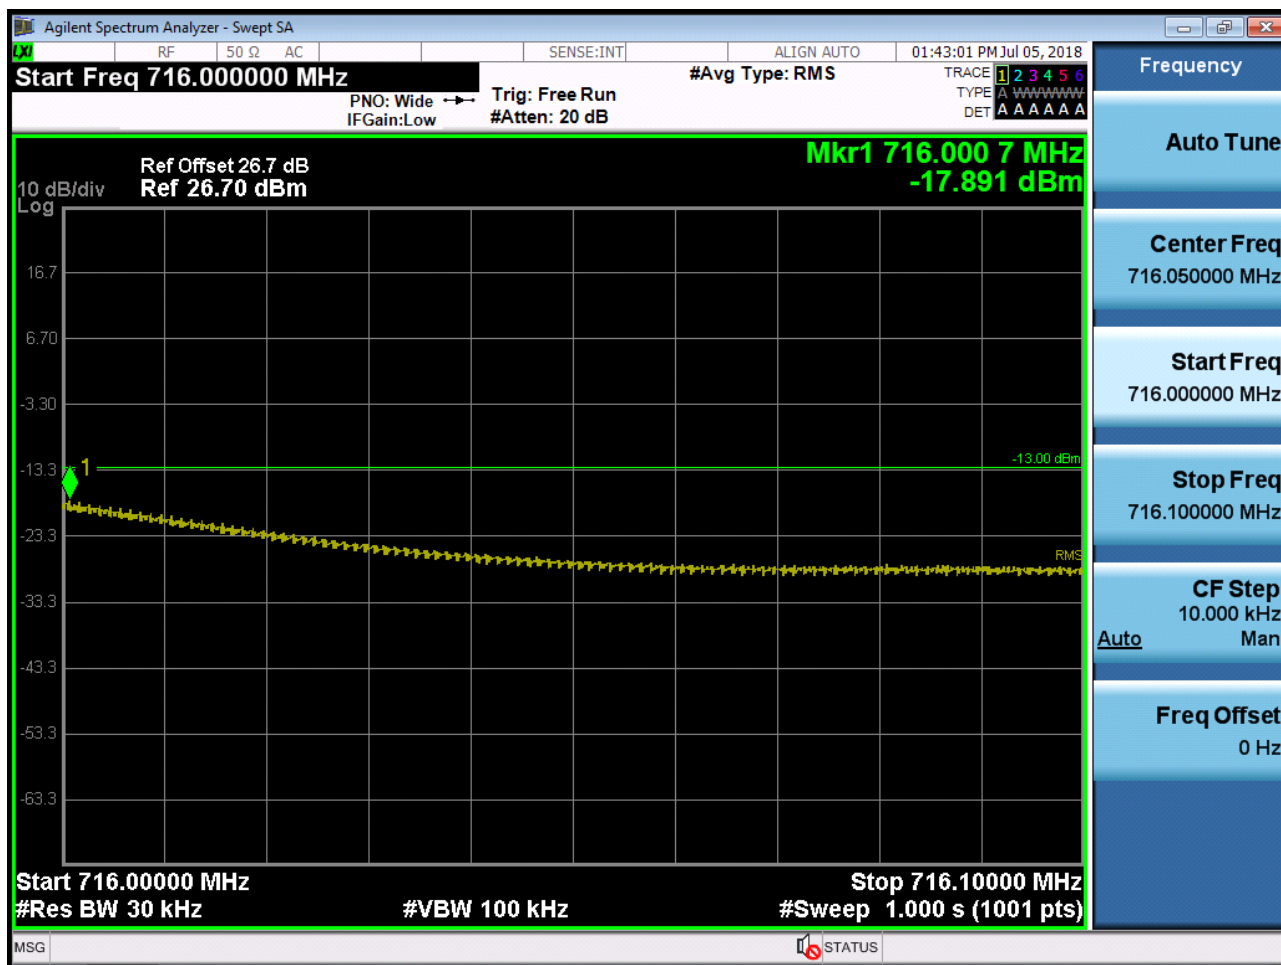

BAND 12. Upper Band Edge Plot (1.4M BW Ch.23173 QPSK_RB1_Offset 5)-2



BAND 12. Upper Band Edge Plot (1.4M BW Ch.23173 QPSK_RB6_Offset 0)



BAND 12. Upper Extended Band Edge Plot (1.4M BW Ch.23173 QPSK_RB6_0)



BAND 12. Upper Band Edge Plot (3M BW Ch.23165 QPSK_RB1_Offset 14)-1



BAND 12. Upper Band Edge Plot (3M BW Ch.23165 QPSK_RB1_Offset 14)-2




BAND 12. Upper Band Edge Plot (3M BW Ch.23165 QPSK_RB15_Offset 0)



BAND 12. Upper Extended Band Edge Plot (3M BW Ch.23165 QPSK_RB15_0)



BAND 12. Upper Band Edge Plot (5M BW Ch.23155 QPSK_RB1_Offset 24)

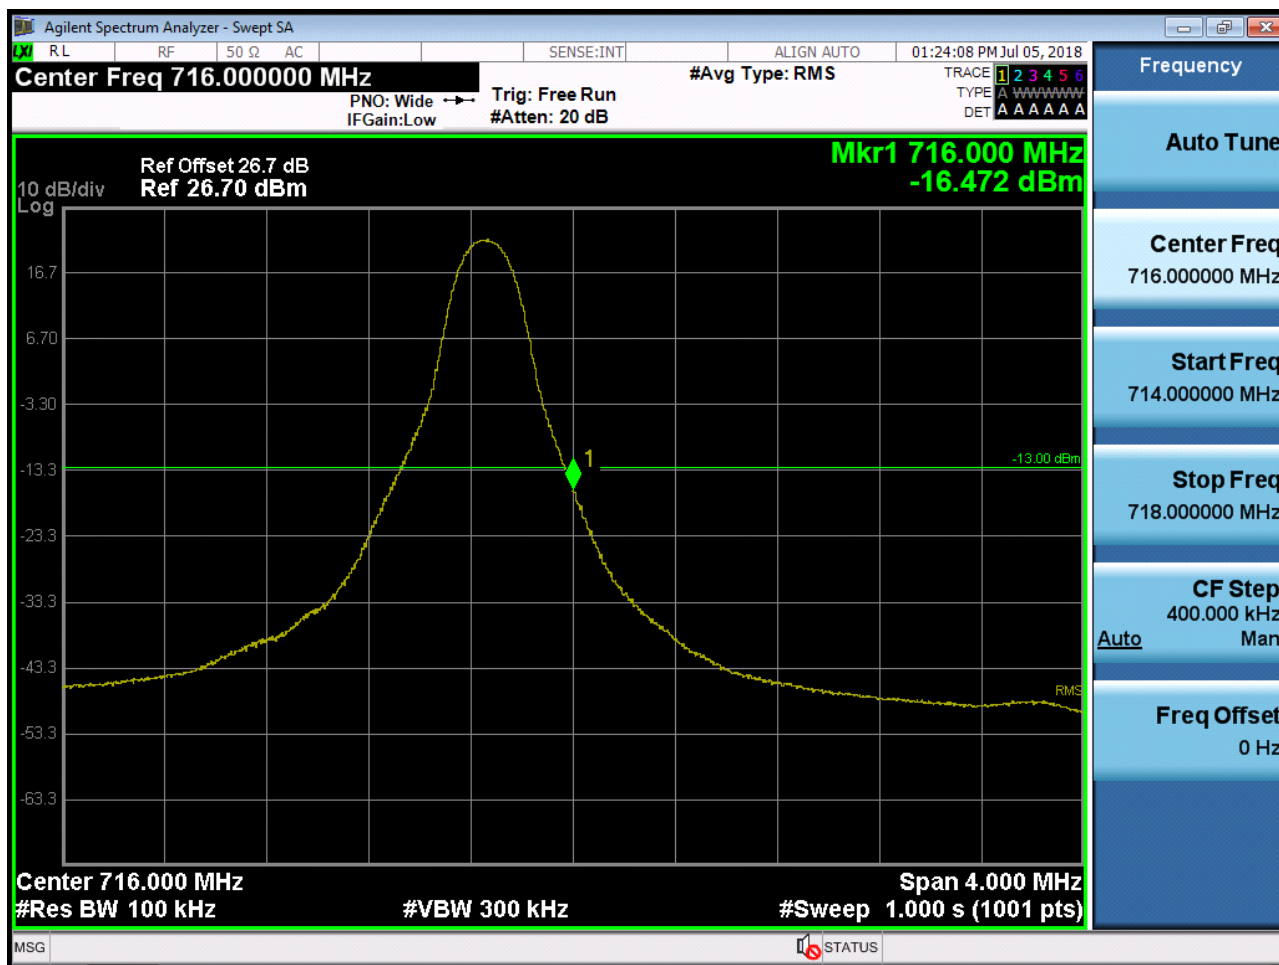


BAND 12. Upper Band Edge Plot (5M BW Ch.23155 QPSK_RB25_Offset 0)



BAND 12. Upper Extended Band Edge Plot (5M BW Ch.23155 QPSK_RB25_0)



BAND 12. Upper Band Edge Plot (10M BW Ch.23130 QPSK_RB1_Offset 49)

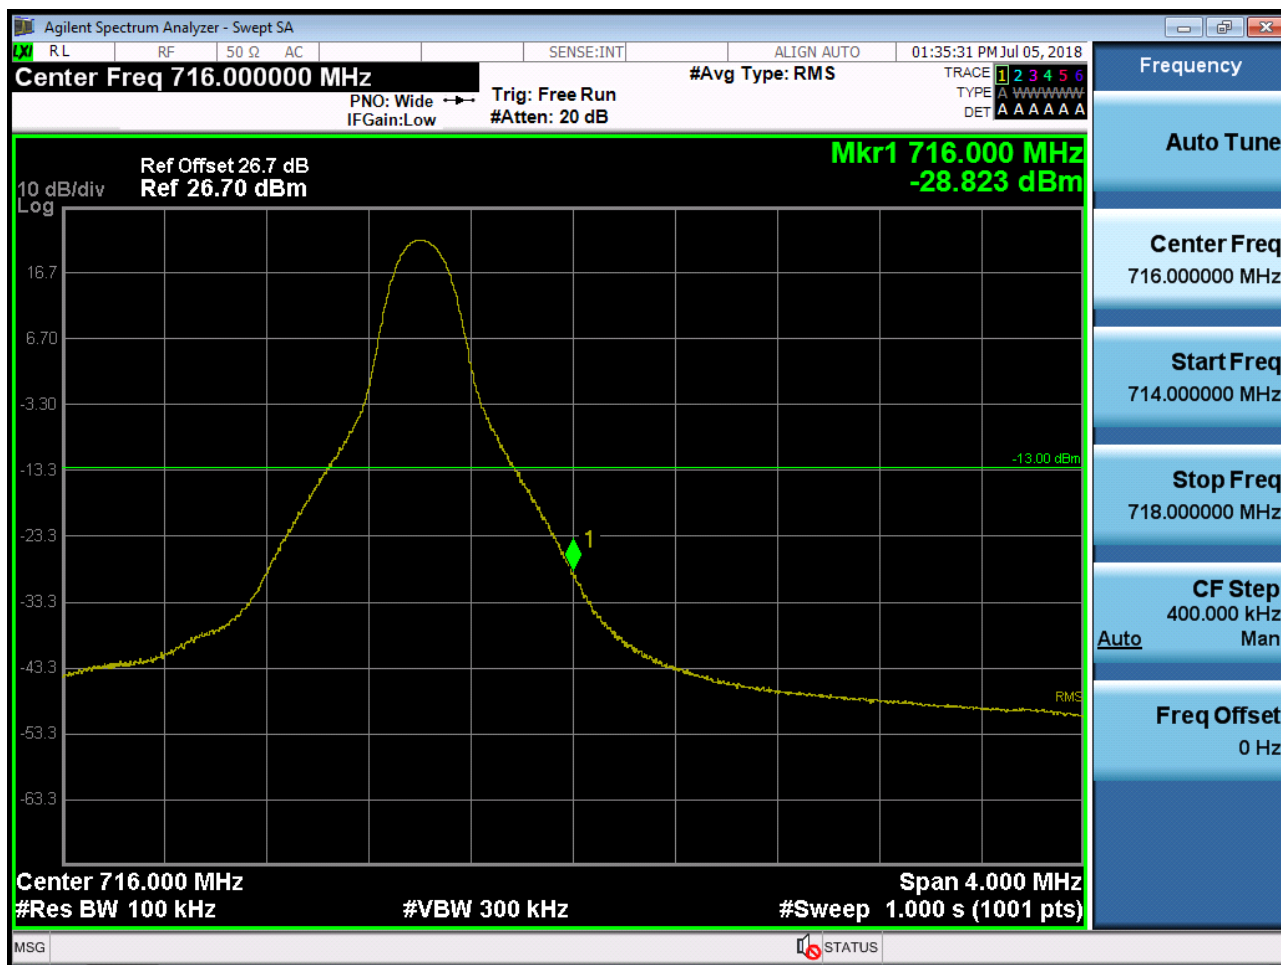


BAND 12. Upper Band Edge Plot (10M BW Ch.23130 QPSK_RB50_Offset 0)




BAND 12. Upper Extended Band Edge Plot (10M BW Ch.23130 QPSK_RB50_0)




BAND 12. Conducted Spurious Plot _ (23017ch_1.4MHz_QPSK_RB 1_0)

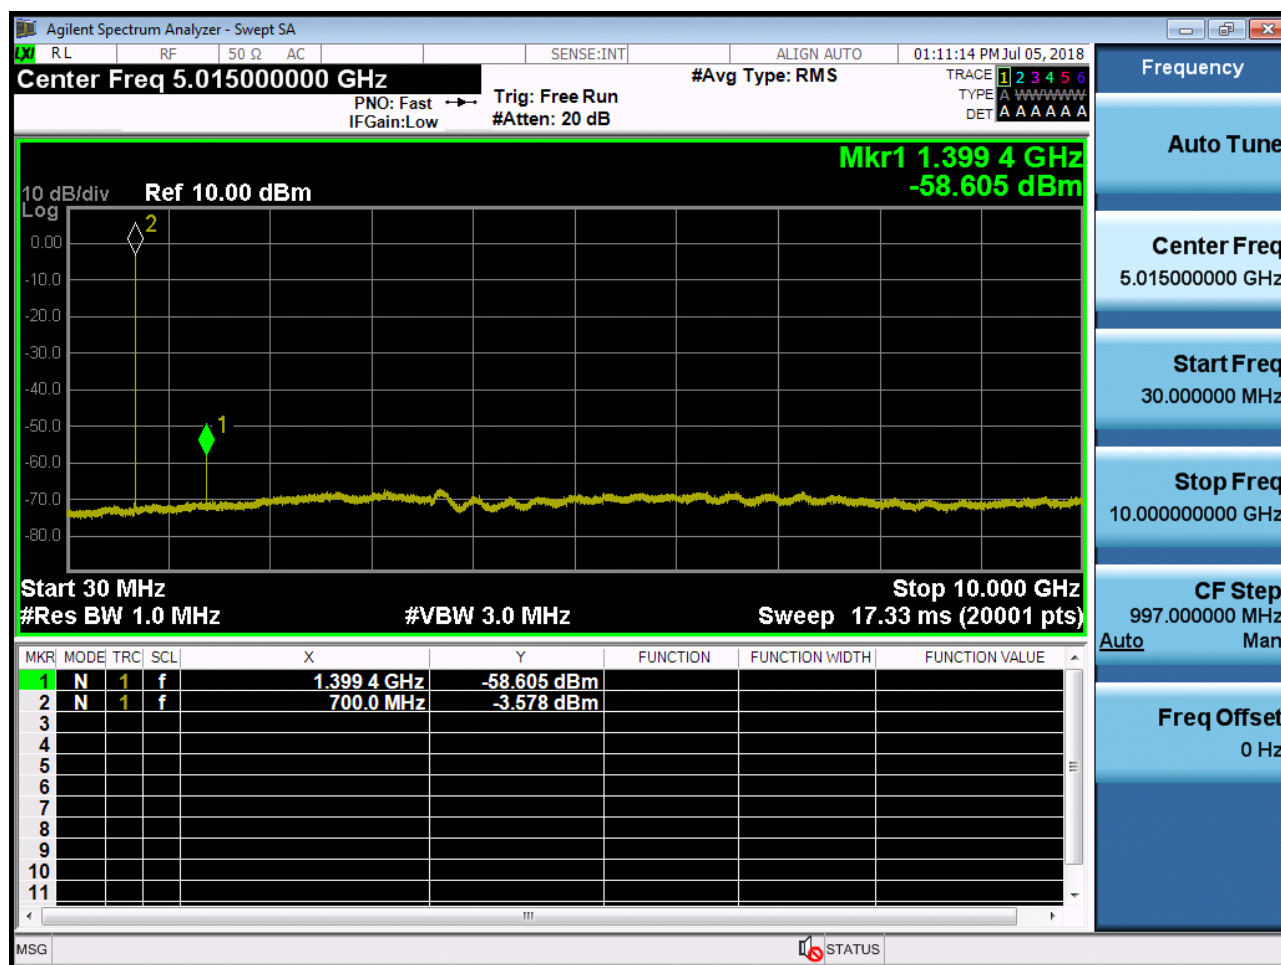


BAND 12. Conducted Spurious Plot _ (23095ch_1.4MHz_QPSK_RB 1_0)

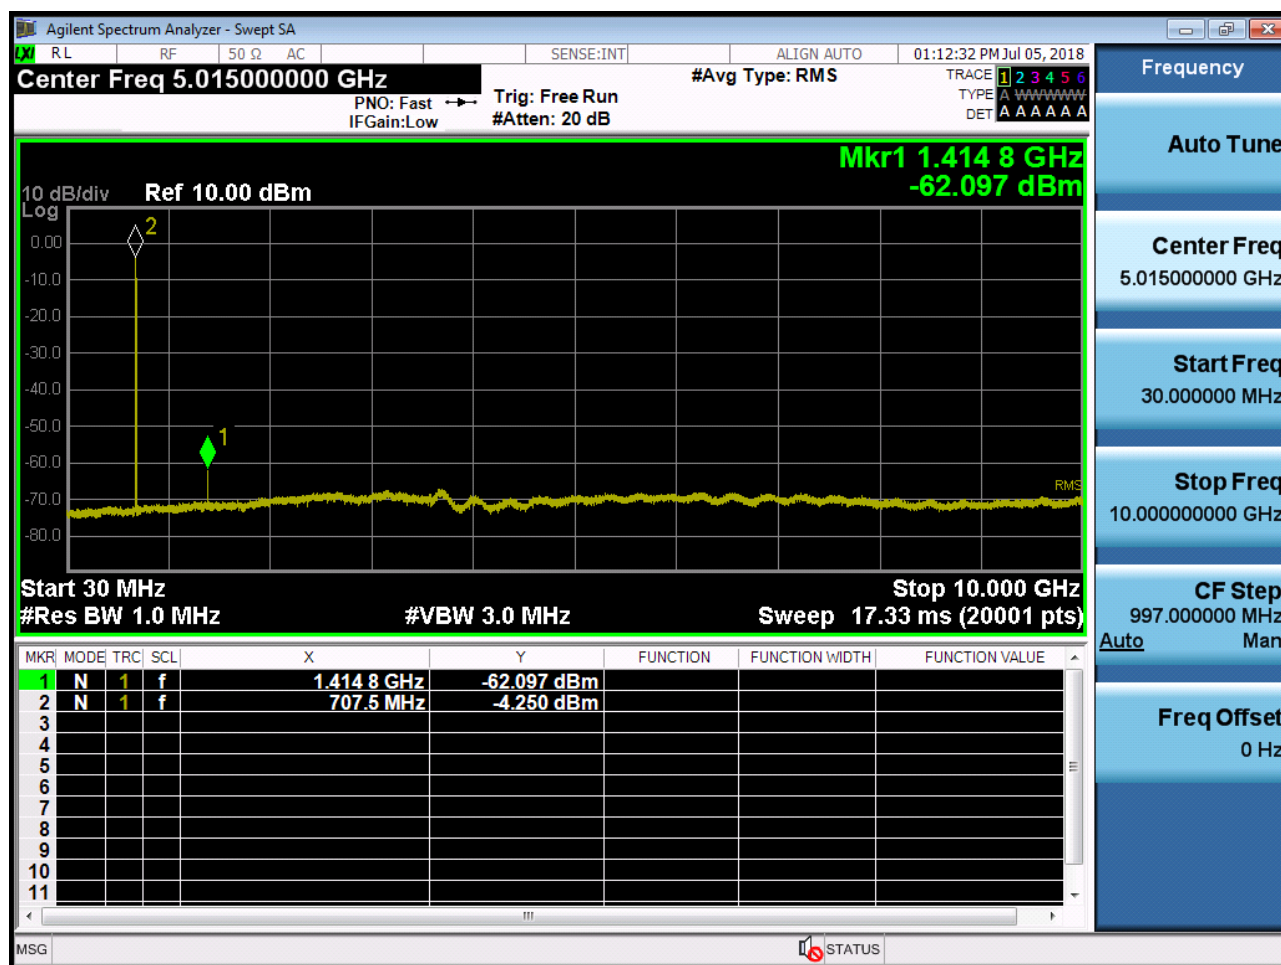


BAND 12. Conducted Spurious Plot _ (23173ch_1.4MHz_QPSK_RB 1_0)

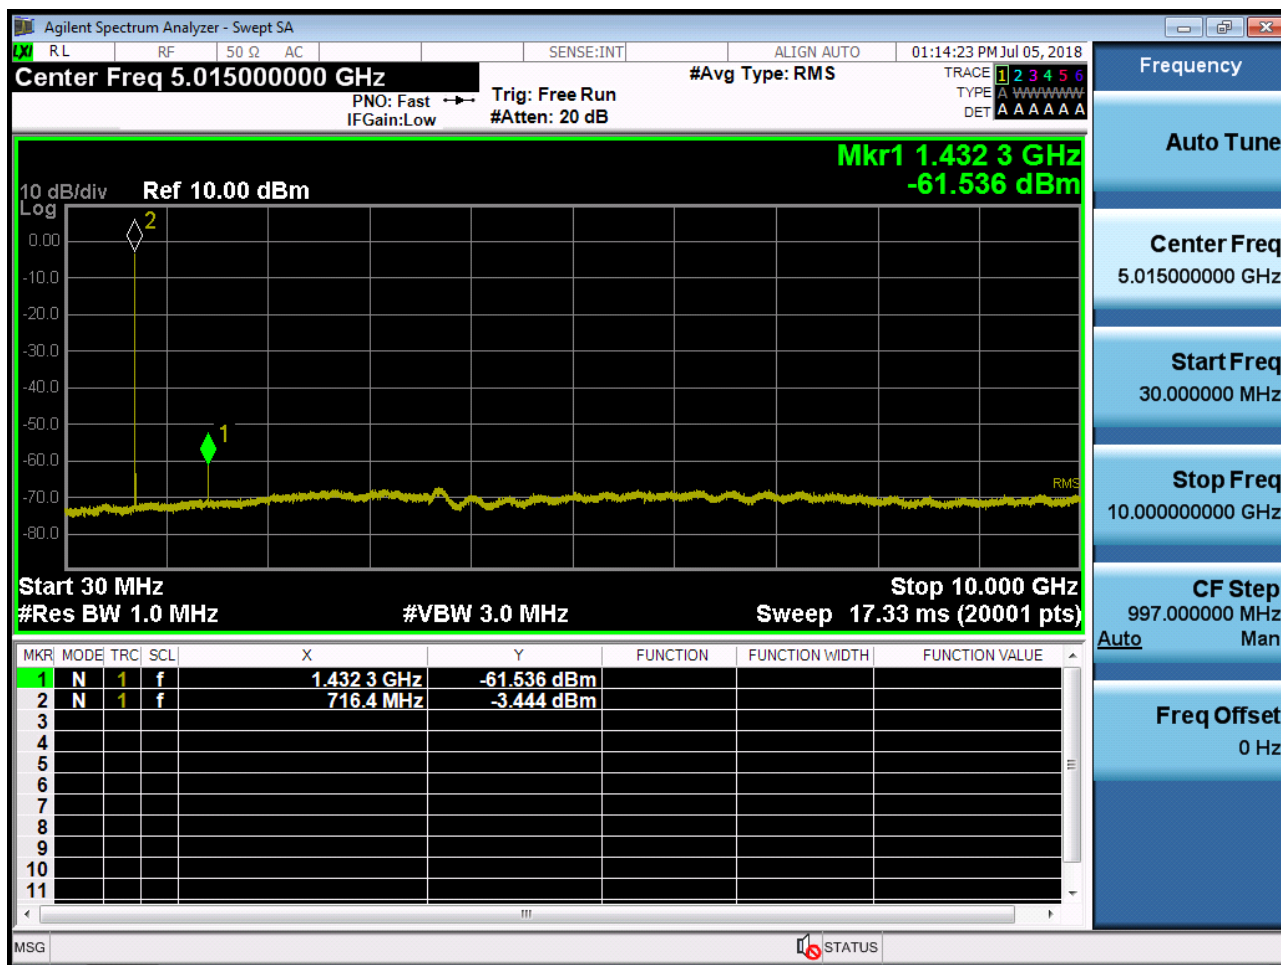


BAND 12. Conducted Spurious Plot _ (23025ch_3MHz_QPSK_RB 1_0)

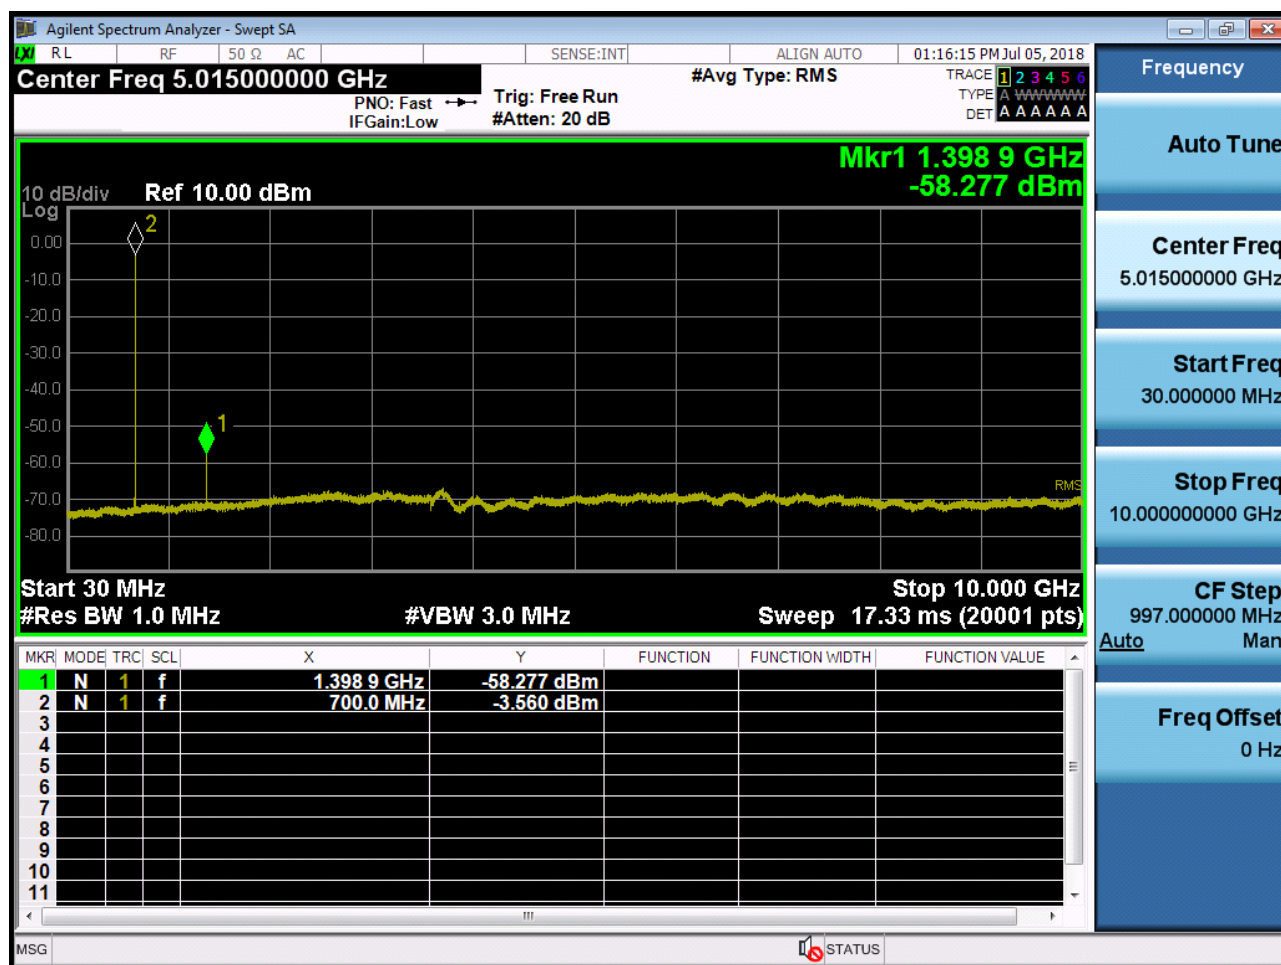


BAND 12. Conducted Spurious Plot _ (23095ch_3MHz_QPSK_RB 1_0)

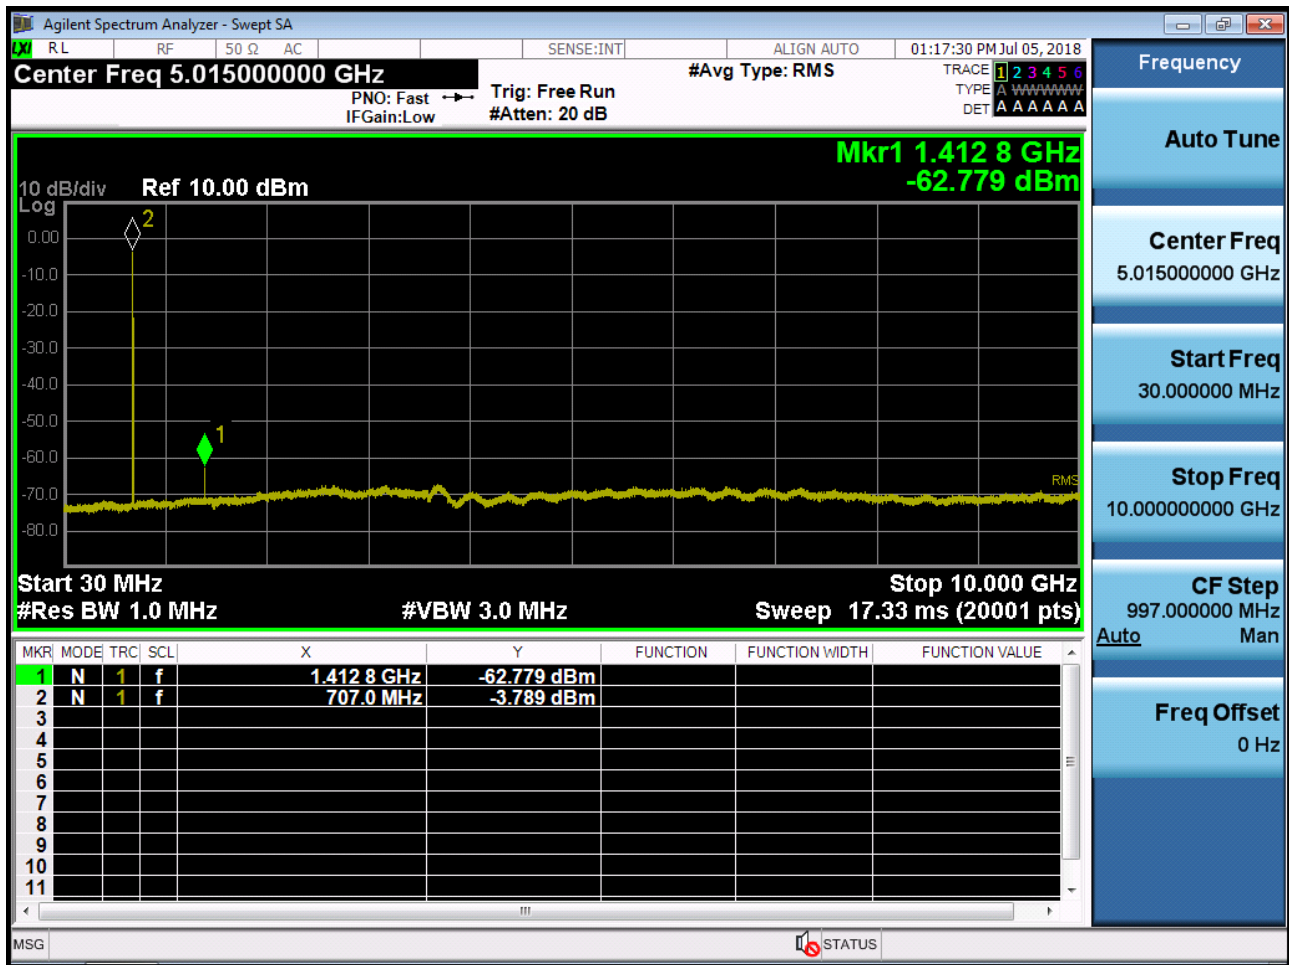


BAND 12. Conducted Spurious Plot _ (23165ch_3MHz_QPSK_RB 1_0)

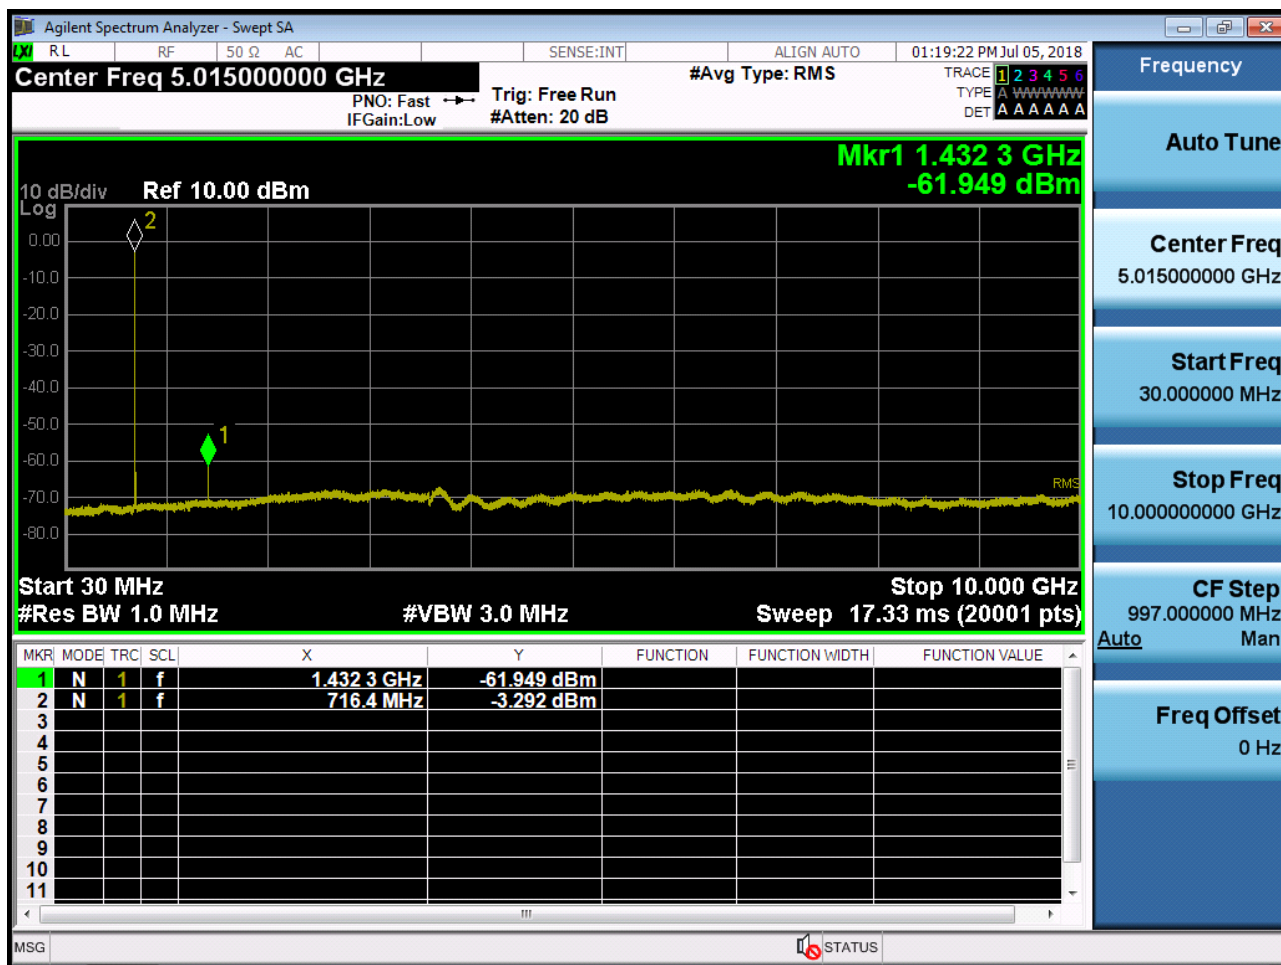


BAND 12. Conducted Spurious Plot _ (23035ch_5MHz_QPSK_RB 1_0)

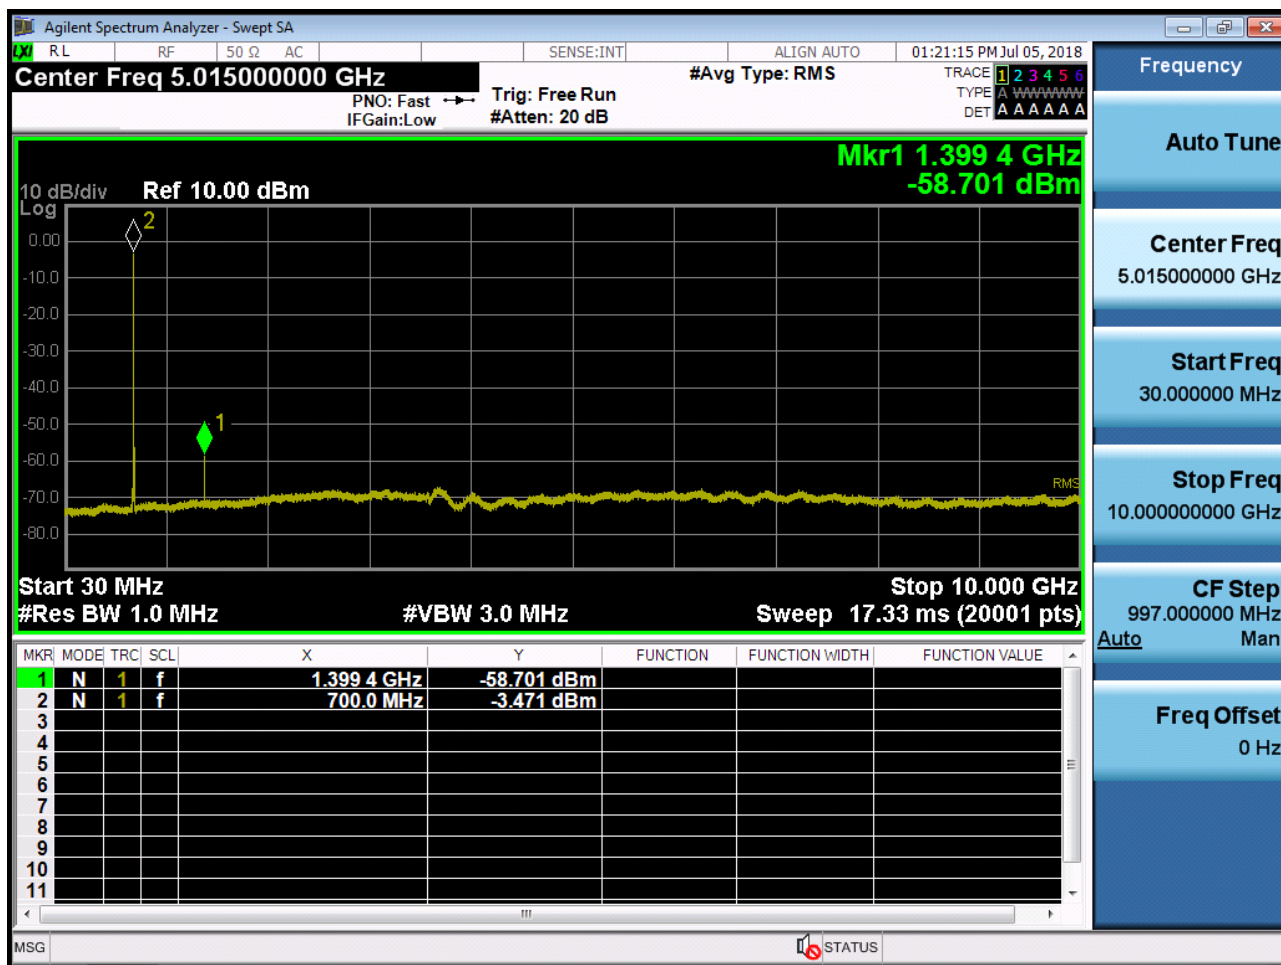


BAND 12. Conducted Spurious Plot _ (23095ch_5MHz_QPSK_RB 1_0)

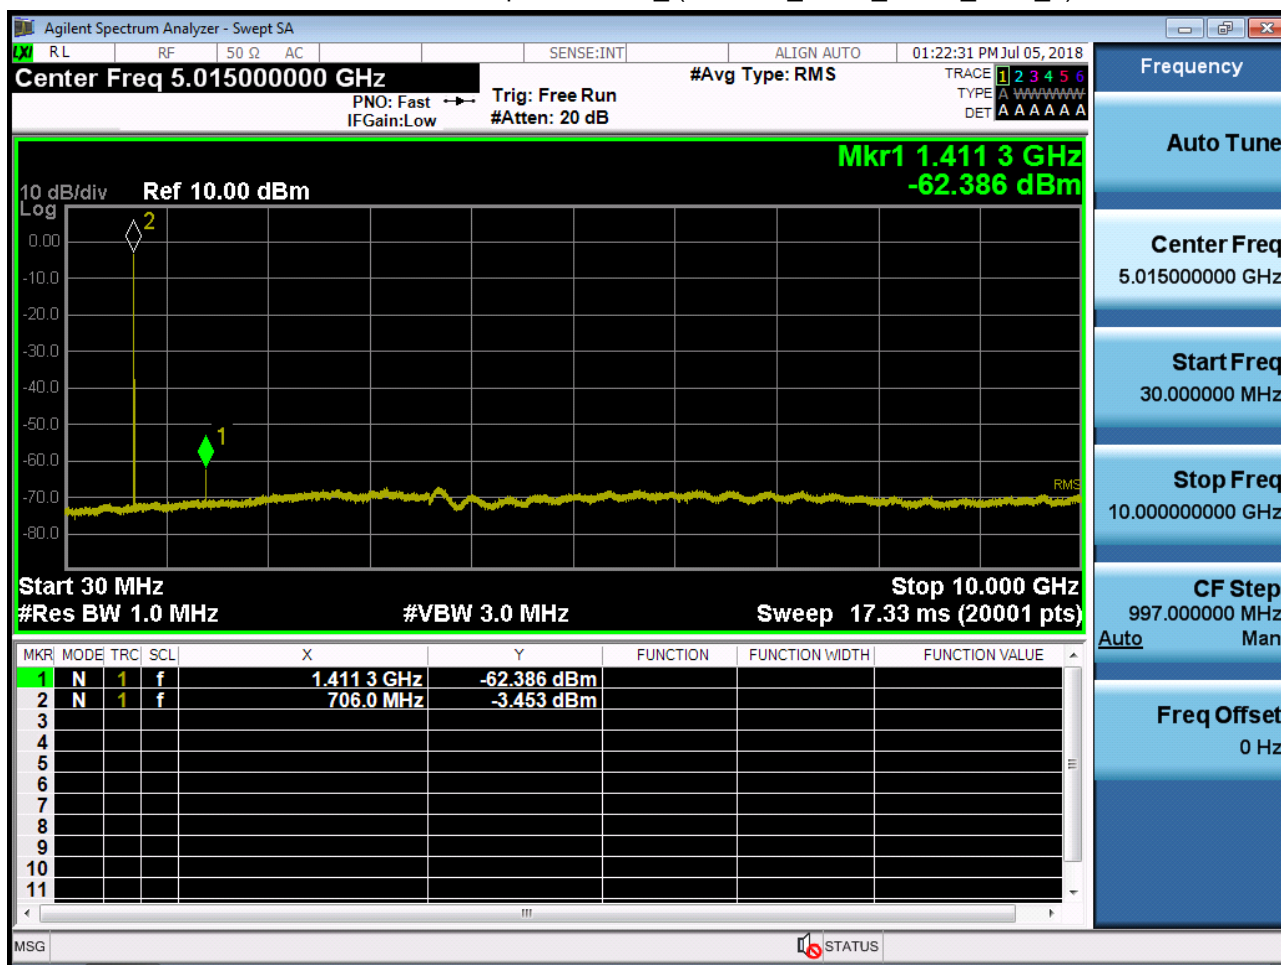


BAND 12. Conducted Spurious Plot _ (23155ch_5MHz_QPSK_RB 1_0)

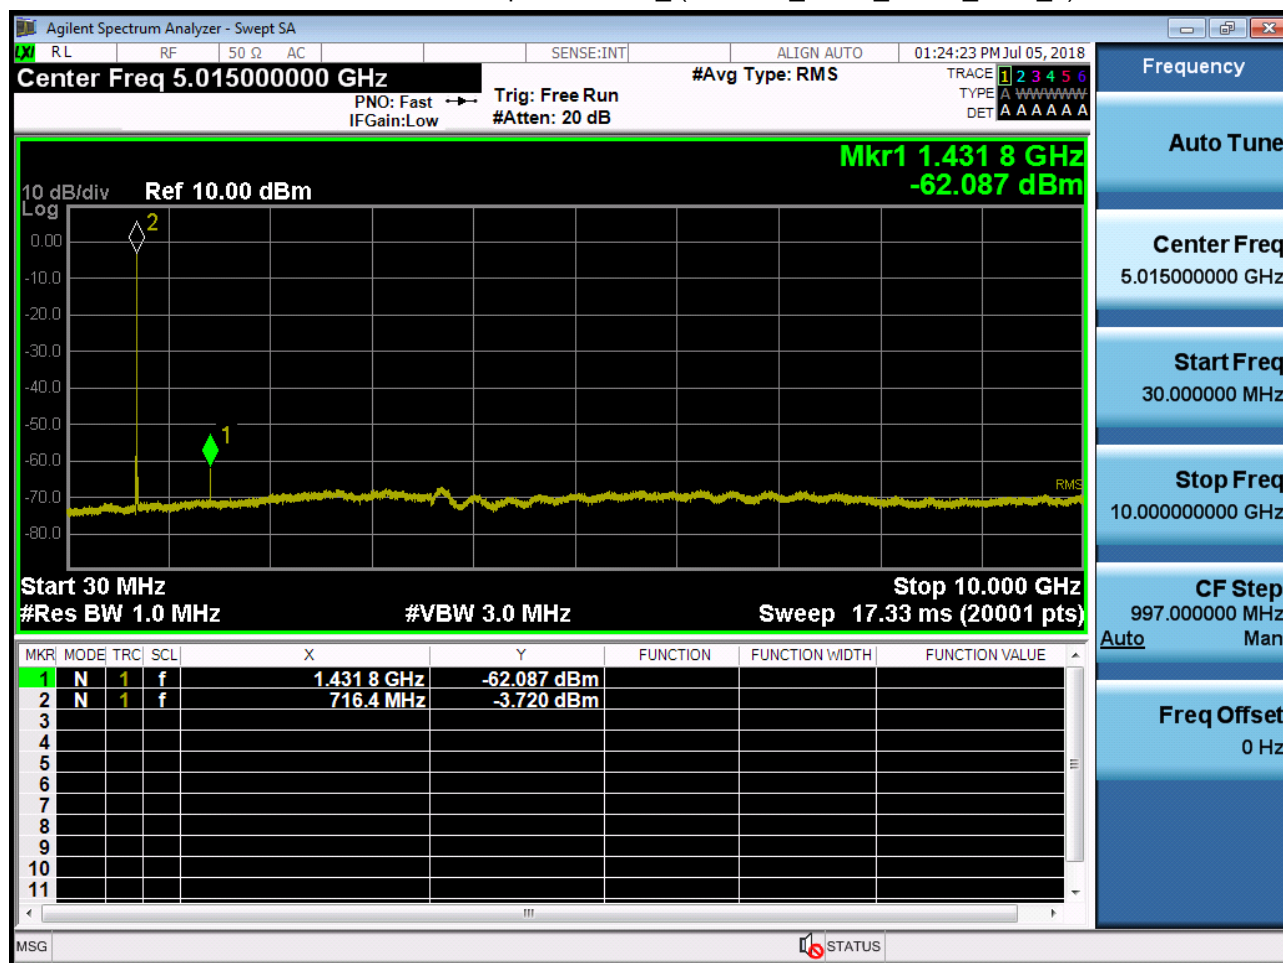


BAND 12. Conducted Spurious Plot _ (23060ch_10MHz_QPSK_RB 1_0)

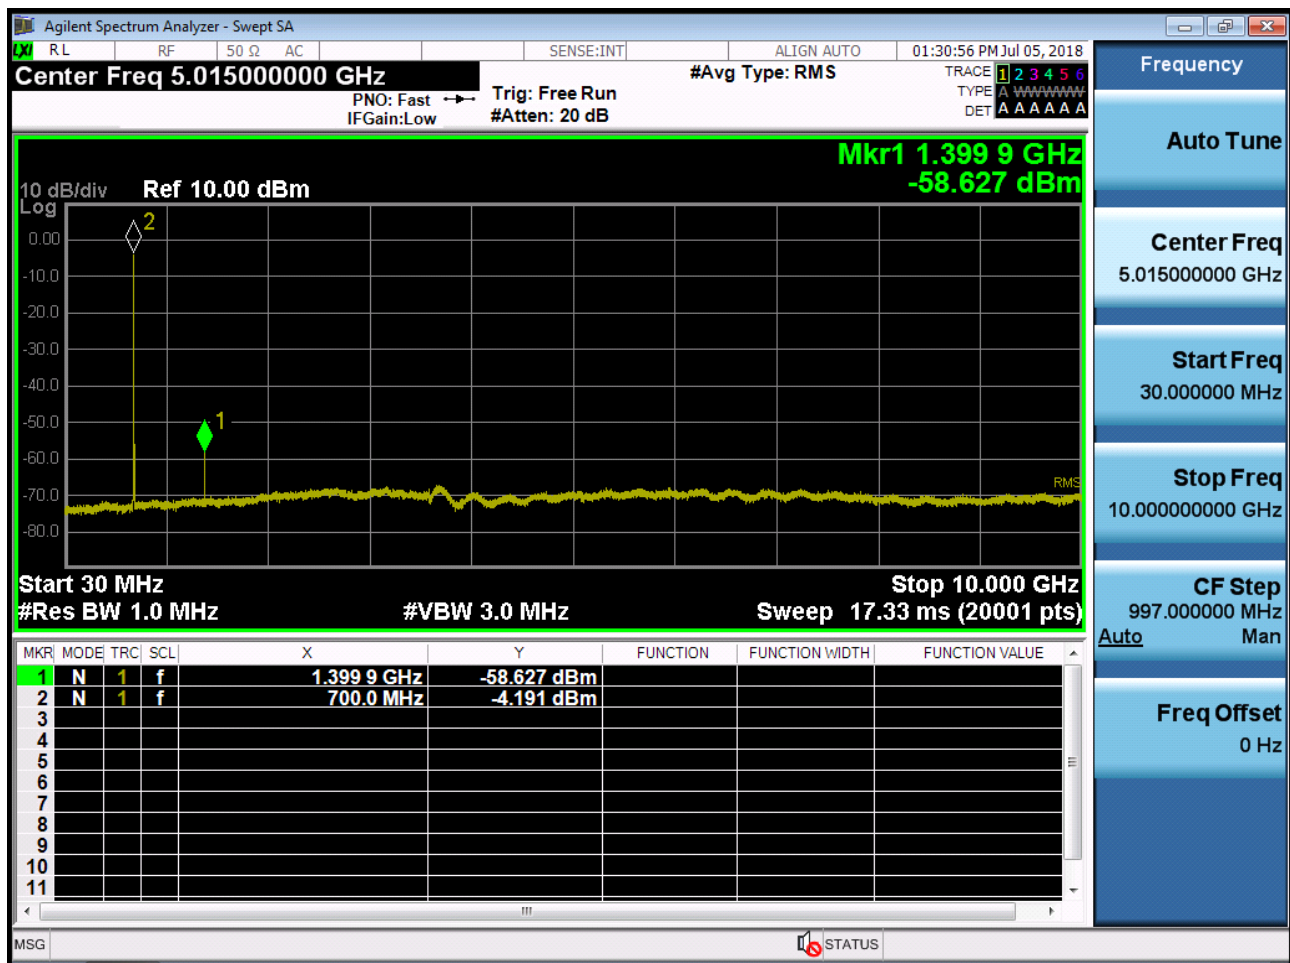

BAND 12. Conducted Spurious Plot _ (23095ch_10MHz_QPSK_RB 1_0)

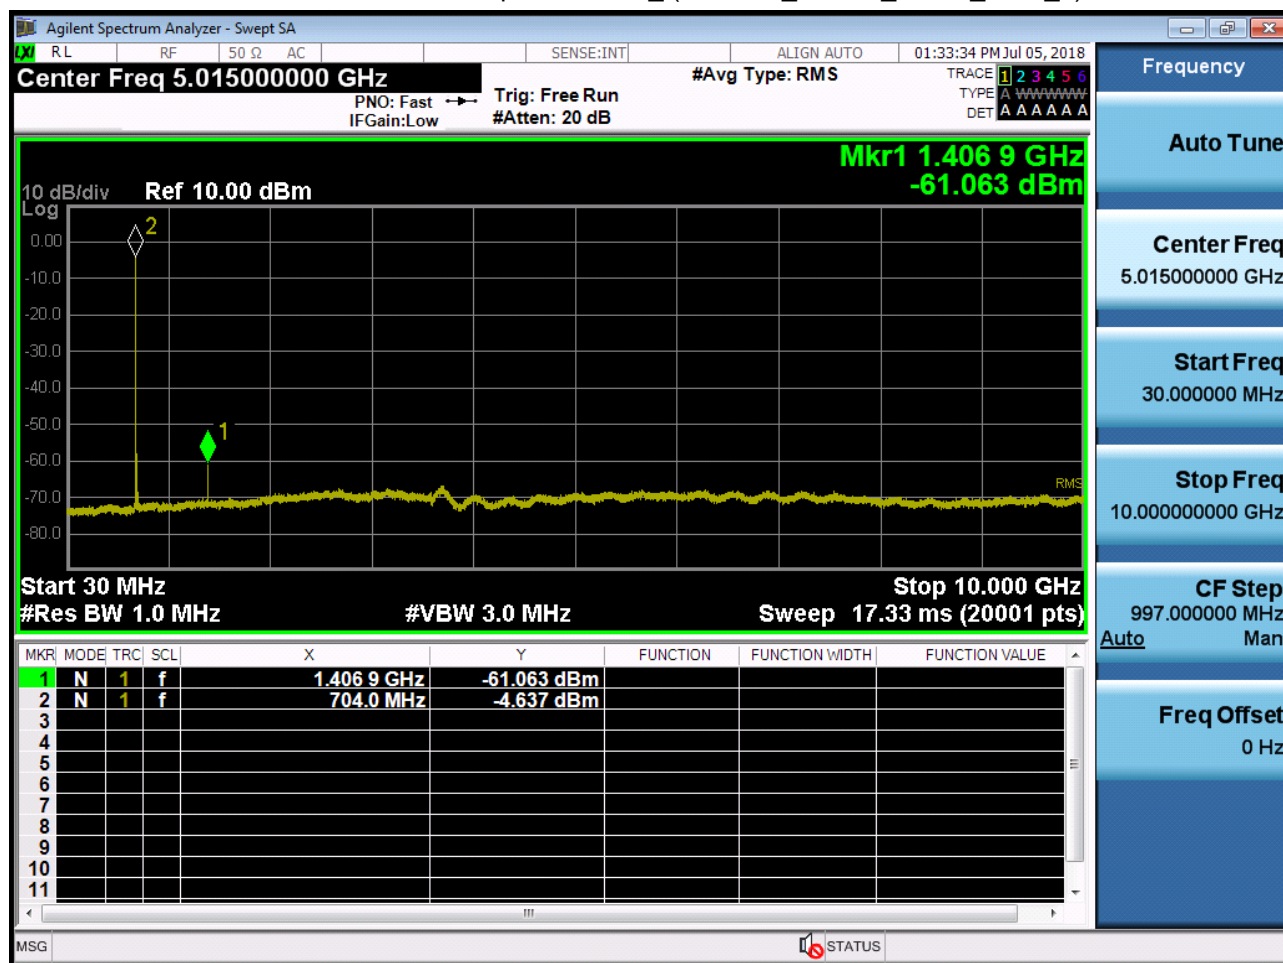

BAND 12. Conducted Spurious Plot _ (23130ch_10MHz_QPSK_RB 1_0)

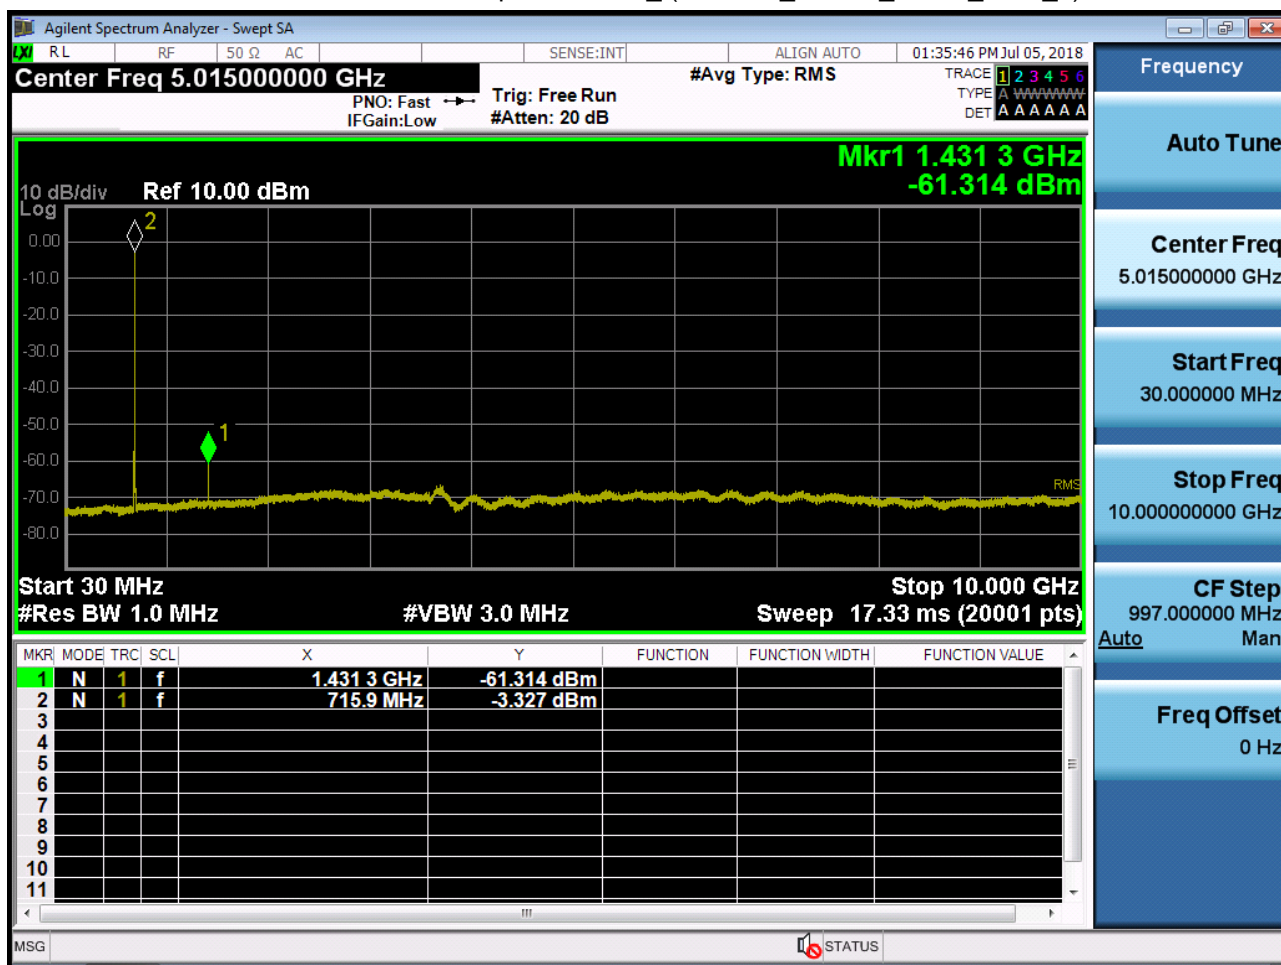

10. Annex A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1808-FC003-P