


**Appendix B. Test Result and Data (30MHz ~ 1GHz)**

Test Mode : 2TX 11be160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

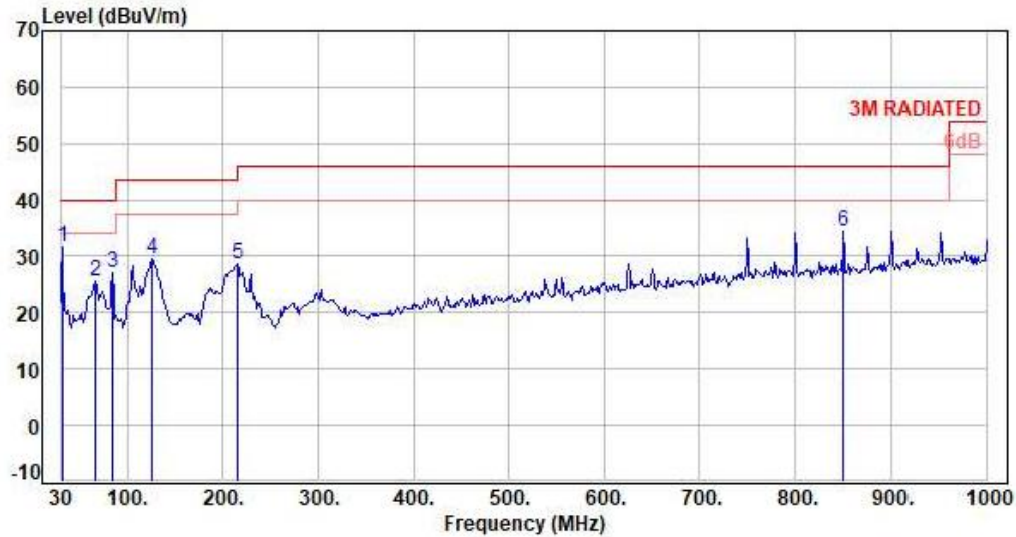

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	31.94	-10.94	42.53	31.59	40.00	-8.41	Peak	400	0	P
2	66.86	-11.55	37.15	25.60	40.00	-14.40	Peak	400	0	P
3	84.32	-15.95	43.04	27.09	40.00	-12.91	Peak	400	0	P
4	126.03	-12.74	42.18	29.44	43.50	-14.06	Peak	400	0	P
5	216.24	-13.24	41.96	28.72	46.00	-17.28	Peak	400	0	P
6	850.62	0.58	33.85	34.43	46.00	-11.57	Peak	400	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

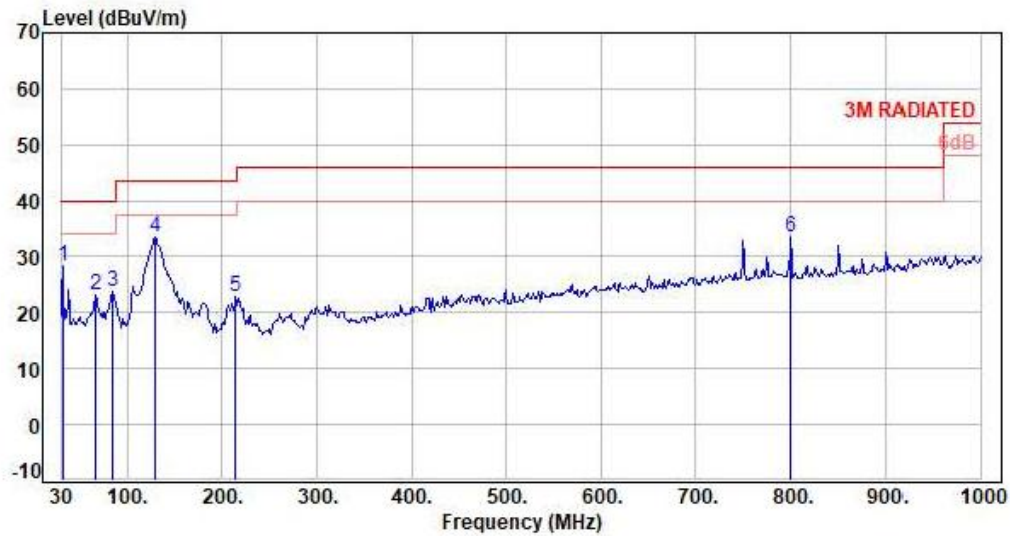

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	31.94	-10.94	39.31	28.37	40.00	-11.63	Peak	100	360	P
2	66.86	-11.55	34.63	23.08	40.00	-16.92	Peak	100	360	P
3	84.32	-15.95	39.61	23.66	40.00	-16.34	Peak	100	360	P
4	128.94	-12.52	46.00	33.48	43.50	-10.02	Peak	100	360	P
5	214.30	-13.30	36.27	22.97	43.50	-20.53	Peak	100	360	P
6	800.18	0.07	33.53	33.60	46.00	-12.40	Peak	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor