ARISTOTLE ENTERPRISES INC.

Specifications

RFA-25-AP923-4B-385

Electrical Specifications

Frequency range	2400-2500 MHz	5150-5875 MHz
Peak gain	1.39 dBi	2.17 dBi
Average gain	-4.27 dBi	-4.18 dBi
VSWR(in Device)	3.5 : 1 Max.	2.0: 1 Max.
Polarization	Linear, vertical	
Power handling	1W (cw)	
Impedance	50 Ω	
Connector	IPEX MHF4	
Cable	Ø1.13	

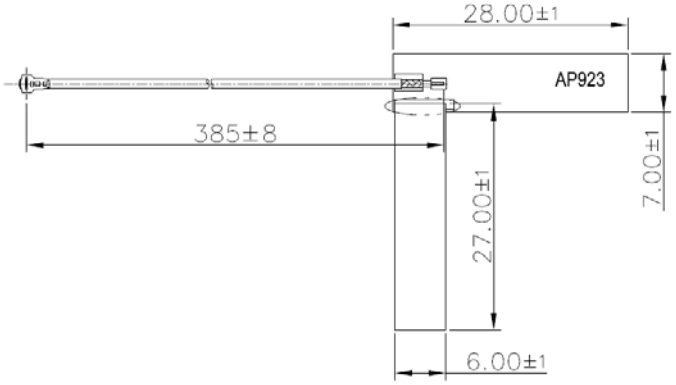

Environmental & Mechanical Characteristics

Temperature	- 10℃ to +55℃
Humidity	95% @ 25℃

VSWR

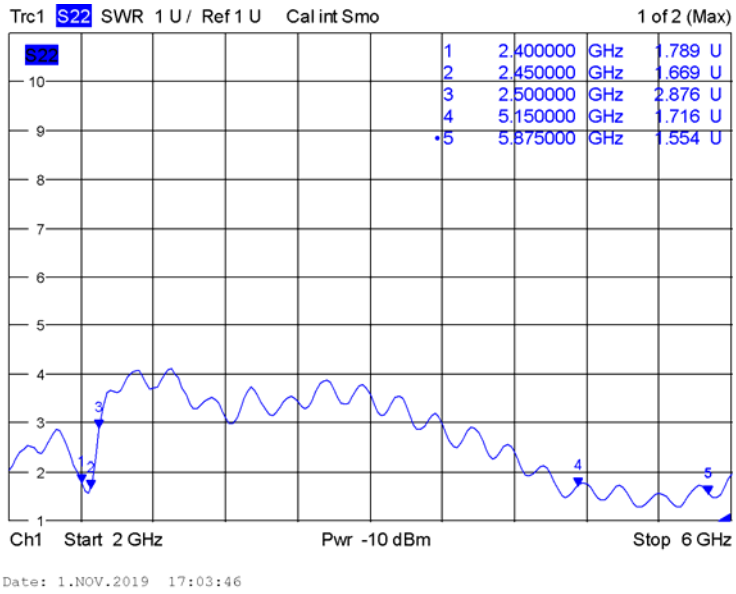

ARISTOTLE
8F, No.63, Juguang Rd, Zhonghe Dist, New Taipei City 235, Taiwan, R.O.C.
Tel : +886-2-2225-8209 Fax: +886-2-2225-7523 www.aristotle.com.tw

Radiation Pattern

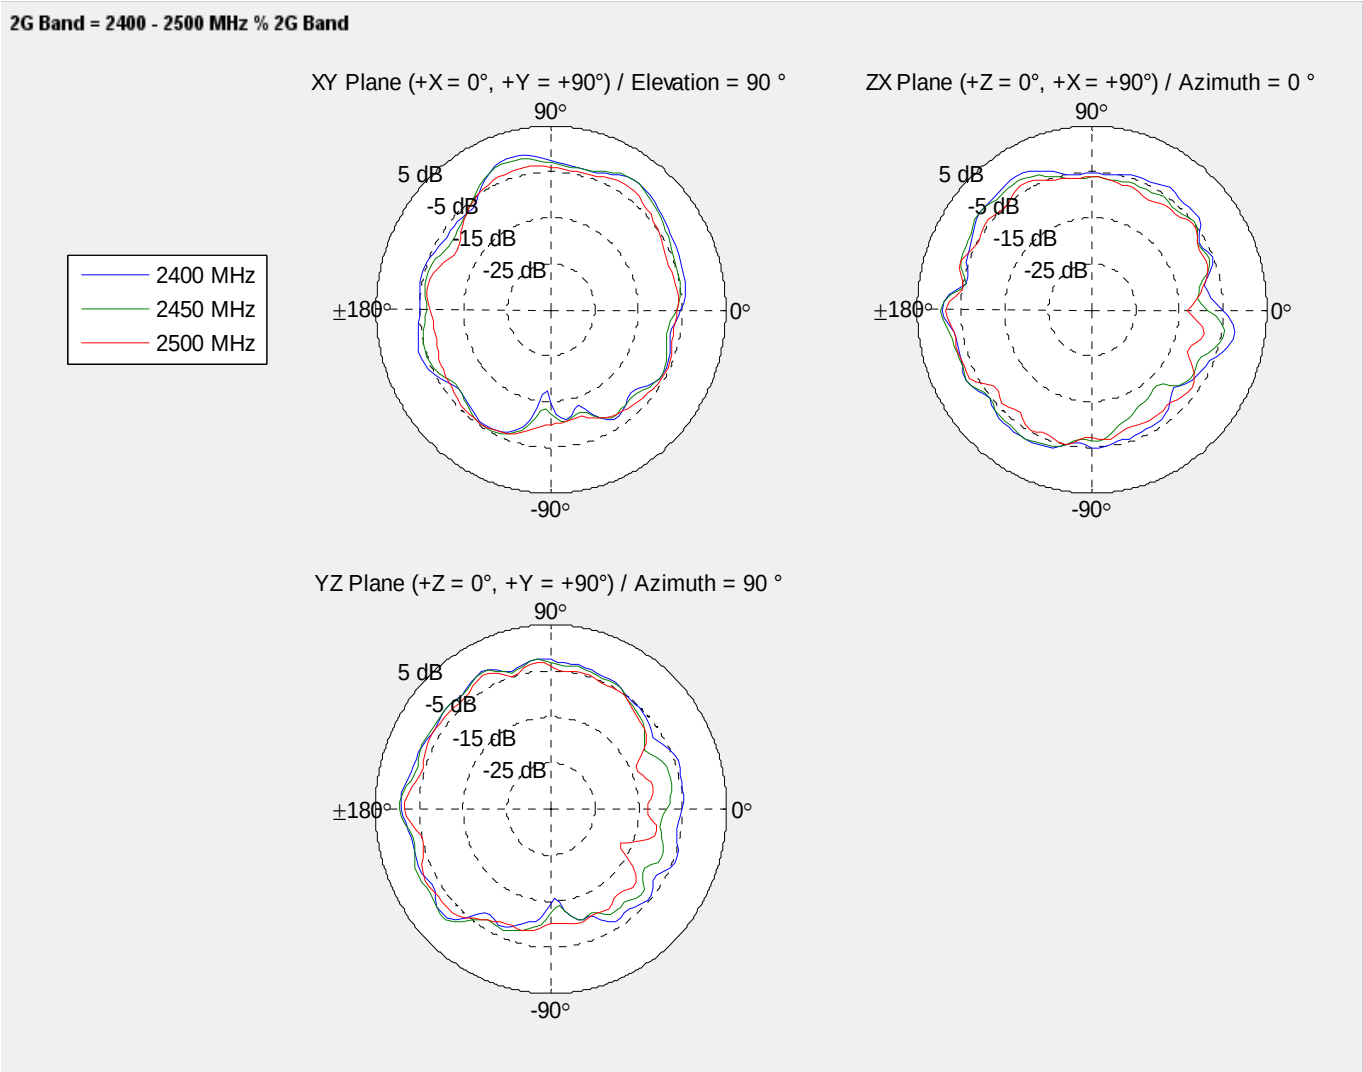
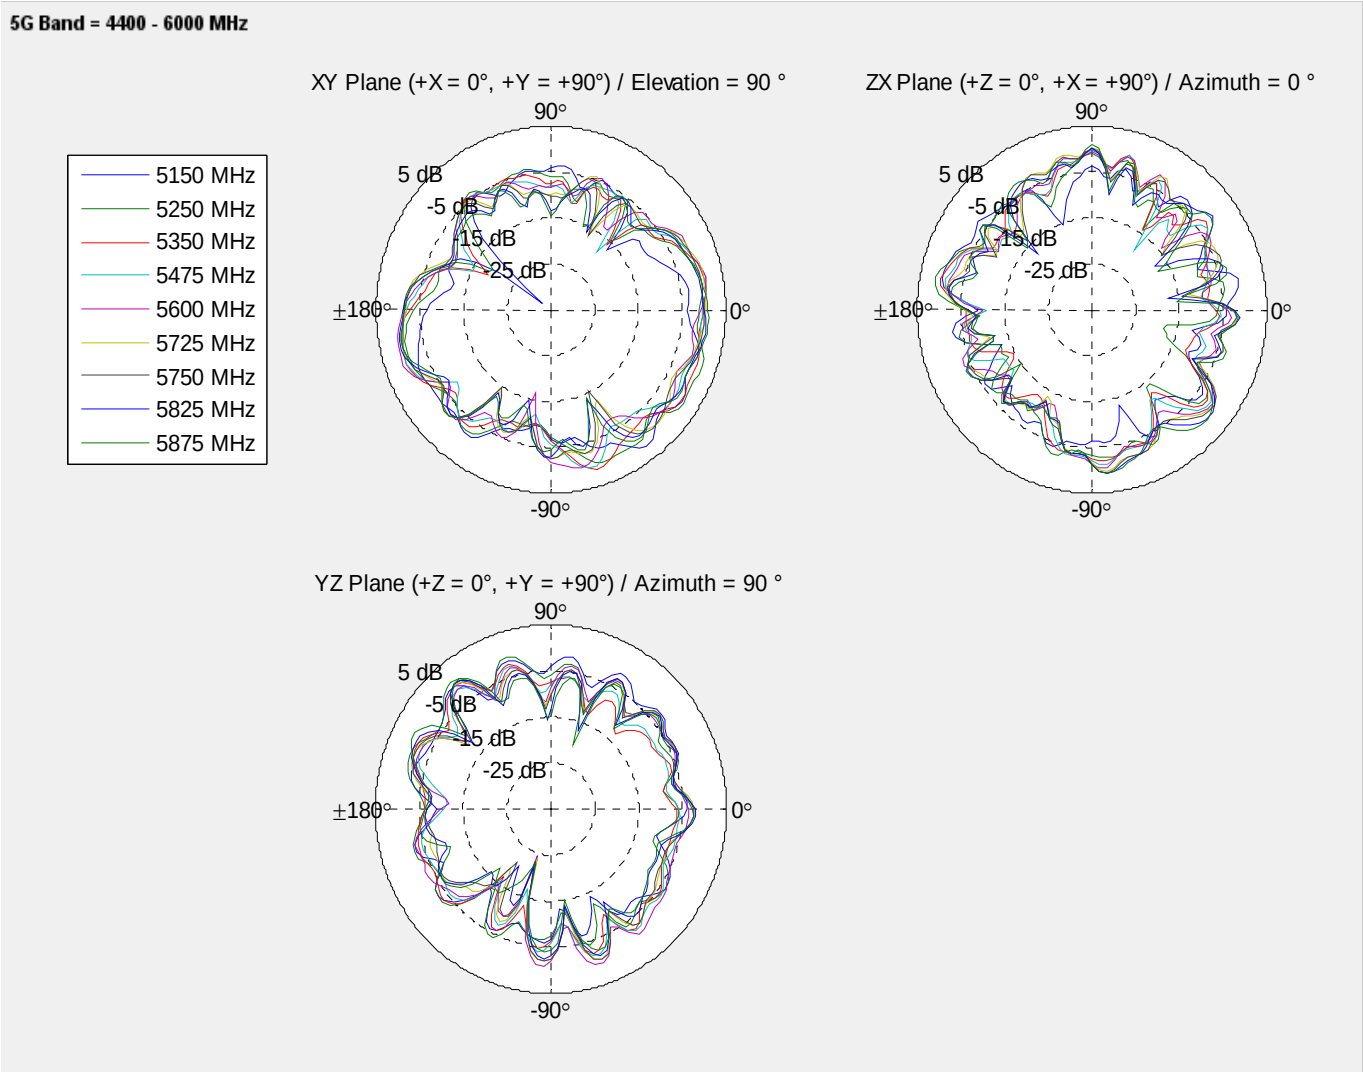
Radiation Pattern