



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247 TEST REPORT

For

SHANGHAI MERIT TECHNOLOGY CORP.

1058 TAOGAN RD., SHESHAN TOWN, SONGJIANG DISTRICT, SHANGHAI, China

FCC ID: XJ6MT-203A

Report Type:

Original Report

Product Type:

3CH 2.4GHZ FHSS RADIO
CONTROL SYSTEM

Test Engineer: Alisa Gao

Alisa Gao

Report Number: RSHA181115003-00B

Report Date: 2018-12-19

Oscar Ye

Reviewed By: RF Leader

Oscar Ye

Prepared By:

Bay Area Compliance Laboratories Corp. (Kunshan)
No.248 Chenghu Road, Kunshan, Jiangsu province, China
Tel: +86-0512-86175000
Fax: +86-0512-88934268
www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC§15.247 (I), §1.1310 &§2.1093 –RF EXPOSURE.....	11
MEASUREMENT RESULT	12
FCC §15.203 – ANTENNA REQUIREMENT	14
APPLICABLE STANDARD	14
ANTENNA INFORMATION	14
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST RESULTS SUMMARY	16
TEST DATA	17
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST DATA	34
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	39
APPLICABLE STANDARD	39

TEST PROCEDURE	39
TEST DATA	39
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST DATA	42
FCC §15.247(d) - BAND EDGES TESTING	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST DATA	45

FINAL

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	SHANGHAI MERIT TECHNOLOGY CORP.
Tested Models	MT-203A, MT-305A
Product Type	3CH 2.4GHZ FHSS RADIO CONTROL SYSTEM
Dimension	190mm(L)×155mm(W)×95mm(H)
Power Supply	DC 6.0V from 1.5V*4cell “AA” batteries

Note: The difference between the tested model and series model was explained in the declaration letter.

**All measurement and test data in this report was gathered from production sample serial number: 20181115003.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2018-11-15)*

Objective

This test report is prepared on behalf of SHANGHAI MERIT TECHNOLOGY CORP. in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and 558074 D01 15.247 Meas Guidance v05.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405	24	2428
2	2406	25	2429
3	2407	26	2430
4	2408	27	2431
5	2409	28	2432
6	2410	29	2433
7	2411	30	2434
8	2412	31	2435
9	2413	32	2436
10	2414	33	2437
11	2415	34	2438
12	2416	35	2439
13	2417	36	2440
14	2418	37	2441
15	2419	38	2442
16	2420	39	2443
17	2421	40	2444
18	2422	41	2445
19	2423	42	2446
20	2424	43	2447
21	2425	44	2448
22	2426	45	2449
23	2427	46	2450

EUT was tested with Channel 1, 24 and 46.

EUT Exercise Software

The EUT was tested in the engineering mode; EUT can be setup for fixed channel mode and hopping mode.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Shielding Type	Length (m)	From Port	To
/	/	/	/	/

Block Diagram of Test Setup

For Radiated Emissions (Below 1GHz):

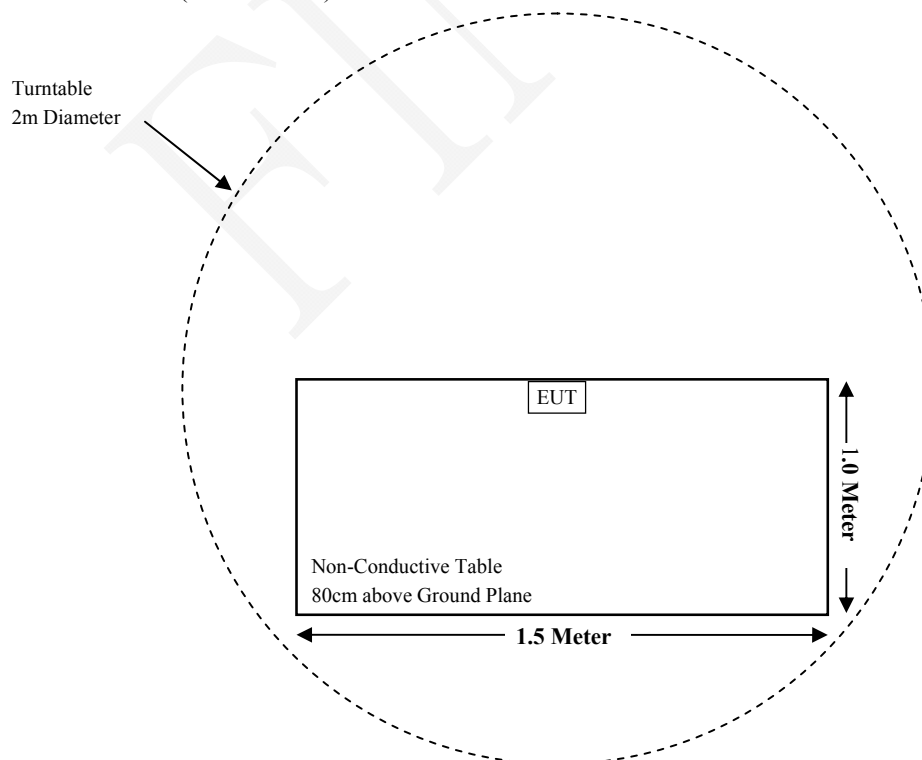

For Radiated Emissions (Above 1GHz):

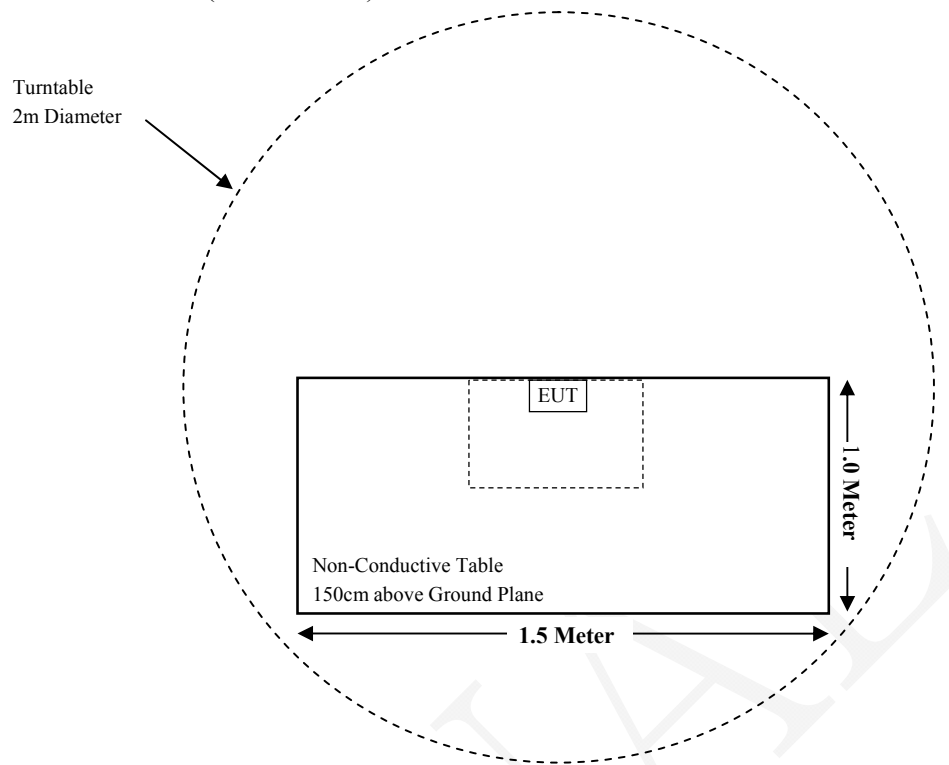

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i)§1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Not Applicable (See Note)
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

Note: The EUT is powered by batteries.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-12	2019-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
A.H.Systems, inc	Amplifier	2641-1	466	2018-09-11	2019-09-10
EM Electronics Corporation	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
MICRO-TRONICS	Notch filter	BRM50702	G024	2018-08-05	2019-08-04
Narda	Attenuator/10dB	10dB	010	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-11-12	2019-11-11
Narda	Attenuator/10dB	10dB	010	2018-08-15	2019-08-14
MERIT	RF Cable	MERITC01	C01	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (I), §1.1310 &§2.1093 –RF EXPOSURE

Applicable Standard

According to §2.1093 and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:


$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f \text{ (GHz)}}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$

1. f (GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result**For MT-203A:**

Mode	Frequency Range (MHz)	Max Tune-up Conducted Power		Calculated Distance (mm)	Calculated Value	Threshold (10-g SAR)	SAR Test Exclusion
		(dBm)	(mW)				
FHSS	2405-2450	19.50	89.13	26	5.4	7.5	Yes


Note: The EUT is a handheld device.

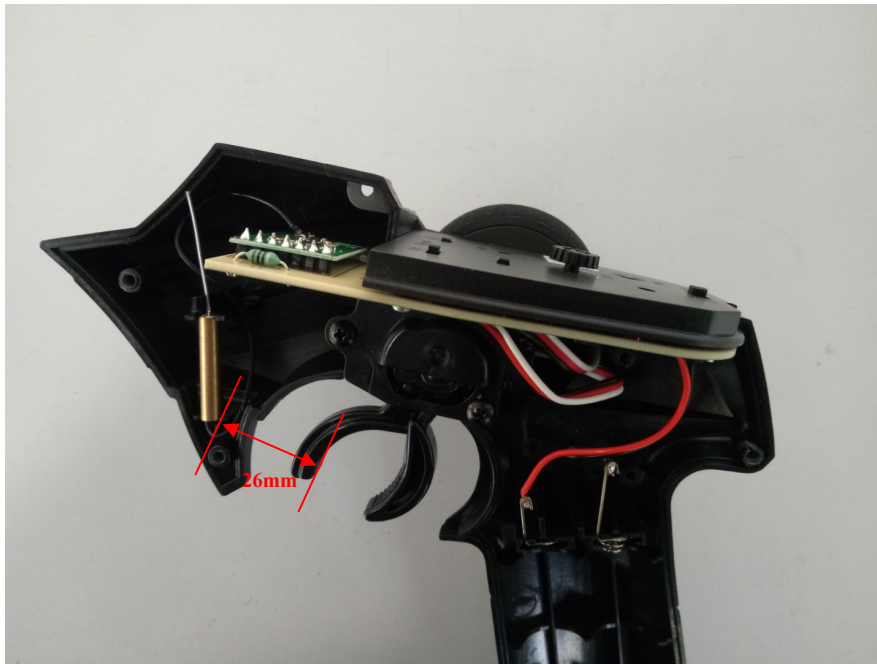

For MT-305A:

Mode	Frequency Range (MHz)	Max Tune-up Conducted Power		Calculated Distance (mm)	Calculated Value	Threshold (10-g SAR)	SAR Test Exclusion
		(dBm)	(mW)				
FHSS	2405-2450	19.50	89.13	21	6.6	7.5	Yes

Note: The EUT is a handheld device.

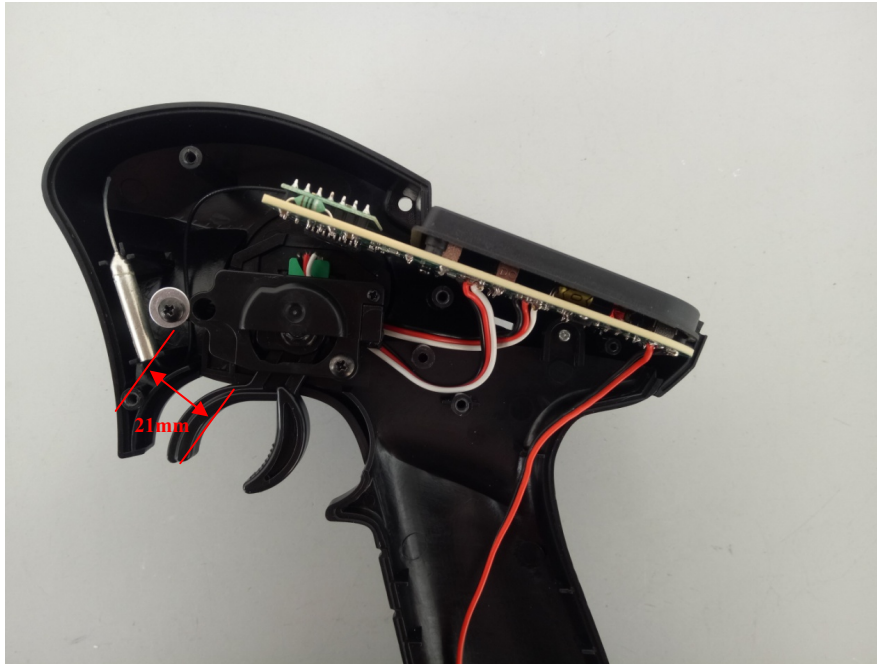

Result: No SAR test is required.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.



Antenna Information

The EUT has an internal dipole antenna and the antenna gain is 2.0dBi, which uses a unique coupling to the intentional radiator, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

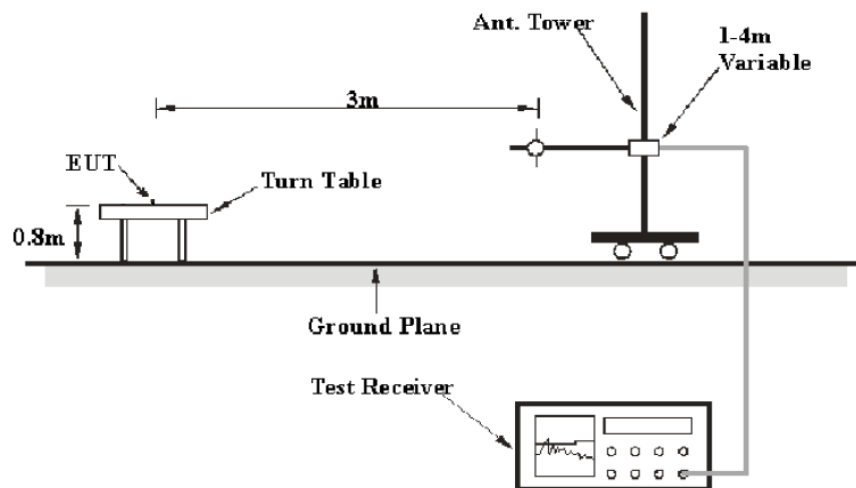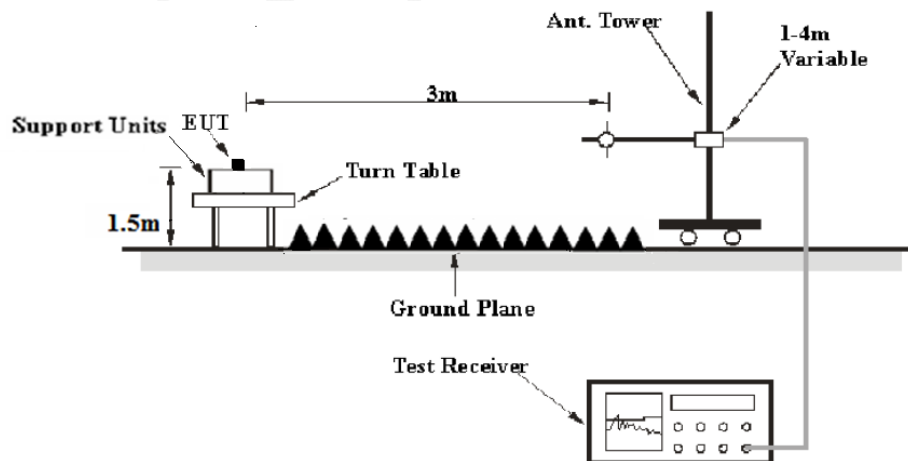EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**

Temperature:	24.2 °C-24.6 °C
Relative Humidity:	50%-52%
ATM Pressure:	101.2 kPa-101.3kPa


The testing was performed by Alisa Gao from 2018-11-23 to 2018-12-19.

EUT operation mode: Transmitting

For MT-203A:

Spurious Emission Test:**30MHz-1GHz:**

Pre-Scan with low, middle and high channels in the X,Y and Z-axes of orientation, the worst case **low channel in X-axis of orientation** was recorded

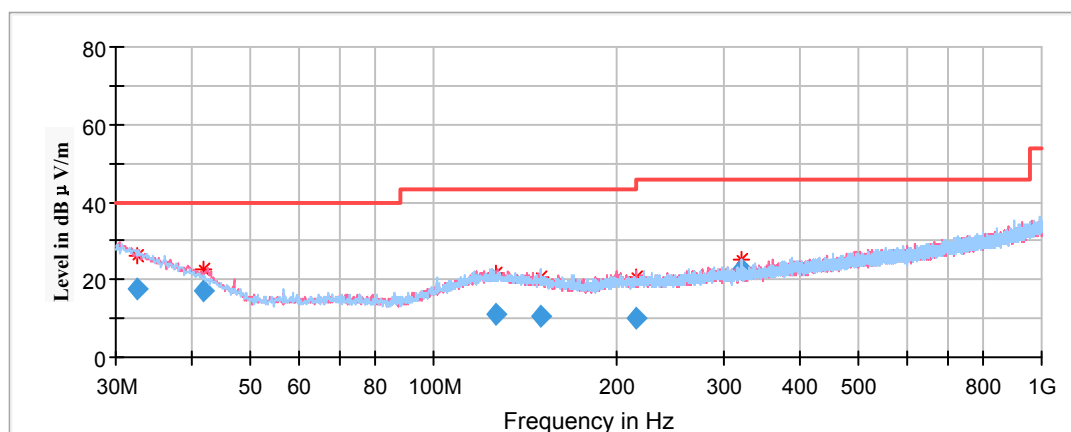

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
32.638500	17.41	199.0	H	67.0	-5.7	40.00	22.59
41.672150	17.30	101.0	V	106.0	-11.9	40.00	22.70
126.577850	11.30	198.0	V	242.0	-11.5	43.50	32.20
149.552700	10.54	101.0	H	145.0	-12.3	43.50	32.96
214.577250	10.23	101.0	V	41.0	-12.3	43.50	33.27
319.990700	22.43	198.0	V	180.0	-10.1	46.00	23.57

1GHz-18GHz:


Pre-Scan in the X,Y and Z axes of orientation, the worst case **in X-axis of orientation** was recorded

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 2405MHz


Full Spectrum

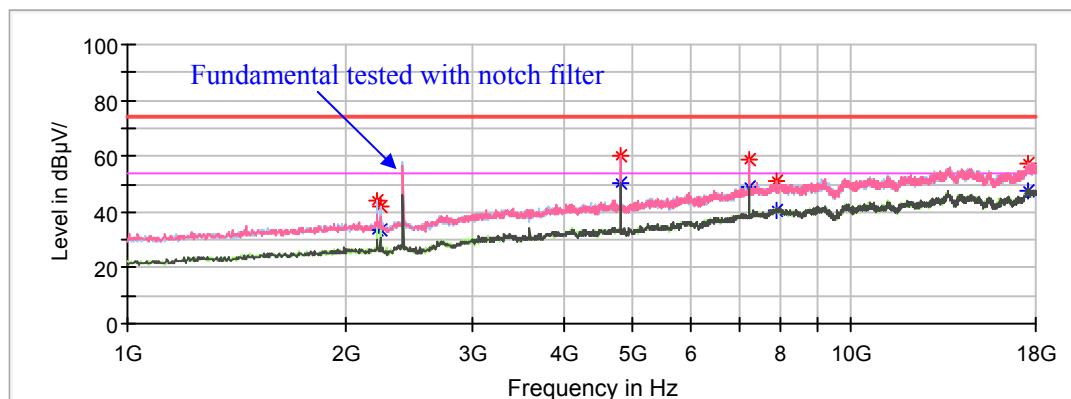

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
2210.400000	---	33.84	100.0	H	217.0	-5.2	54.00	20.16
2210.400000	43.98	---	100.0	H	217.0	-5.2	74.00	30.02
2234.200000	---	33.35	100.0	H	191.0	-5.1	54.00	20.65
2234.200000	42.08	---	100.0	H	191.0	-5.1	74.00	31.92
4810.000000	---	50.62	200.0	V	33.0	1.8	54.00	3.38
4810.000000	60.34	---	200.0	V	33.0	1.8	74.00	13.66
7215.000000	---	48.89	100.0	V	347.0	8.9	54.00	5.11
7215.000000	58.40	---	100.0	V	347.0	8.9	74.00	15.60
7878.200000	51.29	---	250.0	V	150.0	10.4	74.00	22.71
7878.200000	---	40.60	250.0	V	150.0	10.4	54.00	13.40
17534.200000	---	47.63	100.0	V	101.0	17.2	54.00	6.37
17534.200000	57.24	---	100.0	V	101.0	17.2	74.00	16.76

Middle Channel: 2428MHz


Full Spectrum

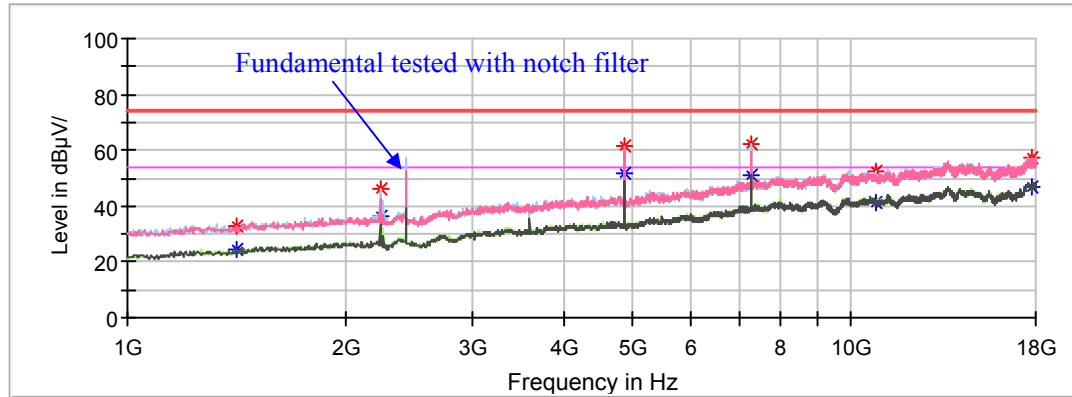

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1418.200000	---	24.15	250.0	V	66.0	-8.0	54.00	29.85
1418.200000	33.02	---	250.0	V	66.0	-8.0	74.00	40.98
2234.200000	45.84	---	100.0	H	261.0	-5.1	74.00	28.16
2234.200000	---	36.18	100.0	H	261.0	-5.1	54.00	17.82
4856.000000	---	51.40	100.0	V	122.0	1.9	54.00	2.60
4856.000000	61.63	---	100.0	V	122.0	1.9	74.00	12.37
7284.000000	---	50.85	200.0	V	191.0	9.1	54.00	3.15
7284.000000	62.17	---	200.0	V	191.0	9.1	74.00	11.83
10843.000000	---	41.19	100.0	H	102.0	13.2	54.00	12.81
10843.000000	52.19	---	100.0	H	102.0	13.2	74.00	21.81
17772.200000	---	47.01	200.0	V	83.0	17.5	54.00	6.99
17772.200000	57.36	---	200.0	V	83.0	17.5	74.00	16.64

High Channel: 2450MHz

Full Spectrum

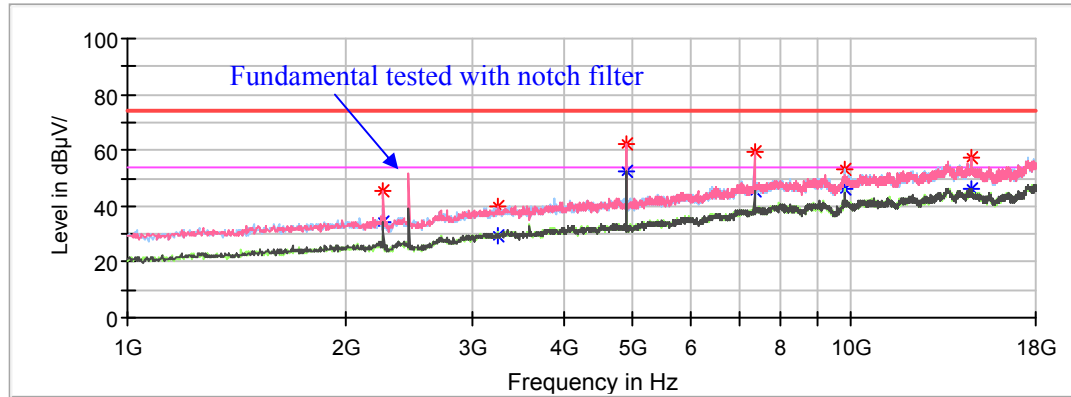

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
2254.600000	---	34.06	250.0	V	284.0	-5.0	54.00	19.94
2254.600000	45.79	---	250.0	V	284.0	-5.0	74.00	28.21
3257.600000	---	29.24	100.0	V	119.0	-1.2	54.00	24.76
3257.600000	39.92	---	100.0	V	119.0	-1.2	74.00	34.08
4900.000000	61.94	---	250.0	V	109.0	2.0	74.00	12.06
4900.000000	---	52.68	250.0	V	109.0	2.0	54.00	1.32
7350.000000	59.26	---	250.0	V	17.0	9.3	74.00	14.74
7350.000000	---	45.16	250.0	V	17.0	9.3	54.00	8.84
9799.200000	---	45.85	100.0	H	289.0	12.1	54.00	8.15
9799.200000	53.10	---	100.0	H	289.0	12.1	74.00	20.90
14702.000000	---	46.01	200.0	V	139.0	14.2	54.00	7.99
14702.000000	57.44	---	200.0	V	139.0	14.2	74.00	16.56

*Pre-Scan with low, middle and high channels in the X,Y and Z axes of orientation, the worst case **low channel in X-axis of orientation** was recorded*

RBW 1 MHz VBW 3 MHz Att 10 dB

Marker 1 [T1] 52.06 dBμV

SWT 45 ms 19.245192308 GHz

1 PK MAXH

2 AV MAXH

D1 74 dBμV

D2 1.34 dBμV


2

Marker 2 [T2] 41.33 dBμV

18.818910256 GHz

Start 18 GHz 700 MHz/ Stop 25 GHz

Vertical

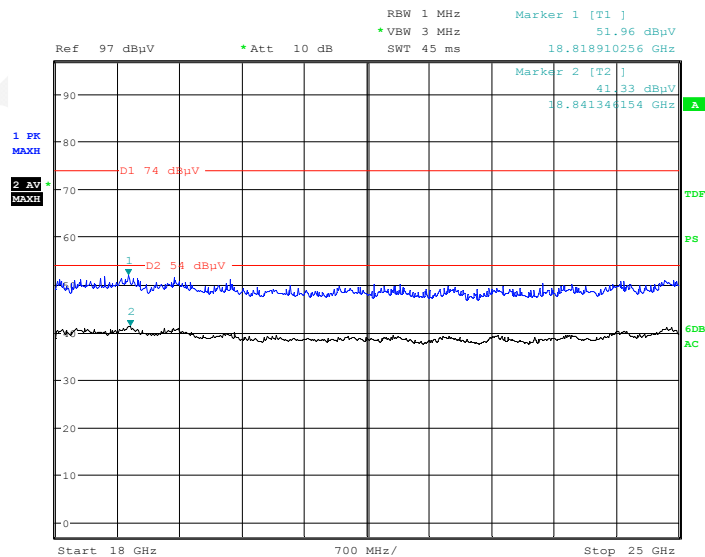

Date: 28.NOV.2018 11:20:43

Fundamental Test & Restricted Bands Emissions:

Pre-Scan in the X,Y and Z axes of orientation, the worst case in X-axis of orientation was recorded

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)


Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)

Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV /m)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2405MHz								
2405.000000	113.40	---	100.0	V	105.0	6.1	/	/
2405.000000	---	113.17	100.0	V	105.0	6.1	/	/
2405.000000	111.12	---	200.0	H	270.0	6.1	/	/
2405.000000	---	110.88	200.0	H	270.0	6.1	/	/
2390.000000	67.39	---	150.0	V	0.0	6.0	74.00	6.61
2390.000000	---	44.94	150.0	V	0.0	6.0	54.00	9.06
Middle Channel: 2428MHz								
2428.000000	112.73	---	150.0	V	53.0	6.2	/	/
2428.000000	---	112.40	150.0	V	53.0	6.2	/	/
2428.000000	110.60	---	200.0	H	320.0	6.2	/	/
2428.000000	---	110.32	200.0	H	320.0	6.2	/	/
High Channel: 2450MHz								
2450.000000	112.63	---	100.0	V	2.0	6.2	/	/
2450.000000	---	112.25	100.0	V	2.0	6.2	/	/
2450.000000	110.18	---	200.0	H	254.0	6.2	/	/
2450.000000	---	109.83	200.0	H	254.0	6.2	/	/
2483.500000	63.93	---	150.0	V	19.0	6.3	74.00	10.07
2483.500000	---	42.27	150.0	V	19.0	6.3	54.00	11.73

For MT-305A:**Spurious Emission Test:****30MHz-1GHz:**

*Pre-Scan with low, middle and high channels in the X,Y and Z-axes of orientation, the worst case **low channel in X-axis of orientation** was recorded*

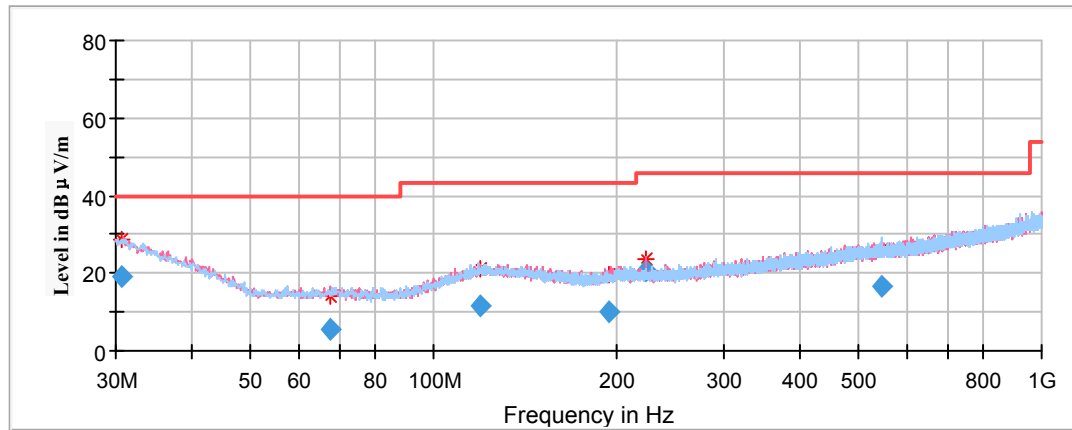

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
30.630114	19.25	101.0	V	348.0	-4.4	40.00	20.75
67.492750	5.76	199.0	V	127.0	-17.4	40.00	34.24
119.400200	11.46	101.0	H	215.0	-11.3	43.50	32.04
194.534950	9.95	199.0	V	39.0	-12.7	43.50	33.55
224.001200	20.83	101.0	V	102.0	-12.2	46.00	25.17
546.264950	16.80	101.0	H	221.0	-5.7	46.00	29.20

1GHz-18GHz:


Pre-Scan in the X,Y and Z axes of orientation, the worst case **in X-axis of orientation** was recorded

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 2405MHz


Full Spectrum

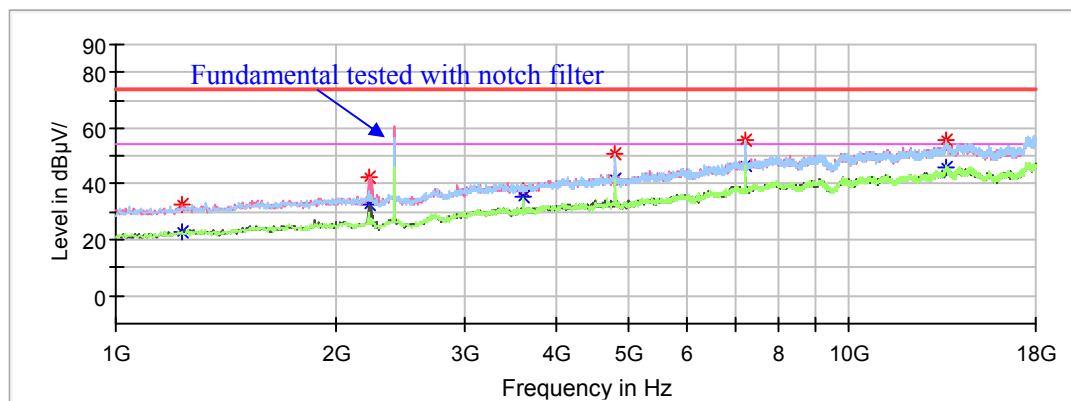

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1227.800000	---	22.74	150.0	H	32.0	-9.1	54.00	31.26
1227.800000	32.80	---	150.0	V	32.0	-9.1	74.00	41.20
2210.400000	---	32.37	100.0	V	6.0	-5.2	54.00	21.63
2210.400000	42.34	---	100.0	V	6.0	-5.2	74.00	31.66
3597.600000	---	35.44	200.0	V	109.0	-0.5	54.00	18.56
3597.600000	37.58	---	200.0	V	109.0	-0.5	74.00	36.42
4810.000000	---	41.91	100.0	V	169.0	1.8	54.00	12.09
4810.000000	51.08	---	100.0	V	169.0	1.8	74.00	22.92
7215.000000	---	46.75	200.0	V	135.0	8.9	54.00	7.25
7215.000000	55.80	---	200.0	V	135.0	8.9	74.00	18.20
13610.600000	---	45.71	100.0	H	82.0	14.7	54.00	8.29
13610.600000	55.66	---	100.0	H	82.0	14.7	74.00	18.34

Middle Channel: 2428MHz


Full Spectrum

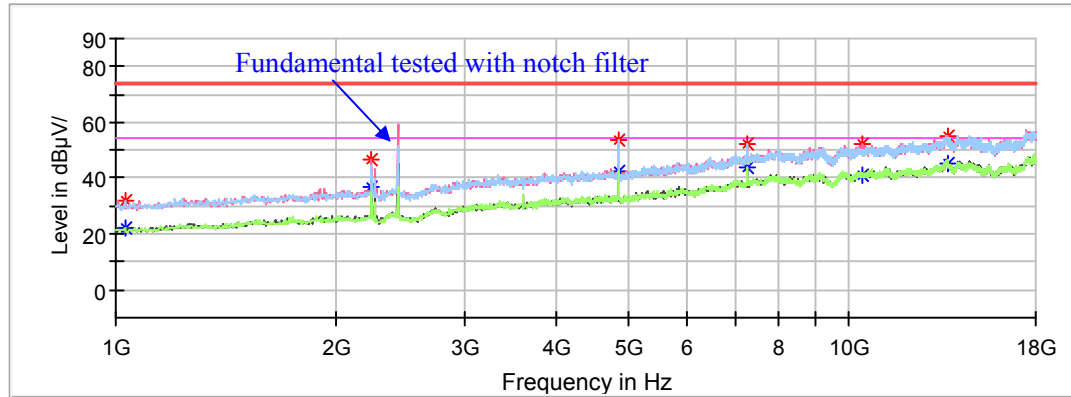

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1030.600000	---	22.21	250.0	H	87.0	-10.3	54.00	31.79
1030.600000	32.30	---	250.0	H	87.0	-10.3	74.00	41.70
2234.200000	---	36.50	150.0	V	265.0	-5.1	54.00	17.50
2234.200000	46.98	---	150.0	V	265.0	-5.1	74.00	27.02
4856.000000	---	42.73	100.0	V	298.0	1.9	54.00	11.27
4856.000000	53.63	---	100.0	V	298.0	1.9	74.00	20.37
7284.000000	---	44.19	200.0	V	66.0	9.1	54.00	9.81
7284.000000	52.37	---	200.0	V	66.0	9.1	74.00	21.63
10448.600000	---	41.31	150.0	V	319.0	12.7	54.00	12.69
10448.600000	51.93	---	150.0	V	319.0	12.7	74.00	22.07
13648.000000	---	45.58	250.0	V	199.0	14.7	54.00	8.42
13648.000000	55.14	---	250.0	V	199.0	14.7	74.00	18.86

High Channel: 2450MHz

Full Spectrum

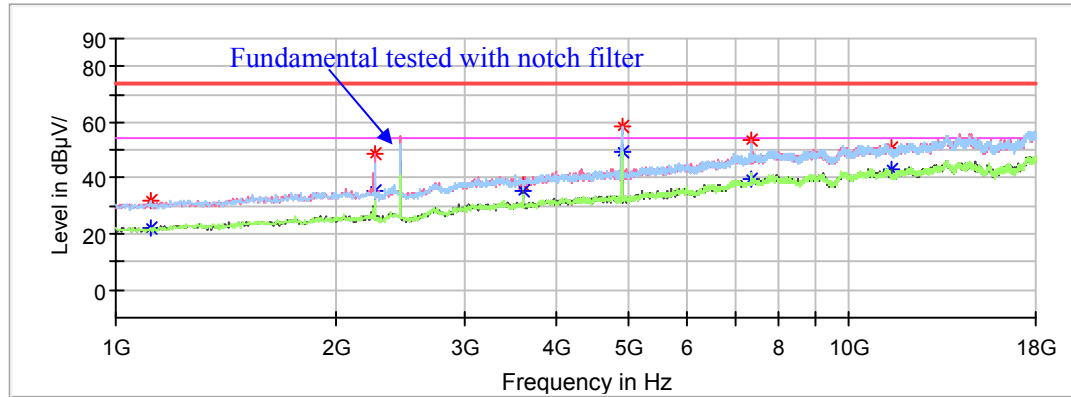


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1115.600000	32.01	---	200.0	H	93.0	-9.8	74.00	41.99
1115.600000	---	21.98	200.0	H	93.0	-9.8	54.00	32.02
2254.600000	48.74	---	100.0	V	209.0	-5.0	74.00	25.26
2254.600000	---	35.69	100.0	V	209.0	-5.0	54.00	18.31
3597.600000	---	35.60	250.0	V	52.0	-0.5	54.00	18.40
3597.600000	37.30	---	250.0	V	52.0	-0.5	74.00	36.70
4900.000000	58.29	---	200.0	V	232.0	2.0	74.00	15.71
4900.000000	---	49.66	200.0	V	232.0	2.0	54.00	4.34
7350.000000	53.94	---	100.0	V	185.0	9.3	74.00	20.06
7350.000000	---	39.58	100.0	V	185.0	9.3	54.00	14.42
11407.400000	50.60	---	250.0	V	315.0	13.0	74.00	23.40
11407.400000	---	43.07	250.0	V	315.0	13.0	54.00	10.93

18GHz-25GHz:


Pre-Scan with low, middle and high channels in the X,Y and Z axes of orientation, the worst case **low channel in X-axis of orientation** was recorded

Horizontal

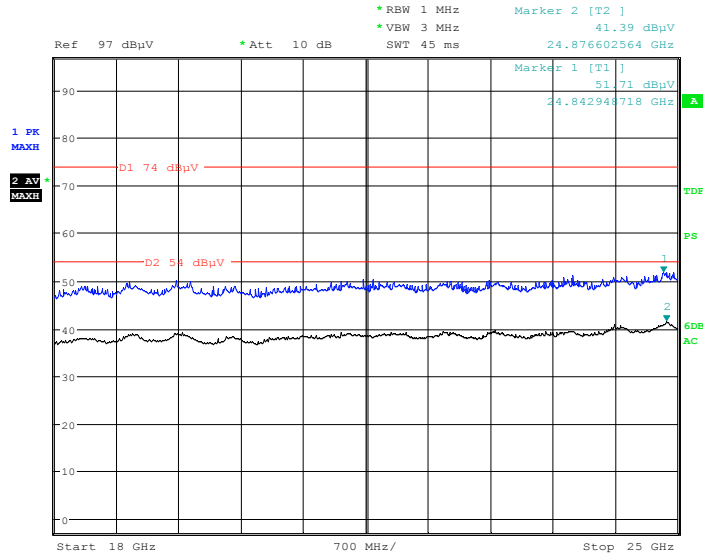

Date: 19,DEC,2018 16:25:44

Vertical

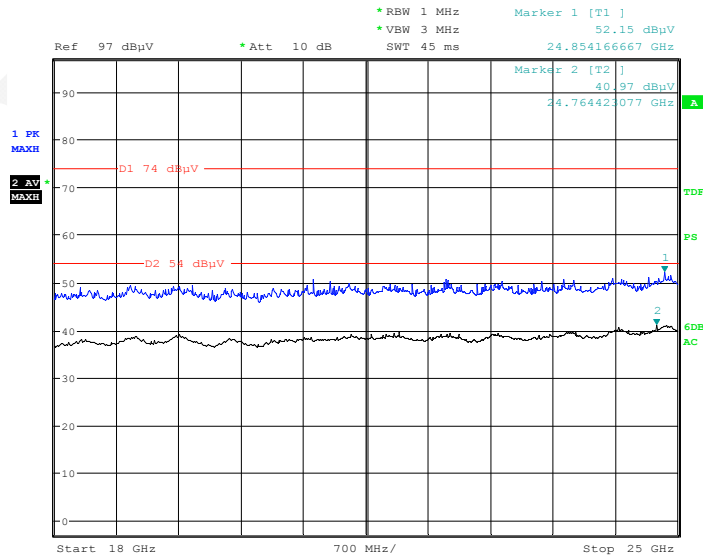

Date: 19,DEC,2018 16:45:39



Fundamental Test & Restricted Bands Emissions:

Pre-Scan in the X,Y and Z axes of orientation, the worst case in X-axis of orientation was recorded


Note:

- Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV /m)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2405MHz								
2405.000000	112.91	---	150.0	V	62.0	6.1	/	/
2405.000000	---	112.76	150.0	V	62.0	6.1	/	/
2405.000000	110.51	---	150.0	H	216.0	6.1	/	/
2405.000000	---	110.34	150.0	H	216.0	6.1	/	/
2390.000000	63.05	---	150.0	V	0.0	6.0	74.00	10.95
2390.000000	---	48.73	150.0	V	0.0	6.0	54.00	5.27
Middle Channel: 2428MHz								
2428.000000	113.23	---	150.0	V	233.0	6.2	/	/
2428.000000	---	113.14	150.0	V	233.0	6.2	/	/
2428.000000	111.10	---	200.0	H	294.0	6.2	/	/
2428.000000	---	111.00	200.0	H	294.0	6.2	/	/
High Channel: 2450MHz								
2450.000000	112.88	---	100.0	V	274.0	6.2	/	/
2450.000000	---	112.49	100.0	V	274.0	6.2	/	/
2450.000000	110.64	---	200.0	H	53.0	6.2	/	/
2450.000000	---	110.06	200.0	H	53.0	6.2	/	/
2483.500000	64.52	---	150.0	V	19.0	6.3	74.00	9.48
2483.500000	---	42.79	150.0	V	19.0	6.3	54.00	11.21

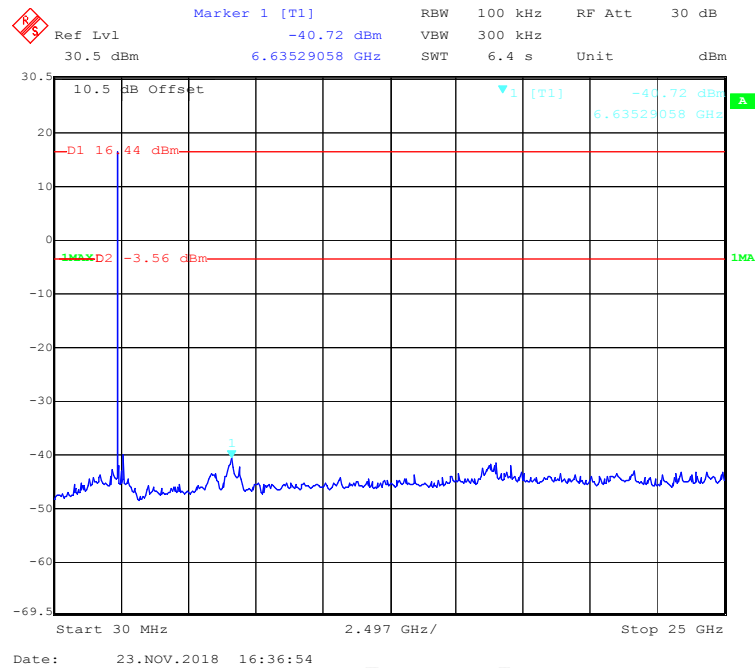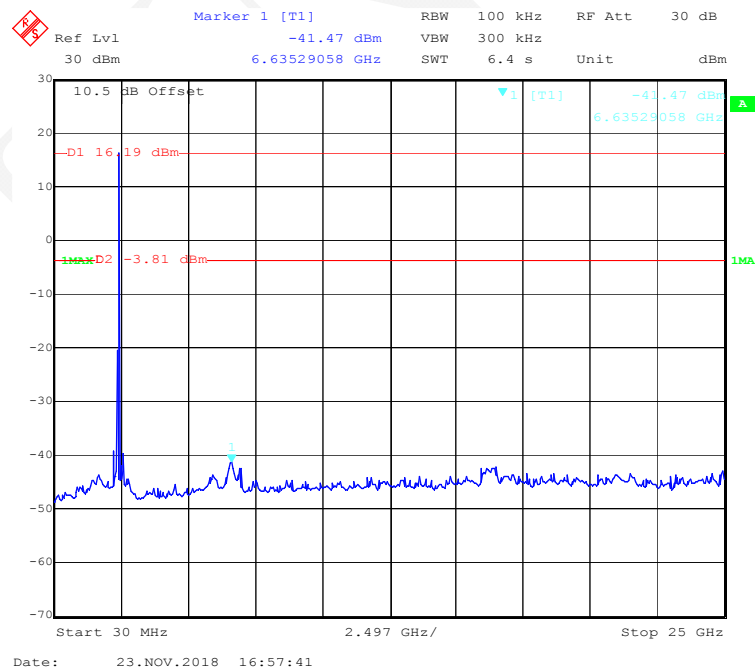Conducted Spurious Emissions at Antenna Port:**Low Channel****Middle Channel**

High Channel

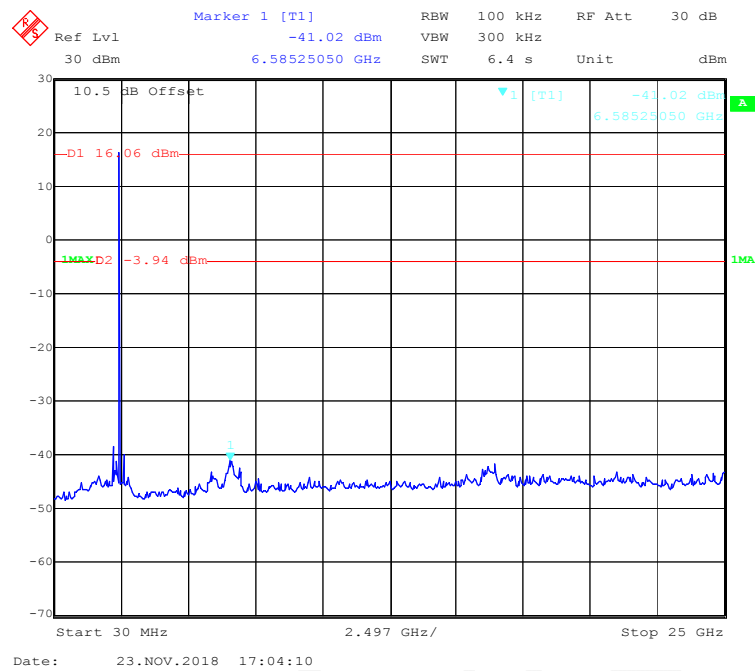

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	24.2 °C
Relative Humidity:	50%
ATM Pressure:	101.2 kPa

The testing was performed by Alisa Gao on 2018-11-23.


EUT operation mode: Hopping

Test Result: Compliance.


Modulation	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
GFSK	Low	2405	1.010	0.259	Pass
	Adjacent	2406			
	Middle	2428	1.004	0.262	Pass
	Adjacent	2429			
	Adjacent	2449	1.004	0.262	Pass
	High	2450			

The limit = 20dB Bandwidth*2/3


Low Channel

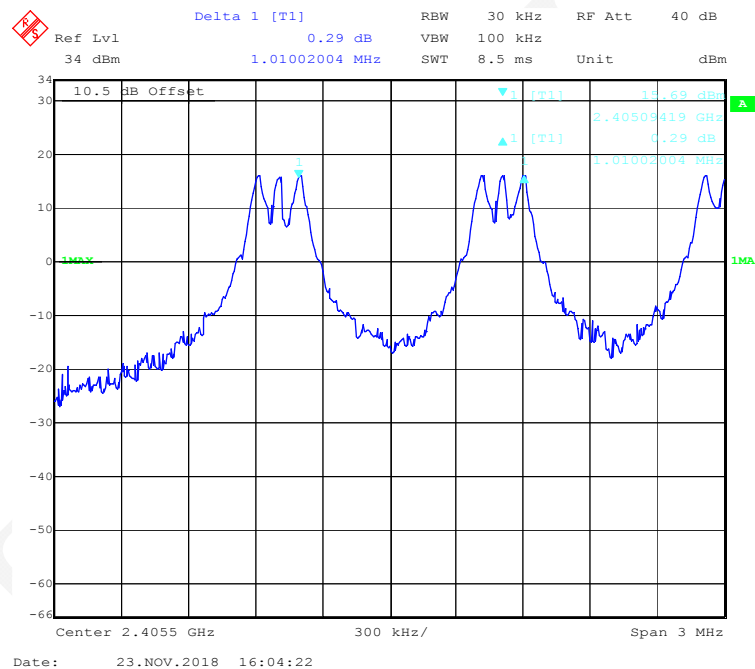

Middle Channel

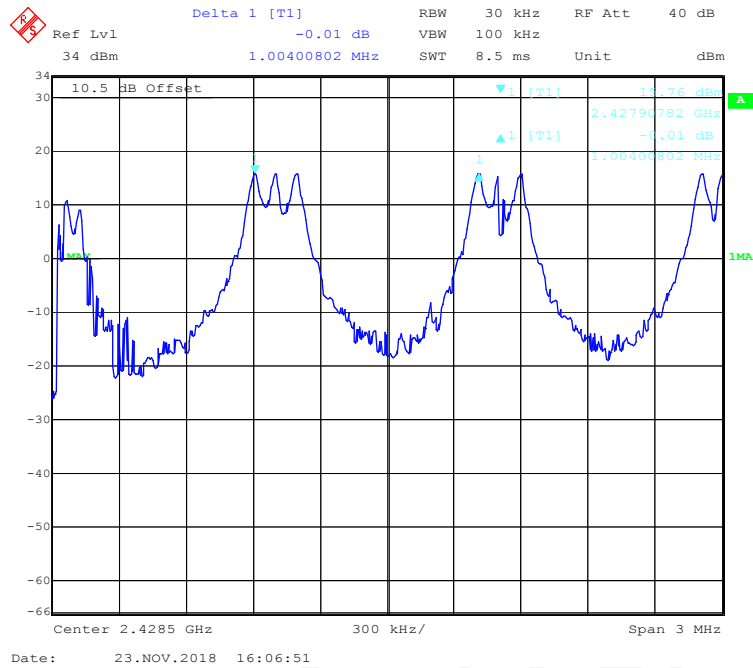

High Channel

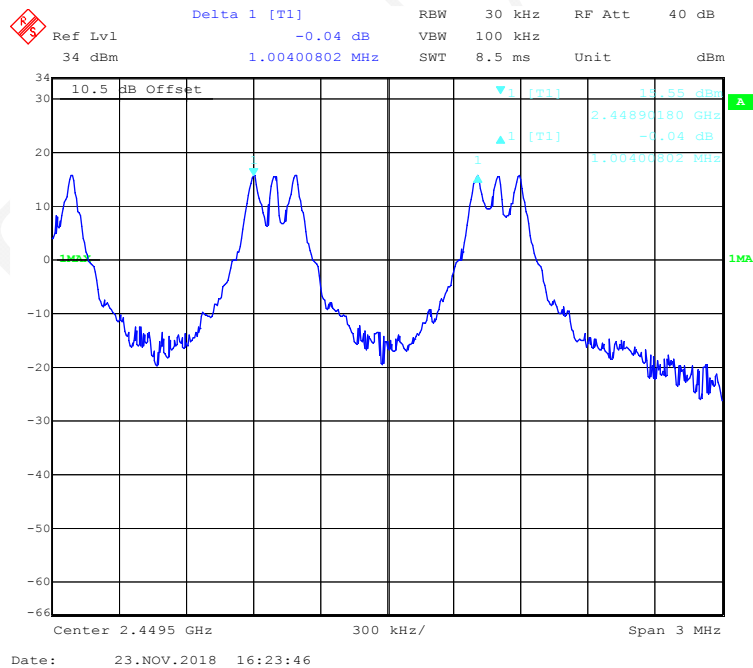

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**

Temperature:	24.2 °C
Relative Humidity:	50%
ATM Pressure:	101.2 kPa


The testing was performed by Alisa Gao on 2018-11-23.

EUT operation mode: Transmitting

Test Result: Compliance.


Modulation	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
GFSK	Low	2405	0.389
	Middle	2428	0.393
	High	2450	0.393

Low Channel

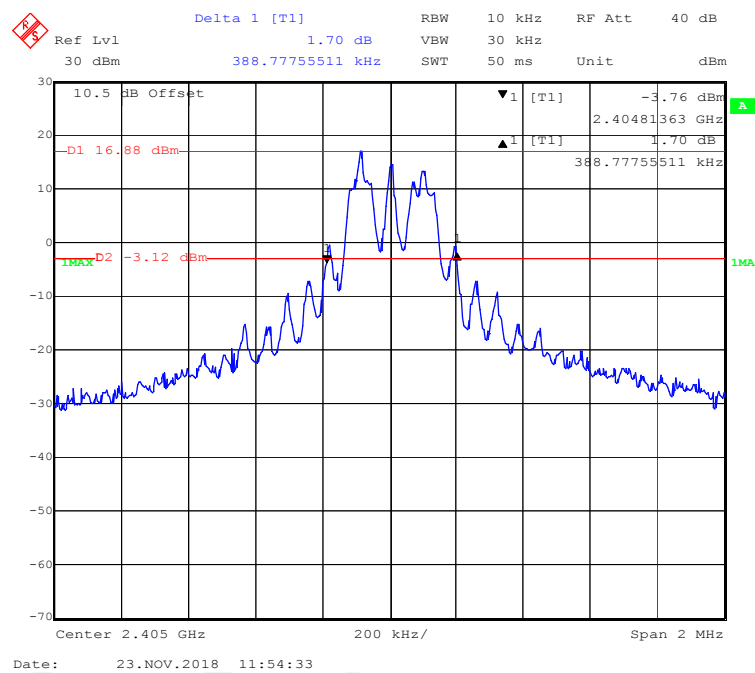


Date: 23.NOV.2018 11:54:33

Middle Channel

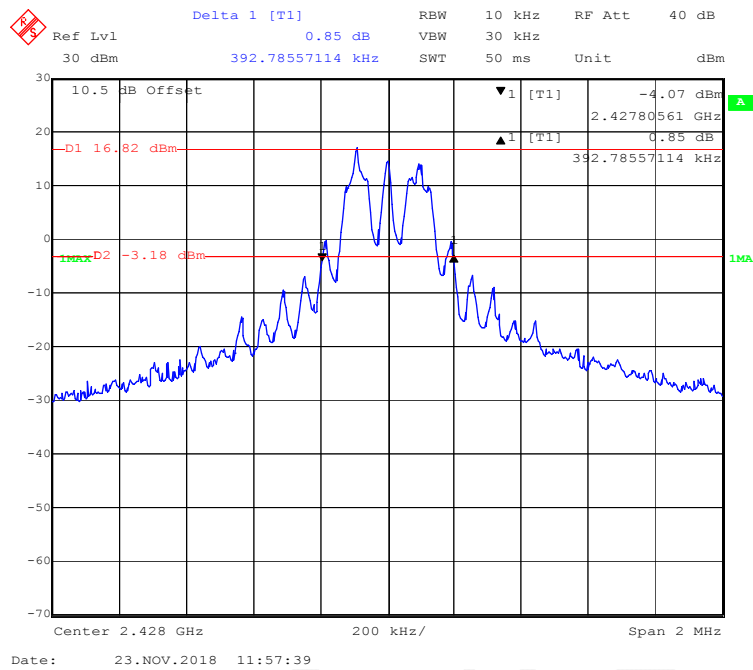

High Channel

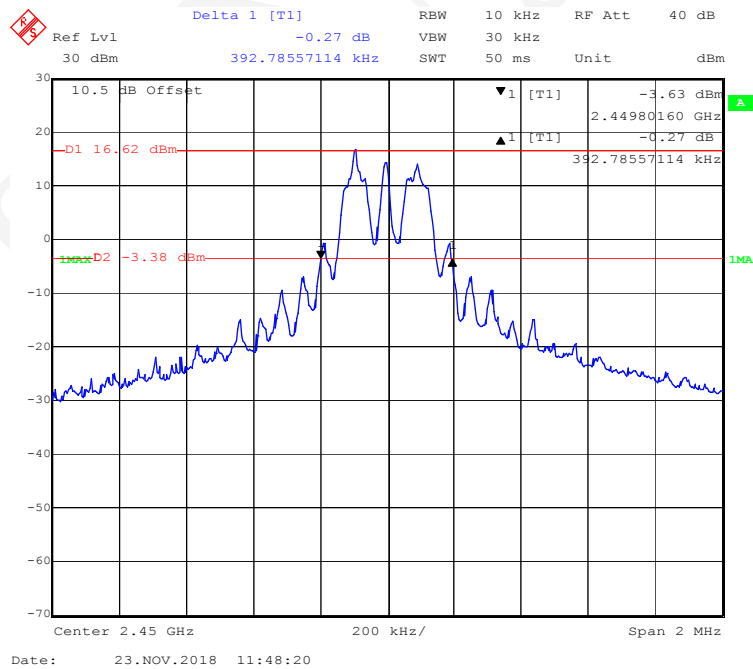

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	24.2 °C
Relative Humidity:	50%
ATM Pressure:	101.2 kPa


The testing was performed by Alisa Gao on 2018-11-23.

EUT operation mode: Hopping

Test Result: Compliance.

Modulation	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
GFSK	2400-2483.5	46	≥15

Number of Hopping Channels

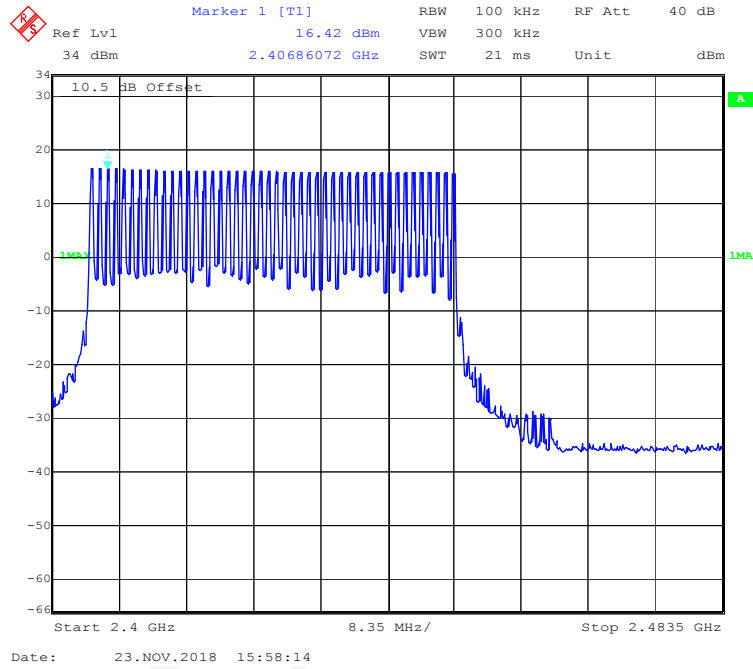

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Test Data

Environmental Conditions

Temperature:	24.2 °C
Relative Humidity:	50%
ATM Pressure:	101.2 kPa


The testing was performed by Alisa Gao on 2018-11-23.

EUT operation mode: Hopping

Test Result: Compliance.


Modulation	Channel	Pulse Width (ms)	Pulse Number	Dwell Time (s)	Limit (s)	Result
GFSK	Middle	1.623	14*3	0.068	≤0.4	Pass
Note: Dwell time = Pulse time*N Observed time = 0.4s* hopping number= 0.4s*46=18.4s						

Number of Pulses

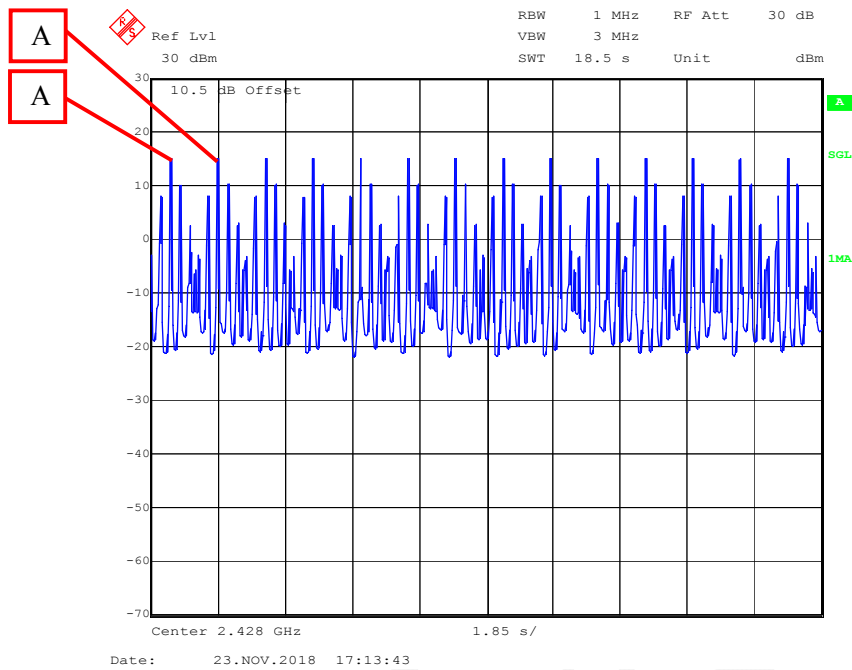


Note: A means one pulse train.

Zoom in A

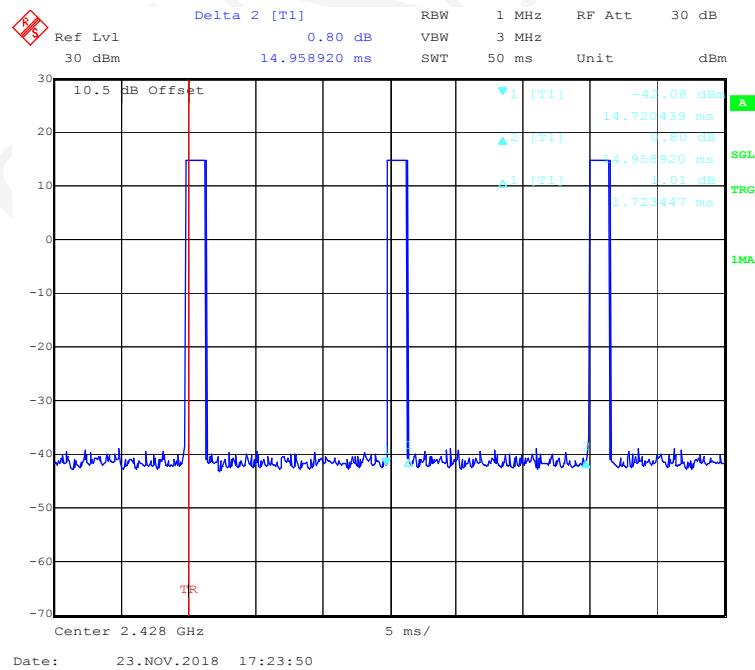

Single Pulse

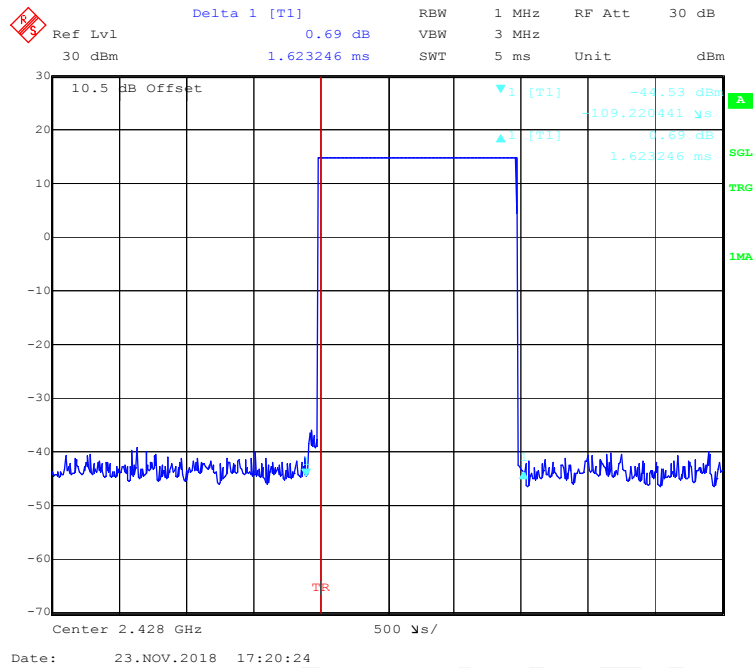

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	24.6 °C
Relative Humidity:	50%
ATM Pressure:	101.2kPa


The testing was performed by Alisa Gao on 2018-11-23.

EUT operation mode: Transmitting


Test Result: Compliance.

Modulation	Channel	Frequency (MHz)	Output Power		Limit (mW)
			(dBm)	(mW)	
GFSK	Low	2405	19.07	80.72	125
	Middle	2428	18.82	76.21	125
	High	2450	18.49	70.63	125


Low Channel

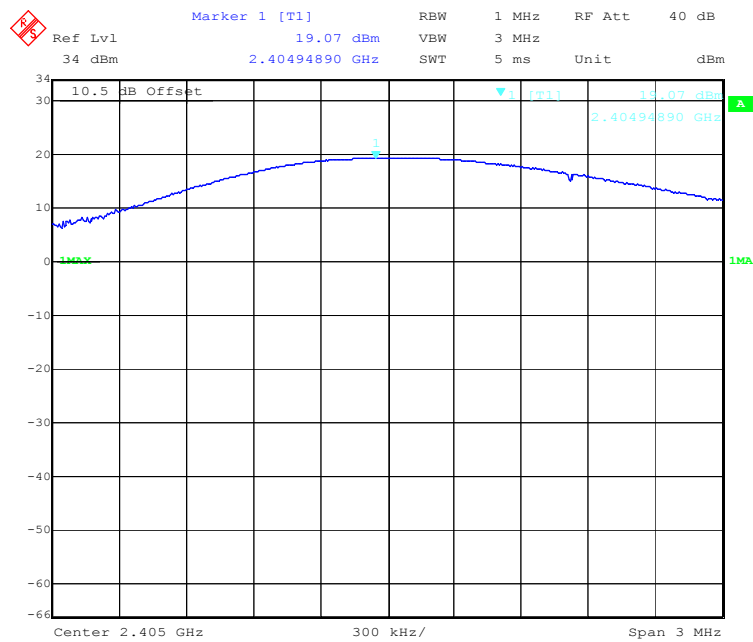

Middle Channel

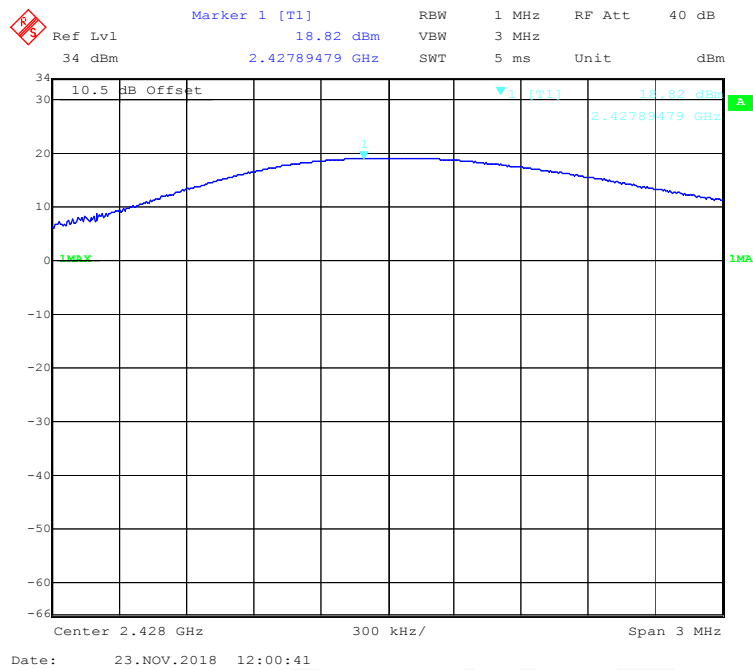

High Channel

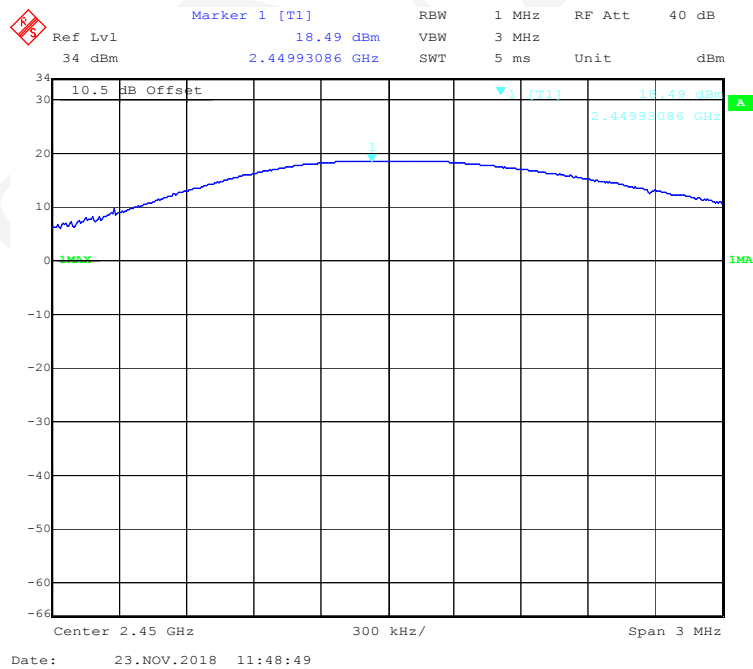

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	24.6 °C
Relative Humidity:	50%
ATM Pressure:	101.2kPa


The testing was performed by Alisa Gao on 2018-11-23.

EUT operation mode: Transmitting&Hopping


Test Result: Compliance.

Band Edge


Left Side-Transmitting

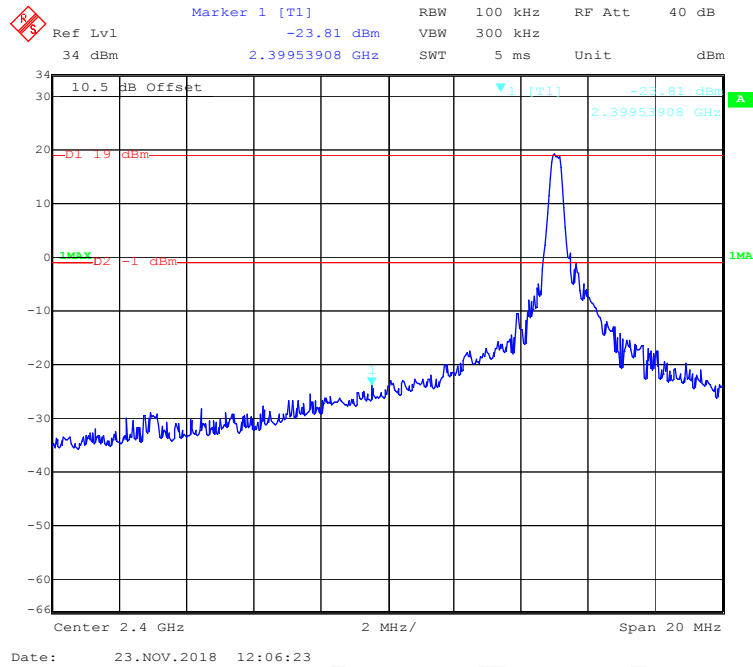


Right Side-Transmitting

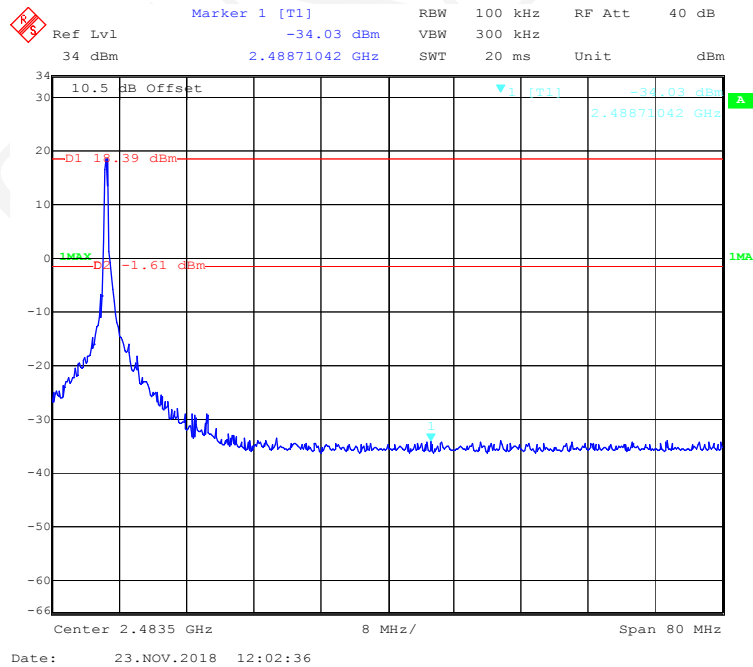

Left Side-Hopping

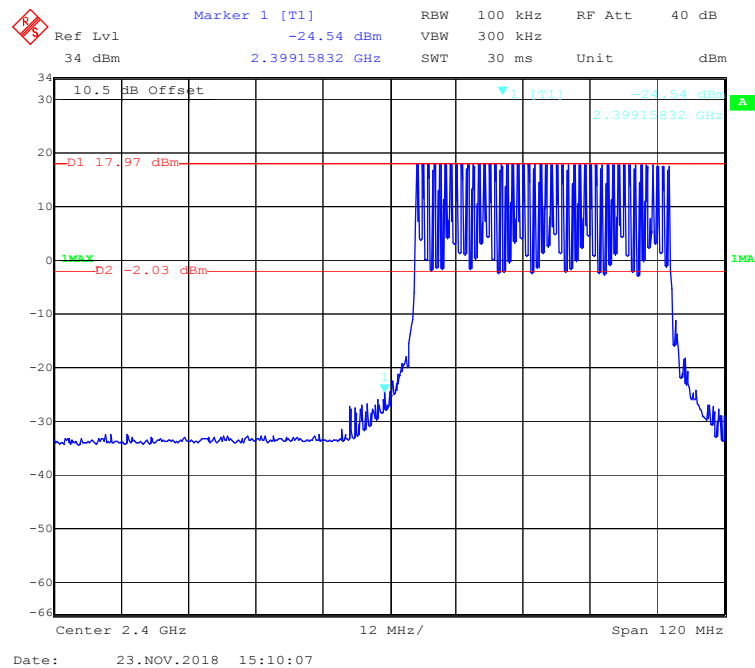

Right Side-Hopping

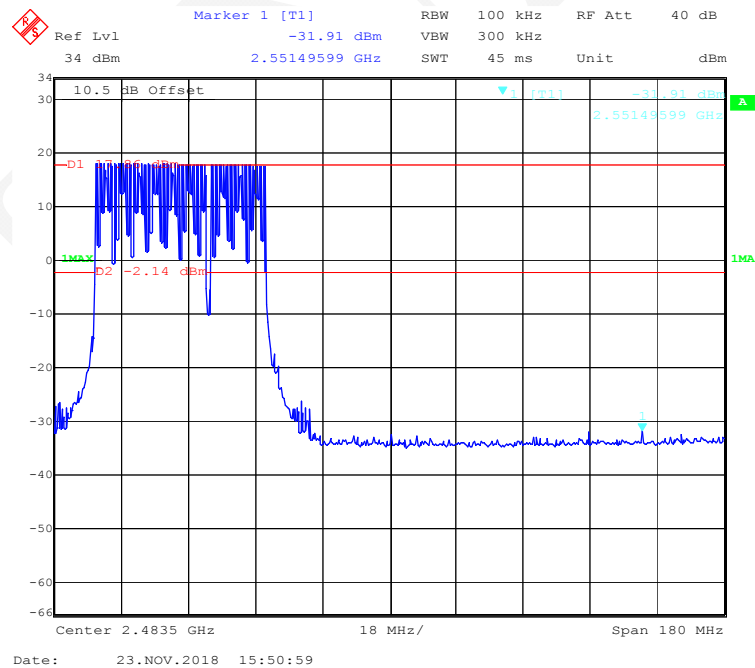

***** END OF REPORT *****