



FCC Part 15, Subpart C, Section 15.247

Test Report

On

**Wireless 8 Channel Analog Input Sensor Node
FCC ID: XJQMSLINK0004**

Customer Name: Lord Corporation

Customer P.O.: 670694

Date of Report: January 6, 2017

Test Report No.: R-6140N-1

Test Start Date: September 30, 2016

Test Finish Date: October 13, 2016

Test Technician: M. Seamans

Report Approved By: T. Hannemann

Report Prepared By: J. Ramsey

Our letters, procedures and reports are for the exclusive use of the customer to whom they are addressed and their communication or the use of the name of Retlif Testing Laboratories must receive our prior written approval. Our letters, procedures and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The letters, procedures and reports and the name of Retlif Testing Laboratories or insignia are not to be used under any circumstances in advertising to the general public. This test report shall not be reproduced, except in full, without the written approval of Retlif Testing Laboratories.

Technical Information

Report Number:	R-6140N-1
Customer:	Lord Corporation
Address:	459 Hurricane Lane, Suite 102 Williston, VT 05495
Manufacturer:	Lord Corporation
Manufacturer Address:	459 Hurricane Lane, Suite 102 Williston, VT 05495
Test Sample:	Wireless 8 Channel Analog Input Sensor Node
Model Number:	V-Link 200
Serial Numbers:	6312-2000-19, 6312-2000-20, 6312-2000-22
FCC ID:	XJQMSLINK0004
Type:	Digital Transmission – Direct Sequence Spread Spectrum Transmitter
Power Requirements:	3.6 VDC via four (4) Lithium Ion batteries*
Frequency of Operation:	2402.0 to 2480.0 MHz
Equipment Class:	DTS
Antenna Type:	Internal Ceramic Chip Antenna, 3dBi Gain or External ¼ Wave Antenna with RP SMA Connector, 2.5 dBi Gain
Equipment Use:	Wireless Data Node

*NOTE: The EUT had 10VDC supplied to the external DC Power Input, however for the EUT to properly operate the internal batteries were required to be installed.

Test Specification:

FCC Rules and Regulations Part 15, Subpart C, Section 15.247

Test Procedure:

ANSI C63.4: 2014

ANSI C63.10: 2013

Test Facility:

Retlif Testing Laboratories
101 New Boston Road
Goffstown, NH 03045

FCC Registered Test Site Number: 90899



Retlif Testing Laboratories

Report No. R-6140N-1

Table 1 – Tests Performed

FCC Part 15, Subpart C	Test Method
15.247(b)(3)	Power Output
15.247(a)(2)	Occupied Bandwidth
15.247(d)	Antenna Terminal Out of Band/Band Edge Conducted Emissions (30 MHz – 25 GHz)
15.247(d)	Spurious Emissions, 30 MHz to 10 GHz
15.247(e)	Power Density

Table 2 – Support Equipment

Description	Manufacturer	Model Number	Serial Number
Laptop	Gateway	E56R52U	NXY1UAA045348501F63400
Wireless Basestation	Lord Microstrain	WSDA-Base-104	6307-1040-57209

EUT Operation:

The EUT was transmitting a modulating signal at 2.405 GHz Channel 11, 2.442 GHz Channel 18 and 2.480 GHz Channel 26.


Retlif Testing Laboratories

Report No. R-6140N-1

Certification and Signatures

We certify that this report is a true representation of the results obtained from the tests of the equipment stated. We further certify that the measurements shown in this report were made in accordance with the procedures indicated and vouch for the qualifications of all Retlif Testing Laboratories personnel taking them.



Scott Wentworth
Branch Manager
NVLAP Approved Signatory



Todd Hannemann
EMC Test Engineer
iNARTE Certified Technician ATL-0255-T

Non-Warranty Provision

The testing services have been performed, findings obtained and reports prepared in accordance with generally accepted laboratory principles and practices. This warranty is in lieu of all others, either expressed or implied.

Non-Endorsement

This test report contains only findings and results arrived at after employing the specific test procedures and standards listed herein. It is not intended to constitute a recommendation, endorsement or certification of the product or material tested. This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.



Retlif Testing Laboratories

Report No. R-6140N-1

Revision History

Revisions to this document are listed below; the latest revised document supersedes all previous issues of this document:

Revision	Date	Pages Affected
-	January 6, 2017	Original Release



Retlif Testing Laboratories

Report No. R-6140N-1

Requirements and Test Results

FCC Section 15.247 (a)(2) – Bandwidth

For systems using digital modulation techniques operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725 – 5850 MHz bands the minimum 6 dB bandwidth shall be at least 500 kHz.

- **Results:** The minimum 6dB bandwidth measured while transmitting was 1.55 MHz. The device was found to meet the requirement of 15.247 (a)(2).

FCC Section 15.247 (b)(3) - Power Output

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g.: alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

- **Results:** The maximum measured peak conducted output power when transmitting was 58.75 mW. The maximum antenna gain of the internal antenna is 3.0 dB, the maximum gain of the external antenna is 2.5 dB. The device was found to meet the power output requirements of 15.247 (b)(3) including de facto EIRP.



Retlif Testing Laboratories

Report No. R-6140N-1

Requirements and Test Results (con't)

FCC Section 15.247(d) – Unwanted Emissions

Antenna Terminal Out of Band/Band Edge Conducted Emissions

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under Paragraph (b)(3) of Section 15.247, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

- **Results:** All measured out of band/band edge conducted emissions were below the specified limits and the device was found to meet the requirements of 15.247 (d).

FCC Section 15.247(d) – Unwanted Emissions

Radiated Spurious Emissions/Restricted Bands/Band Edge

Emissions which fall into restricted bands, as defined in 15.205(a) must comply with the radiated emissions limits specified in 15.209(a) and shown below in Table 1. Emissions emanating from the EUT cabinet and cables must also comply with the radiated emissions limits. Radiated emissions measurements were also performed at the band edges to ensure band edge compliance.

Table 3 - Radiated Emission Limits

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 to 88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960	500	3

- **Results:**
All spurious emissions were measured and found to be in compliance with the limits specified in 15.209(a). Band edge emissions were also found to be in compliance with the limits specified in 15.209(a).



Retlif Testing Laboratories

Report No. R-6140N-1

Requirements and Test Results (con't)

FCC Section 15.247(e) – Power Spectral Density

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

- **Results:** The power spectral density conducted from the intentional radiator to the antenna was not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density was determined in accordance with Section 15.247(b)(3), herein.



Retlif Testing Laboratories

Report No. R-6140N-1

Requirements and Test Results (con't)

Field Strength Calculation/Conversion:

The maximized field strength of the emission was obtained as follows:

$$CR = MR + CF$$

Where:

CR = Corrected Reading in dB μ V/m

MR = Uncorrected Meter Reading in dB μ V

CF = Correction Factor in dB (Antenna Factor, Pre-amp + Cable Loss)

Example:

$$MR = 15.35 \text{ dB}\mu\text{V}$$

$$CF = 16.85 \text{ dB}$$

$$CR = 15.35 \text{ dB}\mu\text{V} + 16.85 = 32.2 \text{ dB}\mu\text{V/m}$$

dB μ V/M is converted to μ V/M for comparison to the specified limit using the formula:

$$\text{invLog dB}\mu\text{V/M}/20$$

$$32.2 \text{ dB}\mu\text{V/m} = 40.74 \text{ }\mu\text{V/m}$$

RF Power Conversion:

Power readings in dBm may be converted to mW using the formula:

$$\text{InvLog dBm}/10$$

$$\text{Example: } 20\text{dBm} = 100\text{mW}$$



Retlif Testing Laboratories

Report No. R-6140N-1

FCC Section 15.247 (i)

RF Exposure Limits

Spread Spectrum Transmitters operating under 15.247 must be operated in a manner that ensures the public is not exposed to RF energy levels in excess of the commission's guidelines. Based on the transmitter power and maximum antenna gain (see calculation below) the minimum separation distance was calculated to determine the distance for acceptable MPE power density levels to meet both the Occupational/Controlled Exposure and the General Population/Uncontrolled Exposure requirements of FCC Part 1.1310. The calculation below uses the more stringent General Population MPE Limits.

$$S = \frac{PG}{4\pi D^2}$$

D = Minimum Separation Distance in cm

S = Max allowed Power Density in mW/cm²

Per 1.1310 For the Frequency of 2400 MHz S = 1 mW/cm²

Power = Max Power Input to Antenna = 58.75 mW

Gain = Max Power Gain of Antenna = 3.0 dBi = 1.995 numeric

$$1.0 \text{ mW/cm}^2 = \frac{58.75 \times 1.995}{4 \times (3.14) \times D^2} = \frac{117.20}{12.56 \times D^2}$$

$$D^2 = \frac{117.20}{12.56 \times 1.0}$$

$$D = \sqrt{9.33} = 3.05 \text{ cm}$$

The calculation above uses the highest power level for the device in this band and the worst case (highest) antenna gain (internal antenna).



Retlif Testing Laboratories

Report No. R-6140N-1

Equipment List

FCC Section 15.247(a)(2) Occupied Bandwidth

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5039	FLUKE	ATTENUATOR, COAXIAL	20 dB, DC - 12.4 GHz	Y9305	12/2/2015	12/31/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/29/2014	10/31/2016
5107	AGILENT / HP	GENERATOR, SIGNAL	100 kHz - 20 GHz	N5183A	2/2/2016	2/28/2017
5110	BK PRECISION	POWER SUPPLY, DC	30V / 3A	1630	Calibrate Before Use	

FCC Section 15.247 (d) Band Edge Conducted Emissions, 30 MHz to 25 GHz

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5039	FLUKE	ATTENUATOR, COAXIAL	20 dB, DC - 12.4 GHz	Y9305	12/2/2015	12/31/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/29/2014	10/31/2016
5107	AGILENT / HP	GENERATOR, SIGNAL	100 kHz - 20 GHz	N5183A	2/2/2016	2/28/2017
5110	BK PRECISION	POWER SUPPLY, DC	30V / 3A	1630	Calibrate Before Use	

FCC Section 15.247(b)(3) Power Output

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5039	FLUKE	ATTENUATOR, COAXIAL	20 dB, DC - 12.4 GHz	Y9305	12/2/2015	12/31/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/29/2014	10/31/2016
5107	AGILENT / HP	GENERATOR, SIGNAL	100 kHz - 20 GHz	N5183A	2/2/2016	2/28/2017
5110	BK PRECISION	POWER SUPPLY, DC	30V / 3A	1630	Calibrate Before Use	



Retlif Testing Laboratories

Report No. R-6140N-1

FCC Section 15.247 (d)
Spurious Radiated Emissions, 30 MHz to 25 GHz

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
1232	AGILENT / HP	PRE-AMPLIFIER	1 - 26.5 GHz	8449B	6/16/2016	6/30/2017
3427B	ETS / EMCO	ANTENNA, BICONICAL	20 - 200 MHz	3104	2/5/2016	8/31/2017
3430	MCS	ANTENNA, HORN	18 - 26.5 GHz	K-5039	No Calibration Required	
4029B	RETLIF	OPEN AREA TEST SITE, ATTENUATION	3 / 10 Meters	RNH	4/13/2016	4/30/2018
4984G	MICROLAB / FXR	ANTENNA, HIGH GAIN HORN	12.4 - 18 GHz	Y638A	No Calibration Required	
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/29/2014	10/31/2016
5179B	MICRO-COAX	CABLE, COAXIAL	10 kHz - 18 GHz	UFB311A-1-036050U50U	10/7/2016	10/31/2017
5179D	MICRO-COAX	CABLE, COAXIAL	10 kHz - 18 GHz	UFB311A-1-240050U50U	10/7/2016	10/31/2017
5195	ETS / EMCO	ANTENNA, DOUBLE RIDGED GUIDE	1 - 18 GHz	3117	12/30/2015	6/30/2017
7034	ETS / EMCO	ANTENNA, LOG PERIODIC	200 MHz - 1 GHz	3146	3/16/2015	10/31/2016

FCC Section 15.247(e)
Power Density

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5039	FLUKE	ATTENUATOR, COAXIAL	20 dB, DC - 12.4 GHz	Y9305	12/2/2015	12/31/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/29/2014	10/31/2016
5107	AGILENT / HP	GENERATOR, SIGNAL	100 kHz - 20 GHz	N5183A	2/2/2016	2/28/2017
5110	BK PRECISION	POWER SUPPLY, DC	30V / 3A	1630	Calibrate Before Use	



Retlif Testing Laboratories

Report No. R-6140N-1

Test Photographs Occupied Bandwidth



Test Setup



Retlif Testing Laboratories

Report No. R-6140N-1

**FCC Section 15.247(a)(2)
Occupied Bandwidth
Test Data**




Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES


Test Method:	6dB Bandwidth		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.405 GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)		
Technician	M. Seamans	Date	September 30 th , 2016
Climatic Conditions	Temp: 21.8 °C Relative Humidity: 44.2 %		
Notes	Occupied Bandwidth: 1.57 MHz		

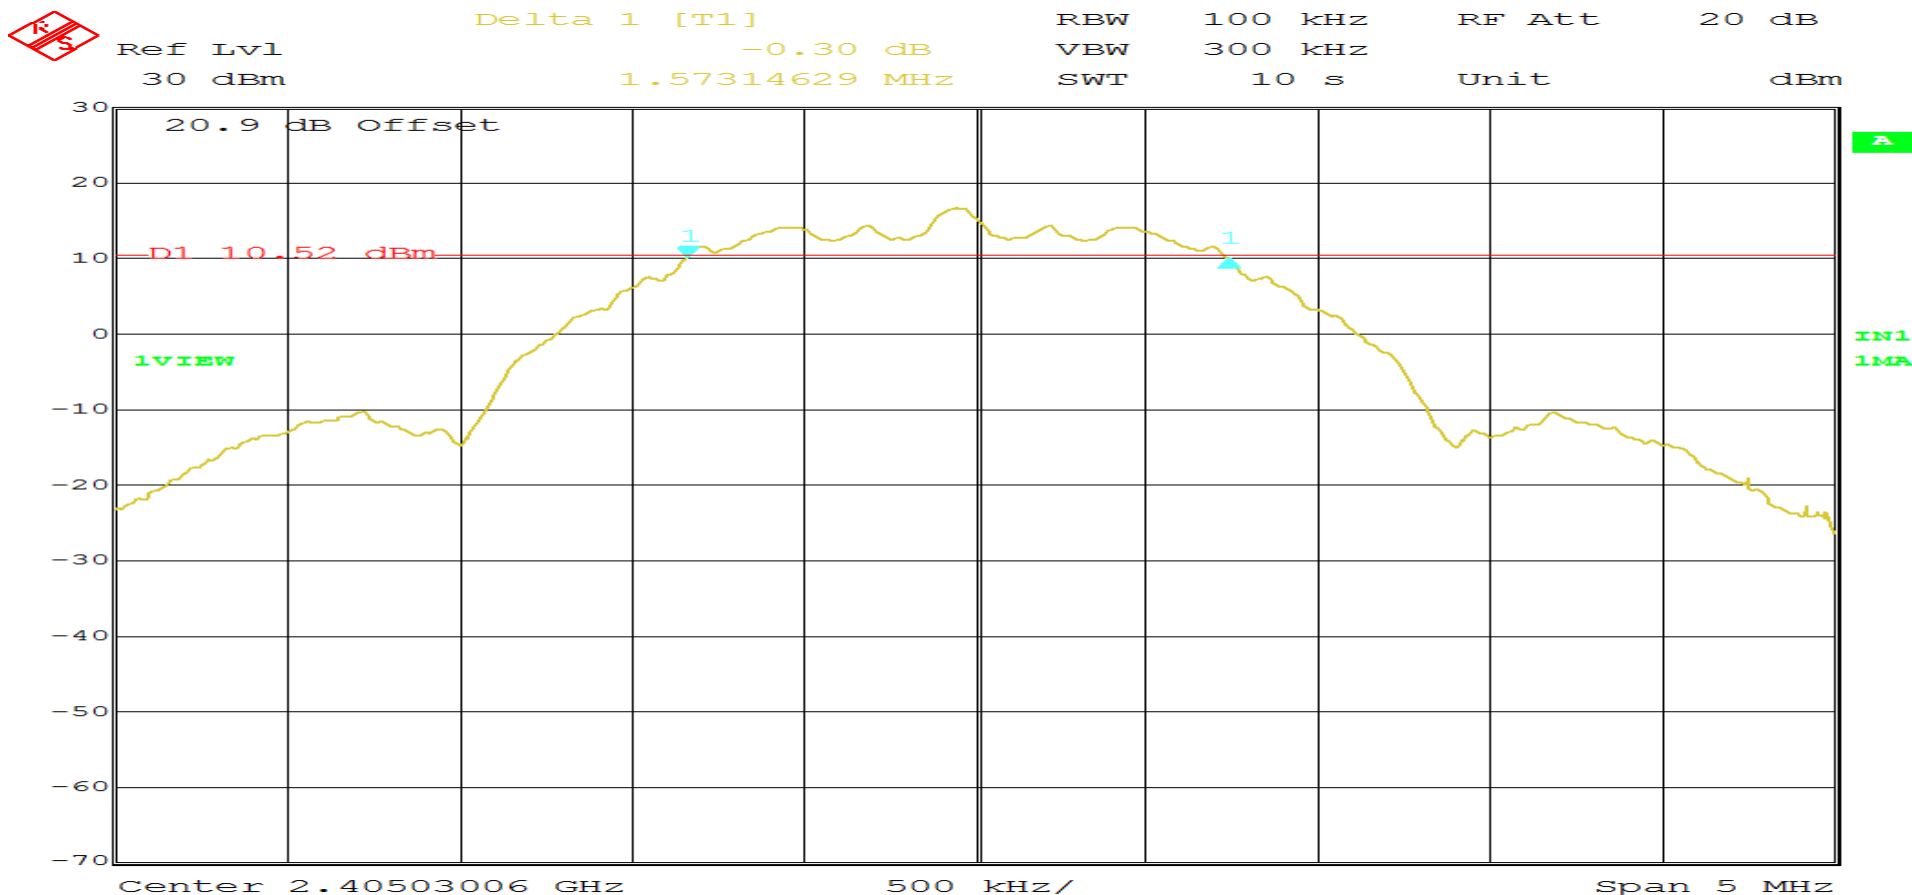

Date: 1.JAN.1997 01:22:28
 Page 1 of 3

RETLIF TESTING LABORATORIES


Test Method:	6dB Bandwidth		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.440 GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)		
Technician	M. Seamans	Date	September 30 th , 2016
Climatic Conditions	Temp: 21.8 °C Relative Humidity: 44.2 %		
Notes	Occupied Bandwidth: 1.56 MHz		

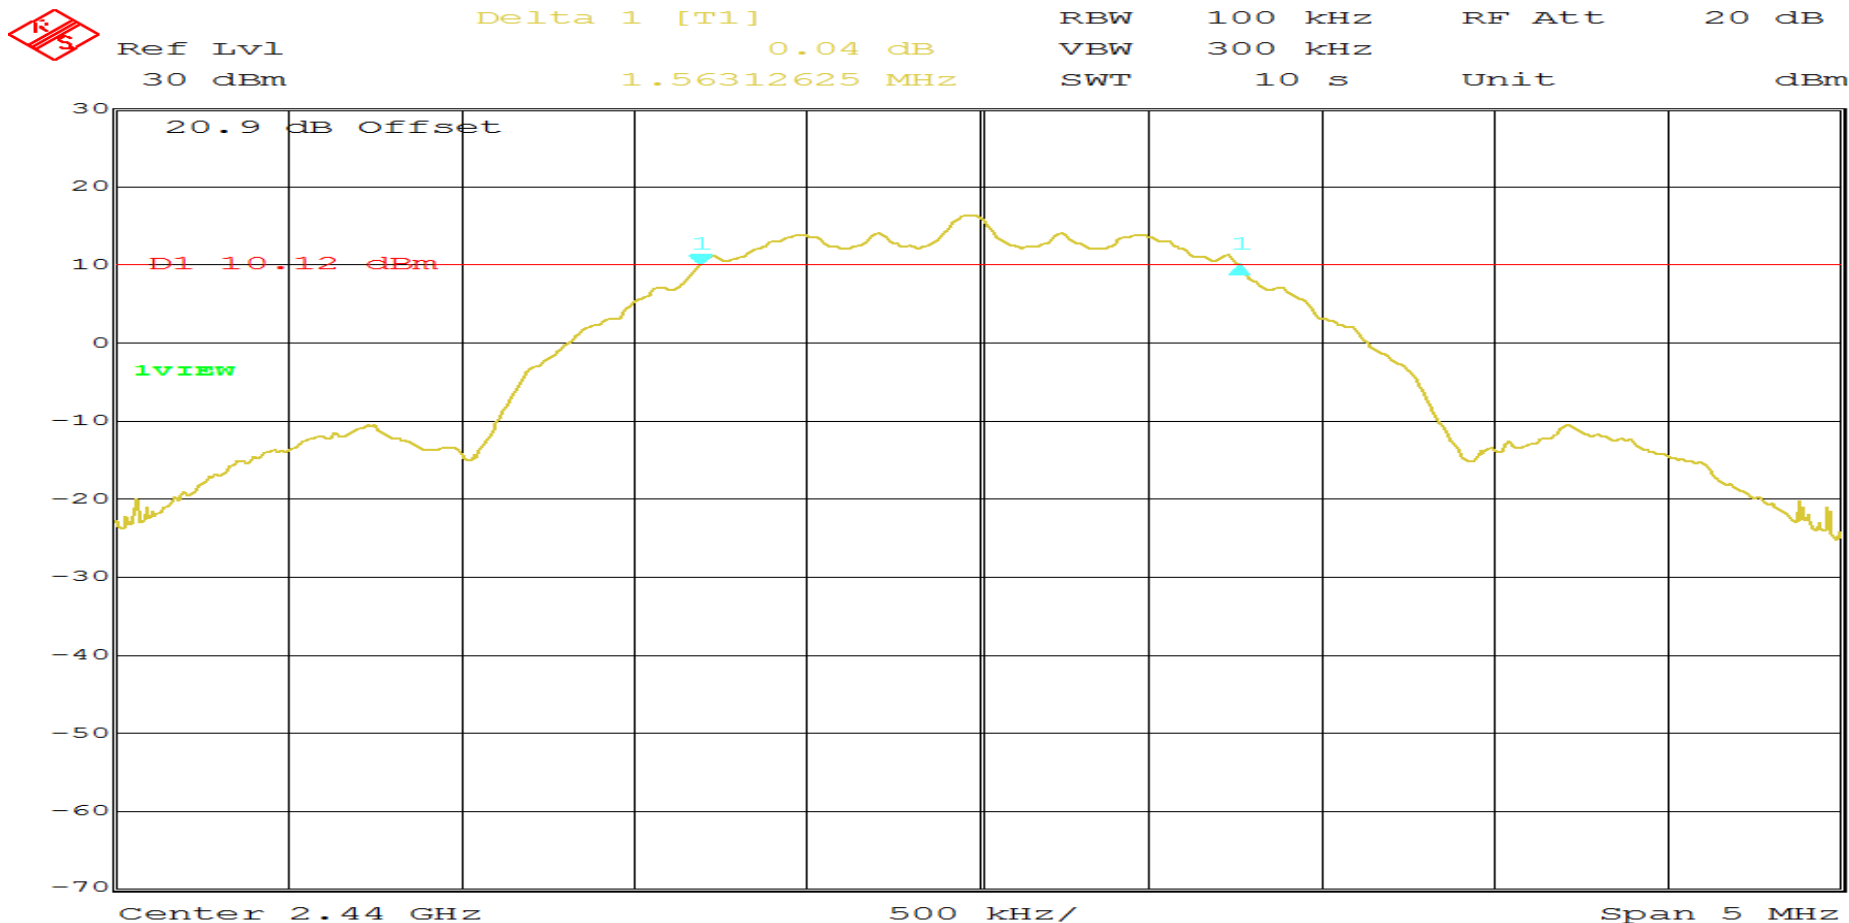

Date: 1.JAN.1997 01:43:25
Page 2 of 3

RETLIF TESTING LABORATORIES

Test Method:	6dB Bandwidth		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.480GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)		
Technician	M. Seamans	Date	September 30 th , 2016
Climatic Conditions	Temp: 21.8 °C Relative Humidity: 44.2 %		
Notes	Occupied Bandwidth: 1.55 MHz		

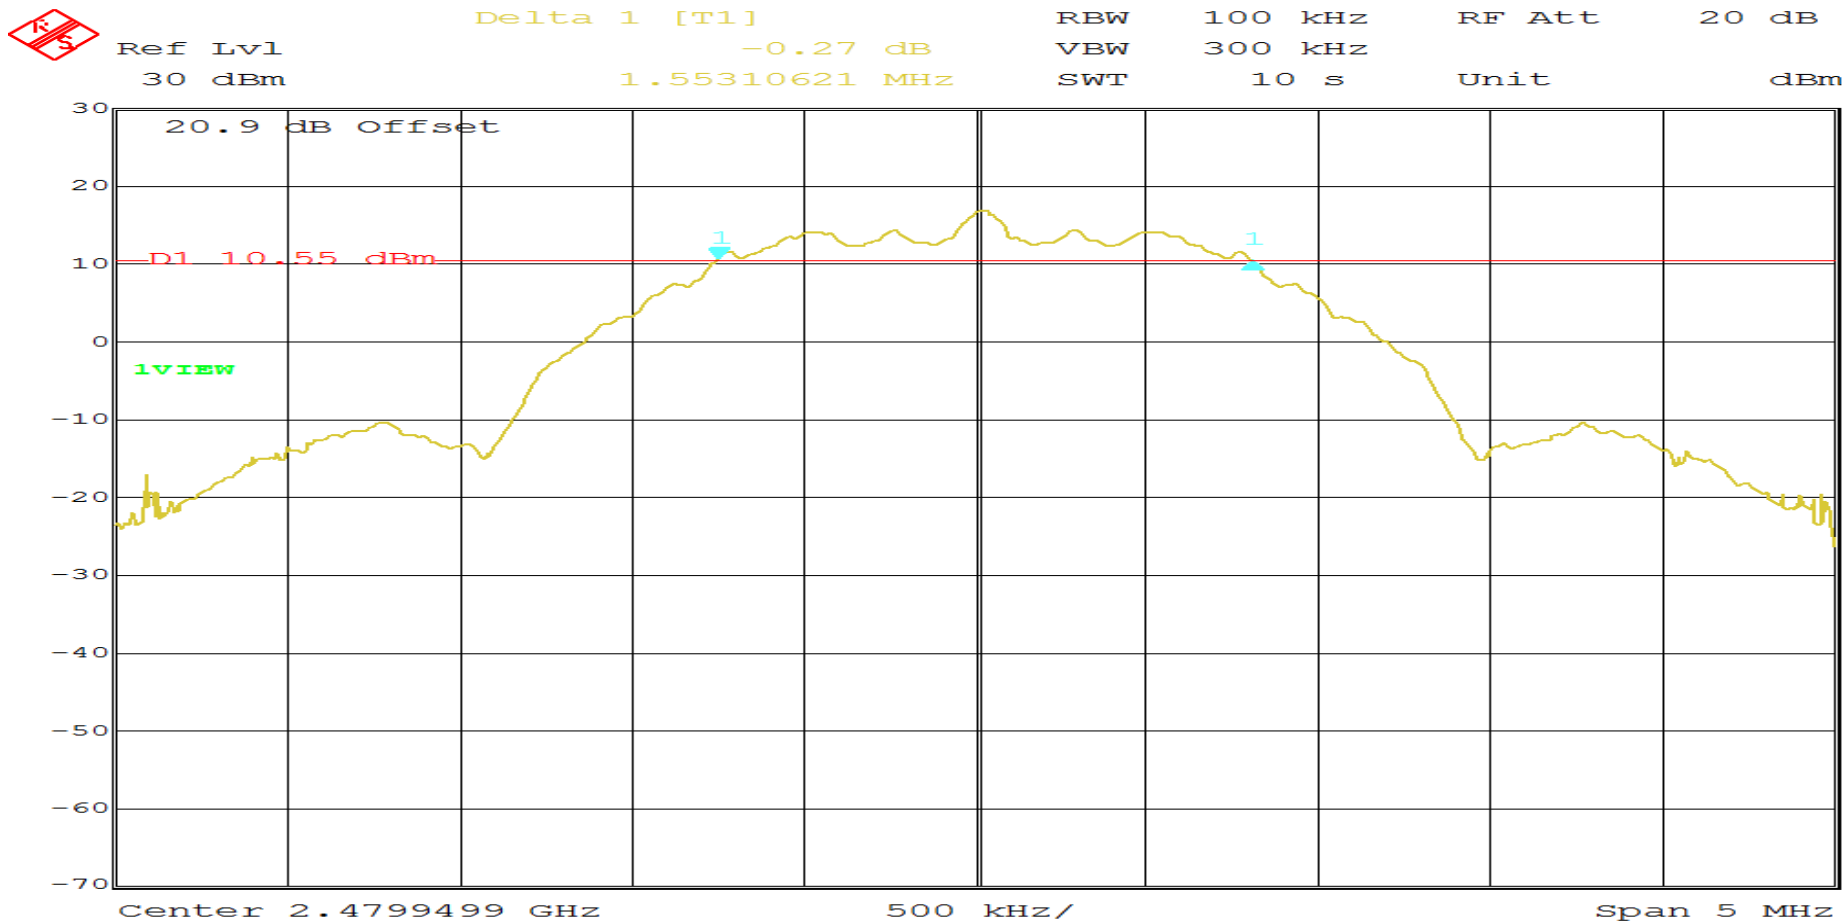

Date: 1.JAN.1997 01:55:04
Page 3 of 3

Test Photographs Power Output



Test Setup, External Antenna



Retlif Testing Laboratories

Report No. R-6140N-1

**FCC Section 15.247 (b)(3)
Power Output
Test Data**




Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES


Test Method:	Conducted Peak Power Output		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.405 GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (b)(3)		
Technician	M. Seamans	Date	September 30 th , 2016
Climatic Conditions	Temp: 21.8 °C Relative Humidity: 44.2 %		
Notes	Peak Power Output: 17.69 dBm		

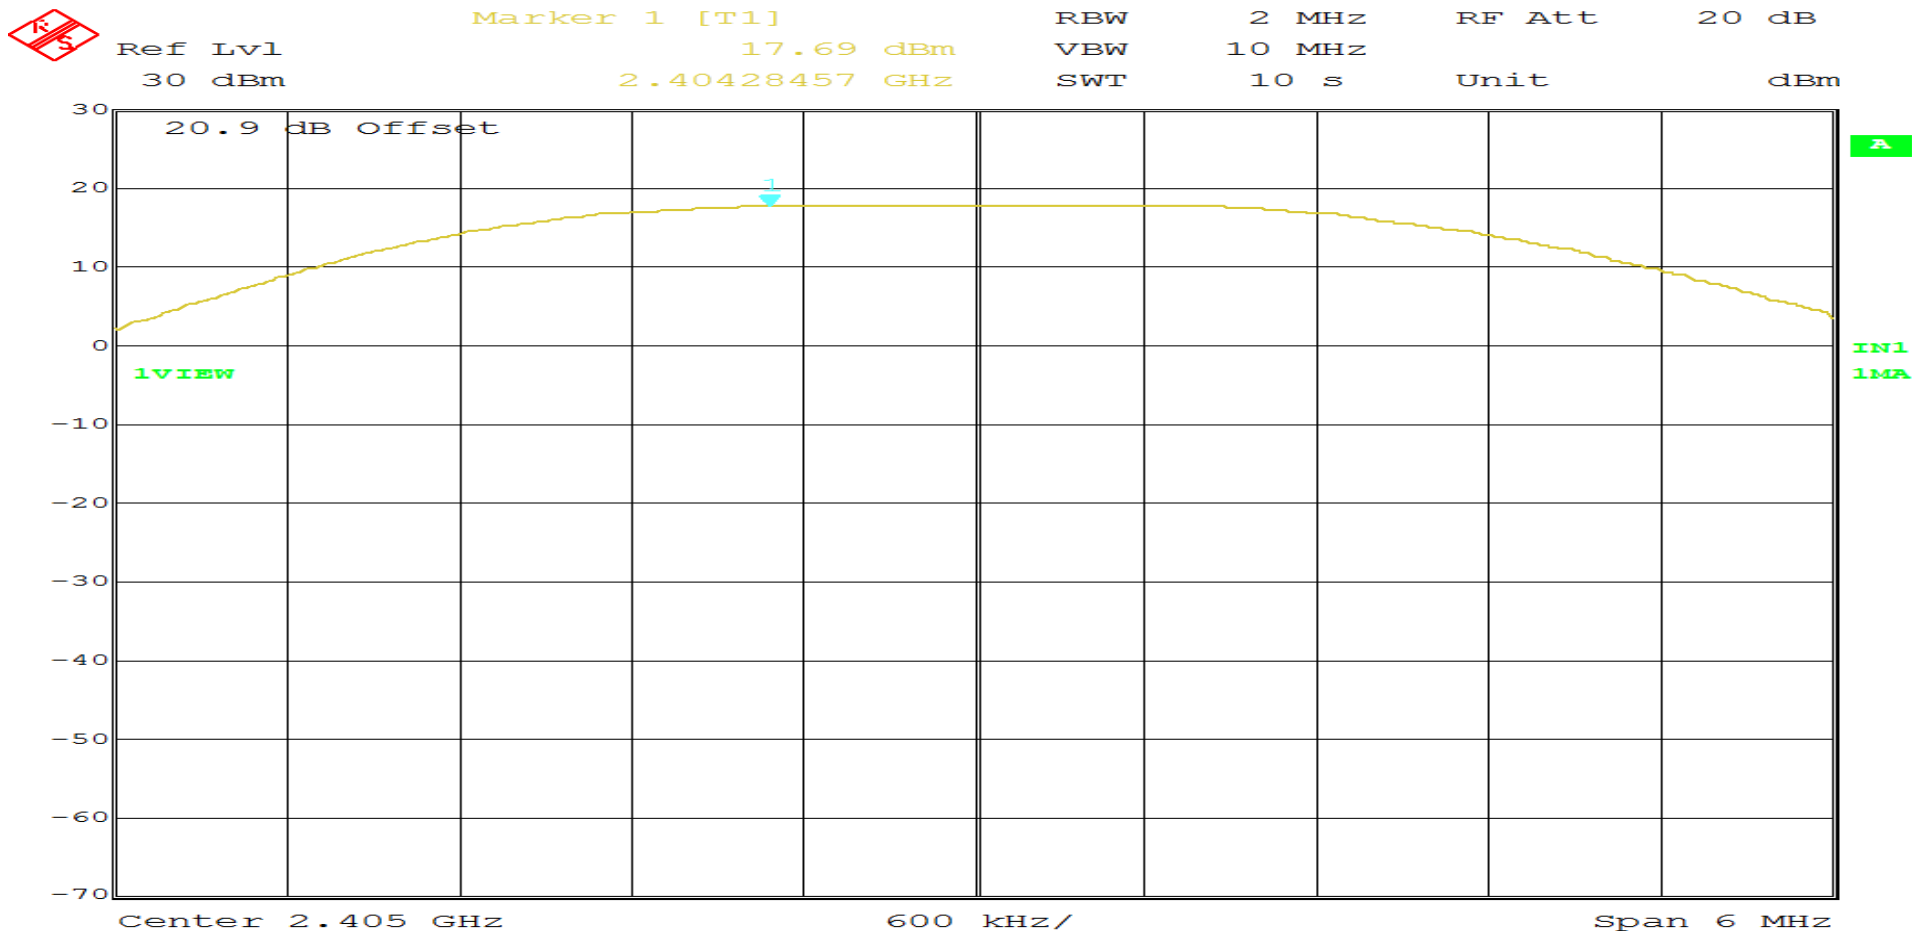

Date: 1.JAN.1997 03:44:25
Page 1 of 3

RETLIF TESTING LABORATORIES


Test Method:	Conducted Peak Power Output		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.440 GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (b)(3)		
Technician	M. Seamans	Date	September 30 th , 2016
Climatic Conditions	Temp: 21.8 °C Relative Humidity: 44.2 %		
Notes	Peak Power Output: 17.34 dBm		

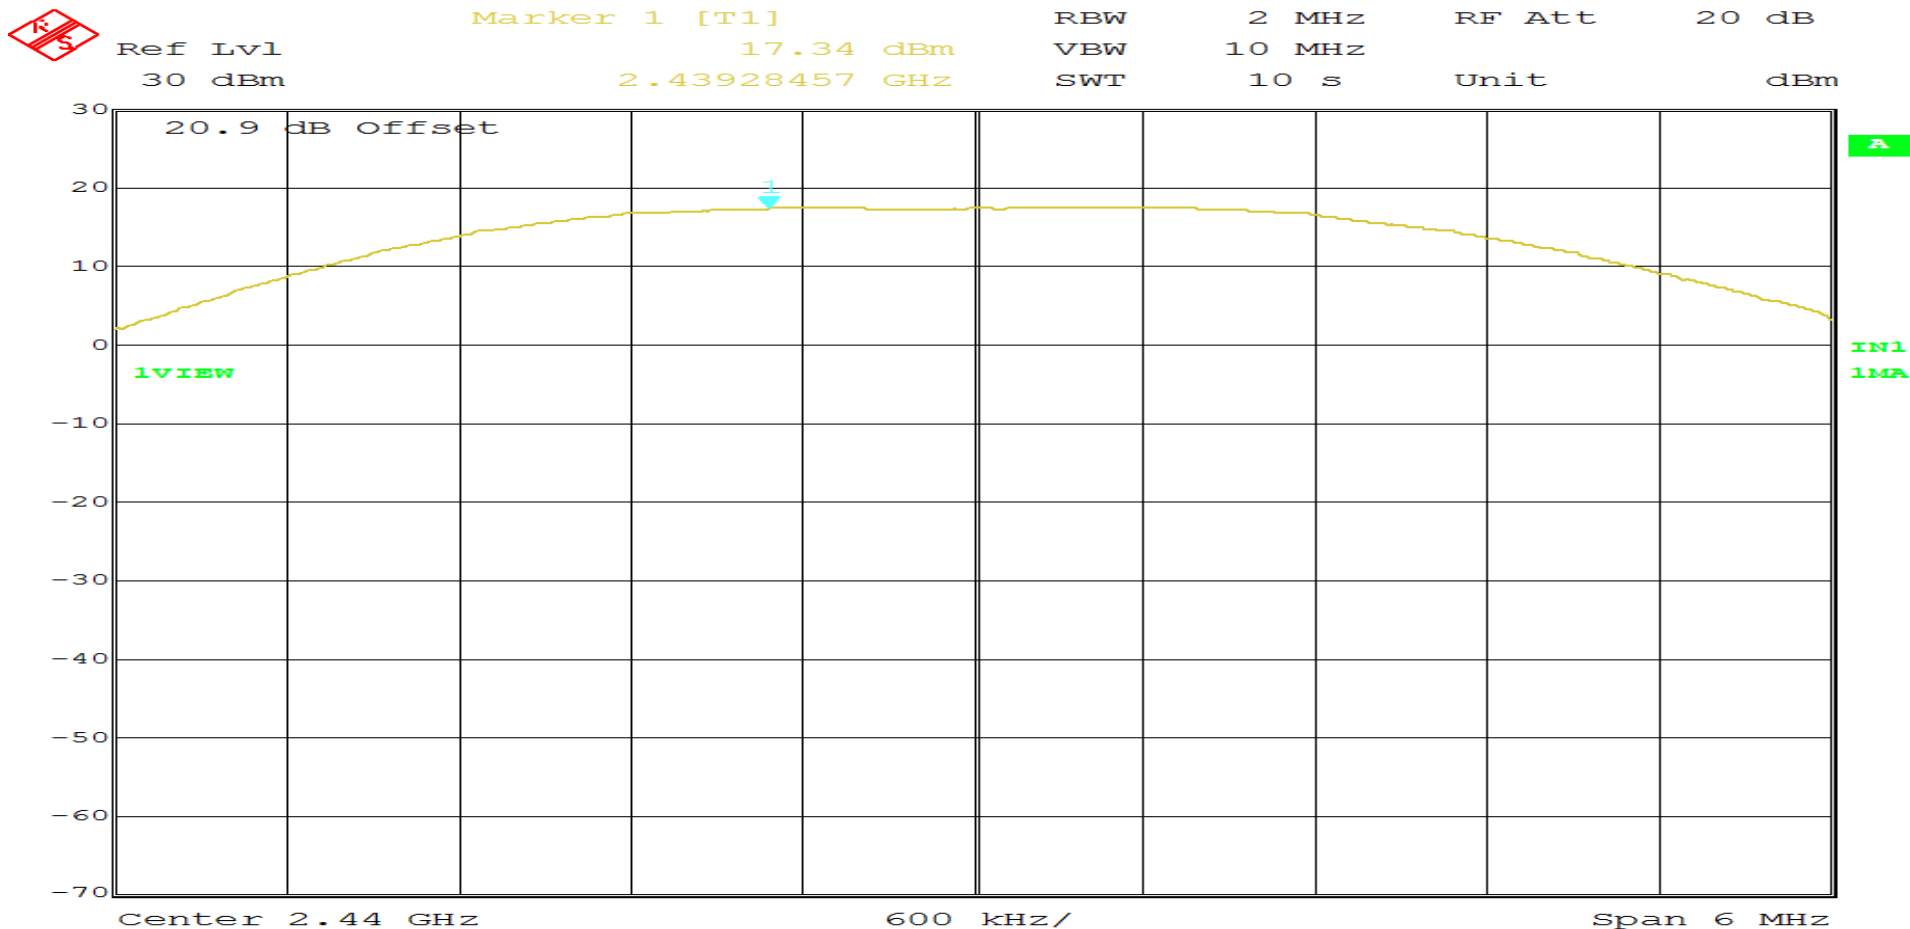

Date: 1.JAN.1997 03:32:38
Page 2 of 3

RETLIF TESTING LABORATORIES

Test Method:	Conducted Peak Power Output		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.480GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (b)(3)		
Technician	M. Seamans	Date	September 30 th , 2016
Climatic Conditions	Temp: 21.8 °C Relative Humidity: 44.2 %		
Notes	Peak Power Output: 17.69 dBm		

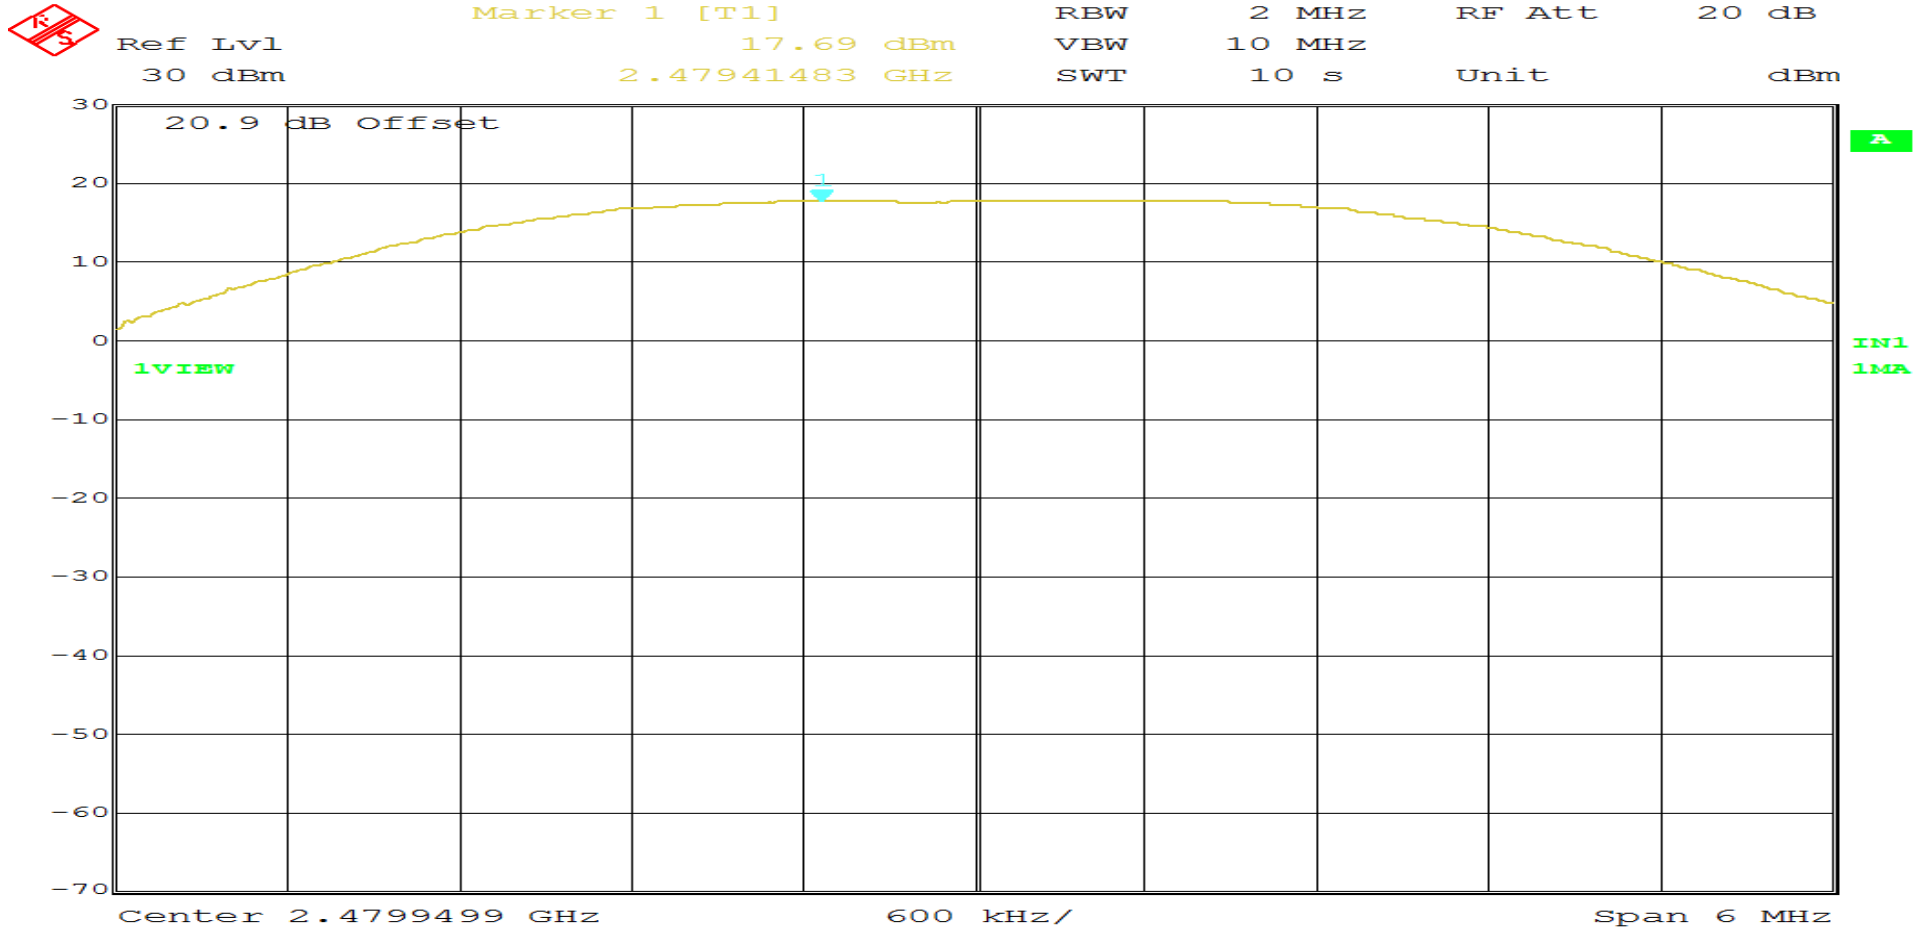

Date: 1.JAN.1997 03:21:26
Page 3 of 3

Test Photographs
Antenna Terminal Out of Band/Band Edge Conducted Emissions (30 MHz to 25 GHz)



Test Setup



Retlif Testing Laboratories

Report No. R-6140N-1

FCC Section 15.247 (d)
Antenna Terminal Out of Band/Band Edge Conducted Emissions (30 MHz to 25 GHz)
Test Data



Retlif Testing Laboratories

Report No. R-6140N-1

**Out of Band Conducted Emissions
Test Data**




Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES


Test Method:	Out of Band Conducted Emissions 25 MHz to 25 GHz		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.405 GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	October 3 rd , 2016
Climatic Conditions	Temp: 19.3 °C Relative Humidity: 55.1 %		
Notes	Limit: -3.52 dBm		

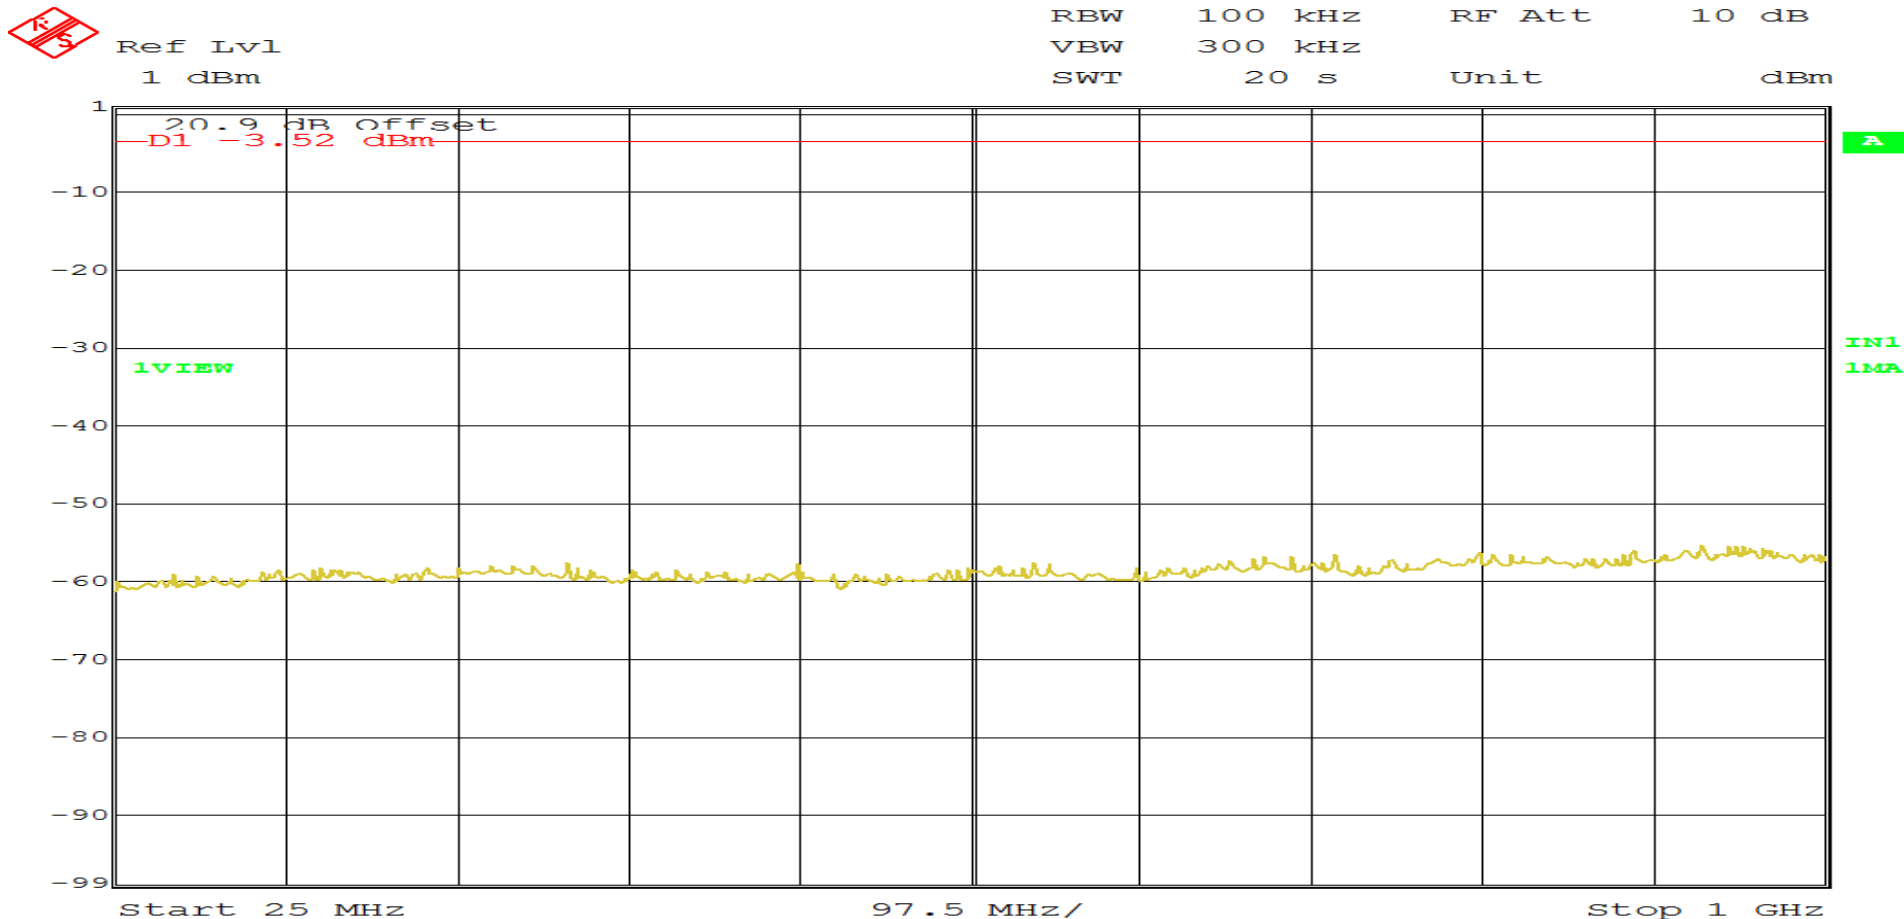

Date: 1.JAN.1997 01:25:03
 Page 1 of 6

RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 25 GHz		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.405 GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	October 3 rd , 2016
Climatic Conditions	Temp: 19.3 °C Relative Humidity: 55.1 %		
Notes	Limit: -3.52 dBm		

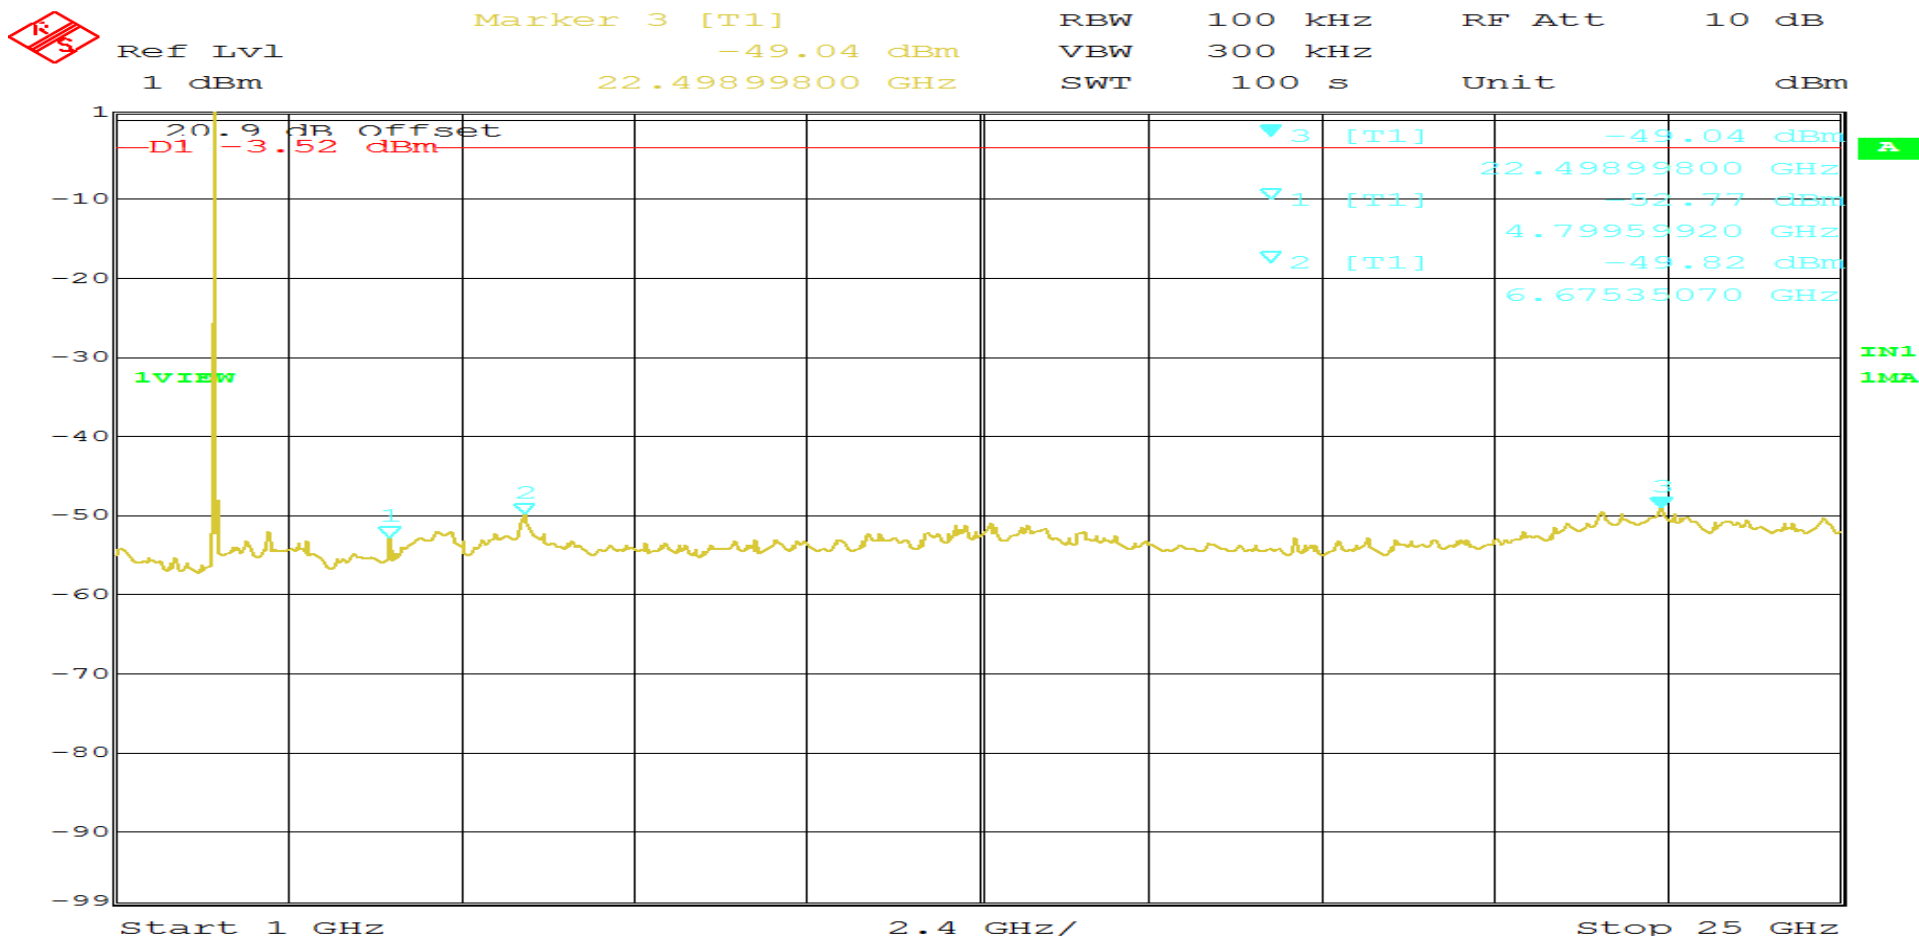

Date: 1.JAN.1997 01:36:58

Page 2 of 6


RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 25 GHz		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.440GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	October 3 rd , 2016
Climatic Conditions	Temp: 19.3 °C Relative Humidity: 55.1 %		
Notes	Limit: -3.52 dBm		



Ref Lvl
1 dBm

RBW 100 kHz RF Att 10 dB
VBW 300 kHz
SWT 20 s Unit dBm

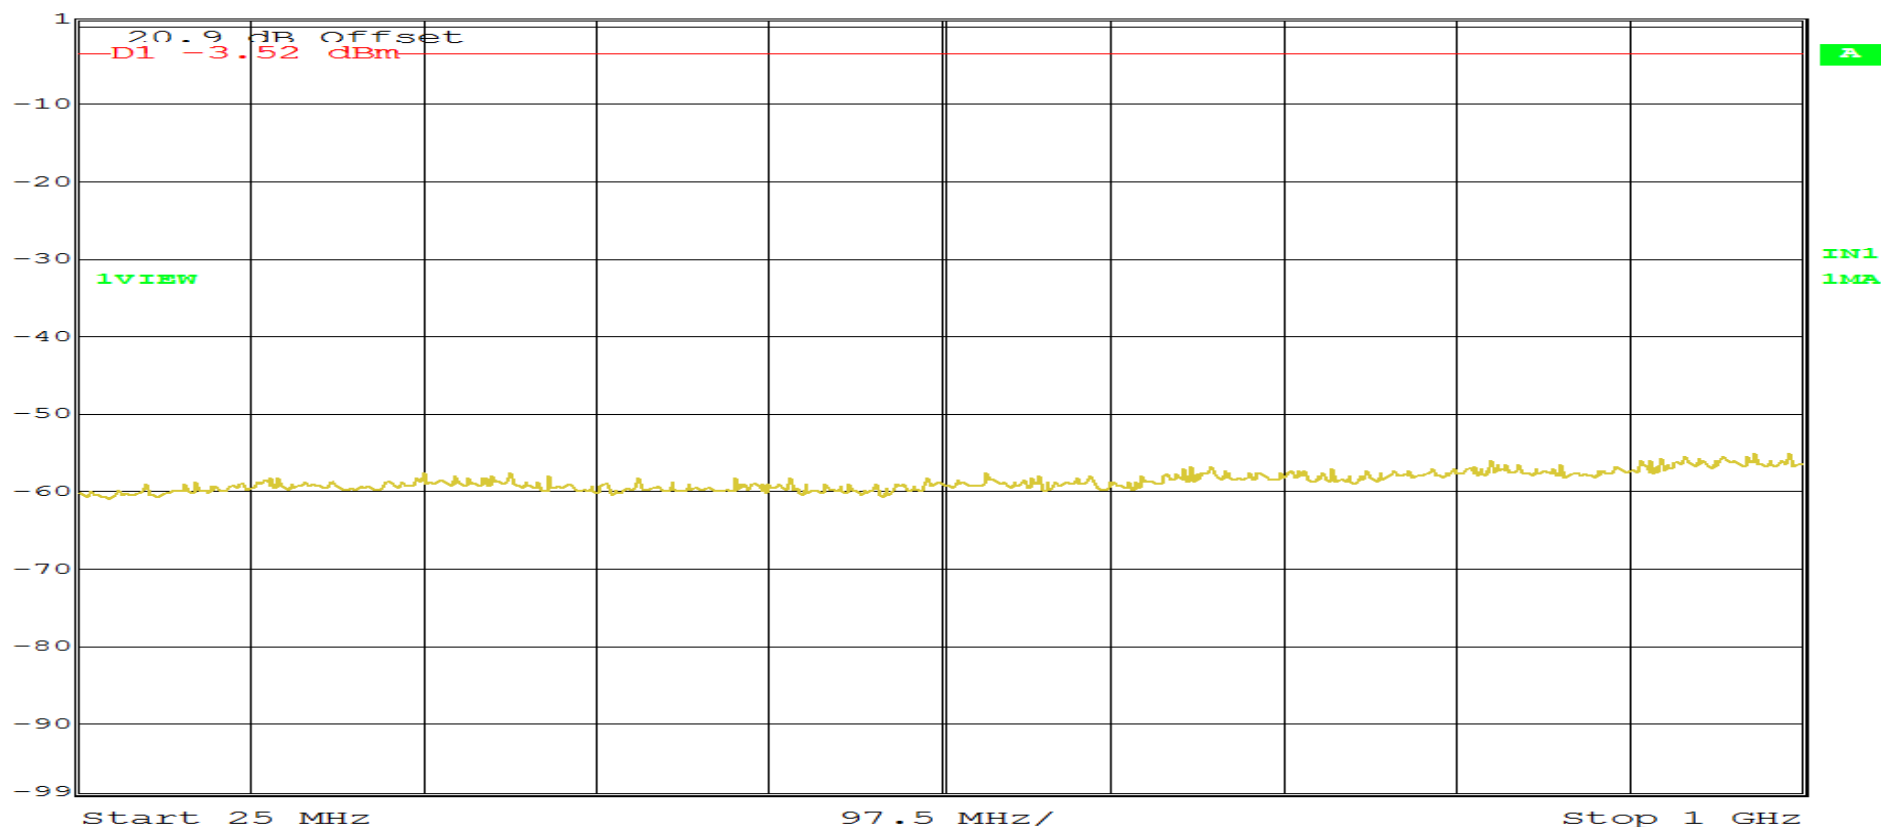


Date: 1.JAN.1997 01:10:59

Page 3 of 6

RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 25 GHz		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.440GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	October 3 rd , 2016
Climatic Conditions	Temp: 19.3 °C Relative Humidity: 55.1 %		
Notes	Limit: -3.52 dBm		

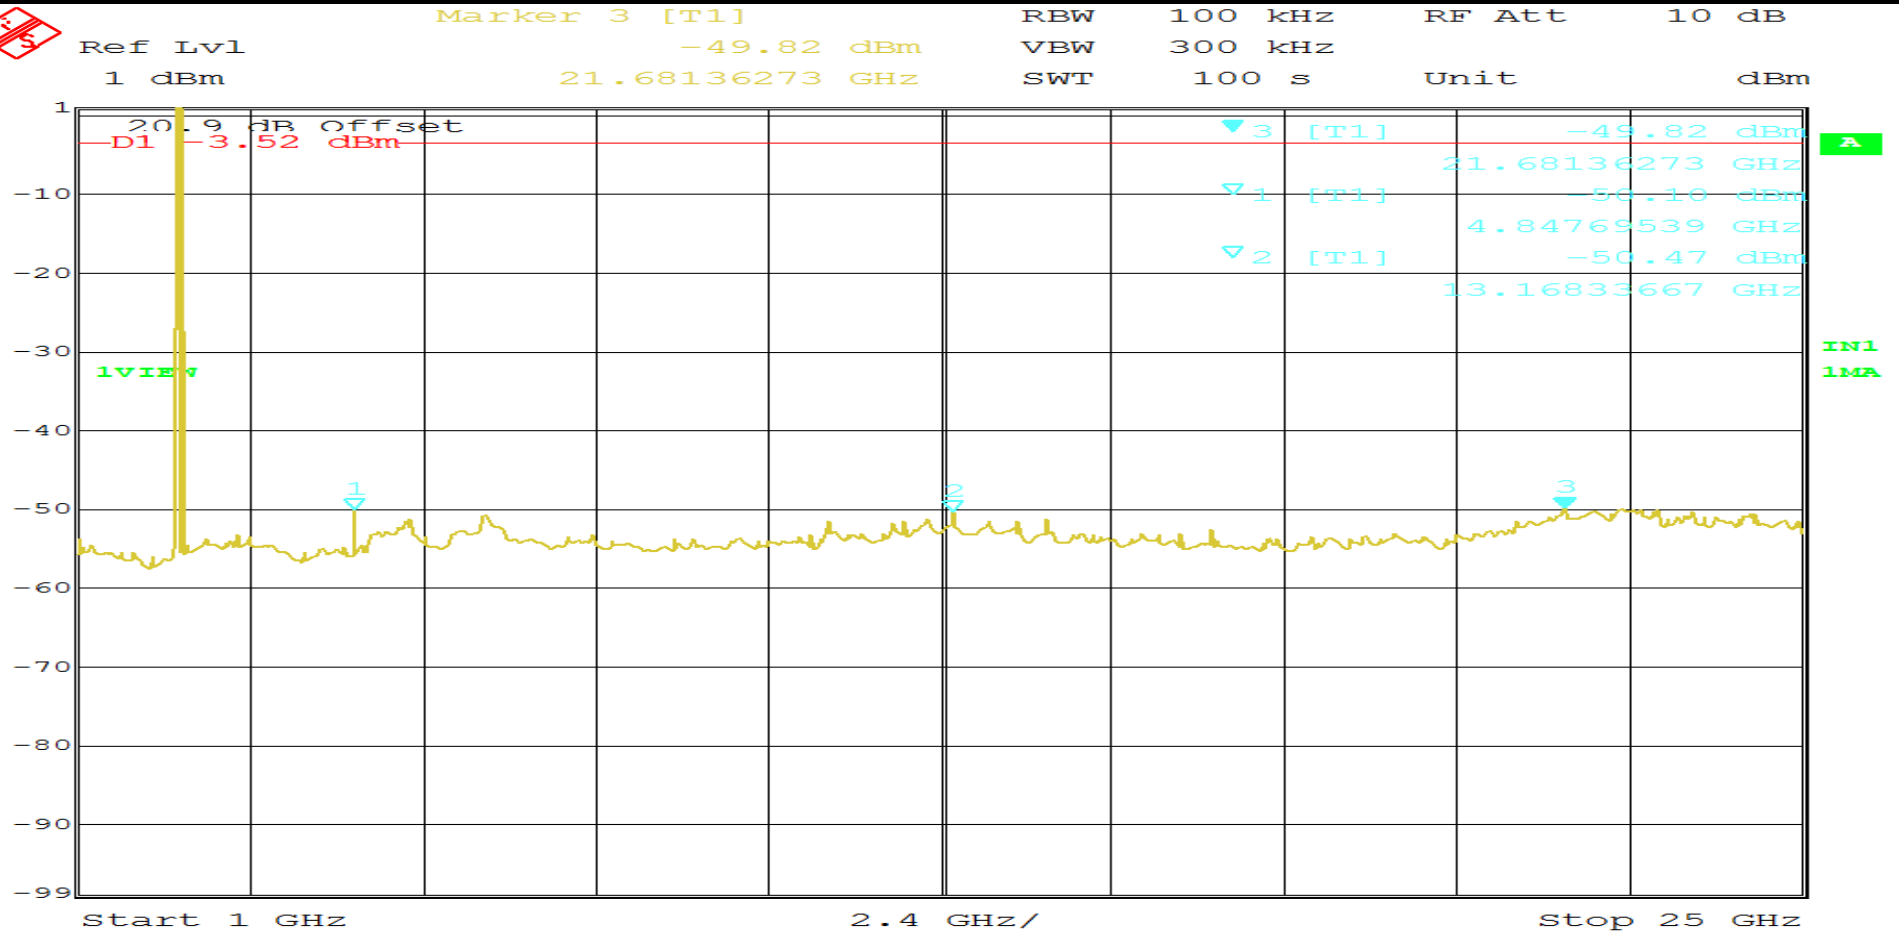

Date: 1.JAN.1997 01:06:43
 Page 4 of 6


RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 25 GHz		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.480GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	October 3 rd , 2016
Climatic Conditions	Temp: 19.3 °C Relative Humidity: 55.1 %		
Notes	Limit: -3.52 dBm		



Ref Lvl
1 dBm


RBW 100 kHz RF Att 10 dB
VBW 300 kHz
SWT 20 s Unit dBm

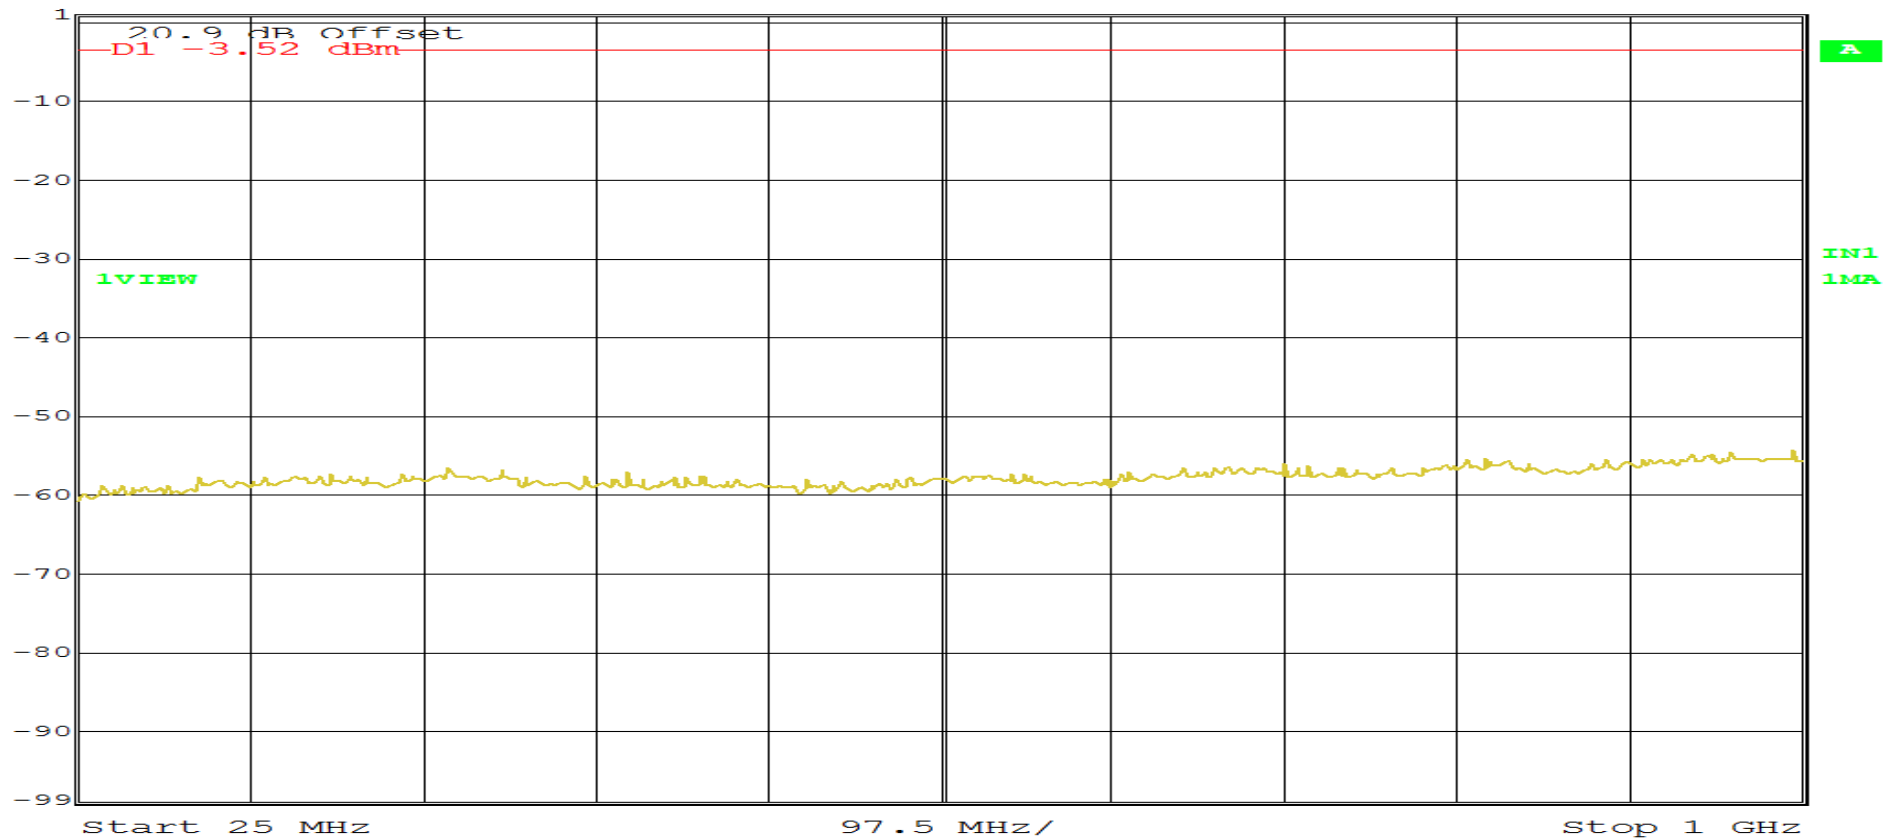

Date: 1.JAN.1997 00:38:51
Page 5 of 6

RETLIF TESTING LABORATORIES

Test Method:	Out of Band Conducted Emissions 25 MHz to 25 GHz		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.480GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	October 3 rd , 2016
Climatic Conditions	Temp: 19.3 °C Relative Humidity: 55.1 %		
Notes	Limit: -3.52 dBm		

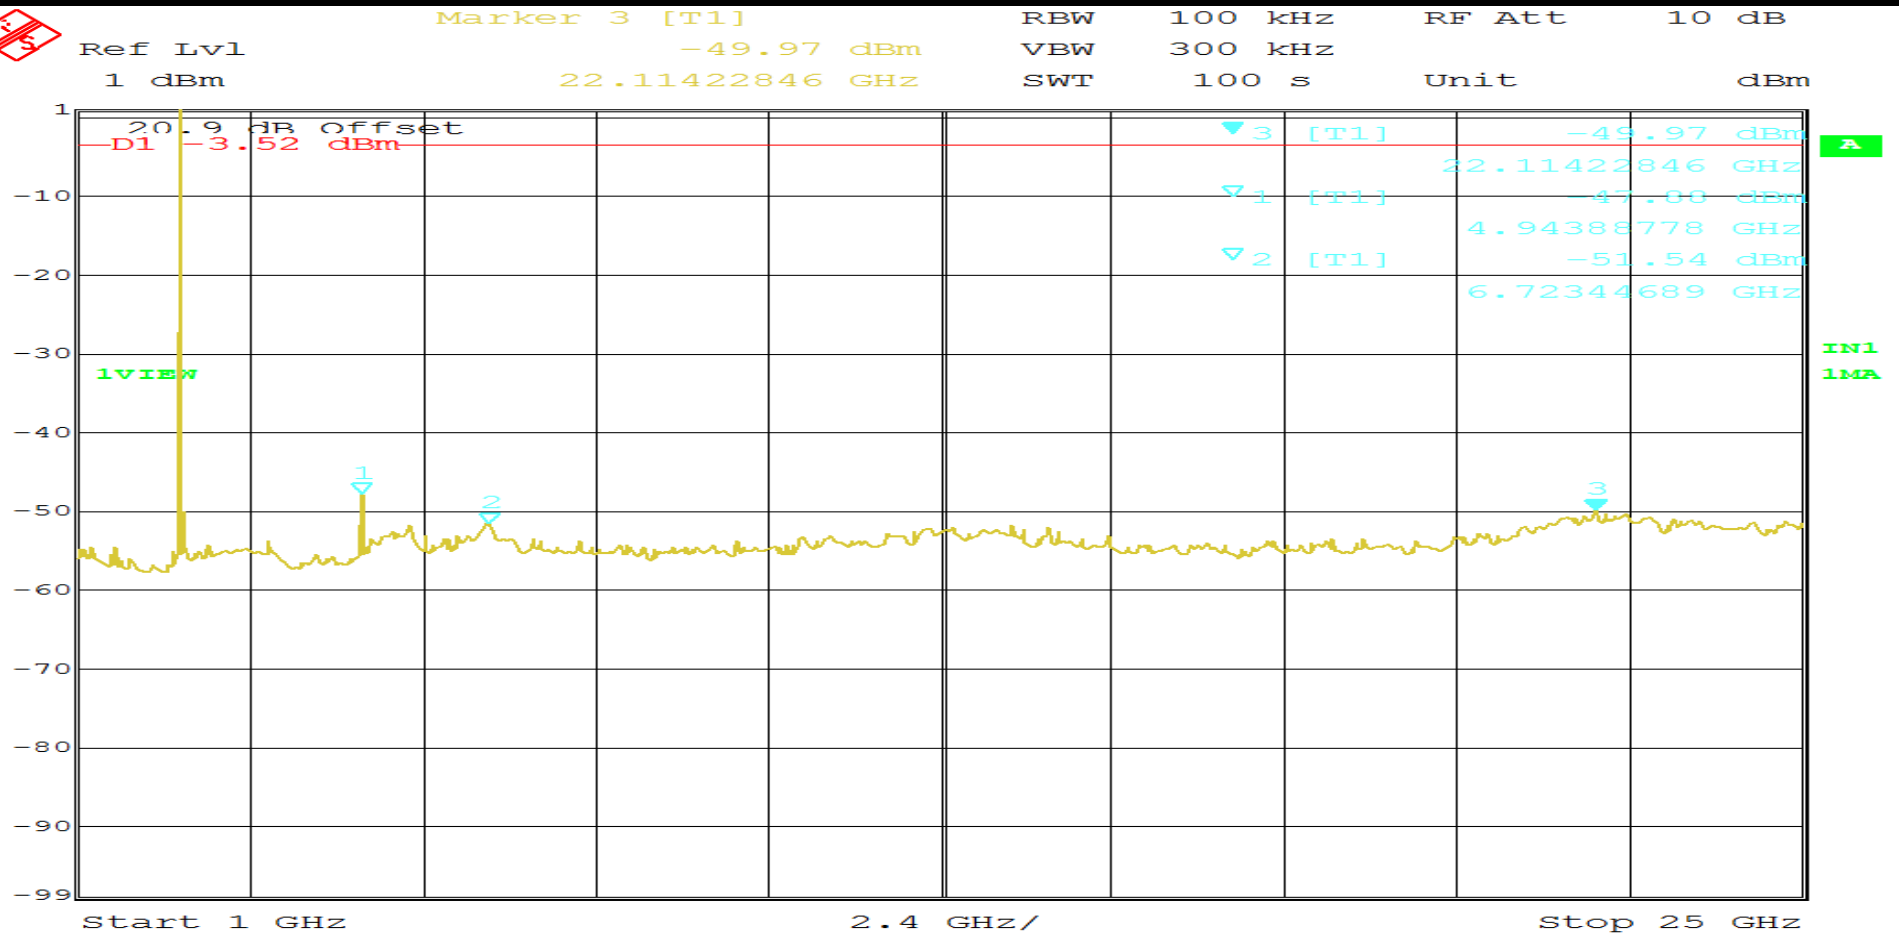

Date: 1.JAN.1997 00:53:19
 Page 6 of 6

**Band Edge Conducted
Test Data**




Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

Test Method:	Band Edge Conducted		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.405 GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	October 3 rd , 2016
Climatic Conditions	Temp: 19.3 °C Relative Humidity: 55.1 %		
Notes	Limit: -3.52 dBm		

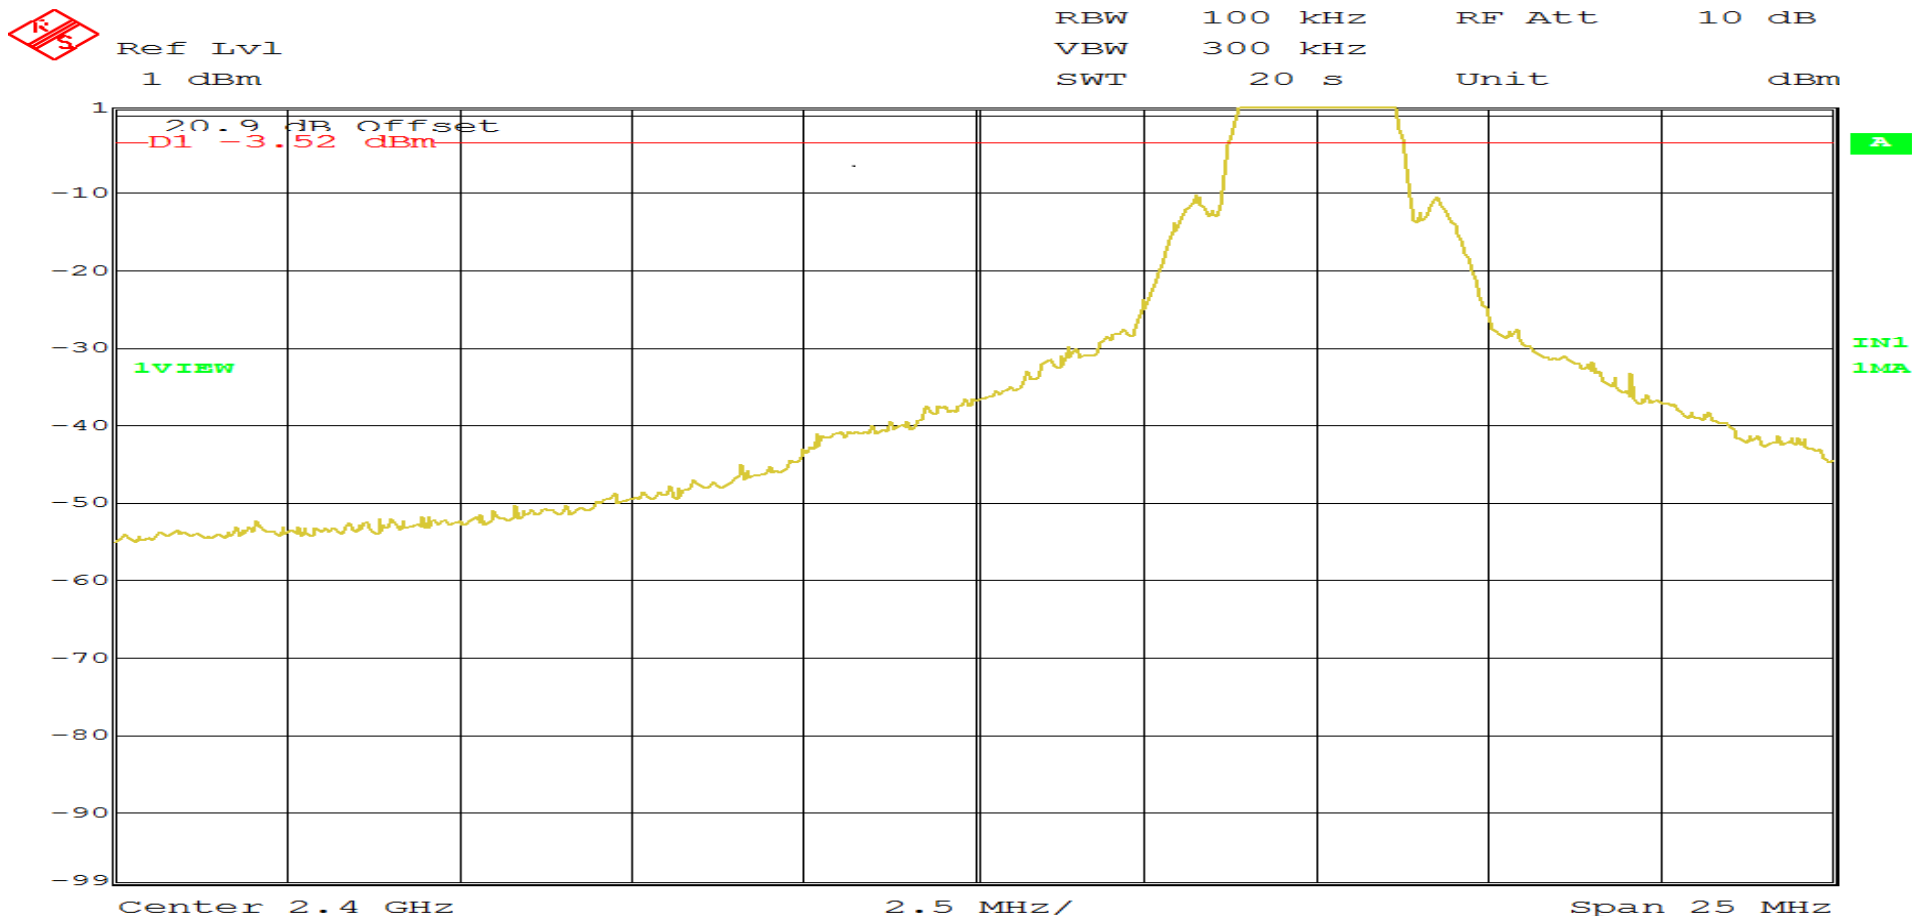


Date: 1.JAN.1997 01:42:56

Page 1 of 2

RETLIF TESTING LABORATORIES

Test Method:	Band Edge Conducted		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.480GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
Technician	M. Seamans	Date	October 3 rd , 2016
Climatic Conditions	Temp: 19.3 °C Relative Humidity: 55.1 %		
Notes	Limit: -3.52 dBm		

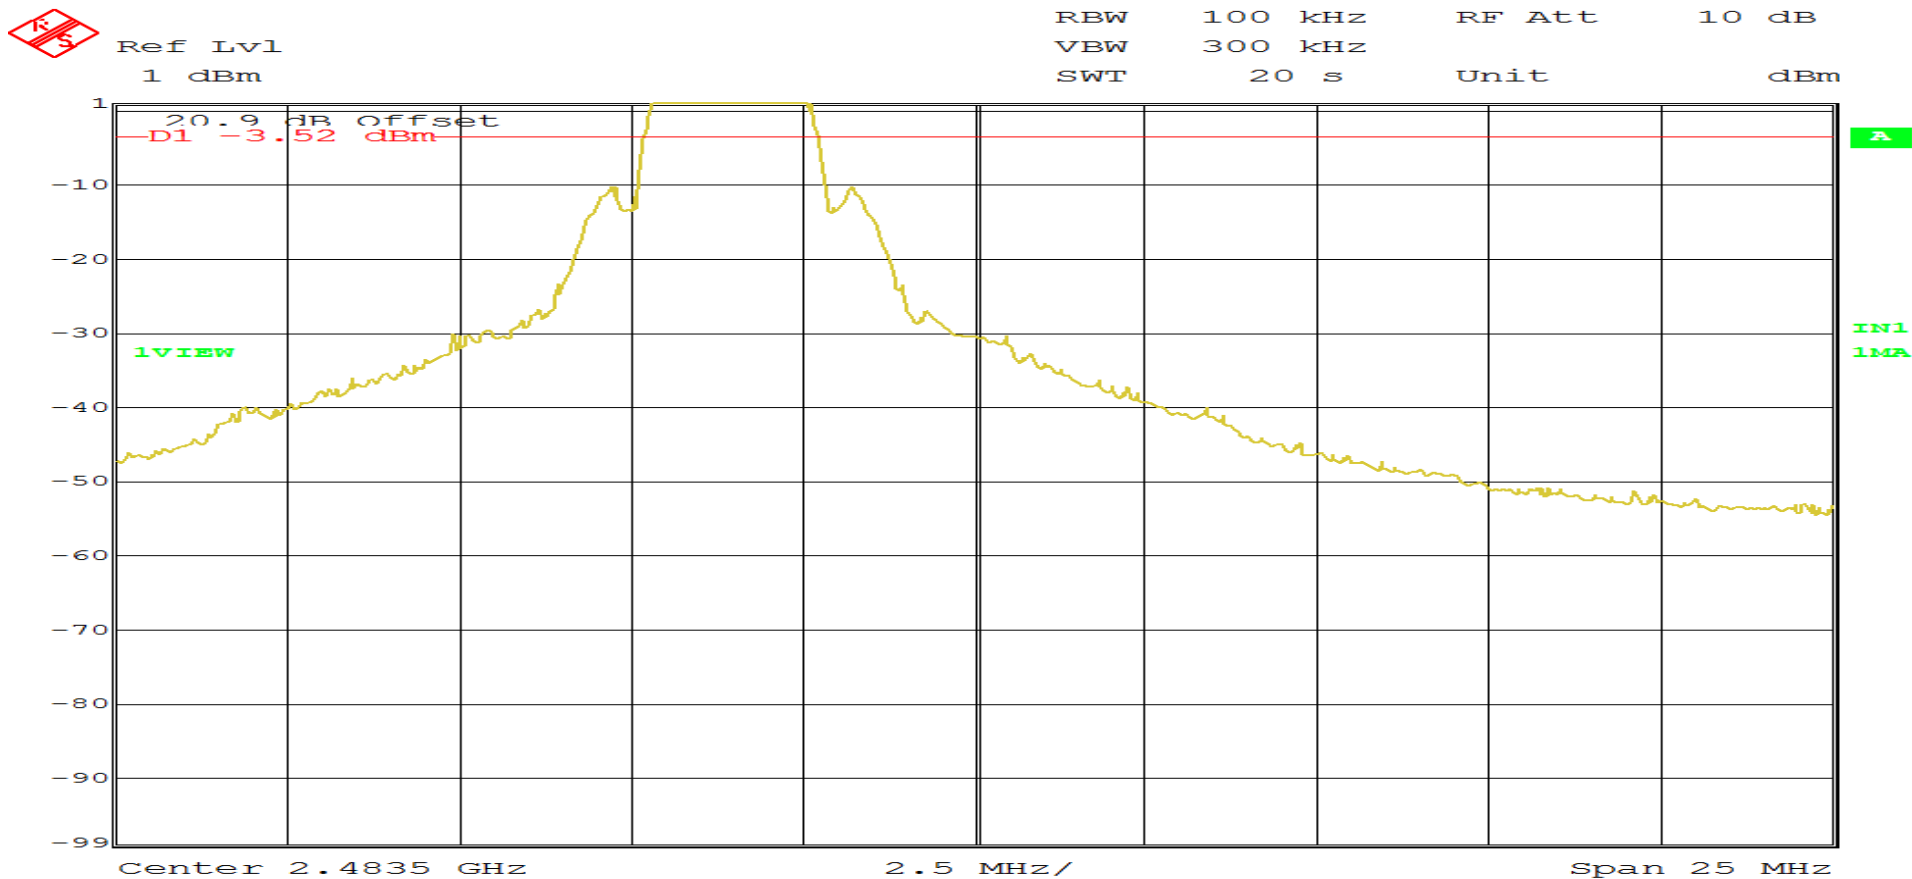

Date: 1.JAN.1997 01:55:26
Page 2 of 2

Test Photographs
Spurious Radiated Emissions (30 MHz to 25 GHz)



Test Setup, External Antenna Configuration



Retlif Testing Laboratories

Report No. R-6140N-1

Test Photographs
Spurious Radiated Emissions (30 MHz to 25 GHz)



Horizontal Antenna Polarization, External Antenna



Vertical Antenna Polarization, External Antenna



Retlif Testing Laboratories

Report No. R-6140N-1

Test Photographs
Spurious Radiated Emissions (30 MHz to 25 GHz)



Horizontal Antenna Polarization, 30 MHz to 200 MHz, External Antenna



Vertical Antenna Polarization, 30 MHz to 200 MHz, External Antenna



Retlif Testing Laboratories

Report No. R-6140N-1

Test Photographs
Spurious Radiated Emissions (30 MHz to 25 GHz)



Horizontal Antenna Polarization, 1 GHz to 12 GHz, External Antenna, 150 cm



Vertical Antenna Polarization, 1 GHz to 12 GHz, External Antenna, 150 cm



Retlif Testing Laboratories

Report No. R-6140N-1

Test Photographs
Spurious Radiated Emissions (30 MHz to 25 GHz)



Horizontal Antenna Polarization, 12 GHz to 18 GHz, External Antenna, 150 cm



Vertical Antenna Polarization, 12 GHz to 18 GHz, External Antenna, 150 cm



Retlif Testing Laboratories

Report No. R-6140N-1

Test Photographs
Spurious Radiated Emissions (30 MHz to 25 GHz)



Horizontal Antenna Polarization, 18 GHz to 25 GHz, External Antenna, 150 cm



Vertical Antenna Polarization, 18 GHz to 25 GHz, External Antenna, 150 cm



Retlif Testing Laboratories

Report No. R-6140N-1

Test Photographs
Spurious Radiated Emissions (30 MHz to 25 GHz)



Test Setup, Internal Antenna Configuration



Retlif Testing Laboratories

Report No. R-6140N-1

Test Photographs
Spurious Radiated Emissions (30 MHz to 25 GHz)



Horizontal Antenna Polarization, Internal Antenna



Vertical Antenna Polarization, Internal Antenna



Retlif Testing Laboratories

Report No. R-6140N-1

Test Photographs
Spurious Radiated Emissions (30 MHz to 25 GHz)



Horizontal Antenna Polarization, Internal Antenna



Vertical Antenna Polarization, Internal Antenna



Retlif Testing Laboratories

Report No. R-6140N-1

Test Photographs
Spurious Radiated Emissions (30 MHz to 25 GHz)



Horizontal Antenna Polarization, 1 GHz to 12 GHz, Internal Antenna, 150 cm



Vertical Antenna Polarization, 1 GHz to 12 GHz, Internal Antenna, 150 cm



Retlif Testing Laboratories

Report No. R-6140N-1

Test Photographs
Spurious Radiated Emissions (30 MHz to 25 GHz)



Horizontal Antenna Polarization, 12 GHz to 18 GHz, Internal Antenna, 150 cm



Vertical Antenna Polarization, 12 GHz to 18 GHz, Internal Antenna, 150 cm



Retlif Testing Laboratories

Report No. R-6140N-1

Test Photographs
Spurious Radiated Emissions (30 MHz to 25 GHz)



Horizontal Antenna Polarization, 18 GHz to 25 GHz, Internal Antenna, 150 cm



Vertical Antenna Polarization, 18 GHz to 25 GHz, Internal Antenna, 150 cm



Retlif Testing Laboratories

Report No. R-6140N-1

FCC Section 15.247 (d)
Spurious Radiated Emissions, 30 MHz to 25 GHz
Test Data



Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Lord Corporation	
Job Number	R-6140N-1	
Test Sample	Wireless 8 Channel Analog Input Sensor Node (External Antenna Configuration)	
Model Number	V-Link® 200	
Serial Number	6312-2000-20	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated signal at 2405 MHz, 2442 MHz and 2480 MHz consecutively.	
Technician	M. Seamans	
Date	October 13 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
37.50	-	-	-	-			-	100.00
	38.00	12.71	14.20	26.91	*		22.16	I
38.25	-	-	-	-			-	100.00
73.00	-	-	-	-			-	100.00
	74.00	19.74	8.36	28.10	*		25.41	I
74.60	-	-	-	-			-	100.00
74.80	-	-	-	-			-	100.00
	75.00	16.54	8.36	24.90	*		17.58	
75.20	-	-	-	-			-	100.00
108.00	-	-	-	-			-	150.00
	115.00	14.18	10.02	24.20	*		16.22	
	-	-	-	-			-	
121.94	-	-	-	-			-	150.00
123.00	-	-	-	-			-	150.00
	130.00	15.96	9.44	25.40	*		18.62	
	-	-	-	-			-	
138.00	-	-	-	-			-	150.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.

* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 1 of 8



Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Lord Corporation	
Job Number	R-6140N-1	
Test Sample	Wireless 8 Channel Analog Input Sensor Node (External Antenna Configuration)	
Model Number	V-Link® 200	
Serial Number	6312-2000-20	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated signal at 2405 MHz, 2442 MHz and 2480 MHz consecutively.	
Technician	M. Seamans	
Date	October 13 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
149.90	-	-	-	-			-	150.00
	150.00	8.23	11.17	19.40	*		9.33	
150.05	-	-	-	-			-	150.00
156.52	-	-	-	-			-	150.00
	156.52	5.02	12.08	17.10	*		7.16	
156.52	-	-	-	-			-	150.00
156.70	-	-	-	-			-	150.00
	156.80	4.91	12.12	17.30	*		7.33	
156.90	-	-	-	-			-	150.00
162.01	-	-	-	-			-	150.00
	165.00	8.02	12.68	20.70	*		10.84	
167.17	-	-	-	-			-	150.00
167.72	-	-	-	-			-	150.00
	170.00	8.30	12.80	21.10	*		11.35	
173.20	-	-	-	-			-	150.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.
 * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 2 of 8



Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Lord Corporation	
Job Number	R-6140N-1	
Test Sample	Wireless 8 Channel Analog Input Sensor Node (External Antenna Configuration)	
Model Number	V-Link® 200	
Serial Number	6312-2000-20	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated signal at 2405 MHz, 2442 MHz and 2480 MHz consecutively.	
Technician	M. Seamans	
Date	October 13 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
240.00	-	-	-	-			-	200.00
	260.00	1.45	16.85	18.30	*		8.22	
285.00	-	-	-	-			-	200.00
322.80	-	-	-	-			-	200.00
	330.00	0.69	18.91	19.60	*		9.55	
335.40	-	-	-	-			-	200.00
399.90	-	-	-	-			-	200.00
	405.00	1.01	21.49	22.50	*		13.34	
410.00	-	-	-	-			-	200.00
608.00	-	-	-	-			-	200.00
	611.00	-0.64	27.34	26.70	*		21.63	
614.00	-	-	-	-			-	200.00
960.00	-	-	-	-			-	500.00
	975.00	1.50	32.10	33.60	*		47.63	
1240.00	-	-	-	-			-	500.00
1300.00	-	-	-	-			-	500.00
	1350.00	33.67	-5.55	28.12	*		25.47	
1427.00	-	-	-	-			-	500.00

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 3 of 8



Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Lord Corporation	
Job Number	R-6140N-1	
Test Sample	Wireless 8 Channel Analog Input Sensor Node (External Antenna Configuration)	
Model Number	V-Link® 200	
Serial Number	6312-2000-20	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated signal at 2405 MHz, 2442 MHz and 2480 MHz consecutively.	
Technician	M. Seamans	
Date	October 13 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
1435.00	-	-	-	-			-	500.00
	1500.00	32.21	-4.81	27.40	*		23.44	
1646.50	-	-	-	-			-	500.00
1660.00	-	-	-	-			-	500.00
	1680.00	31.41	-4.01	27.40	*		23.44	
1710.00	-	-	-	-			-	500.00
1718.80	-	-	-	-			-	500.00
	1720.00	32.08	-3.84	28.24	*		25.82	
1722.20	-	-	-	-			-	500.00
2200.00	-	-	-	-			-	500.00
	2250.00	32.14	-2.07	30.07	*		31.88	
2300.00	-	-	-	-			-	500.00
2310.00	-	-	-	-			-	500.00
	2360.00	31.69	-1.79	29.90	*		31.26	
2390.00	-	-	-	-			-	500.00
2483.50	-	-	-	-			-	500.00
	2490.00	31.91	-1.47	30.44	*		33.27	
2500.00	-	-	-	-			-	500.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.

* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 4 of 8



Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Lord Corporation	
Job Number	R-6140N-1	
Test Sample	Wireless 8 Channel Analog Input Sensor Node (External Antenna Configuration)	
Model Number	V-Link® 200	
Serial Number	6312-2000-20	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated signal at 2405 MHz, 2442 MHz and 2480 MHz consecutively.	
Technician	M. Seamans	
Date	October 13 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
2690.00	-	-	-	-			-	500.00
	-	-	-	-			-	
	2750.00	32.34	-0.88	31.46	*		37.47	
	-	-	-	-			-	
2900.00	-	-	-	-			-	500.00
3260.00	-	-	-	-			-	500.00
	3263.00	30.75	0.11	30.86	*		34.91	
3267.00	-	-	-	-			-	500.00
3332.00	-	-	-	-			-	500.00
	3336.00	30.80	0.23	31.03	*		35.60	
3339.00	-	-	-	-			-	500.00
3345.00	-	-	-	-			-	500.00
	3350.00	31.45	0.26	31.71	*		38.50	
3358.00	-	-	-	-			-	500.00
3600.00	-	-	-	-			-	500.00
	-	-	-	-			-	
	3700.00	30.66	0.81	31.47	*		37.45	
	-	-	-	-			-	

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 5 of 8



Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Lord Corporation	
Job Number	R-6140N-1	
Test Sample	Wireless 8 Channel Analog Input Sensor Node (External Antenna Configuration)	
Model Number	V-Link® 200	
Serial Number	6312-2000-20	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated signal at 2405 MHz, 2442 MHz and 2480 MHz consecutively.	
Technician	M. Seamans	
Date	October 13 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band MHz	Measured Frequency MHz	Meter Reading dBuV	Correction Factor dB	Corrected Reading dBuV/m			Converted Reading uV/m	Limit at 3M uV/m
	-	-	-	-			-	
4400.00	-	-	-	-			-	500.00
4500.00	-	-	-	-			-	500.00
	4810.00	42.96	1.95	44.91			175.99	
	4880.00	39.85	2.01	41.86			123.88	
	4960.00	40.53	2.07	42.60			134.90	
	-	-	-	-			-	
5150.00	-	-	-	-			-	500.00
5350.00	-	-	-	-			-	500.00
	5400.00	29.72	2.70	32.42	*		41.78	
5460.00	-	-	-	-			-	500.00
7250.00	-	-	-	-			-	500.00
	7320.00	31.25	4.45	35.70	*		60.95	
	7440.00	31.43	4.34	35.77	*		61.45	
	-	-	-	-			-	
7750.00	-	-	-	-			-	500.00
8025.00	-	-	-	-			-	500.00
	8300.00	31.50	4.45	35.95	*		62.73	
8500.00	-	-	-	-			-	500.00

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 6 of 8



Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Lord Corporation	
Job Number	R-6140N-1	
Test Sample	Wireless 8 Channel Analog Input Sensor Node (External Antenna Configuration)	
Model Number	V-Link® 200	
Serial Number	6312-2000-20	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated signal at 2405 MHz, 2442 MHz and 2480 MHz consecutively.	
Technician	M. Seamans	
Date	October 13 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
9000.00	-	-	-	-			-	500.00
	9100.00	31.99	4.85	36.84	*		69.50	
9200.00	-	-	-	-			-	500.00
9300.00	-	-	-	-			-	500.00
	9400.00	31.72	4.95	36.67	*		68.16	
9500.00	-	-	-	-			-	500.00
10600.00	-	-	-	-			-	500.00
	12025.00	31.77	8.30	40.07	*		100.81	
	12200.00	32.03	8.50	40.53	*		106.29	
	12400.00	30.63	8.70	39.33	*		92.58	
12700.00	-	-	-	-			-	500.00
13250.00	-	-	-	-			-	500.00
	15800.00	33.80	-0.34	33.46	*		47.10	
16200.00	-	-	-	-			-	500.00

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 7 of 8



Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Lord Corporation	
Job Number	R-6140N-1	
Test Sample	Wireless 8 Channel Analog Input Sensor Node (External Antenna Configuration)	
Model Number	V-Link® 200	
Serial Number	6312-2000-20	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated signal at 2405 MHz, 2442 MHz and 2480 MHz consecutively.	
Technician	M. Seamans	
Date	October 13 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
17700.00	-	-	-	-			-	500.00
	19240.00	33.07	-6.50	26.57	*		21.31	
	19520.00	32.87	-6.50	26.37	*		20.82	
	19840.00	32.87	-6.50	26.37	*		20.82	
21400.00	-	-	-	-			-	500.00
22010.00	-	-	-	-			-	500.00
	22320.00	34.90	-6.00	28.90	*		27.86	
23120.00	-	-	-	-			-	500.00
23000.00	-	-	-	-			-	500.00
	23800.00	35.52	-4.40	31.12	*		35.97	
24000.00	-	-	-	-			-	500.00

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 8 of 8



Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Lord Corporation	
Job Number	R-6140N-1	
Test Sample	Wireless 8 Channel Analog Input Sensor Node (Internal Antenna Configuration)	
Model Number	V-Link® 200	
Serial Number	6312-2000-22	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated signal at 2405 MHz, 2442 MHz and 2480 MHz consecutively.	
Technician	M. Seamans	
Date	October 13 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
37.50	-	-	-	-			-	100.00
	38.00	12.71	14.20	26.91	*		22.16	I
38.25	-	-	-	-			-	100.00
73.00	-	-	-	-			-	100.00
	74.00	19.74	8.36	28.10	*		25.41	I
74.60	-	-	-	-			-	100.00
74.80	-	-	-	-			-	100.00
	75.00	16.54	8.36	24.90	*		17.58	
75.20	-	-	-	-			-	100.00
108.00	-	-	-	-			-	150.00
	115.00	14.18	10.02	24.20	*		16.22	
	-	-	-	-			-	
121.94	-	-	-	-			-	150.00
123.00	-	-	-	-			-	150.00
	130.00	15.96	9.44	25.40	*		18.62	
	-	-	-	-			-	
138.00	-	-	-	-			-	150.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.

* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 1 of 8



Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Lord Corporation	
Job Number	R-6140N-1	
Test Sample	Wireless 8 Channel Analog Input Sensor Node (Internal Antenna Configuration)	
Model Number	V-Link® 200	
Serial Number	6312-2000-22	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated signal at 2405 MHz, 2442 MHz and 2480 MHz consecutively.	
Technician	M. Seamans	
Date	October 13 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
149.90	-	-	-	-			-	150.00
	150.00	8.23	11.17	19.40	*		9.33	
150.05	-	-	-	-			-	150.00
156.52	-	-	-	-			-	150.00
	156.52	5.02	12.08	17.10	*		7.16	
156.52	-	-	-	-			-	150.00
156.70	-	-	-	-			-	150.00
	156.80	4.91	12.12	17.30	*		7.33	
156.90	-	-	-	-			-	150.00
162.01	-	-	-	-			-	150.00
	165.00	8.02	12.68	20.70	*		10.84	
167.17	-	-	-	-			-	150.00
167.72	-	-	-	-			-	150.00
	170.00	8.30	12.80	21.10	*		11.35	
173.20	-	-	-	-			-	150.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.
 * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 2 of 8



Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Lord Corporation	
Job Number	R-6140N-1	
Test Sample	Wireless 8 Channel Analog Input Sensor Node (Internal Antenna Configuration)	
Model Number	V-Link® 200	
Serial Number	6312-2000-22	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated signal at 2405 MHz, 2442 MHz and 2480 MHz consecutively.	
Technician	M. Seamans	
Date	October 13 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
240.00	-	-	-	-			-	200.00
	260.00	1.45	16.85	18.30	*		8.22	
285.00	-	-	-	-			-	200.00
322.80	-	-	-	-			-	200.00
	330.00	0.69	18.91	19.60	*		9.55	
335.40	-	-	-	-			-	200.00
399.90	-	-	-	-			-	200.00
	405.00	1.01	21.49	22.50	*		13.34	
410.00	-	-	-	-			-	200.00
608.00	-	-	-	-			-	200.00
	611.00	-0.64	27.34	26.70	*		21.63	
614.00	-	-	-	-			-	200.00
960.00	-	-	-	-			-	500.00
	975.00	1.50	32.10	33.60	*		47.63	
1240.00	-	-	-	-			-	500.00
1300.00	-	-	-	-			-	500.00
	1350.00	33.67	-5.55	28.12	*		25.47	
1427.00	-	-	-	-			-	500.00

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 3 of 8



Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Lord Corporation	
Job Number	R-6140N-1	
Test Sample	Wireless 8 Channel Analog Input Sensor Node (Internal Antenna Configuration)	
Model Number	V-Link® 200	
Serial Number	6312-2000-22	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated signal at 2405 MHz, 2442 MHz and 2480 MHz consecutively.	
Technician	M. Seamans	
Date	October 13 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
1435.00	-	-	-	-			-	500.00
	1500.00	32.21	-4.81	27.40	*		23.44	
1646.50	-	-	-	-			-	500.00
1660.00	-	-	-	-			-	500.00
	1680.00	31.41	-4.01	27.40	*		23.44	
1710.00	-	-	-	-			-	500.00
1718.80	-	-	-	-			-	500.00
	1720.00	32.08	-3.84	28.24	*		25.82	
1722.20	-	-	-	-			-	500.00
2200.00	-	-	-	-			-	500.00
	2250.00	32.14	-2.07	30.07	*		31.88	
2300.00	-	-	-	-			-	500.00
2310.00	-	-	-	-			-	500.00
	2360.00	31.69	-1.79	29.90	*		31.26	
2390.00	-	-	-	-			-	500.00
2483.50	-	-	-	-			-	500.00
	2490.00	31.91	-1.47	30.44	*		33.27	
2500.00	-	-	-	-			-	500.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.

* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 4 of 8



Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Lord Corporation	
Job Number	R-6140N-1	
Test Sample	Wireless 8 Channel Analog Input Sensor Node (Internal Antenna Configuration)	
Model Number	V-Link® 200	
Serial Number	6312-2000-22	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated signal at 2405 MHz, 2442 MHz and 2480 MHz consecutively.	
Technician	M. Seamans	
Date	October 13 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
2690.00	-	-	-	-			-	500.00
	-	-	-	-			-	
	2750.00	32.34	-0.88	31.46	*		37.47	
	-	-	-	-			-	
2900.00	-	-	-	-			-	500.00
3260.00	-	-	-	-			-	500.00
	3263.00	30.75	0.11	30.86	*		34.91	
3267.00	-	-	-	-			-	500.00
3332.00	-	-	-	-			-	500.00
	3336.00	30.80	0.23	31.03	*		35.60	
3339.00	-	-	-	-			-	500.00
3345.00	-	-	-	-			-	500.00
	3350.00	31.45	0.26	31.71	*		38.50	
3358.00	-	-	-	-			-	500.00
3600.00	-	-	-	-			-	500.00
	-	-	-	-			-	
	3700.00	30.66	0.81	31.47	*		37.45	
	-	-	-	-			-	

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 5 of 8



Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Lord Corporation	
Job Number	R-6140N-1	
Test Sample	Wireless 8 Channel Analog Input Sensor Node (Internal Antenna Configuration)	
Model Number	V-Link® 200	
Serial Number	6312-2000-22	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated signal at 2405 MHz, 2442 MHz and 2480 MHz consecutively.	
Technician	M. Seamans	
Date	October 13 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band MHz	Measured Frequency MHz	Meter Reading dBuV	Correction Factor dB	Corrected Reading dBuV/m			Converted Reading uV/m	Limit at 3M uV/m
	-	-	-	-			-	
4400.00	-	-	-	-			-	500.00
4500.00	-	-	-	-			-	500.00
	4810.00	42.54	1.95	44.49			167.69	
	4880.00	42.35	2.01	44.36			165.20	
	4960.00	43.03	2.07	45.10			179.89	
	-	-	-	-			-	
5150.00	-	-	-	-			-	500.00
5350.00	-	-	-	-			-	500.00
	5400.00	29.72	2.70	32.42	*		41.78	
5460.00	-	-	-	-			-	500.00
7250.00	-	-	-	-			-	500.00
	7320.00	31.25	4.45	35.70	*		60.95	
	7440.00	31.43	4.34	35.77	*		61.45	
	-	-	-	-			-	
7750.00	-	-	-	-			-	500.00
8025.00	-	-	-	-			-	500.00
	8300.00	31.50	4.45	35.95	*		62.73	
8500.00	-	-	-	-			-	500.00

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 6 of 8



Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Lord Corporation	
Job Number	R-6140N-1	
Test Sample	Wireless 8 Channel Analog Input Sensor Node (Internal Antenna Configuration)	
Model Number	V-Link® 200	
Serial Number	6312-2000-22	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated signal at 2405 MHz, 2442 MHz and 2480 MHz consecutively.	
Technician	M. Seamans	
Date	October 13 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
9000.00	-	-	-	-			-	500.00
	9100.00	31.99	4.85	36.84	*		69.50	
9200.00	-	-	-	-			-	500.00
9300.00	-	-	-	-			-	500.00
	9400.00	31.72	4.95	36.67	*		68.16	
9500.00	-	-	-	-			-	500.00
10600.00	-	-	-	-			-	500.00
	12025.00	31.77	8.30	40.07	*		100.81	
	12200.00	32.03	8.50	40.53	*		106.29	
	12400.00	30.63	8.70	39.33	*		92.58	
12700.00	-	-	-	-			-	500.00
13250.00	-	-	-	-			-	500.00
	15800.00	33.80	-0.34	33.46	*		47.10	
16200.00	-	-	-	-			-	500.00

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 7 of 8



Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES

EMISSIONS TEST DATA SHEET

Test Method	Unwanted Emissions into Restricted Frequency Bands	
Customer	Lord Corporation	
Job Number	R-6140N-1	
Test Sample	Wireless 8 Channel Analog Input Sensor Node (Internal Antenna Configuration)	
Model Number	V-Link® 200	
Serial Number	6312-2000-22	
Test Specification	FCC Part 15 Subpart C	Paragraph: 15.247(d)
Operating Mode	Transmitting modulated signal at 2405 MHz, 2442 MHz and 2480 MHz consecutively.	
Technician	M. Seamans	
Date	October 13 th , 2016	

Notes: Antenna Test Distance: 3 meters Detector: Quasi-Peak <1GHz, Average >1GHz

TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
17700.00	-	-	-	-			-	500.00
	19240.00	33.07	-6.50	26.57	*		21.31	
	19520.00	32.87	-6.50	26.37	*		20.82	
	19840.00	32.87	-6.50	26.37	*		20.82	
21400.00	-	-	-	-			-	500.00
22010.00	-	-	-	-			-	500.00
	22320.00	34.90	-6.00	28.90	*		27.86	
23120.00	-	-	-	-			-	500.00
23000.00	-	-	-	-			-	500.00
	23800.00	35.52	-4.40	31.12	*		35.97	
24000.00	-	-	-	-			-	500.00

EUT emissions observed throughout the given frequency spectrum were recorded and evaluated. Emission levels closest to the limit are listed on this data sheet. * This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 8 of 8



Retlif Testing Laboratories

Report No. R-6140N-1

Test Photographs Power Density



Test Configuration



Retlif Testing Laboratories

Report No. R-6140N-1

**FCC Section 15.247(e)
Power Density
Test Data**




Retlif Testing Laboratories

Report No. R-6140N-1

RETLIF TESTING LABORATORIES


Test Method:	Power Spectral Density		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.405 GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (e)		
Technician	M. Seamans	Date	September 30 th , 2016
Climatic Conditions	Temp: 21.8 °C Relative Humidity: 51.9 %		
Notes	Power Spectral Density: 4.74 dBm Limit: 8 dBm		

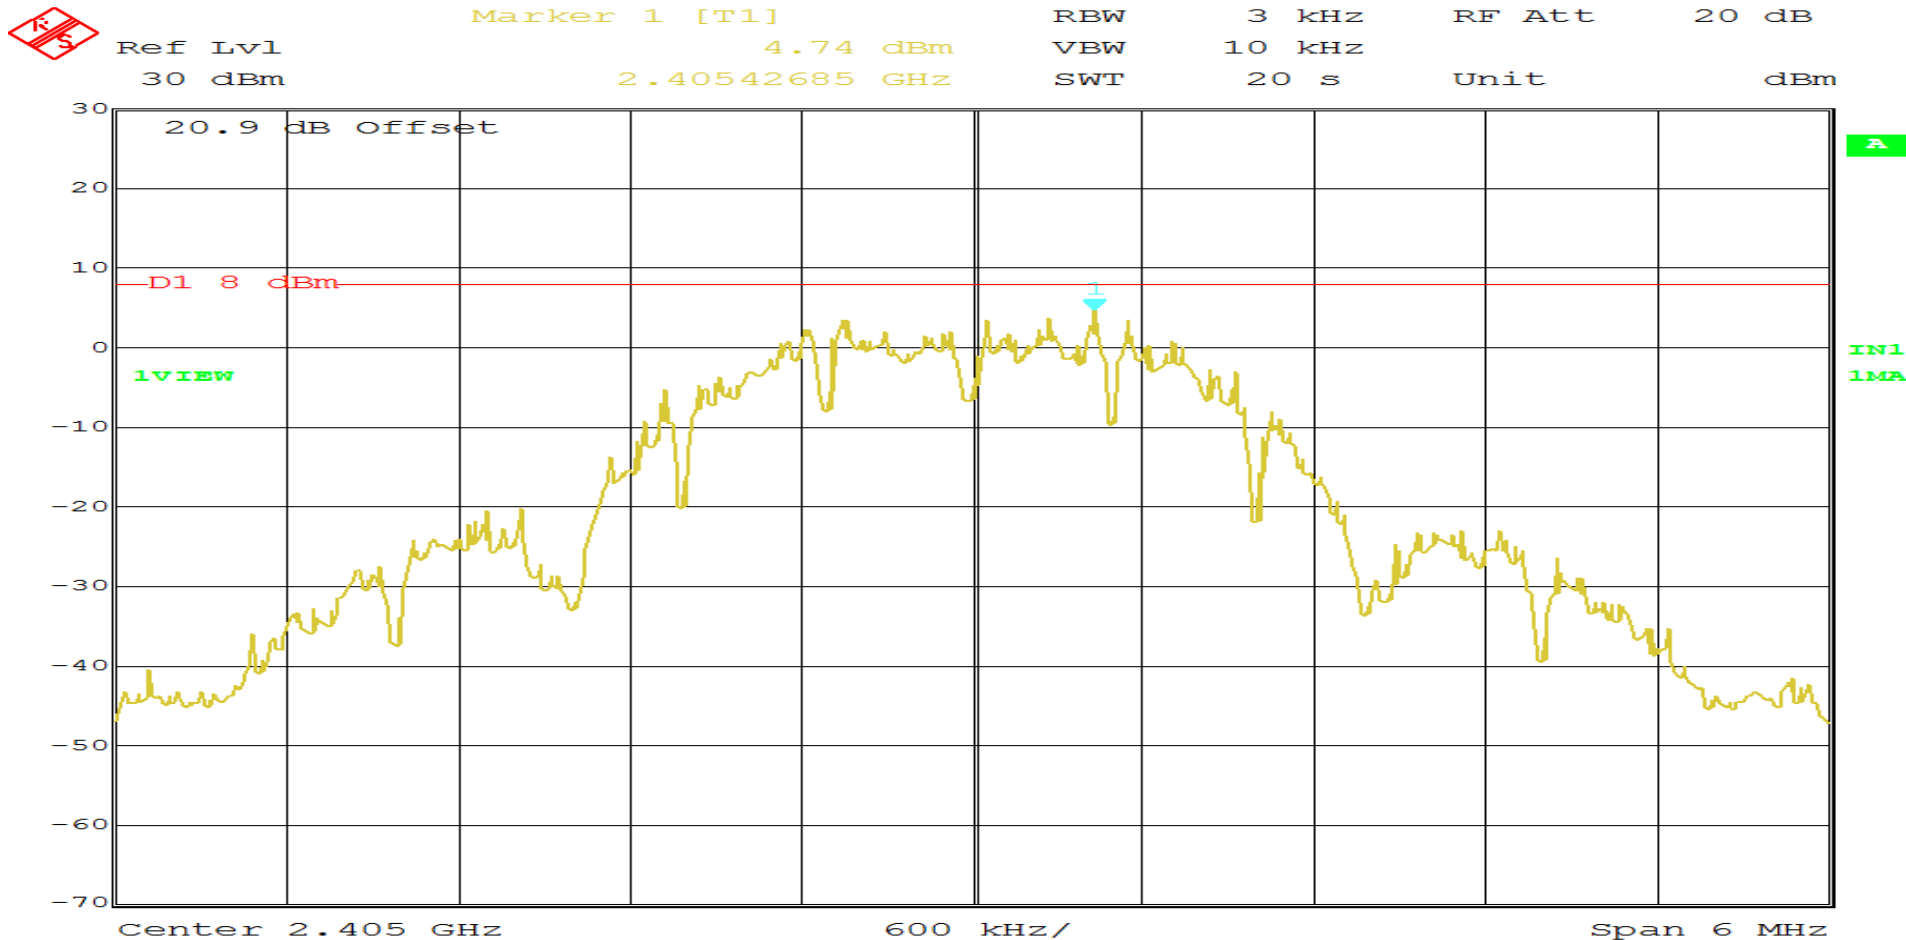

Date: 1.JAN.1997 04:38:27
Page 1 of 3

RETLIF TESTING LABORATORIES


Test Method:	Power Spectral Density		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.440 GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (e)		
Technician	M. Seamans	Date	September 30 th , 2016
Climatic Conditions	Temp: 21.8 °C Relative Humidity: 51.9 %		
Notes	Power Spectral Density: 4.04 dBm Limit: 8 dBm		

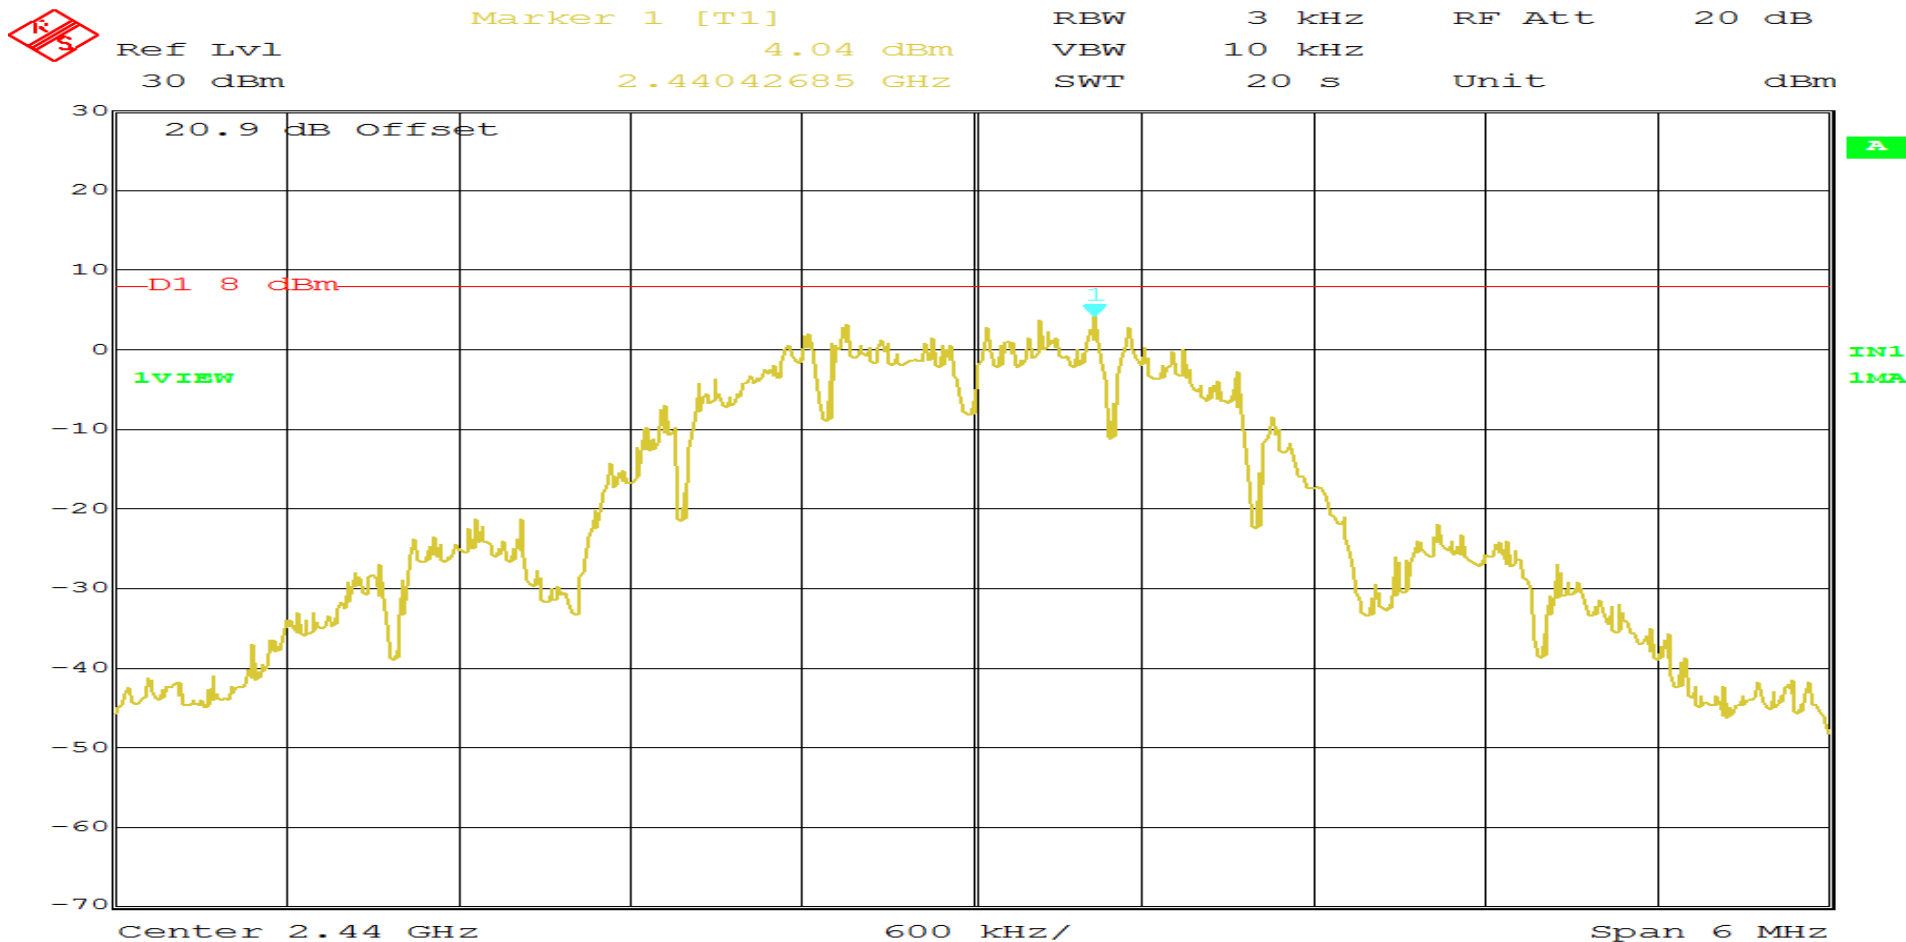

Date: 1.JAN.1997 04:51:09
Page 2 of 3

RETLIF TESTING LABORATORIES

Test Method:	Power Spectral Density		
Customer	Lord Corporation	Job No.	R-6140N-1
Test Sample	Wireless 8 Channel Analog Input Sensor Node		
Model Number	V-Link® 200	Serial No.	6312-2000-19
Operating Mode	Transmitting modulated signal at 2.480GHz		
Test Specification	FCC Part 15, Subpart C Paragraph: 15.247 (e)		
Technician	M. Seamans	Date	September 30 th , 2016
Climatic Conditions	Temp: 21.8 °C Relative Humidity: 51.9 %		
Notes	Power Spectral Density: 4.76 dBm Limit: 8 dBm		

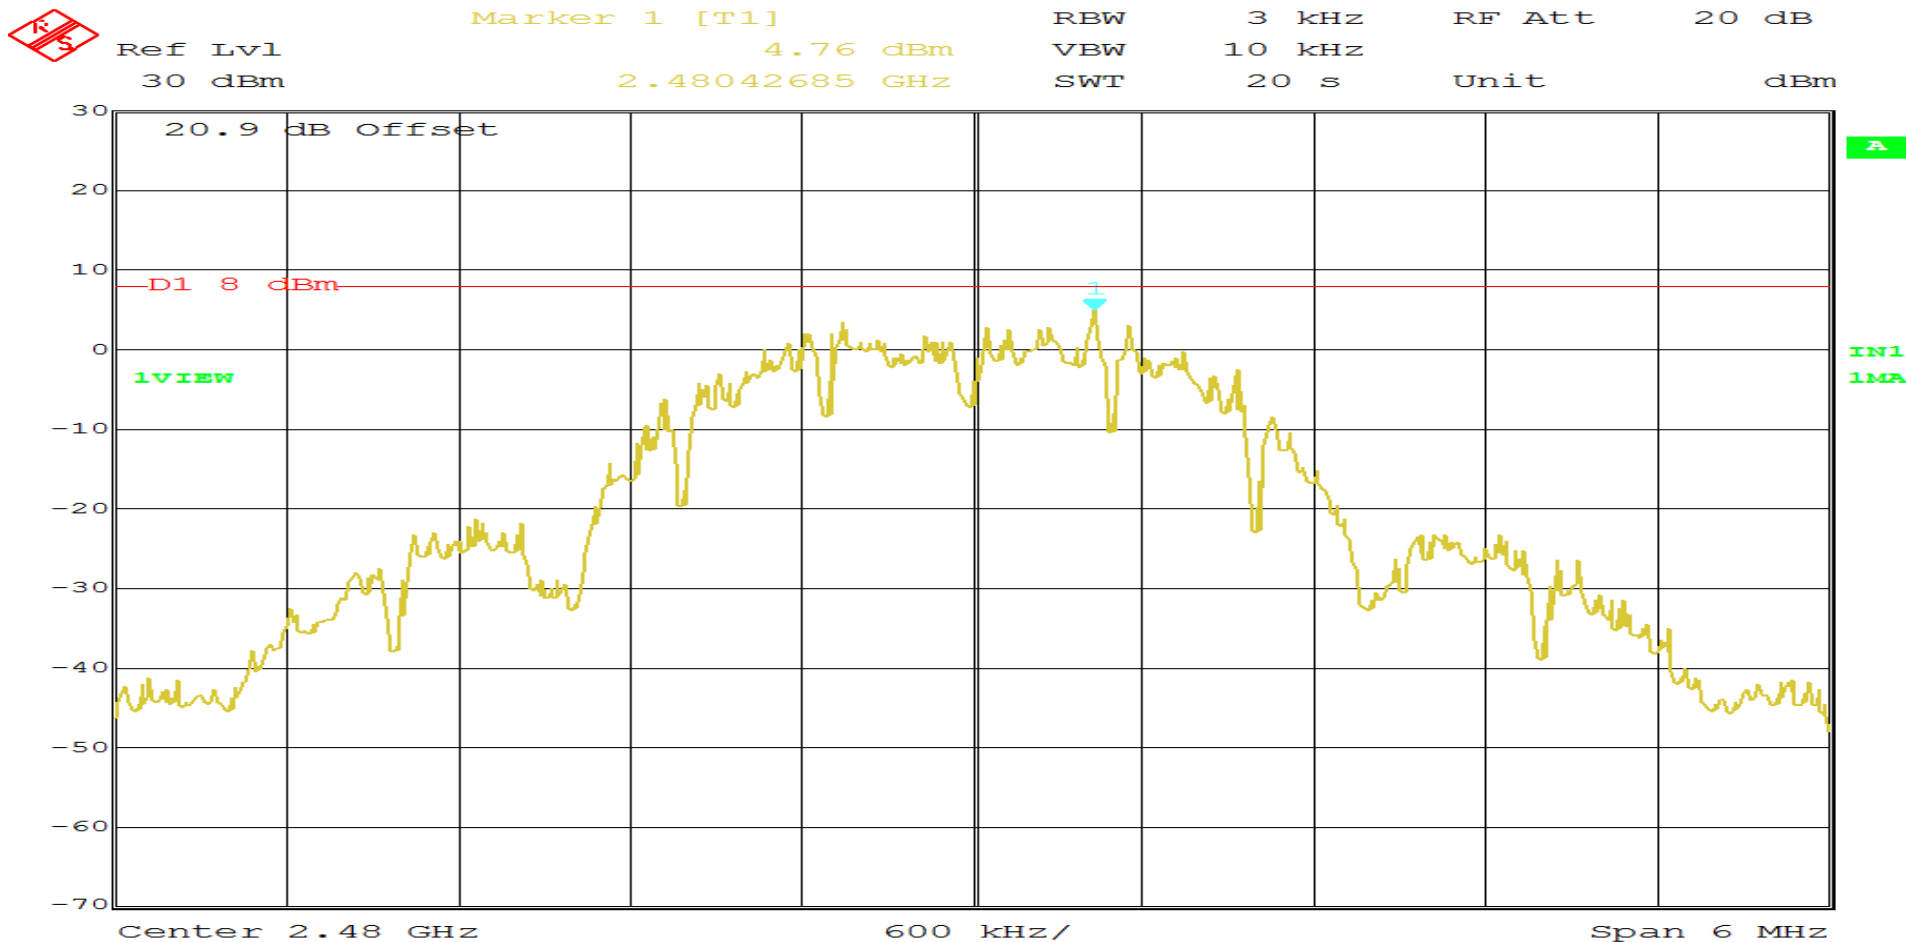

Date: 1.JAN.1997 05:11:48
Page 3 of 3