



LCIE



Accreditation
N°1-1633
Scope available on
www.cofrac.fr

WIFI 5GHz Template: Release October 22nd, 2022

TEST REPORT

N°: 18348762-787335-E (FILE#4712035)

Version : 01

Subject

Radio spectrum matters
tests according to standards:
47 CFR Part 15.407 & RSS 247 Issue 1(DFS Only)

Issued to

INGENICO
9 avenue de la gare – Rovaltain TGV BP25156
26958 - VALENCE Cedex 9
France

Apparatus under test

Product	Payment terminal
Trade mark	INGENICO
Manufacturer	INGENICO
Model under test	Desk/2600
Serial number	230587317081327729816898
FCC ID	XKB-D2600CLW
IC	2586D-D2600CLW

Conclusion

See Test Program chapter

Test date

April 7, 2023

Test location

Moirans

FCC Test site

FR0008 - 197516

ISED Test site

FR0008 - 6500A

Sample receipt date

March 10, 2023

Composition of document

34 pages

Document issued on

April 24, 2023

Written by :
Akram HAKKARI
Tests operator

Approved by :
Majid MOURZAGH
Technical manager



This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the items tested. It does not imply the conformity of the whole production to the items tested Unless otherwise specified or rule defined by the test method, the decision of conformity doesn't take into account the uncertainty of measures. This document doesn't anticipate any certification decision. The COFRAC accreditation attests the technical capability of the testing laboratory for the only tests covered by the accreditation. If some tests mentioned in this report are carried out outside the framework of COFRAC accreditation, they are indicated by the symbol

LCIE

Laboratoire Central des Industries Electriques
Une société de Bureau Veritas

ZI Centr'alp
170 rue de Chatagnon
38430 Moirans FRANCE

Tél : +33 4 76 07 36 36
contact@lcie.fr
www.lcie.fr



PUBLICATION HISTORY

Version	Date	Author	Modification
01	April 24, 2023	Akram HAKKARI	Creation of the document

Each new edition of this test report replaces and cancels the previous edition. The control of the old editions of report is under responsibility of client.



SUMMARY

1.	TEST PROGRAM	4
2.	EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)	5
3.	DFS DETECTION THRESHOLDS DETERMINATION, REFERENCE NOISE LEVEL & CHANNEL LOADING	21
4.	DYNAMIC FREQUENCY SELECTION (DFS): CHANNEL CLOSING TRANSMISSION TIME & CHANNEL MOVE TIME.....	29
5.	ANNEX 1: U-NII DETECTION BANDWIDTH DATA SHEET.....	ERREUR ! SIGNET NON DEFINI.
6.	ANNEX 2: STATISTICAL PERFORMANCE CHECK DATA SHEET	ERREUR ! SIGNET NON DEFINI.
7.	ANNEX 3: RADAR TEST SIGNAL TYPE 5 & 0	33
8.	UNCERTAINTIES CHART	34



1. TEST PROGRAM

References

- 47 CFR Part 15.407 (DFS requirements)
- RSS 247 Issue 1 (DFS requirements)
- KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- KDB 905462 D04 Test Mode New Rules v01 [Pb](#)
- KDB 905462 D03 Client Without DFS New Rules v01r02 [Pb](#)
- KDB 905462 D06 802.11 Channel Plans New Rules v02 [Pb](#)
- KDB 905462 D07 Overview UNII Rules v02 [Pb](#)

Radio requirement:

Clause (47CFR Part 15.407 & RSS 247 Issue 1) Test Description	Test result - Comments			
Channel Availability Check Time & DFS Detection Threshold	☐ PASS	☐ FAIL	☒ NA(1)(2)	☐ NP(3)
U-NII Detection Bandwidth	☐ PASS	☐ FAIL	☒ NA(1)	☐ NP(3)
Statistical Performance Check & DFS Detection Threshold	☒ PASS	☐ FAIL	☐ NA	☐ NP(3)
Channel Closing Transmission Time & Channel Move Time	☒ PASS	☐ FAIL	☐ NA	☐ NP(3)
Non-occupancy period	☐ PASS	☐ FAIL	☒ NA(1)	☐ NP(3)
This table is a summary of test report, see conclusion of each clause of this test report for detail.				

(1): Client without radar detection

(2): Client with radar detection

(3): Limited program

2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT):

INGENICO Desk/2600

Serial Number: 230587317081327729816898



Equipment Under Test

Power supply:

All test are performed with Supply 3 and battery worst case

Name	Type	Rating	Reference / Sn	Comments
Supply1	AC	100-240VAC 0.2A 50-60Hz OUTPUT 5V 1A 5W	PHIHONG AM05R-050CK	/
				
Supply2	AC	100-240VAC 0.2A 50-60Hz OUTPUT 5V 1A 5W	PHIHONG AM05x-050D	/
				
Supply3	AC	100-240VAC 50/60Hz 0.2A OUTPUT 5V 1A 5W	Ktec KSA-5L-050100D5	/
				
Supply4	Battery	3.7Vdc Li-Ion 500mAH /1.85Wh	Springower Technology Model 562542	/



Voltage table used (for Power Line Conducted Emissions):

Type	Measurement performed:	
☒ AC	☒ 120VAC/60Hz	☒ 240VAC/50Hz
☐ DC	☐ +12VDC	☐ -....VDC
☐ Battery	☐ +3.6VDC	☐ -....VDC
☐ USB (Laptop auxiliary)	☐ 120VAC/60Hz (Laptop auxiliary)	☐ 240VAC/50Hz(Laptop auxiliary)

Inputs/outputs - Cable:

Access	Type	Length used (m)	Declared <3m	Shielded	Comments
Supply1	AC	1.2	Yes	No	/
Supply2	AC	1.2	Yes	No	/
Supply3	AC	1.2	Yes	No	/
RJ 45	Ethernet	3	/	/	/
USB	USB C	0.5	/	/	/
USB	USB B	3	/	/	/
USB	USB A	3	/	/	/

Auxiliary equipment used during test:

Type	Reference	Sn	Comments
LAPTOP	DELL E4750	/	Use to set the EUT
ROUTER	D-LINK DIR-868L	/	
USB C Adaptor	STARTECHCOM	/	

Equipment information:

Type:	WIFI			
Frequency band:	☒ 5150MHz-5250MHz	☒ 5250MHz-5350MHz	☒ 5470MHz-5725MHz	
	☒ 5725MHz-5850MHz			
Standard:	☒ 802.11a	☒ 802.11n HT20	☒ 802.11n HT40	
	☐ 802.11ac VHT20	☐ 802.11ac VHT40	☐ 802.11ac VHT80	
	☐ 802.11ac VHT160			
Spectrum Modulation:	☒ OFDM			
Channel bandwidth:	☒ 20MHz	☒ 40MHz	☐ 80MHz	☐ 160MHz
Antenna Type:	☒ Integral	☐ External	☐ Dedicated	
Antenna connector:	☐ Yes	☐ No	☒ Temporary for test	
Transmit chains:	☒ 1	☐ 2	☐ 3	☐ 4
	☐ 5	☐ 6	☐ 7	☐ 8
TPC:	☐ Yes		☒ No	
Receiver chains	☒ 1	☐ 2	☐ 3	☐ 4
	☐ 5	☐ 6	☐ 7	☐ 8
Type of equipment:	☒ Stand-alone	☐ Plug-in	☐ Combined	
Operating temperature range:	Tmin:	☐ -20°C	☒ 0°C	☐ X °C
	Tnom:	20°C		
	Tmax:	☐ 35°C	☐ 55°C	☐ 50 °C
Type of power source:	☒ AC power supply	☐ DC power supply	☒ Battery Battery Type	
Operating voltage range:	Vmin:	☒ 85 V/60Hz	☒ 3.5 Vdc	
	Vnom:	☒ 230/60Hz	☒ 3.7 Vdc	
	Vmax:	☒ 276 V/60Hz	☒ 4.2 Vdc	
Mode:	☐ Master	☐ Slave with radar detection	☒ Slave without radar detection	
	☐ Bridge		☐ Mesh	
Fixed outdoor P to P/M application:	☐ Yes		☒ No	
System architectures:	☒ IP based		☐ Frame based	
User access restriction:	☒ Yes (The manufacturer declares that information regarding the parameters of the detected Radar Waveforms is not available to the end user)		☐ No	



Antenna Characteristic			
Antenna assembly	Gain (dBi)	Frequency Band (MHz)	Impedance(Ω)
1	0	5.15GHz – 5825GHz	50

Hardware information			
Highest internal frequency (PLL, Quartz, Clock, Microprocessor...):		F_{Highest}:	6000 MHz
Firmware (if applicable):		V:	150051
Software (if applicable):		V:	031600
Equipment intended:	Mobile		
Type of equipment:	Stand-alone		
Equipment sample:	Production model		
Duty cycle:	Continuous duty		
Operating temperature range:	T_{min}:	0 °C	
	T_{nom}:	20°C	
	T_{max}:	50 °C	
Operating voltage:	V_{min} (85% V_{nom}):	85VAC 60Hz	
	V_{nom}:	230VAC 60Hz	
	V_{max} (115% V_{nom}):	276VAC 60Hz	

CHANNEL PLAN		
802.11a / 802.11n HT20/ 802.11ac VHT20		
Channel	Frequency (MHz)	Available Channel
36	5180	☒
40	5200	☒
44	5220	☒
48	5240	☒
52	5260	☒
56	5280	☒
60	5300	☒
C6=64	5320	☒
C7=100	5500	☒
104	5520	☒
108	5540	☒
112	5560	☒
116	5580	☒
120	5600	☒
124	5620	☒
128	5640	☒
132	5660	☒
136	5680	☒
140	5700	☒
144	5720	☒
149	5745	☒
153	5765	☒
157	5785	☒
161	5805	☒
165	5825	☒

CHANNEL PLAN		
802.11n HT40/ 802.11ac VHT40		
Channel	Frequency (MHz)	Available Channel
36+40	5190	☒
44+48	5230	☒
52+56	5270	☒
C17=60+64	5310	☒
C18=100+104	5510	☒
108+112	5550	☒
116+120	5590	☒
124+128	5630	☒
132+136	5670	☒
140+144	5710	☒
149+153	5755	☒
157+161	5795	☒

CHANNEL PLAN		
802.11ac VHT80		
Channel	Frequency (MHz)	Available Channel
36+40+44+48	5210	☐
C25=52+56+60+64	5290	☐
C26=100+104+108+112	5530	☐
116+120+124+128	5610	☐
132+136+140+144	5690	☐
149+153+157+161	5775	☐

CHANNEL PLAN		
802.11ac VHT160		
Channel	Frequency (MHz)	Available Channel
C30=36+40+44+48+52+56+60+64	5250	☐
C31=100+104+108+112+116+120+124+128	5570	☐

No DFS Channel
DFS Channel
Weather DFS Channel (Not Authorised for RSS-247)

DATA RATE		
802.11a		
Data Rate (Mbps)	Modulation Type	Modulation Worst Case
6	BPSK	☒
9	BPSK	☐
12	QPSK	☐
18	QPSK	☐
24	16-QAM	☐
36	16-QAM	☐
48	64-QAM	☐
54	64-QAM	☐



L C I E

DATA RATE									
802.11n HT20									
Available for EUT	MCS Index	Spatial streams	Modulation				Data Rate (Mbps)		Worst Case Modulation
							(GI = 800ns)	(GI = 400ns)	
☑	0	1	BPSK				6.5	7.2	☑
	1	1	QPSK				13	14.4	☐
	2	1	QPSK				19.5	21.7	☐
	3	1	16-QAM				26	28.9	☐
	4	1	16-QAM				39	43.3	☐
	5	1	64-QAM				52	57.8	☐
	6	1	64-QAM				58.5	65	☐
☐	7	1	64-QAM				65	72.2	☐
	8	2	BPSK				13	14.4	☐
	9	2	QPSK				26	28.9	☐
	10	2	QPSK				39	43.3	☐
	11	2	16-QAM				52	57.8	☐
	12	2	16-QAM				78	86.7	☐
	13	2	64-QAM				104	115.6	☐
☐	14	2	64-QAM				117	130.3	☐
	15	2	64-QAM				130	144.4	☐
	16	3	BPSK				19.5	21.7	☐
	17	3	QPSK				39	43.3	☐
	18	3	QPSK				58.5	65	☐
	19	3	16-QAM				78	86.7	☐
	20	3	16-QAM				117	130	☐
☐	21	3	64-QAM				156	173.3	☐
	22	3	64-QAM				175.5	195	☐
	23	3	64-QAM				195	216.7	☐
	24	4	BPSK				26	28.9	☐
	25	4	QPSK				52	57.8	☐
	26	4	QPSK				78	86.7	☐
	27	4	16-QAM				104	115.6	☐
☐	28	4	16-QAM				156	173.3	☐
	29	4	64-QAM				208	231.1	☐
	30	4	64-QAM				234	260	☐
	31	4	64-QAM				260	288.9	☐
	32	1	BPSK	-	-	-	-	-	☐
	33	2	16-QAM	QPSK	-	-	39	43.3	☐
	34	2	64-QAM	QPSK	-	-	52	57.8	☐
☐	35	2	64-QAM	16-QAM	-	-	65	72.2	☐
	36	2	16-QAM	QPSK	-	-	58.5	65	☐
	37	2	64-QAM	QPSK	-	-	78	86.7	☐
	38	2	64-QAM	16-QAM	-	-	97.5	108.3	☐
	39	3	16-QAM	QPSK	QPSK	-	52	57.8	☐
	40	3	16-QAM	16-QAM	QPSK	-	65	72.2	☐
	41	3	64-QAM	QPSK	QPSK	-	65	72.2	☐
☐	42	3	64-QAM	16-QAM	QPSK	-	78	86.7	☐
	43	3	64-QAM	16-QAM	16-QAM	-	91	101.1	☐
	44	3	64-QAM	64-QAM	QPSK	-	91	101.1	☐
	45	3	64-QAM	64-QAM	16-QAM	-	104	115.6	☐
	46	3	16-QAM	QPSK	QPSK	-	78	86.7	☐
	47	3	16-QAM	16-QAM	QPSK	-	97.5	108.3	☐
	48	3	64-QAM	QPSK	QPSK	-	97.5	108.3	☐
☐	49	3	64-QAM	16-QAM	QPSK	-	117	130	☐
	50	3	64-QAM	16-QAM	16-QAM	-	136.5	151.7	☐
	51	3	64-QAM	64-QAM	QPSK	-	136.5	151.7	☐
	52	3	64-QAM	64-QAM	16-QAM	-	156	173.3	☐
	53	4	16-QAM	QPSK	QPSK	QPSK	65	72.2	☐
	54	4	16-QAM	16-QAM	QPSK	QPSK	78	86.7	☐
	55	4	16-QAM	16-QAM	16-QAM	QPSK	91	101.1	☐
☐	56	4	64-QAM	QPSK	QPSK	QPSK	78	86.7	☐
	57	4	64-QAM	16-QAM	QPSK	QPSK	91	101.1	☐
	58	4	64-QAM	16-QAM	16-QAM	QPSK	104	115.6	☐
	59	4	64-QAM	16-QAM	16-QAM	16-QAM	117	130	☐
	60	4	64-QAM	QPSK	QPSK	QPSK	104	115.6	☐
	61	4	64-QAM	16-QAM	16-QAM	QPSK	117	130	☐
	62	4	64-QAM	16-QAM	16-QAM	16-QAM	130	144.4	☐
☐	63	4	64-QAM	64-QAM	64-QAM	QPSK	130	144.4	☐
	64	4	64-QAM	64-QAM	64-QAM	16-QAM	143	158.9	☐
	65	4	16-QAM	QPSK	QPSK	QPSK	97.5	108.3	☐
	66	4	16-QAM	16-QAM	QPSK	QPSK	117	130	☐
	67	4	16-QAM	16-QAM	16-QAM	QPSK	136.5	151.7	☐
	68	4	64-QAM	QPSK	QPSK	QPSK	117	130	☐
	69	4	64-QAM	16-QAM	QPSK	QPSK	136.5	151.7	☐
☐	70	4	64-QAM	16-QAM	16-QAM	QPSK	156	173.3	☐
	71	4	64-QAM	16-QAM	16-QAM	16-QAM	175.5	195	☐
	72	4	64-QAM	64-QAM	QPSK	QPSK	156	173.3	☐
	73	4	64-QAM	64-QAM	16-QAM	QPSK	175.5	195	☐
	74	4	64-QAM	64-QAM	16-QAM	16-QAM	195	216.7	☐
	75	4	64-QAM	64-QAM	64-QAM	QPSK	195	216.7	☐
	76	4	64-QAM	64-QAM	64-QAM	16-QAM	214.5	238.3	☐



L C I E

DATA RATE									
802.11n HT40									
Available for EUT	MCS Index	Spatial streams	Modulation				Data Rate (Mbps)		Worst Case Modulation
							(GI = 800ns)	(GI = 400ns)	
☑	0	1	BPSK				13	15	☑
	1	1	QPSK				27	30	☐
	2	1	QPSK				40.5	45	☐
	3	1	16-QAM				54	60	☐
	4	1	16-QAM				81	90	☐
	5	1	64-QAM				108	120	☐
	6	1	64-QAM				121.5	135	☐
☐	7	1	64-QAM				135	150	☐
	8	2	BPSK				27	30	☐
	9	2	QPSK				54	60	☐
	10	2	QPSK				81	90	☐
	11	2	16-QAM				108	120	☐
	12	2	16-QAM				162	180	☐
	13	2	64-QAM				216	240	☐
☐	14	2	64-QAM				243	270	☐
	15	2	64-QAM				270	300	☐
	16	3	BPSK				40.5	45	☐
	17	3	QPSK				81	90	☐
	18	3	QPSK				121.5	135	☐
	19	3	16-QAM				162	180	☐
	20	3	16-QAM				243	270	☐
☐	21	3	64-QAM				324	360	☐
	22	3	64-QAM				364.5	405	☐
	23	3	64-QAM				405	450	☐
	24	4	BPSK				54	60	☐
	25	4	QPSK				108	120	☐
	26	4	QPSK				162	180	☐
	27	4	16-QAM				216	240	☐
☐	28	4	16-QAM				324	360	☐
	29	4	64-QAM				432	480	☐
	30	4	64-QAM				486	540	☐
	31	4	64-QAM				540	600	☐
	32	1	BPSK	-	-	-	6.0	6.7	☐
	33	2	16-QAM	QPSK	-	-	81	90.0	☐
	34	2	64-QAM	QPSK	-	-	108	120	☐
☐	35	2	64-QAM	16-QAM	-	-	135	150	☐
	36	2	16-QAM	QPSK	-	-	121.5	135	☐
	37	2	64-QAM	QPSK	-	-	162	180	☐
	38	2	64-QAM	16-QAM	-	-	202.5	225	☐
	39	3	16-QAM	QPSK	QPSK	-	108	120	☐
	40	3	16-QAM	16-QAM	QPSK	-	135	150	☐
	41	3	64-QAM	QPSK	QPSK	-	135	150	☐
☐	42	3	64-QAM	16-QAM	QPSK	-	162	180	☐
	43	3	64-QAM	16-QAM	16-QAM	-	189	210	☐
	44	3	64-QAM	64-QAM	QPSK	-	189	210	☐
	45	3	64-QAM	64-QAM	16-QAM	-	216	240	☐
	46	3	16-QAM	QPSK	QPSK	-	162	180	☐
	47	3	16-QAM	16-QAM	QPSK	-	202.5	225	☐
	48	3	64-QAM	QPSK	QPSK	-	202.5	225	☐
☐	49	3	64-QAM	16-QAM	QPSK	-	243	270	☐
	50	3	64-QAM	16-QAM	16-QAM	-	283.5	315	☐
	51	3	64-QAM	64-QAM	QPSK	-	283.5	315	☐
	52	3	64-QAM	64-QAM	16-QAM	-	324	360	☐
	53	4	16-QAM	QPSK	QPSK	QPSK	135	150	☐
	54	4	16-QAM	16-QAM	QPSK	QPSK	162	180	☐
	55	4	16-QAM	16-QAM	16-QAM	QPSK	189	210	☐
☐	56	4	64-QAM	QPSK	QPSK	QPSK	162	180	☐
	57	4	64-QAM	16-QAM	QPSK	QPSK	189	210	☐
	58	4	64-QAM	16-QAM	16-QAM	QPSK	216	240	☐
	59	4	64-QAM	16-QAM	16-QAM	16-QAM	243	270	☐
	60	4	64-QAM	QPSK	QPSK	QPSK	216	240	☐
	61	4	64-QAM	16-QAM	16-QAM	QPSK	243	270	☐
	62	4	64-QAM	16-QAM	16-QAM	16-QAM	270	300	☐
☐	63	4	64-QAM	64-QAM	64-QAM	QPSK	270	300	☐
	64	4	64-QAM	64-QAM	64-QAM	16-QAM	297	330	☐
	65	4	16-QAM	QPSK	QPSK	QPSK	202.5	225	☐
	66	4	16-QAM	16-QAM	QPSK	QPSK	243	270	☐
	67	4	16-QAM	16-QAM	16-QAM	QPSK	283.5	315	☐
	68	4	64-QAM	QPSK	QPSK	QPSK	243	270	☐
	69	4	64-QAM	16-QAM	QPSK	QPSK	283.5	315	☐
☐	70	4	64-QAM	16-QAM	16-QAM	QPSK	324	360	☐
	71	4	64-QAM	16-QAM	16-QAM	16-QAM	364.5	405	☐
	72	4	64-QAM	64-QAM	QPSK	QPSK	324	360	☐
	73	4	64-QAM	64-QAM	16-QAM	QPSK	364.5	405	☐
	74	4	64-QAM	64-QAM	16-QAM	16-QAM	405	450	☐
	75	4	64-QAM	64-QAM	64-QAM	QPSK	405	450	☐
	76	4	64-QAM	64-QAM	64-QAM	16-QAM	445.5	495	☐

DATA RATE: 802.11ac VHT20							
Available for EUT	MCS Index	Nbr of spatial streams	Modulation (Stream 1/2/3/4)	Coding rate	GI = 800ns	GI = 400ns	Worst Case Modulation



□	0	1	BPSK	1/2	6,5	7,2	□
	1	1	QPSK	1/2	13	14,4	□
	2	1	QPSK	3/4	19,5	21,7	□
	3	1	16-QAM	1/2	26	28,9	□
	4	1	16-QAM	3/4	39	43,3	□
	5	1	64-QAM	2/3	52	57,8	□
	6	1	64-QAM	3/4	58,5	65	□
	7	1	64-QAM	5/6	65	72,2	□
	8	1	256-QAM	3/4	78	86,7	□
	9	1	256-QAM	5/6	N/A	N/A	□
□	10	2	BPSK	1/2	13	14,4	□
	11	2	QPSK	1/2	26	28,8	□
	12	2	QPSK	3/4	39	43,4	□
	13	2	16-QAM	1/2	52	57,8	□
	14	2	16-QAM	3/4	78	86,6	□
	15	2	64-QAM	2/3	104	115,6	□
	16	2	64-QAM	3/4	117	130	□
	17	2	64-QAM	5/6	130	144,4	□
	18	2	256-QAM	3/4	156	173,4	□
□	19	2	256-QAM	5/6	N/A	N/A	□
	20	3	BPSK	1/2	19,5	21,6	□
	21	3	QPSK	1/2	39	43,2	□
	22	3	QPSK	3/4	58,5	65,1	□
	23	3	16-QAM	1/2	78	86,7	□
	24	3	16-QAM	3/4	117	129,9	□
	25	3	64-QAM	2/3	156	173,4	□
	26	3	64-QAM	3/4	175,5	195	□
	27	3	64-QAM	5/6	195	216,6	□
□	28	3	256-QAM	3/4	234	260,1	□
	29	3	256-QAM	5/6	N/A	N/A	□
	30	4	BPSK	1/2	26	28,8	□
	31	4	QPSK	1/2	52	57,6	□
	32	4	QPSK	3/4	78	86,8	□
	33	4	16-QAM	1/2	104	115,6	□
	34	4	16-QAM	3/4	156	173,2	□
	35	4	64-QAM	2/3	208	231,2	□
	36	4	64-QAM	3/4	234	260	□
□	37	4	64-QAM	5/6	260	288,8	□
	38	4	256-QAM	3/4	312	346,8	□
	39	4	256-QAM	5/6	N/A	N/A	□
	40	5	BPSK	1/2	32,5	36	□
	41	5	QPSK	1/2	65	72	□
	42	5	QPSK	3/4	97,5	108,5	□
	43	5	16-QAM	1/2	130	144,5	□
	44	5	16-QAM	3/4	195	216,5	□
	45	5	64-QAM	2/3	260	289	□
□	46	5	64-QAM	3/4	292,5	325	□
	47	5	64-QAM	5/6	325	361	□
	48	5	256-QAM	3/4	390	433,5	□
	49	5	256-QAM	5/6	N/A	N/A	□
	50	6	BPSK	1/2	39	43,2	□
	51	6	QPSK	1/2	78	86,4	□
	52	6	QPSK	3/4	117	130,2	□
	53	6	16-QAM	1/2	156	173,4	□
	54	6	16-QAM	3/4	234	259,8	□
□	55	6	64-QAM	2/3	312	346,8	□
	56	6	64-QAM	3/4	351	390	□
	57	6	64-QAM	5/6	390	433,2	□
	58	6	256-QAM	3/4	468	520,2	□
	59	6	256-QAM	5/6	N/A	N/A	□
	60	7	BPSK	1/2	45,5	50,4	□
	61	7	QPSK	1/2	91	100,8	□
	62	7	QPSK	3/4	136,5	151,9	□
	63	7	16-QAM	1/2	182	202,3	□
□	64	7	16-QAM	3/4	273	303,1	□
	65	7	64-QAM	2/3	364	404,6	□
	66	7	64-QAM	3/4	409,5	455	□
	67	7	64-QAM	5/6	455	505,4	□
	68	7	256-QAM	3/4	546	606,9	□
	69	7	256-QAM	5/6	N/A	N/A	□
	70	8	BPSK	1/2	52	57,6	□
	71	8	QPSK	1/2	104	115,2	□
	72	8	QPSK	3/4	156	173,6	□
□	73	8	16-QAM	1/2	208	231,2	□
	74	8	16-QAM	3/4	312	346,4	□
	75	8	64-QAM	2/3	416	462,4	□
	76	8	64-QAM	3/4	468	520	□
	77	8	64-QAM	5/6	520	577,6	□
	78	8	256-QAM	3/4	624	693,6	□
	79	8	256-QAM	5/6	N/A	N/A	□



DATA RATE: 802.11ac VHT40							
Available for EUT	MCS Index	Nbr of spatial streams	Modulation (Stream 1/2/3/4)	Coding rate	GI = 800ns	GI = 400ns	Worst Case Modulation
□	0	1	BPSK	1/2	13,5	15	□
	1	1	QPSK	1/2	27	30	□
	2	1	QPSK	3/4	40,5	45	□
	3	1	16-QAM	1/2	54	60	□
	4	1	16-QAM	3/4	81	90	□
	5	1	64-QAM	2/3	108	120	□
	6	1	64-QAM	3/4	121,5	135	□
	7	1	64-QAM	5/6	135	150	□
	8	1	256-QAM	3/4	162	180	□
□	9	1	256-QAM	5/6	180	200	□
	10	2	BPSK	1/2	27	30	□
	11	2	QPSK	1/2	54	60	□
	12	2	QPSK	3/4	81	90	□
	13	2	16-QAM	1/2	108	120	□
	14	2	16-QAM	3/4	162	180	□
	15	2	64-QAM	2/3	216	240	□
	16	2	64-QAM	3/4	243	270	□
	17	2	64-QAM	5/6	270	300	□
□	18	2	256-QAM	3/4	324	360	□
	19	2	256-QAM	5/6	360	400	□
	20	3	BPSK	1/2	40,5	45	□
	21	3	QPSK	1/2	81	90	□
	22	3	QPSK	3/4	121,5	135	□
	23	3	16-QAM	1/2	162	180	□
	24	3	16-QAM	3/4	243	270	□
	25	3	64-QAM	2/3	324	360	□
	26	3	64-QAM	3/4	364,5	405	□
□	27	3	64-QAM	5/6	405	450	□
	28	3	256-QAM	3/4	486	540	□
	29	3	256-QAM	5/6	540	600	□
	30	4	BPSK	1/2	54	60	□
	31	4	QPSK	1/2	108	120	□
	32	4	QPSK	3/4	162	180	□
	33	4	16-QAM	1/2	216	240	□
	34	4	16-QAM	3/4	324	360	□
	35	4	64-QAM	2/3	432	480	□
□	36	4	64-QAM	3/4	486	540	□
	37	4	64-QAM	5/6	540	600	□
	38	4	256-QAM	3/4	648	720	□
	39	4	256-QAM	5/6	720	800	□
	40	5	BPSK	1/2	67,5	75	□
	41	5	QPSK	1/2	135	150	□
	42	5	QPSK	3/4	202,5	225	□
	43	5	16-QAM	1/2	270	300	□
	44	5	16-QAM	3/4	405	450	□
□	45	5	64-QAM	2/3	540	600	□
	46	5	64-QAM	3/4	607,5	675	□
	47	5	64-QAM	5/6	675	750	□
	48	5	256-QAM	3/4	810	900	□
	49	5	256-QAM	5/6	900	1000	□
	50	6	BPSK	1/2	81	90	□
	51	6	QPSK	1/2	162	180	□
	52	6	QPSK	3/4	243	270	□
	53	6	16-QAM	1/2	324	360	□
□	54	6	16-QAM	3/4	486	540	□
	55	6	64-QAM	2/3	648	720	□
	56	6	64-QAM	3/4	729	810	□
	57	6	64-QAM	5/6	810	900	□
	58	6	256-QAM	3/4	972	1080	□
	59	6	256-QAM	5/6	1080	1200	□
	60	7	BPSK	1/2	94,5	105	□
	61	7	QPSK	1/2	189	210	□
	62	7	QPSK	3/4	283,5	315	□
□	63	7	16-QAM	1/2	378	420	□
	64	7	16-QAM	3/4	567	630	□
	65	7	64-QAM	2/3	756	840	□
	66	7	64-QAM	3/4	850,5	945	□
	67	7	64-QAM	5/6	945	1050	□
	68	7	256-QAM	3/4	1134	1260	□
	69	7	256-QAM	5/6	1260	1400	□
	70	8	BPSK	1/2	108	120	□
	71	8	QPSK	1/2	216	240	□
□	72	8	QPSK	3/4	324	360	□
	73	8	16-QAM	1/2	432	480	□
	74	8	16-QAM	3/4	648	720	□
	75	8	64-QAM	2/3	864	960	□
	76	8	64-QAM	3/4	972	1080	□
	77	8	64-QAM	5/6	1080	1200	□
	78	8	256-QAM	3/4	1296	1440	□
	79	8	256-QAM	5/6	1440	1600	□



L C I E

DATA RATE: 802.11ac VHT80							
Available for EUT	MCS Index	Nbr of spatial streams	Modulation (Stream 1/2/3/4)	Coding rate	GI = 800ns	GI = 400ns	Worst Case Modulation
□	0	1	BPSK	1/2	29.3	32.5	□
	1	1	QPSK	1/2	58.5	65	□
	2	1	QPSK	3/4	87.8	97.5	□
	3	1	16-QAM	1/2	117	130	□
	4	1	16-QAM	3/4	175.5	195	□
	5	1	64-QAM	2/3	234	260	□
	6	1	64-QAM	3/4	263.3	292.5	□
	7	1	64-QAM	5/6	292.5	325	□
	8	1	256-QAM	3/4	351	390	□
□	9	1	256-QAM	5/6	390	433.3	□
	10	2	BPSK	1/2	58.6	65	□
	11	2	QPSK	1/2	117	130	□
	12	2	QPSK	3/4	175.6	195	□
	13	2	16-QAM	1/2	234	260	□
	14	2	16-QAM	3/4	351	390	□
	15	2	64-QAM	2/3	468	520	□
	16	2	64-QAM	3/4	526.6	585	□
	17	2	64-QAM	5/6	585	650	□
□	18	2	256-QAM	3/4	702	780	□
	19	2	256-QAM	5/6	780	866.6	□
	20	3	BPSK	1/2	87.9	97.5	□
	21	3	QPSK	1/2	175.5	195	□
	22	3	QPSK	3/4	263.4	292.5	□
	23	3	16-QAM	1/2	351	390	□
	24	3	16-QAM	3/4	526.5	585	□
	25	3	64-QAM	2/3	702	780	□
	26	3	64-QAM	3/4	789.9	877.5	□
□	27	3	64-QAM	5/6	877.5	975	□
	28	3	256-QAM	3/4	1053	1170	□
	29	3	256-QAM	5/6	1170	1299.9	□
	30	4	BPSK	1/2	117.2	130	□
	31	4	QPSK	1/2	234	260	□
	32	4	QPSK	3/4	351.2	390	□
	33	4	16-QAM	1/2	468	520	□
	34	4	16-QAM	3/4	702	780	□
	35	4	64-QAM	2/3	936	1040	□
□	36	4	64-QAM	3/4	1053.2	1170	□
	37	4	64-QAM	5/6	1170	1300	□
	38	4	256-QAM	3/4	1404	1560	□
	39	4	256-QAM	5/6	1560	1733.2	□
	40	5	BPSK	1/2	146.5	162.5	□
	41	5	QPSK	1/2	292.5	325	□
	42	5	QPSK	3/4	439	487.5	□
	43	5	16-QAM	1/2	585	650	□
	44	5	16-QAM	3/4	877.5	975	□
□	45	5	64-QAM	2/3	1170	1300	□
	46	5	64-QAM	3/4	1316.5	1462.5	□
	47	5	64-QAM	5/6	1462.5	1625	□
	48	5	256-QAM	3/4	1755	1950	□
	49	5	256-QAM	5/6	1950	2166.5	□
	50	6	BPSK	1/2	175.8	195	□
	51	6	QPSK	1/2	351	390	□
	52	6	QPSK	3/4	526.8	585	□
	53	6	16-QAM	1/2	702	780	□
□	54	6	16-QAM	3/4	1053	1170	□
	55	6	64-QAM	2/3	1404	1560	□
	56	6	64-QAM	3/4	1579.8	1755	□
	57	6	64-QAM	5/6	1755	1950	□
	58	6	256-QAM	3/4	2106	2340	□
	59	6	256-QAM	5/6	2340	2599.8	□
	60	7	BPSK	1/2	205.1	227.5	□
	61	7	QPSK	1/2	409.5	455	□
	62	7	QPSK	3/4	614.6	682.5	□
□	63	7	16-QAM	1/2	819	910	□
	64	7	16-QAM	3/4	1228.5	1365	□
	65	7	64-QAM	2/3	1638	1820	□
	66	7	64-QAM	3/4	1843.1	2047.5	□
	67	7	64-QAM	5/6	2047.5	2275	□
	68	7	256-QAM	3/4	2457	2730	□
	69	7	256-QAM	5/6	2730	3033.1	□
	70	8	BPSK	1/2	234.4	260	□
	71	8	QPSK	1/2	468	520	□
□	72	8	QPSK	3/4	702.4	780	□
	73	8	16-QAM	1/2	936	1040	□
	74	8	16-QAM	3/4	1404	1560	□
	75	8	64-QAM	2/3	1872	2080	□
	76	8	64-QAM	3/4	2106.4	2340	□
	77	8	64-QAM	5/6	2340	2600	□
	78	8	256-QAM	3/4	2808	3120	□
	79	8	256-QAM	5/6	3120	3466.4	□

DATA RATE: 802.11ac VHT160

Available for EUT	MCS Index	Nbr of spatial streams	Modulation (Stream 1/2/3/4)	Coding rate	GI = 800ns	GI = 400ns	Worst Case Modulation
□	0	1	BPSK	1/2	58,5	65	□
	1	1	QPSK	1/2	117	130	□
	2	1	QPSK	3/4	175,5	195	□
	3	1	16-QAM	1/2	234	260	□
	4	1	16-QAM	3/4	351	390	□
	5	1	64-QAM	2/3	468	520	□
	6	1	64-QAM	3/4	526,5	585	□
	7	1	64-QAM	5/6	585	650	□
	8	1	256-QAM	3/4	702	780	□
□	9	1	256-QAM	5/6	780	866,6	□
	10	2	BPSK	1/2	117	130	□
	11	2	QPSK	1/2	234	260	□
	12	2	QPSK	3/4	351	390	□
	13	2	16-QAM	1/2	468	520	□
	14	2	16-QAM	3/4	702	780	□
	15	2	64-QAM	2/3	936	1040	□
	16	2	64-QAM	3/4	1053	1170	□
	17	2	64-QAM	5/6	1170	1300	□
□	18	2	256-QAM	3/4	1404	1560	□
	19	2	256-QAM	5/6	1560	1733,3	□
	20	3	BPSK	1/2	175,5	195	□
	21	3	QPSK	1/2	351	390	□
	22	3	QPSK	3/4	526,5	585	□
	23	3	16-QAM	1/2	702	780	□
	24	3	16-QAM	3/4	1053	1170	□
	25	3	64-QAM	2/3	1404	1560	□
	26	3	64-QAM	3/4	1579,5	1755	□
□	27	3	64-QAM	5/6	1755	1950	□
	28	3	256-QAM	3/4	2106	2340	□
	29	3	256-QAM	5/6	-	-	□
	30	4	BPSK	1/2	234	260	□
	31	4	QPSK	1/2	468	520	□
	32	4	QPSK	3/4	702	780	□
	33	4	16-QAM	1/2	936	1040	□
	34	4	16-QAM	3/4	1404	1560	□
	35	4	64-QAM	2/3	1872	2080	□
□	36	4	64-QAM	3/4	2106	2340	□
	37	4	64-QAM	5/6	2340	2600	□
	38	4	256-QAM	3/4	2808	3120	□
	39	4	256-QAM	5/6	3120	3466,7	□
	40	5	BPSK	1/2	292,5	325	□
	41	5	QPSK	1/2	585	650	□
	42	5	QPSK	3/4	877,5	975	□
	43	5	16-QAM	1/2	1170	1300	□
	44	5	16-QAM	3/4	1755	1950	□
□	45	5	64-QAM	2/3	2340	2600	□
	46	5	64-QAM	3/4	2632,5	2925	□
	47	5	64-QAM	5/6	2925	3250	□
	48	5	256-QAM	3/4	3510	3900	□
	49	5	256-QAM	5/6	3900	4333,3	□
	50	6	BPSK	1/2	351	390	□
	51	6	QPSK	1/2	702	780	□
	52	6	QPSK	3/4	1053	1170	□
	53	6	16-QAM	1/2	1404	1560	□
□	54	6	16-QAM	3/4	2106	2340	□
	55	6	64-QAM	2/3	2808	3120	□
	56	6	64-QAM	3/4	3159	3510	□
	57	6	64-QAM	5/6	3510	3900	□
	58	6	256-QAM	3/4	4212	4680	□
	59	6	256-QAM	5/6	4680	5200	□
	60	7	BPSK	1/2	409,5	455	□
	61	7	QPSK	1/2	819	910	□
	62	7	QPSK	3/4	1228,5	1365	□
□	63	7	16-QAM	1/2	1638	1820	□
	64	7	16-QAM	3/4	2457	2730	□
	65	7	64-QAM	2/3	3276	3640	□
	66	7	64-QAM	3/4	3685,5	4095	□
	67	7	64-QAM	5/6	4095	4550	□
	68	7	256-QAM	3/4	4914	5460	□
	69	7	256-QAM	5/6	5460	6066,7	□
	70	8	BPSK	1/2	468	520	□
	71	8	QPSK	1/2	936	1040	□
□	72	8	QPSK	3/4	1404	1560	□
	73	8	16-QAM	1/2	1872	2080	□
	74	8	16-QAM	3/4	2808	3120	□
	75	8	64-QAM	2/3	3744	4160	□
	76	8	64-QAM	3/4	4212	4680	□
	77	8	64-QAM	5/6	4680	5200	□
	78	8	256-QAM	3/4	5616	6240	□
	79	8	256-QAM	5/6	6240	6932,3	□



Test report reference: N°18348762-787335-D (FILE#4712035)

802.11a		
Channel	C6	C7
Occupied Bandwidth (MHz)	17.6	17.656


802.11n HT20/ac VHT20		
Channel	C6	C7
Occupied Bandwidth (MHz)	16.536	16.528

802.11n HT40/ac VHT40		
Channel	C17	C18
Occupied Bandwidth (MHz)	36.336	36.224

2.2. RUNNING MODE

Test mode	Description of test mode
Test mode 1	Emission-reception with a duty cycle above 17% in the data rate that produced the highest output power and Iperf traffic in udp mode(1)


(1) System testings is performed with iperf test software in udp mode from the Master Device to the Client Device on the test channel. The data traffic is performed Laptop 2 to Laptop 1

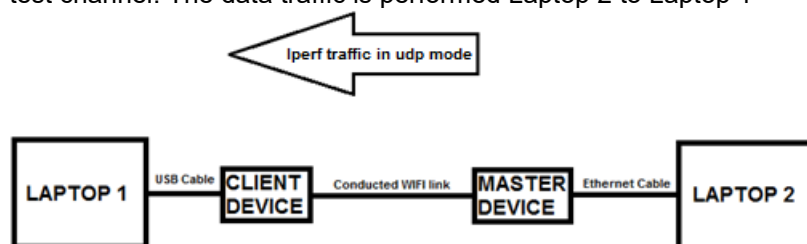

Test	Running mode
Channel Availability Check Time & DFS Detection Threshold	☒ Test mode 1 (1) ☐ Alternative test mode()
U-NII Detection Bandwidth	☒ Test mode 1 (1) ☐ Alternative test mode()
Statistical Performance Check & DFS Detection Threshold	☒ Test mode 1 (1) ☐ Alternative test mode()
Channel Closing Transmission Time & Channel Move Time	☒ Test mode 1 (1) ☐ Alternative test mode()
Non-occupancy period	☒ Test mode 1 (1) ☐ Alternative test mode()

- (1) Following commands with the specific test software "X" are used to set the product:
- See document "X"(provided by customer) for the command used during test.

2.3. EQUIPMENT LABELLING

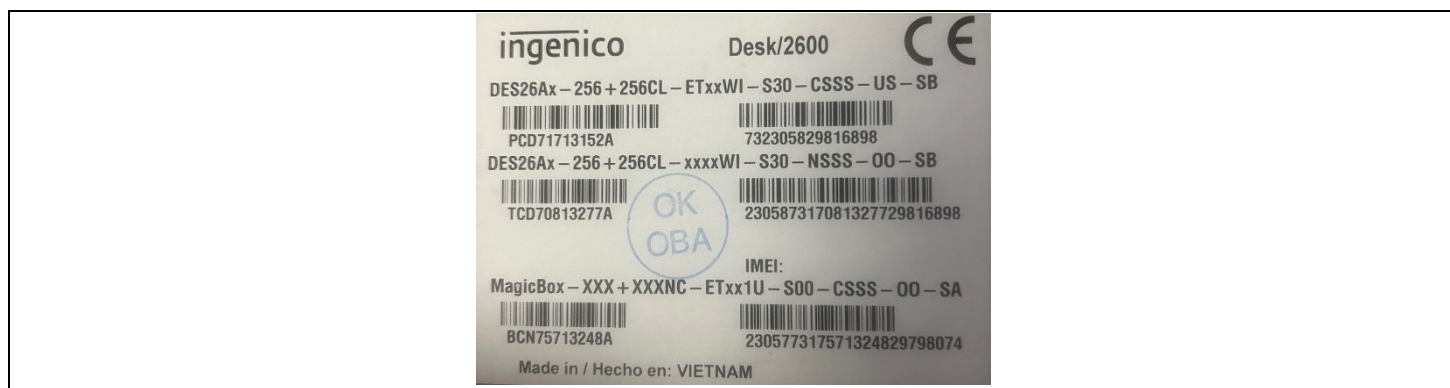

2.4. EQUIPMENT MODIFICATION

☒ None ☐ Modification:

3. DFS DETECTION THRESHOLDS DETERMINATION, REFERENCE NOISE LEVEL & CHANNEL LOADING

3.1. TEST CONDITIONS

Test performed by : Majid MOURZAGH - Akram HAKKARI
Date of test : April 7, 2023
Ambient temperature : 21 °C
Relative humidity : 30 %


3.2. TEST SETUP


- The Equipment Under Test is:

- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer:

- ☒ On the EUT conducted access
- ☐ On the EUT with a test fixture

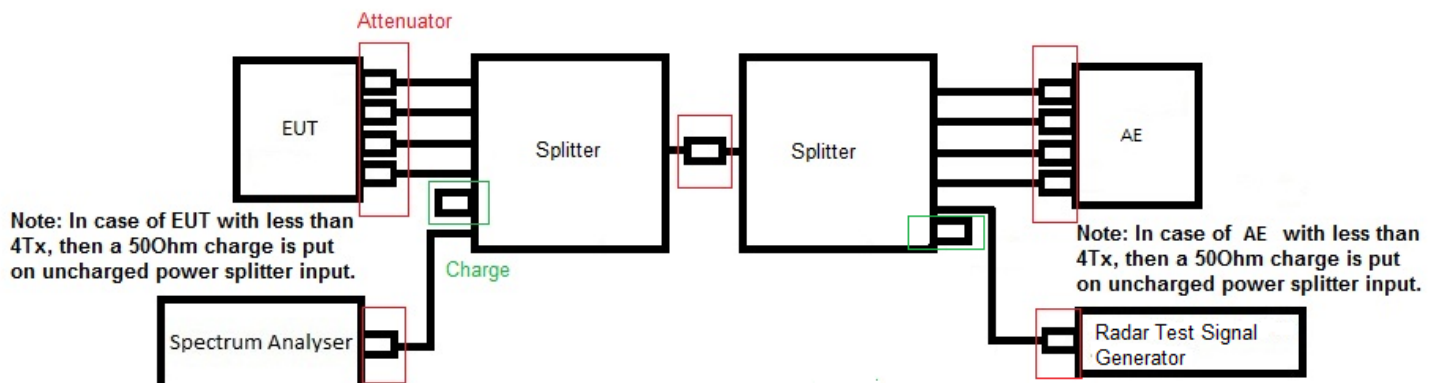

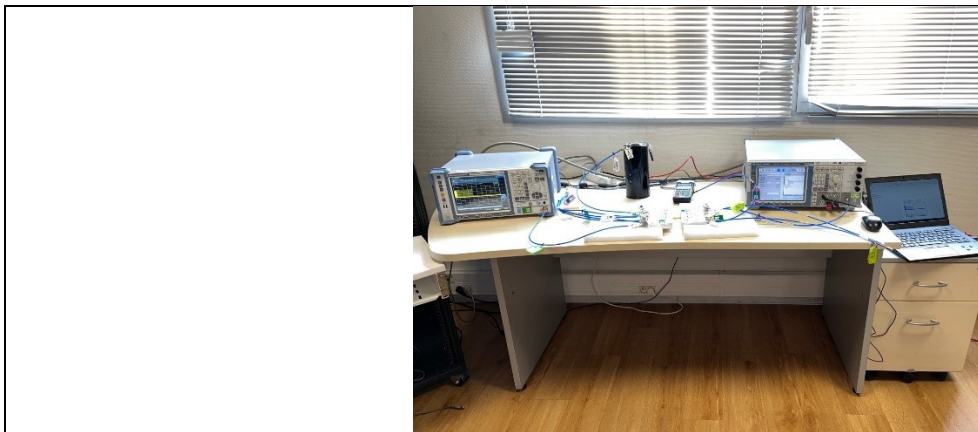


Photograph for DFS Detection Thresholds Determination, Reference Noise Level, Channel Loading

3.3. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB SMA	Mini-Circuit	BW-S10W2+	A7122259	05/21	05/23
Attenuator 10dB SMA	Mini-Circuit	BW-S10W2+	A7122258	05/21	05/23
Attenuator 3dB SMA	Mini-Circuit	BW-S3W2+	A7122255	05/21	05/23
Attenuator 3dB SMA	Mini-Circuit	BW-S3W2+	A7122257	05/21	05/23
Attenuator 3dB SMA	Mini-Circuit	BW-S3W2+	A7122251	05/21	05/23
Attenuator 3dB SMA	Mini-Circuit	BW-S3W2+	A7122250	05/21	05/23
Attenuator 3dB SMA	Mini-Circuit	BW-S3W2+	A7122253	05/21	05/23
Attenuator 3dB SMA	Mini-Circuit	BW-S3W2+	A7122254	05/21	05/23
Attenuator 3dB SMA	Mini-Circuit	BW-S3W2+	A7122252	05/21	05/23
Attenuator 3dB SMA	Mini-Circuit	BW-S3W2+	A7122256	05/21	05/23
Attenuator 40dB SMA	Mini-Circuit	BW-S10W2+	A7122263	05/21	05/23
Attenuator 40dB SMA	Mini-Circuit	BW-S10W2+	A7122264	05/21	05/23
Attenuator 40dB SMA	Mini-Circuit	BW-S10W2+	A7122265	05/21	05/23
Attenuator 40dB SMA	Mini-Circuit	BW-S10W2+	A7122261	05/21	05/23
Attenuator 40dB SMA	Mini-Circuit	BW-S10W2+	A7122262	05/21	05/23
Attenuator 40dB SMA	Mini-Circuit	BW-S10W2+	A7122260	05/21	05/23
Cable Adap Splitter	—	6GHz	A5329636	02/23	02/25
Cable SMA	—	18GHz	A5329634	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329683	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329686	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329698	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329685	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329693	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329692	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329689	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329697	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329694	05/21	05/23
Cable SMA 60cm (smj)	TELEDYNE	18GHz	A5329687	05/21	05/23
Full Anechoic Room	SIEPEL	—	D3044024		
Multimeter - CEM	FLUKE	87	A1240251	03/21	03/23
Power supply DC	METRIX	AX503	A7042307		
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	11/21	11/23
Splitter	Mini Circuits	ZN8PD-642W-S+	A7130081	05/21	05/23
Splitter	Mini Circuits	ZN8PD-642W-S+	A7130080	05/21	05/23
Vector Signal Generator	ROHDE & SCHWARZ	SMJ100A	A5400043	05/22	05/24

Note: In our quality system, the test equipment calibration due is more & less 2 months


3.4. RESULTS

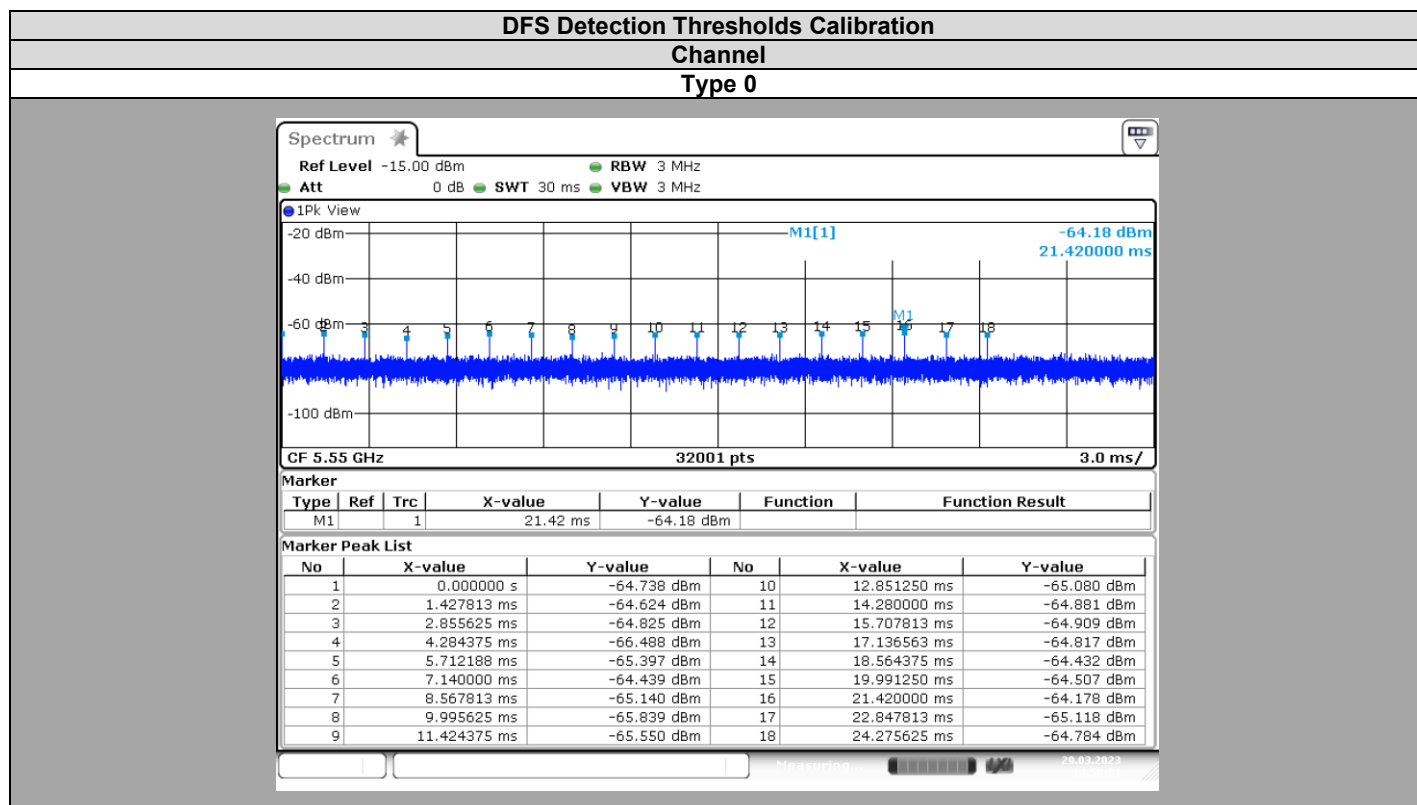


Channel	Channel
Applicable Level (dBm)	-64
Lowest Antenna Gain (dBi)	
DFS Detection Thresholds (dBm)	-64
Additional Level (dB)	1
Radar Level (dBm)	-63

Channel	Channel
EIRP (See test report from FCC ID: RRK2012060056-1)	338,065mW
DFS Detection thresholds applied	-64dBm
Additional Level (dB)	1
DFS Detection thresholds applied	-63dBm


**Reference Noise Level
Channel**

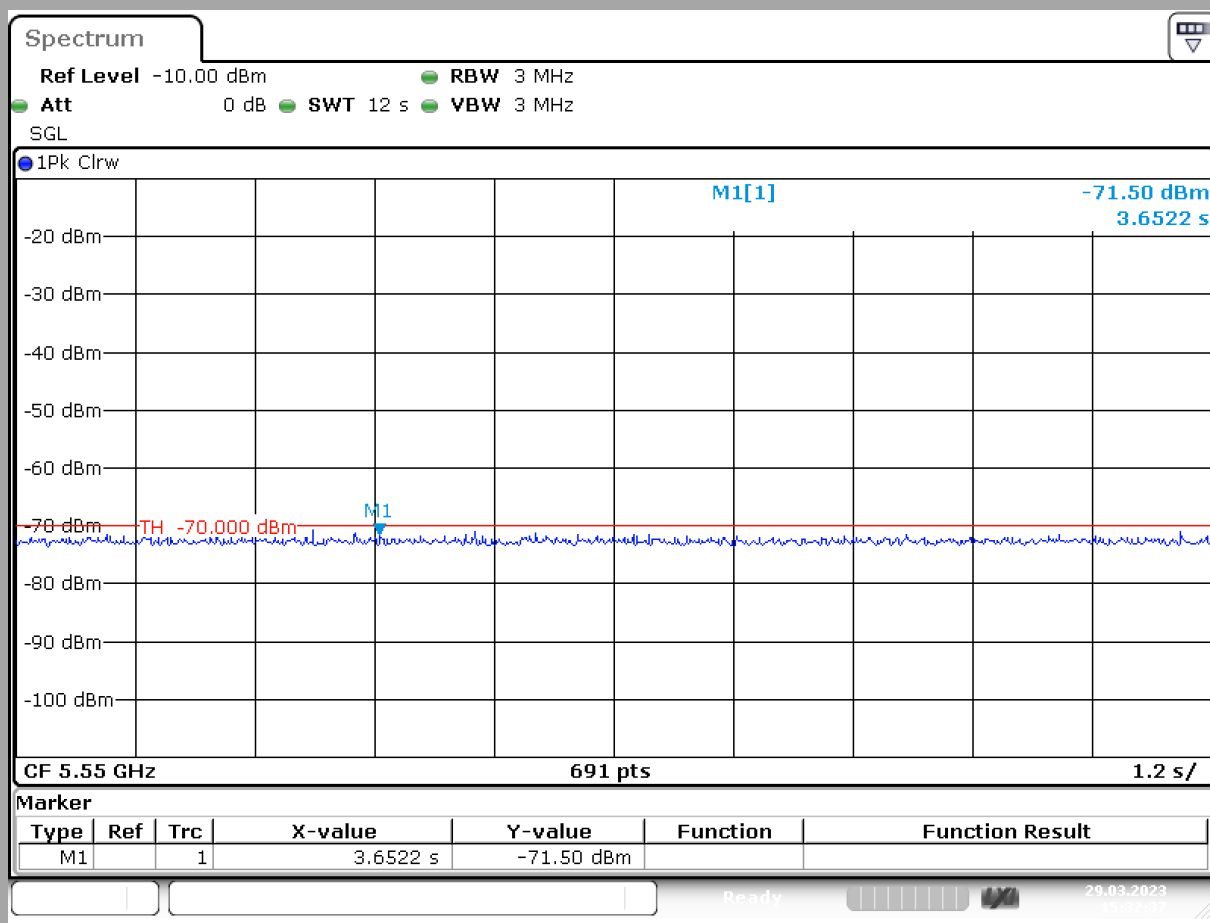


**Master Level
Channel**

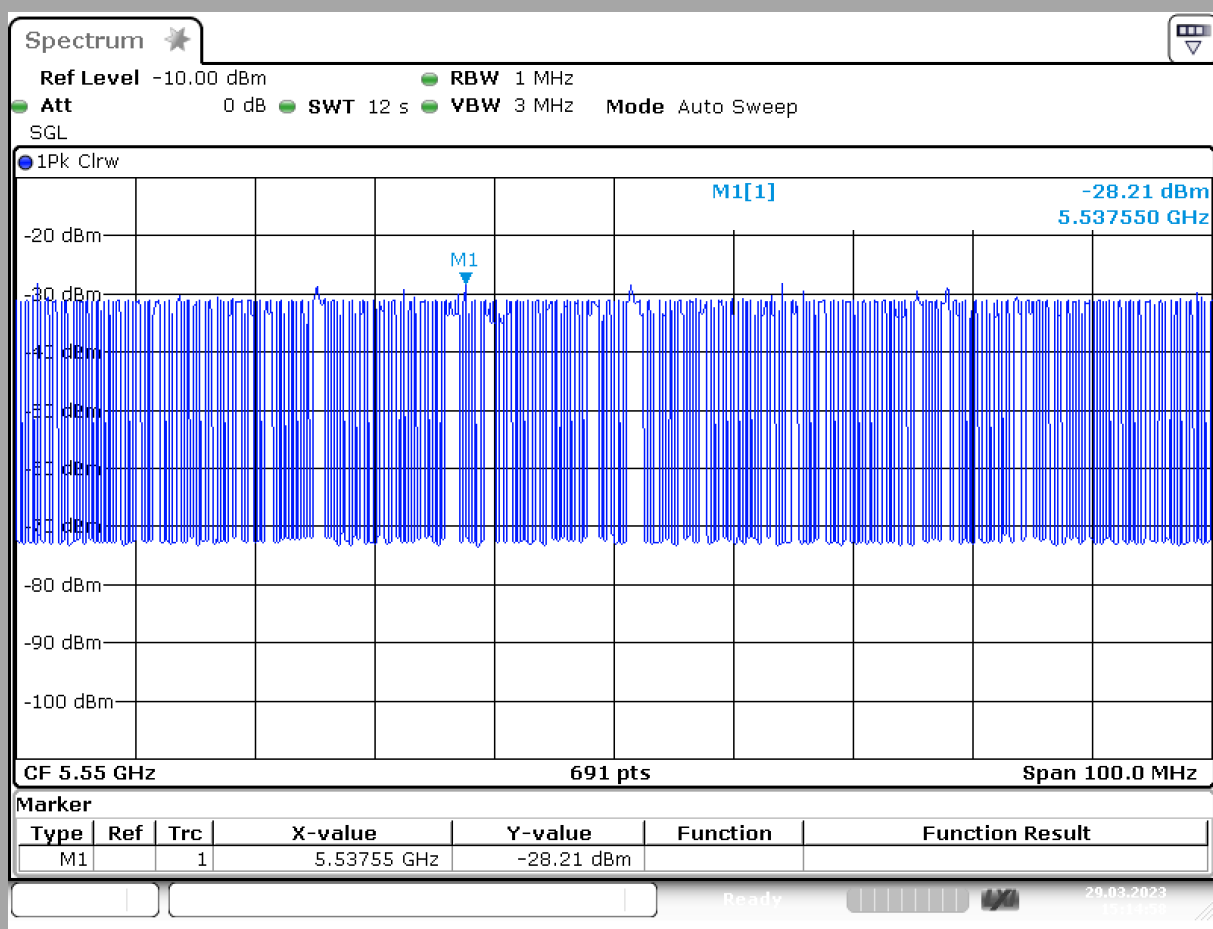

Client Level
Channel

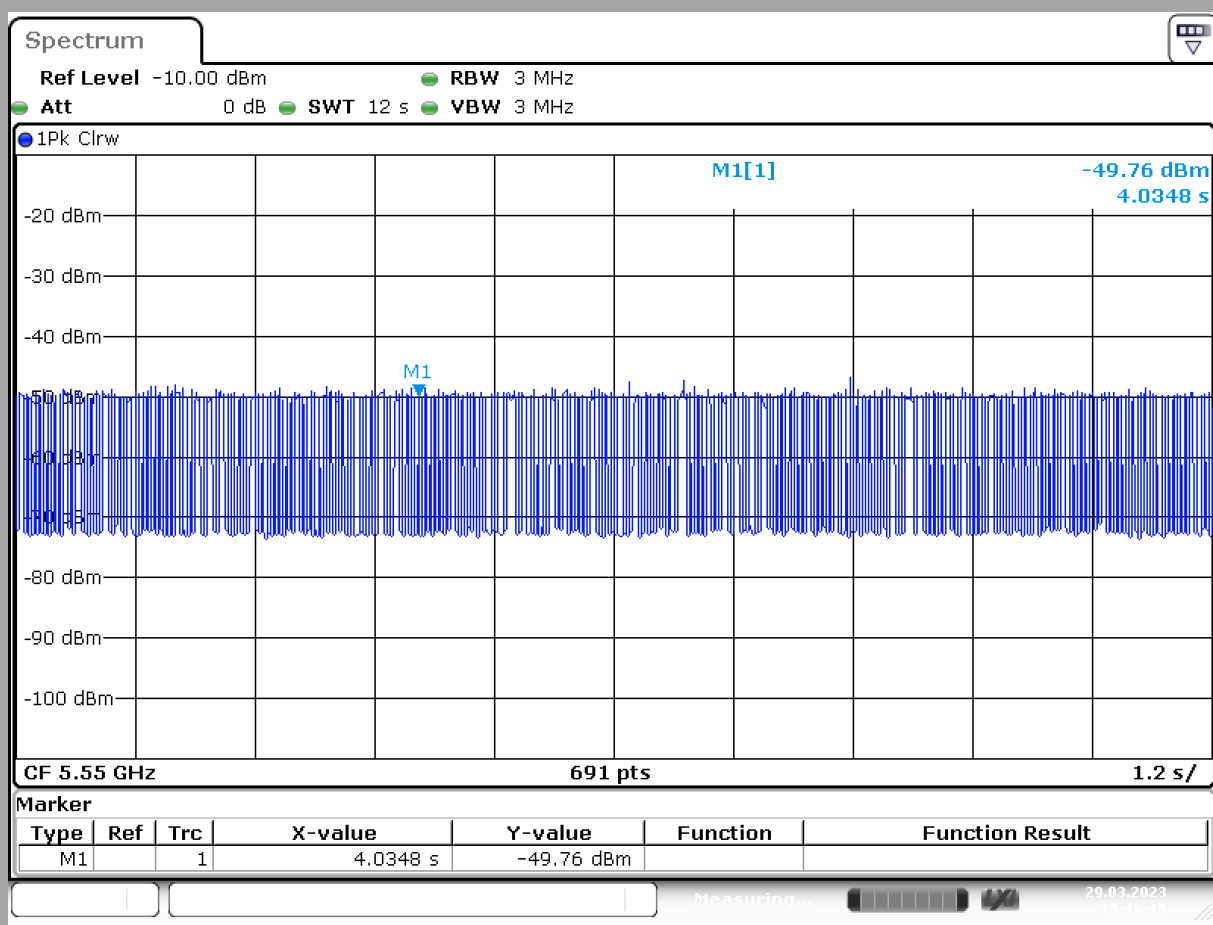

**Master
Channel**

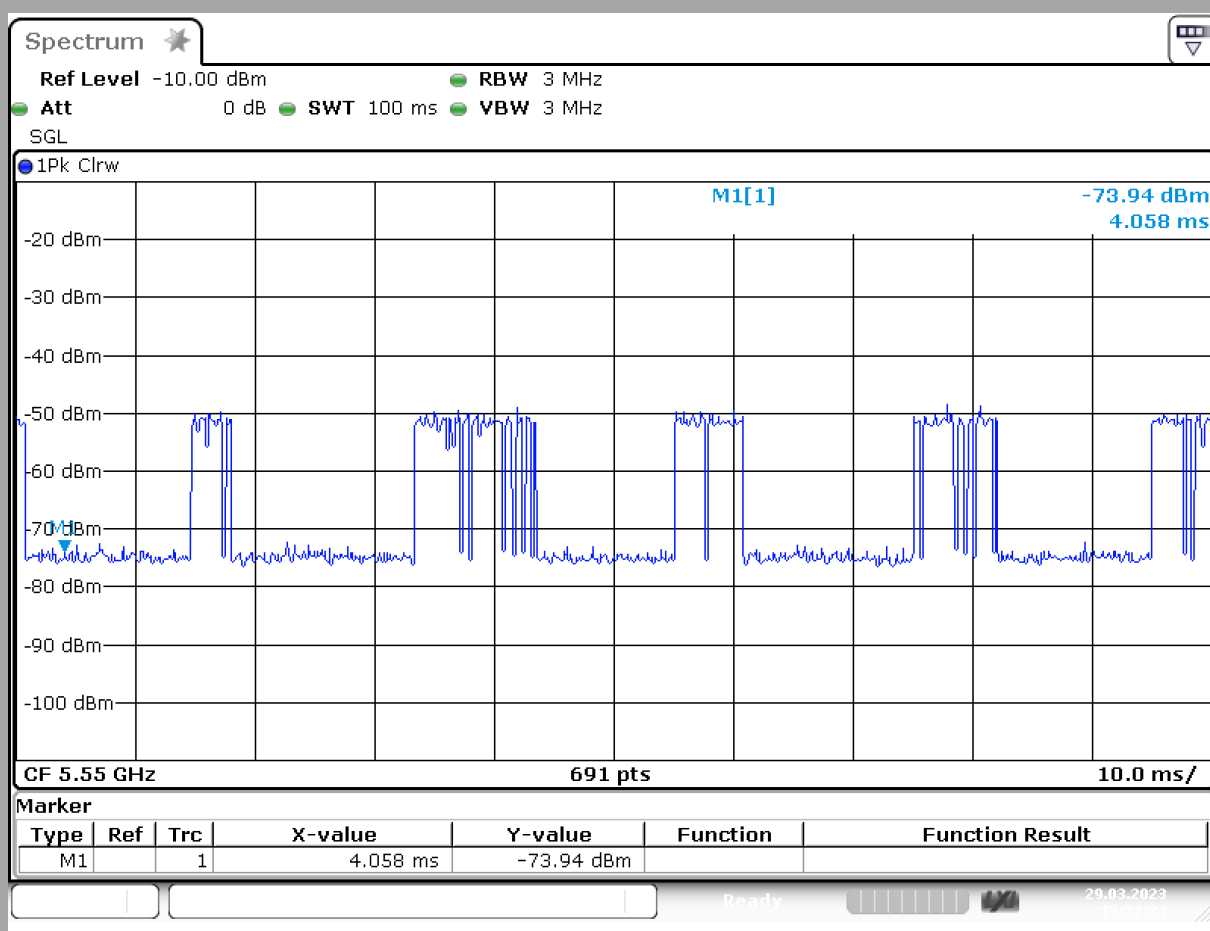

Duty Cycle (%)

Over 17%

4. DYNAMIC FREQUENCY SELECTION (DFS): CHANNEL CLOSING TRANSMISSION TIME & CHANNEL MOVE TIME

4.1. TEST CONDITIONS

Test performed by : Majid MOURZAGH - Akram HAKKARI
 Date of test : April 7, 2023
 Ambient temperature : 21 °C
 Relative humidity : 30 %



4.2. TEST SETUP

- The Equipment Under Test is:

- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer:

- ☒ On the EUT conducted access
- ☐ On the EUT with a test fixture

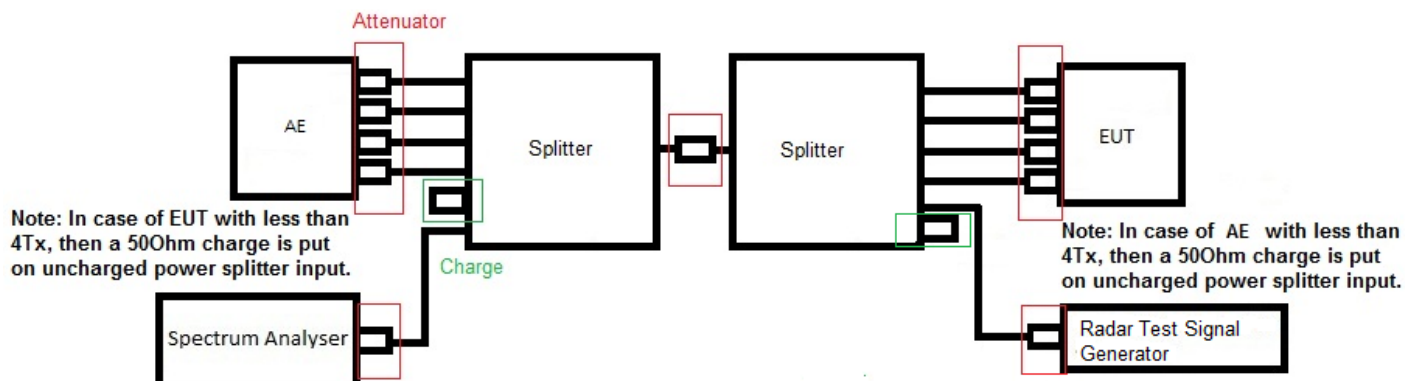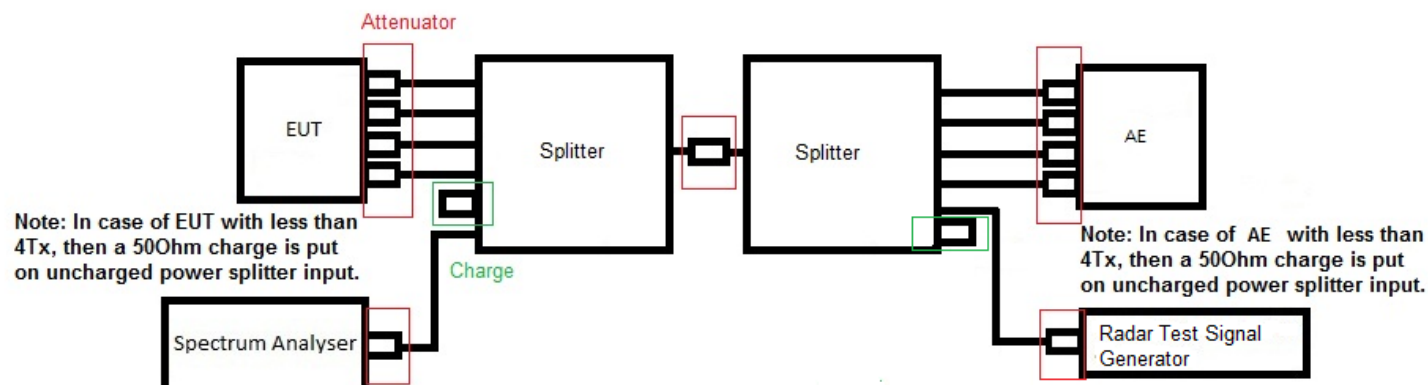



Photograph for DFS Channel Closing Transmission Time & Channel Move Time

4.3. LIMIT

Channel Closing Transmission Time shall not exceed 0.26second
Channel Move Time shall not exceed 10seconds

4.4. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION


☒ None ☐ Divergence:

4.5. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB SMA	Mini-Circuit	BW-S10W2+	A7122259	05/21	05/23
Attenuator 10dB SMA	Mini-Circuit	BW-S10W2+	A7122258	05/21	05/23
Attenuator 3dB SMA	Mini-Circuit	BW-S3W2+	A7122255	05/21	05/23
Attenuator 3dB SMA	Mini-Circuit	BW-S3W2+	A7122257	05/21	05/23
Attenuator 3dB SMA	Mini-Circuit	BW-S3W2+	A7122251	05/21	05/23
Attenuator 3dB SMA	Mini-Circuit	BW-S3W2+	A7122250	05/21	05/23
Attenuator 3dB SMA	Mini-Circuit	BW-S3W2+	A7122253	05/21	05/23
Attenuator 3dB SMA	Mini-Circuit	BW-S3W2+	A7122254	05/21	05/23
Attenuator 3dB SMA	Mini-Circuit	BW-S3W2+	A7122252	05/21	05/23
Attenuator 3dB SMA	Mini-Circuit	BW-S3W2+	A7122256	05/21	05/23
Attenuator 40dB SMA	Mini-Circuit	BW-S10W2+	A7122263	05/21	05/23
Attenuator 40dB SMA	Mini-Circuit	BW-S10W2+	A7122264	05/21	05/23
Attenuator 40dB SMA	Mini-Circuit	BW-S10W2+	A7122265	05/21	05/23
Attenuator 40dB SMA	Mini-Circuit	BW-S10W2+	A7122261	05/21	05/23
Attenuator 40dB SMA	Mini-Circuit	BW-S10W2+	A7122262	05/21	05/23
Attenuator 40dB SMA	Mini-Circuit	BW-S10W2+	A7122260	05/21	05/23
Cable Adap Splitter	—	6GHz	A5329636	02/23	02/25
Cable SMA	—	18GHz	A5329634	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329683	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329686	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329698	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329685	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329693	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329692	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329689	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329697	05/21	05/23
Cable SMA 60cm	TELEDYNE	18GHz	A5329694	05/21	05/23
Cable SMA 60cm (smj)	TELEDYNE	18GHz	A5329687	05/21	05/23
Full Anechoic Room	SIEPEL	—	D3044024		
Multimeter - CEM	FLUKE	87	A1240251	03/21	03/23
Power supply DC	METRIX	AX503	A7042307		
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	11/21	11/23
Splitter	Mini Circuits	ZN8PD-642W-S+	A7130081	05/21	05/23
Splitter	Mini Circuits	ZN8PD-642W-S+	A7130080	05/21	05/23
Vector Signal Generator	ROHDE & SCHWARZ	SMJ100A	A5400043	05/22	05/24

Note: In our quality system, the test equipment calibration due is more & less 2 months

4.6. RESULTS

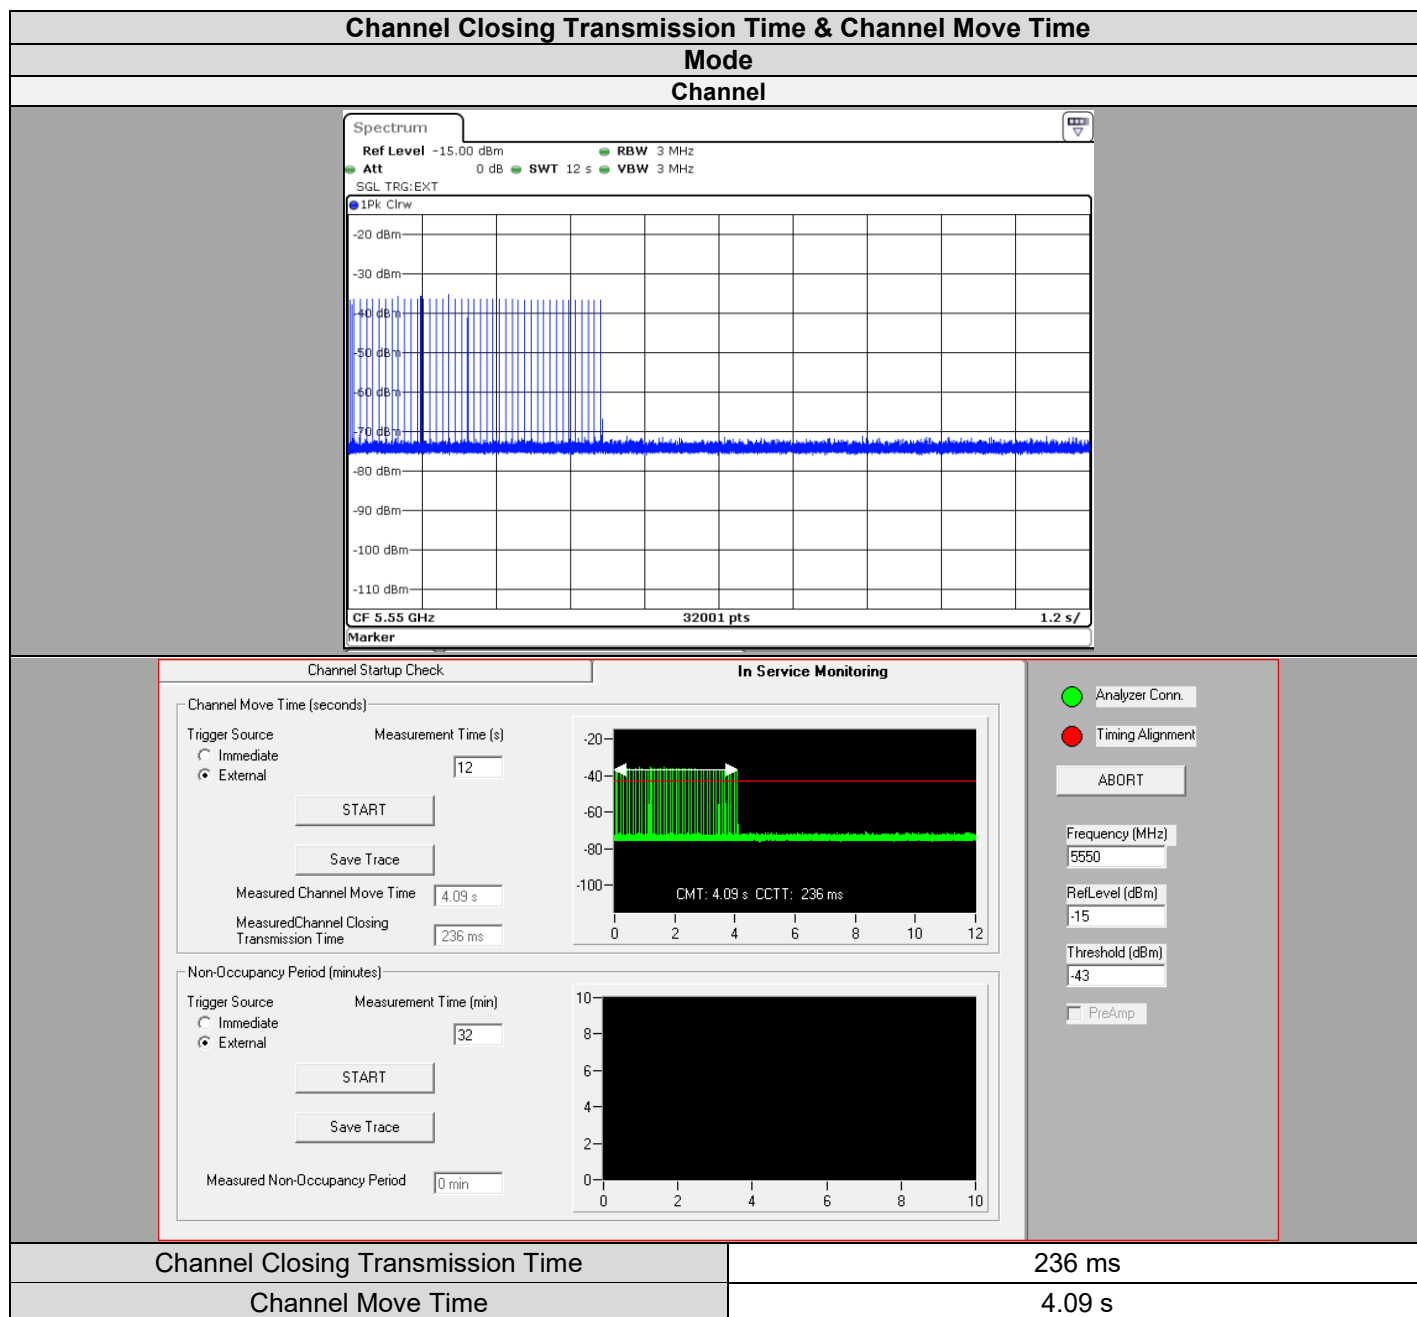

4.7. CONCLUSION

Channel Closing Transmission Time & Channel Move Time measurement performed on the sample of the product **INGENICO Desk/2600**, SN: **230587317081327729816898**, in configuration and description presented in this test report, show levels **compliant** to the 47 CFR PART 15.407 & RSS 247 ISSUE 1 limits.



5. ANNEX 3: RADAR TEST SIGNAL TYPE 0

TYPE 0		
Pulses per Burst	Pulse Width (μsec)	PRI (μs)
18	1	1428



6. UNCERTAINTIES CHART

47 CFR Part 15.209 & 15.207 Kind of test	Wide uncertainty laboratory (k=2) $\pm x(\text{dB}) / (\text{Hz}) /$ ms	Uncertainty limit
<i>RF power, conducted</i>	$\pm 1.2 \text{ dB}$	$\pm 1.5 \text{ dB}$
<i>Power Spectral Density, Conducted</i>	$\pm 1.7 \text{ dB}$	$\pm 3 \text{ dB}$
<i>Spurious emission, conducted</i>	$\pm 2.3 \text{ dB}$	$\pm 3 \text{ dB}$
<i>Time</i>	$\pm 2.3 \%$	$\pm 5 \%$

The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the CISPR. The conformity of the sample is directly established by the applicable limits values. This table includes all uncertainties maximum feasible for testing in the laboratory, whether or not made in this report