

Test Plot 1#: GSM 850 Mid Body/Limb Back**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 41.737$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.175 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.106 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

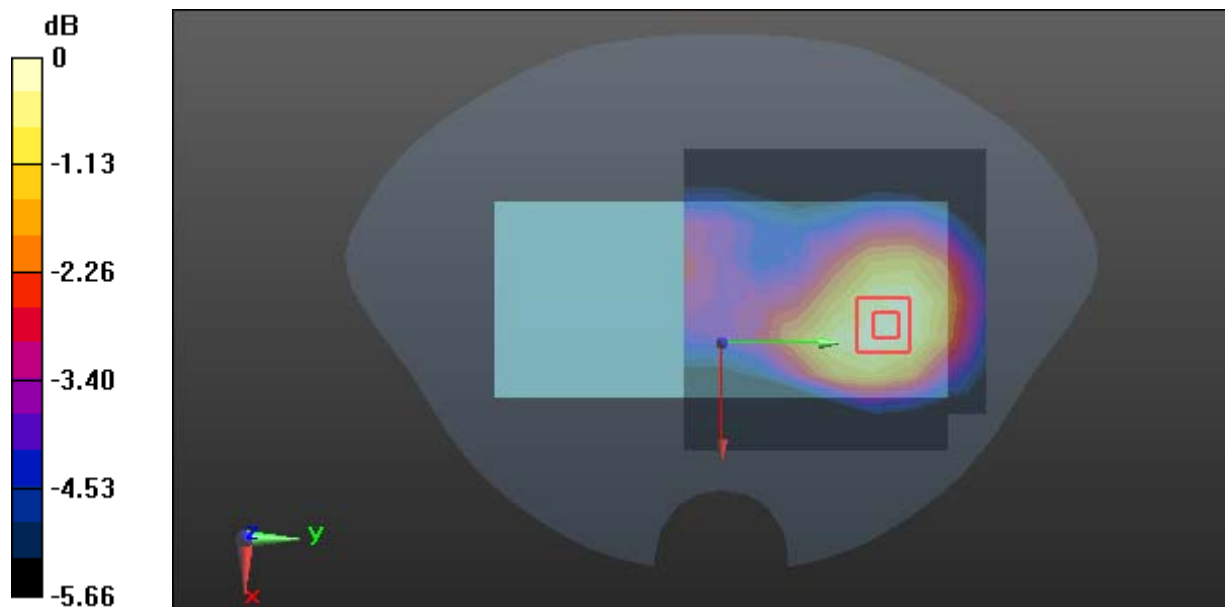

0 dB = 0.175 W/kg = -7.57 dBW/kg

Test Plot 2#:GSM 850 Mid Limb Top1**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz;Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 41.737$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.87 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.73 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.74 W/kg

SAR(1 g) = 1.64 W/kg; SAR(10 g) = 0.950 W/kg

Maximum value of SAR (measured) = 2.05 W/kg

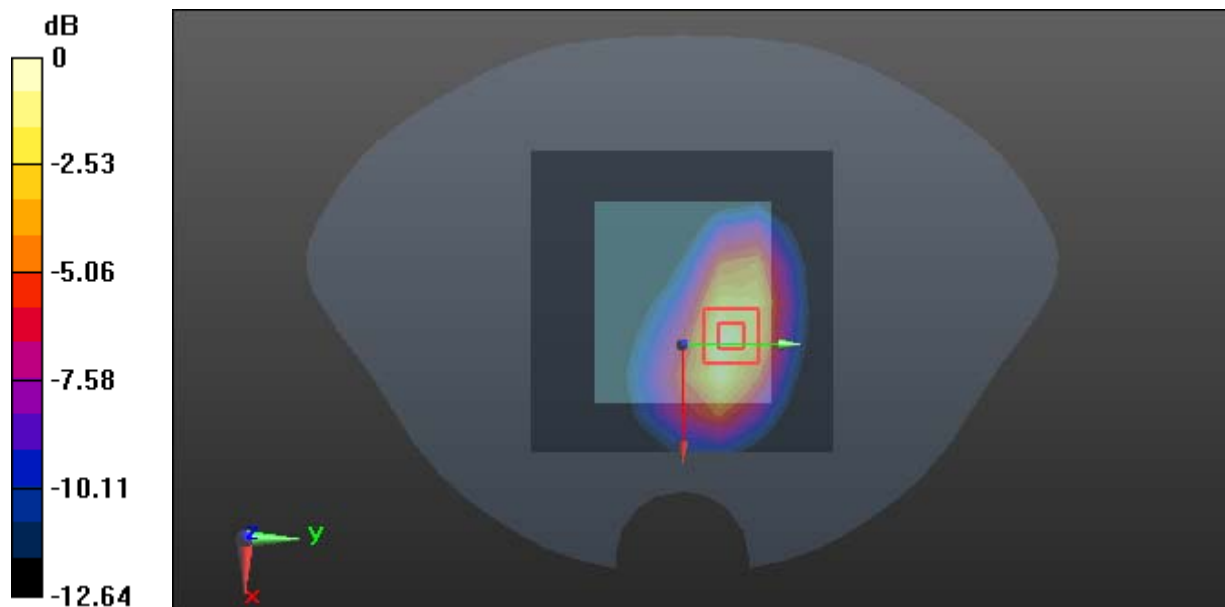

0 dB = 2.05 W/kg = 3.12 dBW/kg

Test Plot 3#:PCS 1900 Mid Body/Limb Back**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz;Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.556$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.262 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.544 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.330 W/kg

SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.261 W/kg

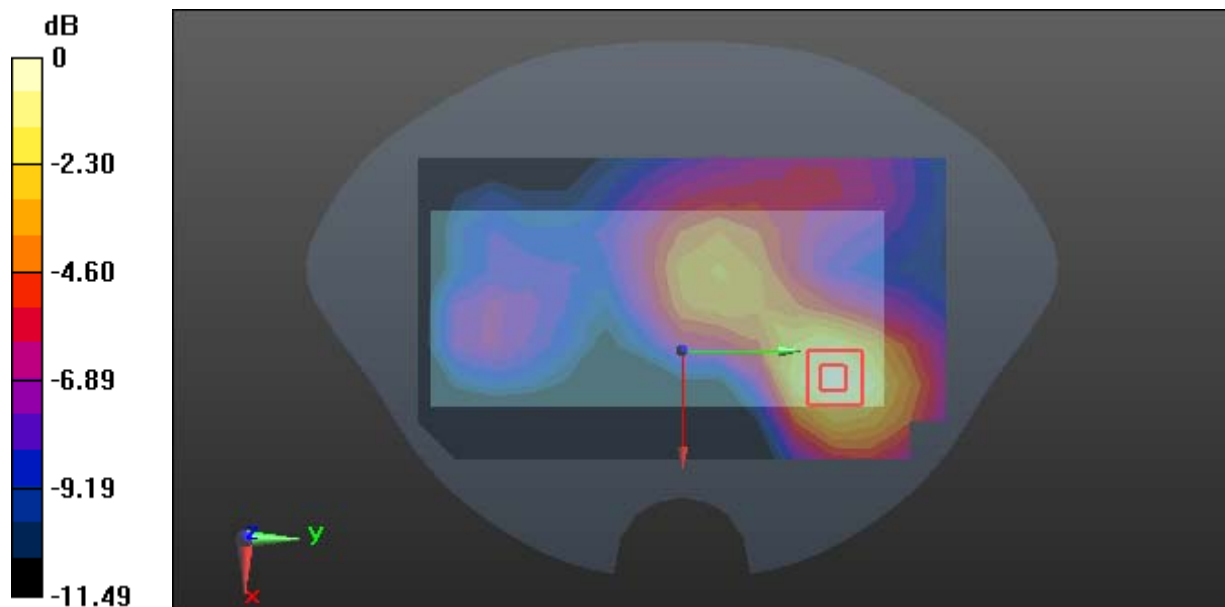

0 dB = 0.261 W/kg = -5.83 dBW/kg

Test Plots 4#: PCS 1900 High Limb Right**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.388$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1909.8 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 6.25 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.11 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 9.34 W/kg

SAR(1 g) = 4.7 W/kg; SAR(10 g) = 2.18 W/kg

Maximum value of SAR (measured) = 5.89 W/kg

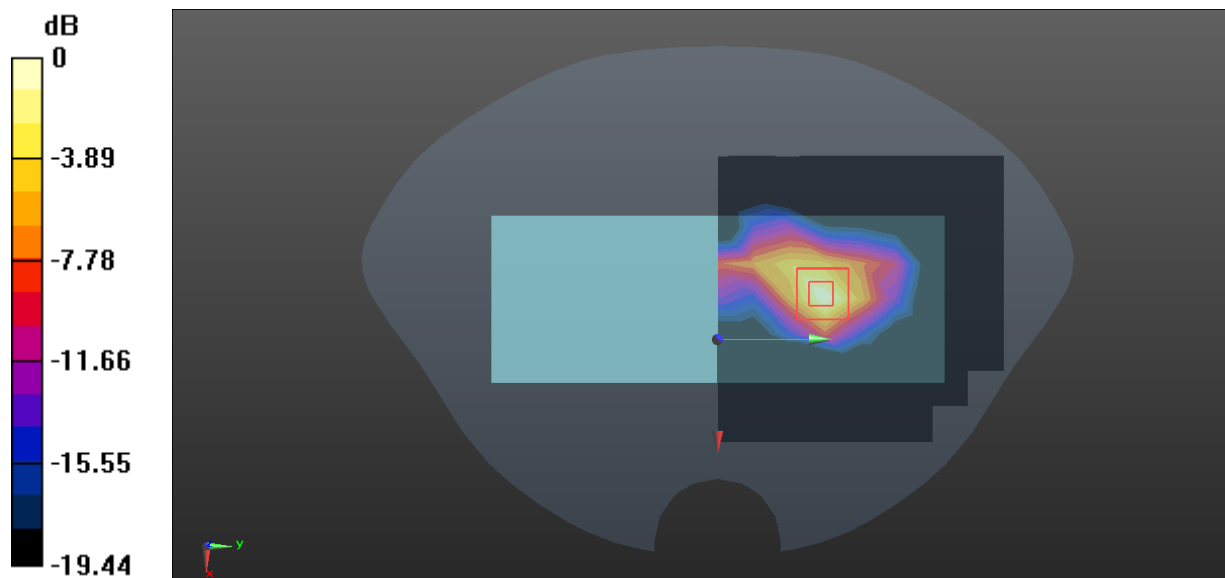

0 dB = 5.89 W/kg = 7.70 dBW/kg

Test Plot 5#:WCDMA Band 2 Mid Body/Limb Back**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System:WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.556$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.102 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.489 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

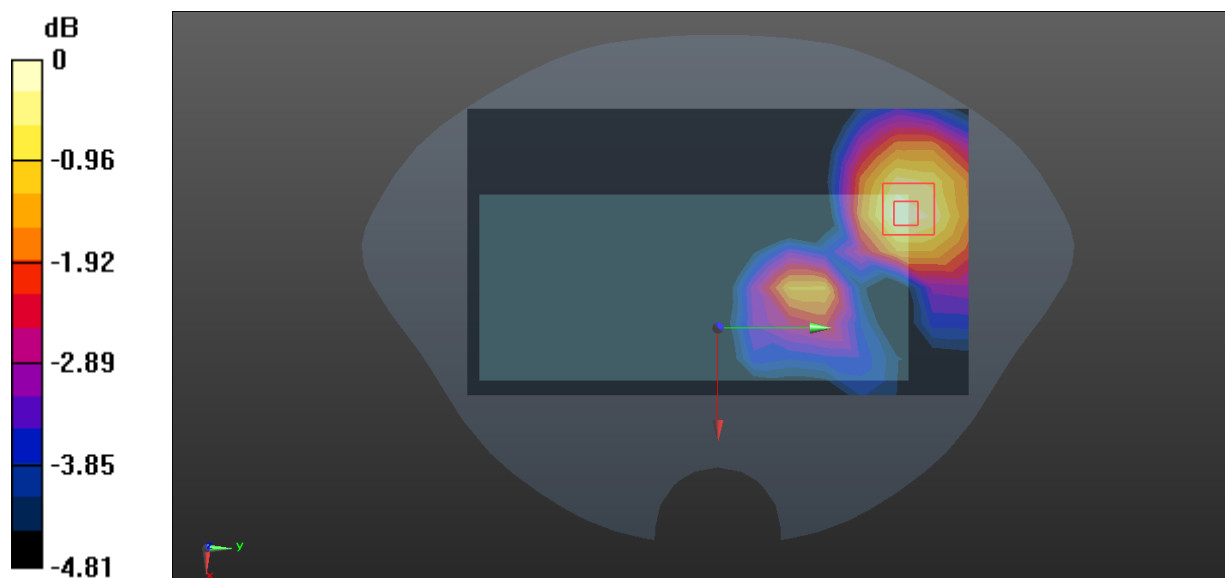

0 dB = 0.102 W/kg = -9.91 dBW/kg

Test Plot 6#:WCDMA Band 2 Mid Limb Right**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System:WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.556$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.41 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.36 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 9.46 W/kg

SAR(1 g) = 4.72 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 5.86 W/kg

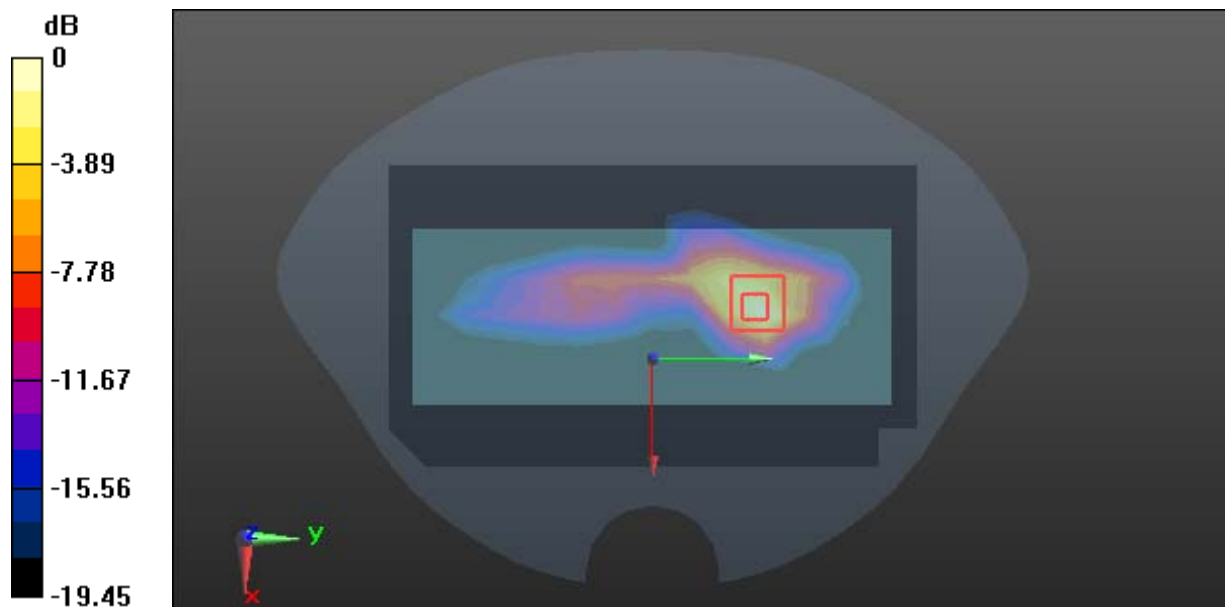

0 dB = 5.86 W/kg = 7.68 dBW/kg

Test Plot 7#:WCDMA Band 4 Mid Body/Limb Back**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System:WCDMA (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.689$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.53, 5.53, 5.53) @ 1732.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.342 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.940 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.436 W/kg

SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.353 W/kg

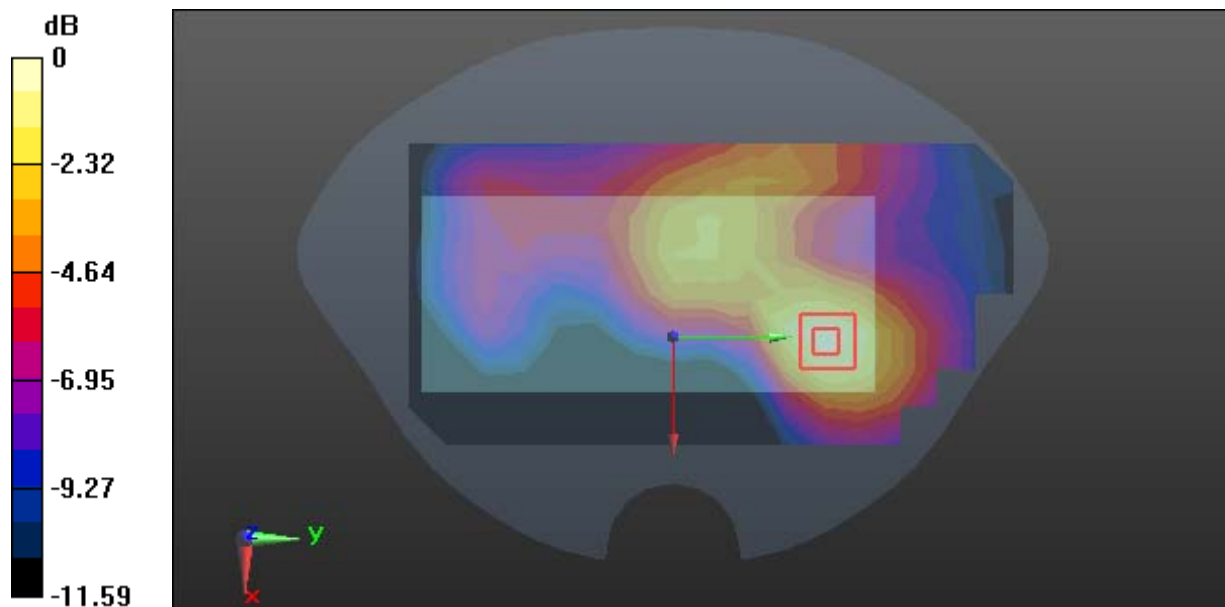

0 dB = 0.353 W/kg = -4.52 dBW/kg

Test Plot 8#:WCDMA Band 4 Low Limb Right**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System:WCDMA (0); Frequency: 1712.4 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.358$ S/m; $\epsilon_r = 39.811$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.53, 5.53, 5.53) @ 1712.4 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 6.84 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.085 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 9.98 W/kg

SAR(1 g) = 5.19 W/kg; SAR(10 g) = 2.53 W/kg

Maximum value of SAR (measured) = 6.38 W/kg

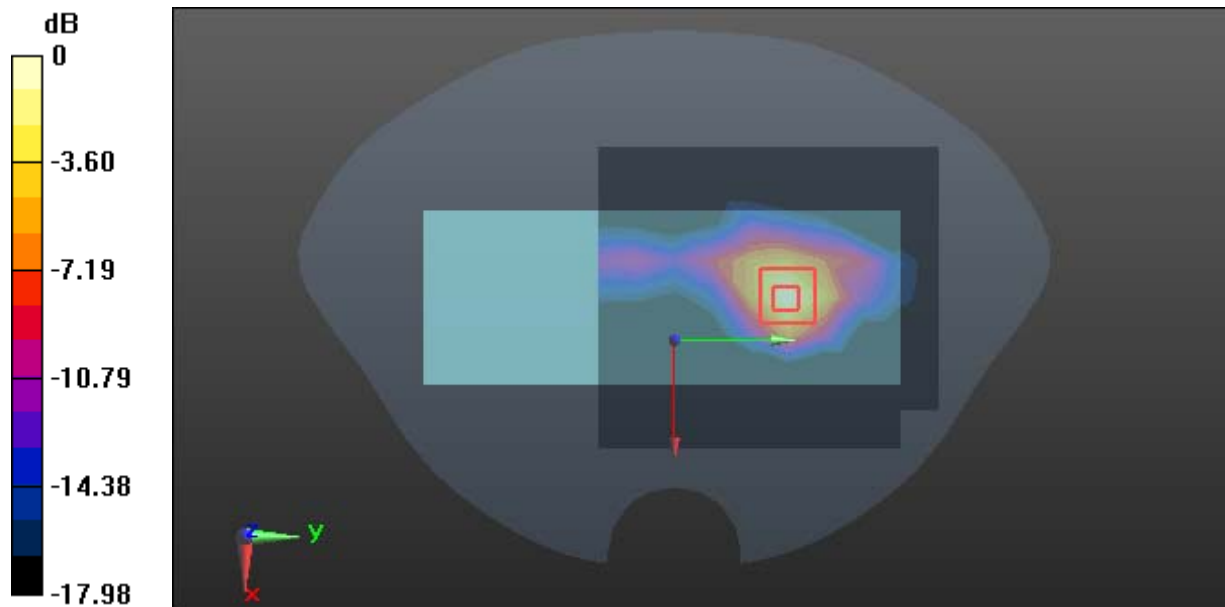

0 dB = 6.38 W/kg = 8.05 dBW/kg

Test Plot 9#:WCDMA Band 5 Mid Body/Limb Back**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System:WCDMA (0); Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 41.737$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x16x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.164 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.117 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.163 W/kg



0 dB = 0.163 W/kg = -7.88 dBW/kg

Test Plot 10#: WCDMA Band 5 Mid Limb Top1**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 41.737$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.03 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 39.08 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 4.25 W/kg

SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.13 W/kg

Maximum value of SAR (measured) = 2.71 W/kg

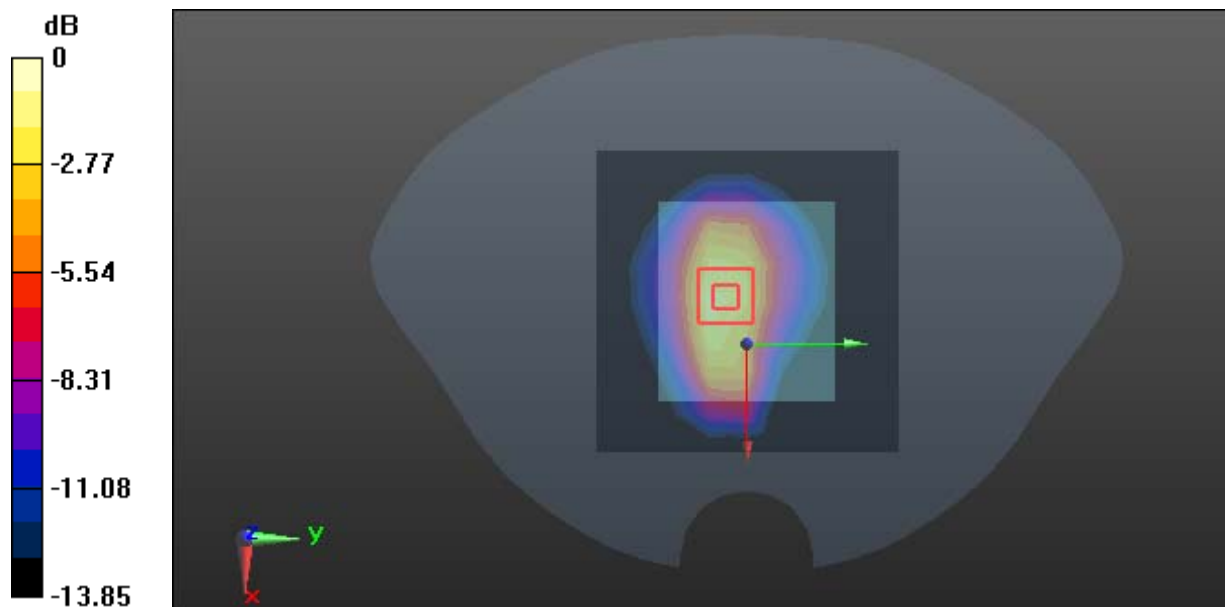

0 dB = 2.71 W/kg = 4.33 dBW/kg

Test Plot 11#:LTE Band 2 1RB Mid Body/Limb Back**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.556$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.117 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.202 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

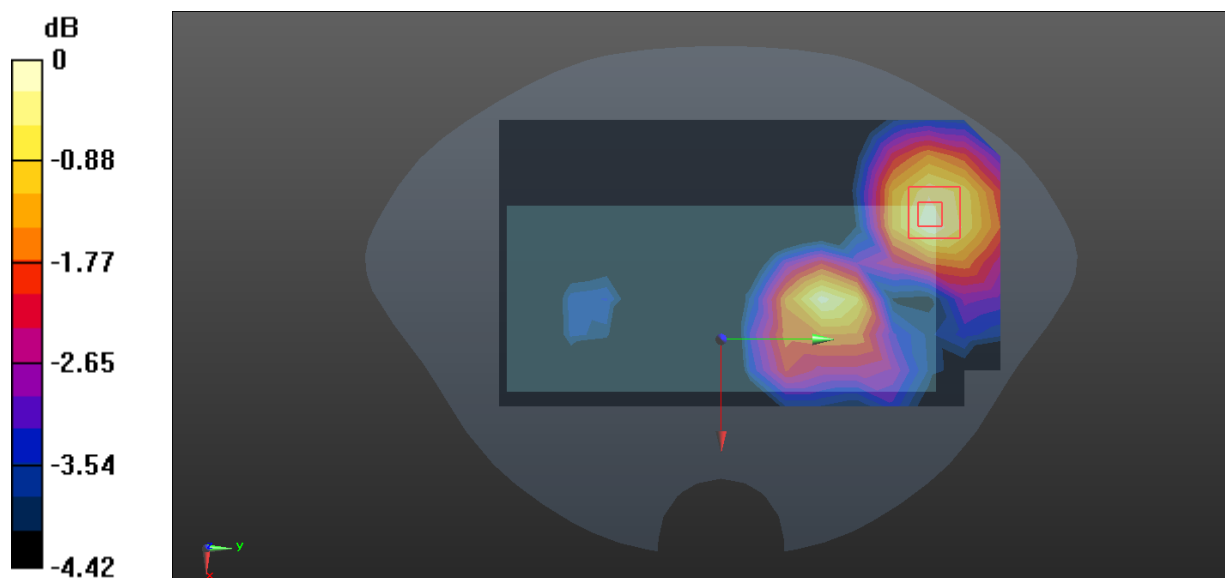

0 dB = 0.117 W/kg = -9.32 dBW/kg

Test Plot 12#:LTE Band 2 1RB High Limb Right**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: Generic FDD-LTE (0); Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 39.492$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @ 1900 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.26 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.89 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 9.51 W/kg

SAR(1 g) = 4.55 W/kg; SAR(10 g) = 2.05 W/kg

Maximum value of SAR (measured) = 6.23 W/kg

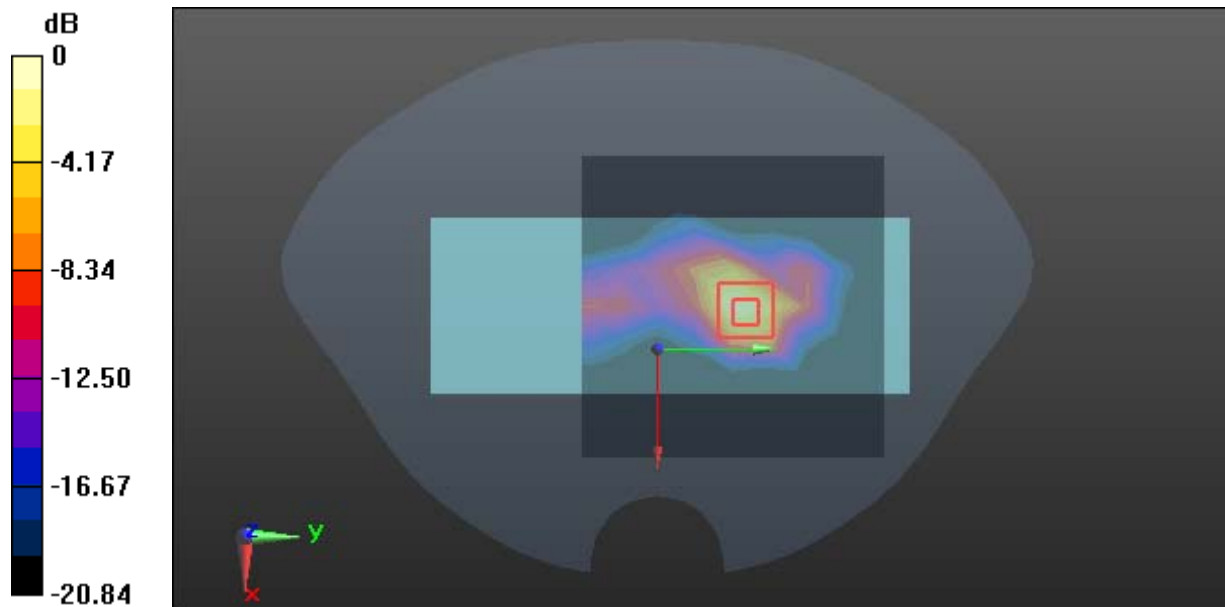

0 dB = 6.23 W/kg = 7.94 dBW/kg

Test Plot 13#:LTE Band 5 1RB Mid Body/Limb Back**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 41.739$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.5 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.121 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.166 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.141 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.124 W/kg

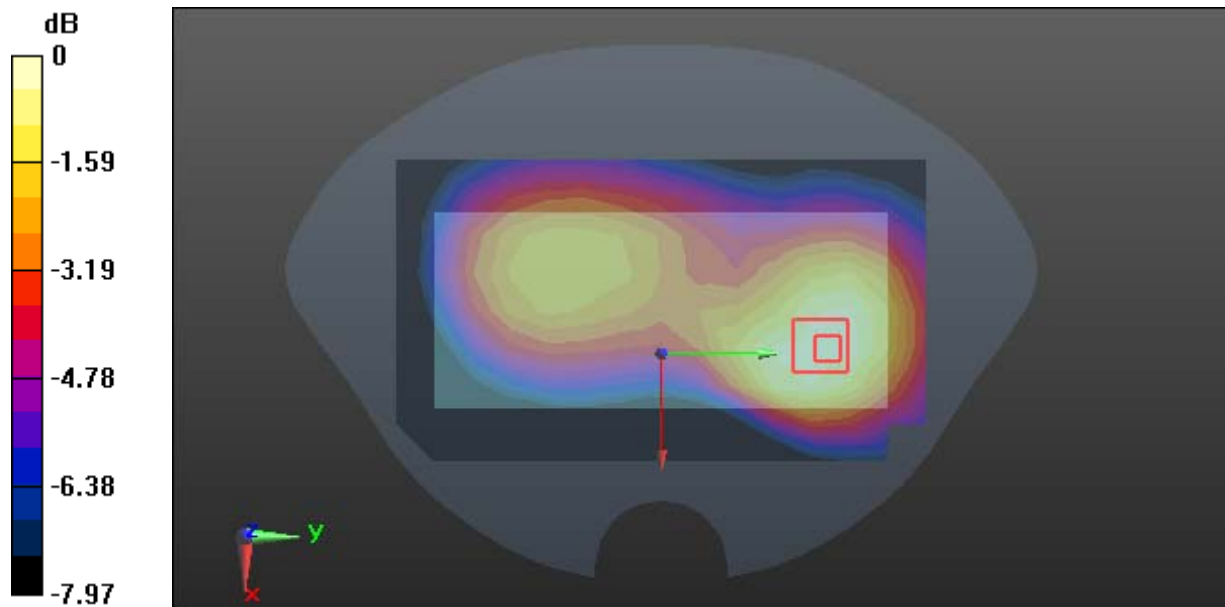

0 dB = 0.124 W/kg = -9.07 dBW/kg

Test Plot 14#:LTE Band 5 1RB Mid Limb Top1**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 41.739$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 836.5 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.81 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.91 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 4.49 W/kg

SAR(1 g) = 2.2 W/kg; SAR(10 g) = 1.15 W/kg

Maximum value of SAR (measured) = 2.86 W/kg

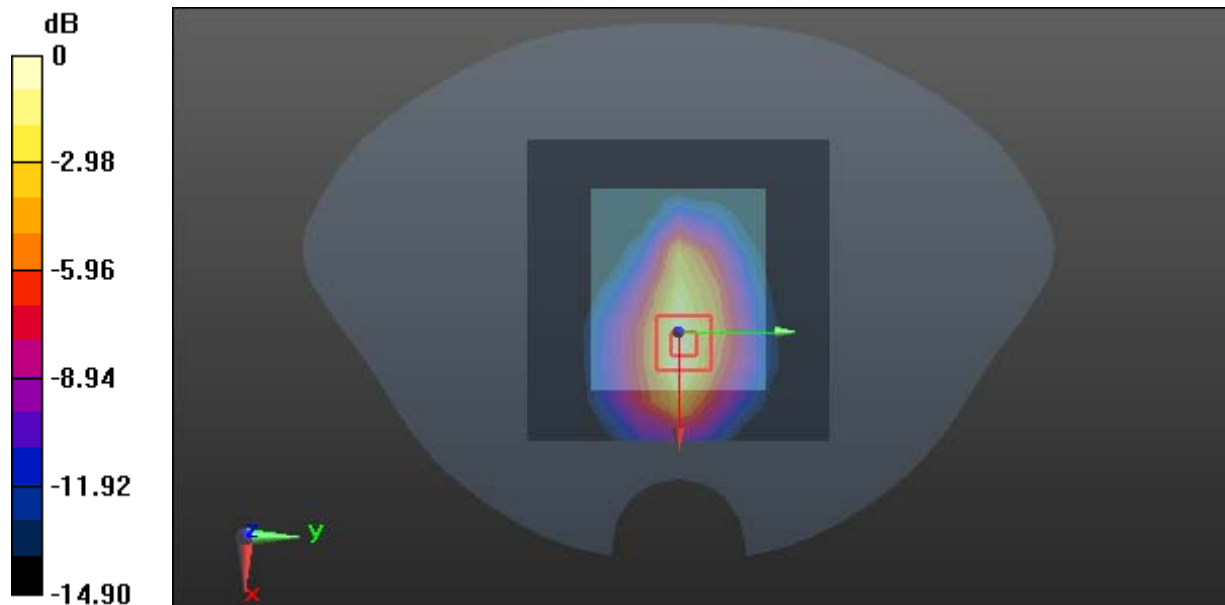

0 dB = 2.86 W/kg = 4.56 dBW/kg

Test Plot 15#:LTE Band 7 1RB Mid Body/Limb Back**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.952$ S/m; $\epsilon_r = 40.068$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.83, 4.83, 4.83) @ 2535 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.384 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.433 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.365 W/kg; SAR(10 g) = 0.210 W/kg

Maximum value of SAR (measured) = 0.438 W/kg

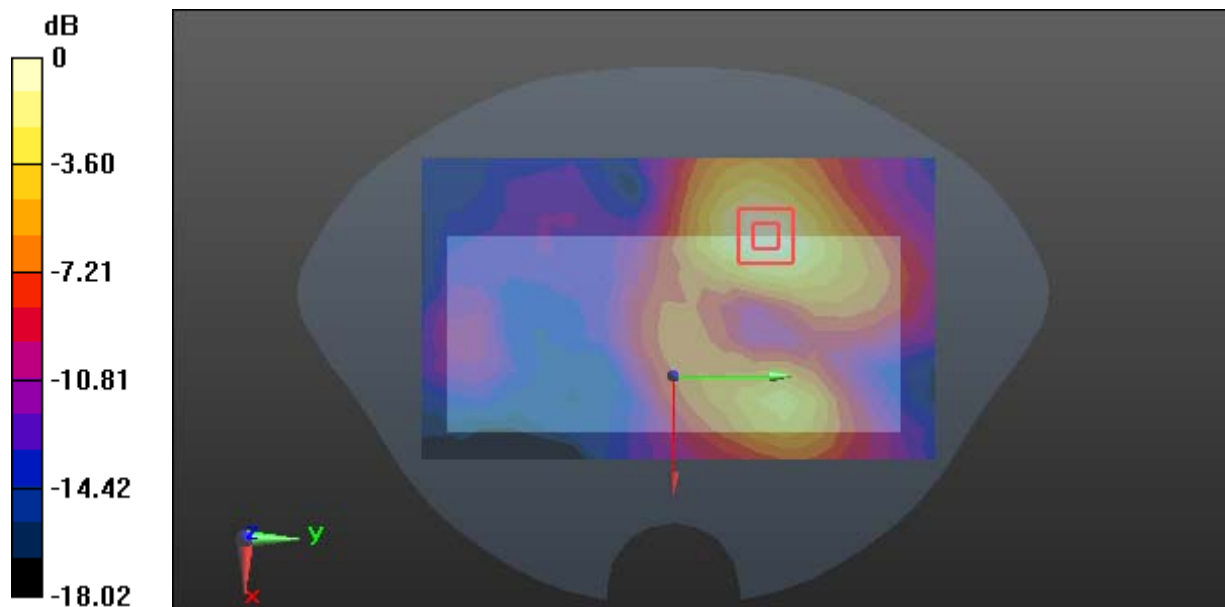

0 dB = 0.438 W/kg = -3.59 dBW/kg

Test Plot 16#:LTE Band 7 1RB Mid Limb Right**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.952$ S/m; $\epsilon_r = 40.068$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.83, 4.83, 4.83) @ 2535 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 4.61 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.24 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 8.21 W/kg

SAR(1 g) = 3.88 W/kg; SAR(10 g) = 1.99 W/kg

Maximum value of SAR (measured) = 5.00 W/kg

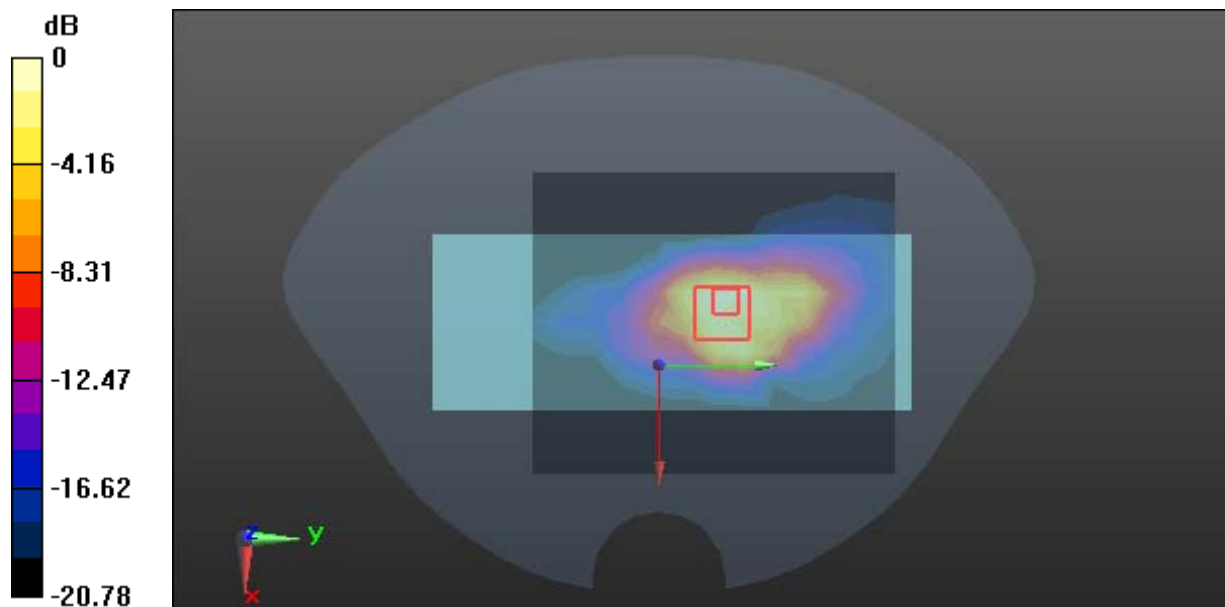

0 dB = 5.00 W/kg = 6.99 dBW/kg

Test Plot 17#:LTE Band 12 1RB Mid Body/Limb Back**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 43.358$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 707.5 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.124 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.247 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

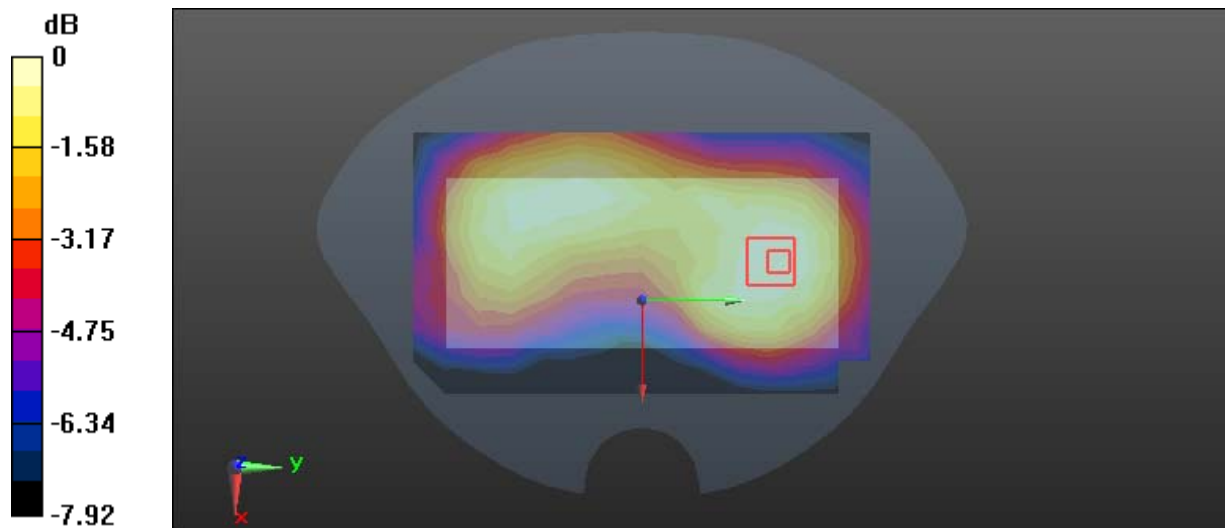

0 dB = 0.123 W/kg = -9.10 dBW/kg

Test Plot 18#:LTE Band 12 50%RB Mid Limb Top1**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 43.358$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @ 707.5 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.46 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.65 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.39 W/kg

SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.660 W/kg

Maximum value of SAR (measured) = 1.47 W/kg

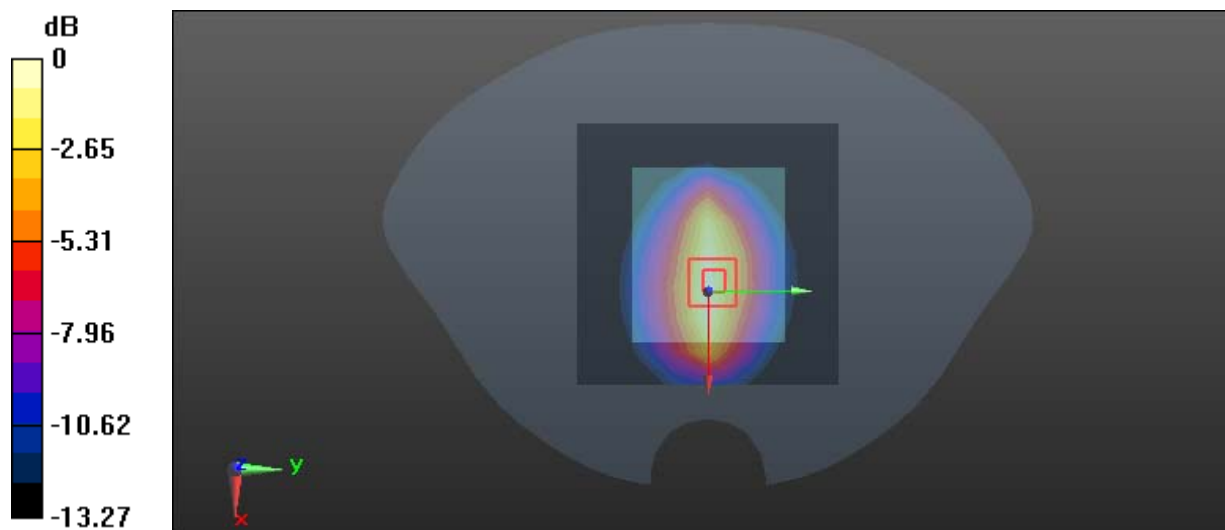

0 dB = 1.47 W/kg = 1.67 dBW/kg

Test Plot 19#:LTE Band 41 1RB Mid Body/Limb Back**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 2.013$ S/m; $\epsilon_r = 39.977$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.66, 4.66, 4.66) @ 2593 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.244 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.911 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.262 W/kg

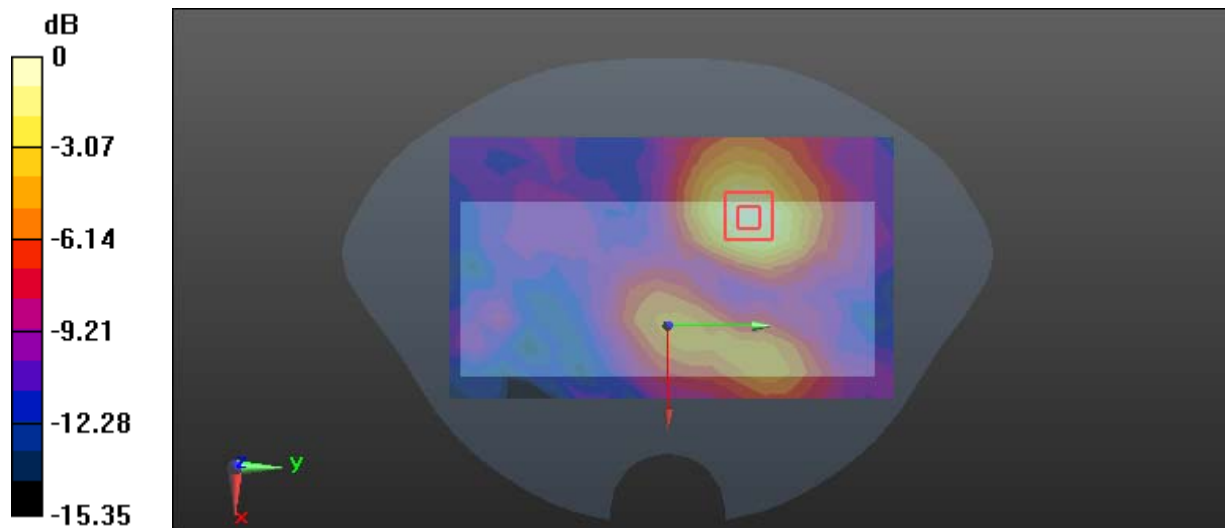

0 dB = 0.262 W/kg = -5.82 dBW/kg

Test Plot 20#:LTE Band 41 1RB Mid Limb Right**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 2.013$ S/m; $\epsilon_r = 39.977$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.66, 4.66, 4.66) @ 2593 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.72 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.747 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 3.42 W/kg

SAR(1 g) = 1.74 W/kg; SAR(10 g) = 0.866 W/kg

Maximum value of SAR (measured) = 2.38 W/kg

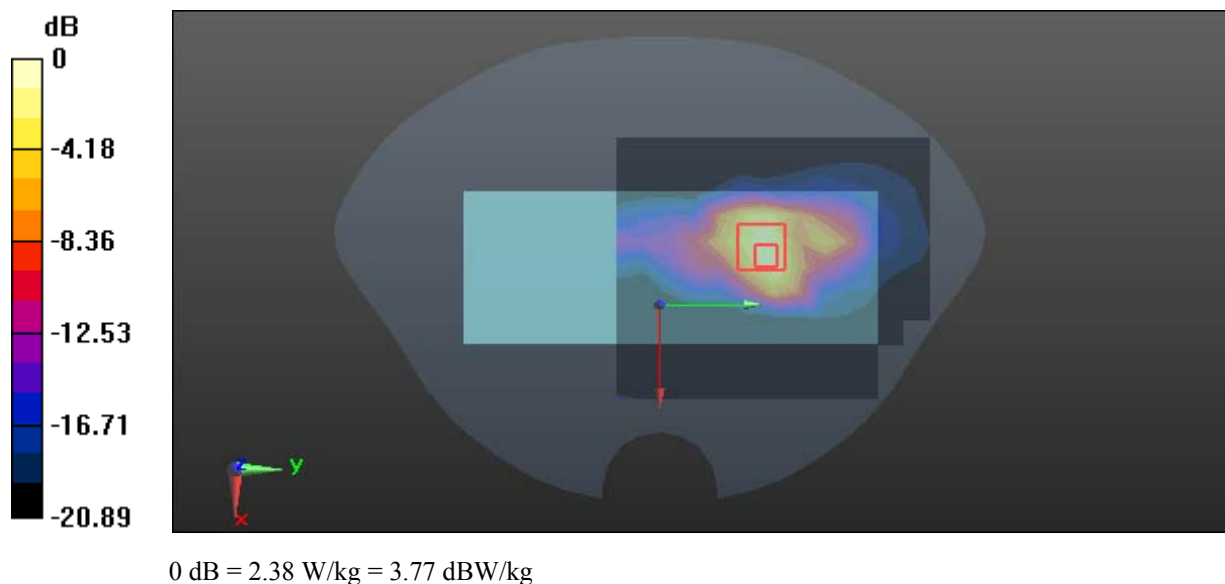

Test Plot 21#:LTE Band 66 1RB Mid Body/Limb Back**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 39.658$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.53, 5.53, 5.53) @ 1745 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.292 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.607 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.377 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.298 W/kg

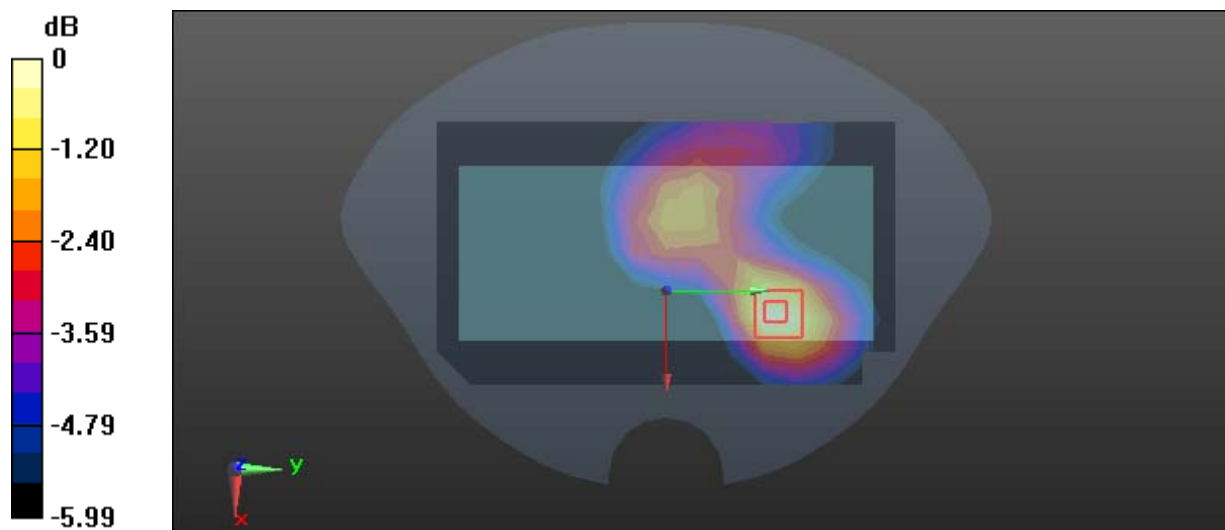

0 dB = 0.298 W/kg = -5.26 dBW/kg

Test Plot 22#:LTE Band 66 1RB Mid Limb Right**DUT: Smart POS Terminal; Type: AXIUM DX4000; Serial: 2T0L-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 39.658$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.53, 5.53, 5.53) @ 1745 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 6.79 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.00 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5.66 W/kg; SAR(10 g) = 2.76 W/kg

Maximum value of SAR (measured) = 7.08 W/kg

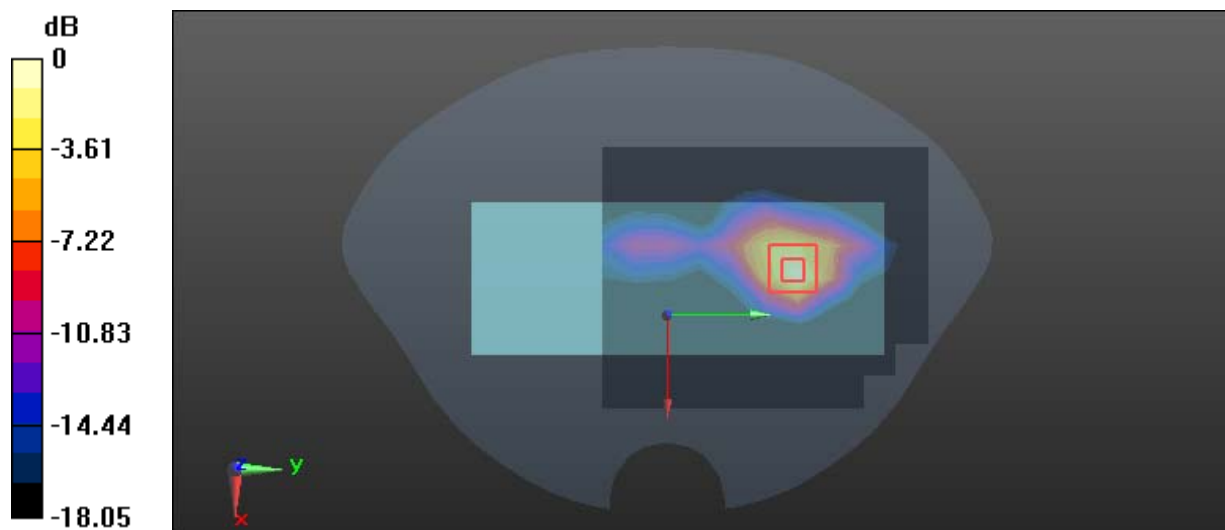

0 dB = 7.08 W/kg = 8.50 dBW/kg