



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: INGENICO

Address: 9 Avenue de la gare - Rovaltain TGV, BP25156, Valence Cedex 9, 26958 ,
France

FCC ID: XKB-DX4LOBCLWB

Product Name: Smart POS Terminal

**Standard(s): 47 CFR Part 15, Subpart C(15.225)
ANSI C63.10-2013**

The above equipment has been tested and found compliant with the requirement of the relative standards
by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR221263969-00C

Date Of Issue: 2023/3/28

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.1 EUT Operation Condition:	7
1.2.2 Support Equipment List and Details	7
1.2.3 Support Cable List and Details	7
1.2.4 Block Diagram of Test Setup.....	7
1.3 MEASUREMENT UNCERTAINTY	9
2. SUMMARY OF TEST RESULTS	10
3. REQUIREMENTS AND TEST PROCEDURES	11
3.1 AC LINE CONDUCTED EMISSIONS.....	11
3.1.1 Applicable Standard.....	11
3.1.2 EUT Setup.....	12
3.1.3 EMI Test Receiver Setup	12
3.1.4 Test Procedure	13
3.1.5 Corrected Amplitude & Margin Calculation.....	13
3.2 RADIATED EMISSIONS	14
3.2.1 Applicable Standard.....	14
3.2.2 EUT Setup.....	14
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	15
3.2.4 Corrected Amplitude & Margin Calculation.....	15
3.3 20 DB EMISSION BANDWIDTH:	16
3.3.1 Applicable Standard.....	16
3.3.2 EUT Setup.....	16
3.3.3 Test Procedure	16
3.4 FREQUENCY STABILITY.....	17
3.4.1 Applicable Standard.....	17
3.4.2 EUT Setup.....	17
3.4.3 Test Procedure	17
3.5 ANTENNA REQUIREMENT.....	18
3.5.1 Applicable Standard.....	18
3.5.2 Judgment.....	18
4. TEST DATA AND RESULTS	19
4.1 AC LINE CONDUCTED EMISSIONS.....	19
4.2 RADIATION SPURIOUS EMISSIONS	22
4.3 20 DB EMISSION BANDWIDTH	34

4.4 FREQUENCY STABILITY.....	36
5. RF EXPOSURE EVALUATION	37
APPLICABLE STANDARD.....	37

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR221263969-00C	Original Report	2023/3/28

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Smart POS Terminal
EUT Model:	AXIUM DX4000
Operation Frequency:	13.56 MHz
Modulation Type:	ASK
Rated Input Voltage:	5Vdc from adapter or 7.2Vdc/7.4Vdc from battery
Serial Number:	1XBG-2
EUT Received Date:	2023/1/5
EUT Received Status:	Good
Note: Conducted Emissions Test only performed at with Adapter 1# + Battery#2 since the worst is mode: with Adapter 1# + Battery#2 per test for DSS report. Radiated Emissions Test only performed at with Adapter 4# + Battery #2 since the worst is mode: with Adapter 4# + Battery #2 per test for DSS report.	

Antenna Information Detail ▲:

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
FPC	50	13.56MHz	Unknown
The Method of §15.203 Compliance: ☒ Antenna must be permanently attached to the unit. ☐ Antenna must use a unique type of connector to attach to the EUT. ☐ Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.			

Accessory Information:

Accessory Description	Manufacturer	Model
Adapter 1#	Xiamen Keli Electronics Co., Ltd	SW-0983
Adapter 2#	Jiangxi Jian Aohai Technology Co., Ltd	A319-050200U-US2
Adapter 3#	Shenzhen Flypower Technology Co., Ltd	PS10UA050K2000UU
Adapter 4#	Xiamen Keli Electronics Co., Ltd	KL-WD050200U
Battery 1#	Xinyu Ganfeng Electronics Co.,Ltd.	LD18650N
Battery 2#	Xinyu Ganfeng Electronics Co.,Ltd.	LD18650P
Battery 3#	SCUD (Fujian) Electronics Co.,Ltd.	LD18650K-1

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.
Equipment Modifications:	No
EUT Exercise Software:	No
Engineering Mode was provided by manufacturer ▲. The maximum power was configured default setting.	

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	1	EUT	Adapter

1.2.4 Block Diagram of Test Setup

Conducted emissions:

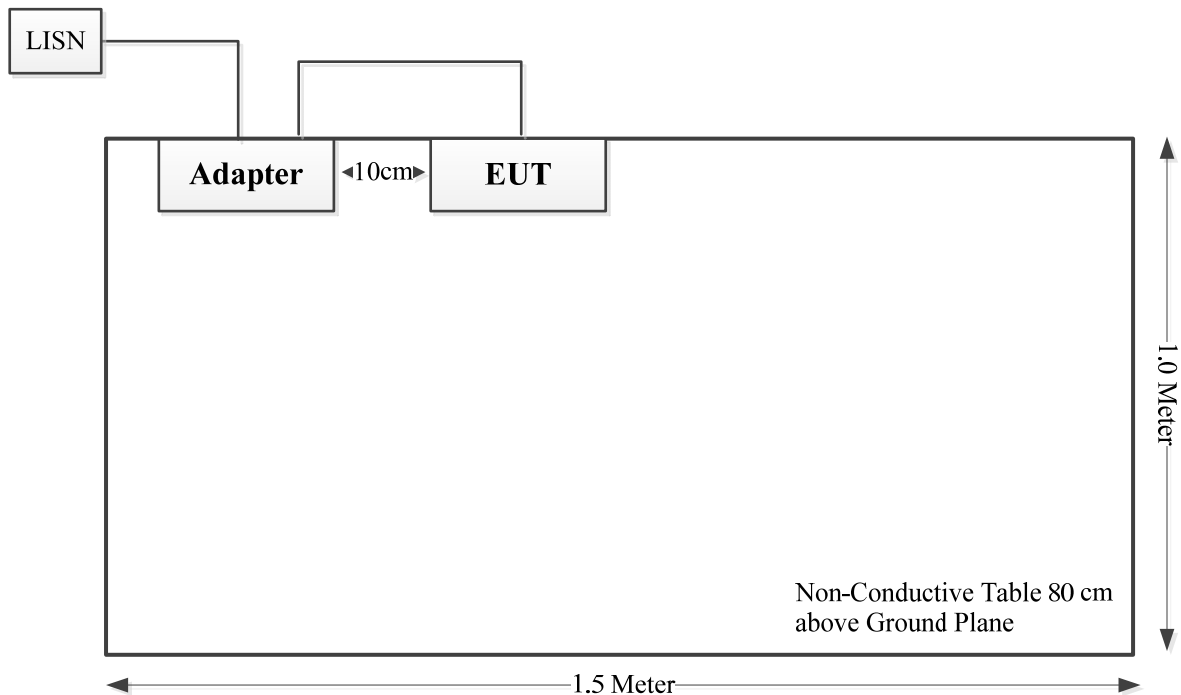

Radiated emissions:

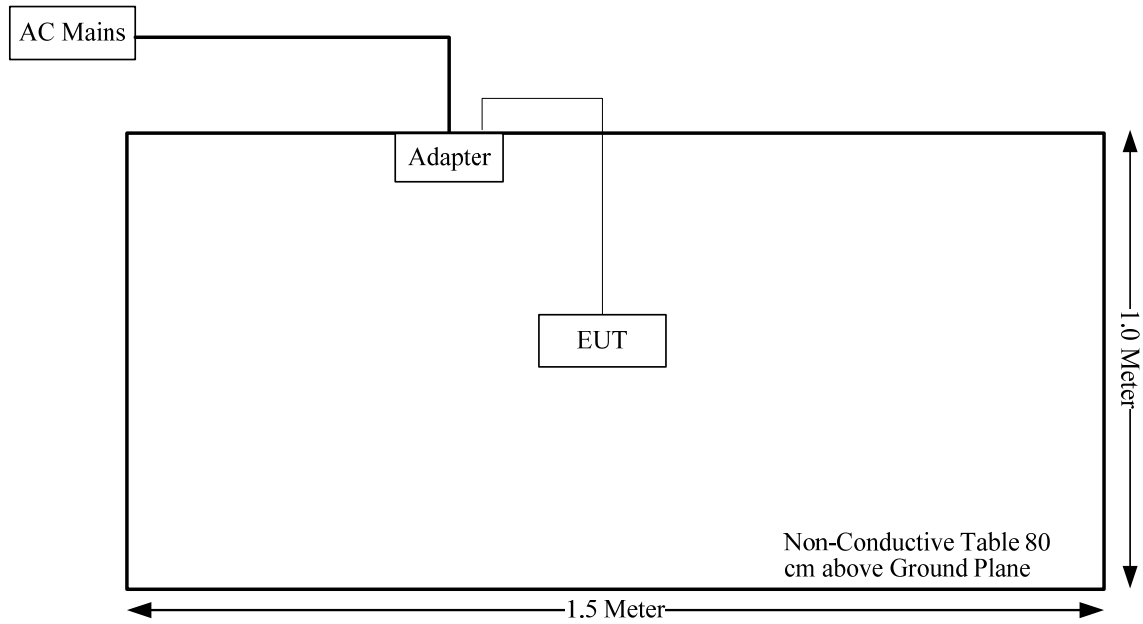

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
Unwanted Emissions, radiated	9kHz~30MHz: 4.12dB 30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.203	Antenna Requirement	Compliant
FCC§15.207 (a)	Conducted Emissions	Compliant
§15.225 §15.209 §15.205	Radiated Emission Test	Compliant
§15.225(e)	Frequency Stability	Compliant
§15.215(c)	20 dB Bandwidth	Compliant
§1.1310 & §2.1093	RF Exposure	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

According FCC publication number 174176, for a device with a permanent antenna operating at or below 30 MHz, the measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) perform the AC line conducted tests with the permanent antenna to determine compliance with the Section 15.207 limits outside the transmitter's fundamental emission band; (2) retest with a dummy load in lieu of the permanent antenna to determine compliance with the Section 15.207 limits within the transmitter's fundamental emission band.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiated Emissions


3.2.1 Applicable Standard

As per FCC Part 15.225


- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

3.2.2 EUT Setup

9kHz-30MHz:

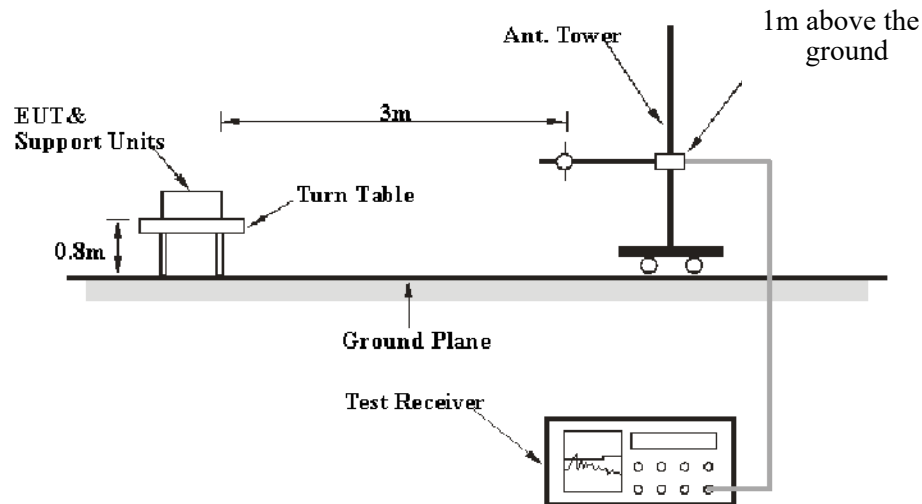

30MHz-1GHz:

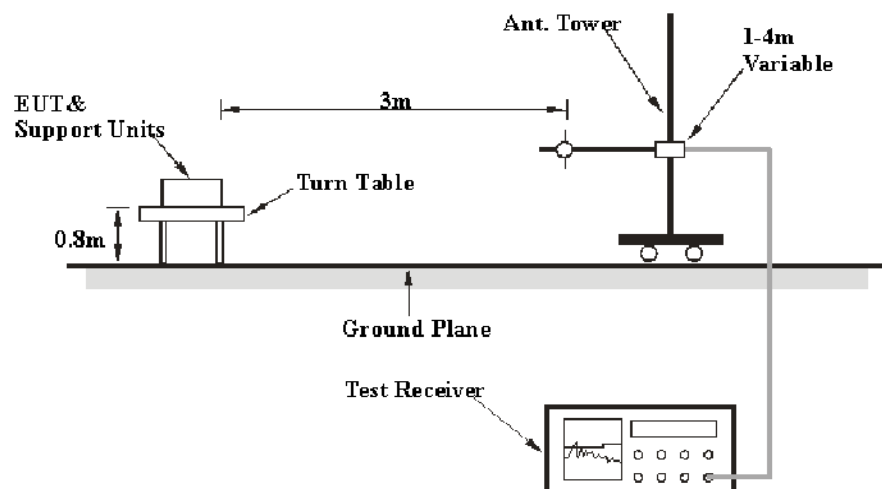

The radiated emission tests were performed in the 3-meter chamber test site, using the setup accordance with the ANSI C63.10-2013.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 1 GHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
9 kHz – 150 kHz	200 Hz	1 kHz	QP
150 kHz – 30 MHz	9 kHz	30 kHz	QP
30 MHz – 1000 MHz	120 kHz	300 kHz	QP

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP measurement

3.2.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.3 20 dB Emission Bandwidth:

3.3.1 Applicable Standard

FCC §15.215

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through § 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of band operation.

3.3.2 EUT Setup

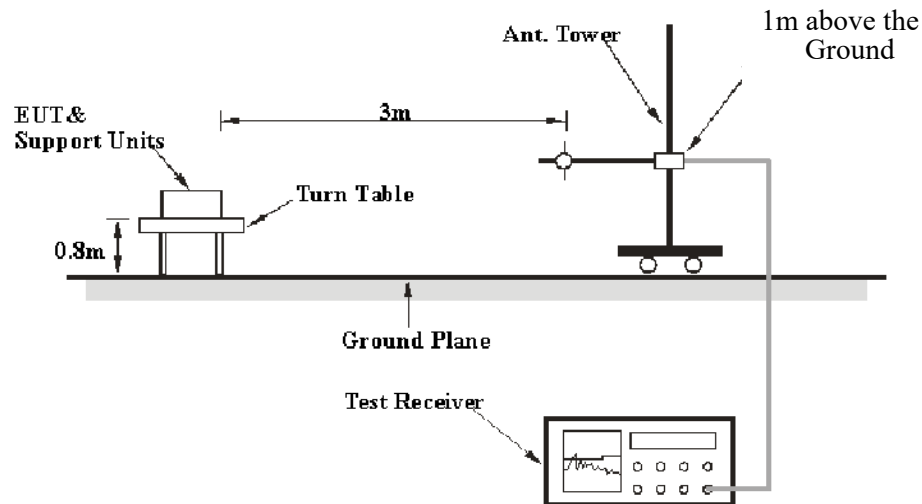

3.3.3 Test Procedure

1. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
2. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.


3.4 Frequency Stability

3.4.1 Applicable Standard

As per FCC Part 15.225:

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

3.4.2 EUT Setup

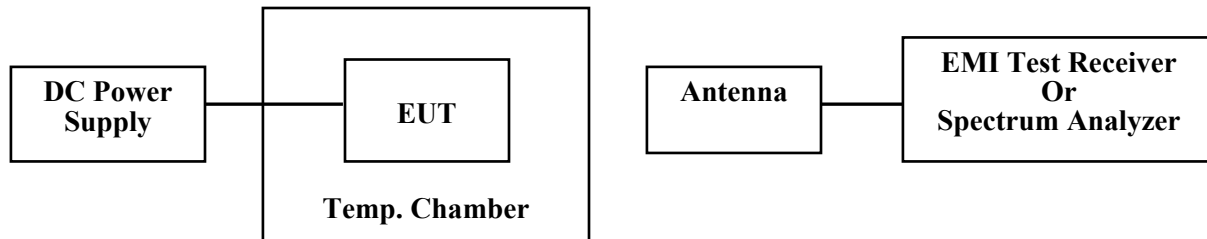

3.4.3 Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power.

The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to the end point of the battery. The output frequency was recorded for each voltage.

3.5 Antenna Requirement

3.5.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

3.5.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	IXBG-2	Test Date:	2023/1/12
Test Site:	CE	Test Mode:	Transmitting
Tester:	Vic Du	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	21.9	Relative Humidity: (%)	71	ATM Pressure: (kPa)	100.8


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2022/04/01	2023/03/31
R&S	EMI Test Receiver	ESR3	102726	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2022/08/07	2023/08/06
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Adapter 1# + Battery#2:

Test Mode: Transmitting
Port: Line
Note:

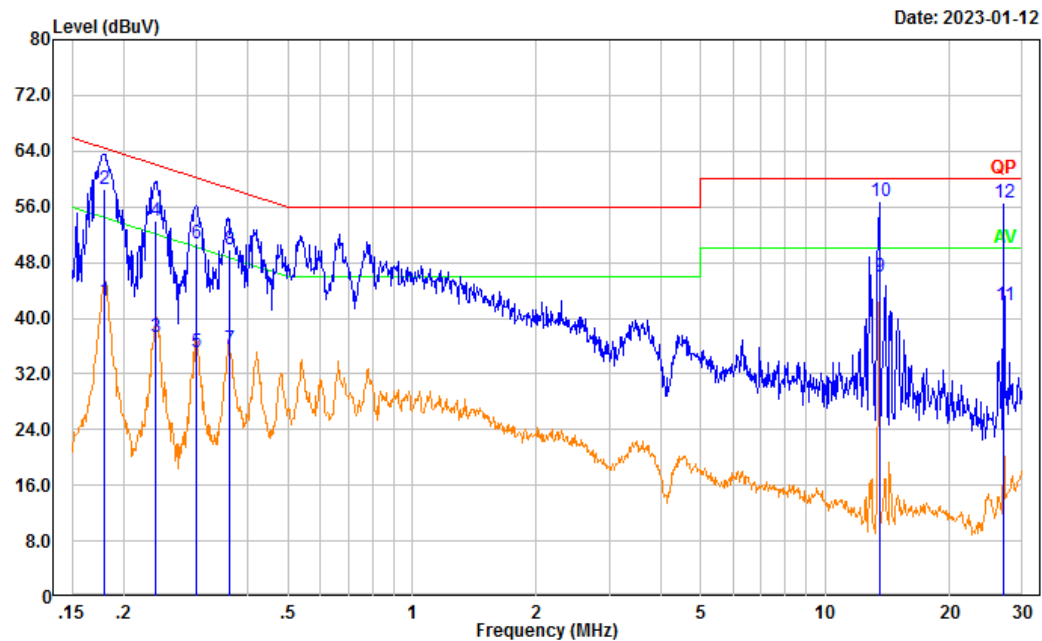

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.179	32.85	9.61	42.46	54.51	12.05	Average
2	0.179	48.98	9.61	58.59	64.51	5.92	QP
3	0.239	27.76	9.61	37.37	52.13	14.76	Average
4	0.239	44.32	9.61	53.93	62.13	8.20	QP
5	0.300	25.47	9.61	35.08	50.25	15.17	Average
6	0.300	41.23	9.61	50.84	60.25	9.41	QP
7	0.361	25.93	9.61	35.54	48.72	13.18	Average
8	0.361	40.16	9.61	49.77	58.72	8.95	QP
9	13.560	36.36	9.68	46.04	50.00	3.96	Average
10	13.560	47.19	9.68	56.87	60.00	3.13	QP
11	27.122	31.92	9.83	41.75	50.00	8.25	Average
12	27.122	46.85	9.83	56.68	60.00	3.32	QP

Test Mode: Transmitting
Port: neutral
Note:

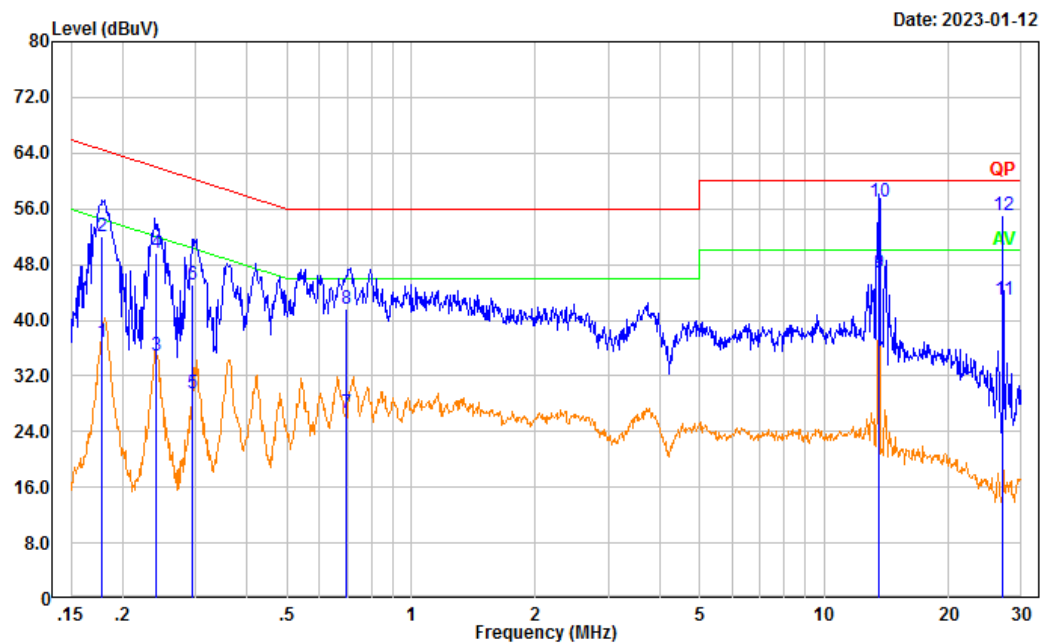

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.178	27.34	9.61	36.95	54.56	17.61	Average
2	0.178	42.41	9.61	52.02	64.56	12.54	QP
3	0.240	25.28	9.61	34.89	52.08	17.19	Average
4	0.240	40.05	9.61	49.66	62.08	12.42	QP
5	0.296	19.96	9.61	29.57	50.35	20.78	Average
6	0.296	35.53	9.61	45.14	60.35	15.21	QP
7	0.693	17.08	9.62	26.70	46.00	19.30	Average
8	0.693	32.03	9.62	41.65	56.00	14.35	QP
9	13.561	37.21	9.68	46.89	50.00	3.11	Average
10	13.561	47.26	9.68	56.94	60.00	3.06	QP
11	27.120	33.18	9.80	42.98	50.00	7.02	Average
12	27.120	45.31	9.80	55.11	60.00	4.89	QP

4.2 Radiation Spurious Emissions

Serial Number:	1XBG-2	Test Date:	2023/2/1
Test Site:	966-2	Test Mode:	Transmitting
Tester:	Vic Du	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	21.6	Relative Humidity: (%)	44	ATM Pressure: (kPa)	100.9

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
TESEQ	HF Loop Antenna	HLA6120	33561	2021/02/03	2024/02/02
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2022/07/15	2023/07/14
TIMES MICROWAVE	Coaxial Cable	LMR-600- UltraFlex	C-0470-02	2022/07/17	2023/07/16
TIMES MICROWAVE	Coaxial Cable	LMR-600- UltraFlex	C-0780-01	2022/07/17	2023/07/16
Sonoma	Amplifier	310N	186165	2022/07/17	2023/07/16
Audix	Test Software	E3	201021 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Please refer to the below table and plots.

Note: The device can be mounted in multiple orientations, test was performed with X,Y, Z Axis according to C63.10 Figure 8, the worst orientation was photographed and it's data was recorded.

1) 9 kHz~30MHz:


Adapter 4# + Battery #2

Test Mode: Transmitting
Polarization: Parallel
Note:

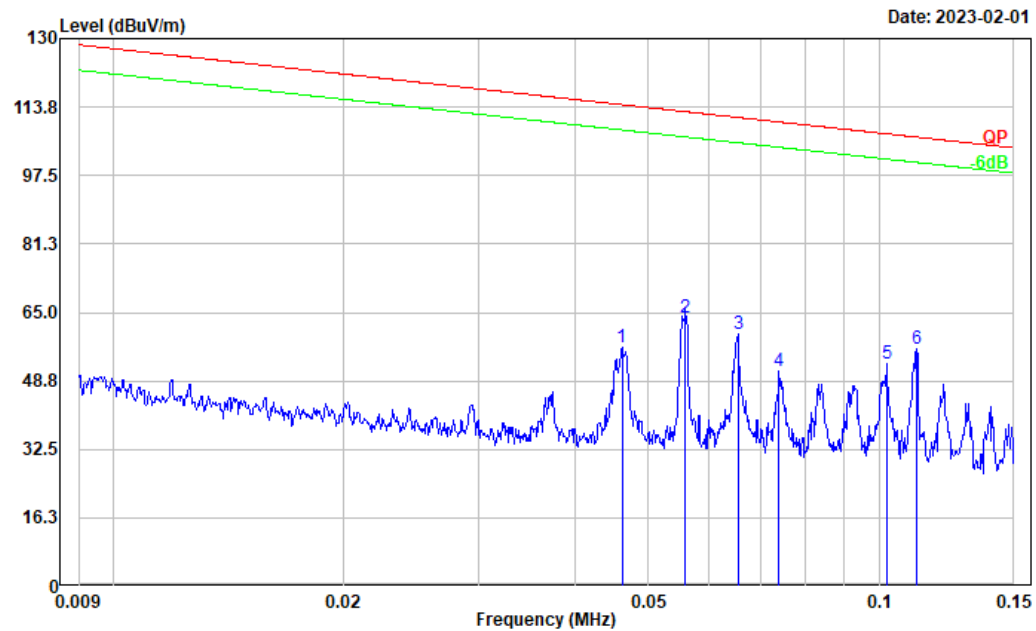


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.046	36.13	20.45	56.58	114.32	57.74	Peak
2	0.056	43.48	20.45	63.93	112.66	48.73	Peak
3	0.065	39.31	20.46	59.77	111.29	51.52	Peak
4	0.074	30.55	20.43	50.98	110.22	59.24	Peak
5	0.102	32.67	20.27	52.94	107.41	54.47	Peak
6	0.112	36.19	20.27	56.46	106.62	50.16	Peak

Test Mode: Transmitting
Polarization: Parallel
Note:

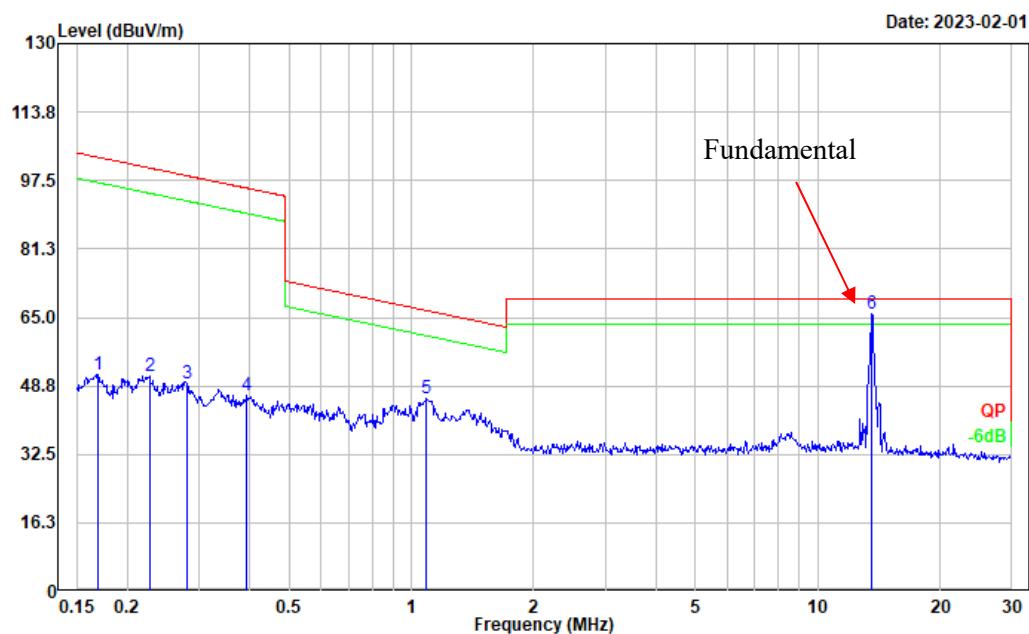


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.169	31.04	20.27	51.31	103.02	51.71	Peak
2	0.227	30.77	20.22	50.99	100.49	49.50	Peak
3	0.280	29.10	20.18	49.28	98.65	49.37	Peak
4	0.393	26.34	20.13	46.47	95.71	49.24	Peak
5	1.088	25.72	20.09	45.81	66.72	20.91	Peak
6	13.551	45.40	20.52	65.92	69.54	3.62	Peak

Test Mode: Transmitting
Polarization: Parallel
Note:

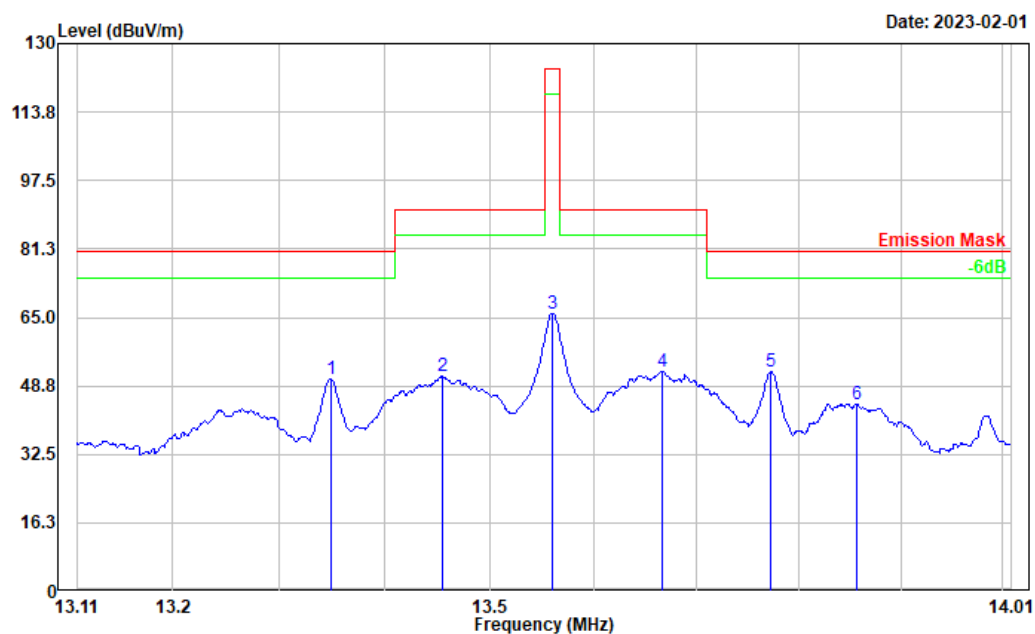


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	13.349	29.96	20.51	50.47	80.51	30.04	Peak
2	13.455	30.53	20.51	51.04	90.47	39.43	Peak
3	13.561	45.45	20.52	65.97	124.00	58.03	Peak
4	13.666	31.65	20.52	52.17	90.47	38.30	Peak
5	13.772	31.58	20.53	52.11	80.51	28.40	Peak
6	13.857	23.95	20.53	44.48	80.51	36.03	Peak

Test Mode: Transmitting
Polarization: Perpendicular
Note:

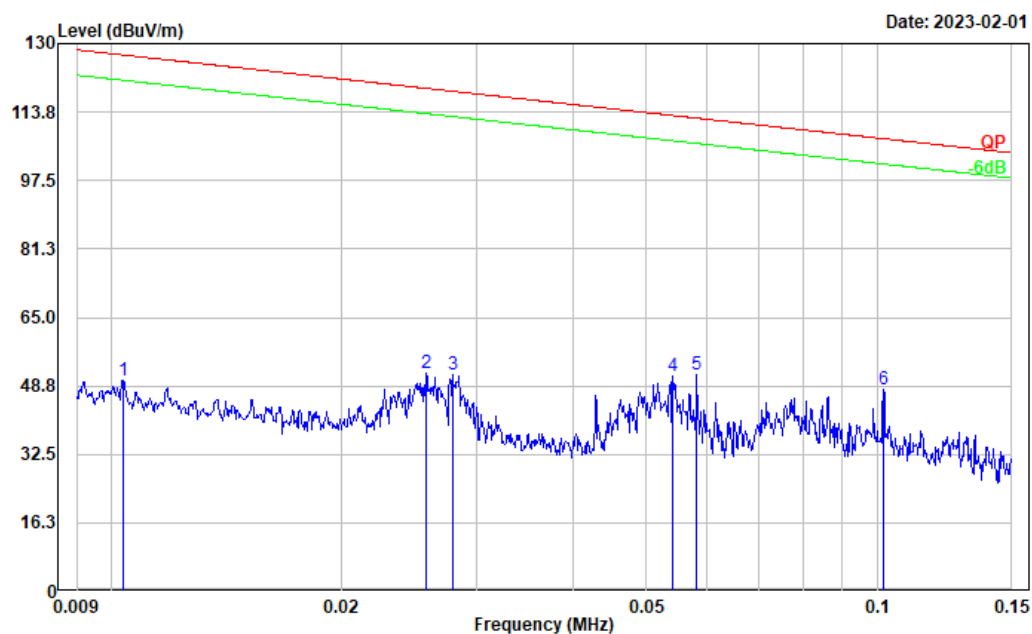


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.010	29.47	20.52	49.99	127.30	77.31	Peak
2	0.026	31.37	20.44	51.81	119.38	67.57	Peak
3	0.028	31.07	20.44	51.51	118.70	67.19	Peak
4	0.054	30.81	20.45	51.26	112.93	61.67	Peak
5	0.058	30.87	20.45	51.32	112.32	61.00	Peak
6	0.102	27.67	20.27	47.94	107.43	59.49	Peak

Test Mode: Transmitting
Polarization: Perpendicular
Note:

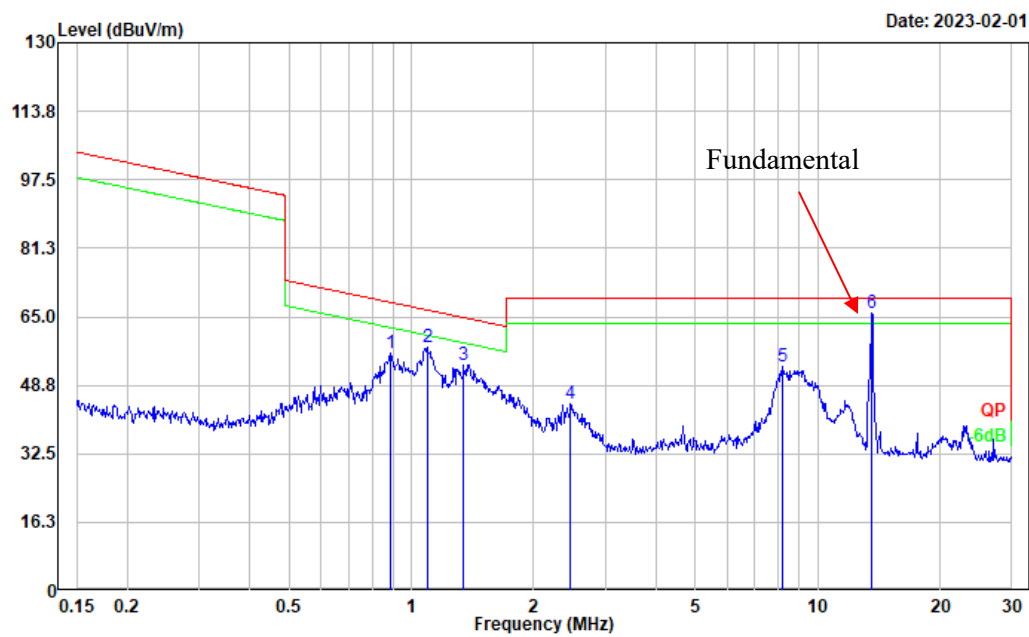


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.885	36.11	20.11	56.22	68.56	12.34	Peak
2	1.094	37.60	20.09	57.69	66.68	8.99	Peak
3	1.345	33.58	20.06	53.64	64.84	11.20	Peak
4	2.461	24.44	20.07	44.51	69.54	25.03	Peak
5	8.192	32.89	20.26	53.15	69.54	16.39	Peak
6	13.551	45.46	20.52	65.98	69.54	3.56	Peak

Test Mode: Transmitting
Polarization: Perpendicular
Note:

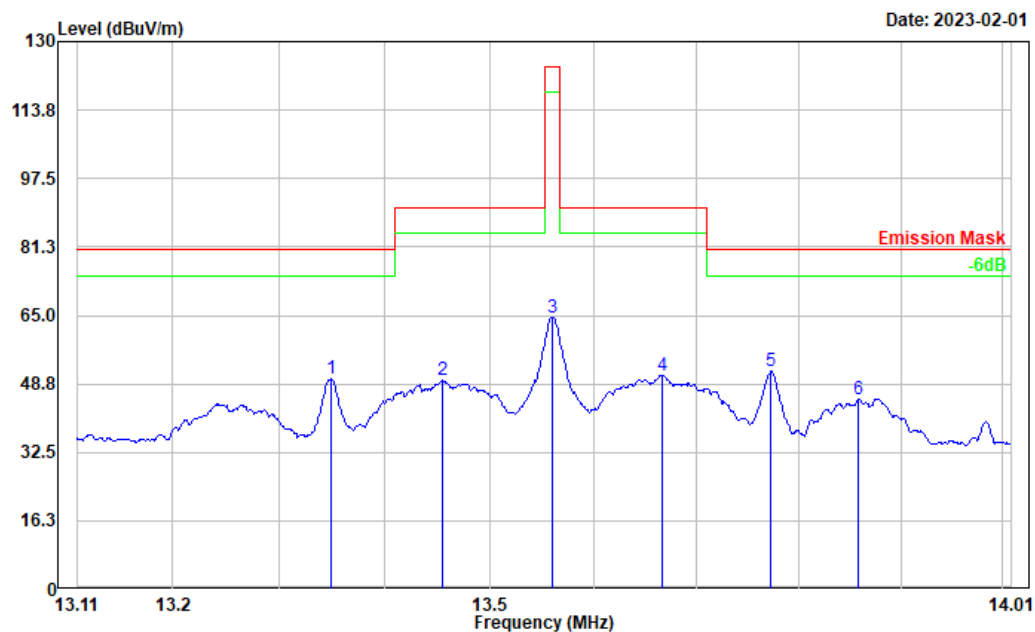


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	13.349	29.44	20.51	49.95	80.51	30.56	Peak
2	13.455	28.99	20.51	49.50	90.47	40.97	Peak
3	13.561	44.09	20.52	64.61	124.00	59.39	Peak
4	13.666	30.29	20.52	50.81	90.47	39.66	Peak
5	13.772	31.13	20.53	51.66	80.51	28.85	Peak
6	13.859	24.43	20.53	44.96	80.51	35.55	Peak

Test Mode: Transmitting
Polarization: Ground-parallel
Note:

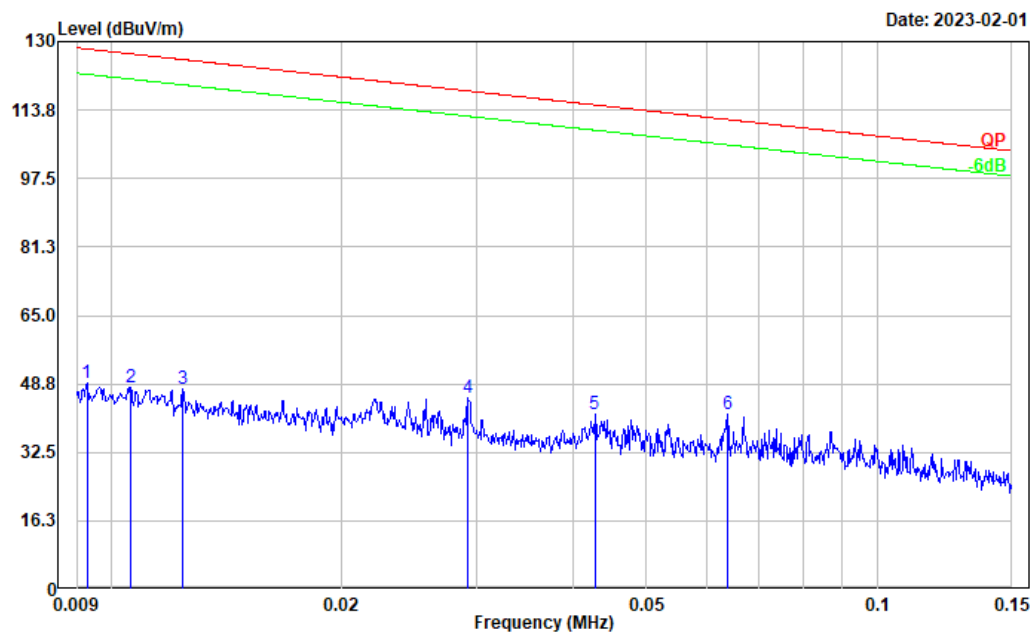


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	28.60	20.51	49.11	128.25	79.14	Peak
2	0.011	27.50	20.52	48.02	127.10	79.08	Peak
3	0.012	26.87	20.52	47.39	125.73	78.34	Peak
4	0.029	24.90	20.44	45.34	118.28	72.94	Peak
5	0.043	21.17	20.44	41.61	114.98	73.37	Peak
6	0.064	21.25	20.45	41.70	111.51	69.81	Peak

Test Mode: Transmitting
Polarization: Ground-parallel
Note:

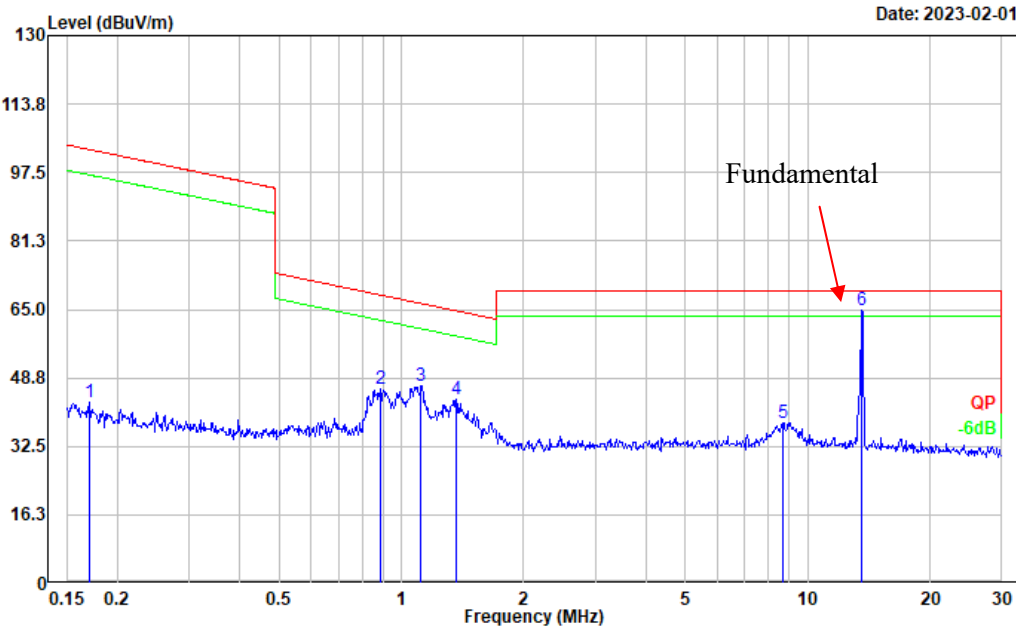

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	0.170	22.72	20.27	42.99	102.98	59.99	Peak
2	0.890	25.87	20.11	45.98	68.51	22.53	Peak
3	1.117	26.74	20.10	46.84	66.49	19.65	Peak
4	1.367	23.50	20.06	43.56	64.70	21.14	Peak
5	8.683	17.81	20.30	38.11	69.54	31.43	Peak
6	13.551	44.36	20.52	64.88	69.54	4.66	Peak

Test Mode: Transmitting
Polarization: Ground-parallel
Note:

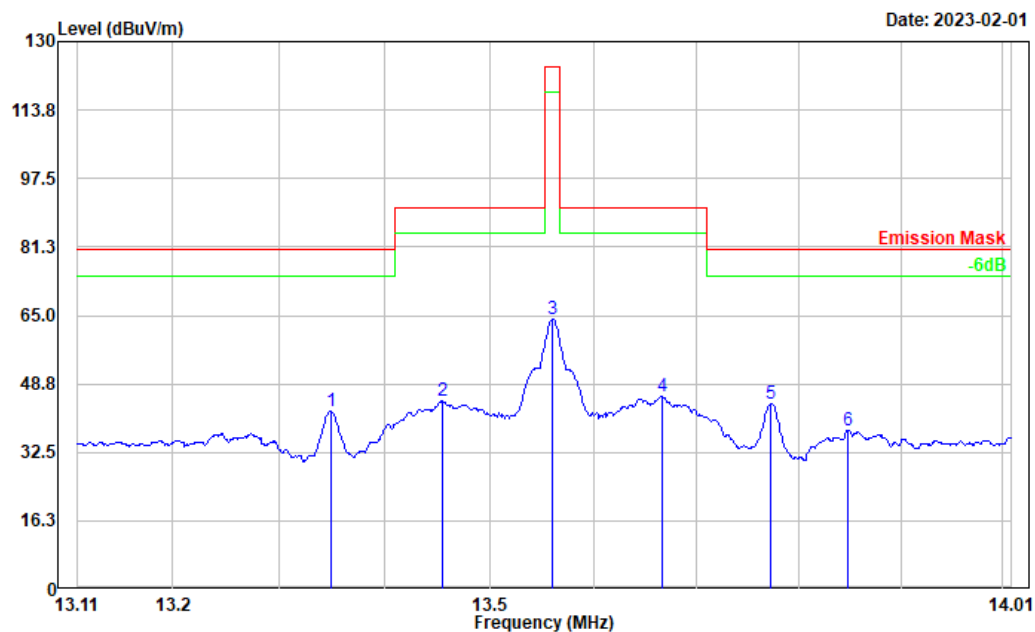


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	13.349	21.74	20.51	42.25	80.51	38.26	Peak
2	13.455	24.12	20.51	44.63	90.47	45.84	Peak
3	13.561	43.61	20.52	64.13	124.00	59.87	Peak
4	13.666	25.14	20.52	45.66	90.47	44.81	Peak
5	13.772	23.60	20.53	44.13	80.51	36.38	Peak
6	13.848	17.34	20.53	37.87	80.51	42.64	Peak

2) 30MHz-1GHz:


Adapter 4# + Battery #2

Test Mode: Transmitting
Polarization: horizontal
Note:

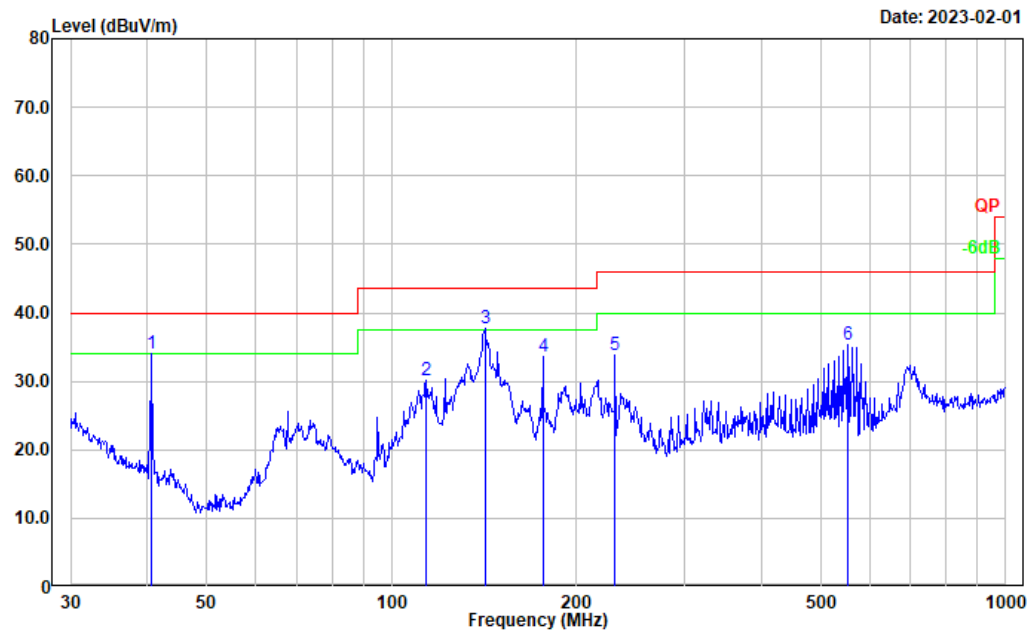

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	40.559	45.63	-11.65	33.98	40.00	6.02	Peak
2	113.714	42.06	-12.01	30.05	43.50	13.45	Peak
3	141.826	49.60	-11.92	37.68	43.50	5.82	Peak
4	176.269	46.83	-13.31	33.52	43.50	9.98	Peak
5	230.907	46.80	-13.01	33.79	46.00	12.21	Peak
6	552.883	40.97	-5.71	35.26	46.00	10.74	Peak

Test Mode: Transmitting
Polarization: vertical
Note:

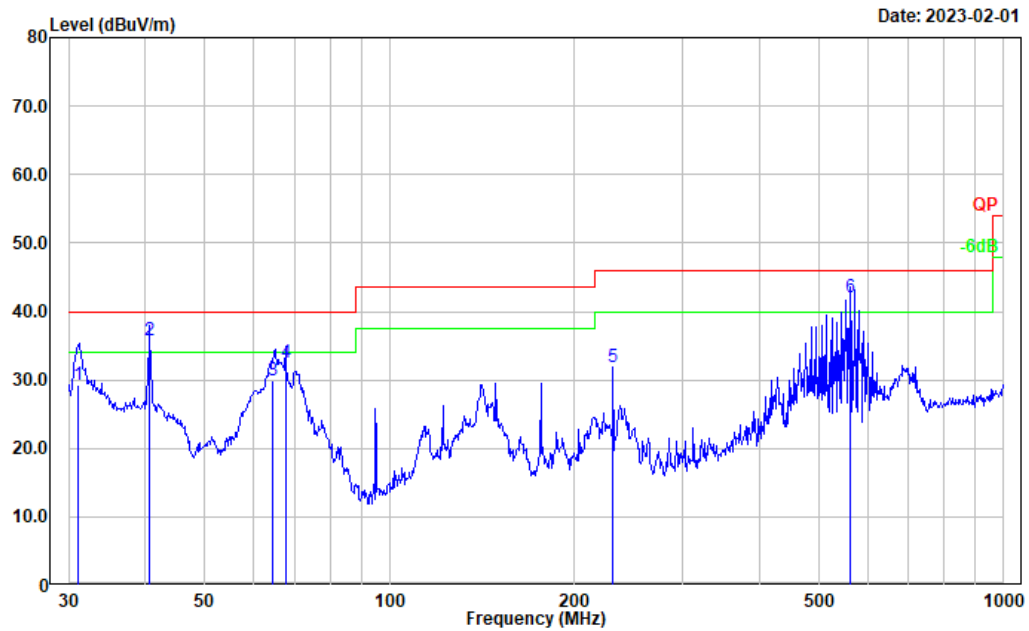

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.107	33.72	-4.45	29.27	40.00	10.73	QP
2	40.690	47.45	-11.73	35.72	40.00	4.28	QP
3	64.610	46.79	-16.97	29.82	40.00	10.18	QP
4	67.813	49.19	-16.69	32.50	40.00	7.50	QP
5	230.907	44.90	-13.01	31.89	46.00	14.11	Peak
6	561.628	47.71	-5.64	42.07	46.00	3.93	QP

4.3 20 dB Emission Bandwidth

Serial Number:	1XBG-2	Test Date:	2023/2/1
Test Site:	966-2	Test Mode:	Transmitting
Tester:	Vic Du	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.6	Relative Humidity: (%)	44	ATM Pressure: (kPa)	100.9
----------------------	------	---------------------------	----	---------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
TESEQ	HF Loop Antenna	HLA6120	33561	2021/02/03	2024/02/02
R&S	EMI Test Receiver	ESR3	102724	2022/07/15	2023/07/14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022/07/17	2023/07/16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022/07/17	2023/07/16

*** Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Frequency (MHz)	20 dB Bandwidth (Hz)
13.56	1508

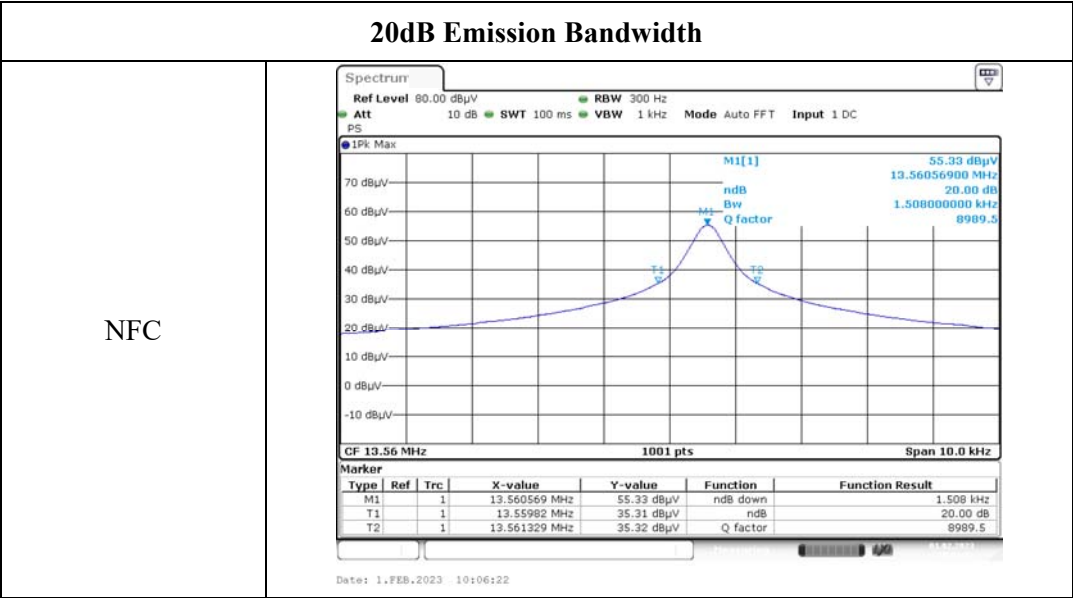

4.4 Frequency Stability

Serial Number:	1XBG-2	Test Date:	2023/2/1
Test Site:	RF	Test Mode:	Transmitting
Tester:	Vic Du	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.6	Relative Humidity: (%)	44	ATM Pressure: (kPa)	100.9
----------------------	------	---------------------------	----	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
TESEQ	HF Loop Antenna	HLA6120	33561	2021/02/03	2024/02/02
R&S	EMI Test Receiver	ESR3	102724	2022/07/15	2023/07/14
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/04/06	2023/04/05
YINSAIGE	Coaxial Cable	SS402	SJ0300001	Each time	N/A
UNI-T	Multimeter	UT39A+	C210582554	2022/09/29	2023/09/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

*** Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

7.4 Vdc Rated Input was the worst case:

$f_0 = 13.56 \text{ MHz}$				
Temperature	Voltage	Measured frequency	Frequency Error	Limit
°C	V _{DC}	MHz	Hz	Hz
-20	7.4	13.5605462	546.2	±1356
-10		13.5605146	514.6	±1356
0		13.5605258	525.8	±1356
10		13.5605269	526.9	±1356
20		13.5605690	569.0	±1356
25		13.5605238	523.8	±1356
30		13.5605945	594.5	±1356
40		13.5605624	562.4	±1356
50		13.5605326	532.6	±1356
20	6.95	13.5605841	584.1	±1356
20	8.4	13.5605679	567.9	±1356

5. RF EXPOSURE EVALUATION

Applicable Standard

According to KDB447498 D01 General RF Exposure Guidance v06: 4.3. General SAR test exclusion guidance

c) For frequencies below 100 MHz, the following may be considered for SAR test exclusion (also illustrated in Appendix C):

- 1) For *test separation distances* > 50 mm and < 200 mm, the power threshold at the corresponding test separation distance at 100 MHz in step b) is multiplied by $[1 + \log(100/f_{\text{(MHz)}})]$
- 2) For *test separation distances* ≤ 50 mm, the power threshold determined by the equation in c) 1) for 50 mm and 100 MHz is multiplied by $\frac{1}{2}$
- 3) SAR measurement procedures are not established below 100 MHz

Measurement Result:

For NFC, the power of EUT: E Field@3m is 65.98 dBuV/m = -29.22 dBm(0.001 mW)

Note: $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$ for $d = 3$ m.

SAR test exclusion threshold for NFC(13.56MHz) separation distance < 50 mm

$$= [474 * (1 + \log(100/f_{\text{(MHz)}}))] / 2$$

$$= 443 \text{ mW}$$

$$> 0.001 \text{ mW}$$

Result: Compliant.

===== END OF REPORT =====