


Project No.: 2607P42218E-RF
 Test Mode: 802.11n40 5550MHz
 EUT Model: AXIUM DX8
 Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

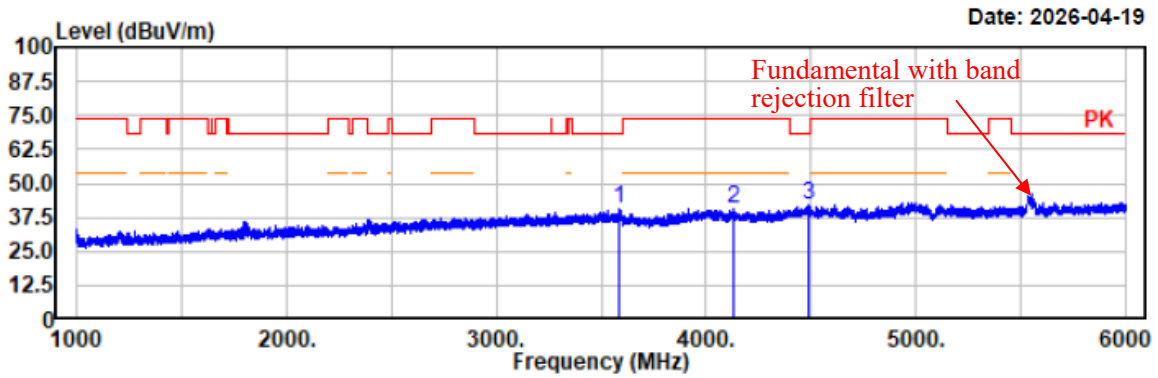


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3589.00	48.33	-7.51	40.82	68.20	27.38	vertical	Peak
4127.50	46.96	-6.16	40.80	74.00	33.20	vertical	Peak
4485.50	47.15	-5.39	41.76	68.20	26.44	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5670MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

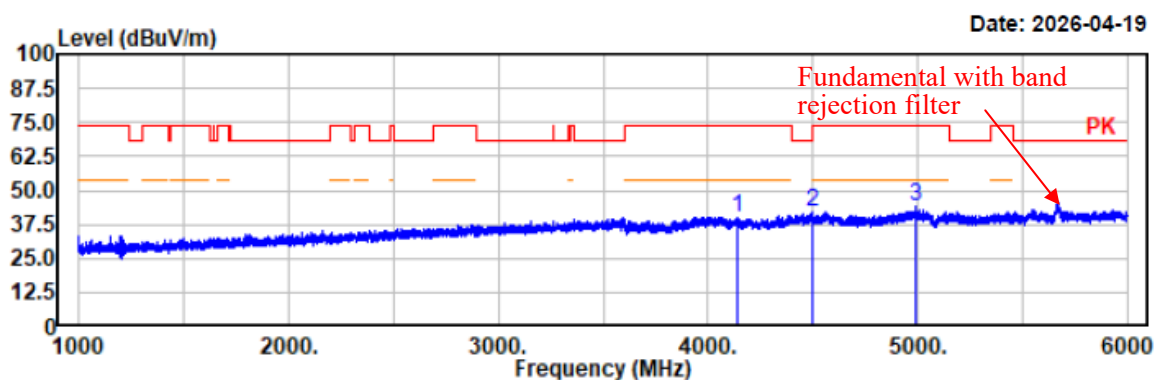


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4136.00	46.40	-6.14	40.26	74.00	33.74	horizontal	Peak
4499.00	47.34	-5.33	42.01	68.20	26.19	horizontal	Peak
4989.50	49.00	-5.02	43.98	74.00	30.02	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5670MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

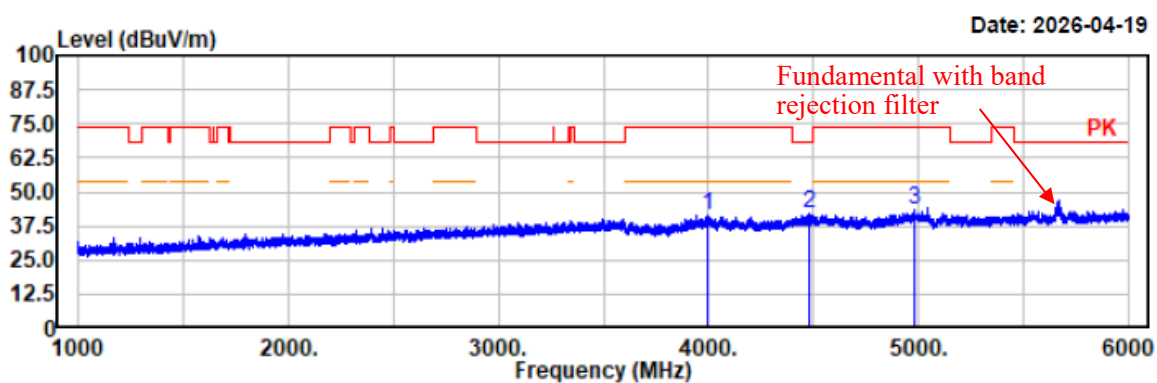


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3993.50	47.74	-6.57	41.17	74.00	32.83	vertical	Peak
4484.50	47.25	-5.39	41.86	68.20	26.34	vertical	Peak
4979.50	48.16	-5.04	43.12	74.00	30.88	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5530MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

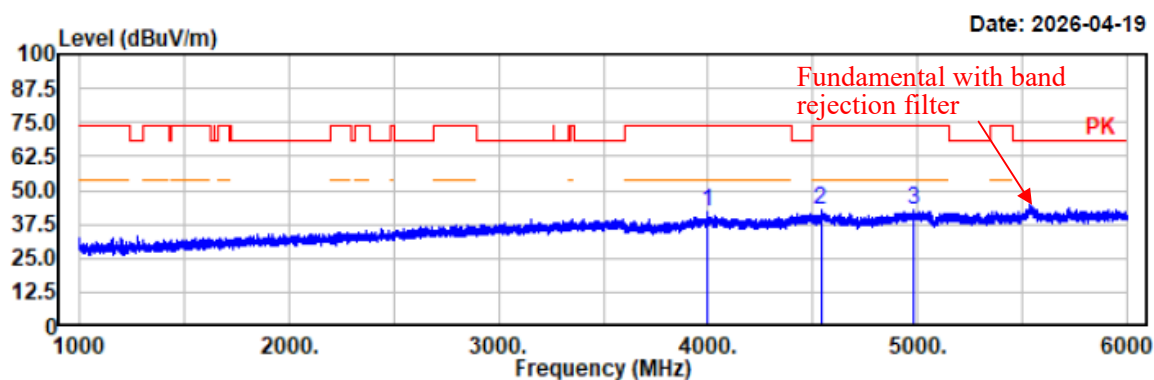


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3996.00	48.29	-6.56	41.73	74.00	32.27	horizontal	Peak
4538.50	47.89	-5.36	42.53	74.00	31.47	horizontal	Peak
4980.50	47.99	-5.04	42.95	74.00	31.05	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5530MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

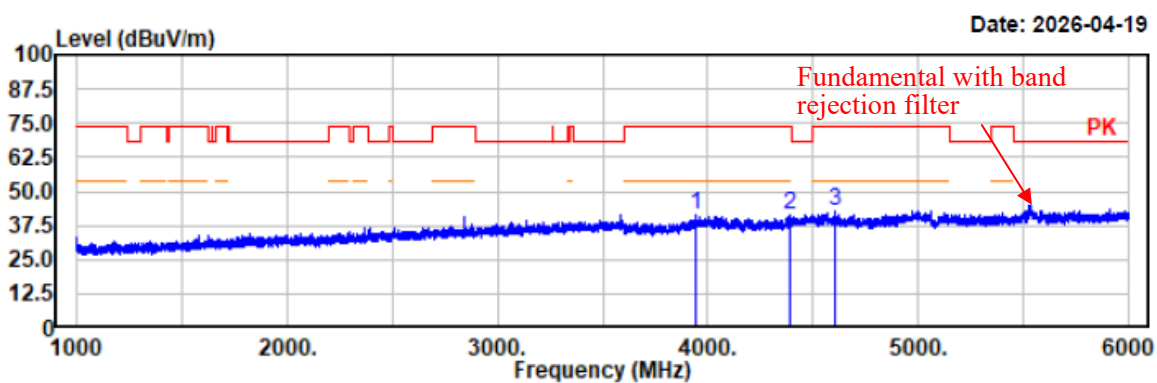


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3939.50	48.33	-6.76	41.57	74.00	32.43	vertical	Peak
4386.50	47.30	-5.69	41.61	74.00	32.39	vertical	Peak
4607.50	47.72	-5.29	42.43	74.00	31.57	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5610MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

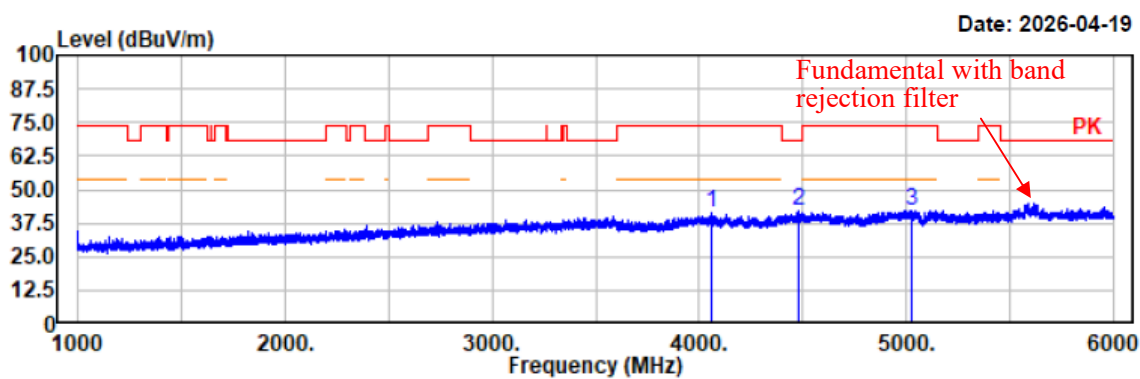


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4063.00	47.46	-6.39	41.07	74.00	32.93	horizontal	Peak
4478.00	47.15	-5.42	41.73	68.20	26.47	horizontal	Peak
5028.50	47.28	-4.94	42.34	74.00	31.66	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5610MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

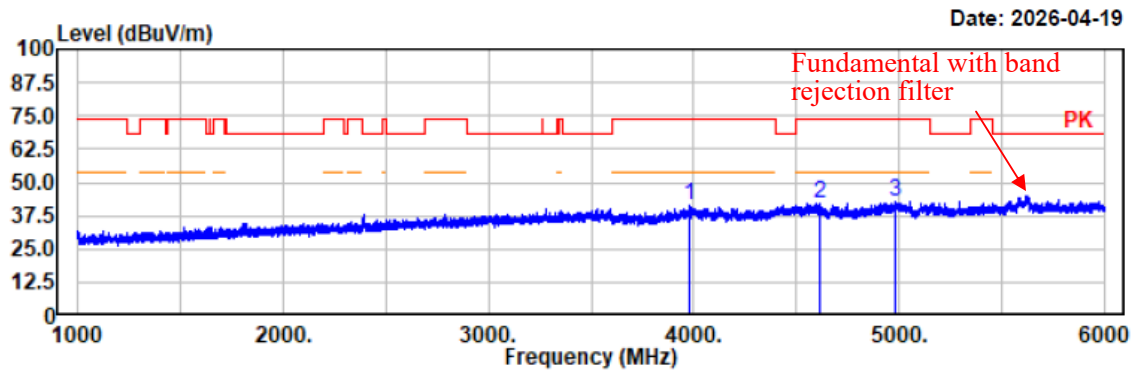


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3982.00	47.67	-6.61	41.06	74.00	32.94	vertical	Peak
4614.00	47.22	-5.28	41.94	74.00	32.06	vertical	Peak
4984.00	47.50	-5.02	42.48	74.00	31.52	vertical	Peak

Band 4:

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5745MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

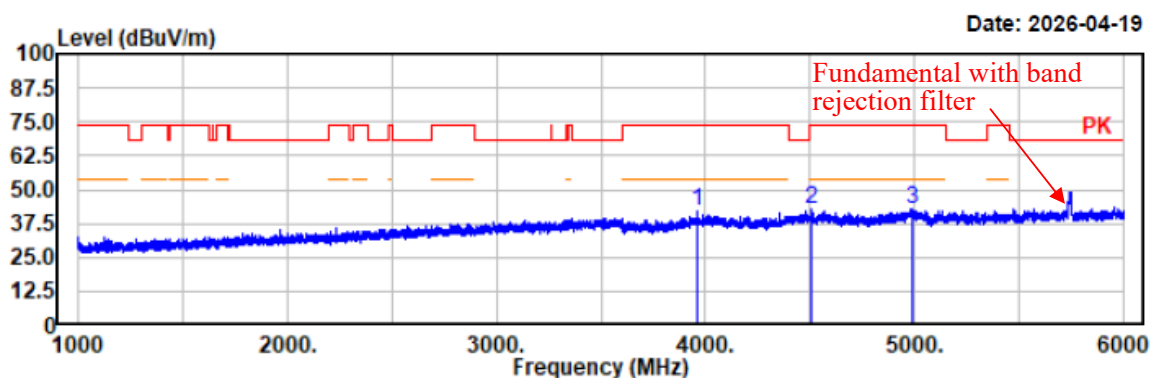


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3959.50	48.58	-6.70	41.88	74.00	32.12	horizontal	Peak
4506.00	48.30	-5.33	42.97	74.00	31.03	horizontal	Peak
4988.00	47.71	-5.01	42.70	74.00	31.30	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5745MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

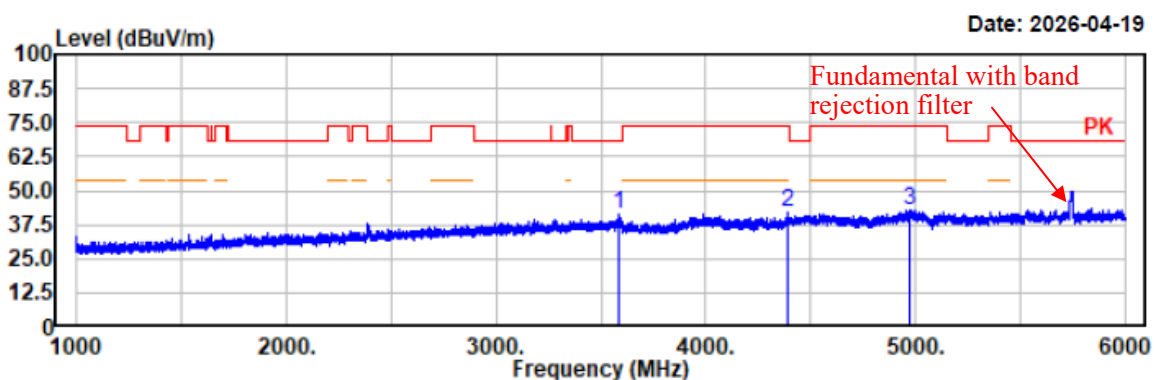


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3583.50	48.72	-7.50	41.22	68.20	26.98	vertical	Peak
4394.50	47.53	-5.67	41.86	74.00	32.14	vertical	Peak
4974.00	48.09	-5.05	43.04	74.00	30.96	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5785MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

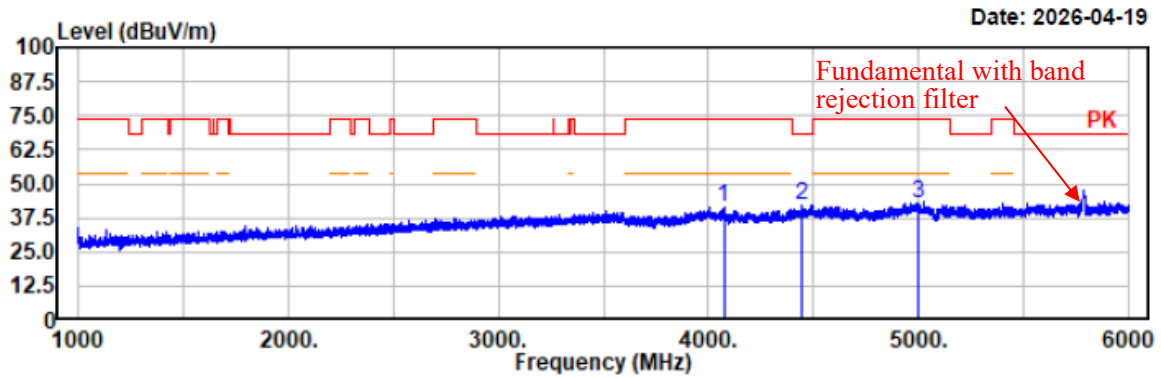


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4073.00	47.97	-6.35	41.62	74.00	32.38	horizontal	Peak
4440.50	47.54	-5.56	41.98	68.20	26.22	horizontal	Peak
5002.00	48.00	-4.99	43.01	74.00	30.99	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5785MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

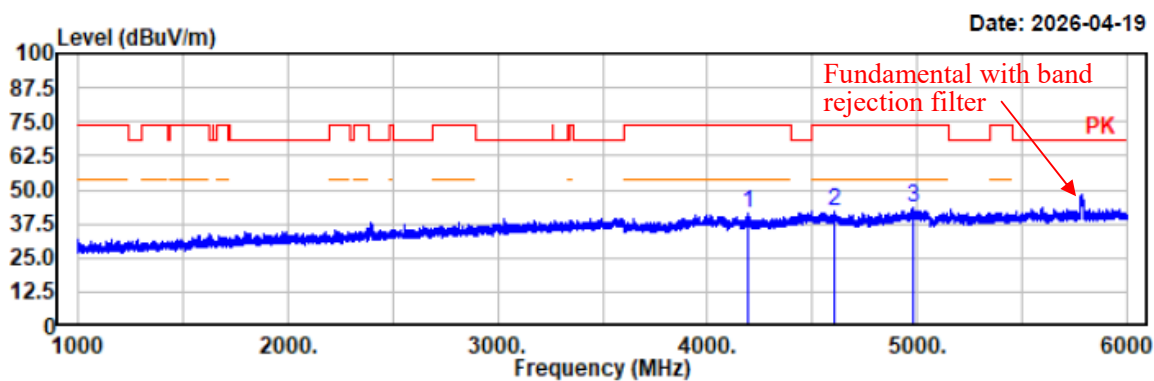


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4191.00	46.92	-5.88	41.04	74.00	32.96	vertical	Peak
4604.50	47.61	-5.29	42.32	74.00	31.68	vertical	Peak
4978.00	48.48	-5.04	43.44	74.00	30.56	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5825MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

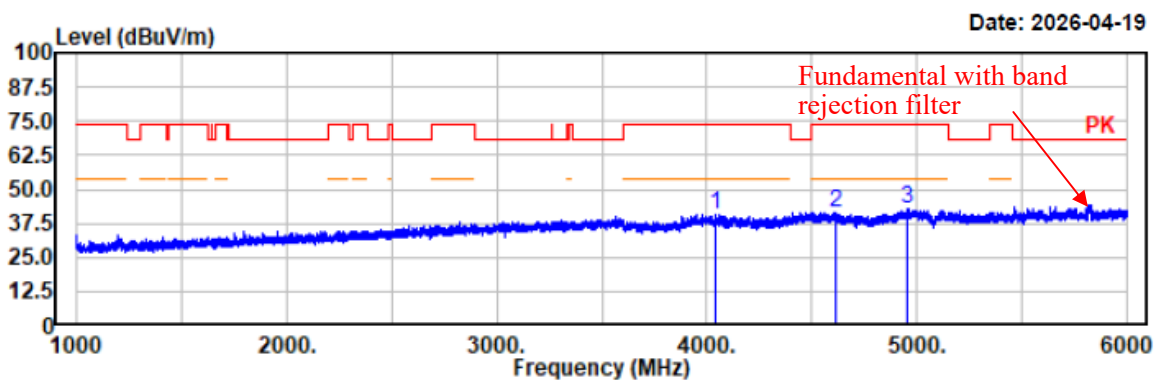


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4038.00	47.50	-6.47	41.03	74.00	32.97	horizontal	Peak
4616.00	46.74	-5.28	41.46	74.00	32.54	horizontal	Peak
4957.50	47.59	-5.10	42.49	74.00	31.51	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5825MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

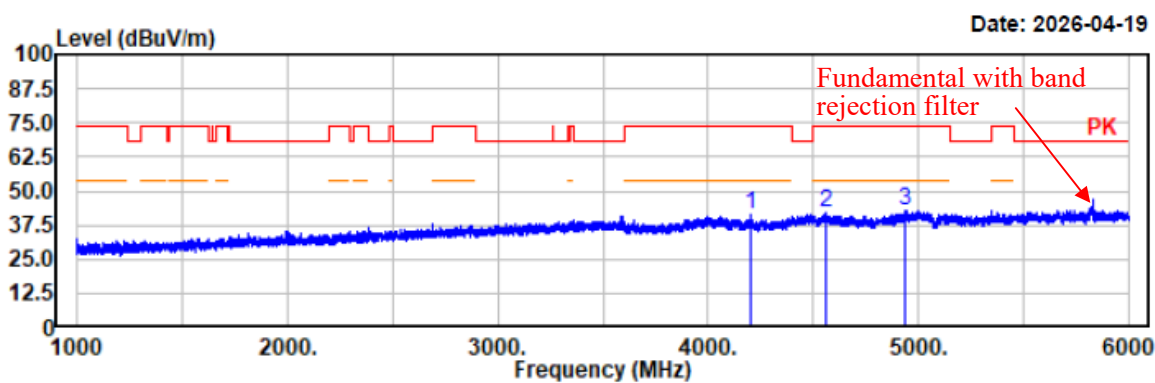


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4202.50	47.25	-5.84	41.41	74.00	32.59	vertical	Peak
4559.00	47.51	-5.35	42.16	74.00	31.84	vertical	Peak
4940.00	47.89	-5.13	42.76	74.00	31.24	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5745MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

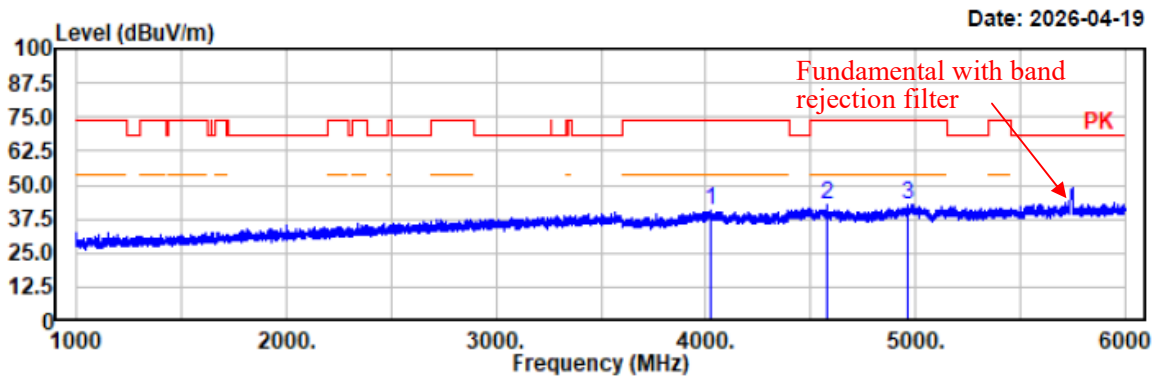


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4020.50	47.01	-6.50	40.51	74.00	33.49	horizontal	Peak
4575.50	47.91	-5.33	42.58	74.00	31.42	horizontal	Peak
4965.50	47.99	-5.07	42.92	74.00	31.08	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5745MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

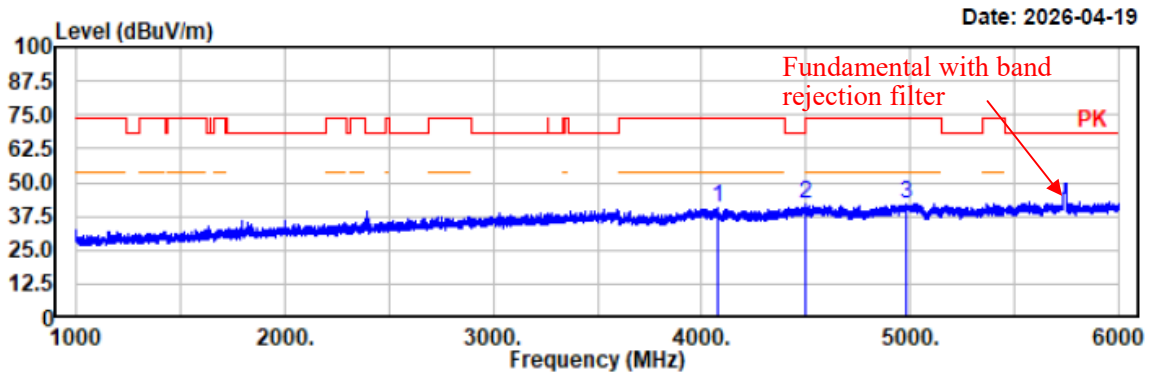


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4079.50	46.76	-6.33	40.43	74.00	33.57	vertical	Peak
4498.00	47.41	-5.33	42.08	68.20	26.12	vertical	Peak
4978.00	47.29	-5.04	42.25	74.00	31.75	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5785MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

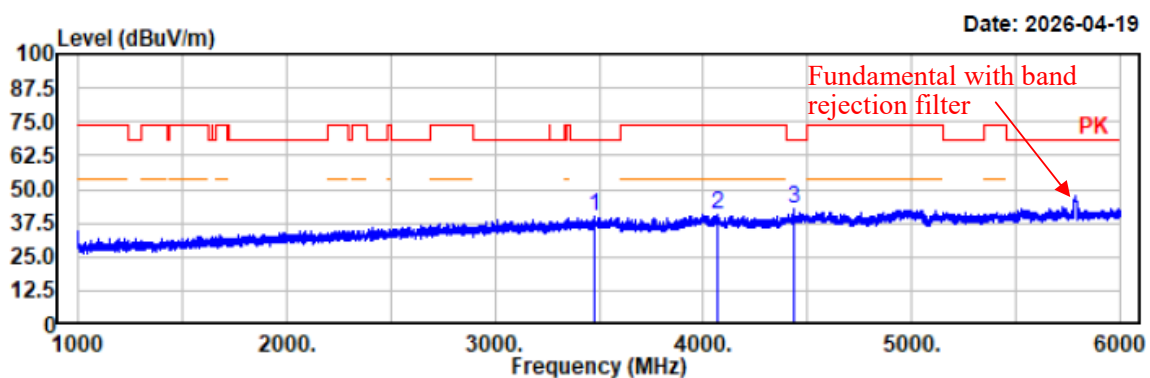


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3480.00	47.41	-7.71	39.70	68.20	28.50	horizontal	Peak
4066.50	47.01	-6.38	40.63	74.00	33.37	horizontal	Peak
4434.50	48.22	-5.58	42.64	68.20	25.56	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5785MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

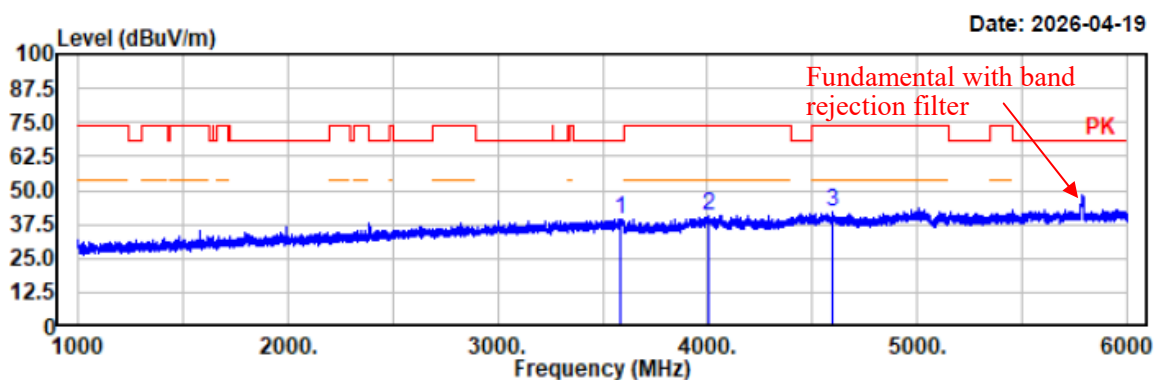


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3583.50	47.05	-7.50	39.55	68.20	28.65	vertical	Peak
4010.00	47.50	-6.52	40.98	74.00	33.02	vertical	Peak
4599.00	47.34	-5.29	42.05	74.00	31.95	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5825MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

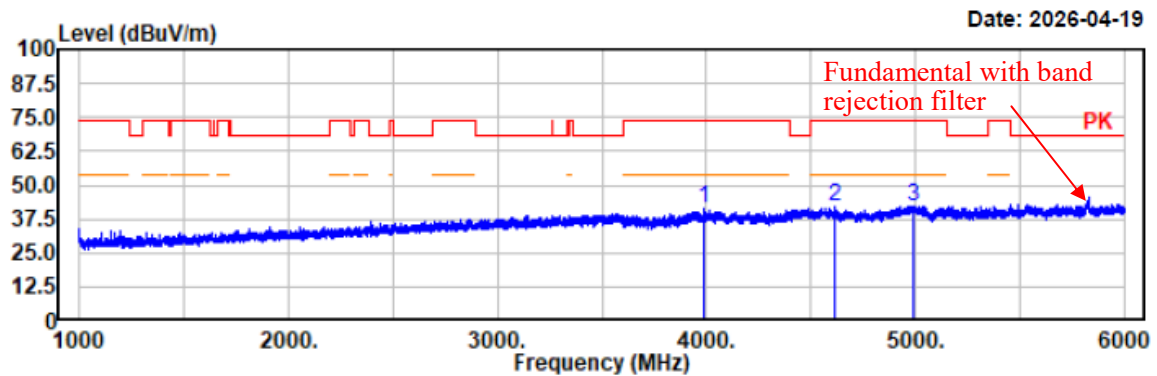


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3988.50	47.98	-6.59	41.39	74.00	32.61	horizontal	Peak
4618.50	47.18	-5.28	41.90	74.00	32.10	horizontal	Peak
4987.00	47.34	-5.02	42.32	74.00	31.68	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5825MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

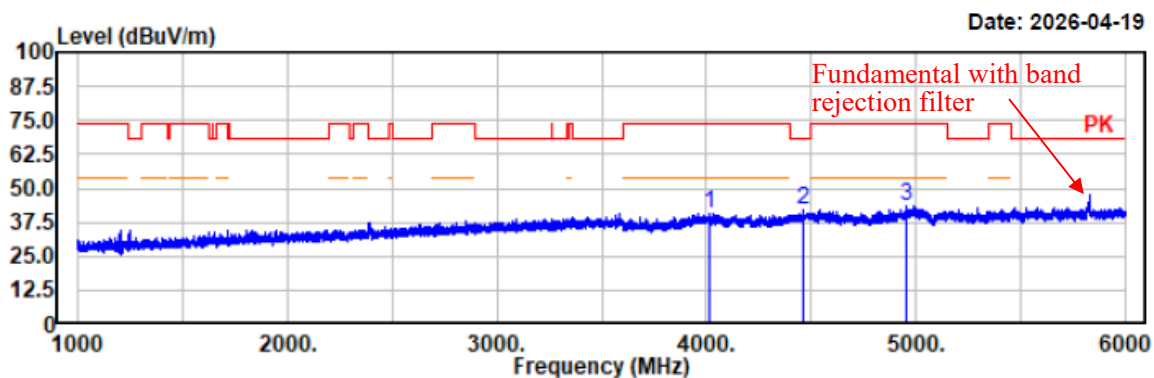


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4018.50	47.48	-6.50	40.98	74.00	33.02	vertical	Peak
4459.00	47.35	-5.51	41.84	68.20	26.36	vertical	Peak
4956.00	48.89	-5.10	43.79	74.00	30.21	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5755MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

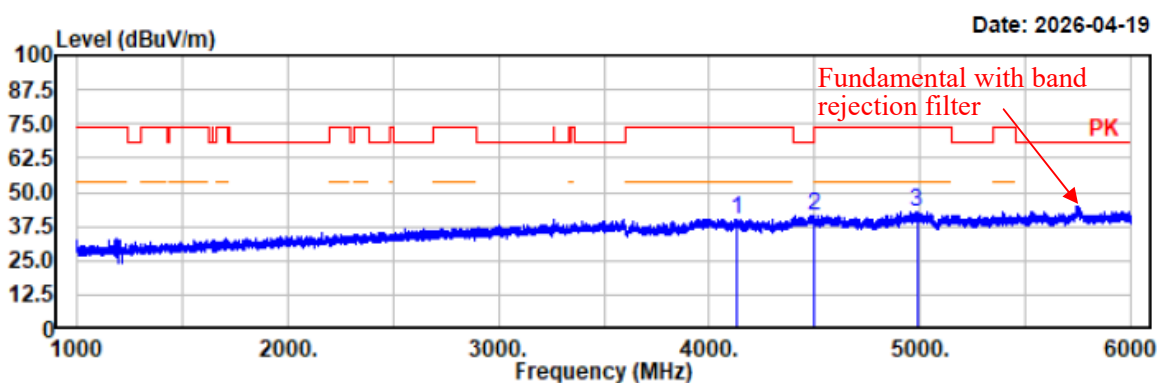


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4135.00	46.43	-6.14	40.29	74.00	33.71	horizontal	Peak
4498.00	47.03	-5.33	41.70	68.20	26.50	horizontal	Peak
4986.00	47.83	-5.02	42.81	74.00	31.19	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5755MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

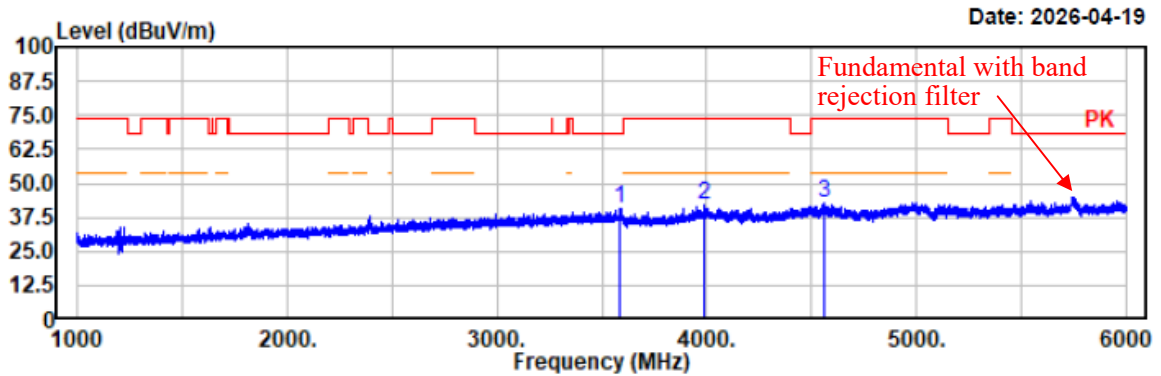


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3586.00	48.50	-7.51	40.99	68.20	27.21	vertical	Peak
3990.00	48.80	-6.58	42.22	74.00	31.78	vertical	Peak
4558.00	48.04	-5.35	42.69	74.00	31.31	vertical	Peak

Project No.: 2607P42218E-RF
 Test Mode: 802.11n40 5795MHz
 EUT Model: AXIUM DX8
 Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

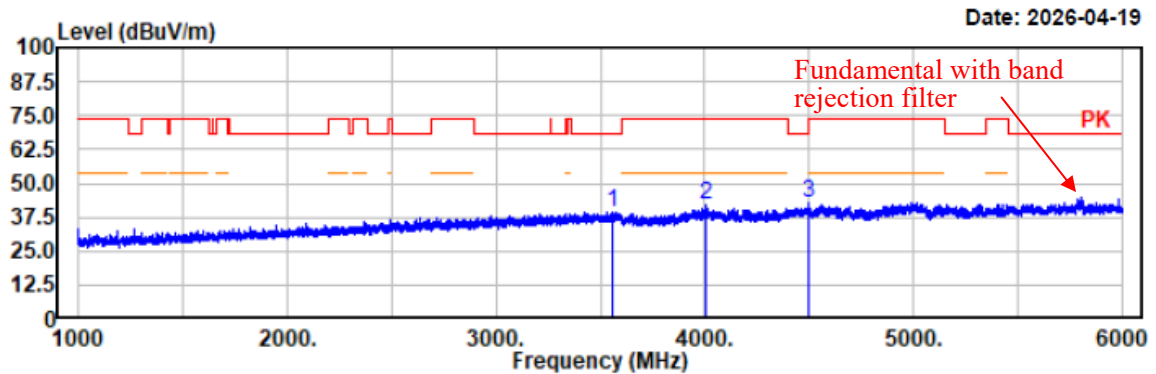


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3555.50	47.08	-7.49	39.59	68.20	28.61	horizontal	Peak
4010.00	48.25	-6.52	41.73	74.00	32.27	horizontal	Peak
4499.50	47.98	-5.33	42.65	68.20	25.55	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5795MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

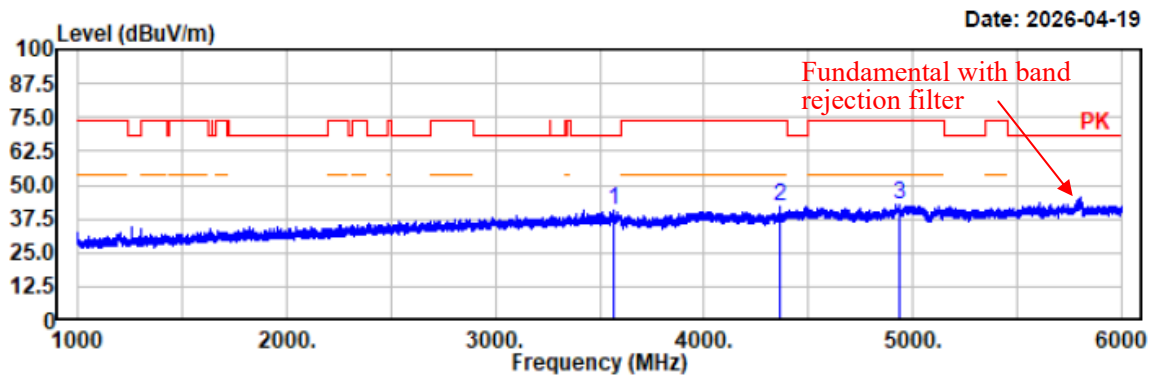


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3564.00	48.14	-7.49	40.65	68.20	27.55	vertical	Peak
4366.50	47.96	-5.74	42.22	74.00	31.78	vertical	Peak
4936.00	47.83	-5.15	42.68	74.00	31.32	vertical	Peak

Project No.: 2607P42218E-RF
 Test Mode: 802.11ac80 5775MHz
 EUT Model: AXIUM DX8
 Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

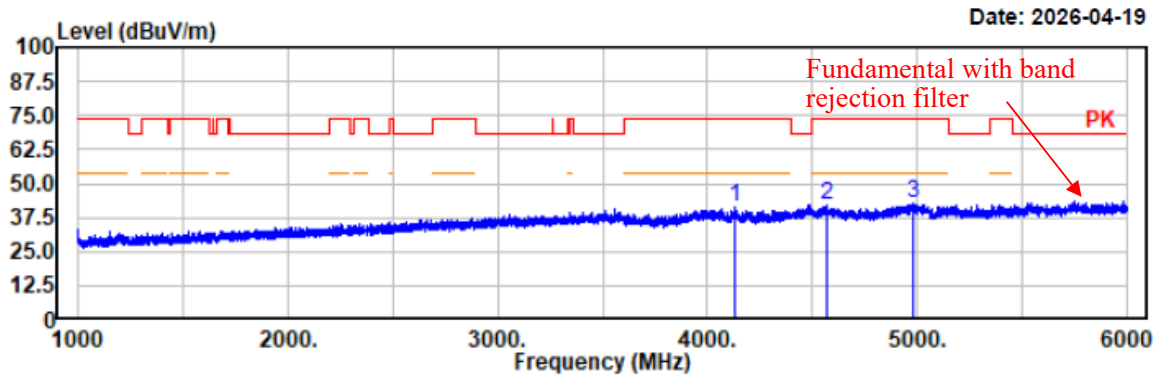


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4132.50	47.51	-6.14	41.37	74.00	32.63	horizontal	Peak
4571.00	47.38	-5.33	42.05	74.00	31.95	horizontal	Peak
4984.50	47.76	-5.02	42.74	74.00	31.26	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5775MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

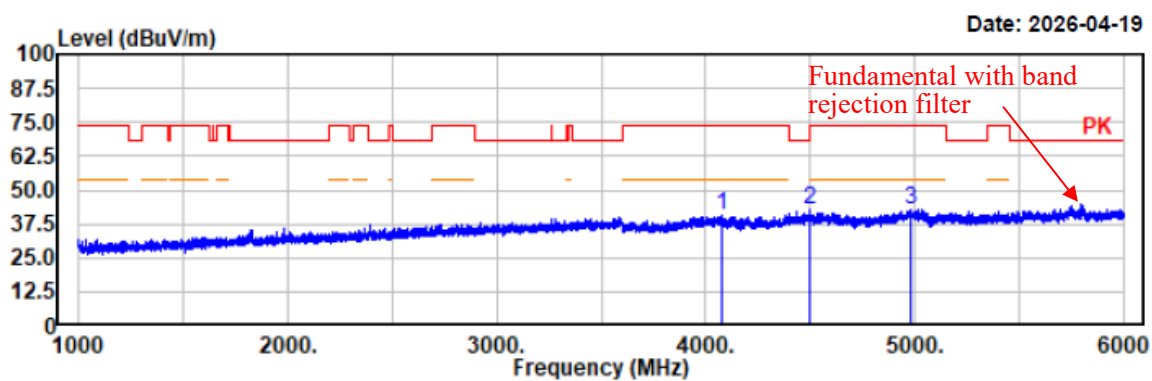

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4074.00	47.16	-6.35	40.81	74.00	33.19	vertical	Peak
4496.00	47.81	-5.35	42.46	68.20	25.74	vertical	Peak
4979.50	47.66	-5.04	42.62	74.00	31.38	vertical	Peak


4) 6GHz~18GHz

Configuration 1#(Scanner variant)

Band 1:

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5180MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

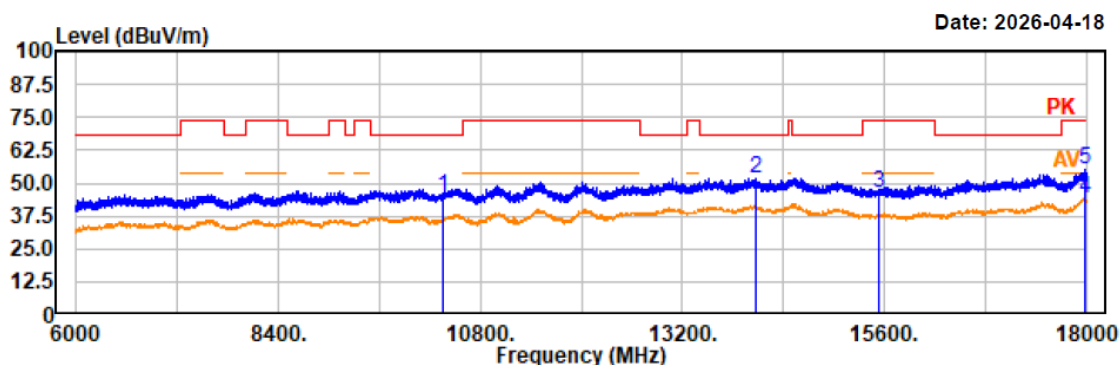

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10359.60	43.41	1.60	45.01	68.20	23.19	horizontal	Peak
14073.60	46.46	5.25	51.71	68.20	16.49	horizontal	Peak
15540.00	43.52	2.48	46.00	74.00	28.00	horizontal	Peak
17979.60	37.15	6.83	43.98	54.00	10.02	horizontal	Average
17979.60	48.15	6.83	54.98	74.00	19.02	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5180MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

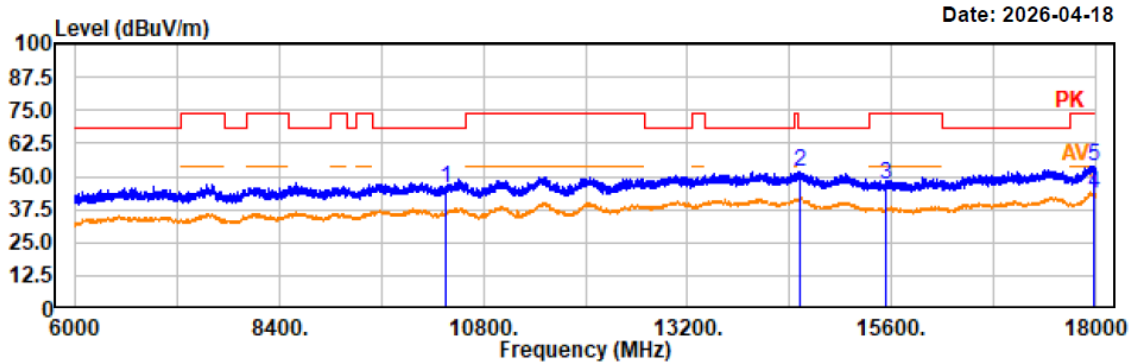

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.00	44.25	1.60	45.85	68.20	22.35	vertical	Peak
14520.00	46.92	5.14	52.06	68.20	16.14	vertical	Peak
15540.00	44.58	2.48	47.06	74.00	26.94	vertical	Peak
17977.20	36.61	6.83	43.44	54.00	10.56	vertical	Average
17977.20	46.85	6.83	53.68	74.00	20.32	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5200MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

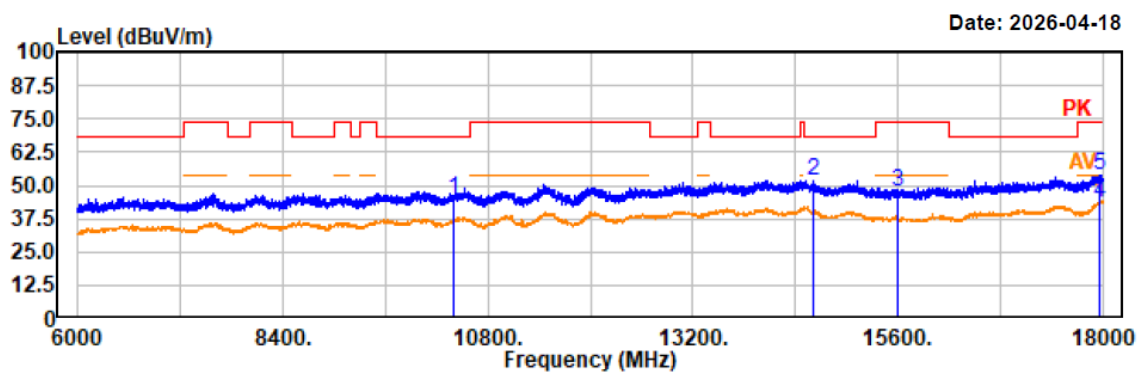

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	43.26	1.65	44.91	68.20	23.29	horizontal	Peak
14610.00	47.00	5.02	52.02	68.20	16.18	horizontal	Peak
15600.00	45.26	2.36	47.62	74.00	26.38	horizontal	Peak
17956.80	36.72	6.82	43.54	54.00	10.46	horizontal	Average
17956.80	47.12	6.82	53.94	74.00	20.06	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5200MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

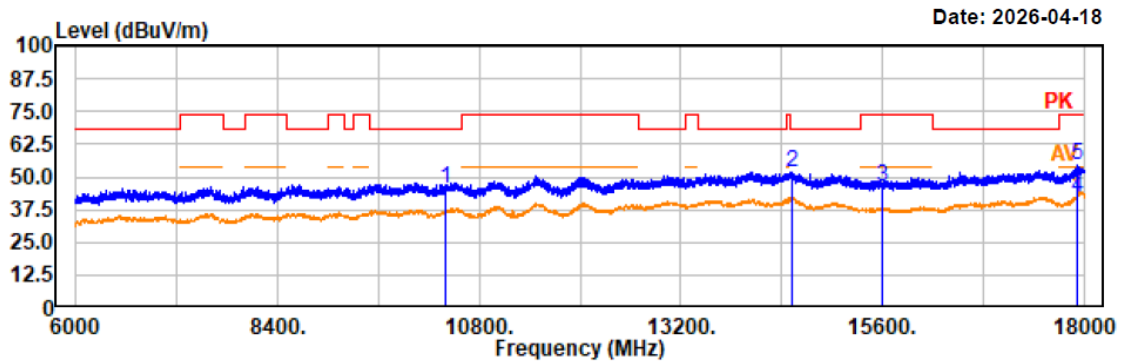

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	44.21	1.65	45.86	68.20	22.34	vertical	Peak
14530.80	46.89	5.12	52.01	68.20	16.19	vertical	Peak
15600.00	43.58	2.36	45.94	74.00	28.06	vertical	Peak
17911.20	35.51	6.78	42.29	54.00	11.71	vertical	Average
17911.20	47.48	6.78	54.26	74.00	19.74	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5240MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

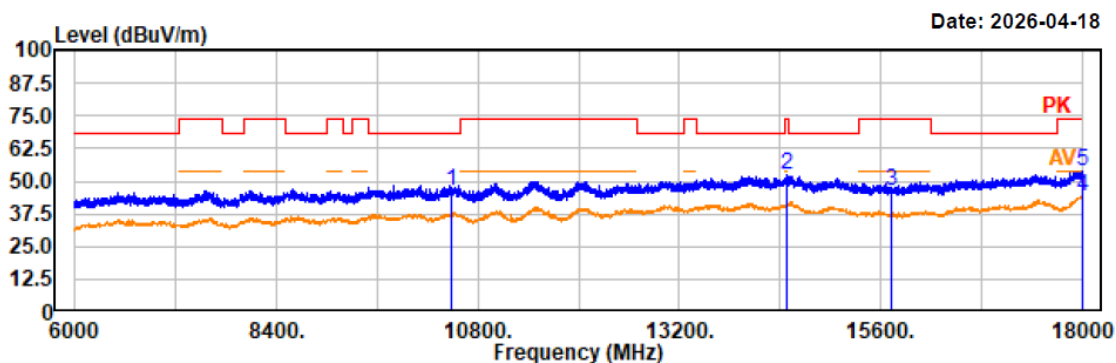

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10479.60	44.27	1.66	45.93	68.20	22.27	horizontal	Peak
14476.80	47.03	5.19	52.22	74.00	21.78	horizontal	Peak
15720.00	43.97	2.18	46.15	74.00	27.85	horizontal	Peak
17995.20	37.30	6.84	44.14	54.00	9.86	horizontal	Average
17995.20	47.10	6.84	53.94	74.00	20.06	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5240MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

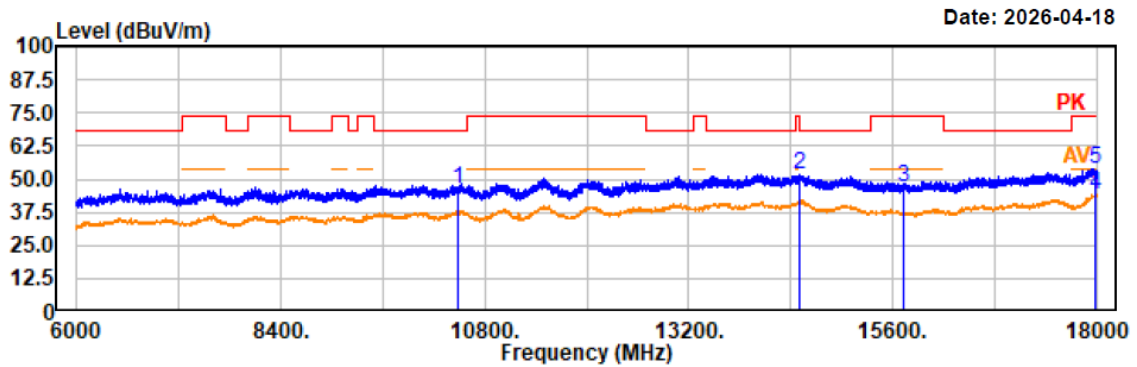


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10480.00	44.57	1.66	46.23	68.20	21.97	vertical	Peak
14506.80	46.55	5.15	51.70	68.20	16.50	vertical	Peak
15720.00	44.69	2.18	46.87	74.00	27.13	vertical	Peak
17988.00	37.18	6.83	44.01	54.00	9.99	vertical	Average
17988.00	47.10	6.83	53.93	74.00	20.07	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5180MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

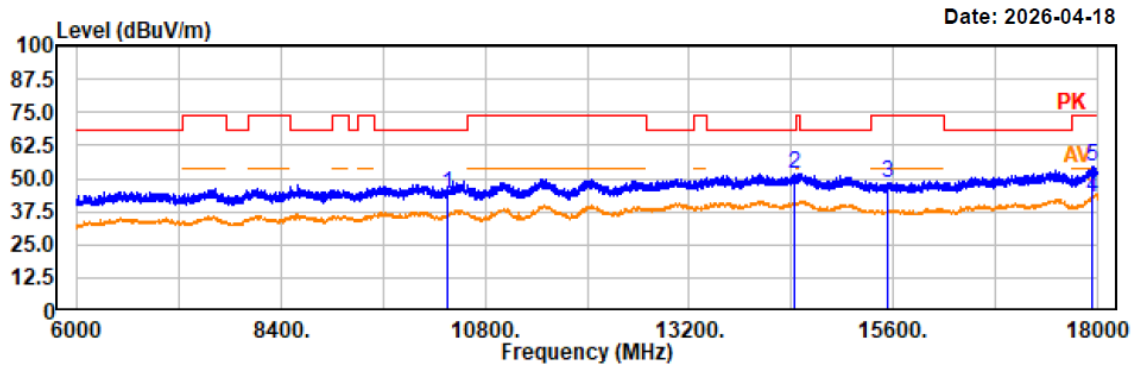


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.00	42.52	1.60	44.12	68.20	24.08	horizontal	Peak
14433.60	46.57	5.26	51.83	68.20	16.37	horizontal	Peak
15540.00	45.55	2.48	48.03	74.00	25.97	horizontal	Peak
17931.60	35.79	6.79	42.58	54.00	11.42	horizontal	Average
17931.60	47.96	6.79	54.75	74.00	19.25	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5180MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

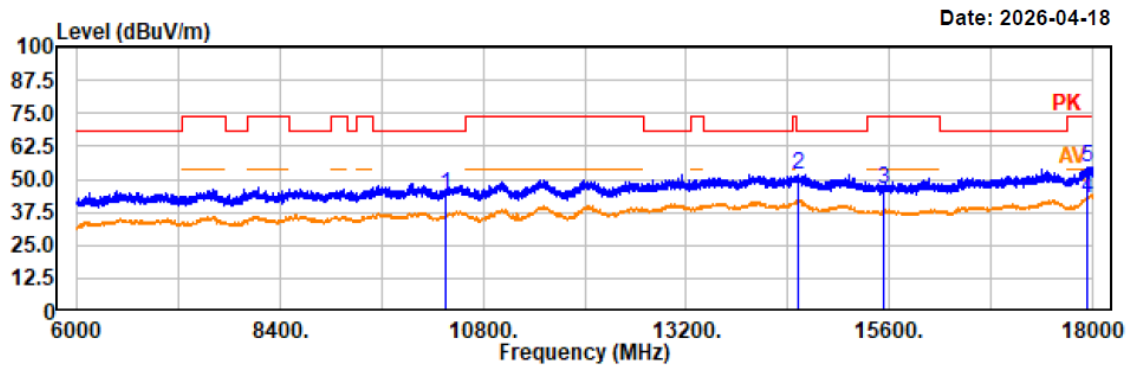

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.00	42.46	1.60	44.06	68.20	24.14	vertical	Peak
14523.60	46.91	5.13	52.04	68.20	16.16	vertical	Peak
15540.00	43.63	2.48	46.11	74.00	27.89	vertical	Peak
17938.80	36.23	6.80	43.03	54.00	10.97	vertical	Average
17938.80	47.87	6.80	54.67	74.00	19.33	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5200MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

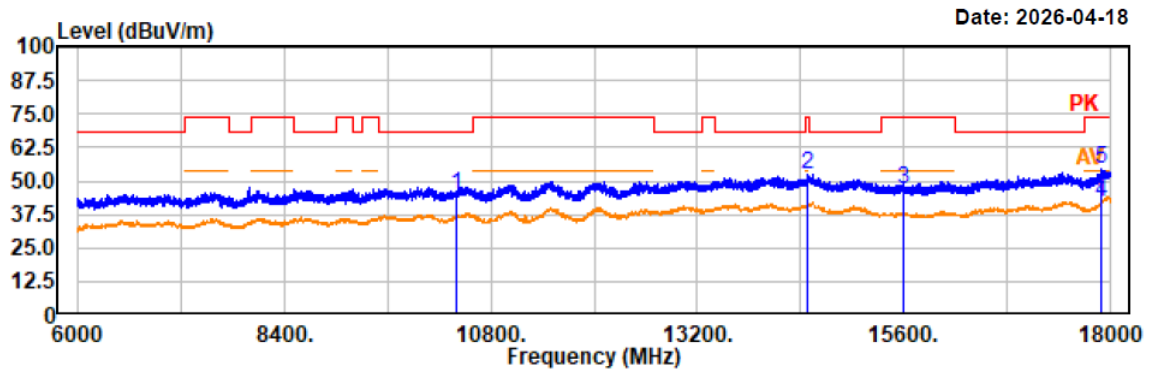


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	43.45	1.65	45.10	68.20	23.10	horizontal	Peak
14476.80	46.93	5.19	52.12	74.00	21.88	horizontal	Peak
15600.00	44.41	2.36	46.77	74.00	27.23	horizontal	Peak
17902.80	35.11	6.77	41.88	54.00	12.12	horizontal	Average
17902.80	47.58	6.77	54.35	74.00	19.65	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5200MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

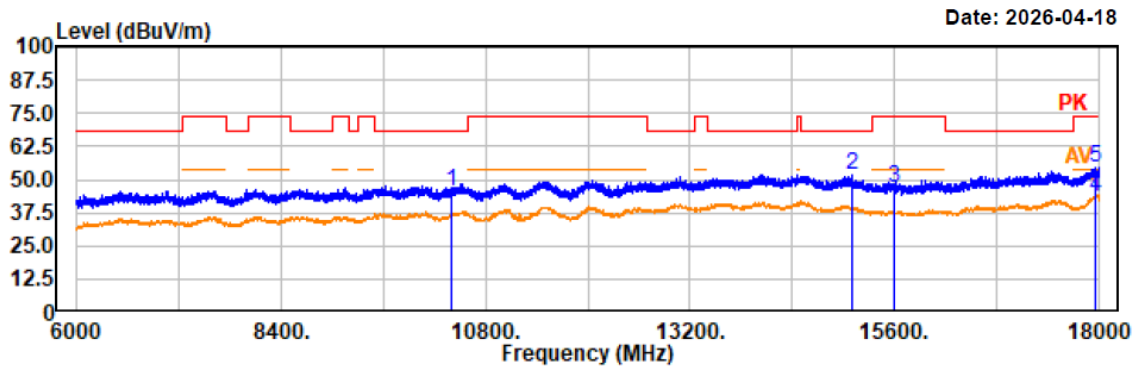

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	43.97	1.65	45.62	68.20	22.58	vertical	Peak
15099.60	48.17	3.77	51.94	68.20	16.26	vertical	Peak
15600.00	44.71	2.36	47.07	74.00	26.93	vertical	Peak
17956.80	36.76	6.82	43.58	54.00	10.42	vertical	Average
17956.80	47.67	6.82	54.49	74.00	19.51	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5240MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

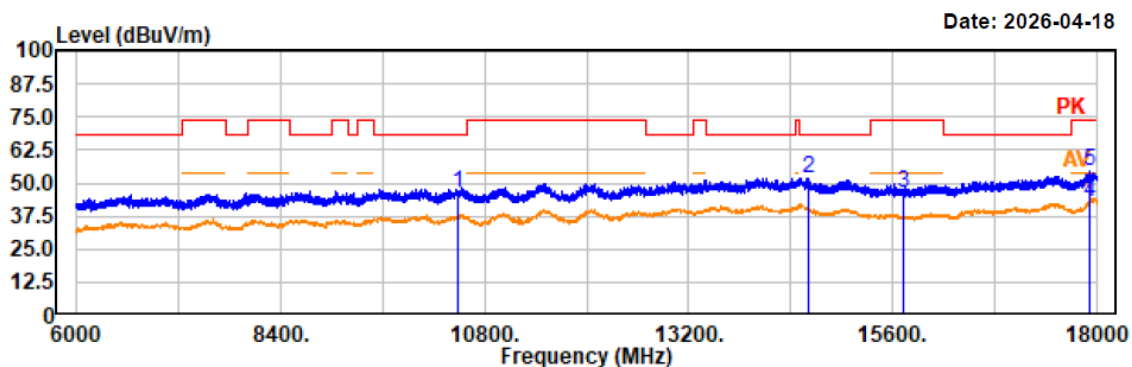

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10479.60	44.87	1.66	46.53	68.20	21.67	horizontal	Peak
14612.40	46.89	5.02	51.91	68.20	16.29	horizontal	Peak
15720.00	44.36	2.18	46.54	74.00	27.46	horizontal	Peak
17926.80	35.85	6.80	42.65	54.00	11.35	horizontal	Average
17926.80	47.62	6.80	54.42	74.00	19.58	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5240MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

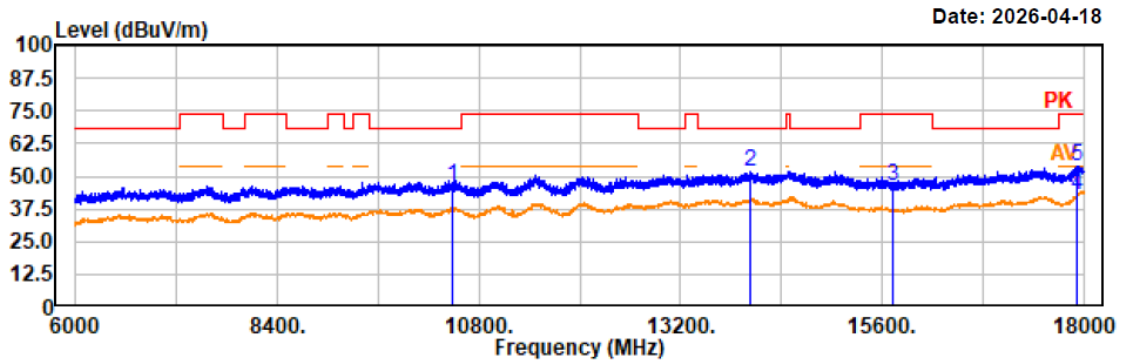

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10480.00	44.73	1.66	46.39	68.20	21.81	vertical	Peak
14032.80	46.63	5.19	51.82	68.20	16.38	vertical	Peak
15720.00	44.31	2.18	46.49	74.00	27.51	vertical	Peak
17924.40	36.16	6.79	42.95	54.00	11.05	vertical	Average
17924.40	47.10	6.79	53.89	74.00	20.11	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5190MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

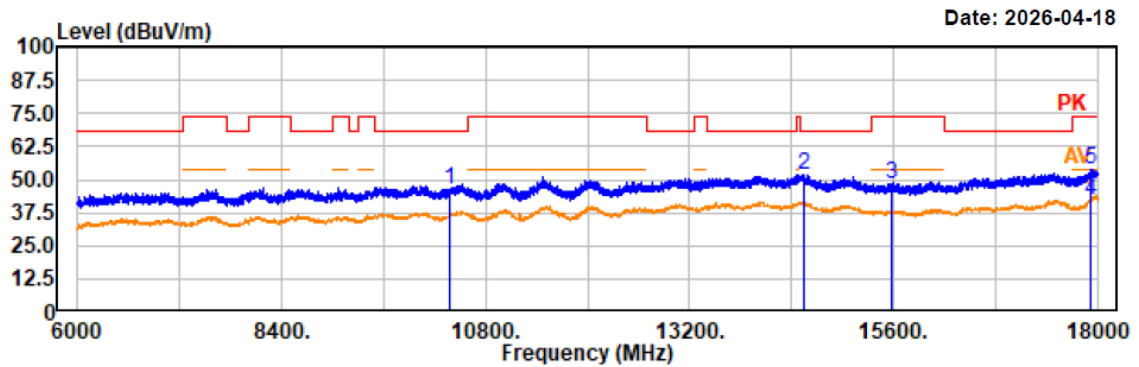


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10380.00	44.53	1.62	46.15	68.20	22.05	horizontal	Peak
14542.80	46.73	5.11	51.84	68.20	16.36	horizontal	Peak
15570.00	45.52	2.42	47.94	74.00	26.06	horizontal	Peak
17918.40	35.24	6.79	42.03	54.00	11.97	horizontal	Average
17918.40	46.79	6.79	53.58	74.00	20.42	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5190MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

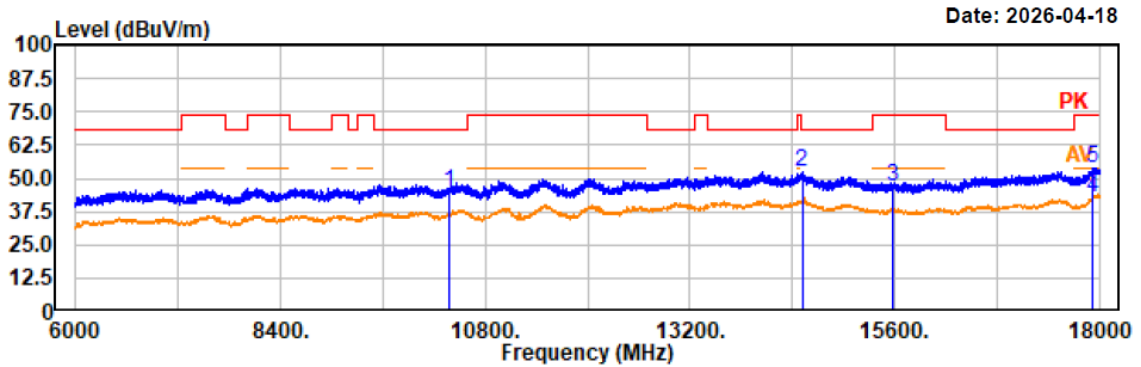

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10380.00	43.23	1.62	44.85	68.20	23.35	vertical	Peak
14514.00	47.09	5.15	52.24	68.20	15.96	vertical	Peak
15570.00	44.20	2.42	46.62	74.00	27.38	vertical	Peak
17925.60	35.67	6.80	42.47	54.00	11.53	vertical	Average
17925.60	47.03	6.80	53.83	74.00	20.17	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5230MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

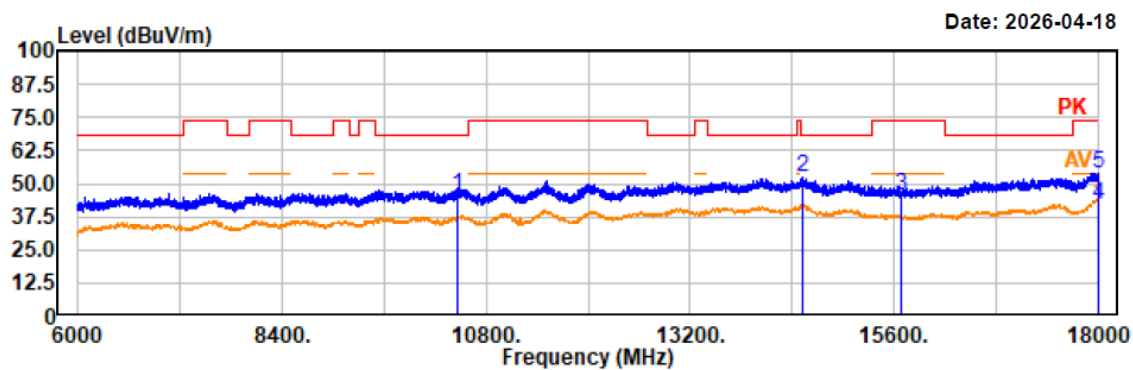

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10460.00	43.71	1.65	45.36	68.20	22.84	horizontal	Peak
14532.00	47.50	5.12	52.62	68.20	15.58	horizontal	Peak
15690.00	43.28	2.20	45.48	74.00	28.52	horizontal	Peak
17997.60	35.13	6.84	41.97	54.00	12.03	horizontal	Average
17997.60	47.07	6.84	53.91	74.00	20.09	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5230MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

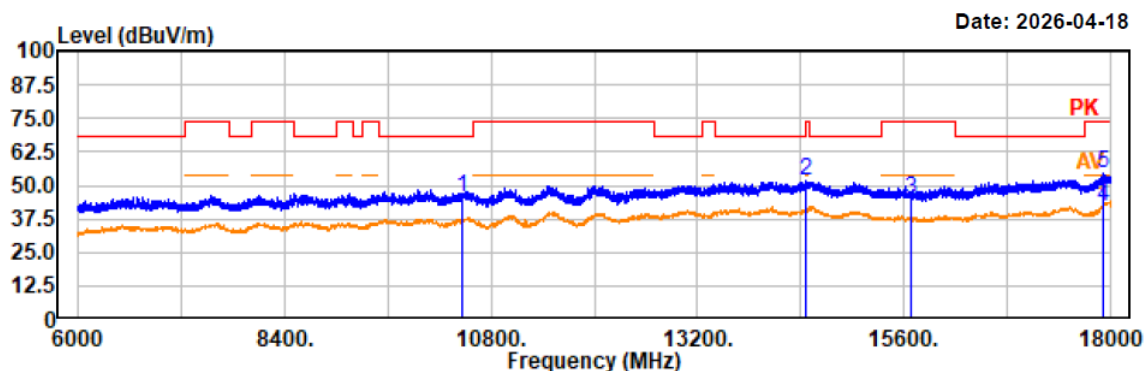

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10460.00	44.13	1.65	45.78	68.20	22.42	vertical	Peak
14456.40	46.31	5.21	51.52	68.20	16.68	vertical	Peak
15690.00	42.91	2.20	45.11	74.00	28.89	vertical	Peak
17923.20	35.14	6.79	41.93	54.00	12.07	vertical	Average
17923.20	47.40	6.79	54.19	74.00	19.81	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5210MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

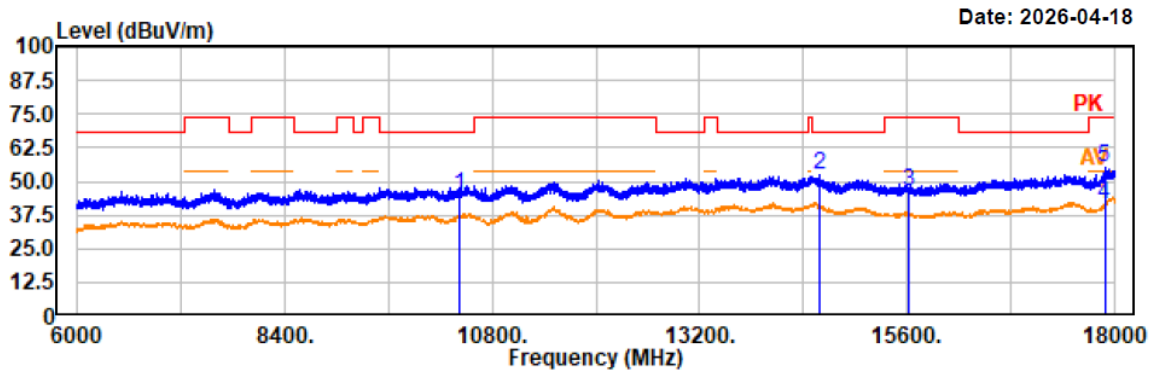


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10420.00	43.47	1.64	45.11	68.20	23.09	horizontal	Peak
14582.40	47.01	5.06	52.07	68.20	16.13	horizontal	Peak
15630.00	43.76	2.31	46.07	74.00	27.93	horizontal	Peak
17886.00	34.60	6.74	41.34	54.00	12.66	horizontal	Average
17886.00	48.18	6.74	54.92	74.00	19.08	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5210MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

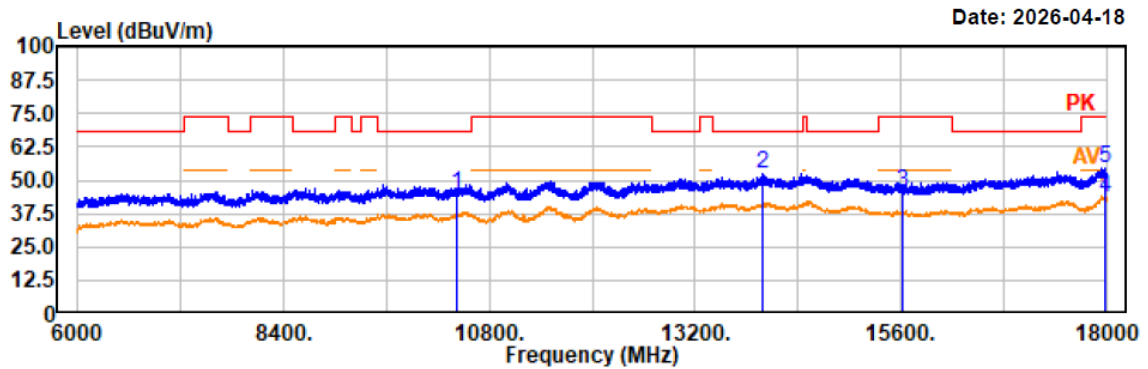

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto


AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10420.00	43.46	1.64	45.10	68.20	23.10	vertical	Peak
13977.60	47.01	5.13	52.14	68.20	16.06	vertical	Peak
15630.00	42.98	2.31	45.29	74.00	28.71	vertical	Peak
17991.60	36.70	6.83	43.53	54.00	10.47	vertical	Average
17991.60	47.67	6.83	54.50	74.00	19.50	vertical	Peak

Band 2:

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5260MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

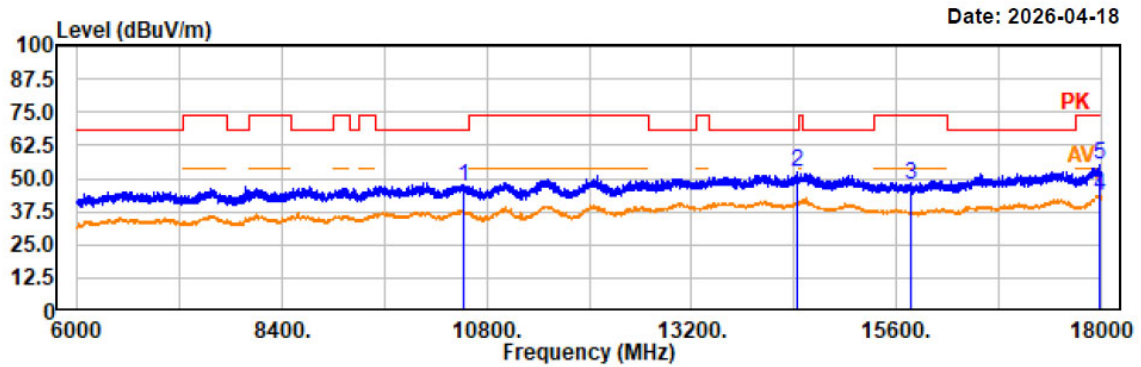

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.40	44.96	1.67	46.63	68.20	21.57	horizontal	Peak
14442.00	46.86	5.24	52.10	68.20	16.10	horizontal	Peak
15780.00	45.37	2.19	47.56	74.00	26.44	horizontal	Peak
17980.80	36.77	6.83	43.60	54.00	10.40	horizontal	Average
17980.80	48.19	6.83	55.02	74.00	18.98	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5260MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

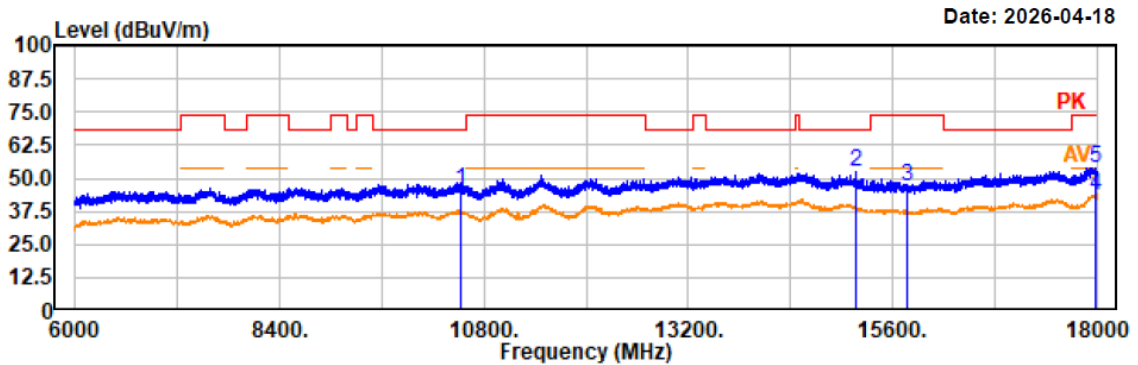

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.00	44.09	1.67	45.76	68.20	22.44	vertical	Peak
15171.60	48.76	3.60	52.36	68.20	15.84	vertical	Peak
15780.00	44.58	2.19	46.77	74.00	27.23	vertical	Peak
17980.80	36.66	6.83	43.49	54.00	10.51	vertical	Average
17980.80	47.10	6.83	53.93	74.00	20.07	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5280MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

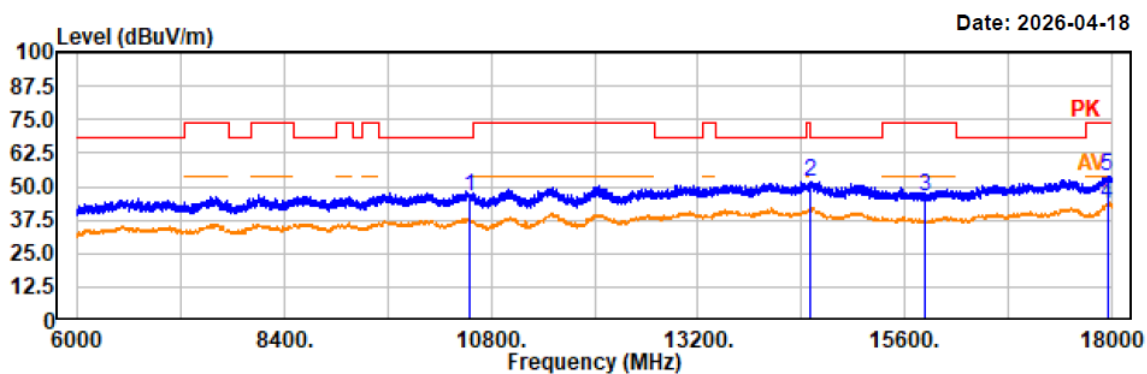

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	44.65	1.70	46.35	68.20	21.85	horizontal	Peak
14498.40	46.70	5.16	51.86	74.00	22.14	horizontal	Peak
15840.00	44.17	2.16	46.33	74.00	27.67	horizontal	Peak
17950.80	36.41	6.81	43.22	54.00	10.78	horizontal	Average
17950.80	47.31	6.81	54.12	74.00	19.88	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5280MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

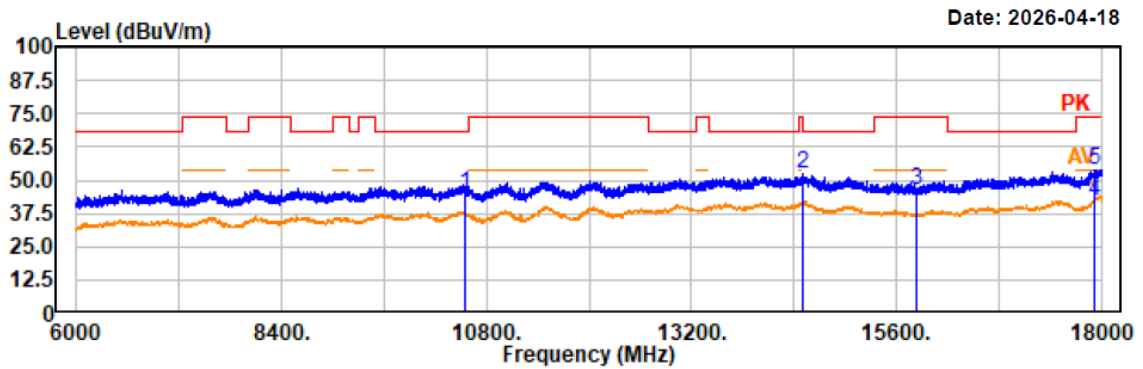

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	43.21	1.70	44.91	68.20	23.29	vertical	Peak
14509.20	47.45	5.14	52.59	68.20	15.61	vertical	Peak
15840.00	44.02	2.16	46.18	74.00	27.82	vertical	Peak
17924.40	35.61	6.79	42.40	54.00	11.60	vertical	Average
17924.40	47.18	6.79	53.97	74.00	20.03	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5320MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

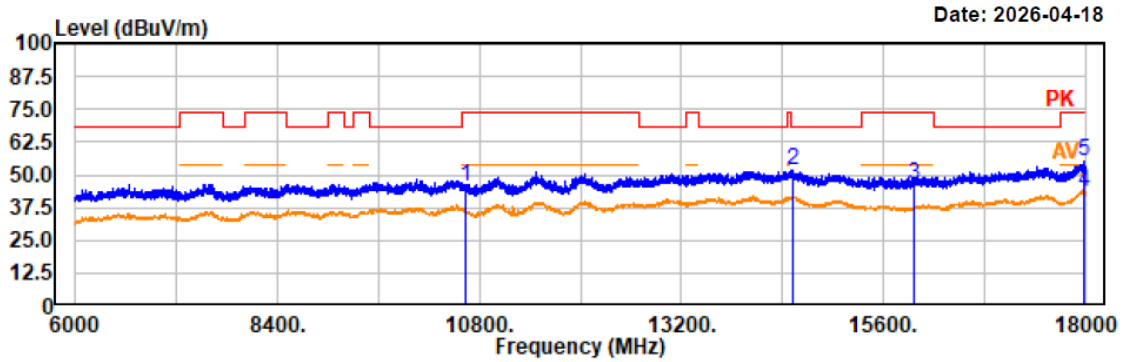

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.00	43.50	1.75	45.25	74.00	28.75	horizontal	Peak
14529.60	46.74	5.12	51.86	68.20	16.34	horizontal	Peak
15960.00	43.83	2.17	46.00	74.00	28.00	horizontal	Peak
17986.80	36.90	6.83	43.73	54.00	10.27	horizontal	Average
17986.80	48.30	6.83	55.13	74.00	18.87	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5320MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

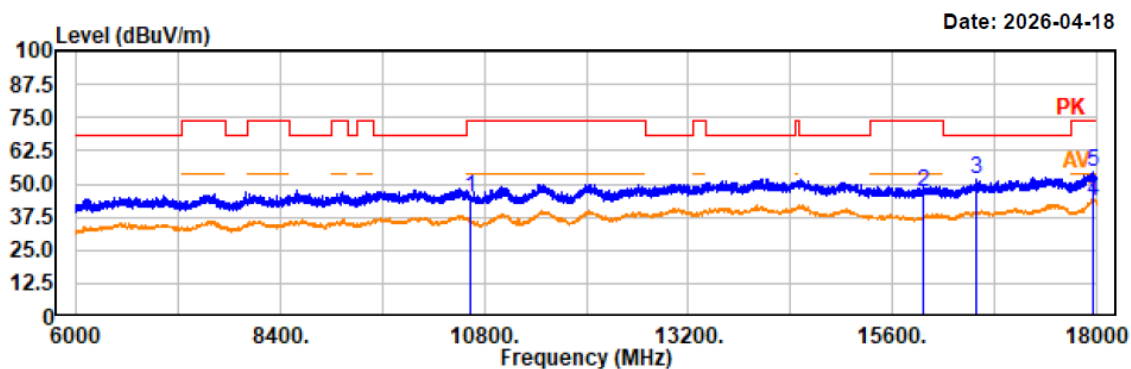

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.00	43.31	1.75	45.06	74.00	28.94	vertical	Peak
15960.00	44.79	2.17	46.96	74.00	27.04	vertical	Peak
16585.20	48.45	3.60	52.05	68.20	16.15	vertical	Peak
17966.40	36.31	6.82	43.13	54.00	10.87	vertical	Average
17966.40	47.52	6.82	54.34	74.00	19.66	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5260MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

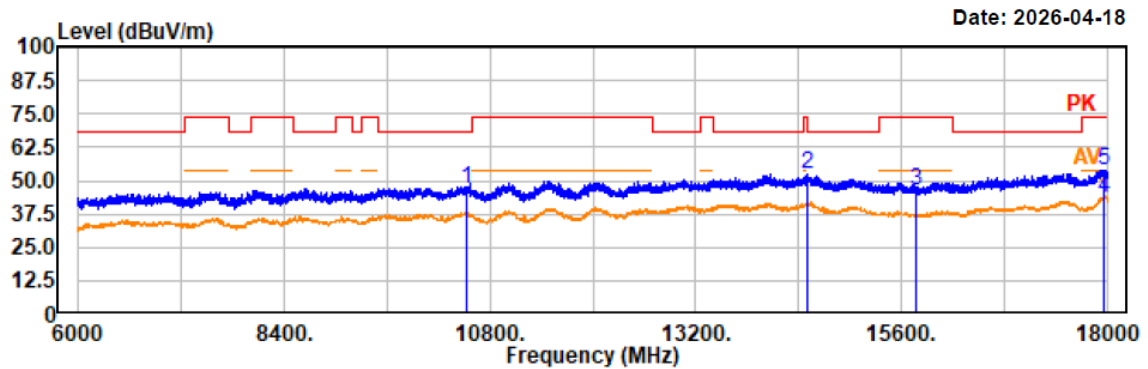

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.40	44.97	1.67	46.64	68.20	21.56	horizontal	Peak
14503.20	47.57	5.16	52.73	68.20	15.47	horizontal	Peak
15780.00	44.22	2.19	46.41	74.00	27.59	horizontal	Peak
17967.60	36.33	6.82	43.15	54.00	10.85	horizontal	Average
17967.60	47.07	6.82	53.89	74.00	20.11	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5260MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

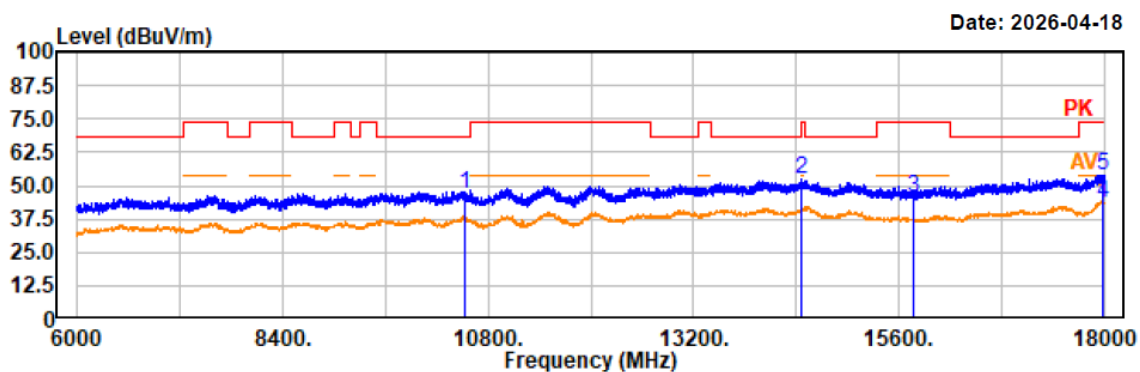

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.40	44.99	1.67	46.66	68.20	21.54	vertical	Peak
14461.20	47.49	5.21	52.70	68.20	15.50	vertical	Peak
15780.00	43.06	2.19	45.25	74.00	28.75	vertical	Peak
17974.80	36.51	6.82	43.33	54.00	10.67	vertical	Average
17974.80	47.29	6.82	54.11	74.00	19.89	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5280MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

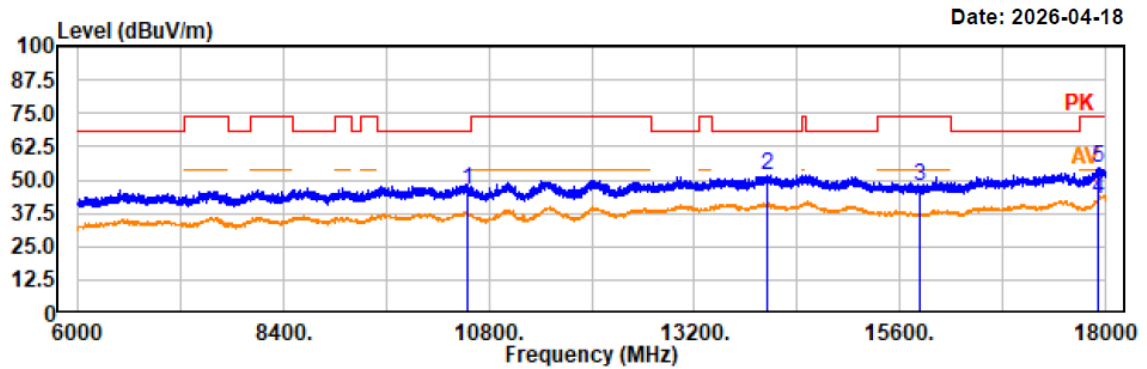

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	44.22	1.70	45.92	68.20	22.28	horizontal	Peak
14042.40	46.48	5.20	51.68	68.20	16.52	horizontal	Peak
15840.00	45.67	2.16	47.83	74.00	26.17	horizontal	Peak
17926.80	35.81	6.80	42.61	54.00	11.39	horizontal	Average
17926.80	47.98	6.80	54.78	74.00	19.22	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5280MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

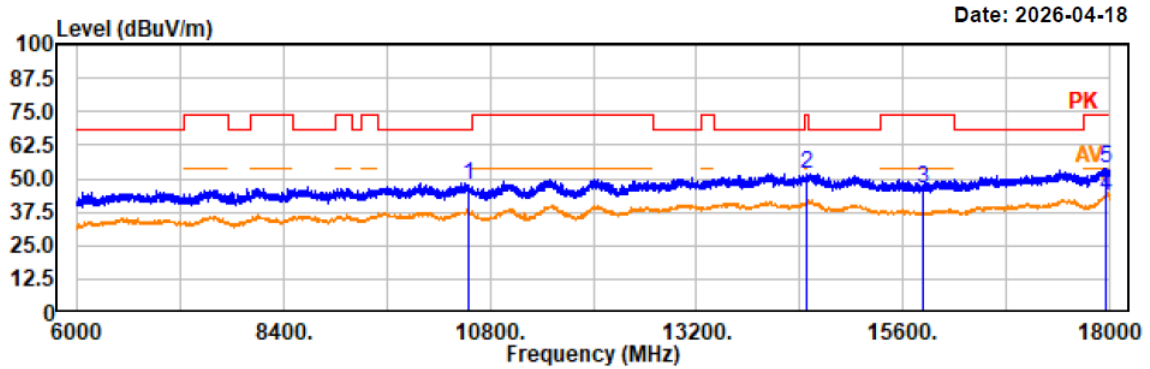

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	45.88	1.70	47.58	68.20	20.62	vertical	Peak
14488.80	46.62	5.17	51.79	74.00	22.21	vertical	Peak
15840.00	44.31	2.16	46.47	74.00	27.53	vertical	Peak
17955.60	36.70	6.82	43.52	54.00	10.48	vertical	Average
17955.60	47.23	6.82	54.05	74.00	19.95	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5320MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

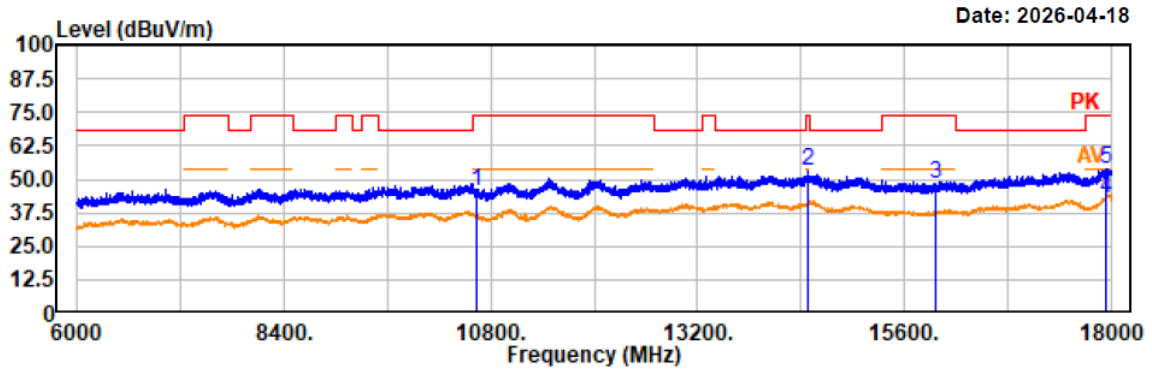

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.00	43.75	1.75	45.50	74.00	28.50	horizontal	Peak
14479.20	47.70	5.19	52.89	74.00	21.11	horizontal	Peak
15960.00	46.17	2.17	48.34	74.00	25.66	horizontal	Peak
17934.00	36.19	6.79	42.98	54.00	11.02	horizontal	Average
17934.00	47.28	6.79	54.07	74.00	19.93	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5320MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

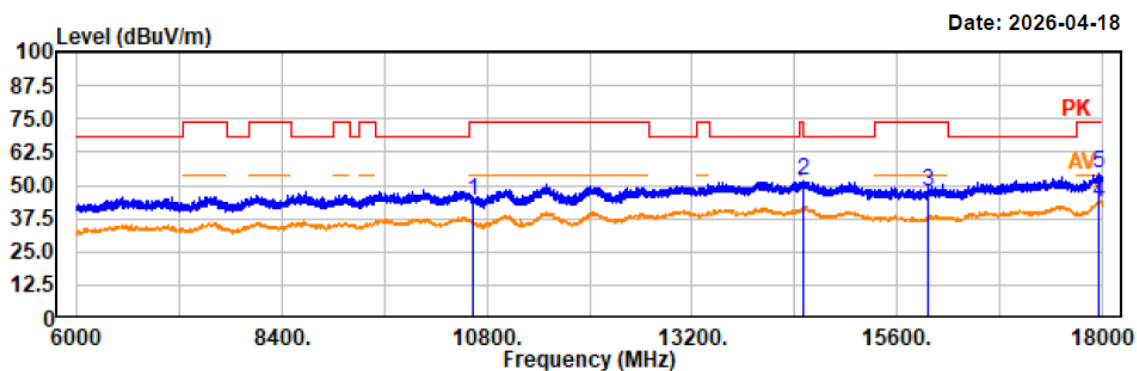

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.00	42.69	1.75	44.44	74.00	29.56	vertical	Peak
14500.80	46.40	5.16	51.56	68.20	16.64	vertical	Peak
15960.00	45.75	2.17	47.92	74.00	26.08	vertical	Peak
17959.20	36.38	6.81	43.19	54.00	10.81	vertical	Average
17959.20	47.99	6.81	54.80	74.00	19.20	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5270MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

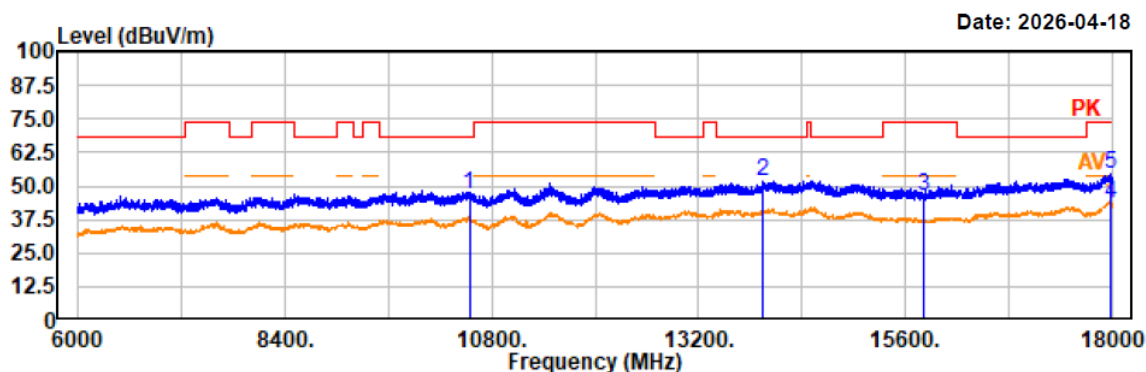


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10540.00	44.91	1.68	46.59	68.20	21.61	horizontal	Peak
13945.20	46.81	5.13	51.94	68.20	16.26	horizontal	Peak
15810.00	43.95	2.18	46.13	74.00	27.87	horizontal	Peak
17985.60	36.90	6.84	43.74	54.00	10.26	horizontal	Average
17985.60	47.45	6.84	54.29	74.00	19.71	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5270MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

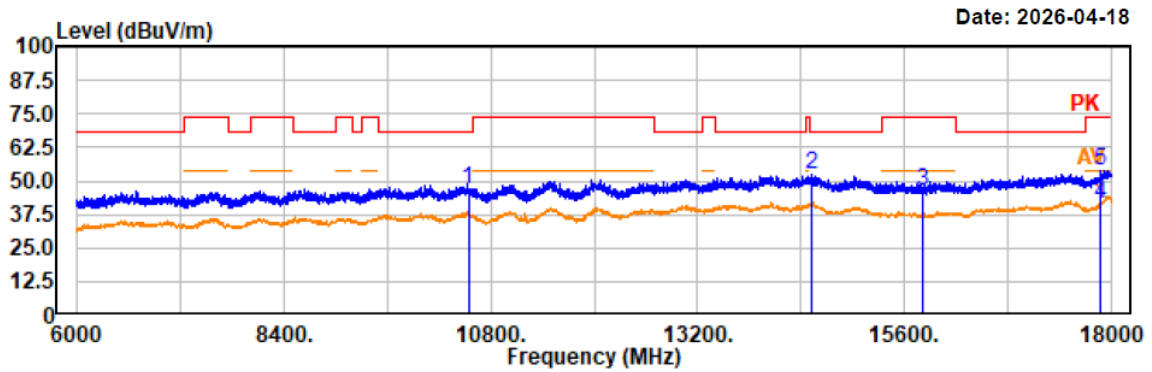

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10540.00	45.17	1.68	46.85	68.20	21.35	vertical	Peak
14520.00	46.99	5.14	52.13	68.20	16.07	vertical	Peak
15810.00	44.13	2.18	46.31	74.00	27.69	vertical	Peak
17872.80	34.45	6.70	41.15	54.00	12.85	vertical	Average
17872.80	47.18	6.70	53.88	74.00	20.12	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5310MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

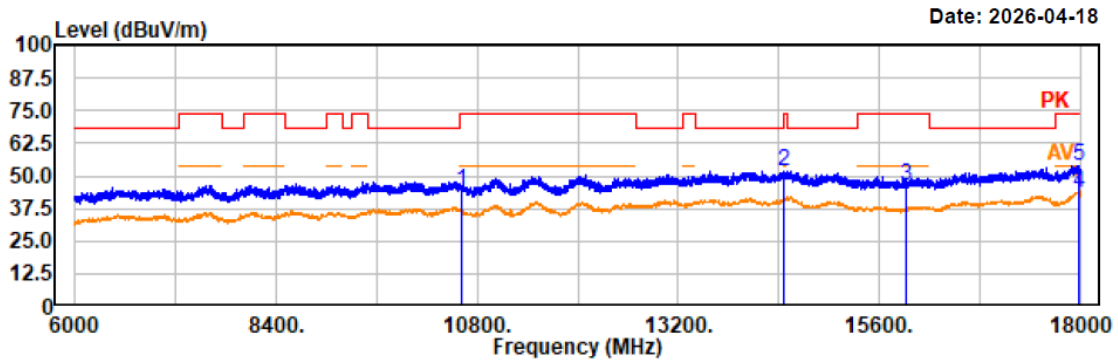

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10620.00	42.57	1.73	44.30	74.00	29.70	horizontal	Peak
14466.00	46.67	5.20	51.87	68.20	16.33	horizontal	Peak
15930.00	44.07	2.14	46.21	74.00	27.79	horizontal	Peak
17974.80	36.84	6.82	43.66	54.00	10.34	horizontal	Average
17974.80	47.07	6.82	53.89	74.00	20.11	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5310MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

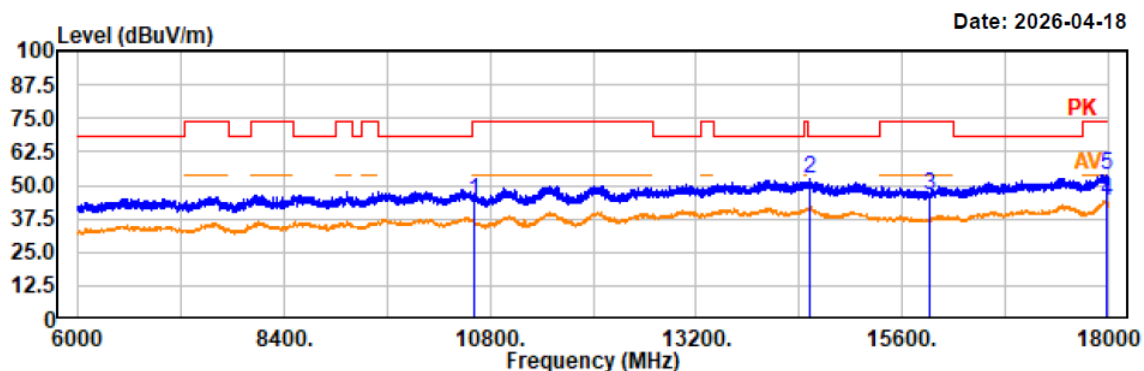


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10620.00	42.63	1.73	44.36	74.00	29.64	vertical	Peak
14532.00	47.35	5.12	52.47	68.20	15.73	vertical	Peak
15930.00	44.07	2.14	46.21	74.00	27.79	vertical	Peak
17990.40	37.06	6.83	43.89	54.00	10.11	vertical	Average
17990.40	46.98	6.83	53.81	74.00	20.19	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5290MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

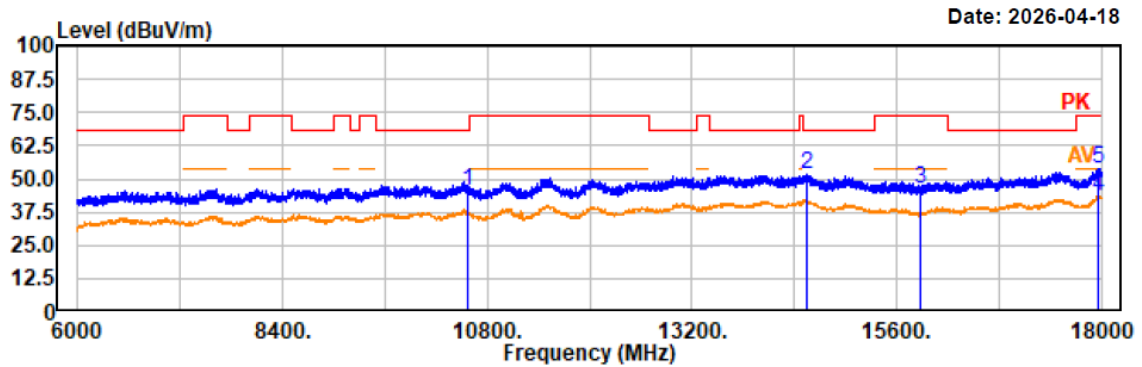


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10580.00	43.92	1.71	45.63	68.20	22.57	horizontal	Peak
14551.20	46.36	5.09	51.45	68.20	16.75	horizontal	Peak
15870.00	43.79	2.13	45.92	74.00	28.08	horizontal	Peak
17971.20	36.65	6.82	43.47	54.00	10.53	horizontal	Average
17971.20	47.16	6.82	53.98	74.00	20.02	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5290MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

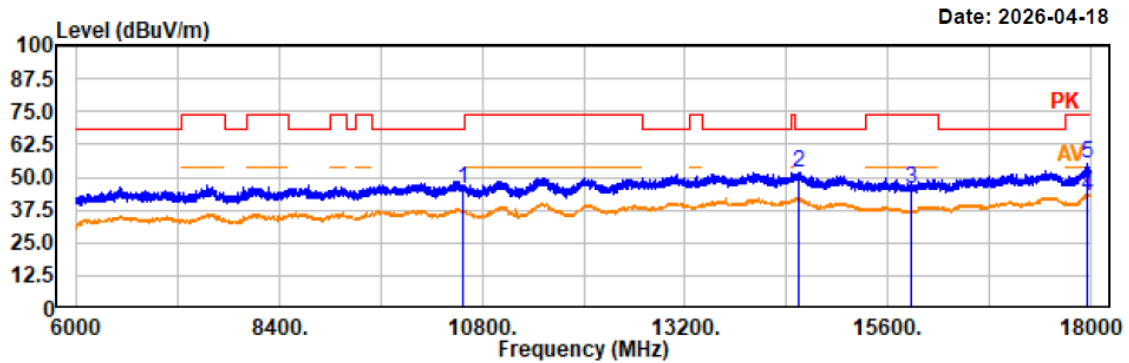

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto


AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10580.00	43.98	1.71	45.69	68.20	22.51	vertical	Peak
14551.20	46.61	5.09	51.70	68.20	16.50	vertical	Peak
15870.00	43.22	2.13	45.35	74.00	28.65	vertical	Peak
17954.40	35.77	6.81	42.58	54.00	11.42	vertical	Average
17954.40	48.03	6.81	54.84	74.00	19.16	vertical	Peak

Band 3:

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5500MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

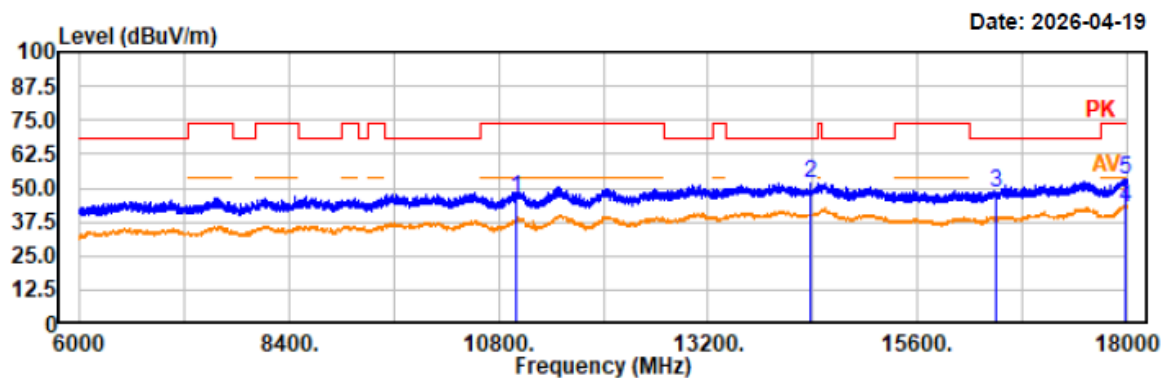

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	43.90	2.06	45.96	74.00	28.04	horizontal	Peak
14366.40	46.72	5.30	52.02	68.20	16.18	horizontal	Peak
16500.00	45.04	3.42	48.46	68.20	19.74	horizontal	Peak
17980.80	36.07	6.83	42.90	54.00	11.10	horizontal	Average
17980.80	46.47	6.83	53.30	74.00	20.70	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5500MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

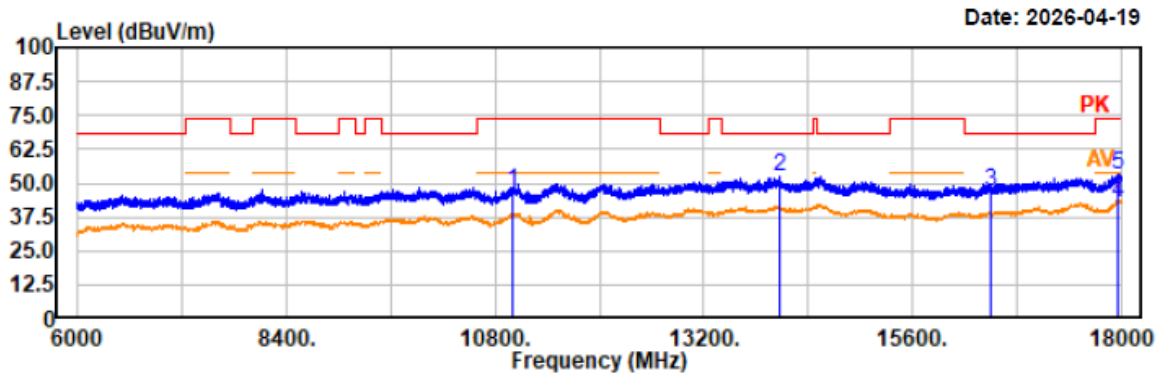

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.00	44.70	2.06	46.76	74.00	27.24	vertical	Peak
14071.20	46.96	5.24	52.20	68.20	16.00	vertical	Peak
16500.00	43.33	3.42	46.75	68.20	21.45	vertical	Peak
17968.80	35.85	6.82	42.67	54.00	11.33	vertical	Average
17968.80	46.32	6.82	53.14	74.00	20.86	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5580MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

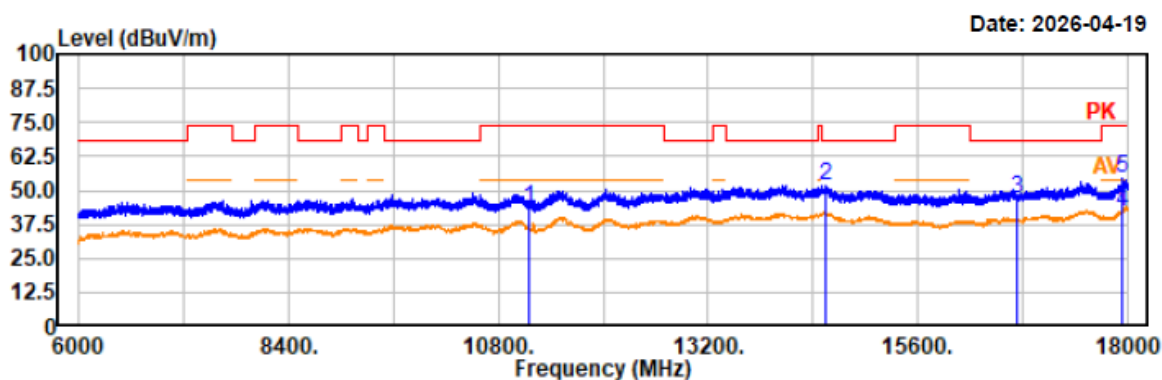

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	41.00	2.37	43.37	74.00	30.63	horizontal	Peak
14551.20	46.75	5.09	51.84	68.20	16.36	horizontal	Peak
16740.00	42.76	3.93	46.69	68.20	21.51	horizontal	Peak
17940.00	35.43	6.80	42.23	54.00	11.77	horizontal	Average
17940.00	47.50	6.80	54.30	74.00	19.70	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5580MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

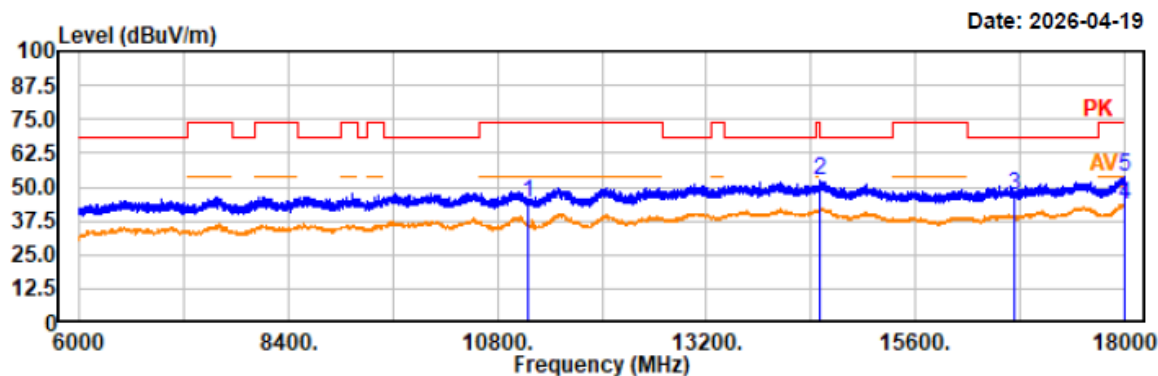

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	41.45	2.37	43.82	74.00	30.18	vertical	Peak
14509.20	47.32	5.14	52.46	68.20	15.74	vertical	Peak
16740.00	43.30	3.93	47.23	68.20	20.97	vertical	Peak
17995.20	36.41	6.84	43.25	54.00	10.75	vertical	Average
17995.20	47.05	6.84	53.89	74.00	20.11	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5700MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

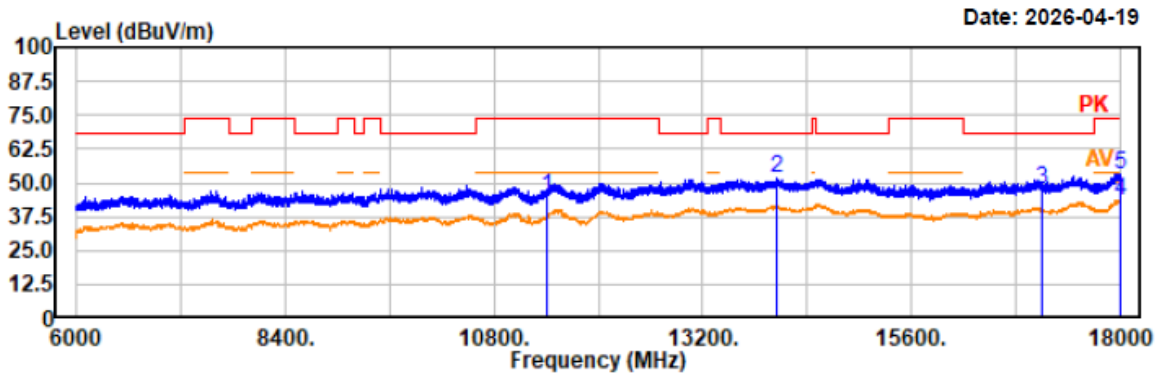

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	42.10	2.82	44.92	74.00	29.08	horizontal	Peak
14060.40	46.42	5.23	51.65	68.20	16.55	horizontal	Peak
17100.00	42.70	4.77	47.47	68.20	20.73	horizontal	Peak
17995.20	36.41	6.84	43.25	54.00	10.75	horizontal	Average
17995.20	46.30	6.84	53.14	74.00	20.86	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5700MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

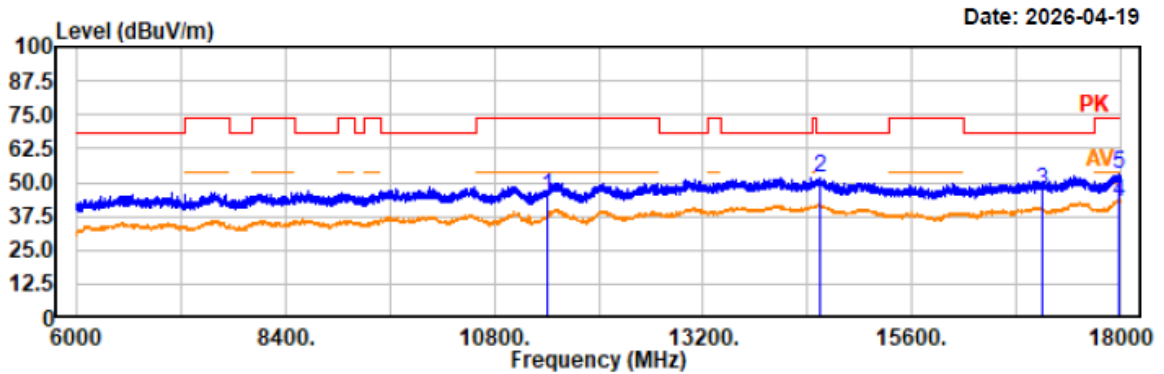

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	41.74	2.82	44.56	74.00	29.44	vertical	Peak
14546.40	46.82	5.10	51.92	68.20	16.28	vertical	Peak
17100.00	42.00	4.77	46.77	68.20	21.43	vertical	Peak
17976.00	36.01	6.83	42.84	54.00	11.16	vertical	Average
17976.00	46.18	6.83	53.01	74.00	20.99	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5500MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

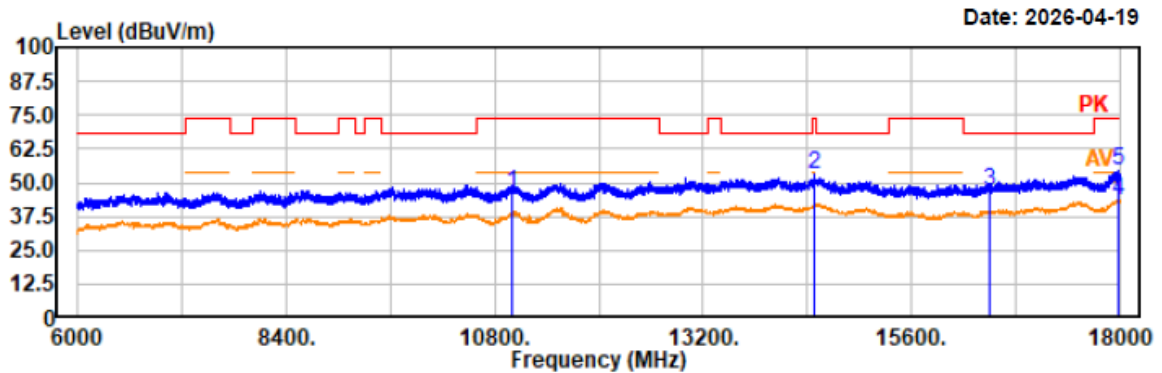

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.00	44.39	2.06	46.45	74.00	27.55	horizontal	Peak
14490.00	47.68	5.17	52.85	74.00	21.15	horizontal	Peak
16500.00	43.78	3.42	47.20	68.20	21.00	horizontal	Peak
17976.00	36.93	6.83	43.76	54.00	10.24	horizontal	Average
17976.00	47.72	6.83	54.55	74.00	19.45	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5500MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

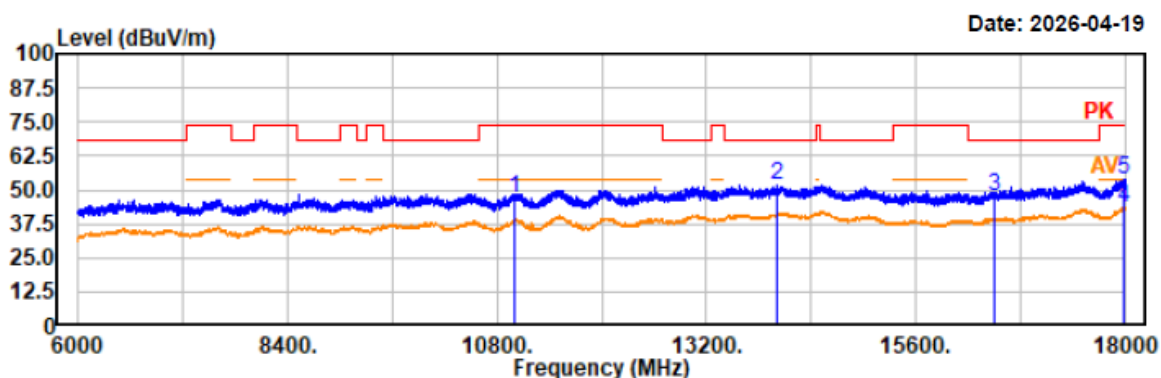

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.00	44.77	2.06	46.83	74.00	27.17	vertical	Peak
14006.40	46.73	5.14	51.87	68.20	16.33	vertical	Peak
16500.00	44.05	3.42	47.47	68.20	20.73	vertical	Peak
17986.80	36.88	6.83	43.71	54.00	10.29	vertical	Average
17986.80	47.15	6.83	53.98	74.00	20.02	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5580MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

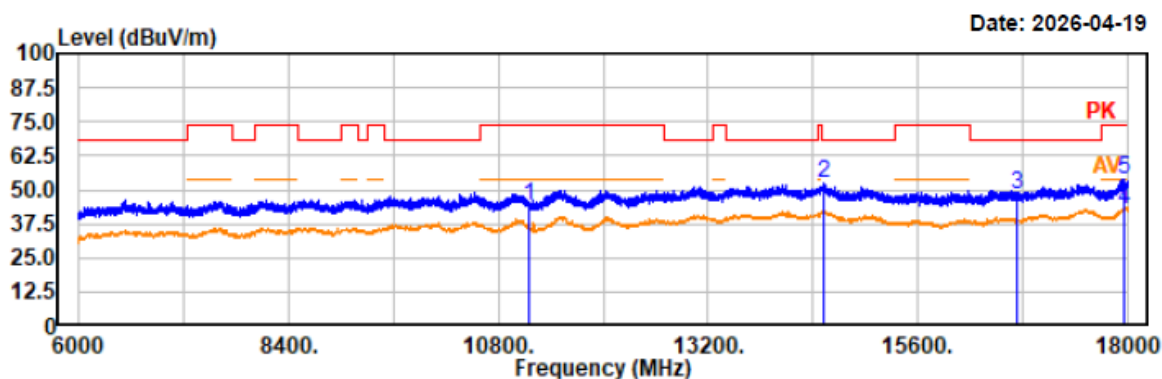

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	41.54	2.37	43.91	74.00	30.09	horizontal	Peak
14518.80	47.33	5.14	52.47	68.20	15.73	horizontal	Peak
16740.00	44.26	3.93	48.19	68.20	20.01	horizontal	Peak
17964.00	36.18	6.81	42.99	54.00	11.01	horizontal	Average
17964.00	46.96	6.81	53.77	74.00	20.23	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5580MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

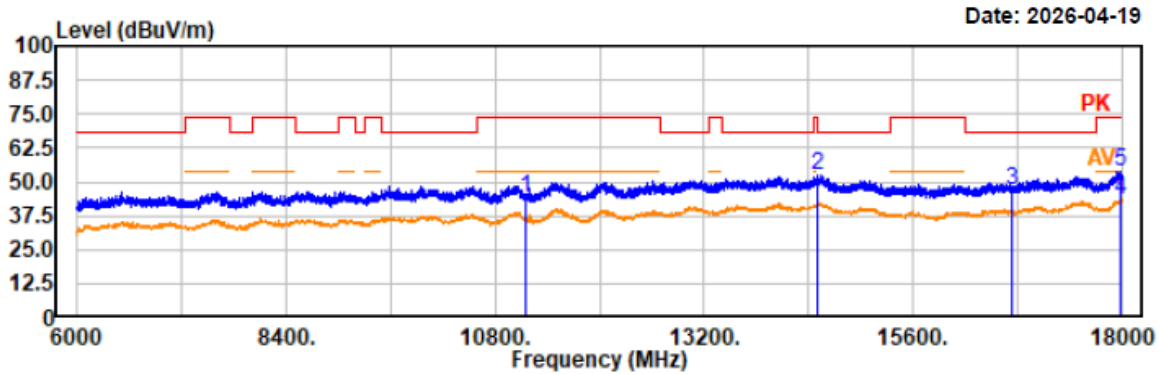

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	41.56	2.37	43.93	74.00	30.07	vertical	Peak
14493.60	47.35	5.17	52.52	74.00	21.48	vertical	Peak
16740.00	42.75	3.93	46.68	68.20	21.52	vertical	Peak
17992.80	36.29	6.83	43.12	54.00	10.88	vertical	Average
17992.80	47.06	6.83	53.89	74.00	20.11	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5700MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

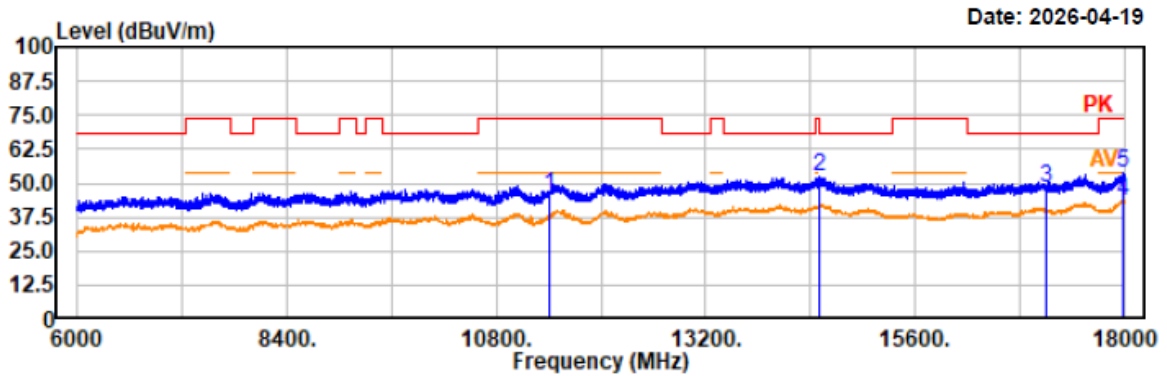

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	43.04	2.82	45.86	74.00	28.14	horizontal	Peak
14493.60	47.25	5.17	52.42	74.00	21.58	horizontal	Peak
17100.00	43.27	4.77	48.04	68.20	20.16	horizontal	Peak
17991.60	36.34	6.83	43.17	54.00	10.83	horizontal	Average
17991.60	46.87	6.83	53.70	74.00	20.30	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5700MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

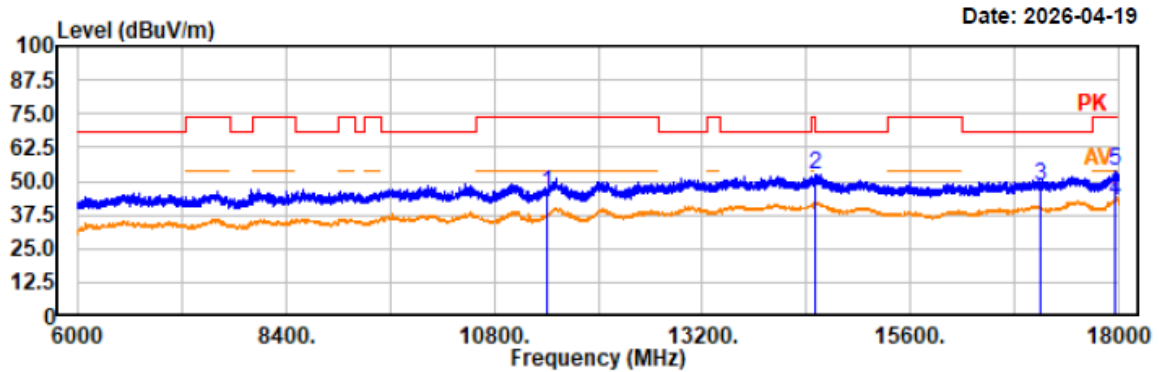

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	42.38	2.82	45.20	74.00	28.80	vertical	Peak
14502.00	47.34	5.16	52.50	68.20	15.70	vertical	Peak
17100.00	43.38	4.77	48.15	68.20	20.05	vertical	Peak
17964.00	35.78	6.81	42.59	54.00	11.41	vertical	Average
17964.00	46.70	6.81	53.51	74.00	20.49	vertical	Peak