


Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5510MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

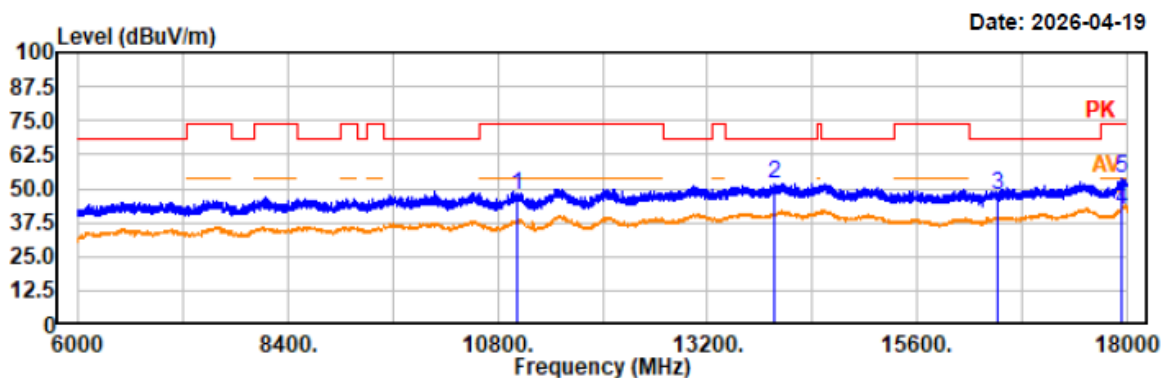

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11020.00	45.72	2.09	47.81	74.00	26.19	horizontal	Peak
13965.60	46.83	5.13	51.96	68.20	16.24	horizontal	Peak
16530.00	44.27	3.48	47.75	68.20	20.45	horizontal	Peak
17932.80	35.31	6.79	42.10	54.00	11.90	horizontal	Average
17932.80	46.68	6.79	53.47	74.00	20.53	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5510MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

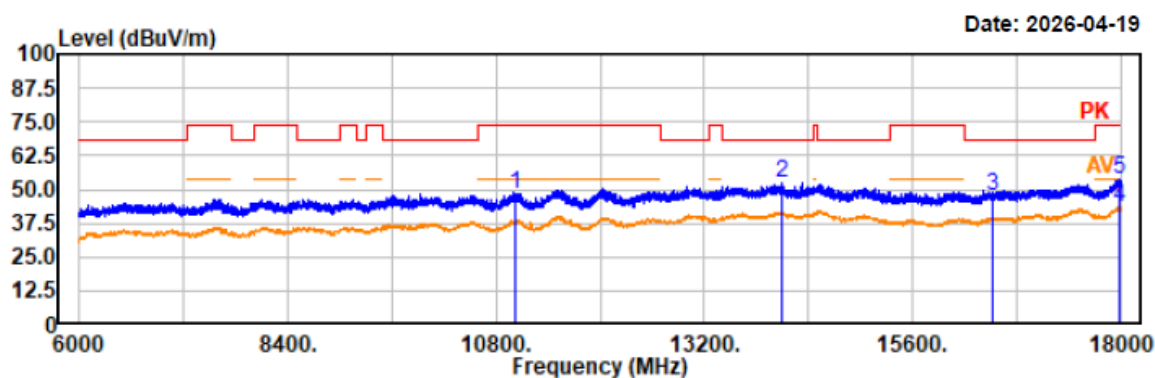

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11019.60	46.05	2.09	48.14	74.00	25.86	vertical	Peak
14102.40	47.32	5.29	52.61	68.20	15.59	vertical	Peak
16530.00	44.03	3.48	47.51	68.20	20.69	vertical	Peak
17990.40	36.55	6.83	43.38	54.00	10.62	vertical	Average
17990.40	46.70	6.83	53.53	74.00	20.47	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5550MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

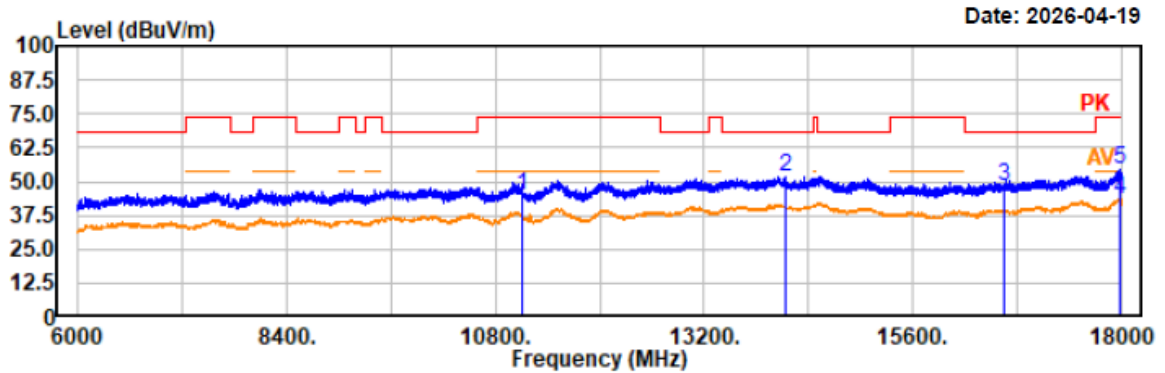

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11100.00	42.46	2.25	44.71	74.00	29.29	horizontal	Peak
14131.20	46.64	5.32	51.96	68.20	16.24	horizontal	Peak
16650.00	44.23	3.73	47.96	68.20	20.24	horizontal	Peak
17984.40	36.36	6.83	43.19	54.00	10.81	horizontal	Average
17984.40	47.87	6.83	54.70	74.00	19.30	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5550MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

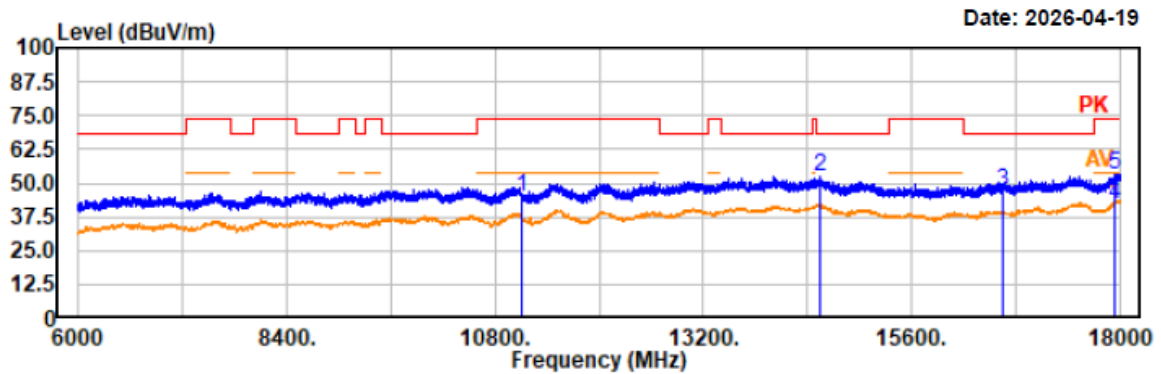

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11100.00	42.66	2.25	44.91	74.00	29.09	vertical	Peak
14544.00	47.05	5.11	52.16	68.20	16.04	vertical	Peak
16650.00	43.47	3.73	47.20	68.20	21.00	vertical	Peak
17932.80	35.34	6.79	42.13	54.00	11.87	vertical	Average
17932.80	46.49	6.79	53.28	74.00	20.72	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5670MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

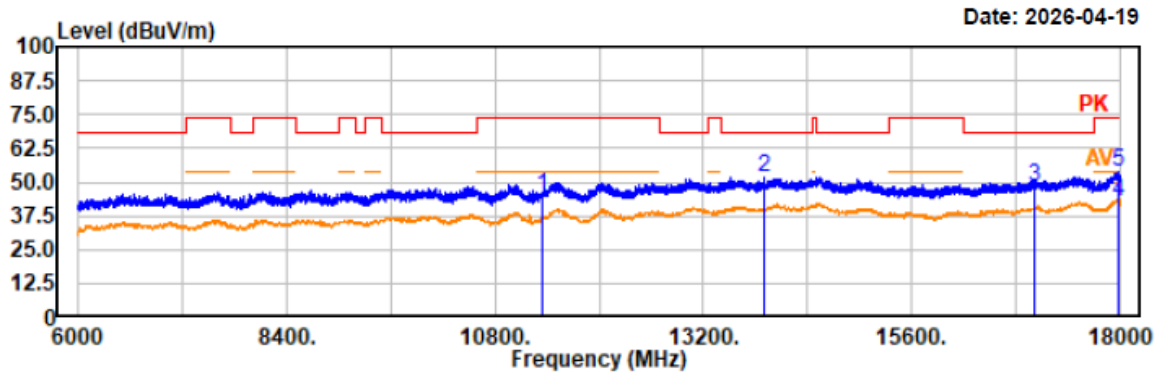

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11340.00	41.88	2.70	44.58	74.00	29.42	horizontal	Peak
13903.20	46.81	5.11	51.92	68.20	16.28	horizontal	Peak
17010.00	43.35	4.59	47.94	68.20	20.26	horizontal	Peak
17983.20	36.24	6.83	43.07	54.00	10.93	horizontal	Average
17983.20	46.66	6.83	53.49	74.00	20.51	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5670MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

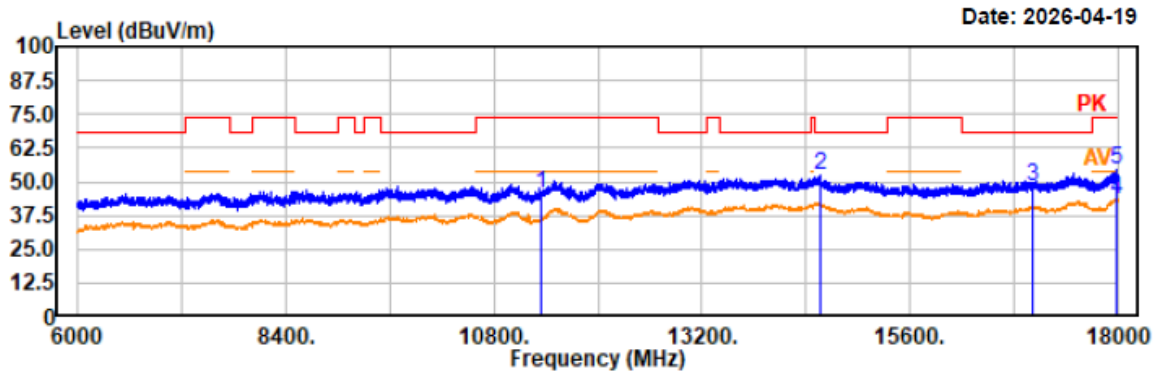

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11340.00	42.97	2.70	45.67	74.00	28.33	vertical	Peak
14558.40	47.12	5.09	52.21	68.20	15.99	vertical	Peak
17010.00	43.88	4.59	48.47	68.20	19.73	vertical	Peak
17989.20	36.84	6.83	43.67	54.00	10.33	vertical	Average
17989.20	47.42	6.83	54.25	74.00	19.75	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5530MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

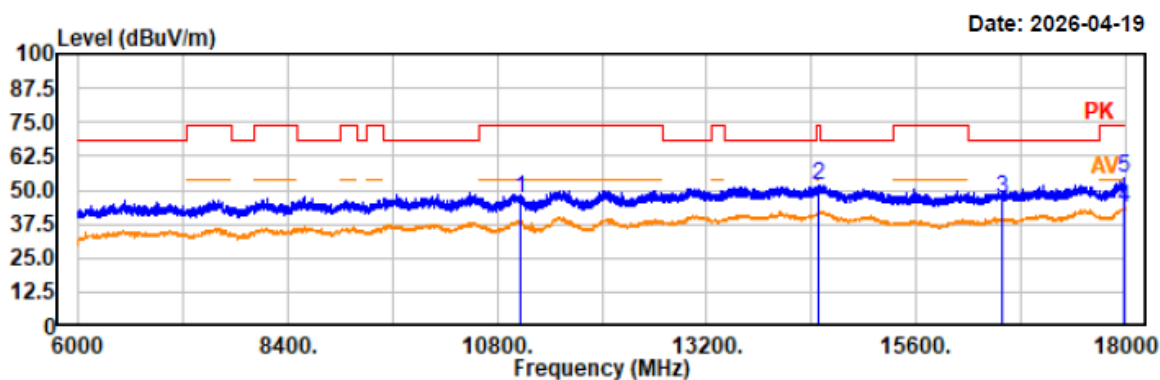

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11060.00	45.03	2.17	47.20	74.00	26.80	horizontal	Peak
14490.00	46.86	5.17	52.03	74.00	21.97	horizontal	Peak
16590.00	43.03	3.60	46.63	68.20	21.57	horizontal	Peak
17991.60	36.82	6.83	43.65	54.00	10.35	horizontal	Average
17991.60	47.40	6.83	54.23	74.00	19.77	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5530MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

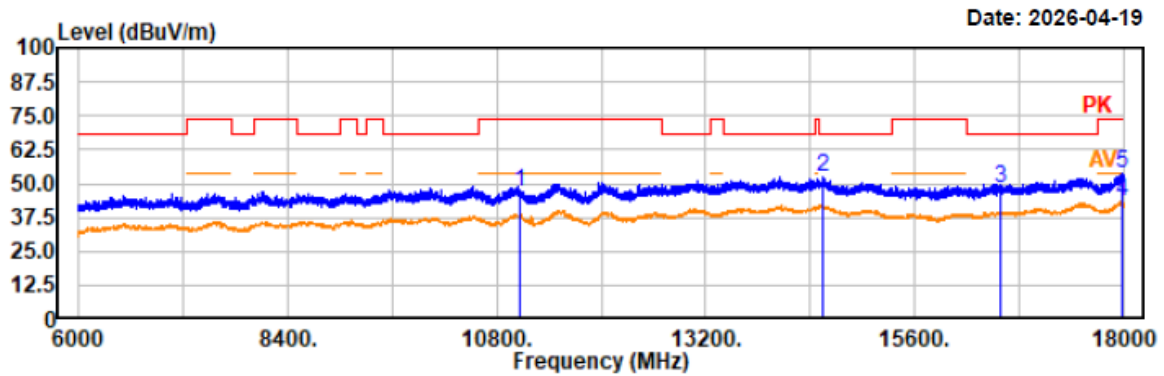

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11060.00	44.47	2.17	46.64	74.00	27.36	vertical	Peak
14539.20	47.43	5.11	52.54	68.20	15.66	vertical	Peak
16590.00	44.68	3.60	48.28	68.20	19.92	vertical	Peak
17983.20	36.41	6.83	43.24	54.00	10.76	vertical	Average
17983.20	46.80	6.83	53.63	74.00	20.37	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5610MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

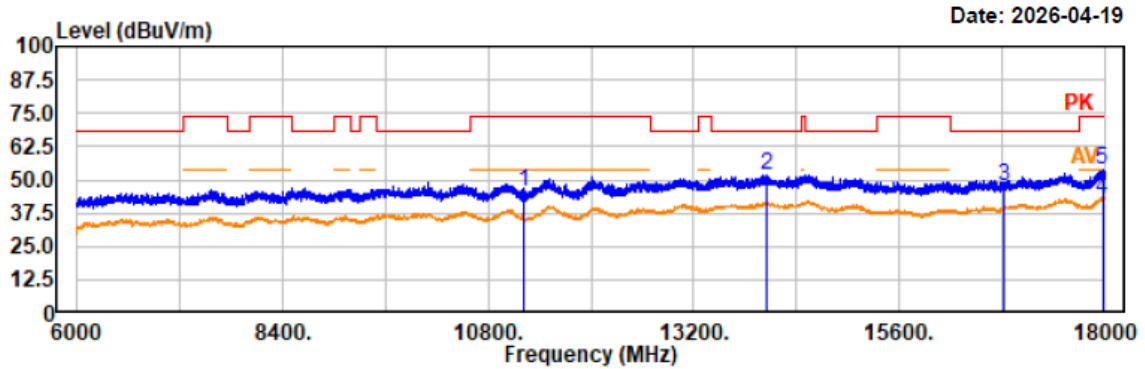


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11220.00	43.05	2.48	45.53	74.00	28.47	horizontal	Peak
14053.20	46.63	5.23	51.86	68.20	16.34	horizontal	Peak
16830.00	43.31	4.14	47.45	68.20	20.75	horizontal	Peak
17972.40	36.18	6.82	43.00	54.00	11.00	horizontal	Average
17972.40	46.90	6.82	53.72	74.00	20.28	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5610MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

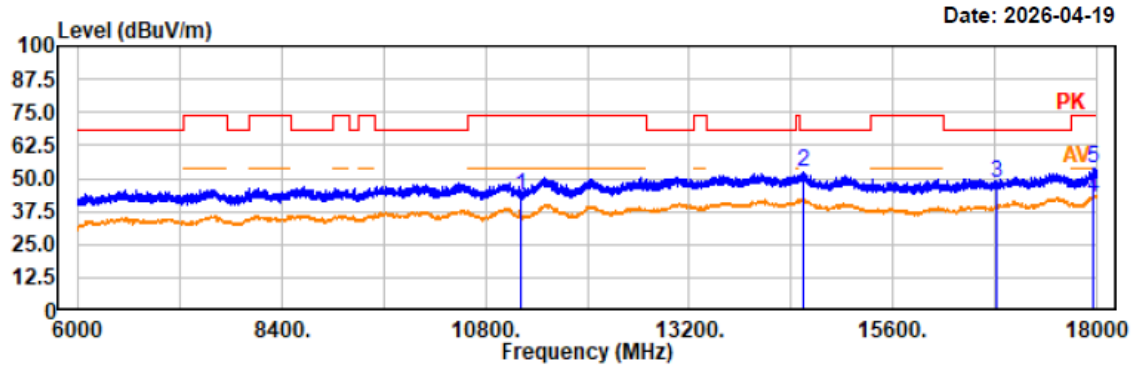

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11220.00	40.99	2.48	43.47	74.00	30.53	vertical	Peak
14552.40	47.43	5.09	52.52	68.20	15.68	vertical	Peak
16830.00	44.46	4.14	48.60	68.20	19.60	vertical	Peak
17965.20	35.73	6.82	42.55	54.00	11.45	vertical	Average
17965.20	47.12	6.82	53.94	74.00	20.06	vertical	Peak

Band 4:

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5745MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

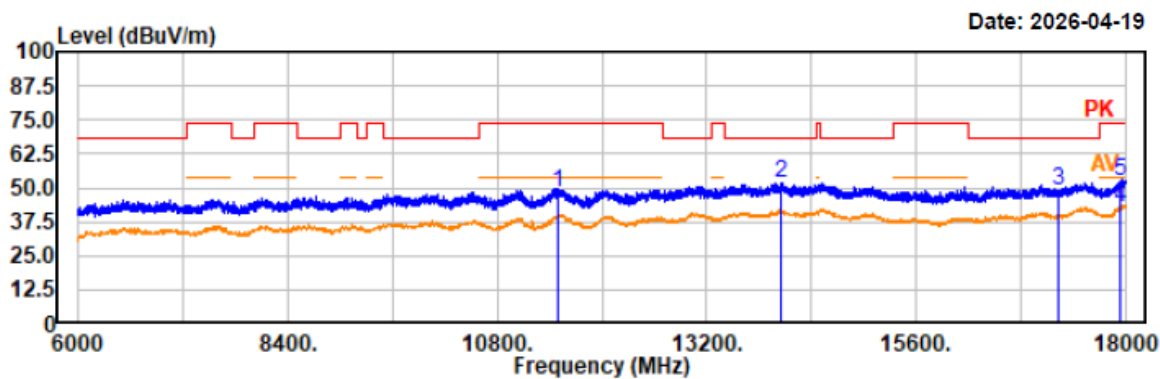
**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	45.05	2.99	48.04	74.00	25.96	horizontal	Peak
14052.00	46.79	5.22	52.01	68.20	16.19	horizontal	Peak
17235.00	43.61	5.16	48.77	68.20	19.43	horizontal	Peak
17937.60	36.03	6.80	42.83	54.00	11.17	horizontal	Average
17937.60	45.77	6.80	52.57	74.00	21.43	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5745MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

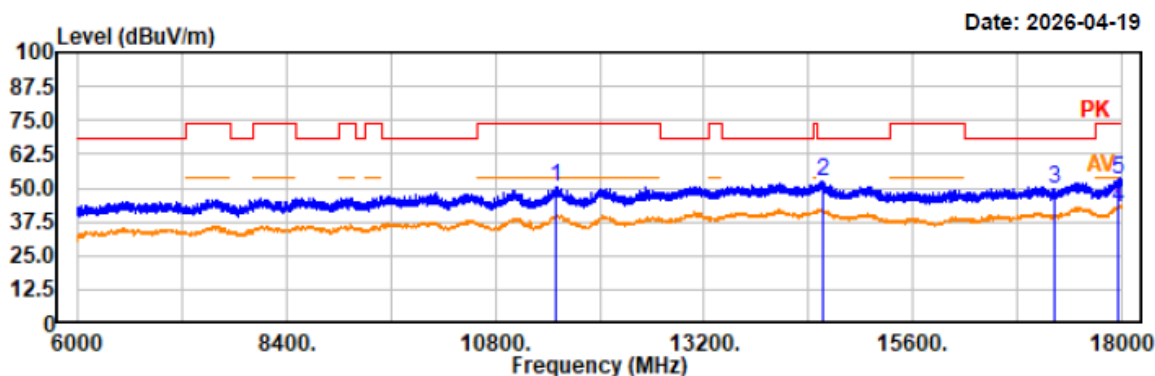

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	47.27	2.99	50.26	74.00	23.74	vertical	Peak
14559.60	47.20	5.09	52.29	68.20	15.91	vertical	Peak
17235.00	44.62	5.16	49.78	68.20	18.42	vertical	Peak
17964.00	35.97	6.81	42.78	54.00	11.22	vertical	Average
17964.00	46.13	6.81	52.94	74.00	21.06	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5785MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

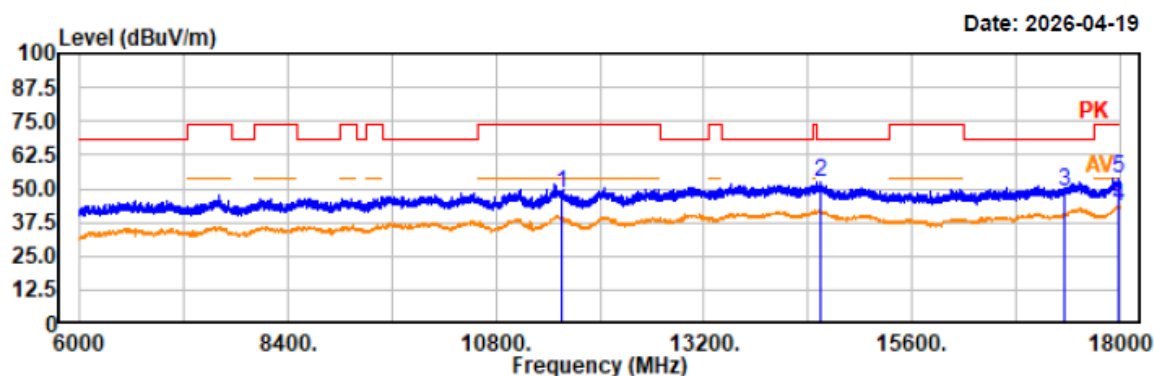

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	45.28	3.09	48.37	74.00	25.63	horizontal	Peak
14536.80	47.28	5.11	52.39	68.20	15.81	horizontal	Peak
17355.00	43.39	5.45	48.84	68.20	19.36	horizontal	Peak
17989.20	36.69	6.83	43.52	54.00	10.48	horizontal	Average
17989.20	46.94	6.83	53.77	74.00	20.23	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5785MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

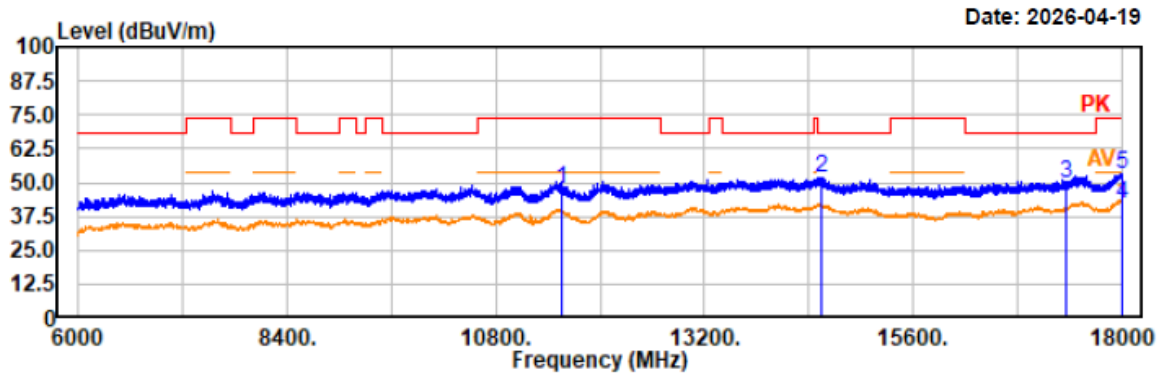

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	44.75	3.09	47.84	74.00	26.16	vertical	Peak
14539.20	46.86	5.11	51.97	68.20	16.23	vertical	Peak
17354.40	44.06	5.45	49.51	68.20	18.69	vertical	Peak
17998.80	35.54	6.84	42.38	54.00	11.62	vertical	Average
17998.80	46.50	6.84	53.34	74.00	20.66	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5825MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

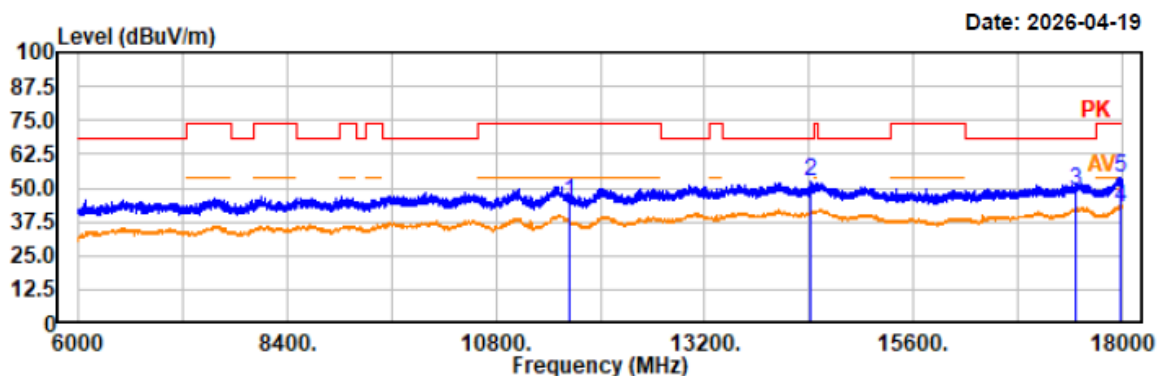

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11650.00	41.97	3.13	45.10	74.00	28.90	horizontal	Peak
14425.20	46.84	5.26	52.10	68.20	16.10	horizontal	Peak
17475.00	43.55	5.75	49.30	68.20	18.90	horizontal	Peak
17985.60	36.18	6.84	43.02	54.00	10.98	horizontal	Average
17985.60	47.03	6.84	53.87	74.00	20.13	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5825MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

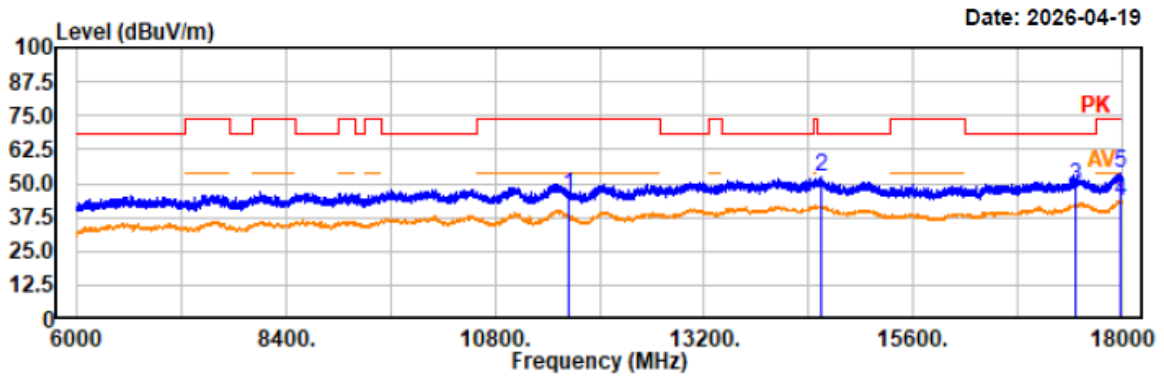

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11650.00	42.10	3.13	45.23	74.00	28.77	vertical	Peak
14542.80	47.53	5.11	52.64	68.20	15.56	vertical	Peak
17474.40	43.41	5.74	49.15	68.20	19.05	vertical	Peak
17989.20	36.36	6.83	43.19	54.00	10.81	vertical	Average
17989.20	47.06	6.83	53.89	74.00	20.11	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5745MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

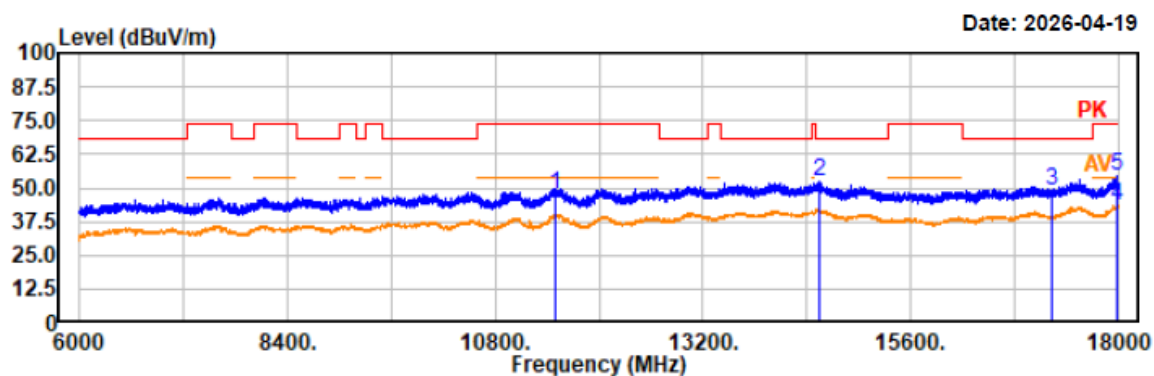

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	44.80	2.99	47.79	74.00	26.21	horizontal	Peak
14556.00	47.10	5.08	52.18	68.20	16.02	horizontal	Peak
17235.00	43.57	5.16	48.73	68.20	19.47	horizontal	Peak
17980.80	36.43	6.83	43.26	54.00	10.74	horizontal	Average
17980.80	47.53	6.83	54.36	74.00	19.64	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5745MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

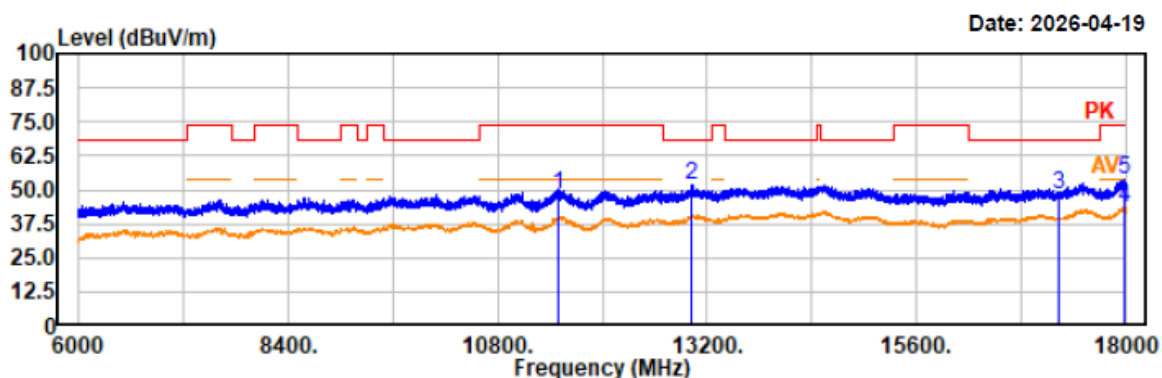

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	45.02	2.99	48.01	74.00	25.99	vertical	Peak
13024.80	47.21	4.31	51.52	68.20	16.68	vertical	Peak
17234.40	43.38	5.15	48.53	68.20	19.67	vertical	Peak
17983.20	36.35	6.83	43.18	54.00	10.82	vertical	Average
17983.20	46.74	6.83	53.57	74.00	20.43	vertical	Peak

Project No.: 2607P42218E-RF
 Test Mode: 802.11n20 5785MHz
 EUT Model: AXIUM DX8
 Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

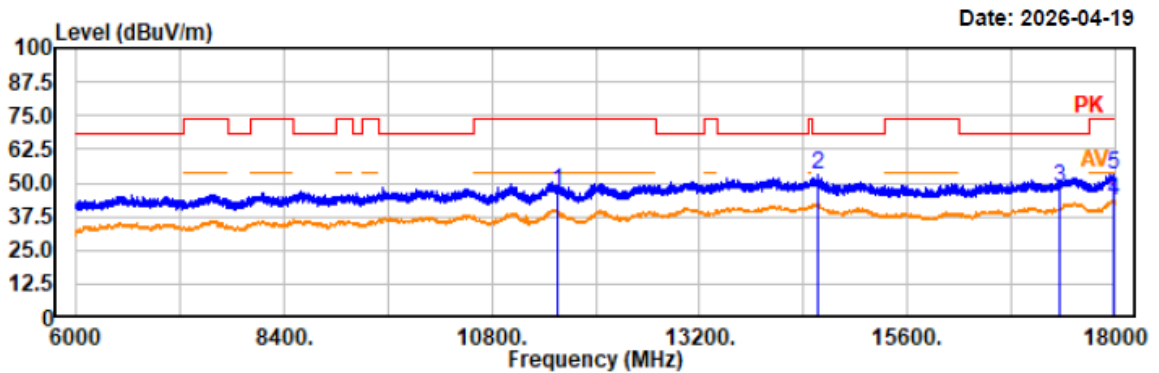

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	43.76	3.09	46.85	74.00	27.15	horizontal	Peak
14558.40	47.78	5.09	52.87	68.20	15.33	horizontal	Peak
17355.00	43.09	5.45	48.54	68.20	19.66	horizontal	Peak
17990.40	36.71	6.83	43.54	54.00	10.46	horizontal	Average
17990.40	46.28	6.83	53.11	74.00	20.89	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5785MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

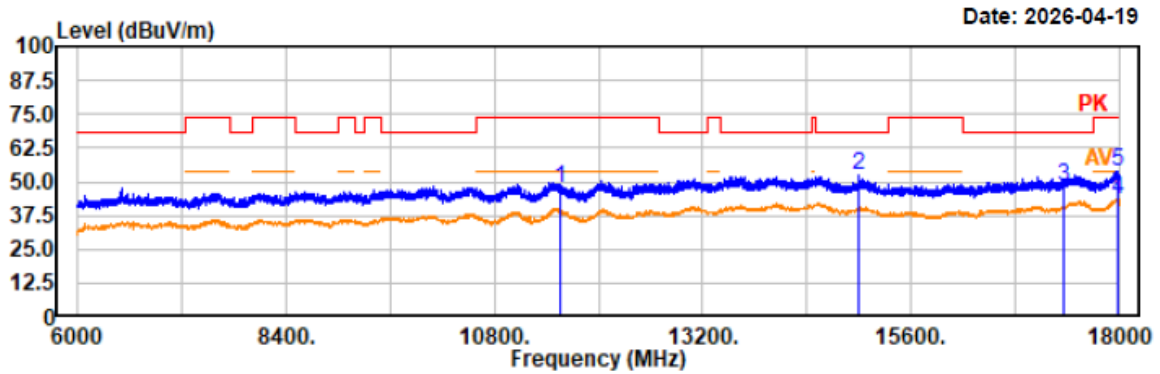

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	44.23	3.09	47.32	74.00	26.68	vertical	Peak
14988.00	48.26	4.25	52.51	68.20	15.69	vertical	Peak
17354.40	43.12	5.45	48.57	68.20	19.63	vertical	Peak
17980.80	36.40	6.83	43.23	54.00	10.77	vertical	Average
17980.80	47.08	6.83	53.91	74.00	20.09	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5825MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

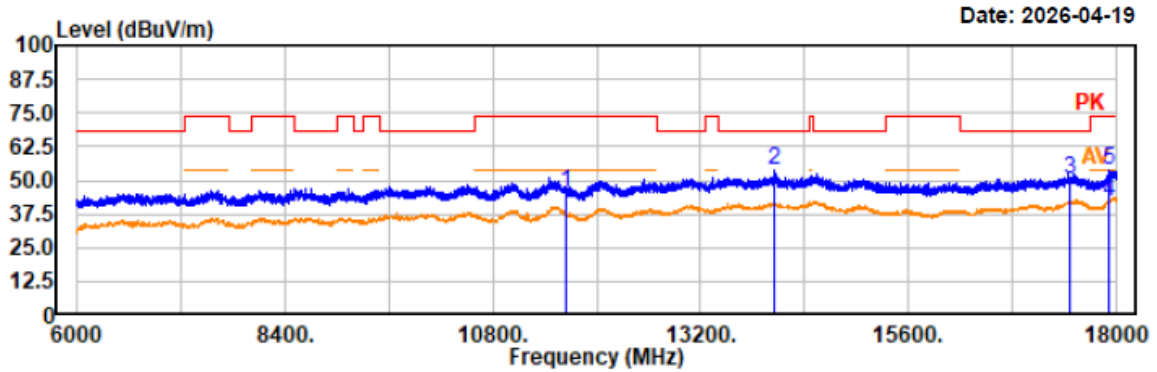

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11650.00	42.33	3.13	45.46	74.00	28.54	horizontal	Peak
14048.40	48.53	5.22	53.75	68.20	14.45	horizontal	Peak
17475.00	44.79	5.75	50.54	68.20	17.66	horizontal	Peak
17916.00	34.98	6.79	41.77	54.00	12.23	horizontal	Average
17916.00	47.02	6.79	53.81	74.00	20.19	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5825MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

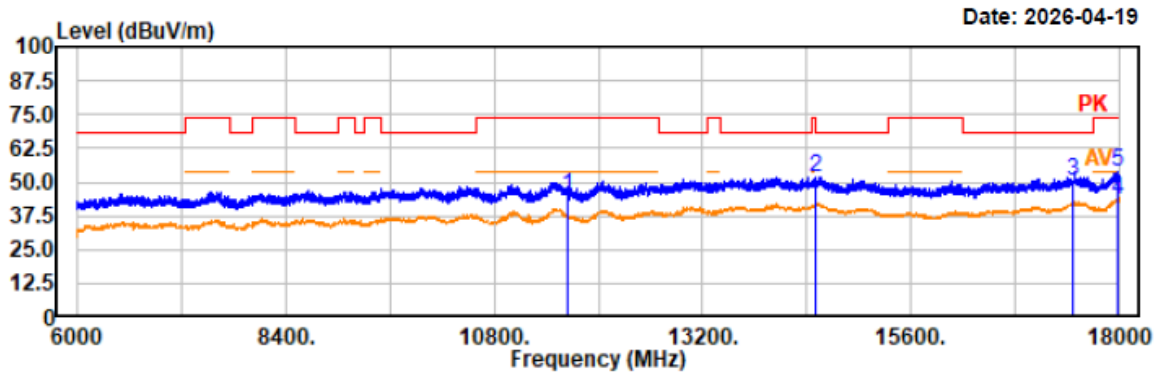

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11650.00	41.78	3.13	44.91	74.00	29.09	vertical	Peak
14499.60	46.88	5.16	52.04	74.00	21.96	vertical	Peak
17474.40	44.46	5.74	50.20	68.20	18.00	vertical	Peak
17992.80	36.55	6.83	43.38	54.00	10.62	vertical	Average
17992.80	47.03	6.83	53.86	74.00	20.14	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5755MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

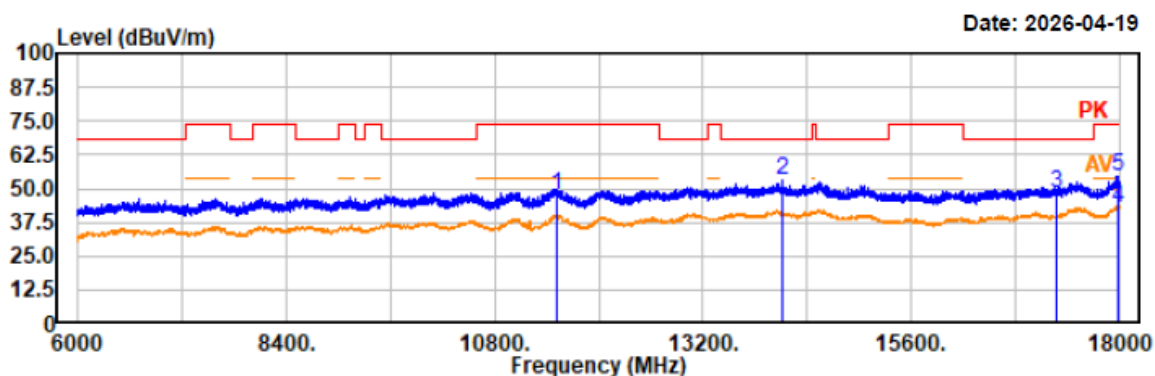

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11510.40	44.48	3.02	47.50	74.00	26.50	horizontal	Peak
14126.40	47.65	5.32	52.97	68.20	15.23	horizontal	Peak
17265.00	42.84	5.22	48.06	68.20	20.14	horizontal	Peak
17991.60	36.22	6.83	43.05	54.00	10.95	horizontal	Average
17991.60	47.88	6.83	54.71	74.00	19.29	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5755MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

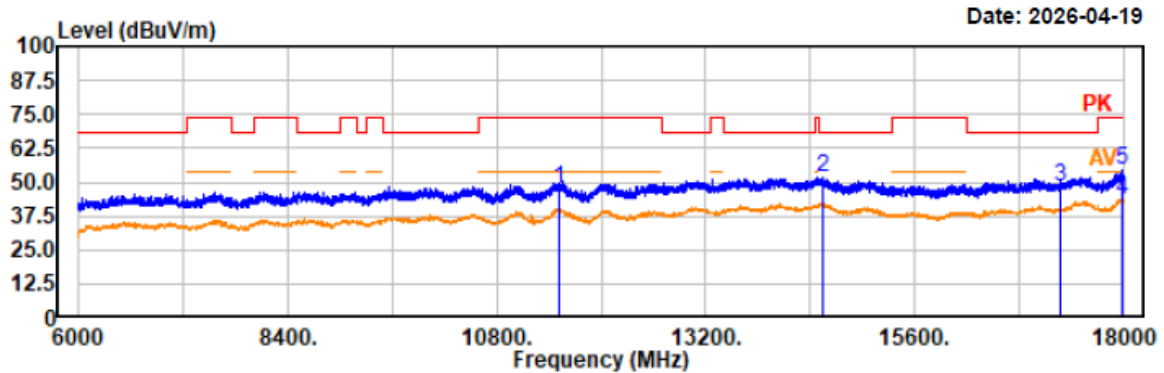

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11510.00	44.35	3.02	47.37	74.00	26.63	vertical	Peak
14553.60	46.91	5.09	52.00	68.20	16.20	vertical	Peak
17265.60	43.18	5.22	48.40	68.20	19.80	vertical	Peak
17980.80	36.51	6.83	43.34	54.00	10.66	vertical	Average
17980.80	47.55	6.83	54.38	74.00	19.62	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5795MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

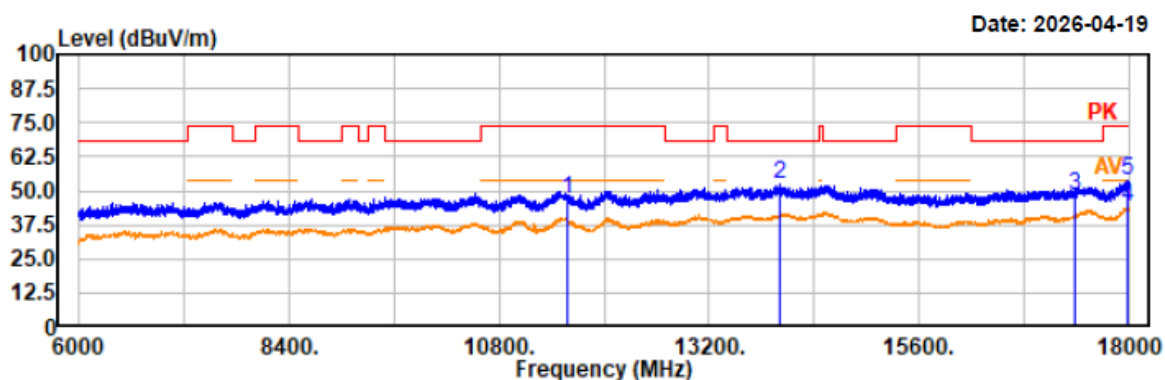

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11590.00	43.59	3.11	46.70	74.00	27.30	horizontal	Peak
14017.20	46.97	5.16	52.13	68.20	16.07	horizontal	Peak
17385.60	42.51	5.55	48.06	68.20	20.14	horizontal	Peak
17974.80	37.18	6.82	44.00	54.00	10.00	horizontal	Average
17974.80	46.90	6.82	53.72	74.00	20.28	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5795MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

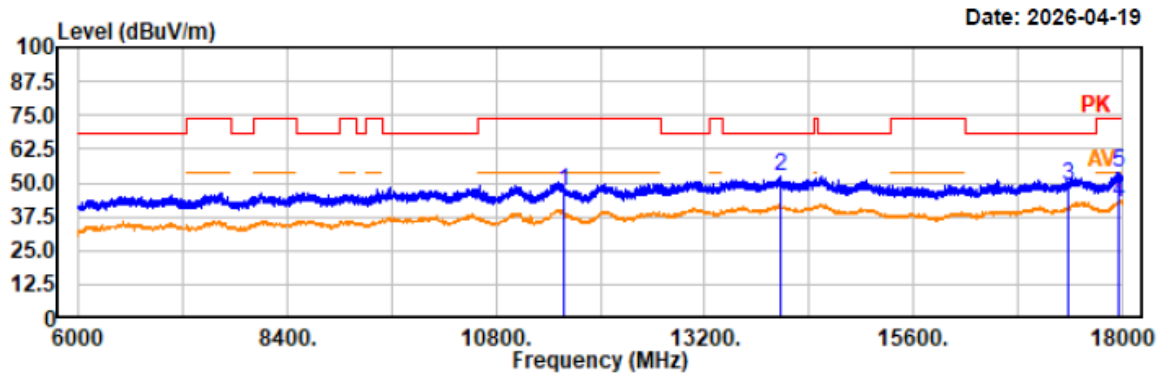


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11589.60	43.68	3.11	46.79	74.00	27.21	vertical	Peak
14083.20	47.05	5.27	52.32	68.20	15.88	vertical	Peak
17385.00	43.27	5.55	48.82	68.20	19.38	vertical	Peak
17960.40	36.06	6.81	42.87	54.00	11.13	vertical	Average
17960.40	47.25	6.81	54.06	74.00	19.94	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5775MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

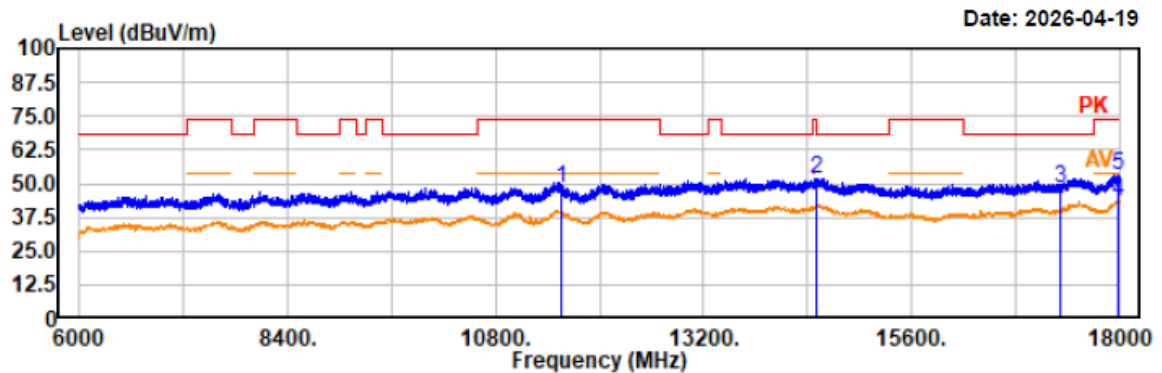

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11550.00	45.22	3.06	48.28	74.00	25.72	horizontal	Peak
14494.80	46.78	5.17	51.95	74.00	22.05	horizontal	Peak
17325.00	42.70	5.36	48.06	68.20	20.14	horizontal	Peak
17982.00	36.48	6.83	43.31	54.00	10.69	horizontal	Average
17982.00	46.12	6.83	52.95	74.00	21.05	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5775MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

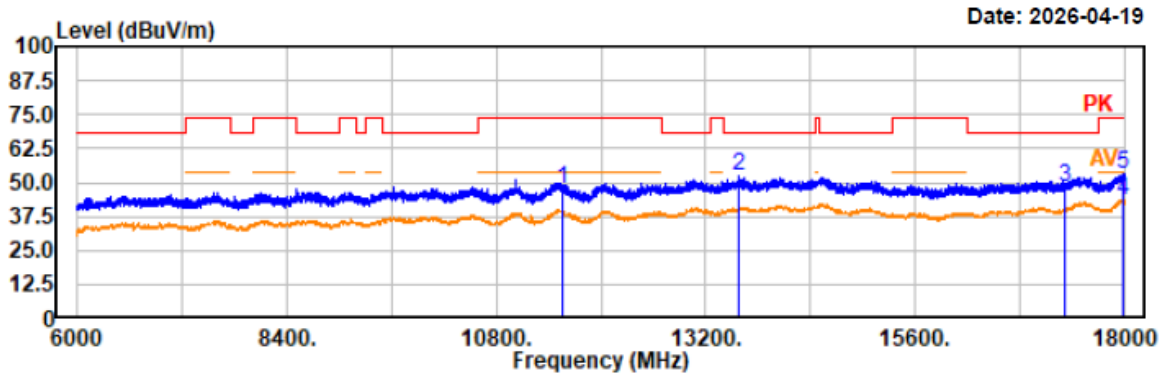

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11550.00	44.87	3.06	47.93	74.00	26.07	vertical	Peak
13578.00	47.74	4.67	52.41	68.20	15.79	vertical	Peak
17325.60	42.81	5.36	48.17	68.20	20.03	vertical	Peak
17984.40	36.39	6.83	43.22	54.00	10.78	vertical	Average
17984.40	46.39	6.83	53.22	74.00	20.78	vertical	Peak

5) 18-40GHz

Note: The maximum output power mode: WiFi 802.11a 5785MHz was tested.

Configuration 1#(Scanner variant)

Project No.: 2607P42218E-RF

Test Mode: 802.11a 5785MHz


EUT Model: AXIUM DX8

Test distance: 1.5m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

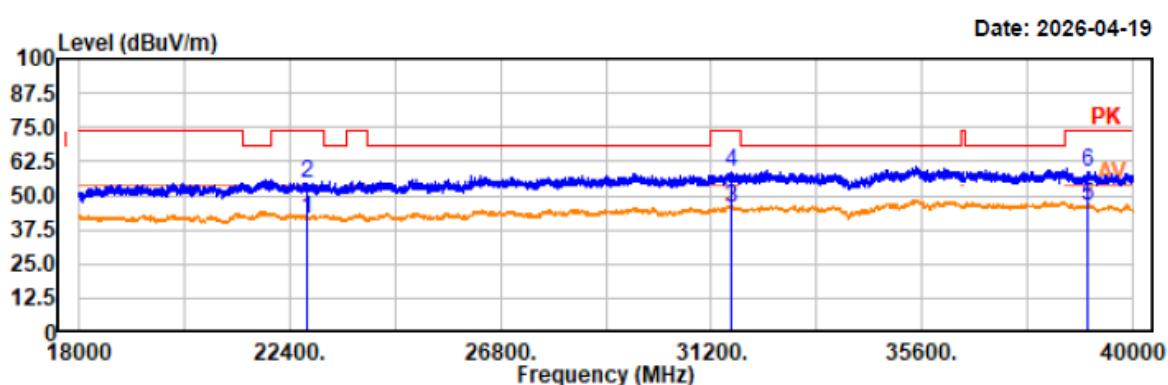

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
22743.20	36.56	5.02	41.58	54.00	12.42	horizontal	Average
22743.20	49.52	5.02	54.54	74.00	19.46	horizontal	Peak
31615.80	38.24	7.53	45.77	54.00	8.23	horizontal	Average
31615.80	50.83	7.53	58.36	74.00	15.64	horizontal	Peak
39071.60	37.10	9.16	46.26	54.00	7.74	horizontal	Average
39071.60	49.46	9.16	58.62	74.00	15.38	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5785MHz
EUT Model: AXIUM DX8
Test distance: 1.5m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

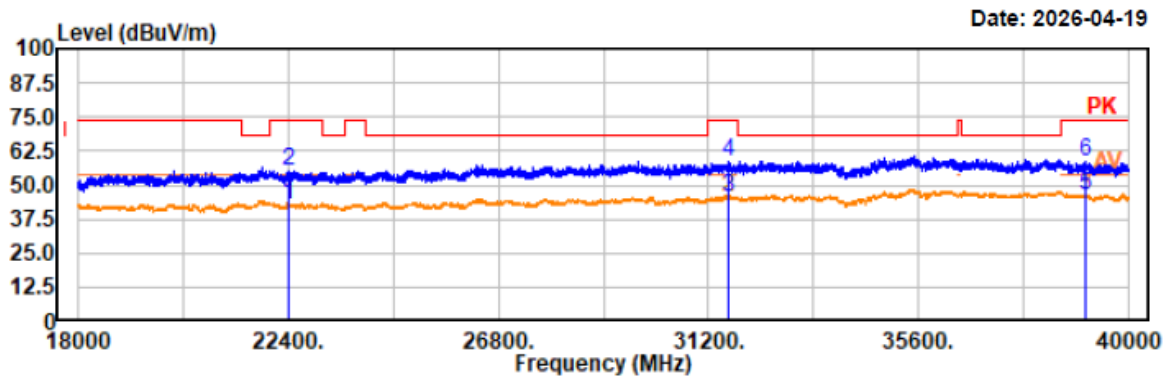

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto


AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
22411.00	37.69	4.77	42.46	54.00	11.54	vertical	Average
22411.00	50.49	4.77	55.26	74.00	18.74	vertical	Peak
31613.60	38.33	7.53	45.86	54.00	8.14	vertical	Average
31613.60	51.11	7.53	58.64	74.00	15.36	vertical	Peak
39098.00	37.10	9.16	46.26	54.00	7.74	vertical	Average
39098.00	49.57	9.16	58.73	74.00	15.27	vertical	Peak

Restricted Bands Emissions:**Configuration 1#(Scanner variant)****Band 1:**

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5180MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

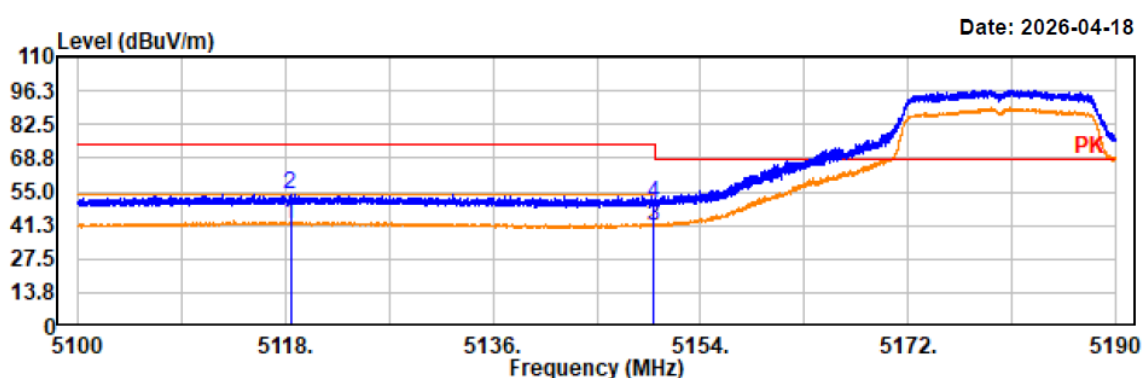

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5118.42	36.85	5.11	41.96	54.00	12.04	horizontal	Average
5118.42	48.85	5.11	53.96	74.00	20.04	horizontal	Peak
5149.99	35.93	5.16	41.09	54.00	12.91	horizontal	Average
5149.99	45.16	5.16	50.32	74.00	23.68	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5180MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

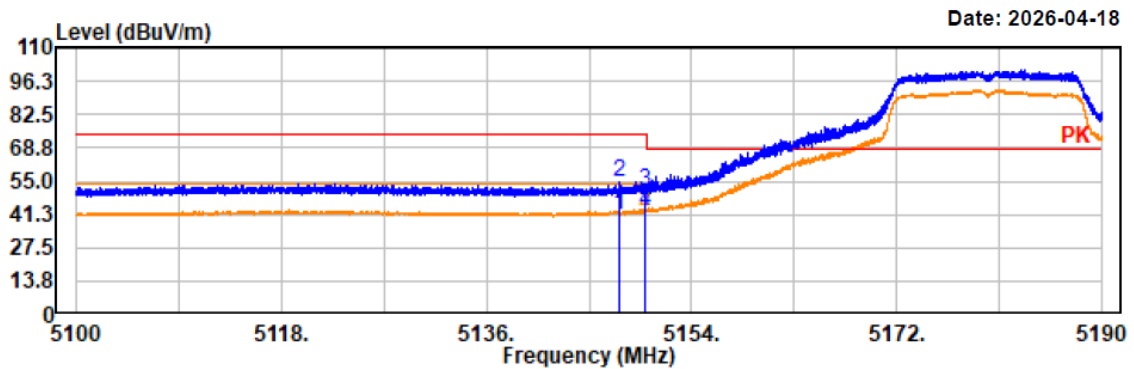

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5147.71	36.15	5.16	41.31	54.00	12.69	vertical	Average
5147.71	49.23	5.16	54.39	74.00	19.61	vertical	Peak
5149.99	46.00	5.16	51.16	74.00	22.84	vertical	Peak
5149.99	37.57	5.16	42.73	54.00	11.27	vertical	Average

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5240MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

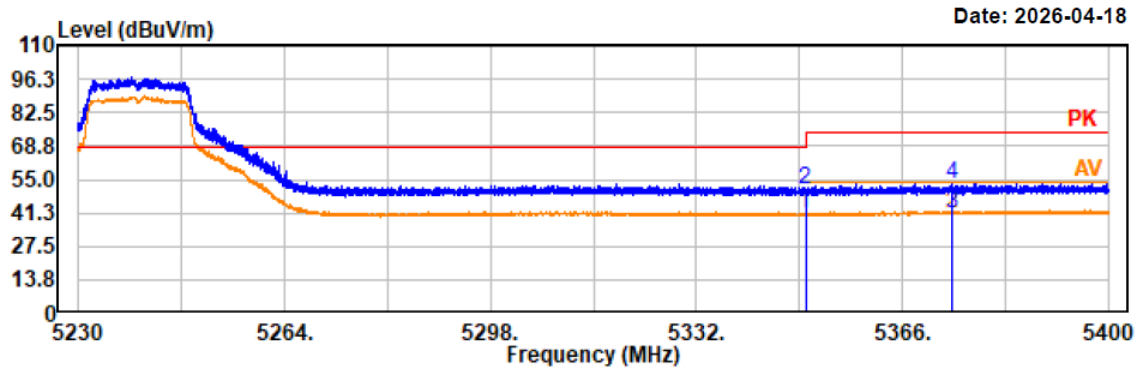

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	35.17	5.49	40.66	54.00	13.34	horizontal	Average
5350.00	45.62	5.49	51.11	74.00	22.89	horizontal	Peak
5374.14	35.53	5.53	41.06	54.00	12.94	horizontal	Average
5374.14	47.70	5.53	53.23	74.00	20.77	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5240MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

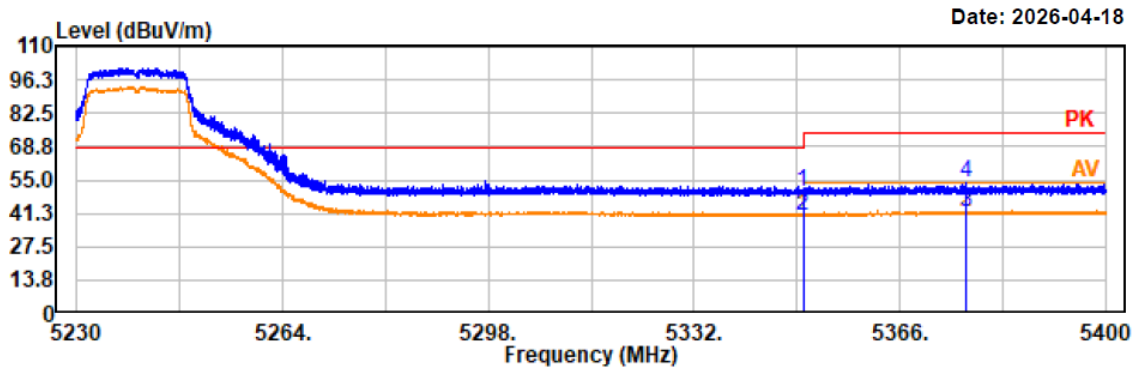

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	44.89	5.49	50.38	74.00	23.62	vertical	Peak
5350.00	34.94	5.49	40.43	54.00	13.57	vertical	Average
5376.97	36.20	5.53	41.73	54.00	12.27	vertical	Average
5376.97	47.98	5.53	53.51	74.00	20.49	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5180MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

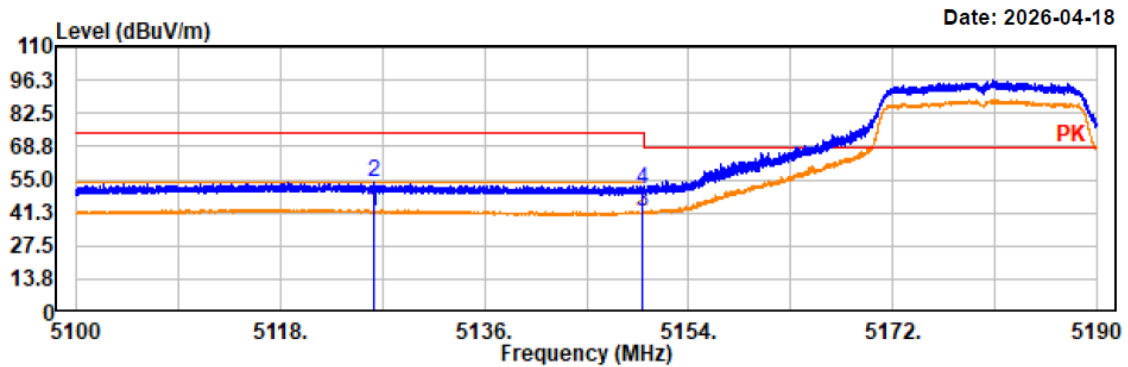


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5126.25	36.27	5.12	41.39	54.00	12.61	horizontal	Average
5126.25	48.53	5.12	53.65	74.00	20.35	horizontal	Peak
5149.99	36.45	5.16	41.61	54.00	12.39	horizontal	Average
5149.99	45.33	5.16	50.49	74.00	23.51	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5180MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

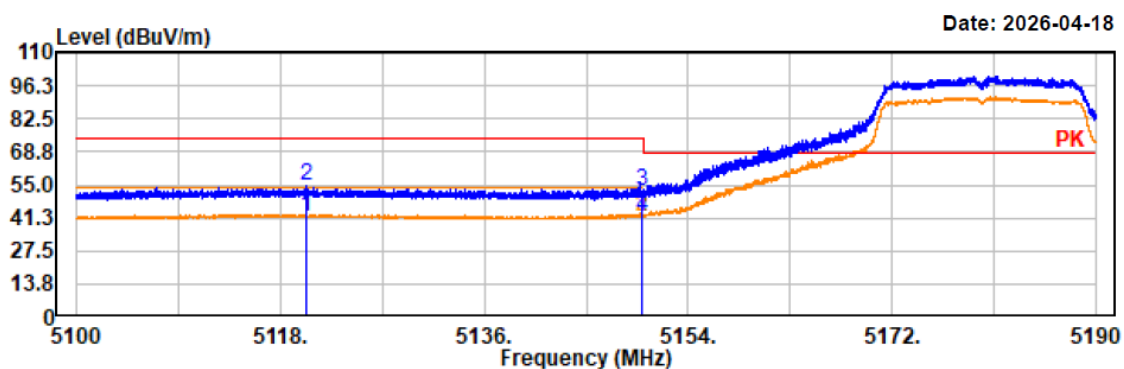


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5120.21	36.54	5.11	41.65	54.00	12.35	vertical	Average
5120.21	49.32	5.11	54.43	74.00	19.57	vertical	Peak
5149.99	47.41	5.16	52.57	74.00	21.43	vertical	Peak
5149.99	36.78	5.16	41.94	54.00	12.06	vertical	Average

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5240MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

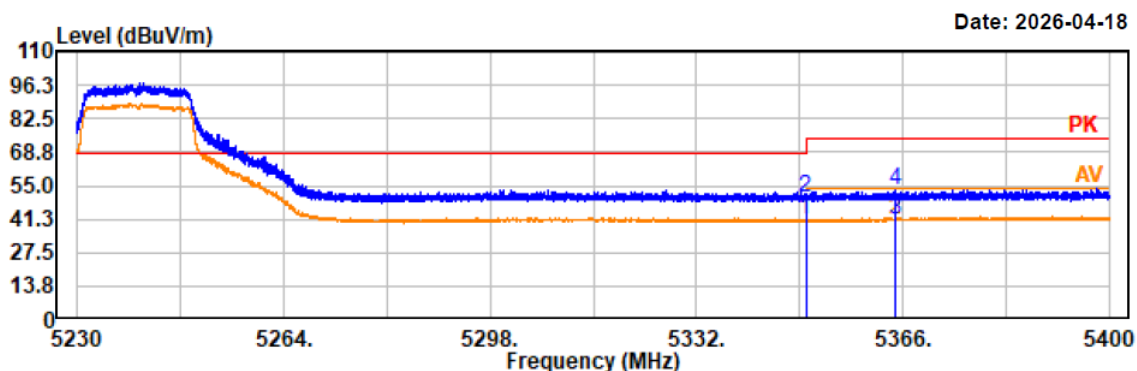


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	35.34	5.49	40.83	54.00	13.17	horizontal	Average
5350.00	44.78	5.49	50.27	74.00	23.73	horizontal	Peak
5364.79	35.23	5.51	40.74	54.00	13.26	horizontal	Average
5364.79	47.46	5.51	52.97	74.00	21.03	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5240MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

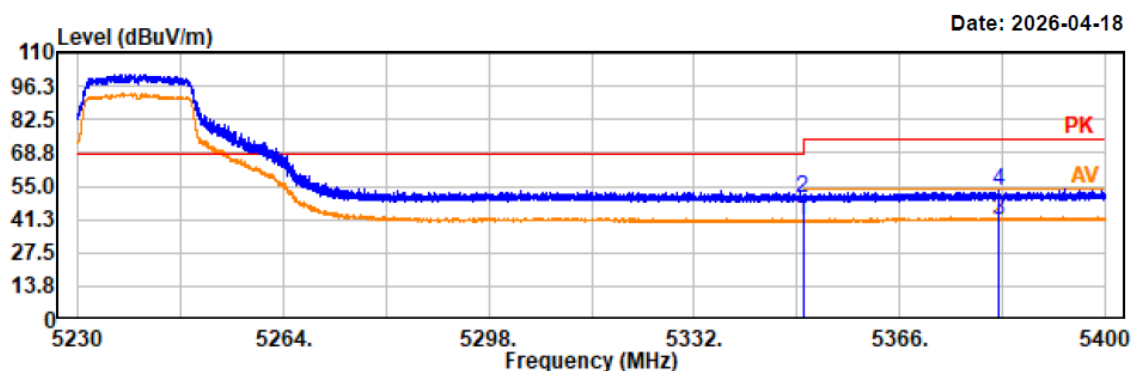


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	35.15	5.49	40.64	54.00	13.36	vertical	Average
5350.00	44.93	5.49	50.42	74.00	23.58	vertical	Peak
5382.41	35.71	5.54	41.25	54.00	12.75	vertical	Average
5382.41	47.46	5.54	53.00	74.00	21.00	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5190MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

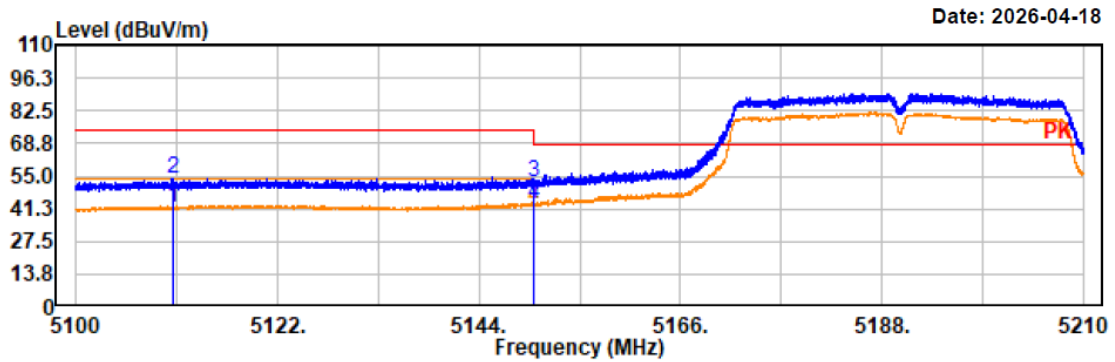

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5110.64	36.78	5.09	41.87	54.00	12.13	horizontal	Average
5110.64	48.76	5.09	53.85	74.00	20.15	horizontal	Peak
5149.99	47.12	5.16	52.28	74.00	21.72	horizontal	Peak
5150.00	37.87	5.16	43.03	54.00	10.97	horizontal	Average

Project No.: 2607P42218E-RF
 Test Mode: 802.11n40 5190MHz
 EUT Model: AXIUM DX8
 Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

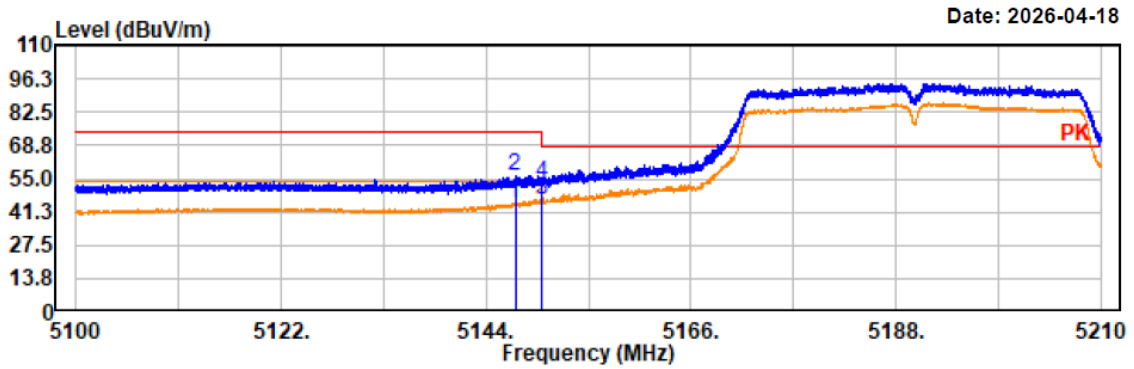


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5147.12	39.58	5.15	44.73	54.00	9.27	vertical	Average
5147.12	50.86	5.15	56.01	74.00	17.99	vertical	Peak
5149.99	40.80	5.16	45.96	54.00	8.04	vertical	Average
5150.00	48.25	5.16	53.41	74.00	20.59	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5230MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

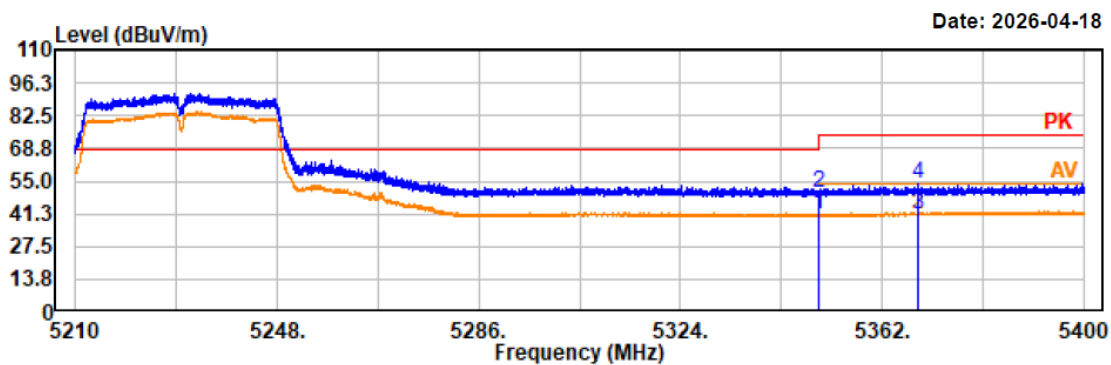

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	35.20	5.49	40.69	54.00	13.31	horizontal	Average
5350.00	44.56	5.49	50.05	74.00	23.95	horizontal	Peak
5368.75	35.43	5.52	40.95	54.00	13.05	horizontal	Average
5368.75	48.09	5.52	53.61	74.00	20.39	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5230MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

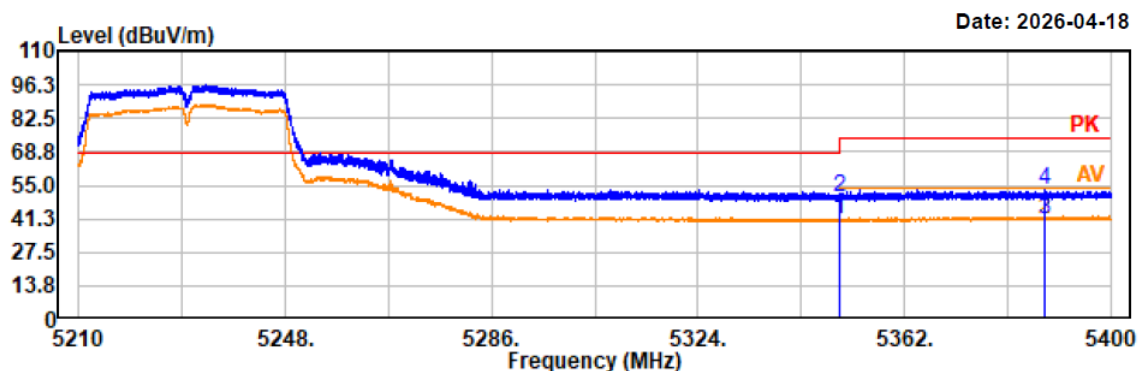


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	35.26	5.49	40.75	54.00	13.25	vertical	Average
5350.00	44.35	5.49	49.84	74.00	24.16	vertical	Peak
5387.92	35.70	5.56	41.26	54.00	12.74	vertical	Average
5387.92	47.60	5.56	53.16	74.00	20.84	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5210MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

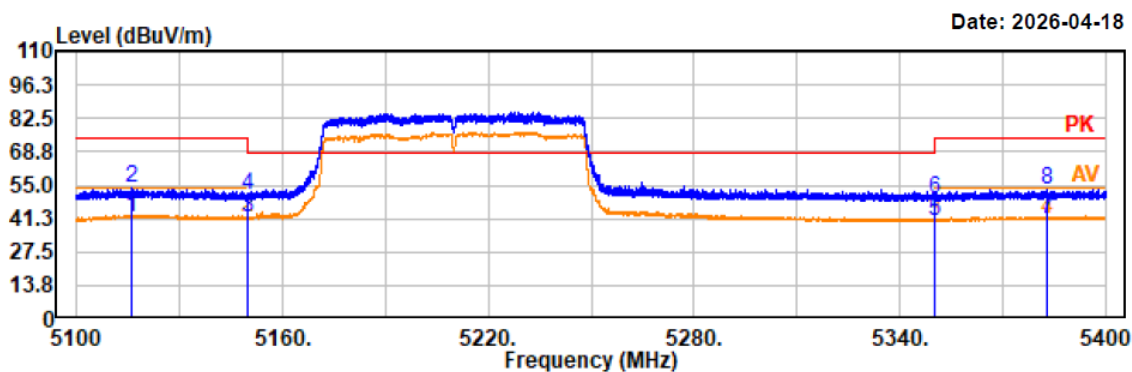

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5116.11	36.50	5.10	41.60	54.00	12.40	horizontal	Average
5116.11	48.59	5.10	53.69	74.00	20.31	horizontal	Peak
5150.00	36.50	5.16	41.66	54.00	12.34	horizontal	Average
5150.00	45.46	5.16	50.62	74.00	23.38	horizontal	Peak
5350.00	34.89	5.49	40.38	54.00	13.62	horizontal	Average
5350.00	44.03	5.49	49.52	74.00	24.48	horizontal	Peak
5382.69	35.59	5.55	41.14	54.00	12.86	horizontal	Average
5382.69	47.60	5.55	53.15	74.00	20.85	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5210MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

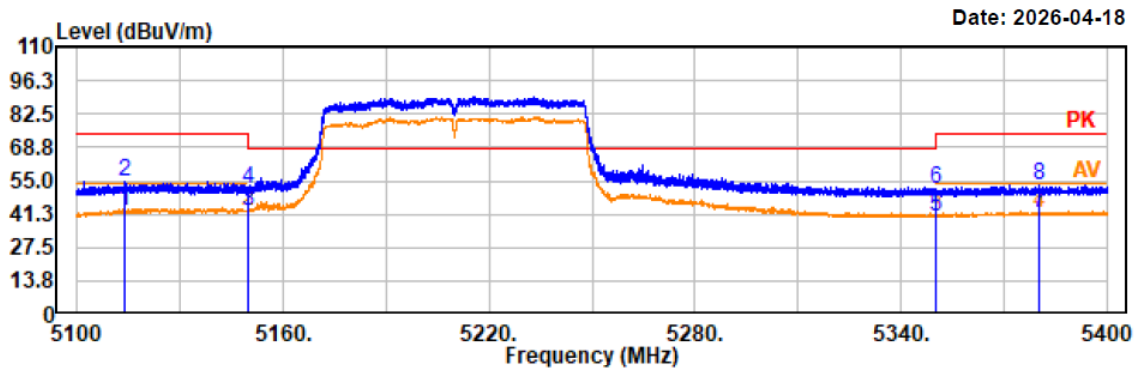


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5113.89	37.04	5.10	42.14	54.00	11.86	vertical	Average
5113.89	49.22	5.10	54.32	74.00	19.68	vertical	Peak
5150.00	37.68	5.16	42.84	54.00	11.16	vertical	Average
5150.00	46.60	5.16	51.76	74.00	22.24	vertical	Peak
5350.00	34.87	5.49	40.36	54.00	13.64	vertical	Average
5350.00	45.78	5.49	51.27	74.00	22.73	vertical	Peak
5380.08	35.98	5.54	41.52	54.00	12.48	vertical	Average
5380.08	47.26	5.54	52.80	74.00	21.20	vertical	Peak

Band 2:

Project No.: 2607P42218E-RF
 Test Mode: 802.11a 5260MHz
 EUT Model: AXIUM DX8
 Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

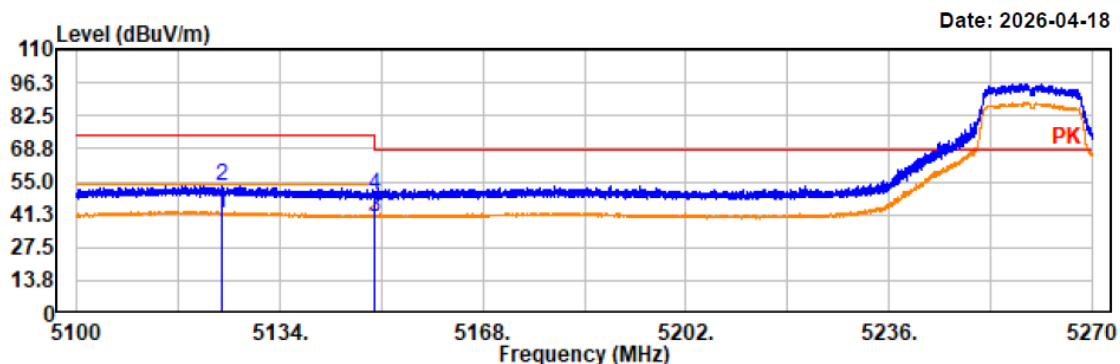


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5124.36	36.85	5.12	41.97	54.00	12.03	horizontal	Average
5124.36	48.29	5.12	53.41	74.00	20.59	horizontal	Peak
5149.99	35.05	5.16	40.21	54.00	13.79	horizontal	Average
5149.99	43.89	5.16	49.05	74.00	24.95	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5260MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

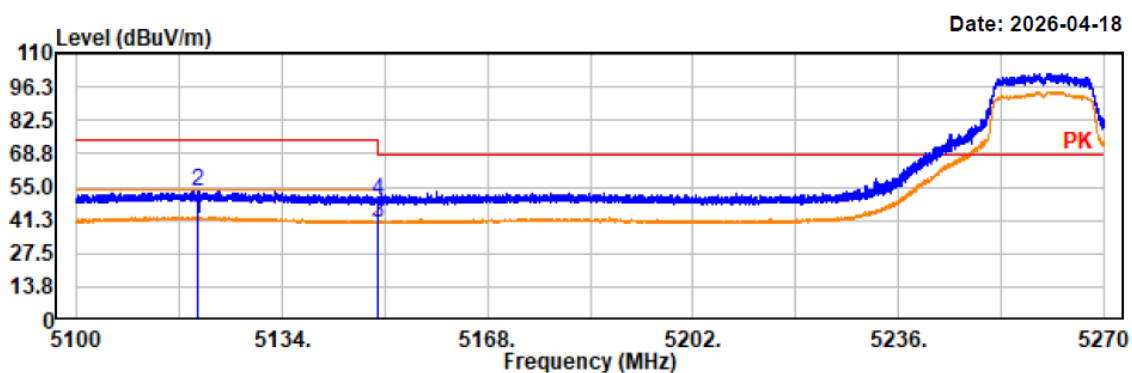


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5120.06	36.60	5.11	41.71	54.00	12.29	vertical	Average
5120.06	48.31	5.11	53.42	74.00	20.58	vertical	Peak
5150.00	35.34	5.16	40.50	54.00	13.50	vertical	Average
5150.00	43.95	5.16	49.11	74.00	24.89	vertical	Peak

Project No.: 2607P42218E-RF
 Test Mode: 802.11a 5320MHz
 EUT Model: AXIUM DX8
 Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

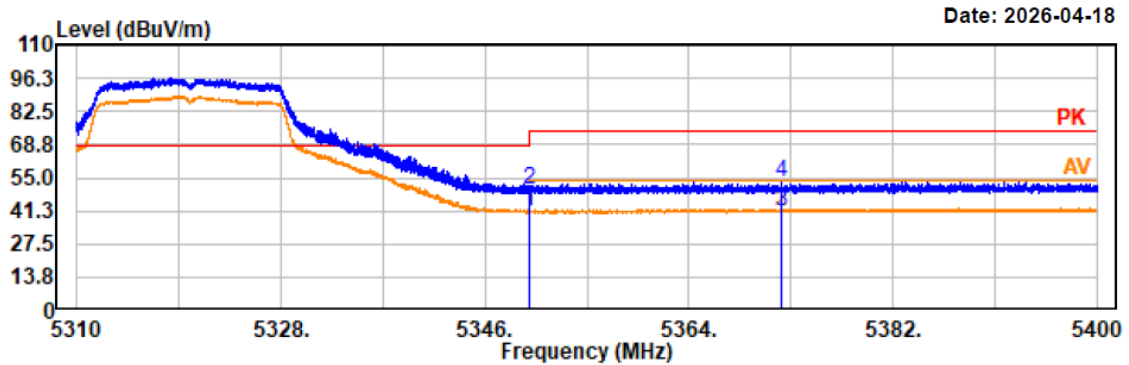


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	35.60	5.49	41.09	54.00	12.91	horizontal	Average
5350.00	44.28	5.49	49.77	74.00	24.23	horizontal	Peak
5372.18	35.75	5.52	41.27	54.00	12.73	horizontal	Average
5372.18	47.56	5.52	53.08	74.00	20.92	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5320MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

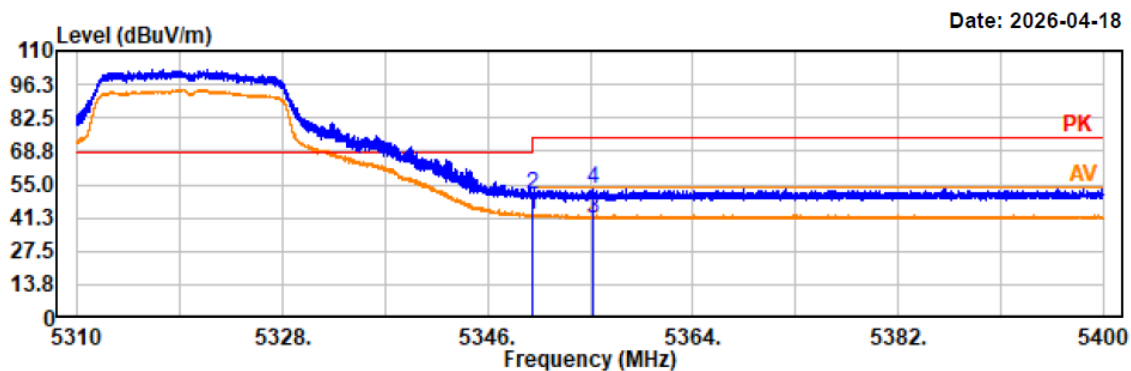


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	36.98	5.49	42.47	54.00	11.53	vertical	Average
5350.01	45.12	5.49	50.61	74.00	23.39	vertical	Peak
5355.24	35.66	5.49	41.15	54.00	12.85	vertical	Average
5355.24	47.44	5.49	52.93	74.00	21.07	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5260MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

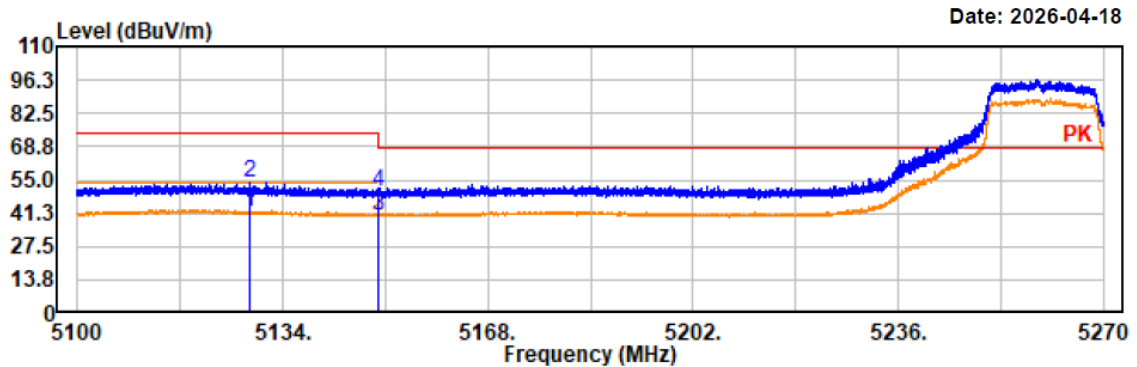


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5128.44	36.30	5.13	41.43	54.00	12.57	horizontal	Average
5128.44	48.60	5.13	53.73	74.00	20.27	horizontal	Peak
5149.99	34.86	5.16	40.02	54.00	13.98	horizontal	Average
5149.99	44.94	5.16	50.10	74.00	23.90	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5260MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

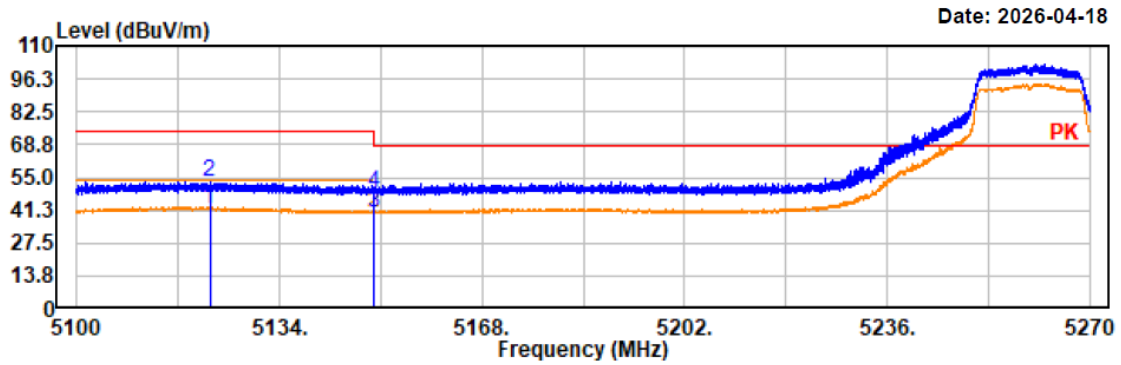


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5122.32	36.59	5.11	41.70	54.00	12.30	vertical	Average
5122.32	48.11	5.11	53.22	74.00	20.78	vertical	Peak
5150.00	35.31	5.16	40.47	54.00	13.53	vertical	Average
5150.00	43.70	5.16	48.86	74.00	25.14	vertical	Peak

Project No.: 2607P42218E-RF
 Test Mode: 802.11n20 5320MHz
 EUT Model: AXIUM DX8
 Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

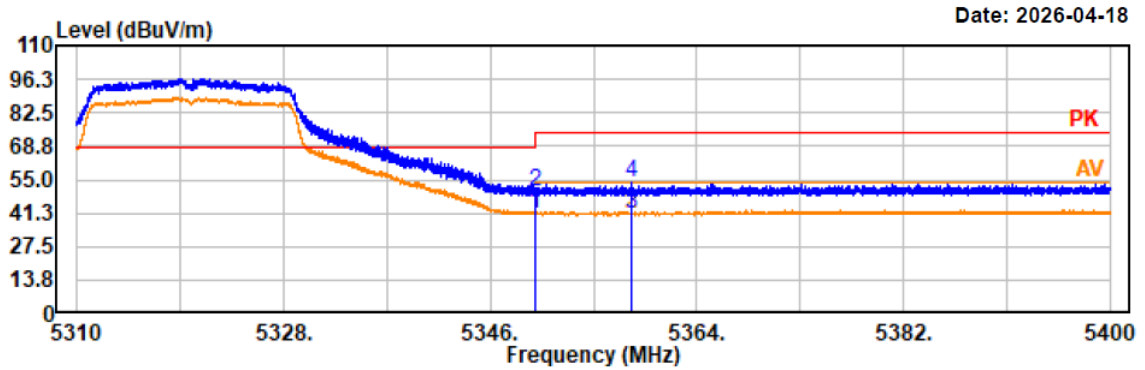


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	35.80	5.49	41.29	54.00	12.71	horizontal	Average
5350.01	44.58	5.49	50.07	74.00	23.93	horizontal	Peak
5358.31	35.65	5.50	41.15	54.00	12.85	horizontal	Average
5358.31	48.02	5.50	53.52	74.00	20.48	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5320MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

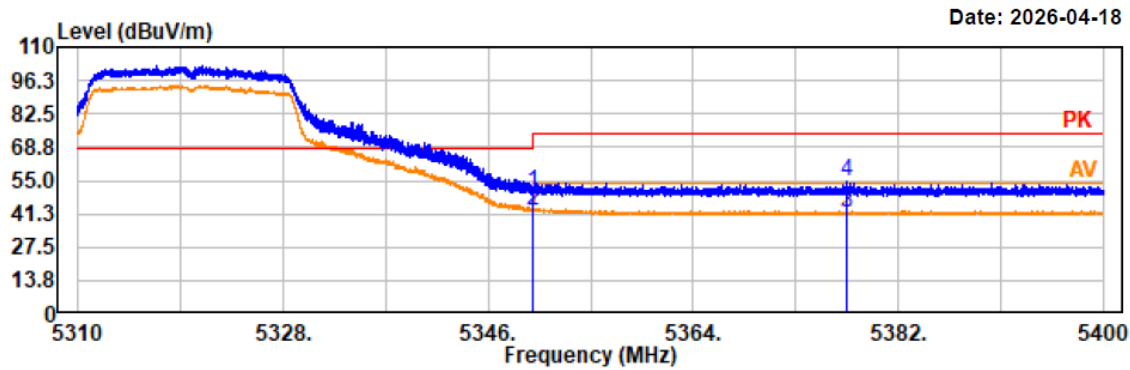


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	44.35	5.49	49.84	74.00	24.16	vertical	Peak
5350.01	37.33	5.49	42.82	54.00	11.18	vertical	Average
5377.55	35.96	5.54	41.50	54.00	12.50	vertical	Average
5377.55	49.45	5.54	54.99	74.00	19.01	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5270MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

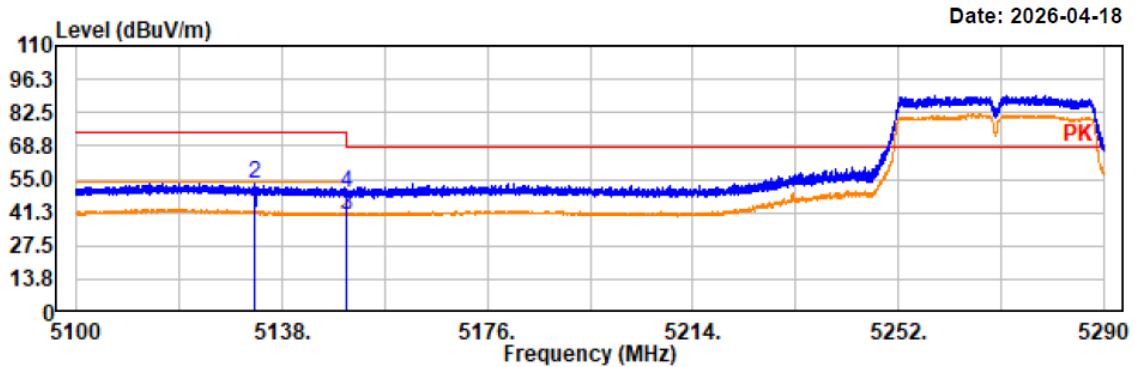


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5132.95	35.85	5.14	40.99	54.00	13.01	horizontal	Average
5132.95	48.05	5.14	53.19	74.00	20.81	horizontal	Peak
5149.99	35.10	5.16	40.26	54.00	13.74	horizontal	Average
5149.99	44.04	5.16	49.20	74.00	24.80	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5270MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

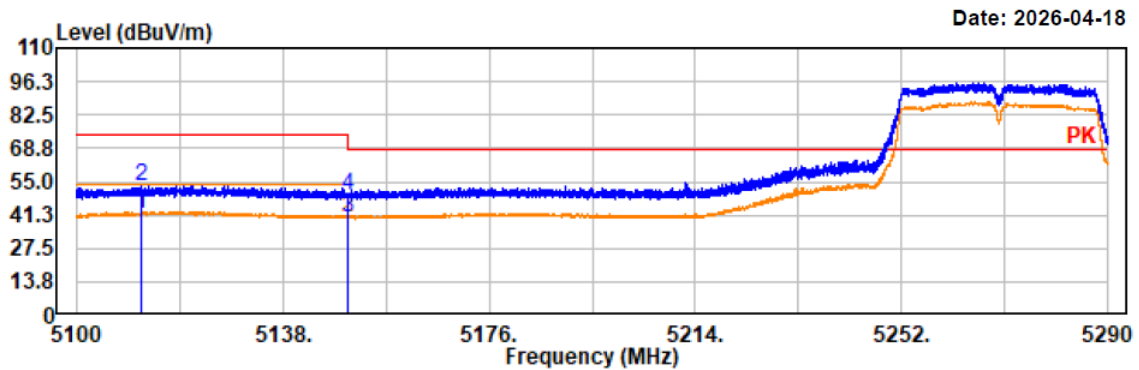


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5111.89	36.56	5.09	41.65	54.00	12.35	vertical	Average
5111.89	48.08	5.09	53.17	74.00	20.83	vertical	Peak
5149.99	34.94	5.16	40.10	54.00	13.90	vertical	Average
5149.99	44.10	5.16	49.26	74.00	24.74	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5310MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

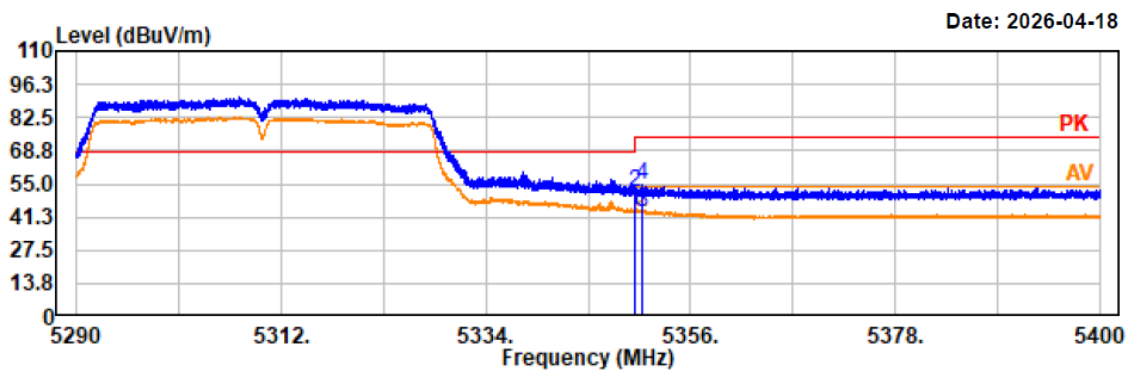


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	38.32	5.49	43.81	54.00	10.19	horizontal	Average
5350.00	46.37	5.49	51.86	74.00	22.14	horizontal	Peak
5350.79	37.58	5.49	43.07	54.00	10.93	horizontal	Average
5350.79	49.15	5.49	54.64	74.00	19.36	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5310MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

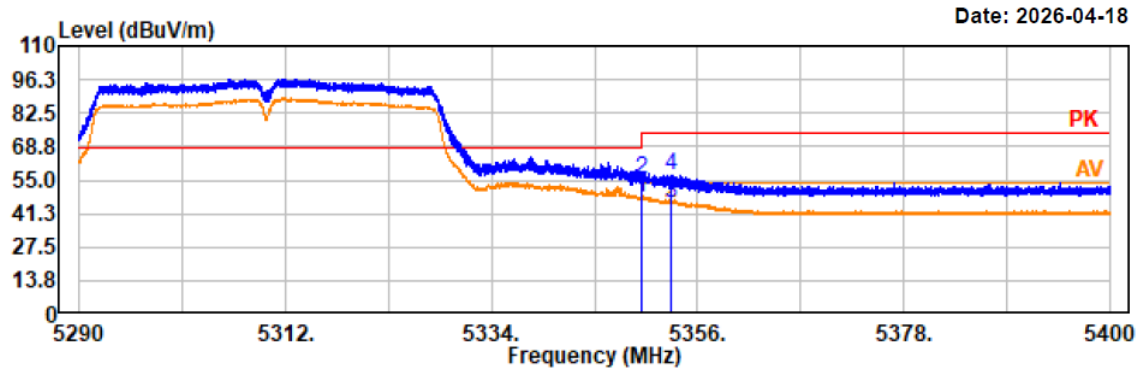


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.01	42.49	5.49	47.98	54.00	6.02	vertical	Average
5350.01	50.16	5.49	55.65	74.00	18.35	vertical	Peak
5353.23	40.23	5.50	45.73	54.00	8.27	vertical	Average
5353.23	51.65	5.50	57.15	74.00	16.85	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5290MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

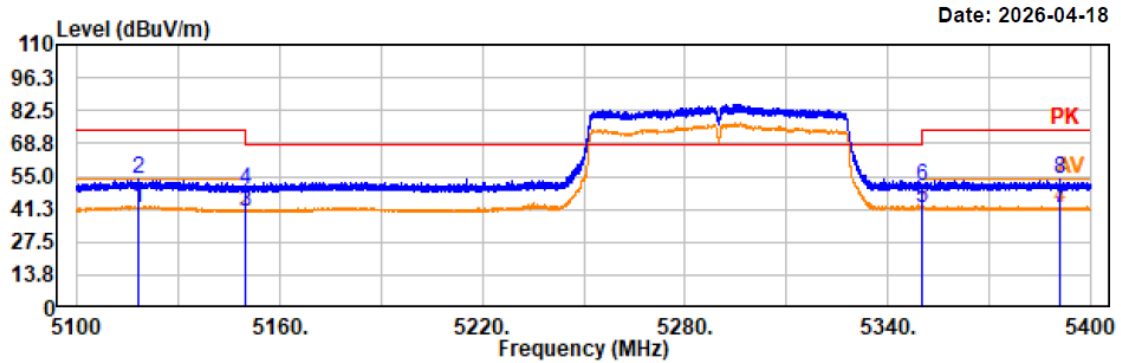


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5117.97	36.85	5.11	41.96	54.00	12.04	horizontal	Average
5117.97	48.54	5.11	53.65	74.00	20.35	horizontal	Peak
5149.98	34.97	5.16	40.13	54.00	13.87	horizontal	Average
5149.99	44.47	5.16	49.63	74.00	24.37	horizontal	Peak
5350.00	36.21	5.49	41.70	54.00	12.30	horizontal	Average
5350.00	45.18	5.49	50.67	74.00	23.33	horizontal	Peak
5390.79	35.83	5.56	41.39	54.00	12.61	horizontal	Average
5390.79	48.43	5.56	53.99	74.00	20.01	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5290MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

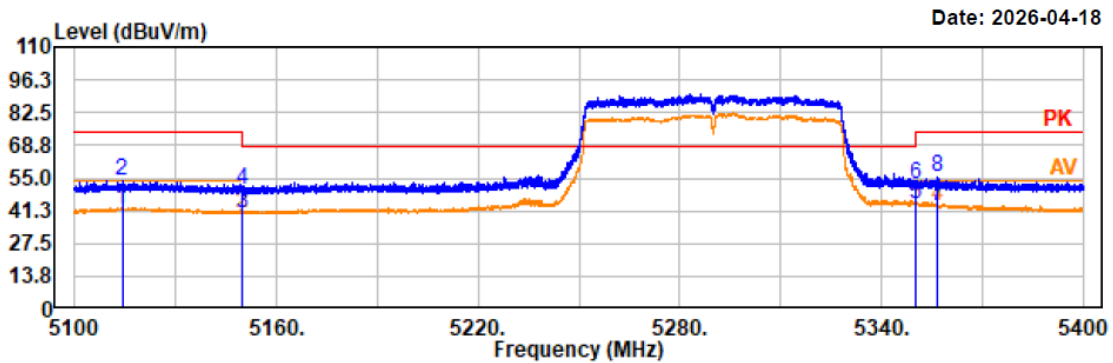

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto


AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5114.16	36.52	5.10	41.62	54.00	12.38	vertical	Average
5114.16	48.74	5.10	53.84	74.00	20.16	vertical	Peak
5149.99	35.07	5.16	40.23	54.00	13.77	vertical	Average
5149.99	44.60	5.16	49.76	74.00	24.24	vertical	Peak
5350.00	38.23	5.49	43.72	54.00	10.28	vertical	Average
5350.00	46.99	5.49	52.48	74.00	21.52	vertical	Peak
5356.56	37.62	5.49	43.11	54.00	10.89	vertical	Average
5356.56	50.14	5.49	55.63	74.00	18.37	vertical	Peak

Band 3:

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5500MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

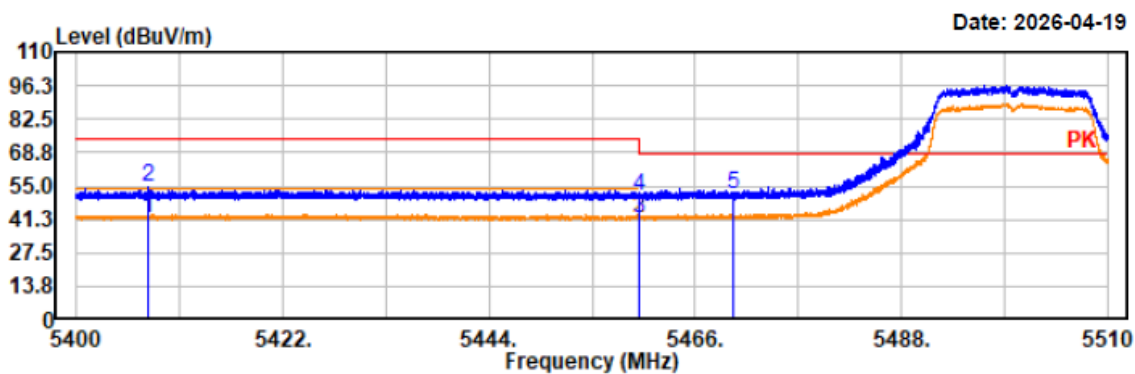

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5407.57	36.02	5.59	41.61	54.00	12.39	horizontal	Average
5407.57	49.20	5.59	54.79	74.00	19.21	horizontal	Peak
5460.00	36.23	5.65	41.88	54.00	12.12	horizontal	Average
5460.00	44.95	5.65	50.60	74.00	23.40	horizontal	Peak
5470.00	46.03	5.65	51.68	68.20	16.52	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5500MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

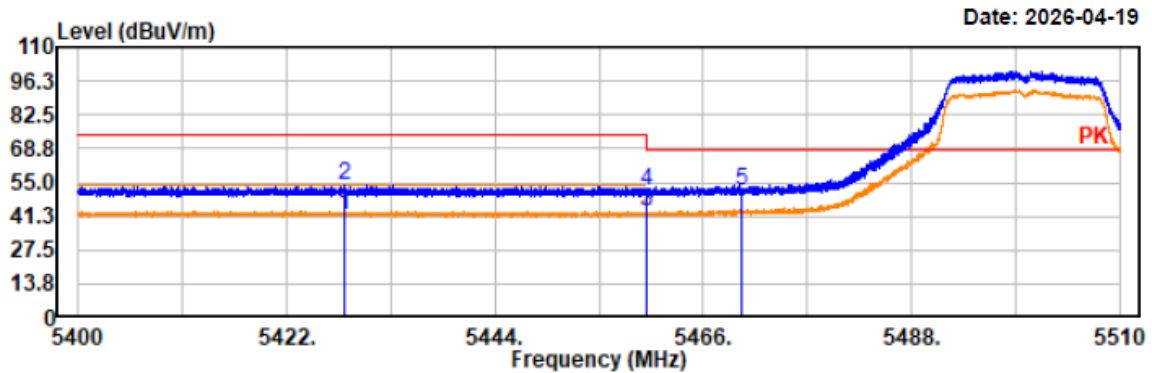


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5428.05	36.42	5.63	42.05	54.00	11.95	vertical	Average
5428.05	48.59	5.63	54.22	74.00	19.78	vertical	Peak
5460.00	37.46	5.65	43.11	54.00	10.89	vertical	Average
5460.00	45.77	5.65	51.42	74.00	22.58	vertical	Peak
5470.00	45.81	5.65	51.46	68.20	16.74	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5700MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

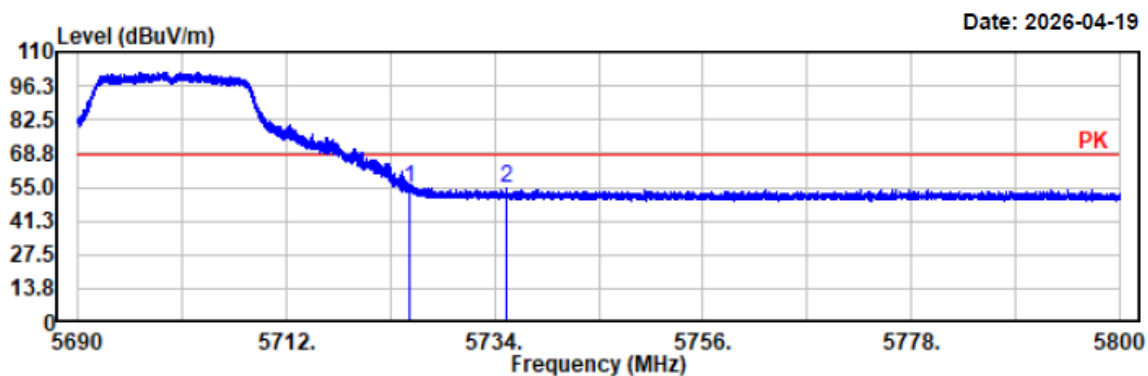


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	48.59	6.05	54.64	68.20	13.56	horizontal	Peak
5735.22	48.72	6.06	54.78	68.20	13.42	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5700MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

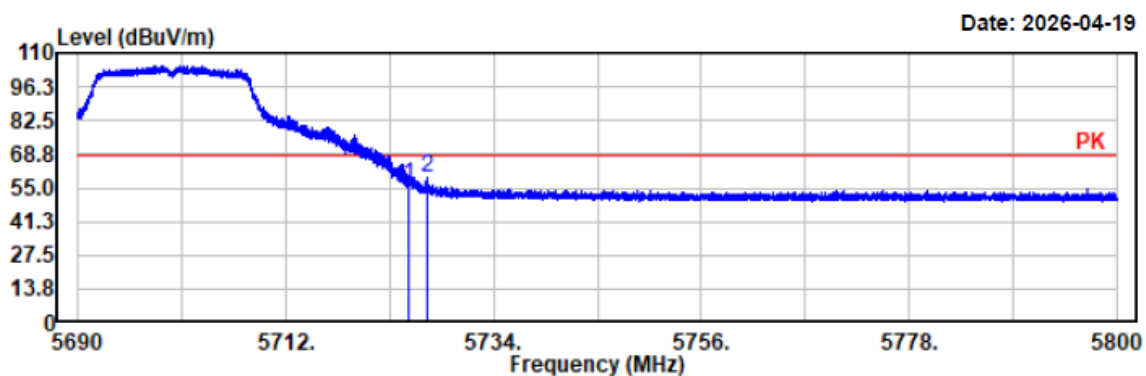


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	50.04	6.05	56.09	68.20	12.11	vertical	Peak
5727.06	52.87	6.05	58.92	68.20	9.28	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5500MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

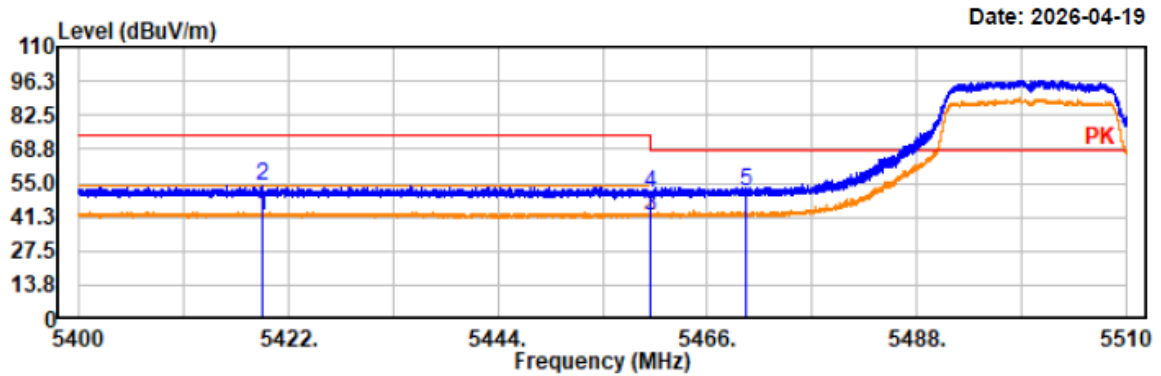

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5419.22	36.10	5.61	41.71	54.00	12.29	horizontal	Average
5419.22	48.51	5.61	54.12	74.00	19.88	horizontal	Peak
5460.00	36.31	5.65	41.96	54.00	12.04	horizontal	Average
5460.00	45.48	5.65	51.13	74.00	22.87	horizontal	Peak
5470.00	45.68	5.65	51.33	68.20	16.87	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5500MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

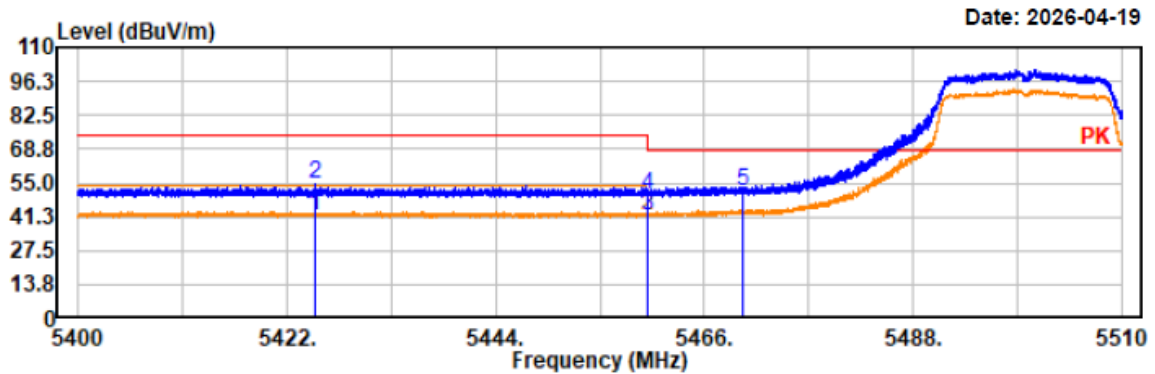

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5425.06	36.38	5.62	42.00	54.00	12.00	vertical	Average
5425.06	48.78	5.62	54.40	74.00	19.60	vertical	Peak
5460.00	35.85	5.65	41.50	54.00	12.50	vertical	Average
5460.00	44.47	5.65	50.12	74.00	23.88	vertical	Peak
5470.00	45.71	5.65	51.36	68.20	16.84	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5700MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

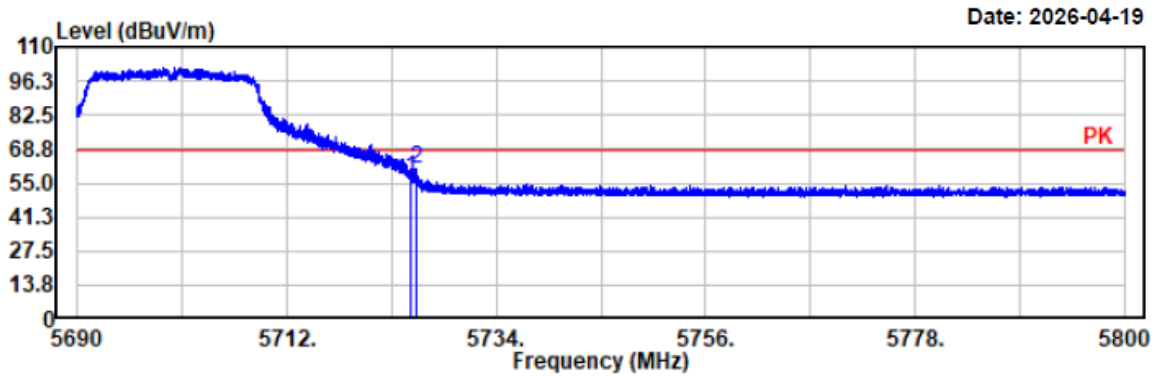


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	50.59	6.05	56.64	68.20	11.56	horizontal	Peak
5725.61	54.89	6.05	60.94	68.20	7.26	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5700MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

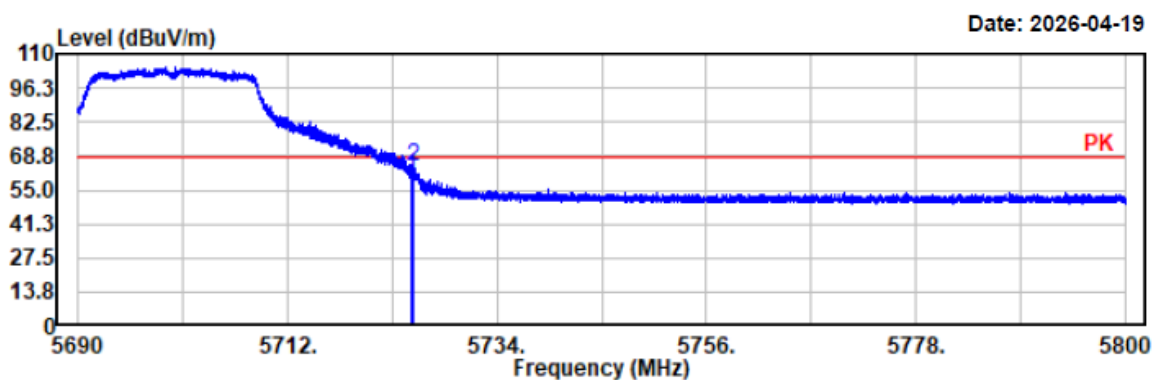


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	53.70	6.05	59.75	68.20	8.45	vertical	Peak
5725.23	58.28	6.05	64.33	68.20	3.87	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5510MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

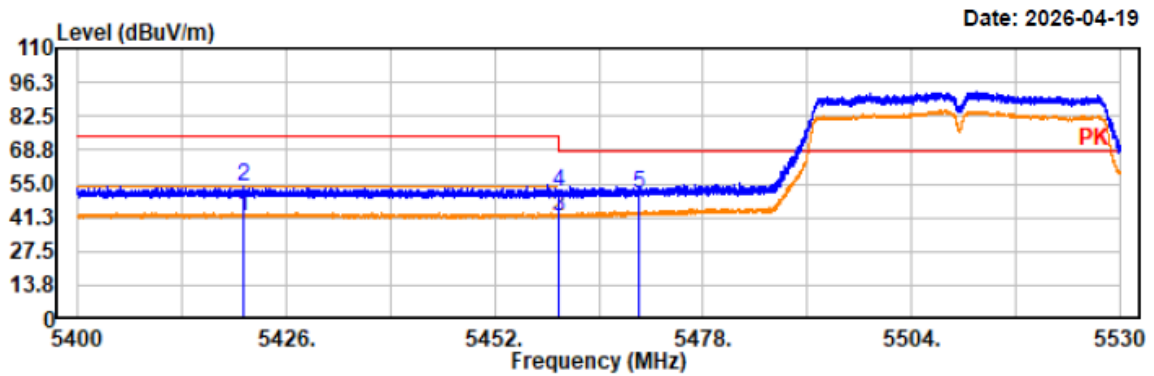

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5420.63	36.45	5.61	42.06	54.00	11.94	horizontal	Average
5420.63	47.97	5.61	53.58	74.00	20.42	horizontal	Peak
5460.00	36.30	5.65	41.95	54.00	12.05	horizontal	Average
5460.00	46.28	5.65	51.93	74.00	22.07	horizontal	Peak
5470.01	45.38	5.65	51.03	68.20	17.17	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5510MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

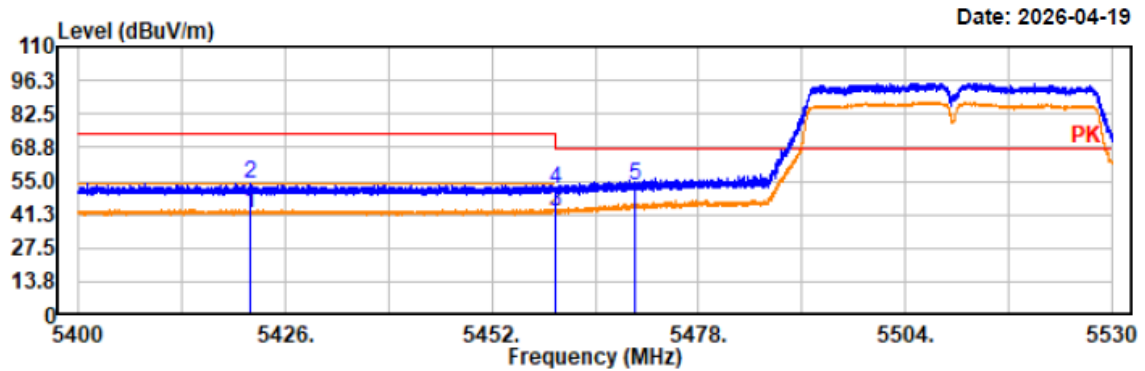


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5421.59	36.04	5.61	41.65	54.00	12.35	vertical	Average
5421.59	47.93	5.61	53.54	74.00	20.46	vertical	Peak
5460.00	36.50	5.65	42.15	54.00	11.85	vertical	Average
5460.00	46.25	5.65	51.90	74.00	22.10	vertical	Peak
5470.01	47.36	5.65	53.01	68.20	15.19	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5670MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

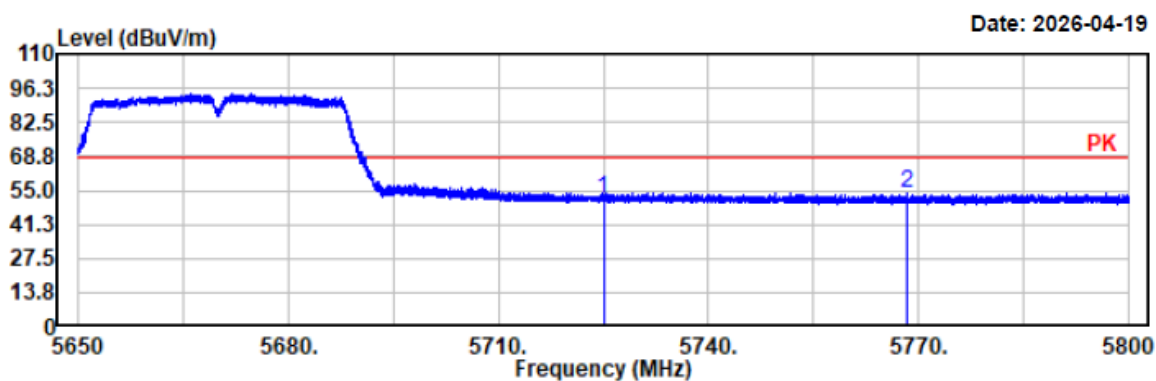


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	45.41	6.05	51.46	68.20	16.74	horizontal	Peak
5768.37	47.53	6.11	53.64	68.20	14.56	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n40 5670MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

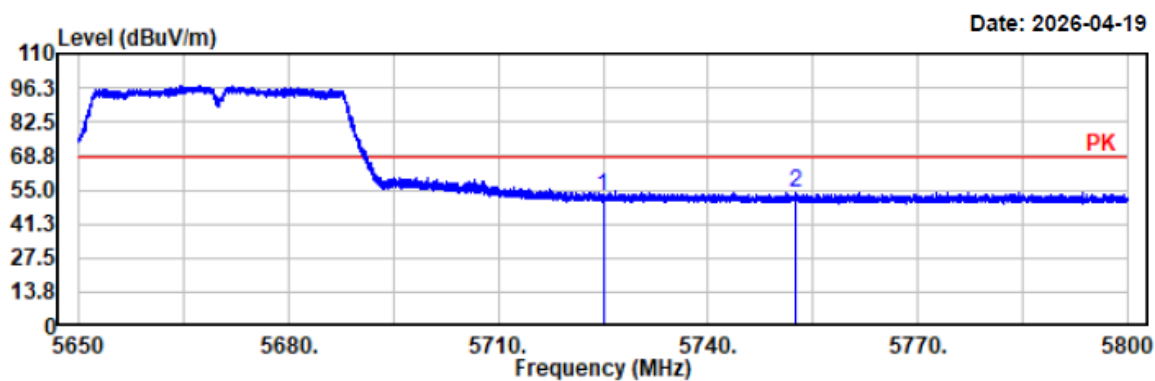


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	46.07	6.05	52.12	68.20	16.08	vertical	Peak
5752.53	47.79	6.07	53.86	68.20	14.34	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5530MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

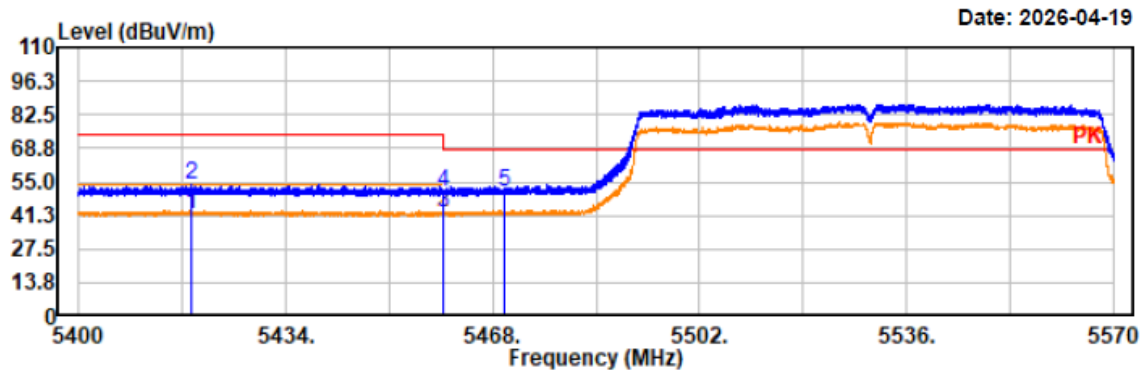


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5418.38	36.33	5.61	41.94	54.00	12.06	horizontal	Average
5418.38	48.39	5.61	54.00	74.00	20.00	horizontal	Peak
5460.00	36.57	5.65	42.22	54.00	11.78	horizontal	Average
5460.00	44.94	5.65	50.59	74.00	23.41	horizontal	Peak
5470.01	45.53	5.65	51.18	68.20	17.02	horizontal	Peak

Project No.: 2607P42218E-RF
 Test Mode: 802.11ac80 5530MHz
 EUT Model: AXIUM DX8
 Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

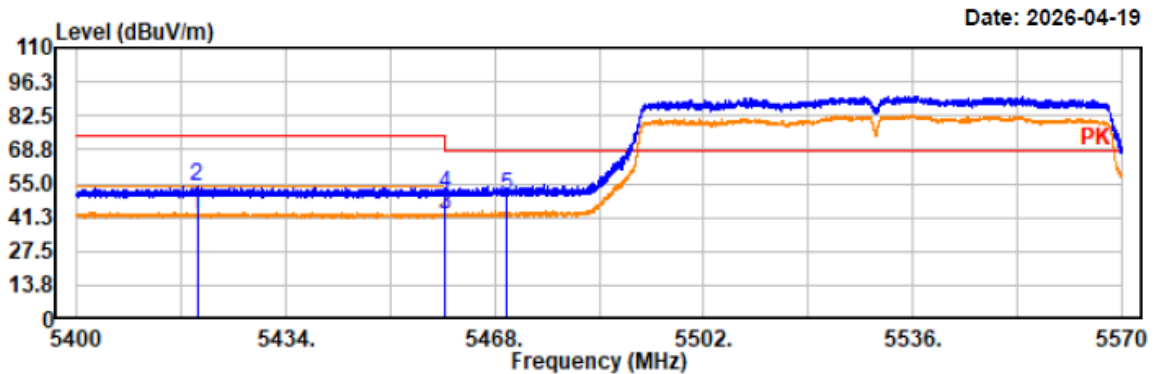


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5419.58	36.50	5.61	42.11	54.00	11.89	vertical	Average
5419.58	47.93	5.61	53.54	74.00	20.46	vertical	Peak
5460.00	36.66	5.65	42.31	54.00	11.69	vertical	Average
5460.00	45.15	5.65	50.80	74.00	23.20	vertical	Peak
5470.01	44.74	5.65	50.39	68.20	17.81	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5610MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

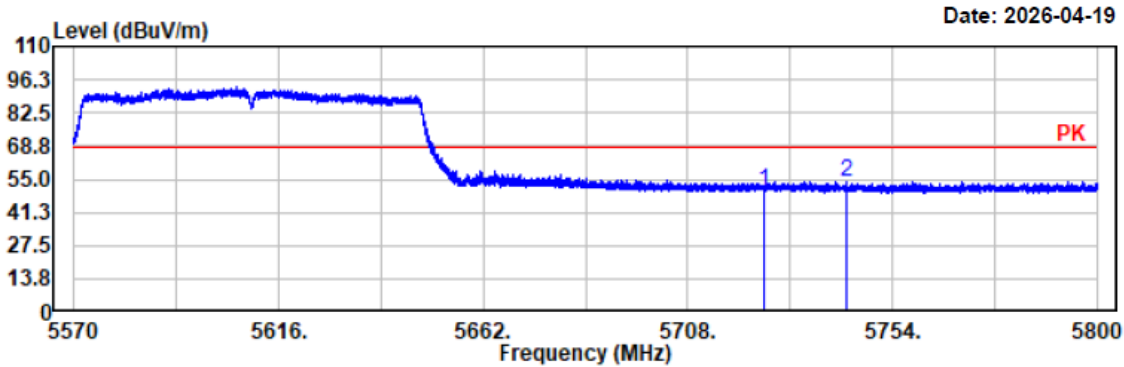


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	44.35	6.05	50.40	68.20	17.80	horizontal	Peak
5743.54	48.10	6.06	54.16	68.20	14.04	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11ac80 5610MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

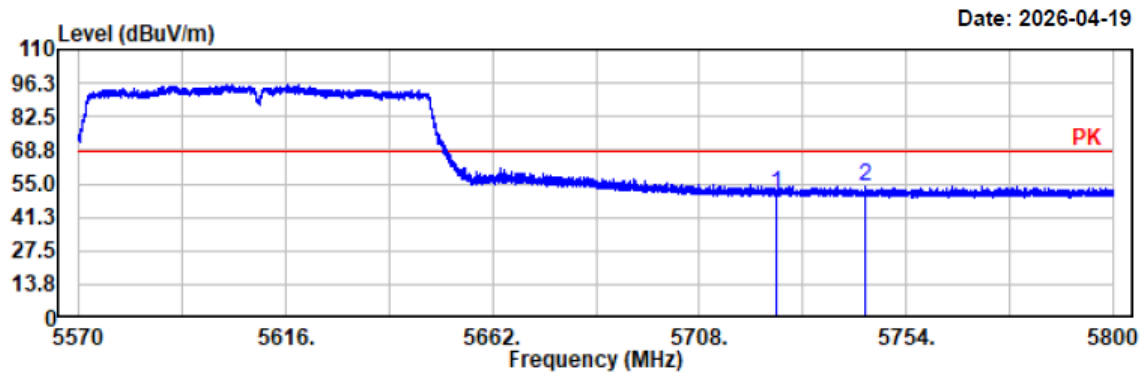


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	44.86	6.05	50.91	68.20	17.29	vertical	Peak
5745.01	48.01	6.06	54.07	68.20	14.13	vertical	Peak

Band 4:

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5745MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

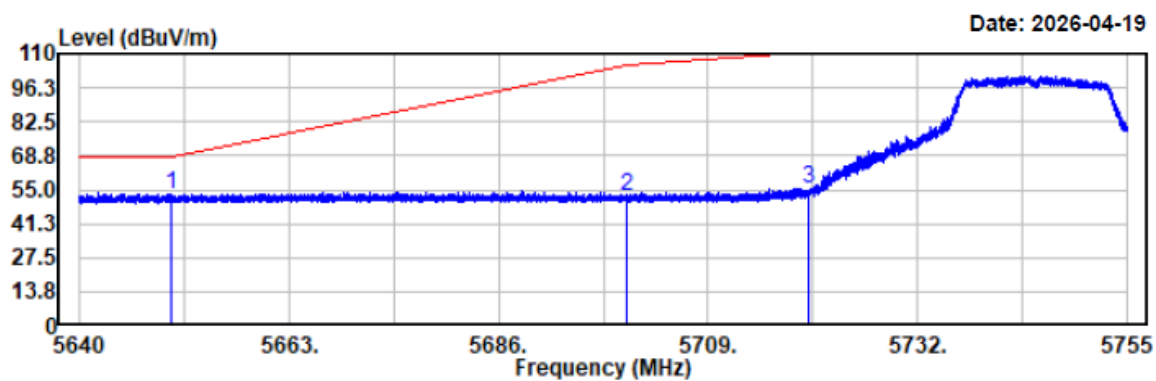


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5650.01	47.26	5.91	53.17	68.20	15.03	horizontal	Peak
5700.00	45.99	6.04	52.03	105.20	53.17	horizontal	Peak
5720.00	49.48	6.05	55.53	110.80	55.27	horizontal	Peak

Project No.: 2607P42218E-RF
 Test Mode: 802.11a 5745MHz
 EUT Model: AXIUM DX8
 Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

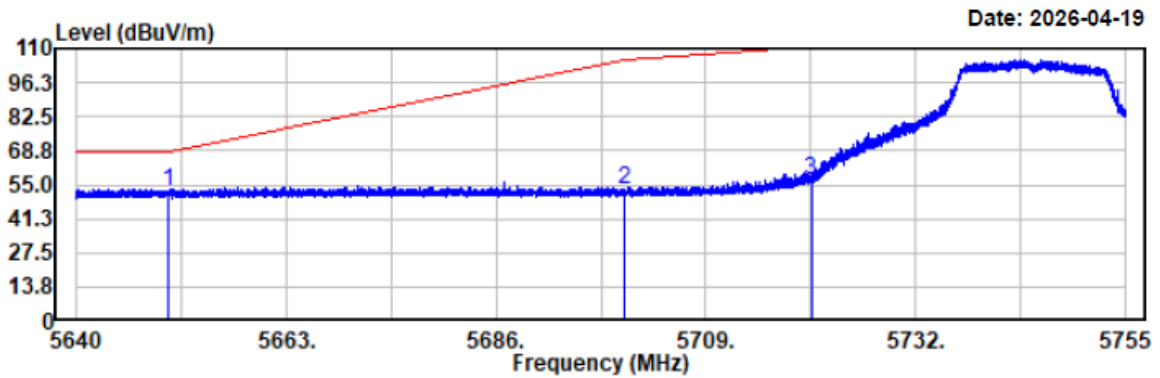


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5650.01	46.34	5.91	52.25	68.20	15.95	vertical	Peak
5700.00	47.36	6.04	53.40	105.20	51.80	vertical	Peak
5720.56	50.76	6.05	56.81	112.07	55.26	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5825MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

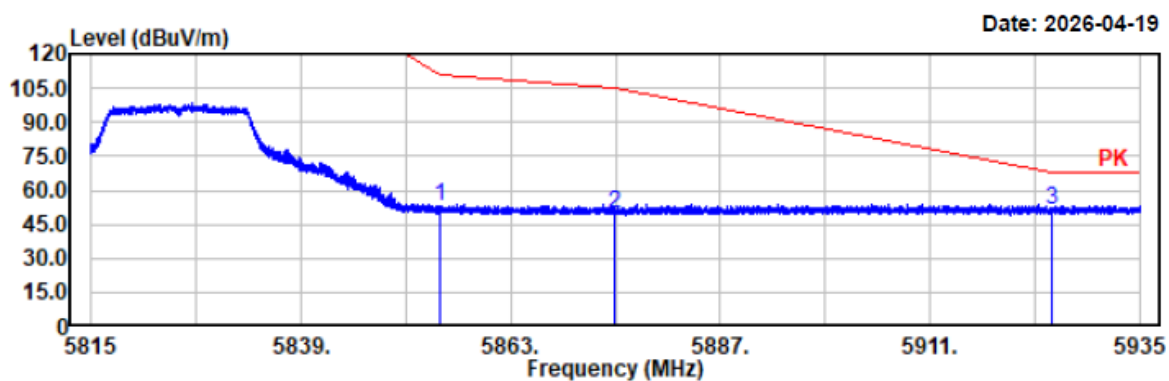


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5855.00	47.13	6.21	53.34	110.80	57.46	horizontal	Peak
5875.00	43.82	6.23	50.05	105.20	55.15	horizontal	Peak
5925.00	44.60	6.30	50.90	68.20	17.30	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11a 5825MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

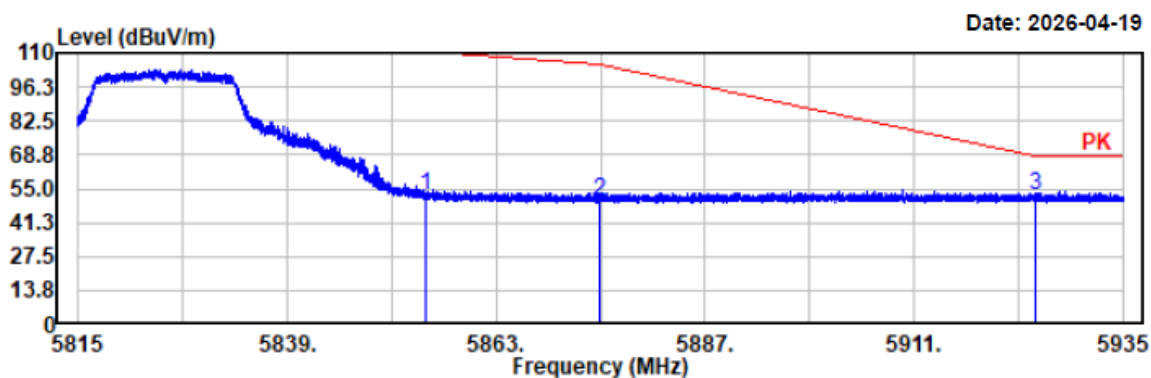


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5855.00	46.47	6.21	52.68	110.81	58.13	vertical	Peak
5875.00	44.03	6.23	50.26	105.20	54.94	vertical	Peak
5925.00	45.93	6.30	52.23	68.20	15.97	vertical	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5745MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

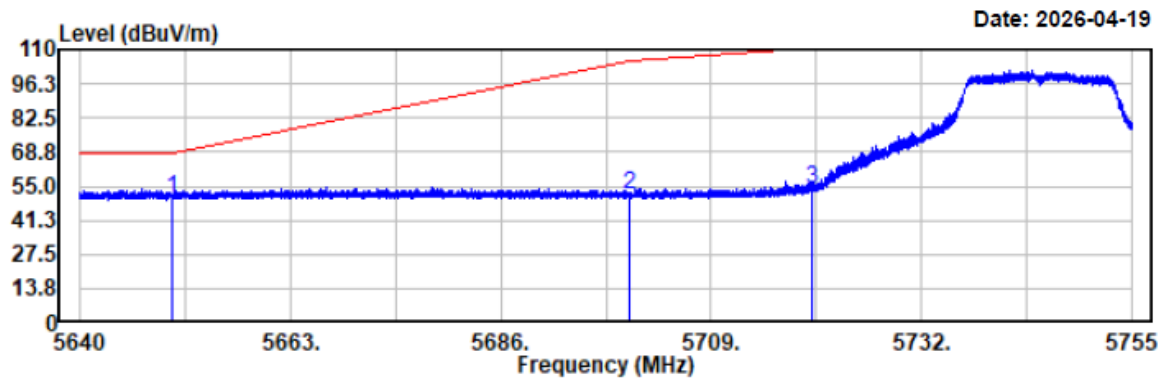


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5650.01	44.29	5.91	50.20	68.20	18.00	horizontal	Peak
5700.00	45.80	6.04	51.84	105.20	53.36	horizontal	Peak
5720.00	48.07	6.05	54.12	110.80	56.68	horizontal	Peak

Project No.: 2607P42218E-RF
Test Mode: 802.11n20 5745MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.8°C/58%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

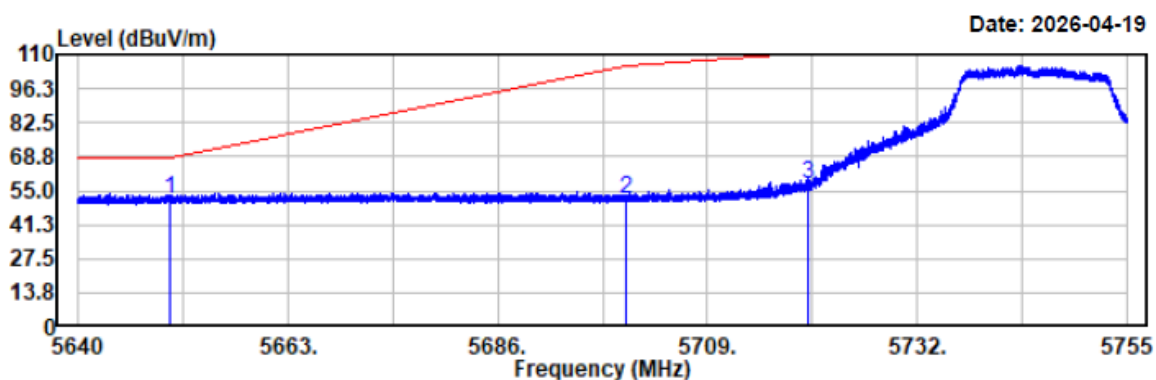

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5650.01	45.51	5.91	51.42	68.20	16.78	vertical	Peak
5700.00	45.84	6.04	51.88	105.20	53.32	vertical	Peak
5720.01	51.71	6.05	57.76	110.81	53.05	vertical	Peak