


Project No.: 2607P41361E-RF
Test Mode: 802.11a 5200MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

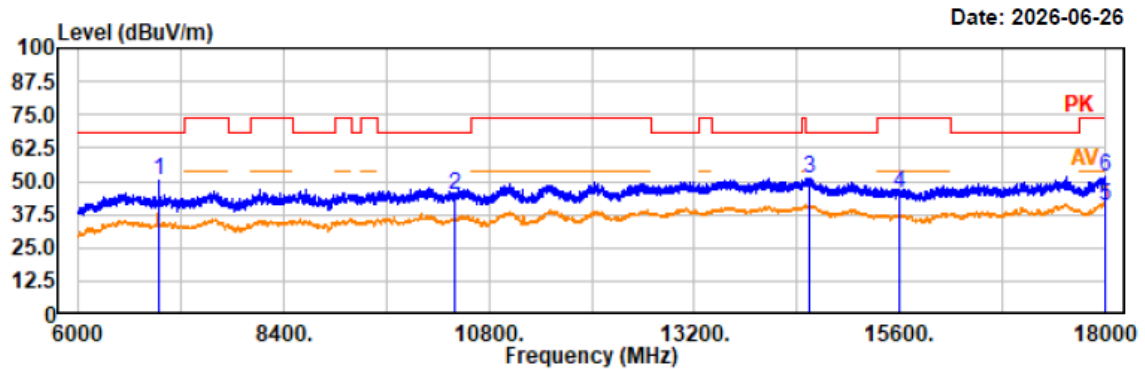


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
6933.60	52.95	-2.78	50.17	68.20	18.03	horizontal	Peak
10400.00	43.49	1.65	45.14	68.20	23.06	horizontal	Peak
14554.80	46.12	5.09	51.21	68.20	16.99	horizontal	Peak
15600.00	42.88	2.36	45.24	74.00	28.76	horizontal	Peak
17996.40	33.61	6.84	40.45	54.00	13.55	horizontal	Average
17996.40	44.79	6.84	51.63	74.00	22.37	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5200MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

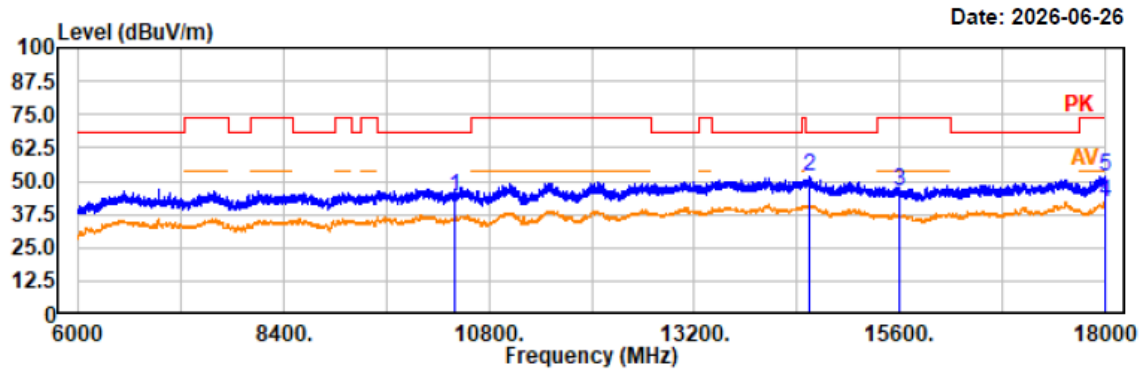

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	42.43	1.65	44.08	68.20	24.12	vertical	Peak
14548.80	46.47	5.10	51.57	68.20	16.63	vertical	Peak
15600.00	43.88	2.36	46.24	74.00	27.76	vertical	Peak
17995.20	35.32	6.84	42.16	54.00	11.84	vertical	Average
17995.20	44.59	6.84	51.43	74.00	22.57	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5240MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

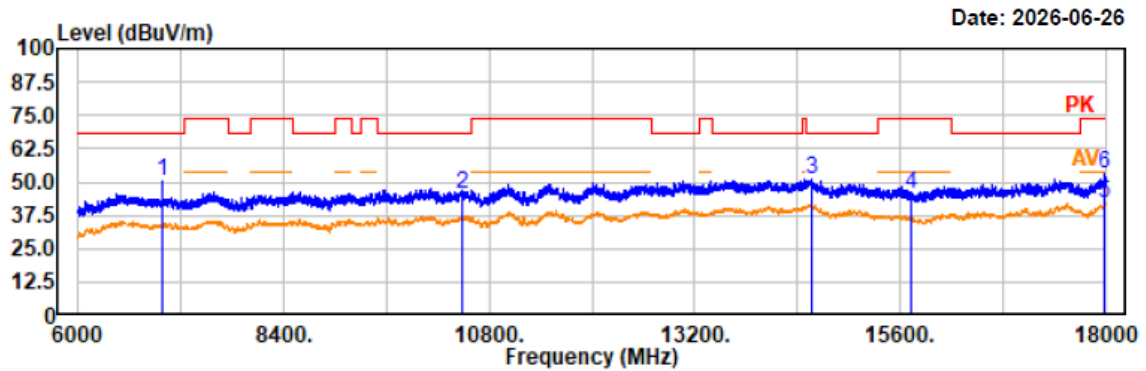

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
6986.40	53.19	-2.85	50.34	68.20	17.86	horizontal	Peak
10480.00	44.10	1.66	45.76	68.20	22.44	horizontal	Peak
14577.60	45.69	5.06	50.75	68.20	17.45	horizontal	Peak
15720.00	43.39	2.18	45.57	74.00	28.43	horizontal	Peak
17991.60	35.03	6.83	41.86	54.00	12.14	horizontal	Average
17991.60	46.44	6.83	53.27	74.00	20.73	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5240MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

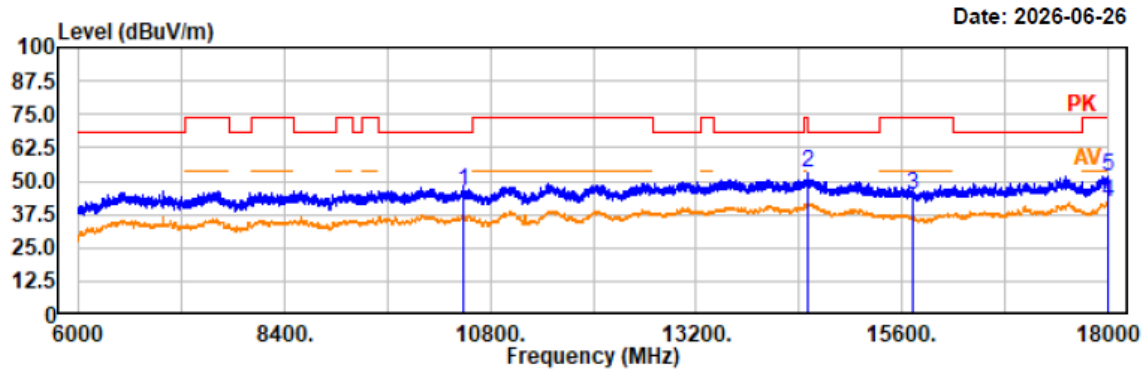


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10480.00	44.33	1.66	45.99	68.20	22.21	vertical	Peak
14498.40	47.61	5.16	52.77	74.00	21.23	vertical	Peak
15720.00	42.74	2.18	44.92	74.00	29.08	vertical	Peak
17995.20	35.49	6.84	42.33	54.00	11.67	vertical	Average
17995.20	45.03	6.84	51.87	74.00	22.13	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5180MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

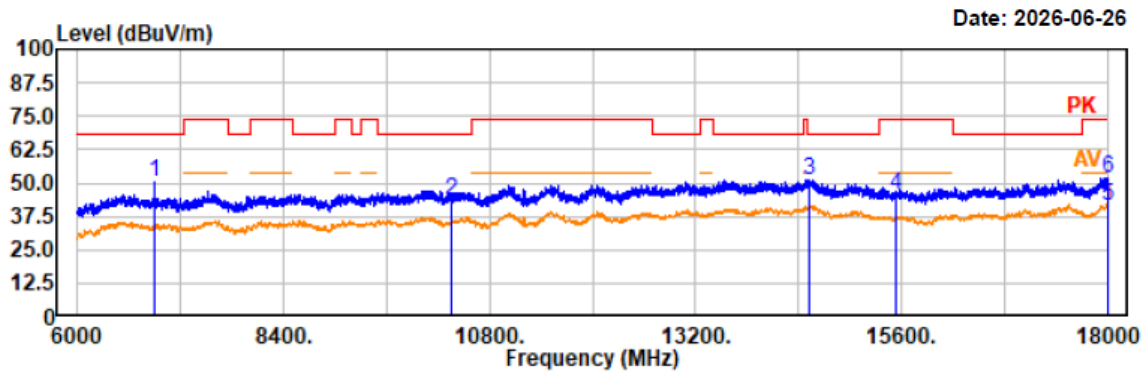

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
6907.20	52.86	-2.77	50.09	68.20	18.11	horizontal	Peak
10360.00	41.74	1.60	43.34	68.20	24.86	horizontal	Peak
14528.40	46.24	5.12	51.36	68.20	16.84	horizontal	Peak
15540.00	42.96	2.48	45.44	74.00	28.56	horizontal	Peak
17994.00	34.82	6.83	41.65	54.00	12.35	horizontal	Average
17994.00	45.02	6.83	51.85	74.00	22.15	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5180MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

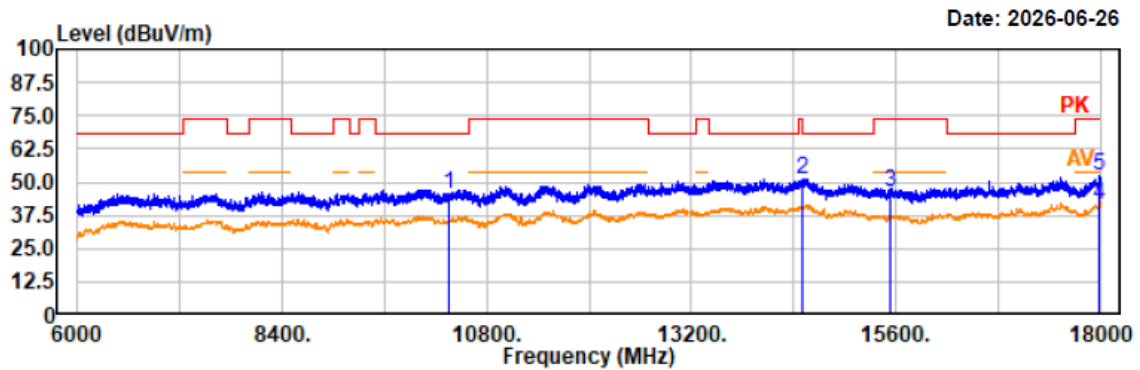


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.00	43.84	1.60	45.44	68.20	22.76	vertical	Peak
14502.00	46.09	5.16	51.25	68.20	16.95	vertical	Peak
15540.00	43.65	2.48	46.13	74.00	27.87	vertical	Peak
17992.80	34.70	6.83	41.53	54.00	12.47	vertical	Average
17992.80	45.65	6.83	52.48	74.00	21.52	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5200MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

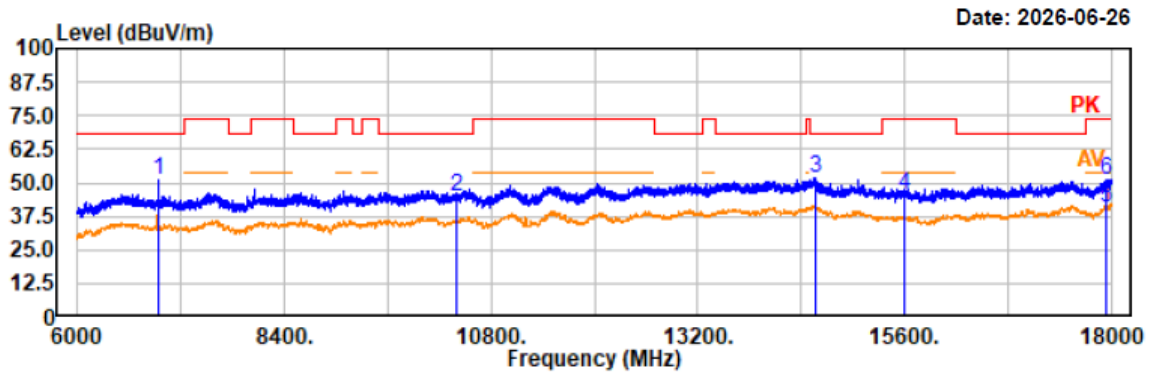

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
6933.60	54.13	-2.78	51.35	68.20	16.85	horizontal	Peak
10400.00	43.21	1.65	44.86	68.20	23.34	horizontal	Peak
14559.60	46.34	5.09	51.43	68.20	16.77	horizontal	Peak
15600.00	43.41	2.36	45.77	74.00	28.23	horizontal	Peak
17934.00	34.04	6.79	40.83	54.00	13.17	horizontal	Average
17934.00	44.39	6.79	51.18	74.00	22.82	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5200MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

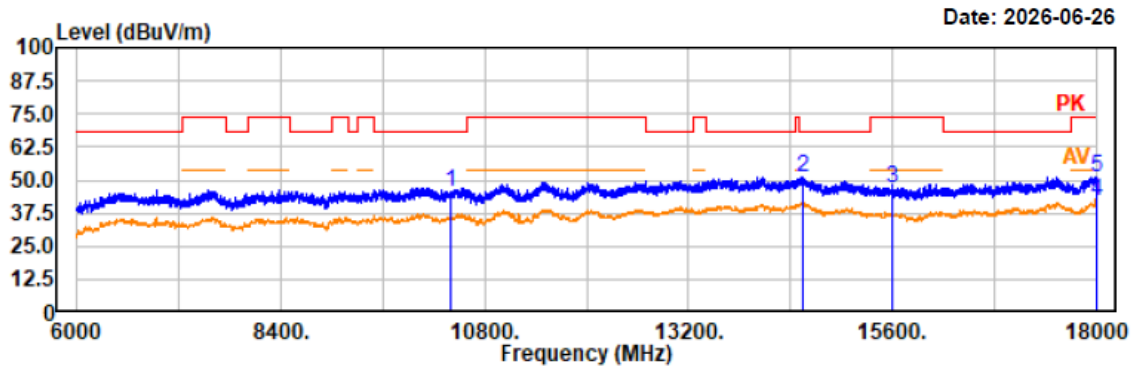


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	43.53	1.65	45.18	68.20	23.02	vertical	Peak
14545.20	46.02	5.10	51.12	68.20	17.08	vertical	Peak
15600.00	44.30	2.36	46.66	74.00	27.34	vertical	Peak
17994.00	35.36	6.83	42.19	54.00	11.81	vertical	Average
17994.00	44.51	6.83	51.34	74.00	22.66	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5240MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

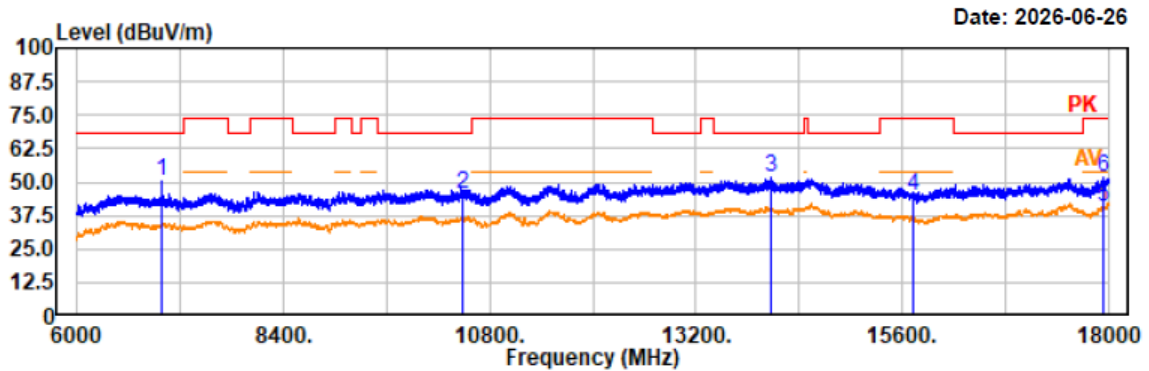


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
6986.40	53.29	-2.85	50.44	68.20	17.76	horizontal	Peak
10480.00	43.55	1.66	45.21	68.20	22.99	horizontal	Peak
14078.40	46.37	5.26	51.63	68.20	16.57	horizontal	Peak
15720.00	42.72	2.18	44.90	74.00	29.10	horizontal	Peak
17942.40	34.19	6.80	40.99	54.00	13.01	horizontal	Average
17942.40	45.26	6.80	52.06	74.00	21.94	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5240MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

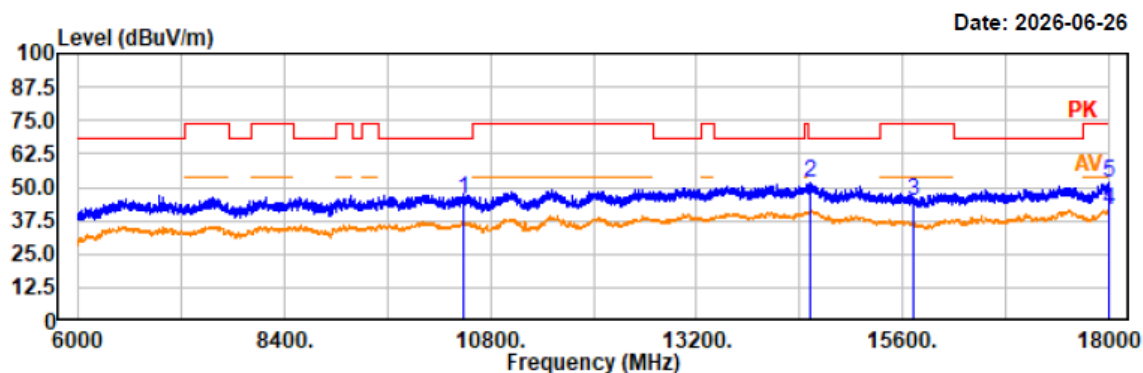

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10480.00	44.08	1.66	45.74	68.20	22.46	vertical	Peak
14530.80	46.31	5.12	51.43	68.20	16.77	vertical	Peak
15720.00	42.52	2.18	44.70	74.00	29.30	vertical	Peak
17994.00	34.89	6.83	41.72	54.00	12.28	vertical	Average
17994.00	44.91	6.83	51.74	74.00	22.26	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n40 5190MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

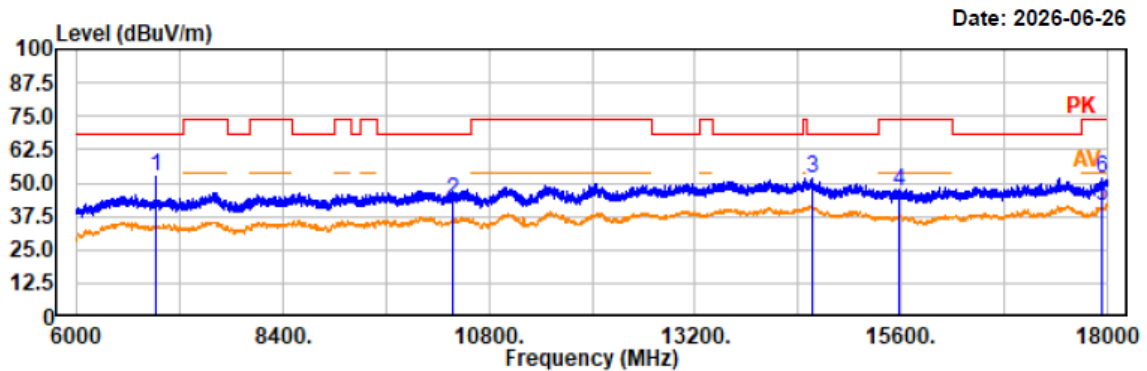


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
6919.20	55.25	-2.77	52.48	68.20	15.72	horizontal	Peak
10380.00	41.72	1.62	43.34	68.20	24.86	horizontal	Peak
14559.60	46.97	5.09	52.06	68.20	16.14	horizontal	Peak
15570.00	44.16	2.42	46.58	74.00	27.42	horizontal	Peak
17937.60	34.39	6.80	41.19	54.00	12.81	horizontal	Average
17937.60	44.79	6.80	51.59	74.00	22.41	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n40 5190MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

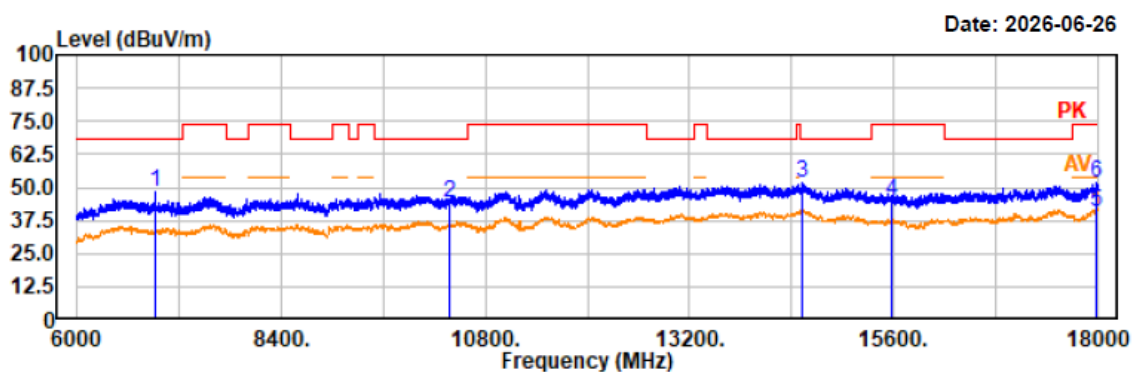


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
6919.20	51.36	-2.77	48.59	68.20	19.61	vertical	Peak
10380.00	42.64	1.62	44.26	68.20	23.94	vertical	Peak
14528.40	46.71	5.12	51.83	68.20	16.37	vertical	Peak
15570.00	42.54	2.42	44.96	74.00	29.04	vertical	Peak
17978.40	33.89	6.83	40.72	54.00	13.28	vertical	Average
17978.40	44.97	6.83	51.80	74.00	22.20	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n40 5230MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

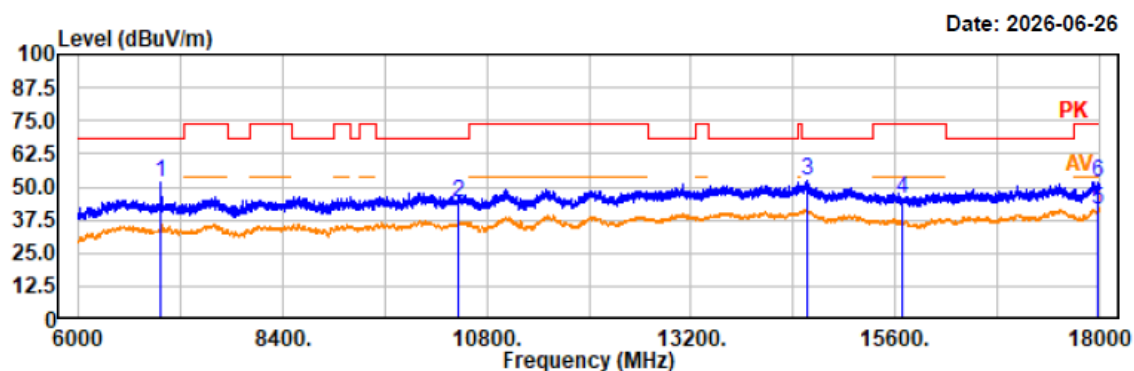

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
6973.20	54.86	-2.82	52.04	68.20	16.16	horizontal	Peak
10460.00	42.78	1.65	44.43	68.20	23.77	horizontal	Peak
14562.00	47.48	5.09	52.57	68.20	15.63	horizontal	Peak
15690.00	43.35	2.20	45.55	74.00	28.45	horizontal	Peak
17990.40	34.77	6.83	41.60	54.00	12.40	horizontal	Average
17990.40	44.82	6.83	51.65	74.00	22.35	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n40 5230MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

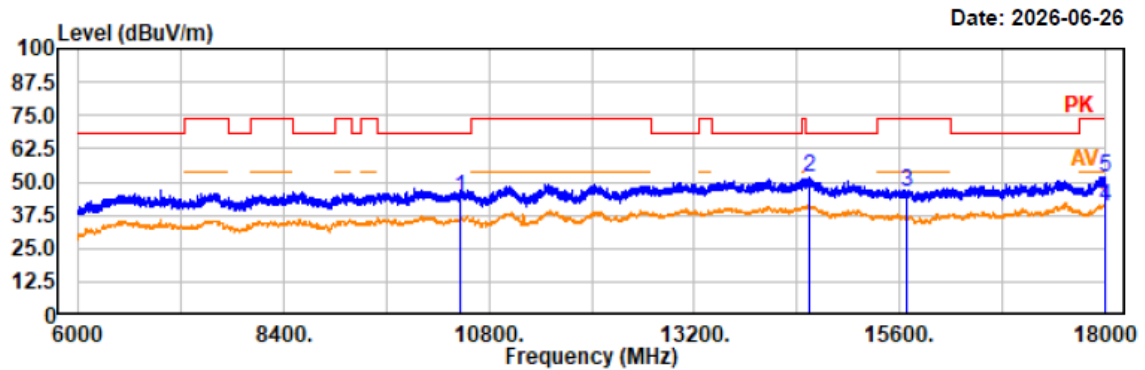


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10460.00	42.45	1.65	44.10	68.20	24.10	vertical	Peak
14538.00	46.71	5.11	51.82	68.20	16.38	vertical	Peak
15690.00	43.68	2.20	45.88	74.00	28.12	vertical	Peak
18000.00	34.12	6.84	40.96	54.00	13.04	vertical	Average
18000.00	45.16	6.84	52.00	74.00	22.00	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11ac80 5210MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

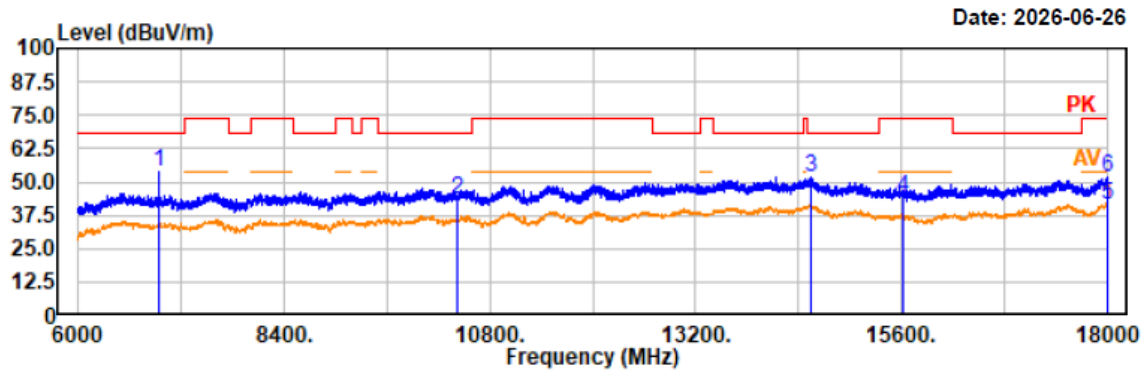

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
6946.80	56.23	-2.77	53.46	68.20	14.74	horizontal	Peak
10420.00	42.09	1.64	43.73	68.20	24.47	horizontal	Peak
14535.60	46.65	5.12	51.77	68.20	16.43	horizontal	Peak
15630.00	41.66	2.31	43.97	74.00	30.03	horizontal	Peak
18000.00	34.26	6.84	41.10	54.00	12.90	horizontal	Average
18000.00	45.04	6.84	51.88	74.00	22.12	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11ac80 5210MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

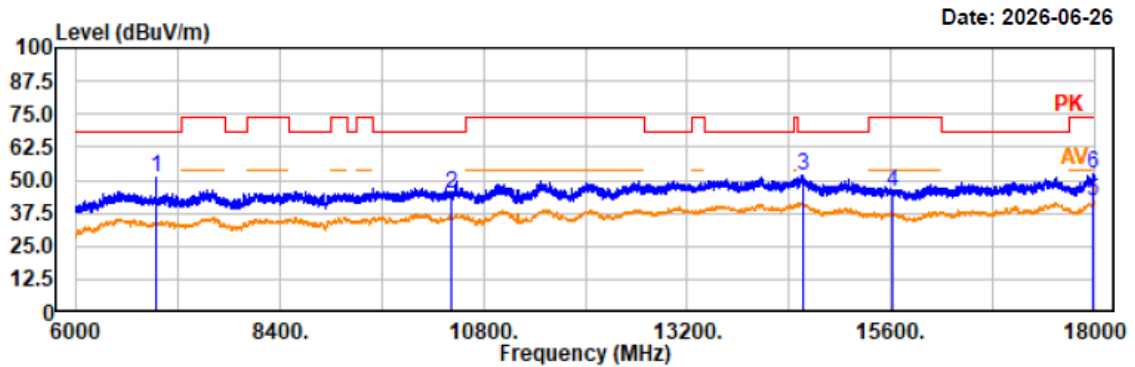

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
6946.80	53.75	-2.77	50.98	68.20	17.22	vertical	Peak
10420.00	42.94	1.64	44.58	68.20	23.62	vertical	Peak
14557.20	46.38	5.09	51.47	68.20	16.73	vertical	Peak
15630.00	43.35	2.31	45.66	74.00	28.34	vertical	Peak
17988.00	35.16	6.83	41.99	54.00	12.01	vertical	Average
17988.00	45.86	6.83	52.69	74.00	21.31	vertical	Peak

Band 2:

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5260MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

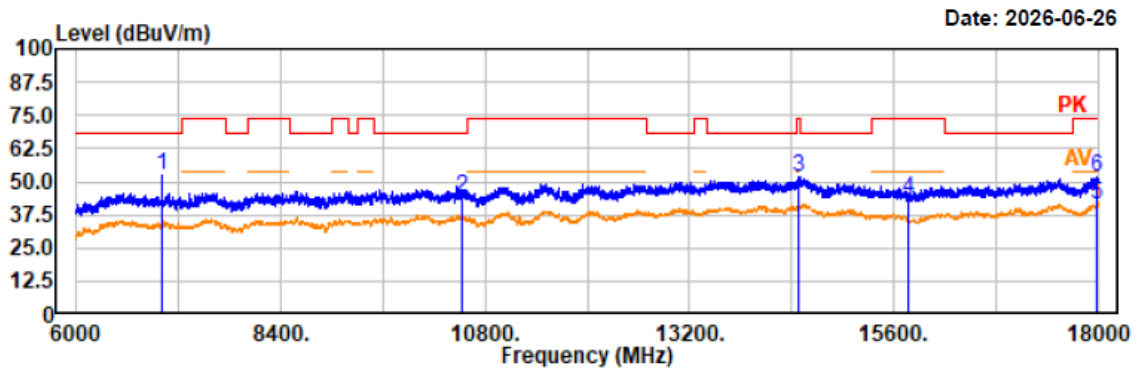

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
7012.80	55.07	-2.83	52.24	68.20	15.96	horizontal	Peak
10520.00	42.57	1.67	44.24	68.20	23.96	horizontal	Peak
14488.80	46.41	5.17	51.58	74.00	22.42	horizontal	Peak
15780.00	41.39	2.19	43.58	74.00	30.42	horizontal	Peak
17988.00	34.45	6.83	41.28	54.00	12.72	horizontal	Average
17988.00	45.06	6.83	51.89	74.00	22.11	horizontal	Peak

Project No.: 2607P41361E-RF
 Test Mode: 802.11a 5260MHz
 EUT Model: AXIUM DX8
 Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

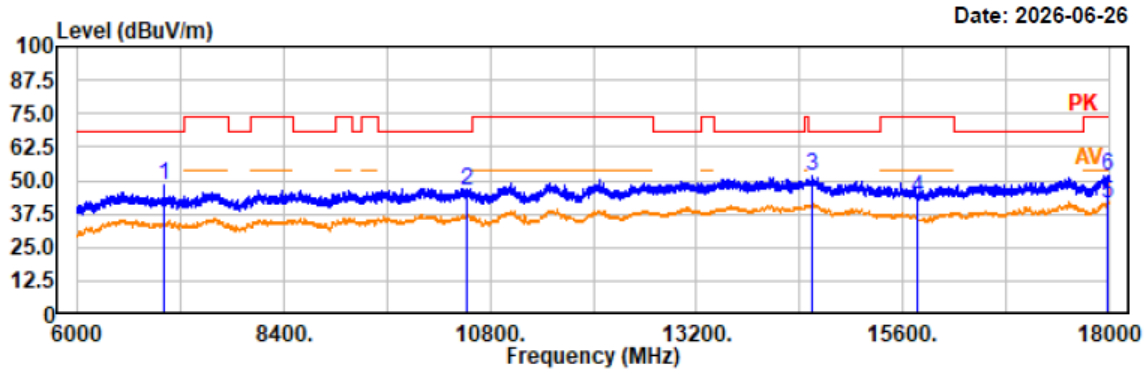

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
7014.00	51.00	-2.83	48.17	68.20	20.03	vertical	Peak
10520.00	44.26	1.67	45.93	68.20	22.27	vertical	Peak
14553.60	46.50	5.09	51.59	68.20	16.61	vertical	Peak
15780.00	41.54	2.19	43.73	74.00	30.27	vertical	Peak
17991.60	34.69	6.83	41.52	54.00	12.48	vertical	Average
17991.60	44.93	6.83	51.76	74.00	22.24	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5280MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

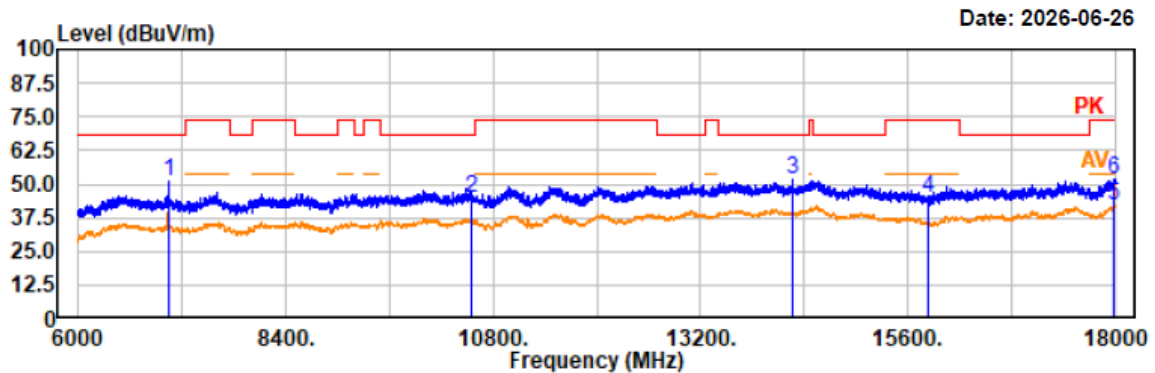

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
7040.40	53.66	-2.78	50.88	68.20	17.32	horizontal	Peak
10560.00	42.81	1.70	44.51	68.20	23.69	horizontal	Peak
14271.60	46.21	5.34	51.55	68.20	16.65	horizontal	Peak
15840.00	42.86	2.16	45.02	74.00	28.98	horizontal	Peak
17992.80	35.30	6.83	42.13	54.00	11.87	horizontal	Average
17992.80	45.23	6.83	52.06	74.00	21.94	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5280MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

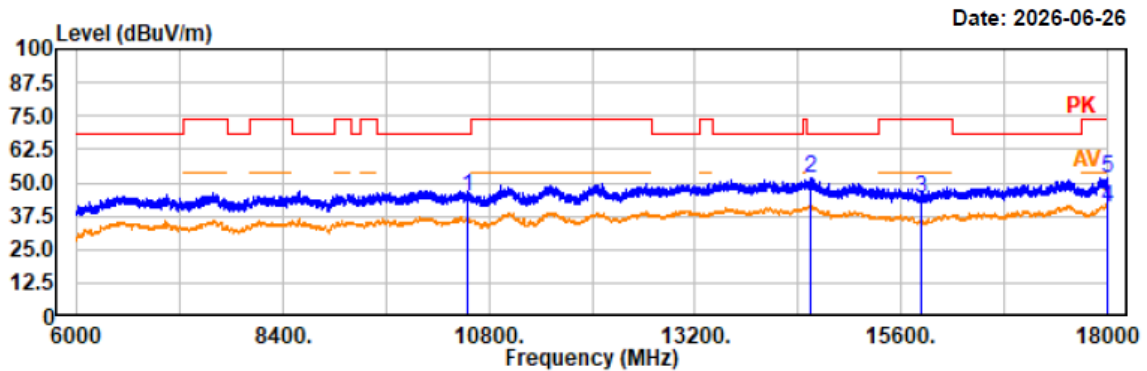

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	43.01	1.70	44.71	68.20	23.49	vertical	Peak
14540.40	46.90	5.11	52.01	68.20	16.19	vertical	Peak
15840.00	42.25	2.16	44.41	74.00	29.59	vertical	Peak
17996.40	33.89	6.84	40.73	54.00	13.27	vertical	Average
17996.40	45.22	6.84	52.06	74.00	21.94	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5320MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

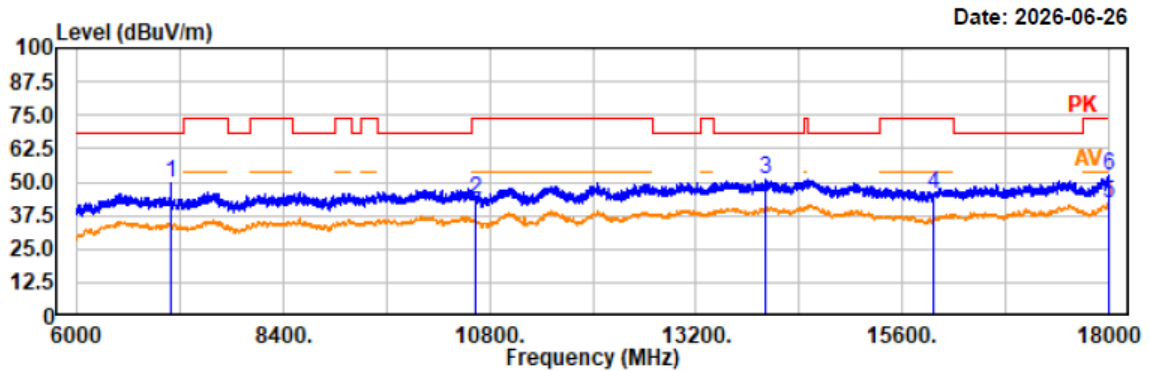


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
7093.20	52.48	-2.67	49.81	68.20	18.39	horizontal	Peak
10640.00	41.83	1.75	43.58	74.00	30.42	horizontal	Peak
14011.20	46.02	5.15	51.17	68.20	17.03	horizontal	Peak
15960.00	43.03	2.17	45.20	74.00	28.80	horizontal	Peak
17994.00	35.07	6.83	41.90	54.00	12.10	horizontal	Average
17994.00	45.34	6.83	52.17	74.00	21.83	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5320MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

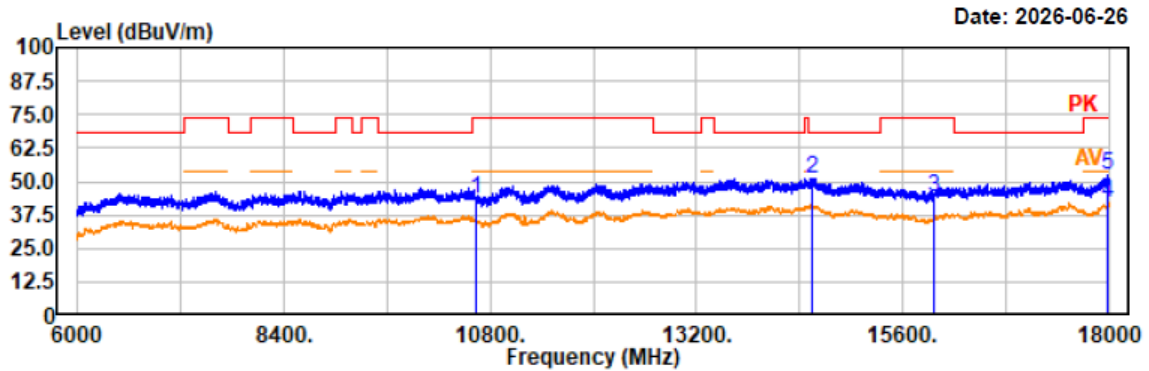

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.00	41.67	1.75	43.42	74.00	30.58	vertical	Peak
14536.80	46.22	5.11	51.33	68.20	16.87	vertical	Peak
15960.00	42.19	2.17	44.36	74.00	29.64	vertical	Peak
17992.80	34.92	6.83	41.75	54.00	12.25	vertical	Average
17992.80	45.74	6.83	52.57	74.00	21.43	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5260MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

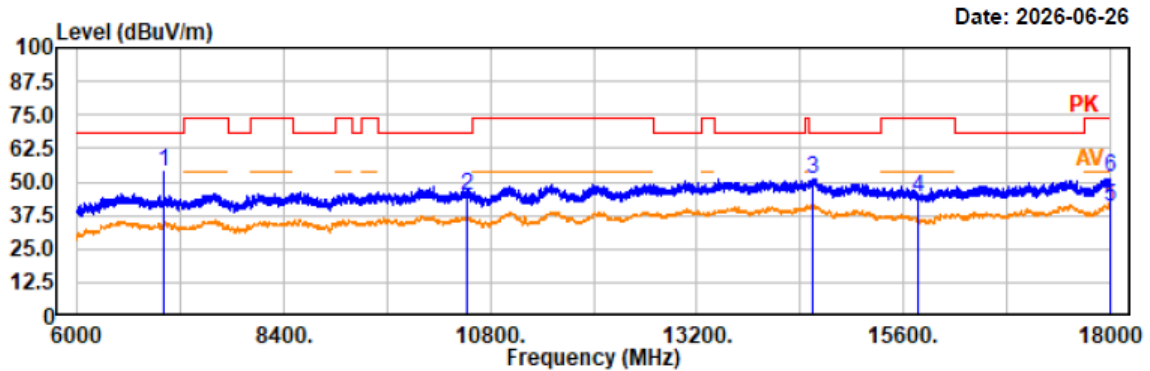

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
7012.80	56.72	-2.83	53.89	68.20	14.31	horizontal	Peak
10520.00	42.85	1.67	44.52	68.20	23.68	horizontal	Peak
14548.80	46.27	5.10	51.37	68.20	16.83	horizontal	Peak
15780.00	41.62	2.19	43.81	74.00	30.19	horizontal	Peak
18000.00	34.11	6.84	40.95	54.00	13.05	horizontal	Average
18000.00	44.55	6.84	51.39	74.00	22.61	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5260MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

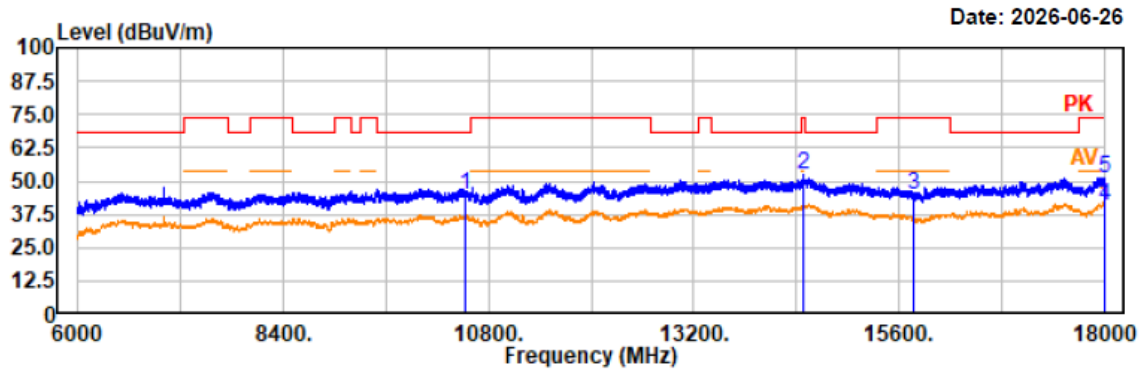


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.00	43.16	1.67	44.83	68.20	23.37	vertical	Peak
14478.00	47.11	5.19	52.30	74.00	21.70	vertical	Peak
15780.00	42.38	2.19	44.57	74.00	29.43	vertical	Peak
17996.40	34.00	6.84	40.84	54.00	13.16	vertical	Average
17996.40	44.50	6.84	51.34	74.00	22.66	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5280MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

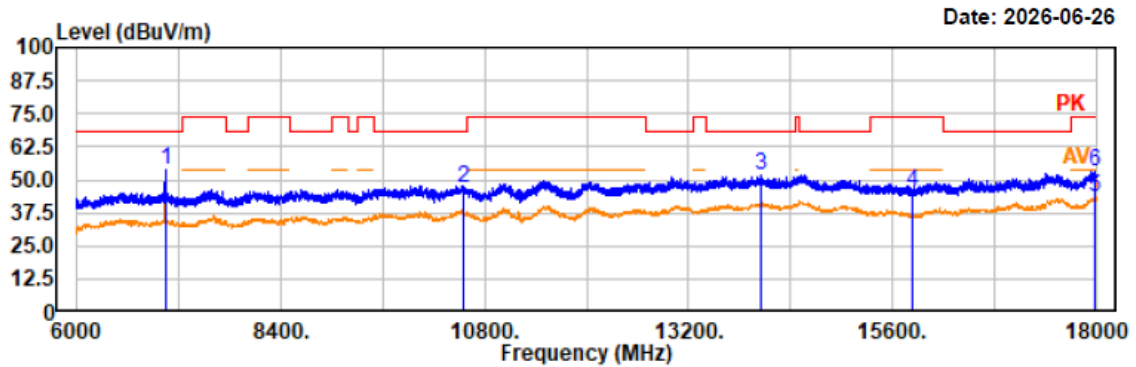


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
7039.20	56.54	-2.78	53.76	68.20	14.44	horizontal	Peak
10560.00	45.42	1.70	47.12	68.20	21.08	horizontal	Peak
14061.60	46.75	5.23	51.98	68.20	16.22	horizontal	Peak
15840.00	43.42	2.16	45.58	74.00	28.42	horizontal	Peak
17980.80	36.40	6.83	43.23	54.00	10.77	horizontal	Average
17980.80	45.95	6.83	52.78	74.00	21.22	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5280MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

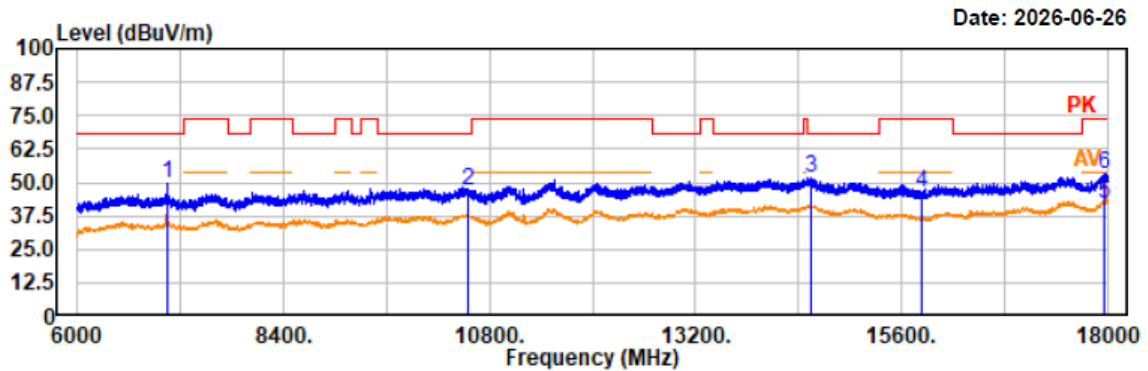


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
7039.20	52.38	-2.78	49.60	68.20	18.60	vertical	Peak
10560.00	45.47	1.70	47.17	68.20	21.03	vertical	Peak
14547.60	46.29	5.10	51.39	68.20	16.81	vertical	Peak
15840.00	44.37	2.16	46.53	74.00	27.47	vertical	Peak
17953.20	35.49	6.81	42.30	54.00	11.70	vertical	Average
17953.20	46.05	6.81	52.86	74.00	21.14	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5320MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

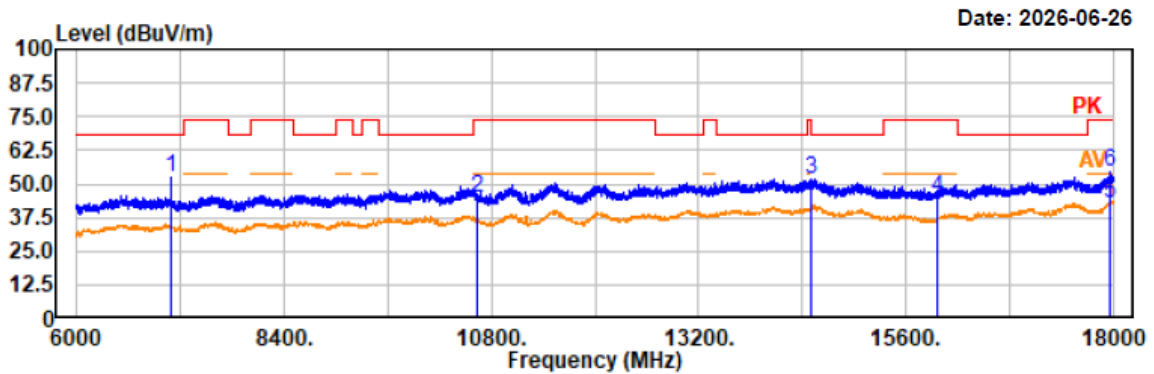

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
7093.20	54.87	-2.67	52.20	68.20	16.00	horizontal	Peak
10640.00	42.79	1.75	44.54	74.00	29.46	horizontal	Peak
14496.00	46.63	5.16	51.79	74.00	22.21	horizontal	Peak
15960.00	42.88	2.17	45.05	74.00	28.95	horizontal	Peak
17971.20	35.92	6.82	42.74	54.00	11.26	horizontal	Average
17971.20	47.39	6.82	54.21	74.00	19.79	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5320MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

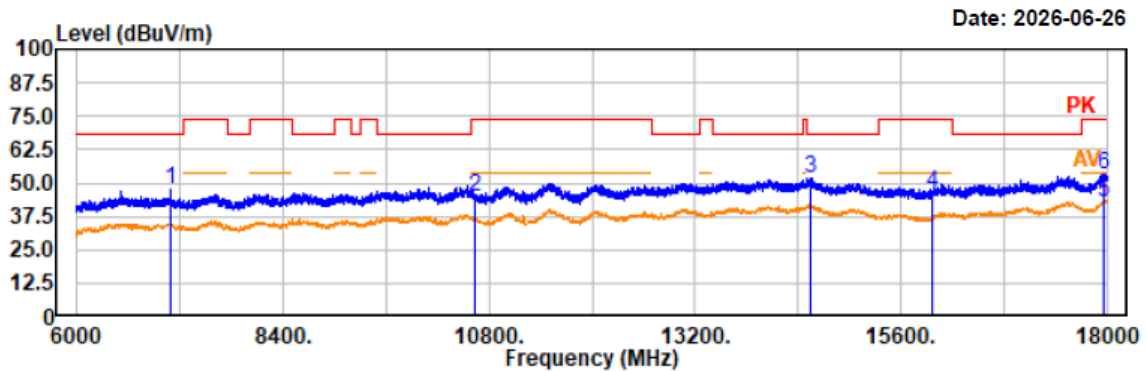

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
7093.20	50.24	-2.67	47.57	68.20	20.63	vertical	Peak
10640.00	43.17	1.75	44.92	74.00	29.08	vertical	Peak
14556.00	46.62	5.08	51.70	68.20	16.50	vertical	Peak
15960.00	43.77	2.17	45.94	74.00	28.06	vertical	Peak
17970.00	35.96	6.82	42.78	54.00	11.22	vertical	Average
17970.00	46.42	6.82	53.24	74.00	20.76	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n40 5270MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

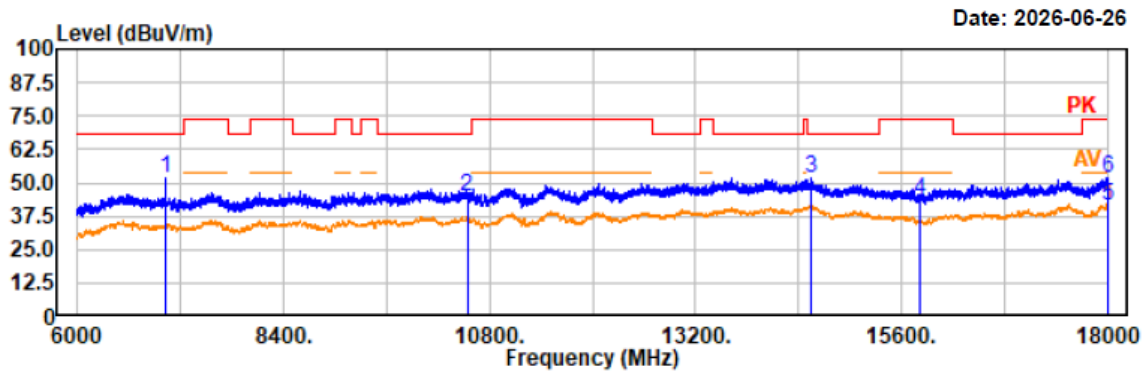

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
7026.00	54.21	-2.82	51.39	68.20	16.81	horizontal	Peak
10539.60	43.13	1.68	44.81	68.20	23.39	horizontal	Peak
14539.20	46.91	5.11	52.02	68.20	16.18	horizontal	Peak
15810.00	41.59	2.18	43.77	74.00	30.23	horizontal	Peak
17994.00	34.74	6.83	41.57	54.00	12.43	horizontal	Average
17994.00	45.00	6.83	51.83	74.00	22.17	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n40 5270MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

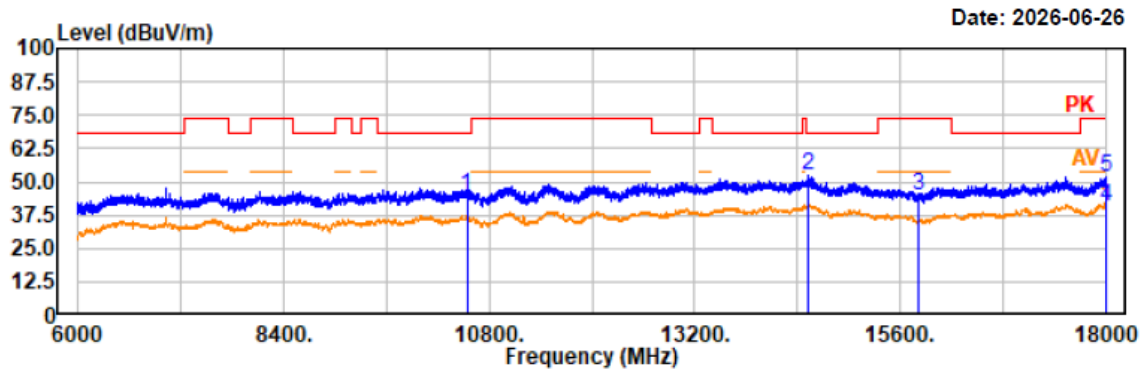

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10539.60	43.15	1.68	44.83	68.20	23.37	vertical	Peak
14530.80	47.37	5.12	52.49	68.20	15.71	vertical	Peak
15810.00	42.47	2.18	44.65	74.00	29.35	vertical	Peak
17998.80	34.08	6.84	40.92	54.00	13.08	vertical	Average
17998.80	44.57	6.84	51.41	74.00	22.59	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n40 5310MHz
EUT Model: AXIUM DX8
Test distance: 3m


Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

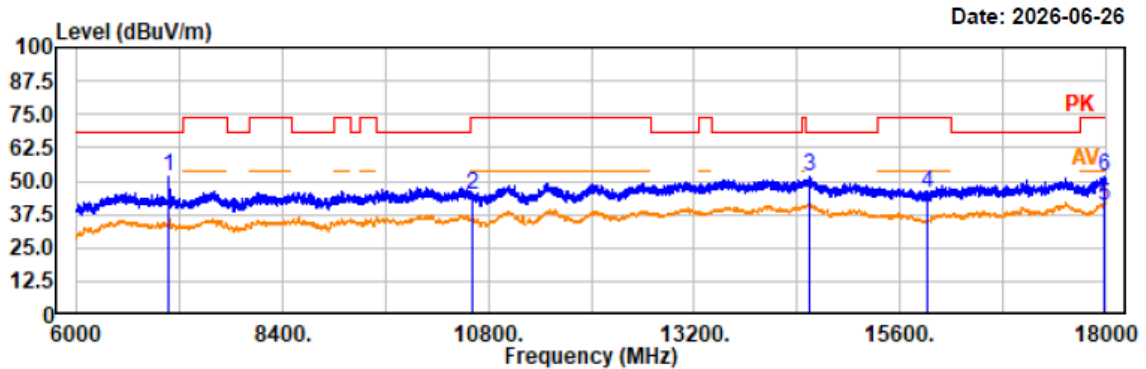

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
7080.00	54.27	-2.69	51.58	68.20	16.62	horizontal	Peak
10620.00	43.39	1.73	45.12	74.00	28.88	horizontal	Peak
14552.40	46.68	5.09	51.77	68.20	16.43	horizontal	Peak
15930.00	43.68	2.14	45.82	74.00	28.18	horizontal	Peak
17983.20	34.13	6.83	40.96	54.00	13.04	horizontal	Average
17983.20	44.86	6.83	51.69	74.00	22.31	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n40 5310MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

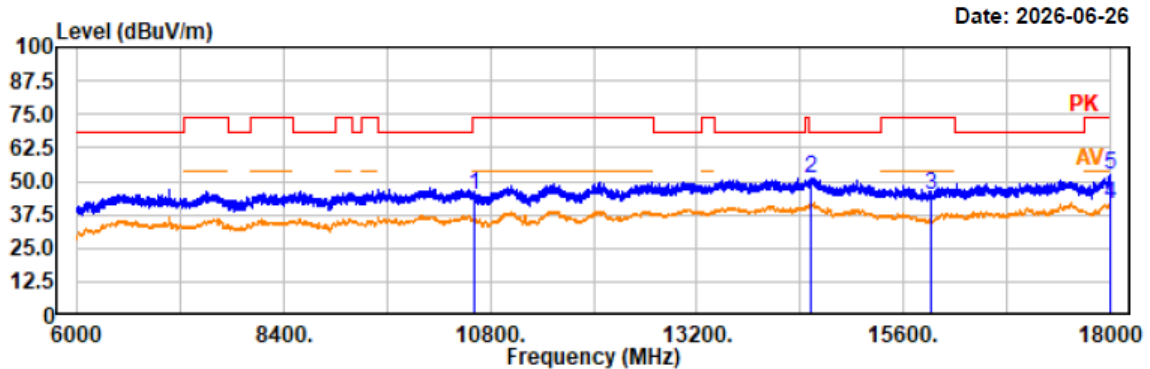

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10620.00	43.28	1.73	45.01	74.00	28.99	vertical	Peak
14534.40	46.19	5.13	51.32	68.20	16.88	vertical	Peak
15930.00	42.64	2.14	44.78	74.00	29.22	vertical	Peak
17994.00	34.61	6.83	41.44	54.00	12.56	vertical	Average
17994.00	45.35	6.83	52.18	74.00	21.82	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11ac80 5290MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

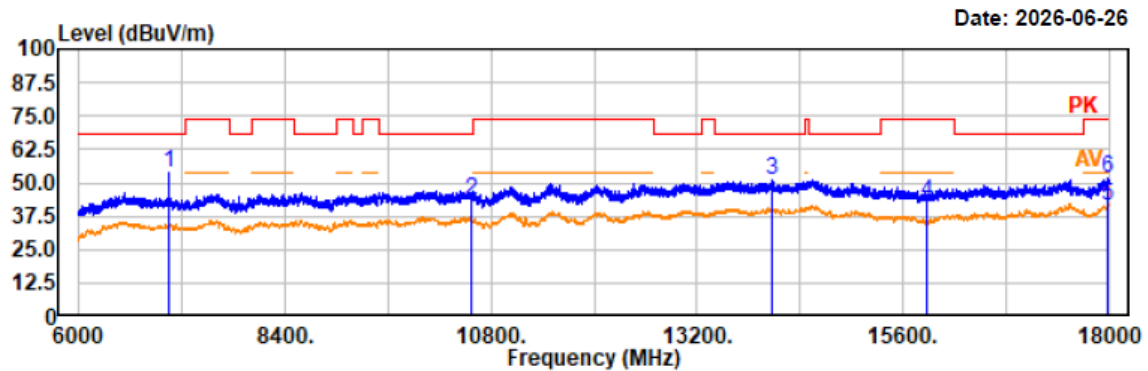


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
7053.60	56.56	-2.76	53.80	68.20	14.40	horizontal	Peak
10580.00	41.95	1.71	43.66	68.20	24.54	horizontal	Peak
14073.60	45.87	5.25	51.12	68.20	17.08	horizontal	Peak
15870.00	40.69	2.13	42.82	74.00	31.18	horizontal	Peak
17986.80	34.33	6.83	41.16	54.00	12.84	horizontal	Average
17986.80	45.15	6.83	51.98	74.00	22.02	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11ac80 5290MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/62%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

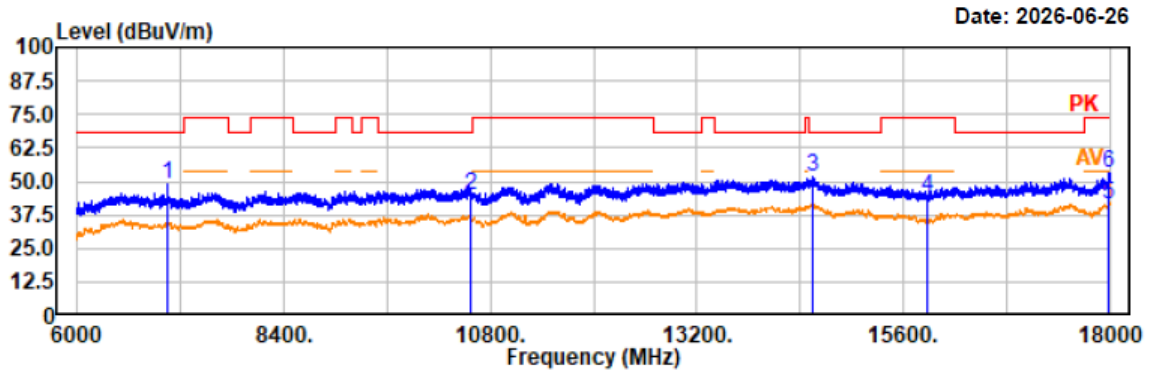

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto


AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
7053.60	51.53	-2.76	48.77	68.20	19.43	vertical	Peak
10580.00	43.09	1.71	44.80	68.20	23.40	vertical	Peak
14550.00	46.81	5.09	51.90	68.20	16.30	vertical	Peak
15870.00	42.28	2.13	44.41	74.00	29.59	vertical	Peak
17986.80	34.70	6.83	41.53	54.00	12.47	vertical	Average
17986.80	46.22	6.83	53.05	74.00	20.95	vertical	Peak

Band 3:

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5500MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

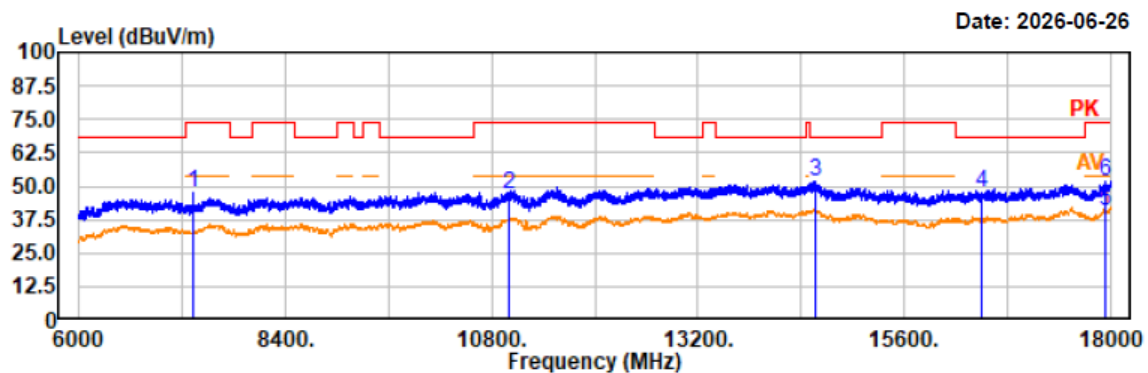

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
7333.20	49.70	-2.24	47.46	74.00	26.54	horizontal	Peak
11000.40	44.64	2.06	46.70	74.00	27.30	horizontal	Peak
14565.60	46.62	5.07	51.69	68.20	16.51	horizontal	Peak
16500.00	44.39	3.42	47.81	68.20	20.39	horizontal	Peak
17936.40	34.05	6.80	40.85	54.00	13.15	horizontal	Average
17936.40	45.23	6.80	52.03	74.00	21.97	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5500MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

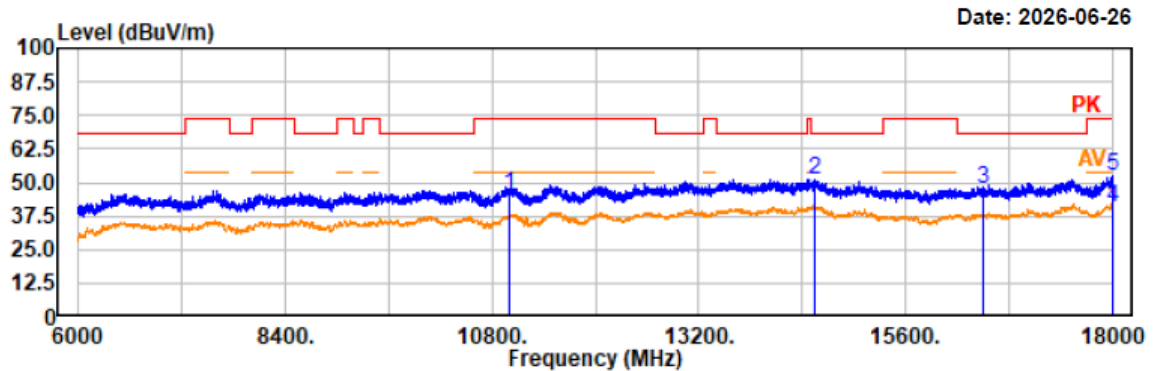

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.00	43.47	2.06	45.53	74.00	28.47	vertical	Peak
14541.60	46.07	5.11	51.18	68.20	17.02	vertical	Peak
16500.00	44.17	3.42	47.59	68.20	20.61	vertical	Peak
17996.40	33.75	6.84	40.59	54.00	13.41	vertical	Average
17996.40	45.37	6.84	52.21	74.00	21.79	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5580MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

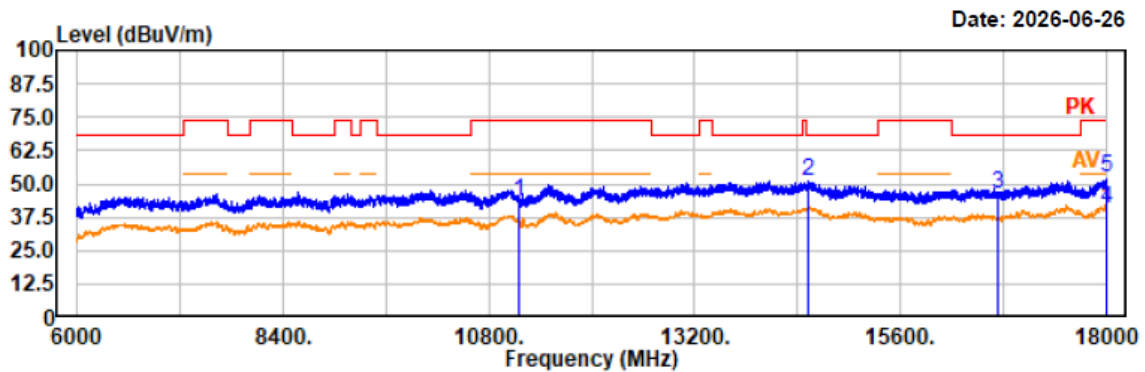


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	41.37	2.37	43.74	74.00	30.26	horizontal	Peak
14530.80	45.89	5.12	51.01	68.20	17.19	horizontal	Peak
16740.00	42.26	3.93	46.19	68.20	22.01	horizontal	Peak
18000.00	34.06	6.84	40.90	54.00	13.10	horizontal	Average
18000.00	45.70	6.84	52.54	74.00	21.46	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5580MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

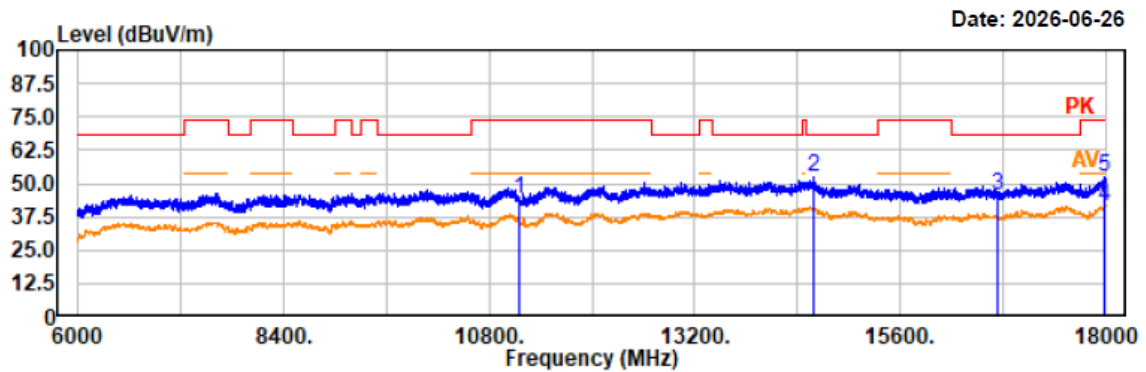


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	42.02	2.37	44.39	74.00	29.61	vertical	Peak
14580.00	47.15	5.06	52.21	68.20	15.99	vertical	Peak
16740.00	41.57	3.93	45.50	68.20	22.70	vertical	Peak
17992.80	34.86	6.83	41.69	54.00	12.31	vertical	Average
17992.80	45.88	6.83	52.71	74.00	21.29	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5700MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

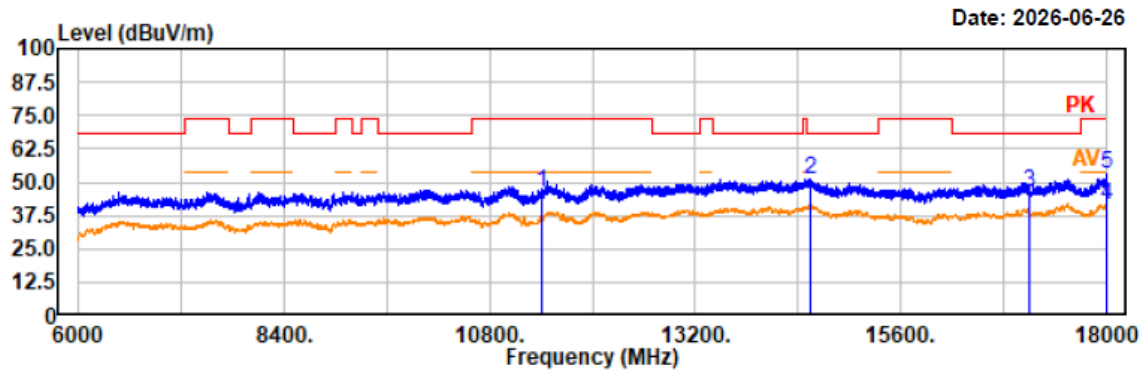


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	43.61	2.82	46.43	74.00	27.57	horizontal	Peak
14556.00	46.25	5.08	51.33	68.20	16.87	horizontal	Peak
17100.00	41.16	4.77	45.93	68.20	22.27	horizontal	Peak
17995.20	34.76	6.84	41.60	54.00	12.40	horizontal	Average
17995.20	45.99	6.84	52.83	74.00	21.17	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5700MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

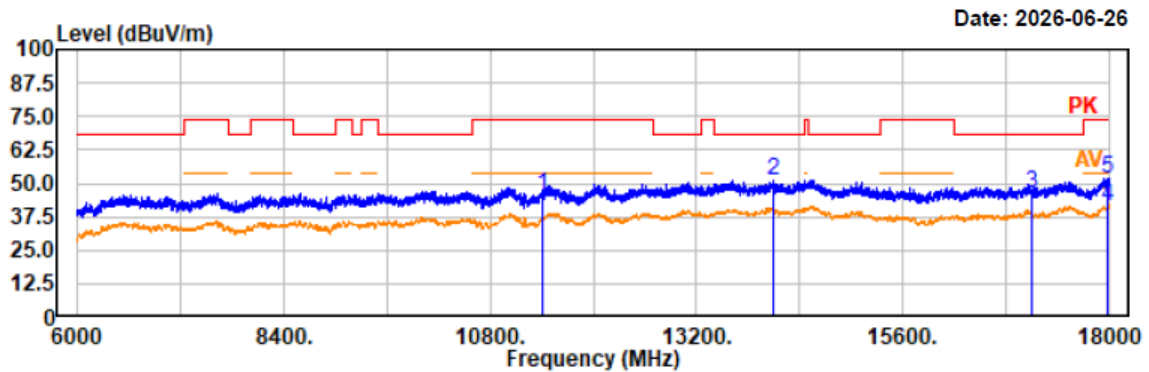


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	43.00	2.82	45.82	74.00	28.18	vertical	Peak
14086.80	45.77	5.27	51.04	68.20	17.16	vertical	Peak
17100.00	41.36	4.77	46.13	68.20	22.07	vertical	Peak
17986.80	34.30	6.83	41.13	54.00	12.87	vertical	Average
17986.80	44.88	6.83	51.71	74.00	22.29	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5500MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

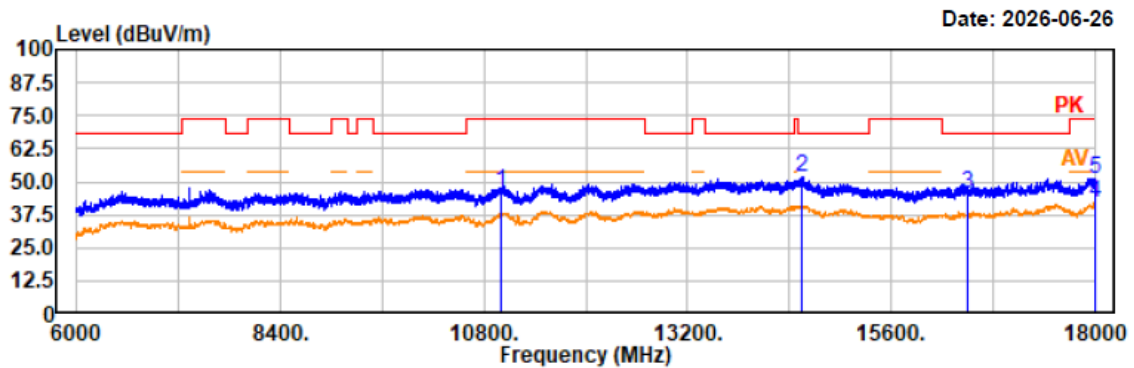


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.00	44.04	2.06	46.10	74.00	27.90	horizontal	Peak
14540.40	46.68	5.11	51.79	68.20	16.41	horizontal	Peak
16500.00	42.41	3.42	45.83	68.20	22.37	horizontal	Peak
17994.00	35.01	6.83	41.84	54.00	12.16	horizontal	Average
17994.00	44.51	6.83	51.34	74.00	22.66	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5500MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

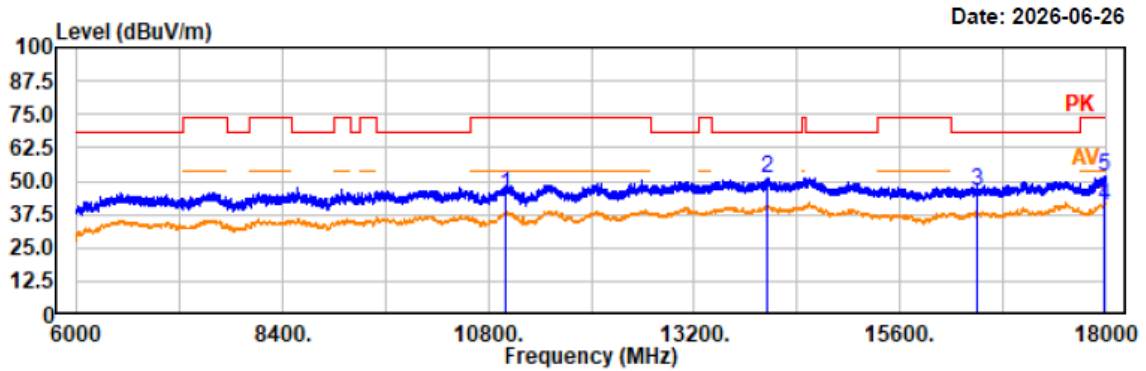


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.00	43.05	2.06	45.11	74.00	28.89	vertical	Peak
14053.20	46.11	5.23	51.34	68.20	16.86	vertical	Peak
16500.00	42.75	3.42	46.17	68.20	22.03	vertical	Peak
17976.00	34.09	6.83	40.92	54.00	13.08	vertical	Average
17976.00	45.22	6.83	52.05	74.00	21.95	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5580MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

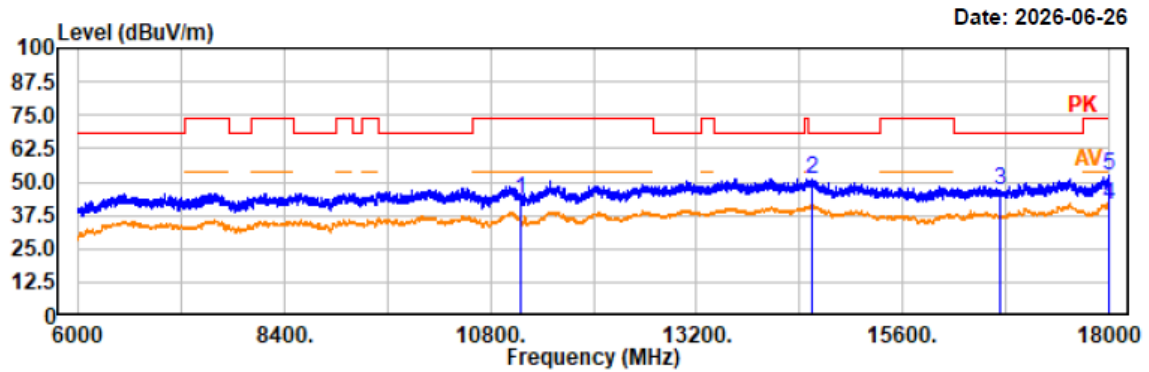

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	41.08	2.37	43.45	74.00	30.55	horizontal	Peak
14556.00	46.12	5.08	51.20	68.20	17.00	horizontal	Peak
16740.00	42.83	3.93	46.76	68.20	21.44	horizontal	Peak
17997.60	34.23	6.84	41.07	54.00	12.93	horizontal	Average
17997.60	45.42	6.84	52.26	74.00	21.74	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5580MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

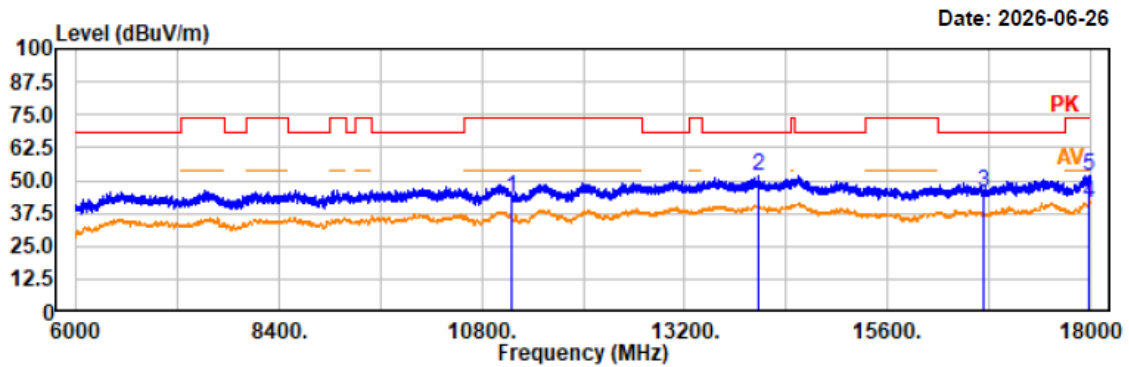

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	41.32	2.37	43.69	74.00	30.31	vertical	Peak
14076.00	46.30	5.25	51.55	68.20	16.65	vertical	Peak
16740.00	41.90	3.93	45.83	68.20	22.37	vertical	Peak
17989.20	34.48	6.83	41.31	54.00	12.69	vertical	Average
17989.20	44.97	6.83	51.80	74.00	22.20	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5700MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: wlif wu
Power Source: AC 120V/60Hz

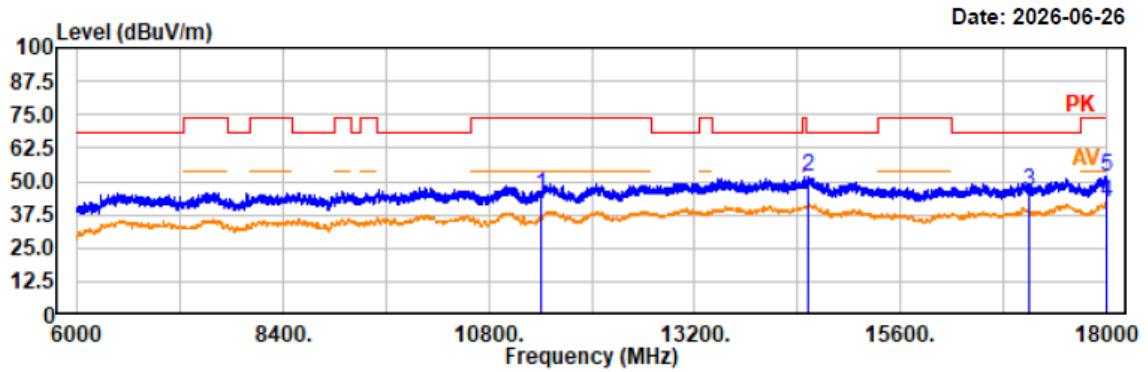


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	41.67	2.82	44.49	74.00	29.51	horizontal	Peak
14532.00	46.52	5.12	51.64	68.20	16.56	horizontal	Peak
17100.00	41.67	4.77	46.44	68.20	21.76	horizontal	Peak
17995.20	35.33	6.84	42.17	54.00	11.83	horizontal	Average
17995.20	44.83	6.84	51.67	74.00	22.33	horizontal	Peak

Project No.: 2607P41361E-RF
 Test Mode: 802.11n20 5700MHz
 EUT Model: AXIUM DX8
 Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
 Tested by: Wliff Wu
 Power Source: AC 120V/60Hz

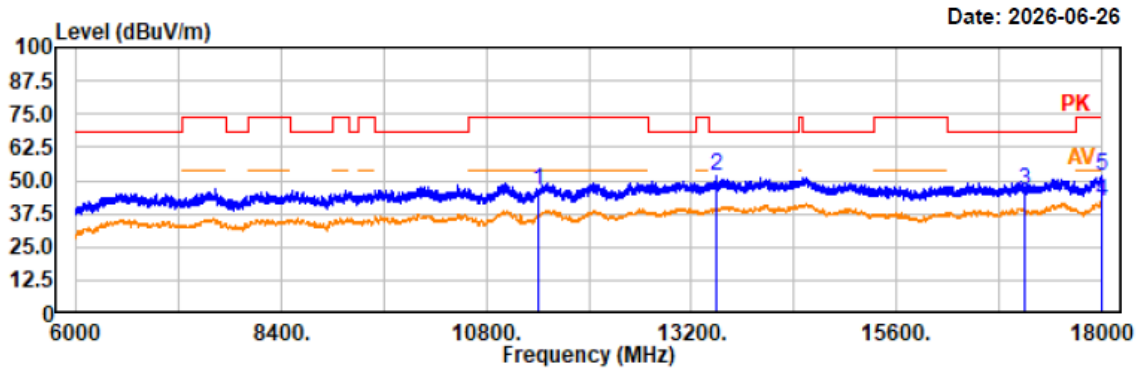


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	43.51	2.82	46.33	74.00	27.67	vertical	Peak
13483.20	47.03	4.63	51.66	68.20	16.54	vertical	Peak
17100.00	41.61	4.77	46.38	68.20	21.82	vertical	Peak
17995.20	35.37	6.84	42.21	54.00	11.79	vertical	Average
17995.20	44.96	6.84	51.80	74.00	22.20	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n40 5510MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

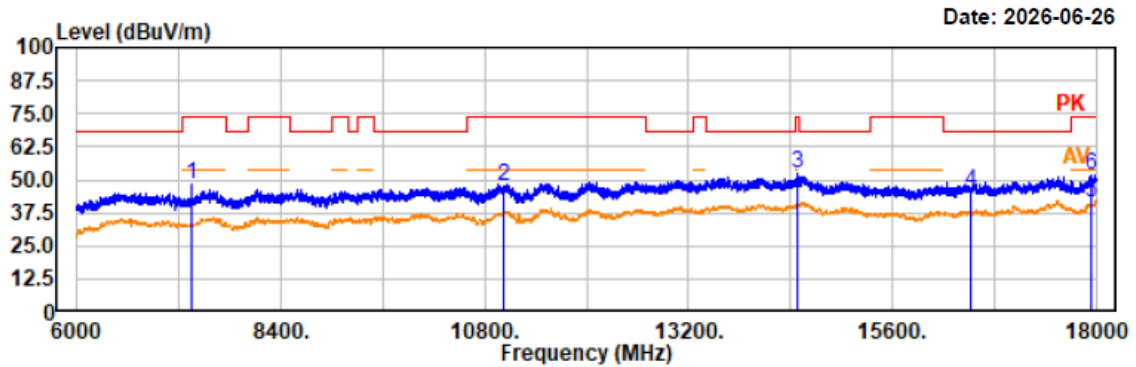


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
7346.40	50.63	-2.23	48.40	74.00	25.60	horizontal	Peak
11020.00	45.40	2.09	47.49	74.00	26.51	horizontal	Peak
14478.00	47.28	5.19	52.47	74.00	21.53	horizontal	Peak
16530.00	42.36	3.48	45.84	68.20	22.36	horizontal	Peak
17948.40	34.28	6.81	41.09	54.00	12.91	horizontal	Average
17948.40	45.09	6.81	51.90	74.00	22.10	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n40 5510MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

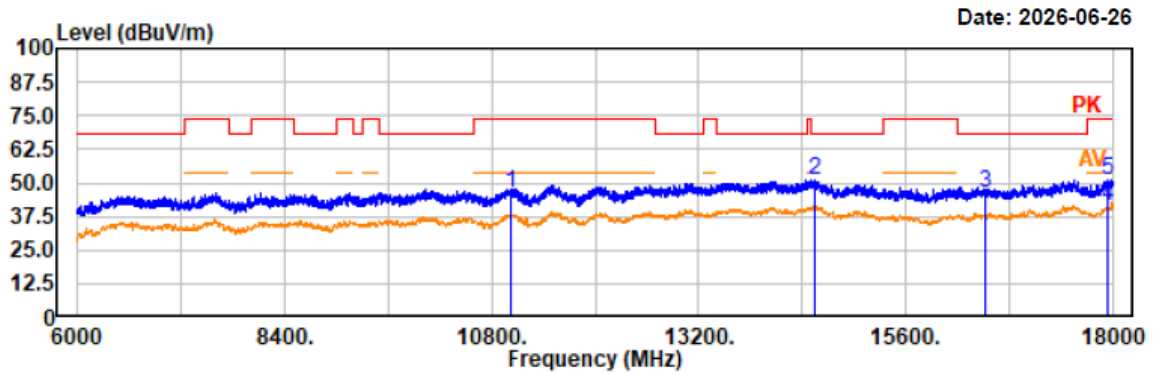


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11020.00	44.16	2.09	46.25	74.00	27.75	vertical	Peak
14540.40	46.05	5.11	51.16	68.20	17.04	vertical	Peak
16530.00	42.43	3.48	45.91	68.20	22.29	vertical	Peak
17942.40	34.47	6.80	41.27	54.00	12.73	vertical	Average
17942.40	44.49	6.80	51.29	74.00	22.71	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n40 5550MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

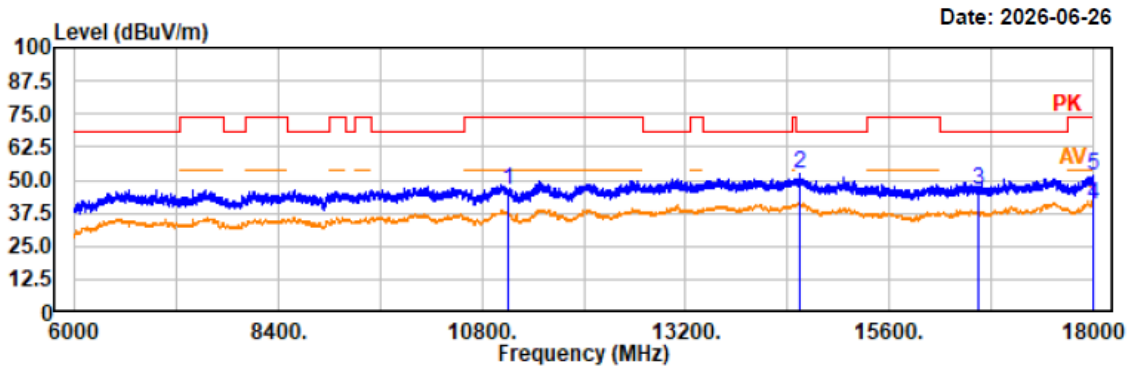


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11100.00	44.02	2.25	46.27	74.00	27.73	horizontal	Peak
14542.80	47.15	5.11	52.26	68.20	15.94	horizontal	Peak
16650.00	42.44	3.73	46.17	68.20	22.03	horizontal	Peak
17998.80	33.86	6.84	40.70	54.00	13.30	horizontal	Average
17998.80	44.75	6.84	51.59	74.00	22.41	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n40 5550MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

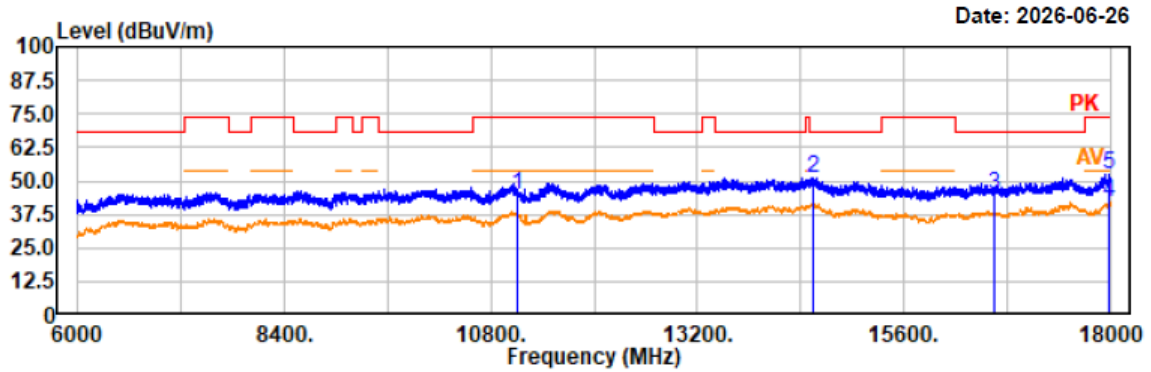

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11100.00	42.62	2.25	44.87	74.00	29.13	vertical	Peak
14539.20	46.26	5.11	51.37	68.20	16.83	vertical	Peak
16650.00	40.95	3.73	44.68	68.20	23.52	vertical	Peak
17992.80	35.06	6.83	41.89	54.00	12.11	vertical	Average
17992.80	45.37	6.83	52.20	74.00	21.80	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n40 5670MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

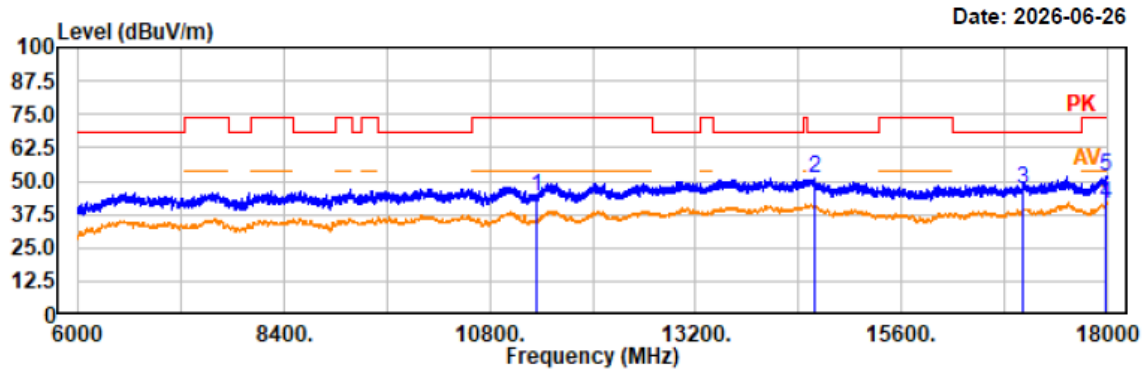


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11340.00	41.15	2.70	43.85	74.00	30.15	horizontal	Peak
14586.00	46.01	5.05	51.06	68.20	17.14	horizontal	Peak
17010.00	42.28	4.59	46.87	68.20	21.33	horizontal	Peak
17990.40	34.89	6.83	41.72	54.00	12.28	horizontal	Average
17990.40	44.87	6.83	51.70	74.00	22.30	horizontal	Peak


Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz



Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11340.00	42.25	2.70	44.95	74.00	29.05	vertical	Peak
14551.20	46.12	5.09	51.21	68.20	16.99	vertical	Peak
17010.00	42.64	4.59	47.23	68.20	20.97	vertical	Peak
17995.20	35.18	6.84	42.02	54.00	11.98	vertical	Average
17995.20	45.94	6.84	52.78	74.00	21.22	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11ac80 5530MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

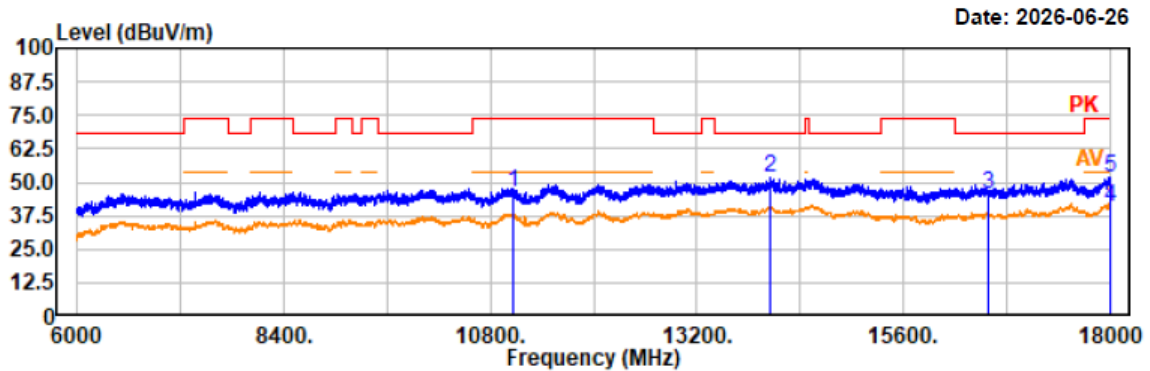


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11060.00	43.87	2.17	46.04	74.00	27.96	horizontal	Peak
14050.80	46.45	5.22	51.67	68.20	16.53	horizontal	Peak
16590.00	41.76	3.60	45.36	68.20	22.84	horizontal	Peak
17996.40	33.60	6.84	40.44	54.00	13.56	horizontal	Average
17996.40	44.87	6.84	51.71	74.00	22.29	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11ac80 5530MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

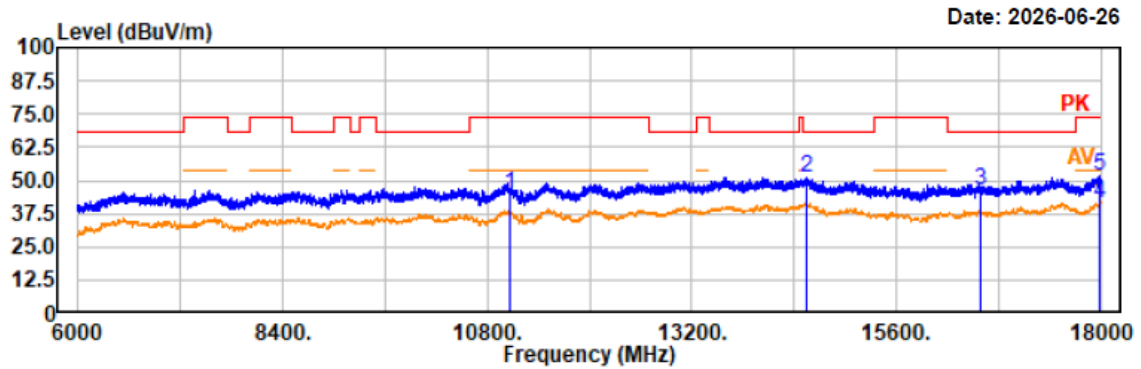


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11060.00	43.00	2.17	45.17	74.00	28.83	vertical	Peak
14551.20	46.27	5.09	51.36	68.20	16.84	vertical	Peak
16590.00	42.61	3.60	46.21	68.20	21.99	vertical	Peak
17985.60	34.29	6.84	41.13	54.00	12.87	vertical	Average
17985.60	45.16	6.84	52.00	74.00	22.00	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11ac80 5610MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

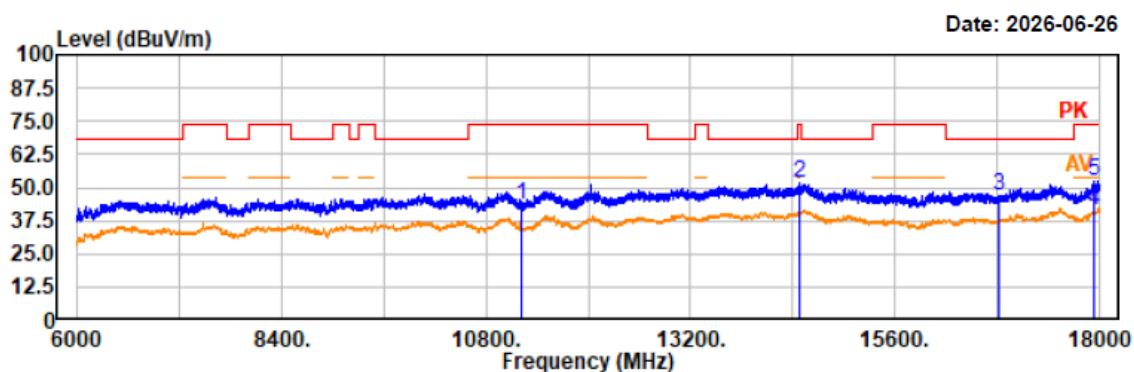

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11220.00	40.73	2.48	43.21	74.00	30.79	horizontal	Peak
14476.80	46.20	5.19	51.39	74.00	22.61	horizontal	Peak
16830.00	42.72	4.14	46.86	68.20	21.34	horizontal	Peak
17941.20	34.46	6.80	41.26	54.00	12.74	horizontal	Average
17941.20	45.79	6.80	52.59	74.00	21.41	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11ac80 5610MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

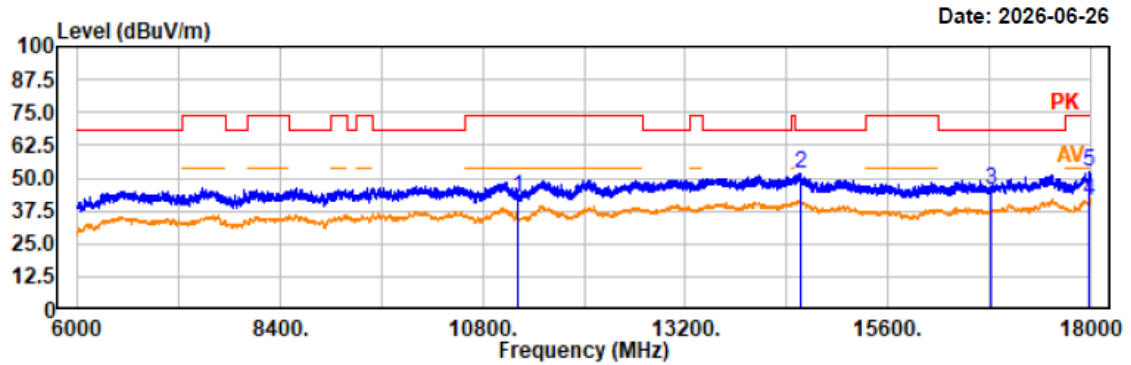

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto


AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11220.00	40.58	2.48	43.06	74.00	30.94	vertical	Peak
14558.40	46.39	5.09	51.48	68.20	16.72	vertical	Peak
16830.00	41.71	4.14	45.85	68.20	22.35	vertical	Peak
17990.40	34.72	6.83	41.55	54.00	12.45	vertical	Average
17990.40	45.36	6.83	52.19	74.00	21.81	vertical	Peak

Band 4:

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5745MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

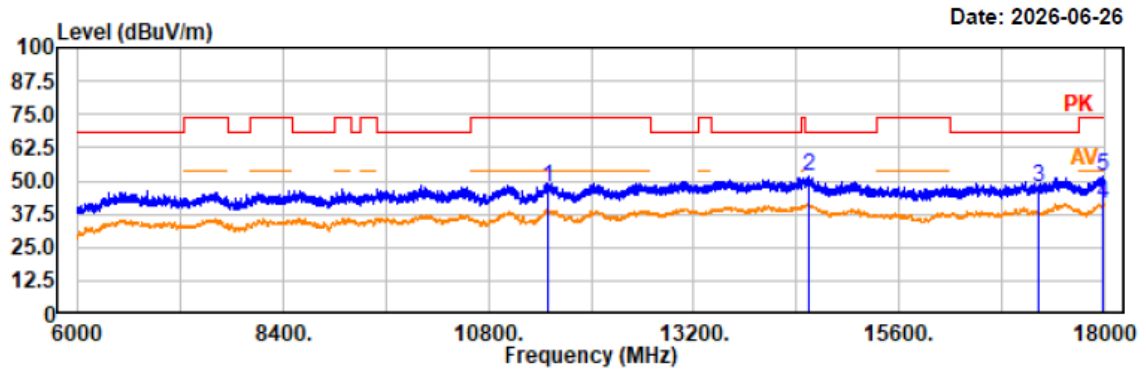

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	44.72	2.99	47.71	74.00	26.29	horizontal	Peak
14541.60	46.41	5.11	51.52	68.20	16.68	horizontal	Peak
17235.00	42.49	5.16	47.65	68.20	20.55	horizontal	Peak
17986.80	34.42	6.83	41.25	54.00	12.75	horizontal	Average
17986.80	45.00	6.83	51.83	74.00	22.17	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5745MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

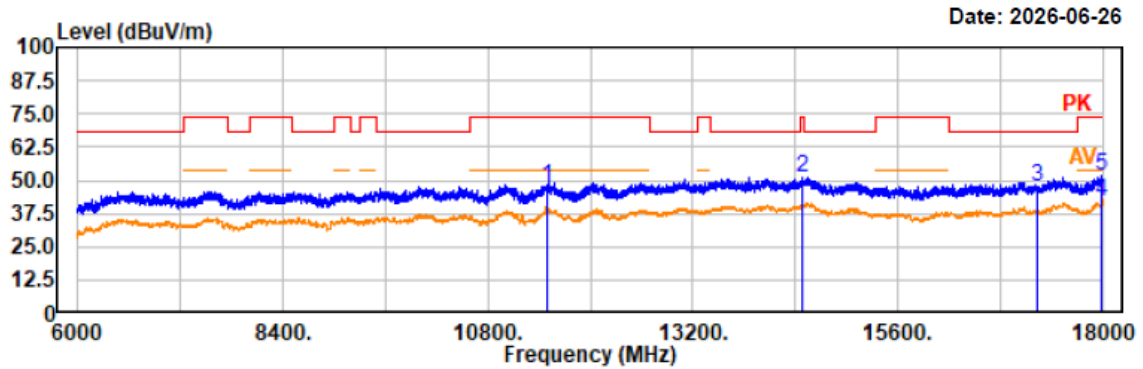

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	44.75	2.99	47.74	74.00	26.26	vertical	Peak
14487.60	46.02	5.17	51.19	74.00	22.81	vertical	Peak
17234.40	42.10	5.15	47.25	68.20	20.95	vertical	Peak
17990.40	35.17	6.83	42.00	54.00	12.00	vertical	Average
17990.40	44.74	6.83	51.57	74.00	22.43	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5785MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

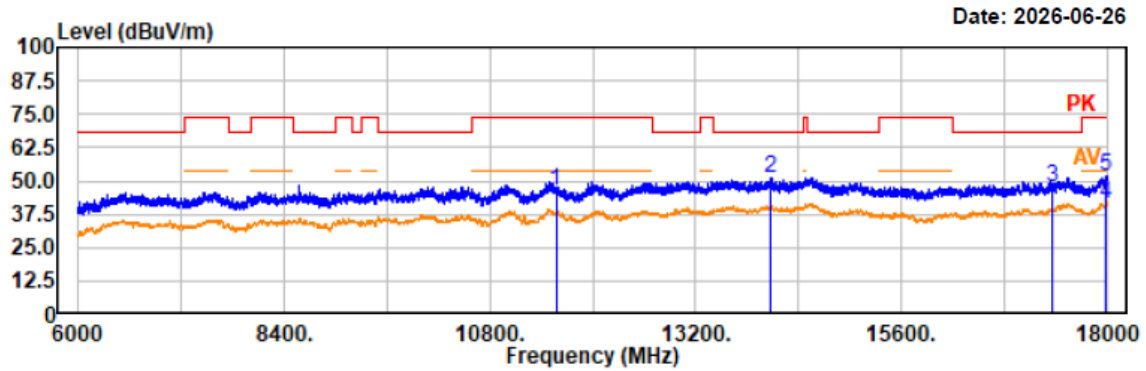


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.40	43.27	3.09	46.36	74.00	27.64	horizontal	Peak
14067.60	46.09	5.24	51.33	68.20	16.87	horizontal	Peak
17355.00	42.34	5.45	47.79	68.20	20.41	horizontal	Peak
17980.80	34.47	6.83	41.30	54.00	12.70	horizontal	Average
17980.80	45.18	6.83	52.01	74.00	21.99	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5785MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

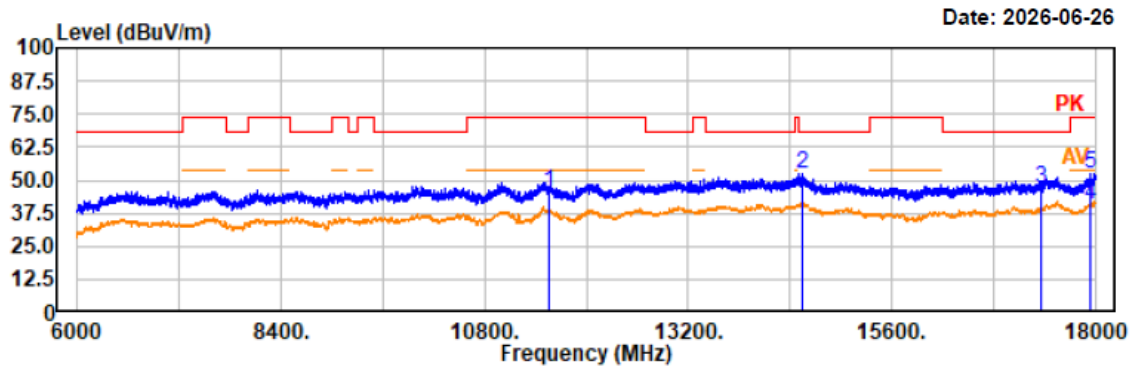


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	42.73	3.09	45.82	74.00	28.18	vertical	Peak
14539.20	47.15	5.11	52.26	68.20	15.94	vertical	Peak
17354.40	41.64	5.45	47.09	68.20	21.11	vertical	Peak
17944.80	34.08	6.80	40.88	54.00	13.12	vertical	Average
17944.80	45.65	6.80	52.45	74.00	21.55	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5825MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

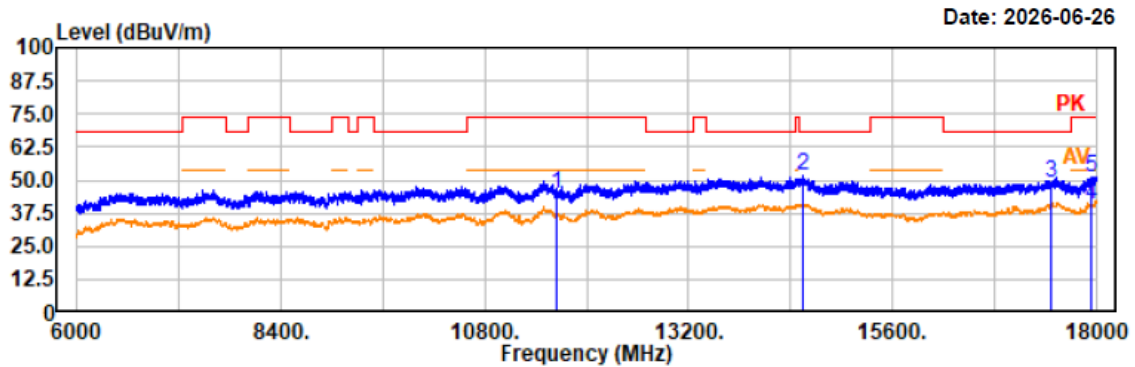


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11650.00	41.43	3.13	44.56	74.00	29.44	horizontal	Peak
14540.40	46.77	5.11	51.88	68.20	16.32	horizontal	Peak
17475.00	43.35	5.75	49.10	68.20	19.10	horizontal	Peak
17942.40	34.10	6.80	40.90	54.00	13.10	horizontal	Average
17942.40	44.57	6.80	51.37	74.00	22.63	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5825MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

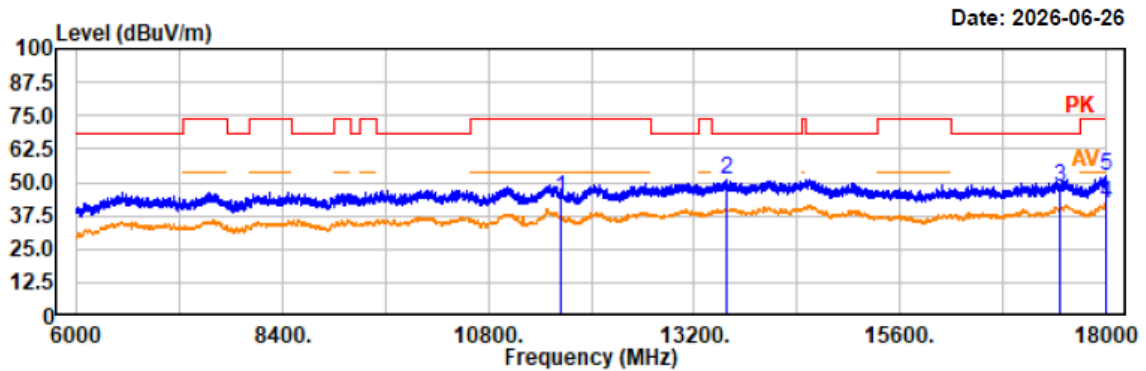

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11649.60	41.06	3.13	44.19	74.00	29.81	vertical	Peak
13573.20	46.35	4.67	51.02	68.20	17.18	vertical	Peak
17475.00	42.77	5.75	48.52	68.20	19.68	vertical	Peak
17995.20	35.02	6.84	41.86	54.00	12.14	vertical	Average
17995.20	45.36	6.84	52.20	74.00	21.80	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5745MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

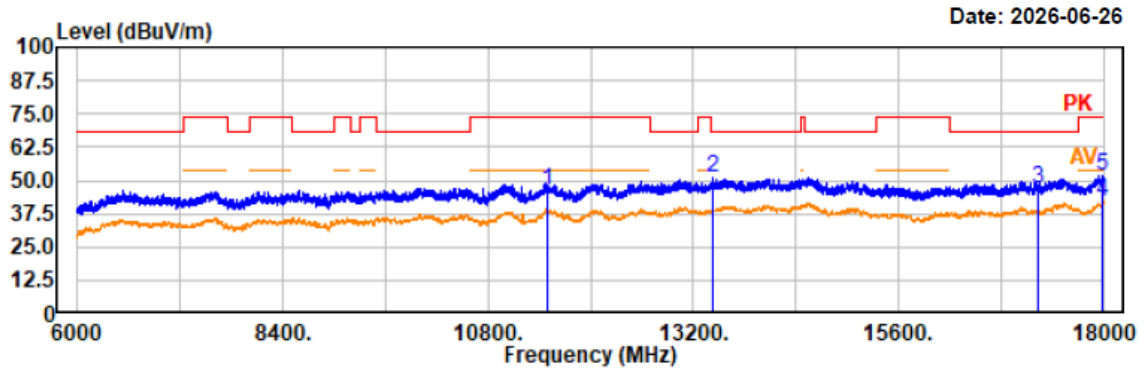

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	43.47	2.99	46.46	74.00	27.54	horizontal	Peak
13438.80	46.18	4.57	50.75	68.20	17.45	horizontal	Peak
17235.00	41.57	5.16	46.73	68.20	21.47	horizontal	Peak
17990.40	35.22	6.83	42.05	54.00	11.95	horizontal	Average
17990.40	45.11	6.83	51.94	74.00	22.06	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5745MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

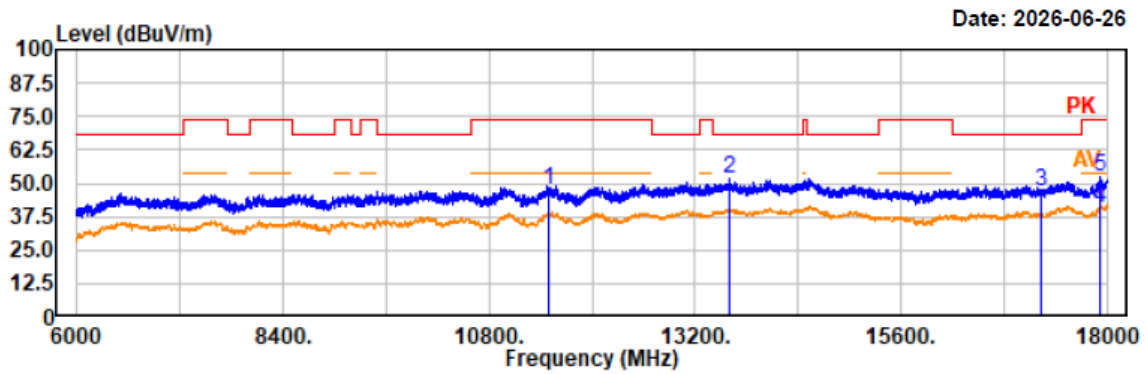


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	44.94	2.99	47.93	74.00	26.07	vertical	Peak
13603.20	47.34	4.68	52.02	68.20	16.18	vertical	Peak
17234.40	42.00	5.15	47.15	68.20	21.05	vertical	Peak
17928.00	33.66	6.80	40.46	54.00	13.54	vertical	Average
17928.00	45.29	6.80	52.09	74.00	21.91	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5785MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

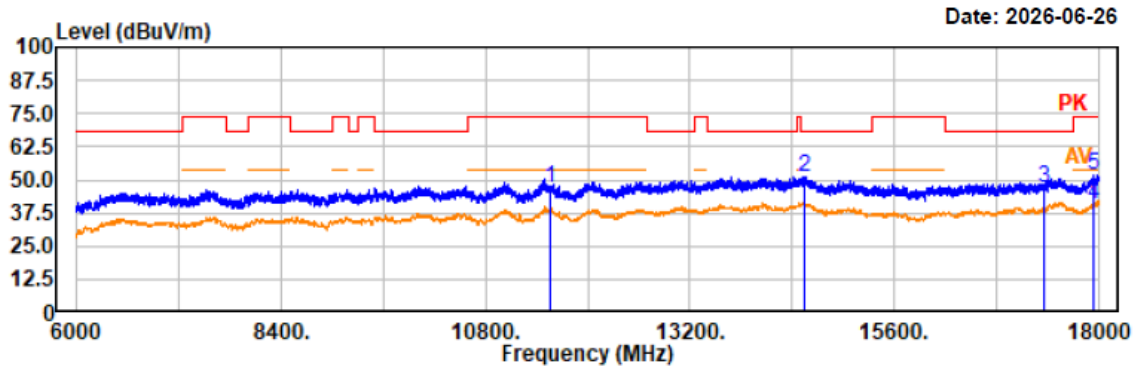


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	43.53	3.09	46.62	74.00	27.38	horizontal	Peak
14536.80	46.25	5.11	51.36	68.20	16.84	horizontal	Peak
17355.00	41.46	5.45	46.91	68.20	21.29	horizontal	Peak
17946.00	34.19	6.81	41.00	54.00	13.00	horizontal	Average
17946.00	45.21	6.81	52.02	74.00	21.98	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5785MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

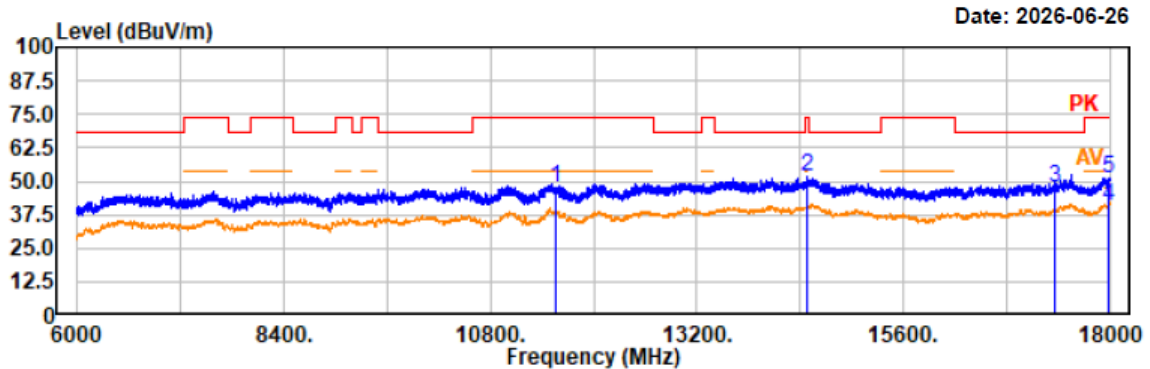


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	44.17	3.09	47.26	74.00	26.74	vertical	Peak
14472.00	46.27	5.20	51.47	74.00	22.53	vertical	Peak
17354.40	42.13	5.45	47.58	68.20	20.62	vertical	Peak
17983.20	33.87	6.83	40.70	54.00	13.30	vertical	Average
17983.20	44.44	6.83	51.27	74.00	22.73	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5825MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

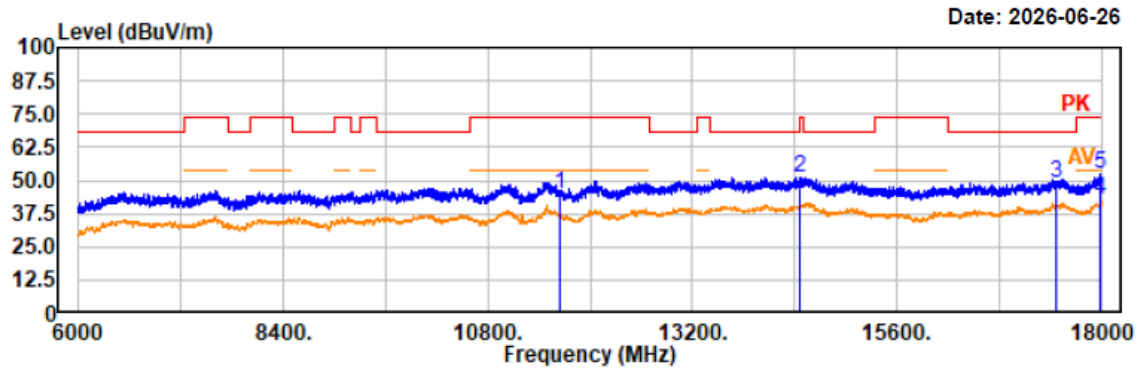

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11650.00	41.60	3.13	44.73	74.00	29.27	horizontal	Peak
14468.40	46.08	5.20	51.28	68.20	16.92	horizontal	Peak
17475.00	42.99	5.75	48.74	68.20	19.46	horizontal	Peak
17992.80	35.65	6.83	42.48	54.00	11.52	horizontal	Average
17992.80	45.34	6.83	52.17	74.00	21.83	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n20 5825MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

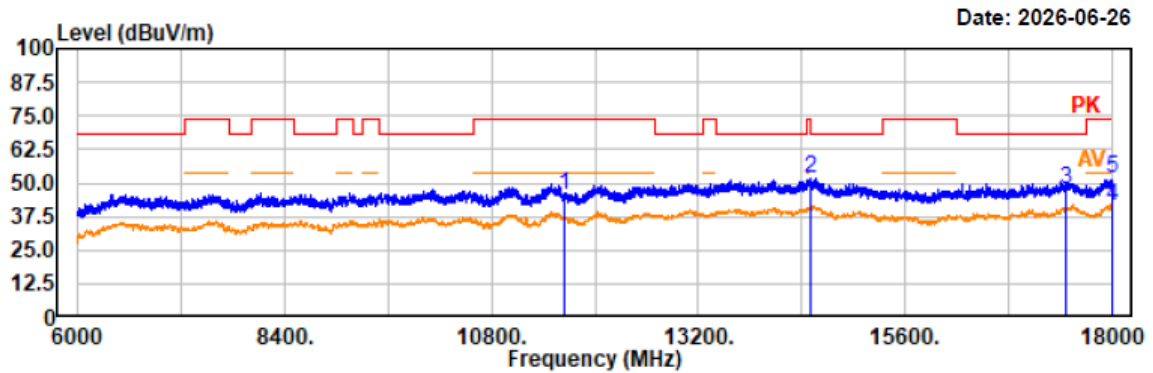

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11650.00	42.29	3.13	45.42	74.00	28.58	vertical	Peak
14498.40	46.46	5.16	51.62	74.00	22.38	vertical	Peak
17474.40	41.89	5.74	47.63	68.20	20.57	vertical	Peak
18000.00	34.63	6.84	41.47	54.00	12.53	vertical	Average
18000.00	44.82	6.84	51.66	74.00	22.34	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n40 5755MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

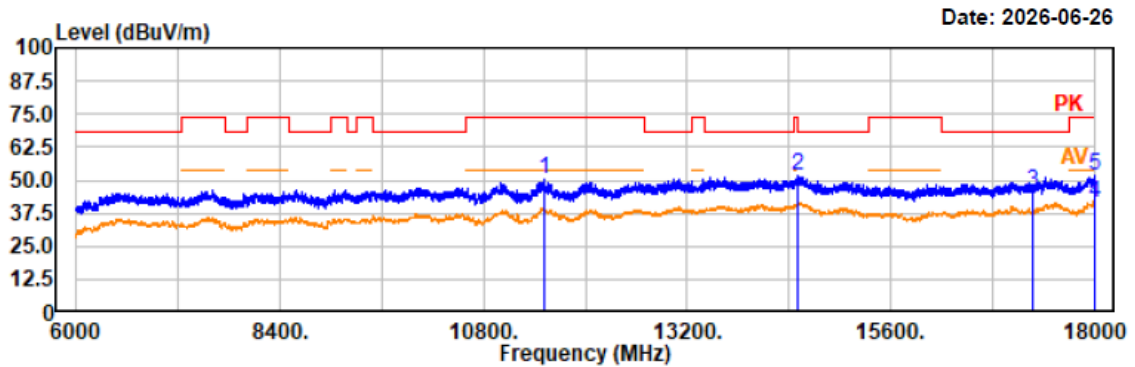

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11510.00	47.02	3.02	50.04	74.00	23.96	horizontal	Peak
14493.60	46.57	5.17	51.74	74.00	22.26	horizontal	Peak
17265.00	40.31	5.22	45.53	68.20	22.67	horizontal	Peak
17995.20	34.87	6.84	41.71	54.00	12.29	horizontal	Average
17995.20	44.61	6.84	51.45	74.00	22.55	horizontal	Peak

Project No.: 2607P41361E-RF
 Test Mode: 802.11n40 5755MHz
 EUT Model: AXIUM DX8
 Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

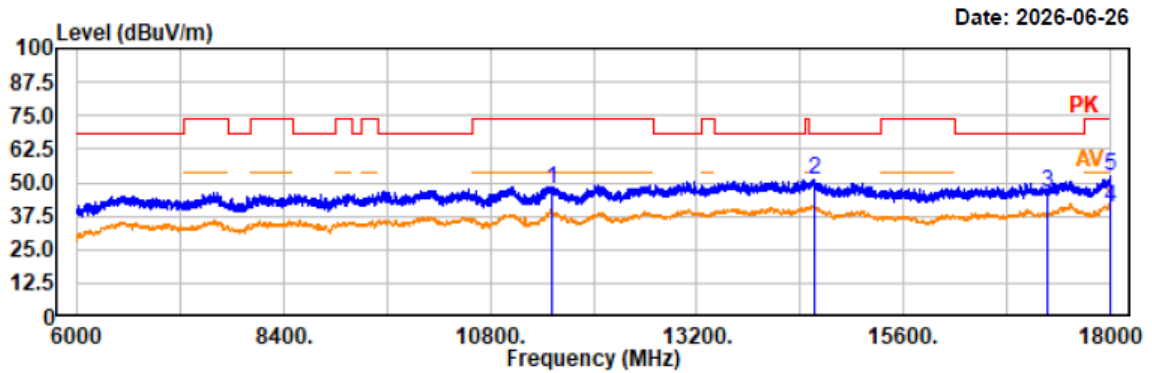


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11510.00	44.64	3.02	47.66	74.00	26.34	vertical	Peak
14559.60	46.20	5.09	51.29	68.20	16.91	vertical	Peak
17265.60	41.30	5.22	46.52	68.20	21.68	vertical	Peak
17996.40	33.80	6.84	40.64	54.00	13.36	vertical	Average
17996.40	45.24	6.84	52.08	74.00	21.92	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n40 5795MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

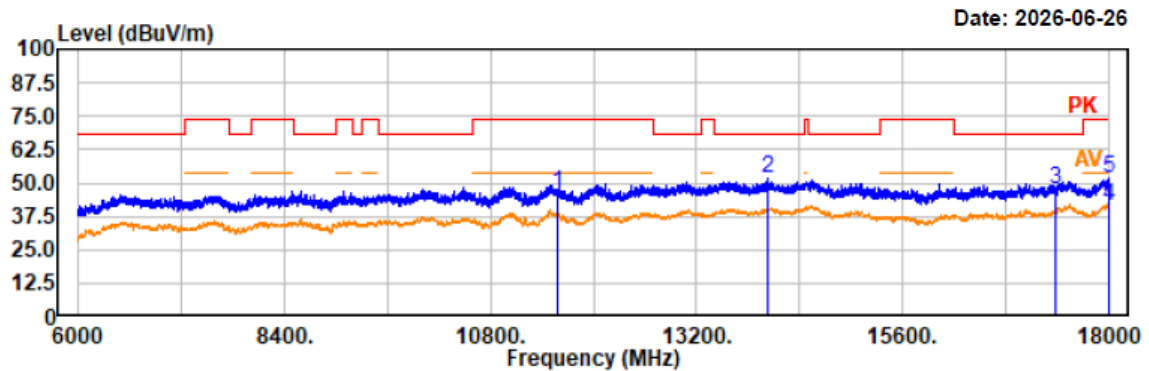

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11590.00	43.14	3.11	46.25	74.00	27.75	horizontal	Peak
14022.00	46.49	5.16	51.65	68.20	16.55	horizontal	Peak
17385.00	41.77	5.55	47.32	68.20	20.88	horizontal	Peak
17994.00	34.72	6.83	41.55	54.00	12.45	horizontal	Average
17994.00	45.13	6.83	51.96	74.00	22.04	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11n40 5795MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

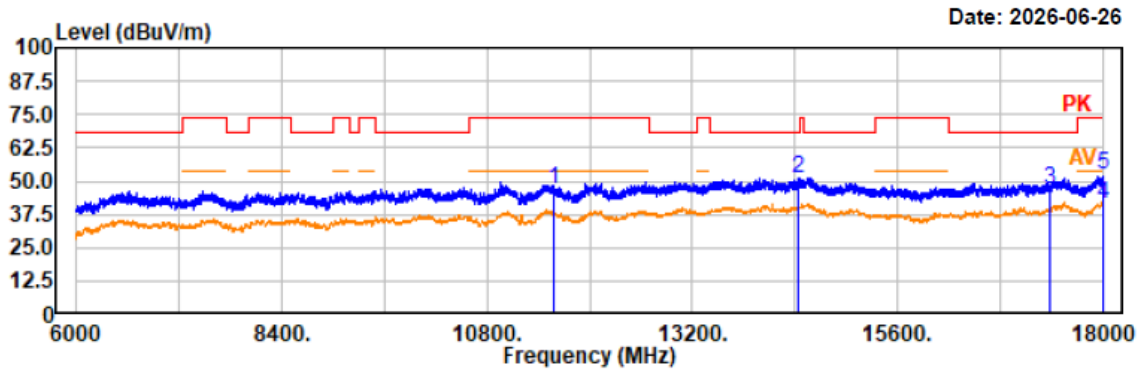

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11590.00	43.49	3.11	46.60	74.00	27.40	vertical	Peak
14430.00	46.09	5.26	51.35	68.20	16.85	vertical	Peak
17385.60	41.49	5.55	47.04	68.20	21.16	vertical	Peak
18000.00	34.30	6.84	41.14	54.00	12.86	vertical	Average
18000.00	45.28	6.84	52.12	74.00	21.88	vertical	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11ac80 5775MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

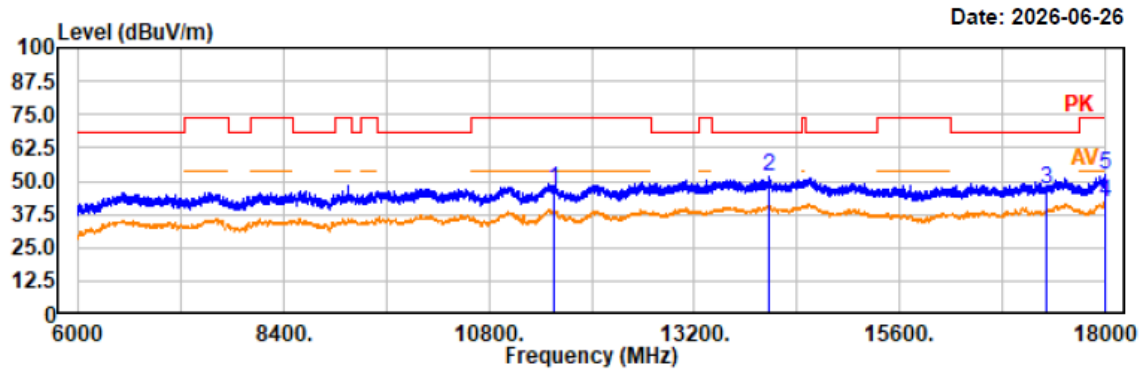


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11550.00	44.02	3.06	47.08	74.00	26.92	horizontal	Peak
14079.60	46.15	5.26	51.41	68.20	16.79	horizontal	Peak
17325.00	41.51	5.36	46.87	68.20	21.33	horizontal	Peak
17995.20	35.41	6.84	42.25	54.00	11.75	horizontal	Average
17995.20	45.29	6.84	52.13	74.00	21.87	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11ac80 5775MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 22.2°C/60%/100.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

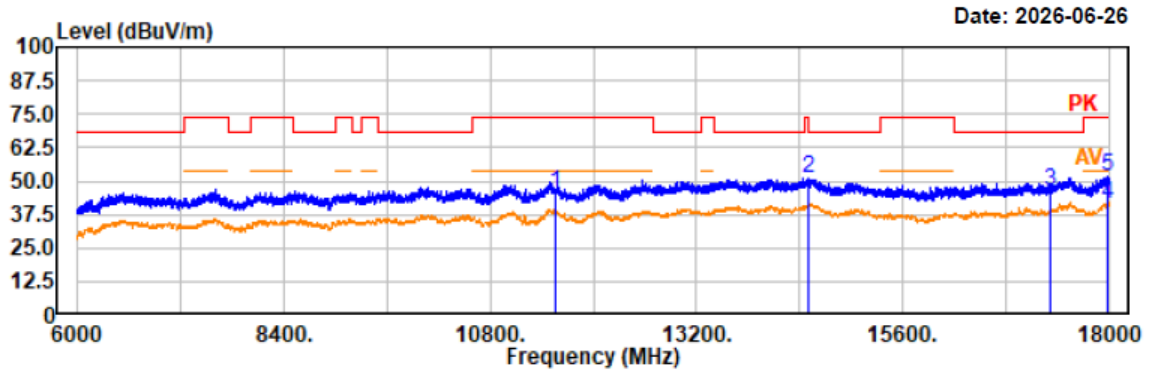

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11550.00	42.46	3.06	45.52	74.00	28.48	vertical	Peak
14494.80	45.74	5.17	50.91	74.00	23.09	vertical	Peak
17325.60	41.00	5.36	46.36	68.20	21.84	vertical	Peak
17990.40	34.67	6.83	41.50	54.00	12.50	vertical	Average
17990.40	44.90	6.83	51.73	74.00	22.27	vertical	Peak


5) 18-40GHz

Note: The maximum output power mode: WiFi 802.11a 5745MHz was tested.

Configuration 1#(Scanner variant)

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5745MHz
EUT Model: AXIUM DX8
Test distance: 1.5m

Temp/Humi/ATM: 22.1°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

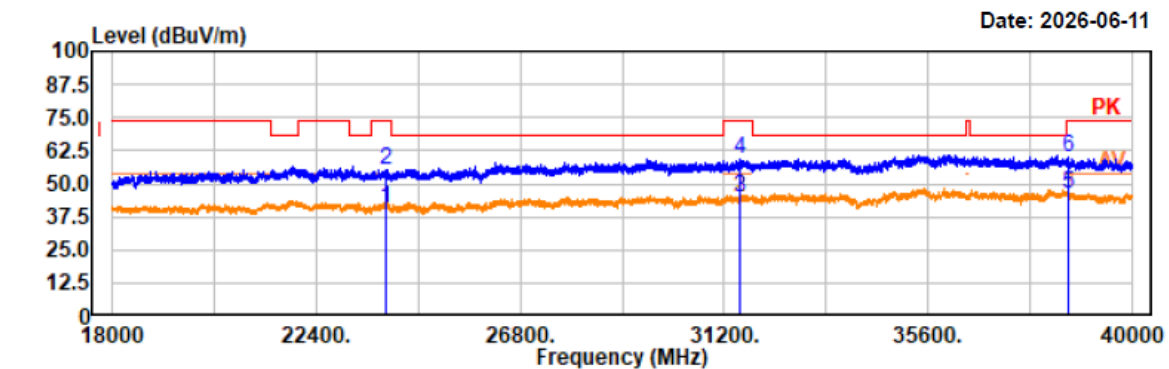


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
23907.00	35.34	5.37	40.71	54.00	13.29	horizontal	Average
23907.00	49.84	5.37	55.21	74.00	18.79	horizontal	Peak
31549.80	37.11	7.64	44.75	54.00	9.25	horizontal	Average
31549.80	51.51	7.64	59.15	74.00	14.85	horizontal	Peak
38629.40	36.31	9.56	45.87	54.00	8.13	horizontal	Average
38629.40	50.39	9.56	59.95	74.00	14.05	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5745MHz
EUT Model: AXIUM DX8
Test distance: 1.5m

Temp/Humi/ATM: 22.1°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

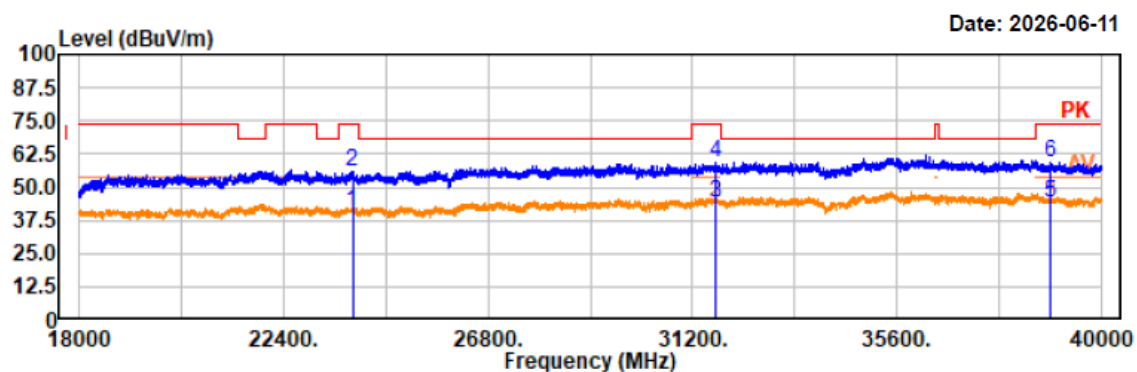

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto


AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
23880.60	35.66	5.32	40.98	54.00	13.02	vertical	Average
23880.60	50.52	5.32	55.84	74.00	18.16	vertical	Peak
31708.20	36.95	7.35	44.30	54.00	9.70	vertical	Average
31708.20	51.63	7.35	58.98	74.00	15.02	vertical	Peak
38893.40	35.15	9.29	44.44	54.00	9.56	vertical	Average
38893.40	50.04	9.29	59.33	74.00	14.67	vertical	Peak

Restricted Bands Emissions:**Configuration 1#(Scanner variant)****Band 1:**

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5180MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.4°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

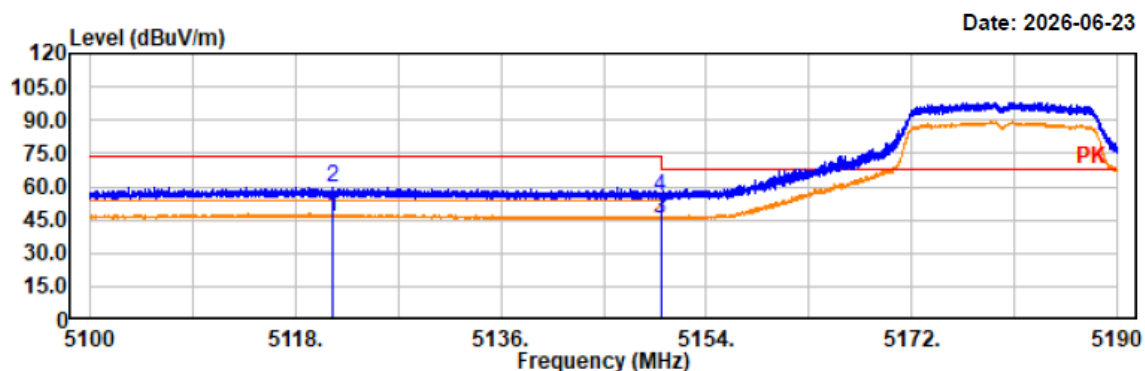
**Trace: 1**

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5121.24	35.38	11.11	46.49	54.00	7.51	horizontal	Average
5121.24	48.65	11.11	59.76	74.00	14.24	horizontal	Peak
5150.00	34.63	11.16	45.79	54.00	8.21	horizontal	Average
5150.00	44.27	11.16	55.43	74.00	18.57	horizontal	Peak

Project No.: 2607P41361E-RF
Test Mode: 802.11a 5180MHz
EUT Model: AXIUM DX8
Test distance: 3m

Temp/Humi/ATM: 23.4°C/57%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

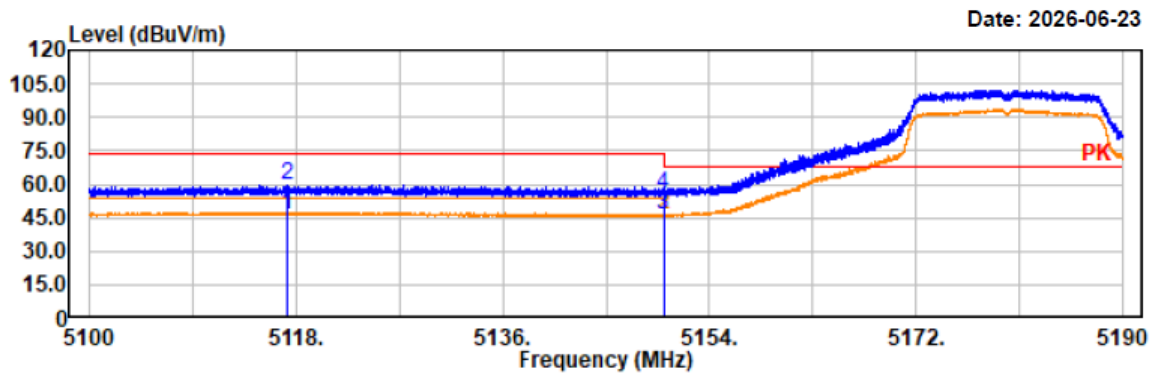

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5117.21	35.65	11.10	46.75	54.00	7.25	vertical	Average
5117.21	48.41	11.10	59.51	74.00	14.49	vertical	Peak
5150.00	35.09	11.16	46.25	54.00	7.75	vertical	Average
5150.00	44.24	11.16	55.40	74.00	18.60	vertical	Peak