



FCC PART 27 FCC PART 22H, PART 24E TEST REPORT

For

INGENICO

9 Avenue de la gare - Rovaltain TGV, BP25156, Valence Cedex 9, 26958, France

FCC ID: XKB-DX8WU


Report Type: Original Report	Product Name: Smart POS Terminal
Report Number:	2607P41361E-RF-04
Report Date:	2026-07-25
Reviewed By:	Ash Lin 
Approved By:	Miles Chen 
Prepared By:	Bay Area Compliance Laboratories Corp. (Xiamen) Unit 102, No. 902 Meifeng South Road, Binhai West Avenue Science and Technology Innovation Park, Torch High Tech Zone Xiamen, People's Republic of China Tel: +86-592-3200111 www.baclcorp.com.cn

TABLE OF CONTENTS

REPORT REVISION HISTORY	3
1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 ★ANTENNA INFORMATION.....	5
1.3 OBJECTIVE	6
1.4 MEASUREMENT UNCERTAINTY	6
1.5 TEST FACILITY	6
2. SYSTEM TEST CONFIGURATION.....	7
2.1 JUSTIFICATION	7
2.2 CHANNEL LIST	7
2.3 EUT OPERATION CONDITION:.....	8
2.4 SUPPORT EQUIPMENT LIST AND DETAILS.....	8
2.5 EXTERNAL I/O CABLE.....	8
2.6 BLOCK DIAGRAM OF TEST SETUP	9
3. SUMMARY OF TEST RESULTS	10
4. TEST EQUIPMENT LIST	13
5. REQUIREMENTS AND TEST PROCEDURES	14
5.1 APPLICABLE STANDARD FOR PART 22 SUBPART H:	14
5.1.1 RF Output Power	14
5.1.2 Spurious Emissions	14
5.1.3 Frequency stability.....	14
5.2 APPLICABLE STANDARD FOR PART 24 SUBPART E:.....	15
5.2.1 RF Output Power	15
5.2.2 Spurious Emissions	15
5.2.3 Frequency stability.....	15
5.3 APPLICABLE STANDARD FOR PART 27:	16
5.3.1 RF Output Power	16
5.3.2 Spurious Emissions	17
5.3.3 Frequency stability.....	18
5.4 TEST METHOD:.....	19
5.4.1 Transmitter output power, <i>e.r.p.</i> and <i>e.i.r.p.</i>	19
5.4.2 Transmitter unwanted emissions- Radiated Spurious emissions.....	20
6. TEST DATA AND RESULT	22
6.1 SPOT CHECK WITH MAXIMUM CONDUCTED OUTPUT POWER.....	22
6.2 EIRP/ERP CALCULATED AND RESULTS.....	32
TEST DATA:	32
6.3 RADIATED SPURIOUS EMISSIONS	37
6.3.1 30MHz~1GHz	37
6.3.2 Above 1GHz	45
7. EUT PHOTOGRAPHS.....	53
8. TEST SETUP PHOTOGRAPHS	54

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	2607P41361E-RF-04	R1V1	2026-07-25	Initial Issue

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

Applicant:	INGENICO			
Product Name:	Smart POS Terminal			
Tested Model:	AXIUM DX8			
Multiple Model(s):	N/A			
Trade Name:				
Power Supply:	DC 5V from Adapter or DC 7.2V from Battery			
RF Function:	GPRS, EDGE, WCDMA, LTE			
Operating Band/Frequency:	GSM850: 824-849 MHz(TX), 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX), 1930-1990MHz(RX) WCDMA Band 2:1850-1910 MHz(TX), 1930-1990MHz(RX) WCDMA Band 4: 1710-1755 MHz(TX), 2110-2155MHz(RX) WCDMA Band 5: 824-849 MHz(TX), 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX), 1930-1990MHz(RX) LTE Band 4: 1710-1755 MHz(TX), 2110-2155MHz(RX) LTE Band 5: 824-849 MHz(TX), 869-894 MHz(RX) LTE Band 7: 2500-2570 MHz(TX), 2620-2690 MHz(RX) LTE Band 12: 699-716 MHz(TX), 729-746 MHz(RX) LTE Band 17: 704-716 MHz(TX), 734-746 MHz(RX) LTE Band 38: 2570-2620 MHz(TX), 2570-2620 MHz(RX) LTE Band 41: 2496-2690 MHz(TX), 2496-2690 MHz(RX) LTE Band 66: 1710-1780 MHz(TX), 2110-2180 MHz(RX)			
Modulation Type:	GSM: GMSK, 8PSK WCDMA: BPSK(Uplink), HSDPA:QPSK(Uplink), HSUPA:QPSK(Uplink) HSPA+:16QAM(Uplink) LTE: QPSK, 16QAM			
Serial Number:	For RF Conducted: 3G1Q-7 For Radiated Spurious Emissions Below 1GHz test: 3G1Q-6 (Configuration 1#) For Radiated Spurious Emissions Above 1GHz test: 3G1Q-5 (Configuration 1#)			
EUT Received Date:	2026-01-12			
EUT Received Status:	Good			
<i>Note:</i> <i>1. The EUT contains a variety of configurations, the difference of the configurations show as below:</i>				
	Model	Configuration	Configuration Difference	
			2 nd display	scanner
	AXIUM DX8	1 (Scanner variant)	×	√
		2 (2 nd display variant)	√	×
3 (Basic variant)		×	×	

Note: Per 15B report, test with Adapter 1# & Battery 6# & Screen 3# & Configuration 1# was the worst for Radiated Spurious Emissions Below 1GHz and test with Adapter 1# & Battery 6# & Screen 1# & Configuration 1# was the worst for Radiated Spurious Emissions Above 1GHz, so only performed it this report.

Adapter Information:

No.	Model	Manufacturer	Parameters
Adapter 1# (KLEC - EU/UK/US)	KL-WD050200U	Xiamen Keli Electronics Co.,Ltd	Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 5.0V, 2.0A, 10.0W
Adapter 2# (KLEC - US)	SW-0983	Xiamen Keli Electronics Co.,Ltd	Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 5.0V, 2.0A
Adapter 3# (Aohai - US)	A319-050200U-US2	Jiangxi Aohai Technology Co.,Ltd	Input: AC 100-240V, 50/60Hz, Max 0.3A Output: DC 5.0V, 2.0A
Adapter 4# (KEYU - EU/UK/US)	KA1602-0502000DEU	Shenzhen Keyu Power Supply Technology Co.,Ltd.	Input: AC 100-240V, 50/60Hz, 0.35A Output: DC 5.0V, 2.0A, 10.0W
Adapter 5# (Ktec - EU/UK/US)	KSA-10Q-050200D5U	KTEC GLOBAL Co., Ltd.	Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 5.0V, 2.0A, 10.0W

Battery Information:

No.	Model	Manufacturer	Specification
Battery 1#	LD18650M	SCUD (Fujian) Electronics Co.,Ltd	DC 7.2V 2600mAh/18.72Wh
Battery 2#	LD18650K	SCUD (Fujian) Electronics Co.,Ltd	DC 7.2V 3400mAh/24.48Wh
Battery 3#	LD18650K-1	SCUD (Fujian) Electronics Co.,Ltd	DC 7.2V 3350mAh/24.12Wh
Battery 4#	LD18650M	Xinyu Ganfeng Electronics Co.,Ltd.	DC 7.2V 2600mAh/18.72Wh
Battery 5#	LD18650K-1	Xinyu Ganfeng Electronics Co.,Ltd.	DC 7.2V 3350mAh/24.12Wh
Battery 6#	LD18650M	Dongguan Veken Battery Co., Ltd.	DC 7.2V 2600mAh/18.72Wh

Screen Information:

No.	Ingenico Model	Manufacturer
Screen 1#	MDT0656A	Shenzhen Great Prospect Optoelectronics Co.,Ltd.
Screen 2#	MDT0656A	Tianma Microelectronics Co., Ltd.
Screen 3#	MDT0656A	GuangDonghongbosheng Optoelectronic Technology Co;Ltd

1.2 ★Antenna Information

Antenna Type	Operation Bands	Antenna Frequency Range (MHz)	Antenna Gain(G _T) (dBi)	L _C (dB)
Monopole	GSM850	824-849	0.07	0
	PCS1900	1850-1910	1.26	0
	WCDMA B2	1850-1910	1.26	0
	WCDMA B4	1710-1755	1.83	0
	WCDMA B5	824-849	0.07	0
	LTE B2	1850-1910	1.26	0
	LTE B4	1710-1755	1.83	0
	LTE B5	824-849	0.07	0
	LTE B7	2500-2570	0.8	0
	LTE B12	699-716	-1.96	0
	LTE B17	704-716	-1.96	0
	LTE B38	2570-2620	0.46	0
	LTE B41	2496-2690	1.54	0

	LTE B66	1710-1780	2.13	0
Note: Lc= Signal Attenuation in the connecting cable between the transmitter and antenna, in dB.				

1.3 Objective

This type approval report is prepared for *INGENICO* in accordance with Part 2, Part 22-Subpart H and Part 24-Subpart E, Part 27 of the Federal Communication Commission's rules.

1.4 Measurement Uncertainty

Item		U _{lab}
Radiated Spurious Emission	30MHz~1GHz	4.68dB
	1GHz~18GHz	5.00dB
	18GHz~26.5GHz	4.90dB
	26.5GHz~40GHz	4.90dB
Transmitter Conducted Power(Conducted RF power)		±0.43 dB
Temperature		±1.0°C
Humidity		±5%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

1.5 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Xiamen) to collect test data is located on Unit 102, No. 902 Meifeng South Road, Binhai West Avenue Science and Technology Innovation Park, Torch High Tech Zone Xiamen, People's Republic of China.

Bay Area Compliance Laboratories Corp. (Xiamen) Lab is accredited to ISO/IEC 17025 by A2LA (Certificate Number: 7134.01) and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN1384.

2. SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT was configured for testing according to ANSI C63.26-2015.

The final qualification test was performed with the EUT operating at normal mode.

2.2 Channel List

The device operates on GSM850, PCS1900, WCDMA Band 2/4/5, LTE Band 2/4/5/7/12/17/38/41/66; test was performed with channels as below table:

Frequency Bands	Bandwidth (MHz)	Test Frequency(MHz)		
		Low	Middle	High
GSM850		824.2	836.6	848.8
PCS1900		1850.2	1880	1909.8
WCDMA Band 2		1852.4	1880.0	1907.6
WCDMA Band 4		1712.4	1732.6	1752.6
WCDMA Band 5		826.4	836.6	846.6
LTE Band 2	1.4	1850.7	1880	1909.3
	3	1851.5	1880	1908.5
	5	1852.5	1880	1907.5
	10	1855	1880	1905
	15	1857.5	1880	1902.5
	20	1860	1880	1900
LTE Band 4	1.4	1710.7	1732.5	1754.3
	3	1711.5	1732.5	1753.5
	5	1712.5	1732.5	1752.5
	10	1715	1732.5	1750
	15	1717.5	1732.5	1747.5
	20	1720	1732.5	1745
LTE Band 5	1.4	824.7	836.5	848.3
	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829	836.5	844
LTE Band 7	5	2502.5	2535	2567.5
	10	2505	2535	2565
	15	2507.5	2535	2562.5
	20	2510	2535	2560
LTE Band 12	1.4	699.7	707.5	715.3
	3	700.5	707.5	714.5
	5	701.5	707.5	713.5
	10	704.0	707.5	711.0

Frequency Bands	Bandwidth (MHz)	Test Frequency(MHz)		
		Low	Middle	High
LTE Band 17	5	706.5	710	713.5
	10	709	710	711
LTE Band 38	5	2572.5	2595	2617.5
	10	2575	2595	2615
	15	2577.5	2595	2612.5
	20	2580	2595	2610
LTE Band 41	5	2498.5	2593	2687.5
	10	2501	2593	2685
	15	2503.5	2593	2682.5
	20	2506	2593	2680
LTE Band 66	1.4	1710.7	1745	1779.3
	3	1711.5	1745	1778.5
	5	1712.5	1745	1777.5
	10	1715	1745	1775
	15	1717.5	1745	1772.5
	20	1720	1745	1770

2.3 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in each operation mode.
Equipment Modifications:	No
EUT Exercise Software:	No

2.4 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Wideband Radio Communication Tester	CMW500	122920
Unknown	Antenna	Unknown	Unknown


2.5 External I/O Cable

Cable Description	Length (m)	From Port	To
Coaxial Cable	10	Antenna	CMW500


2.6 Block Diagram of Test Setup

For Radiated Spurious Emission

Below 1GHz:

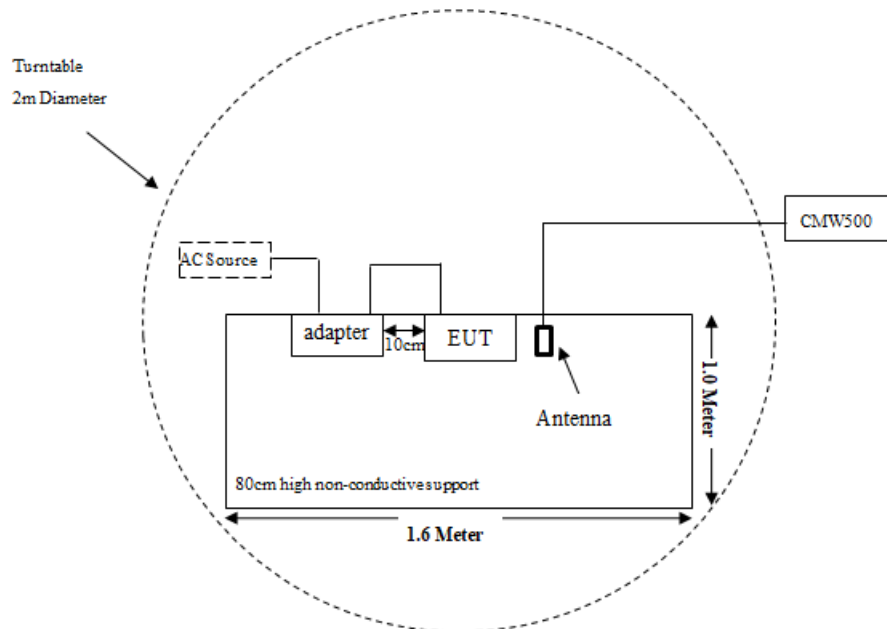

Above 1GHz:

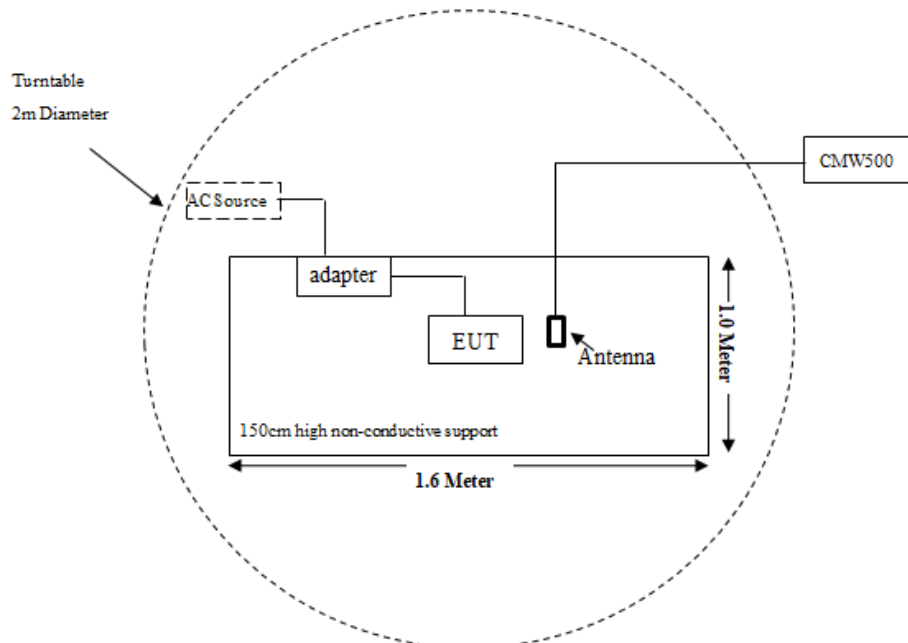

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result	Remark
FCC§2.1046; § 22.913; §24.232; §27.50	RF Output Power	Reporting	See Note 1
FCC§2.1046; § 24.232; §27.50; §22.913	Peak-to-average Ratio(PAR)	-	See Note 2
FCC§2.1049; §22.905;§22.917; §24.238; §27.53	Occupied Bandwidth	-	See Note 3
FCC§2.1051; §22.917; §24.238; §27.53	Spurious Emissions at Antenna Terminal	-	See Note 4
FCC§2.1051; §24.238; §22.917; §27.53	Out of band emission, Band Edge	-	See Note 4
FCC§2.1055; §27.54; §24.235; §22.355	Frequency stability vs. temperature & Frequency stability vs. voltage Compliance	-	See Note 5
FCC§2.1053; §22.917; §27.53; §24.238	Radiated Spurious Emission	Compliant	-

Note:

The device built in a certified module (Model: ING-A01-1-WU, FCC ID: XKB-INGA01WU,. Per spot check, the RF parameters are identical with the original module report, therefore, the RF conducted test items please refer to module report SZCR2505001820MO*, which was issued by SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

The Bay Area Compliance Laboratories Corp.(Xiamen) is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report.

Note 1:

Please refer to Appendix report SZCR2505001820MO* of module report SZCR250500182006* & SZCR250500182007* & SZCR250500182008*

Appendix_GSM_band_GSM850 Page 1
Appendix_GSM_band_PCS1900 Page 1,
Appendix_WCDMA_band_2 page 1,
Appendix_WCDMA_band_4 page 1,
Appendix_WCDMA_band_5 page 1,
Appendix_LTE_band_2 page 1-6,
Appendix_LTE_band_4 page 1-6,
Appendix_LTE_band_5 page 1-4,
Appendix_LTE_band_7 page 1-4,
Appendix_LTE_band_12 page 1-4,
Appendix_LTE_band_17 page 1-2,
Appendix_LTE_band_38 page 1-4,
Appendix_LTE_band_41 page 1-4,
Appendix_LTE_band_66 page 1-6,

Note 2:

Please refer to Appendix report SZCR2505001820MO* of module report SZCR250500182006* & SZCR250500182007* & SZCR250500182008*

Appendix_GSM_band_GSM850 Page 11-14,
Appendix_GSM_band_PCS1900 Page 11-14,
Appendix_WCDMA_band_2 page 15-20,
Appendix_WCDMA_band_4 page 15-20,
Appendix_WCDMA_band_5 page 15-20,
Appendix_LTE_band_2 page 21-22,
Appendix_LTE_band_4 page 21-22,
Appendix_LTE_band_5 page 15-16,
Appendix_LTE_band_7 page 15-16,
Appendix_LTE_band_12 page 15-16,
Appendix_LTE_band_17 page 9-10,
Appendix_LTE_band_38 page 15-16,
Appendix_LTE_band_41 page 15-16,
Appendix_LTE_band_66 page 21-22.

Note 3:

Please refer to Appendix report SZCR2505001820MO* of module report SZCR250500182006* & SZCR250500182007* & SZCR250500182008*

Appendix_GSM_band_GSM850 Page 4-10,
Appendix_GSM_band_PCS1900 Page 4-10,
Appendix_WCDMA_band_2 page 4-14,
Appendix_WCDMA_band_4 page 4-14,
Appendix_WCDMA_band_5 page 4-14,
Appendix_LTE_band_2 page 8-20,
Appendix_LTE_band_4 page 8-20,
Appendix_LTE_band_5 page 6-14,
Appendix_LTE_band_7 page 6-14,
Appendix_LTE_band_12 page 6-14,
Appendix_LTE_band_17 page 4-8,
Appendix_LTE_band_38 page 6-14,
Appendix_LTE_band_41 page 6-14,
Appendix_LTE_band_66 page 8-20.

Note 4:

Please refer to Appendix report SZCR2505001820MO* of module report SZCR250500182006* & SZCR250500182007* & SZCR250500182008*

Appendix_GSM_band_GSM850 Page 15-20,
Appendix_GSM_band_PCS1900 Page 15-23,
Appendix_WCDMA_band_2 page 21-33,
Appendix_WCDMA_band_4 page 21-33,
Appendix_WCDMA_band_5 page 21-29,
Appendix_LTE_band_2 page 23-54,
Appendix_LTE_band_4 page 23-54,
Appendix_LTE_band_5 page 17-34,
Appendix_LTE_band_7 page 17-34,
Appendix_LTE_band_12 page 17-34,
Appendix_LTE_band_17 page 11-19,
Appendix_LTE_band_38 page 17-46,
Appendix_LTE_band_41 page 17-46,
Appendix_LTE_band_66 page 23-54.

Note 5:

Please refer to Appendix report SZCR2505001820MO* of module report SZCR250500182006* & SZCR250500182007* & SZCR250500182008*

Appendix_GSM_band_GSM850 Page 2-3,
Appendix_GSM_band_PCS1900 Page 2-3,
Appendix_WCDMA_band_2 page 2-3,
Appendix_WCDMA_band_4 page 2-3,
Appendix_WCDMA_band_5 page 2-3,
Appendix_LTE_band_2 page 7,
Appendix_LTE_band_4 page 7,
Appendix_LTE_band_5 page 5,
Appendix_LTE_band_7 page 5,
Appendix_LTE_band_12 page 5,
Appendix_LTE_band_17 page 3,
Appendix_LTE_band_38 page 5,
Appendix_LTE_band_41 page 5,
Appendix_LTE_band_66 page 7.

4. Test Equipment List

Test Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Spurious Emissions 30 MHz to 1 GHz					
EMI Test Receiver	Rohde & Schwarz	ESR	103103	2026/1/21	2027/1/20
Antenna	Sunol Sciences	JB6	A122022-5	2023/7/27	2026/7/26
Amplifier	Sonoma	310B	120903	2026/1/22	2027/1/21
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC002	2026/1/20	2027/1/19
Coaxial Cable	XINHANGWEIBO	XH460B-N-2M	CC006	2026/1/20	2027/1/19
Coaxial Cable	XINHANGWEIBO	XH460B-N-12M	CC007	2026/1/20	2027/1/19
Microwave Analog Signal Generator	Agilent	N5183A	MY47420335	2026/1/21	2027/1/20
Dipole antenna	EMCO	3121C	9209-860	N/A	N/A
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	122920	2026/1/22	2027/1/21
Radiated Spurious Emissions Above 1 GHz					
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102051	2026/1/21	2027/1/20
Filter Switch Unit	Decentest	DT7220FSU	DS79904	2026/1/20	2027/1/19
Multiplex Switch Test Control Set	Decentest	DT7220SCU	DS79901	2026/1/20	2027/1/19
Horn Antenna	EMCO	3115	9002-3355	2024/11/19	2027/11/18
Double Ridge Guide Horn Antenna	A.H.Systems	SAS-571	1980	2023/7/28	2026/7/27
Preamplifier	GLOBAL	1313-A100M18G	4121301	2026/1/14	2027/1/13
Coaxial Cable	XINHANGWEIBO	XH800A-N-6M	CC003	2026/1/20	2027/1/19
Coaxial Cable	XINHANGWEIBO	XH800A-N-1M	CC005	2026/1/20	2027/1/19
Horn Antenna	EMCO	3116	9407-2232	2023/7/31	2026/7/30
Preamplifier	A.H.Systems	PAM-1840	200	2026/1/20	2027/1/19
Coaxial Cable	XINHANGWEIBO	XH360A-2.92-3M	CC008	2026/1/20	2027/1/19
Coaxial Cable	XINHANGWEIBO	XH360A-2.92-1M	CC009	2026/1/20	2027/1/19
Microwave Analog Signal Generator	Agilent	N5183A	MY47420335	2026/1/21	2027/1/20
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	122920	2026/1/22	2027/1/20
Waveguide Standard Gain Horn Antenna	PASTERNAK	PE9852/2F-20	11 20	2024/9/13	2027/9/12
RF Conducted Test					
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	122920	2026/1/22	2027/1/20
Attenuator	YISAIGE	SMA-JK-10dB	N/A	Each time	N/A
Coaxial Cable	Lianxun	RF113	N/A	Each time	N/A
Test Software	JD	JDAutoTestSystem	1.0.0.3813	N/A	N/A

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Xiamen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

5. REQUIREMENTS AND TEST PROCEDURES

5.1 Applicable Standard for Part 22 Subpart H:

5.1.1 RF Output Power

FCC §22.913

(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

(d) Power measurement. Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:

- (1) A Commission-approved average power technique (see FCC Laboratory's Knowledge Database); or
- (2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

5.1.2 Spurious Emissions

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

- (1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

5.1.3 Frequency stability

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

5.2 Applicable Standard for Part 24 Subpart E:

5.2.1 RF Output Power

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to average ratio (PAR) of the transmission may not exceed 13 dB.

5.2.2 Spurious Emissions

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section. 4.2.3 Frequency stability FCC §24.235 The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

5.2.3 Frequency stability

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

5.3 Applicable Standard For Part 27:

5.3.1 RF Output Power

FCC §27.50

(a) The following power limits and related requirements apply to stations transmitting in the 2305-2320 MHz band or the 2345-2360 MHz band.

(3) *Mobile and portable stations.*

(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.

(iii) Automatic transmit power control. Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.

(iv) Prohibition on external vehicle-mounted antennas. The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(b) The following power and antenna height limits apply to transmitters operating in the 746-758 MHz, 775-788 MHz and 805-806 MHz bands:

(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c) The following power and antenna height requirements apply to stations transmitting in the 600 MHz band and the 698-746 MHz band:

(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d) The following power and antenna height requirements apply to stations transmitting in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz and 2180-2200 MHz bands:

(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(5) Equipment employed must be authorized in accordance with the provisions of § 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph(d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

- (k) The following power requirements apply to stations transmitting in the 3450-3550 MHz band:
- (3) Mobile devices are limited to 1 Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.
- (4) Equipment employed must be authorized in accordance with the provisions of § 27.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (k)(5) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

5.3.2 Spurious Emissions

FCC §27.53

- (a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:
- (4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

- (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) **General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log(P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below

2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

5.3.3 Frequency stability

FCC §27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

5.4 Test Method:

5.4.1 Transmitter output power, e.r.p. and e.i.r.p

According to ANSI C63.26-2015:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

Where:

ERP or EIRP=effective radiated power or equivalent isotropically radiated power, respectively


(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup Block:

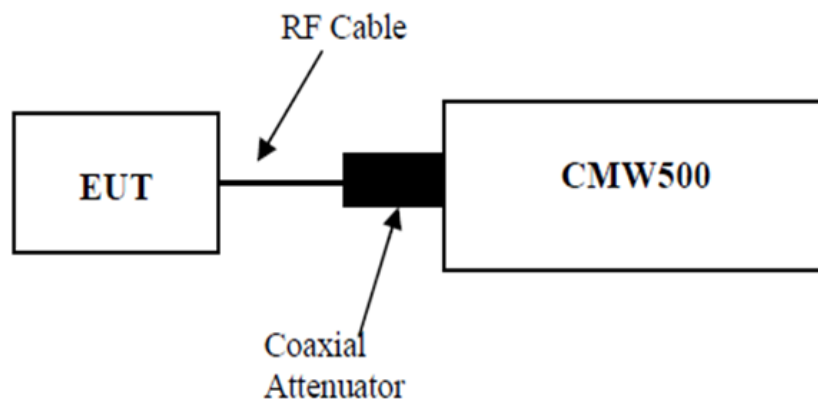

Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

5.4.2 Transmitter unwanted emissions- Radiated Spurious emissions

According to ANSI C63.26-2015 Section 5.5.3:

Test setup:

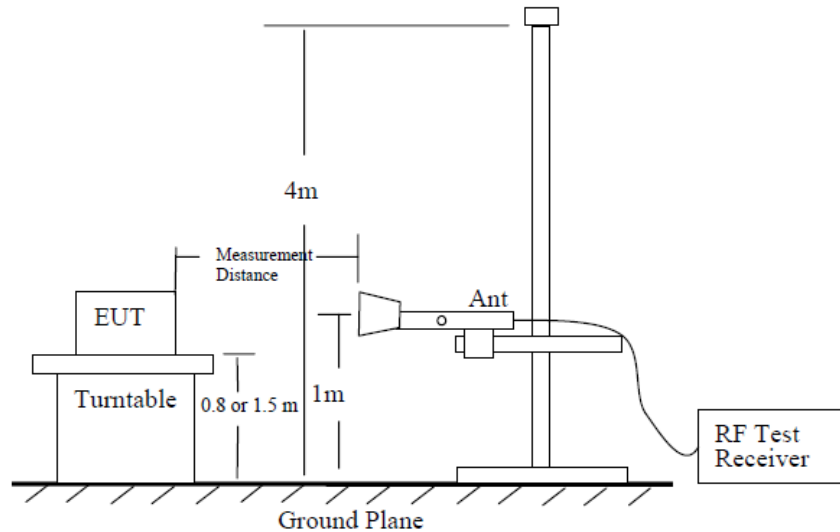


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

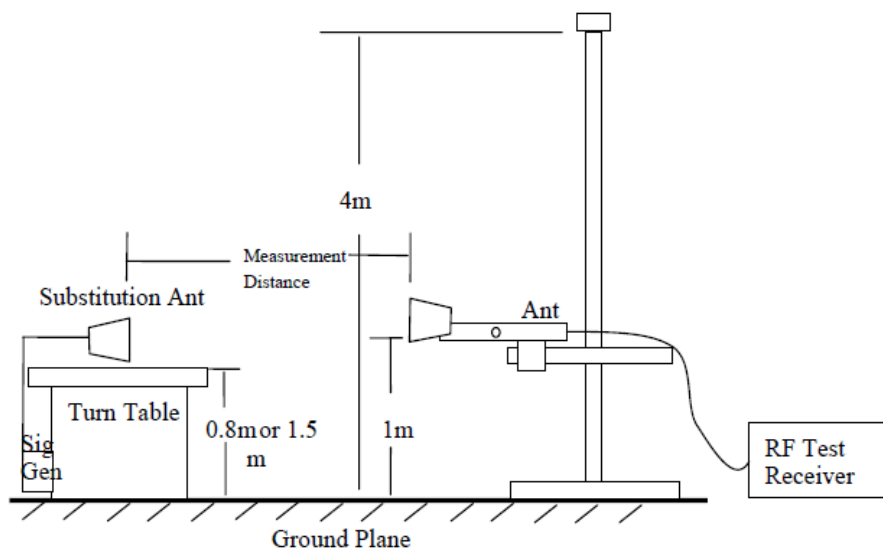


Figure 7—Substitution method set-up for radiated emission

Test Procedure:

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

where

P_e = equivalent emission power in dBm

P_s = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.

6. TEST DATA AND RESULT

6.1 Spot Check With Maximum Conducted Output Power

Test Mode:	Transmitting	Test Engineer:	Braylon Ma
Test Date:	2026-01-17~2026-01-19	Environment:	Temp.: 22.9~23.7°C Humi.: 46~48% Atm :100.1~100.2kPa
Test Result:	Compliance		

GSM 850, Normal

Mode	Average Conducted Power(dBm)	ERP (dBm)	Limit (dBm)	Verdict
GPRS_Low_Slot1	33.63	31.55	38.45	Pass
GPRS_Low_Slot2	33.37	31.29	38.45	Pass
GPRS_Low_Slot3	31.22	29.14	38.45	Pass
GPRS_Low_Slot4	29.94	27.86	38.45	Pass
GPRS_Middle_Slot1	33.54	31.46	38.45	Pass
GPRS_Middle_Slot2	33.34	31.26	38.45	Pass
GPRS_Middle_Slot3	31.27	29.19	38.45	Pass
GPRS_Middle_Slot4	29.93	27.85	38.45	Pass
GPRS_High_Slot1	33.32	31.24	38.45	Pass
GPRS_High_Slot2	33.12	31.04	38.45	Pass
GPRS_High_Slot3	31.15	29.07	38.45	Pass
GPRS_High_Slot4	29.89	27.81	38.45	Pass
EDGE_Low_Slot1	27.50	25.42	38.45	Pass
EDGE_Low_Slot2	25.92	23.84	38.45	Pass
EDGE_Low_Slot3	23.92	21.84	38.45	Pass
EDGE_Low_Slot4	21.68	19.60	38.45	Pass
EDGE_Middle_Slot1	26.26	24.18	38.45	Pass
EDGE_Middle_Slot2	26.09	24.01	38.45	Pass
EDGE_Middle_Slot3	25.97	23.89	38.45	Pass
EDGE_Middle_Slot4	21.84	19.76	38.45	Pass
EDGE_High_Slot1	26.13	24.05	38.45	Pass
EDGE_High_Slot2	26.06	23.98	38.45	Pass
EDGE_High_Slot3	23.92	21.84	38.45	Pass
EDGE_High_Slot4	21.75	19.67	38.45	Pass

Note:

ERP = Average Conducted Power(dBm) + Antenna Gain(dBd) - Cable Loss(dB)

Antenna Gain(dBd) = Antenna Gain(dBi) - 2.15

GSM 850:

1.Antenna Gain = 0.07dBi.

WCDMA Band 2, Normal

Mode	Average Conducted Power(dBm)	EIRP (dBm)	Limit (dBm)	Verdict
R99_Low	23.46	24.72	33	Pass
R99_Middle	23.50	24.76	33	Pass
R99_High	23.47	24.73	33	Pass
HSDPA_Low_Subtest1	21.78	23.04	33	Pass
HSDPA_Low_Subtest2	22.09	23.35	33	Pass
HSDPA_Low_Subtest3	22.02	23.28	33	Pass
HSDPA_Low_Subtest4	22.01	23.27	33	Pass
HSDPA_Middle_Subtest1	21.93	23.19	33	Pass
HSDPA_Middle_Subtest2	22.17	23.43	33	Pass
HSDPA_Middle_Subtest3	22.08	23.34	33	Pass
HSDPA_Middle_Subtest4	22.12	23.38	33	Pass
HSDPA_High_Subtest1	21.62	22.88	33	Pass
HSDPA_High_Subtest2	22.11	23.37	33	Pass
HSDPA_High_Subtest3	21.96	23.22	33	Pass
HSDPA_High_Subtest4	21.96	23.22	33	Pass
HSUPA_Low_Subtest1	19.64	20.90	33	Pass
HSUPA_Low_Subtest2	20.05	21.31	33	Pass
HSUPA_Low_Subtest3	20.09	21.35	33	Pass
HSUPA_Low_Subtest4	19.55	20.81	33	Pass
HSUPA_Low_Subtest5	19.11	20.37	33	Pass
HSUPA_Middle_Subtest1	19.52	20.78	33	Pass
HSUPA_Middle_Subtest2	20.04	21.30	33	Pass
HSUPA_Middle_Subtest3	20.14	21.40	33	Pass
HSUPA_Middle_Subtest4	19.41	20.67	33	Pass
HSUPA_Middle_Subtest5	19.39	20.65	33	Pass
HSUPA_High_Subtest1	19.56	20.82	33	Pass
HSUPA_High_Subtest2	20.15	21.41	33	Pass
HSUPA_High_Subtest3	20.10	21.36	33	Pass
HSUPA_High_Subtest4	19.42	20.68	33	Pass
HSUPA_High_Subtest5	19.00	20.26	33	Pass

Note:

EIRP = Average Conducted Power(dBm) + Antenna Gain(dBi) - Cable Loss(dB)

Band 2:

1.Antenna Gain = 1.26dBi.

LTE Band 66

Mode	Average Conducted Power(dBm)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
1.4MHz_Low_QPSK_1@0	21.58	23.71	0.235	1	Pass
1.4MHz_Low_QPSK_1@3	21.61	23.74	0.237	1	Pass
1.4MHz_Low_QPSK_1@5	21.45	23.58	0.228	1	Pass
1.4MHz_Low_QPSK_3@0	21.54	23.67	0.233	1	Pass
1.4MHz_Low_QPSK_3@1	21.57	23.7	0.234	1	Pass
1.4MHz_Low_QPSK_3@3	21.47	23.6	0.229	1	Pass
1.4MHz_Low_QPSK_6@0	20.37	22.5	0.178	1	Pass
1.4MHz_Low_16QAM_1@0	20.59	22.72	0.187	1	Pass
1.4MHz_Low_16QAM_1@3	20.38	22.51	0.178	1	Pass
1.4MHz_Low_16QAM_1@5	20.32	22.45	0.176	1	Pass
1.4MHz_Low_16QAM_3@0	20.8	22.93	0.196	1	Pass
1.4MHz_Low_16QAM_3@1	20.83	22.96	0.198	1	Pass
1.4MHz_Low_16QAM_3@3	20.84	22.97	0.198	1	Pass
1.4MHz_Low_16QAM_6@0	19.6	21.73	0.149	1	Pass
1.4MHz_Middle_QPSK_1@0	22.31	24.44	0.278	1	Pass
1.4MHz_Middle_QPSK_1@3	22.39	24.52	0.283	1	Pass
1.4MHz_Middle_QPSK_1@5	22.28	24.41	0.276	1	Pass
1.4MHz_Middle_QPSK_3@0	22.5	24.63	0.29	1	Pass
1.4MHz_Middle_QPSK_3@1	22.57	24.7	0.295	1	Pass
1.4MHz_Middle_QPSK_3@3	22.52	24.65	0.292	1	Pass
1.4MHz_Middle_QPSK_6@0	21.5	23.63	0.231	1	Pass
1.4MHz_Middle_16QAM_1@0	20.99	23.12	0.205	1	Pass
1.4MHz_Middle_16QAM_1@3	21.04	23.17	0.207	1	Pass
1.4MHz_Middle_16QAM_1@5	21.34	23.47	0.222	1	Pass
1.4MHz_Middle_16QAM_3@0	21.37	23.5	0.224	1	Pass
1.4MHz_Middle_16QAM_3@1	21.46	23.59	0.229	1	Pass
1.4MHz_Middle_16QAM_3@3	21.32	23.45	0.221	1	Pass
1.4MHz_Middle_16QAM_6@0	20.42	22.55	0.18	1	Pass
1.4MHz_High_QPSK_1@0	22.32	24.45	0.279	1	Pass
1.4MHz_High_QPSK_1@3	22.49	24.62	0.29	1	Pass

Mode	Average Conducted Power(dBm)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
1.4MHz_High_QPSK_1@5	22.4	24.53	0.284	1	Pass
1.4MHz_High_QPSK_3@0	22.51	24.64	0.291	1	Pass
1.4MHz_High_QPSK_3@1	22.63	24.76	0.299	1	Pass
1.4MHz_High_QPSK_3@3	22.53	24.66	0.292	1	Pass
1.4MHz_High_QPSK_6@0	21.6	23.73	0.236	1	Pass
1.4MHz_High_16QAM_1@0	21.15	23.28	0.213	1	Pass
1.4MHz_High_16QAM_1@3	21.26	23.39	0.218	1	Pass
1.4MHz_High_16QAM_1@5	21.32	23.45	0.221	1	Pass
1.4MHz_High_16QAM_3@0	21.38	23.51	0.224	1	Pass
1.4MHz_High_16QAM_3@1	21.5	23.63	0.231	1	Pass
1.4MHz_High_16QAM_3@3	21.4	23.53	0.225	1	Pass
1.4MHz_High_16QAM_6@0	20.18	22.31	0.17	1	Pass
3MHz_Low_QPSK_1@0	21.53	23.66	0.232	1	Pass
3MHz_Low_QPSK_1@8	21.98	24.11	0.258	1	Pass
3MHz_Low_QPSK_1@14	21.94	24.07	0.255	1	Pass
3MHz_Low_QPSK_8@0	20.78	22.91	0.195	1	Pass
3MHz_Low_QPSK_8@4	20.72	22.85	0.193	1	Pass
3MHz_Low_QPSK_8@7	20.64	22.77	0.189	1	Pass
3MHz_Low_QPSK_15@0	20.64	22.77	0.189	1	Pass
3MHz_Low_16QAM_1@0	20.29	22.42	0.175	1	Pass
3MHz_Low_16QAM_1@8	20.65	22.78	0.19	1	Pass
3MHz_Low_16QAM_1@14	20.38	22.51	0.178	1	Pass
3MHz_Low_16QAM_8@0	19.44	21.57	0.144	1	Pass
3MHz_Low_16QAM_8@4	19.43	21.56	0.143	1	Pass
3MHz_Low_16QAM_8@7	19.49	21.62	0.145	1	Pass
3MHz_Low_16QAM_15@0	19.84	21.97	0.157	1	Pass
3MHz_Middle_QPSK_1@0	22.44	24.57	0.286	1	Pass
3MHz_Middle_QPSK_1@8	22.5	24.63	0.29	1	Pass
3MHz_Middle_QPSK_1@14	22.58	24.71	0.296	1	Pass
3MHz_Middle_QPSK_8@0	21.59	23.72	0.236	1	Pass
3MHz_Middle_QPSK_8@4	21.5	23.63	0.231	1	Pass
3MHz_Middle_QPSK_8@7	21.65	23.78	0.239	1	Pass
3MHz_Middle_QPSK_15@0	21.56	23.69	0.234	1	Pass
3MHz_Middle_16QAM_1@0	21.65	23.78	0.239	1	Pass

Mode	Average Conducted Power(dBm)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
3MHz_Middle_16QAM_1@8	21.49	23.62	0.23	1	Pass
3MHz_Middle_16QAM_1@14	21.56	23.69	0.234	1	Pass
3MHz_Middle_16QAM_8@0	20.49	22.62	0.183	1	Pass
3MHz_Middle_16QAM_8@4	20.47	22.6	0.182	1	Pass
3MHz_Middle_16QAM_8@7	20.47	22.6	0.182	1	Pass
3MHz_Middle_16QAM_15@0	20.46	22.59	0.182	1	Pass
3MHz_High_QPSK_1@0	22.42	24.55	0.285	1	Pass
3MHz_High_QPSK_1@8	22.27	24.4	0.275	1	Pass
3MHz_High_QPSK_1@14	22.54	24.67	0.293	1	Pass
3MHz_High_QPSK_8@0	21.53	23.66	0.232	1	Pass
3MHz_High_QPSK_8@4	21.52	23.65	0.232	1	Pass
3MHz_High_QPSK_8@7	21.54	23.67	0.233	1	Pass
3MHz_High_QPSK_15@0	21.54	23.67	0.233	1	Pass
3MHz_High_16QAM_1@0	21.12	23.25	0.211	1	Pass
3MHz_High_16QAM_1@8	20.94	23.07	0.203	1	Pass
3MHz_High_16QAM_1@14	21.3	23.43	0.22	1	Pass
3MHz_High_16QAM_8@0	20.16	22.29	0.169	1	Pass
3MHz_High_16QAM_8@4	20.41	22.54	0.179	1	Pass
3MHz_High_16QAM_8@7	20.13	22.26	0.168	1	Pass
3MHz_High_16QAM_15@0	20.43	22.56	0.18	1	Pass
5MHz_Low_QPSK_1@0	21.6	23.73	0.236	1	Pass
5MHz_Low_QPSK_1@12	21.99	24.12	0.258	1	Pass
5MHz_Low_QPSK_1@24	21.63	23.76	0.238	1	Pass
5MHz_Low_QPSK_12@0	20.69	22.82	0.191	1	Pass
5MHz_Low_QPSK_12@7	20.83	22.96	0.198	1	Pass
5MHz_Low_QPSK_12@13	20.82	22.95	0.197	1	Pass
5MHz_Low_QPSK_25@0	20.76	22.89	0.195	1	Pass
5MHz_Low_16QAM_1@0	20.47	22.6	0.182	1	Pass
5MHz_Low_16QAM_1@12	20.46	22.59	0.182	1	Pass
5MHz_Low_16QAM_1@24	19.93	22.06	0.161	1	Pass
5MHz_Low_16QAM_12@0	19.66	21.79	0.151	1	Pass
5MHz_Low_16QAM_12@7	19.86	21.99	0.158	1	Pass
5MHz_Low_16QAM_12@13	19.83	21.96	0.157	1	Pass
5MHz_Low_16QAM_25@0	20.01	22.14	0.164	1	Pass

Mode	Average Conducted Power(dBm)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
5MHz_Middle_QPSK_1@0	22.09	24.22	0.264	1	Pass
5MHz_Middle_QPSK_1@12	22.49	24.62	0.29	1	Pass
5MHz_Middle_QPSK_1@24	22.28	24.41	0.276	1	Pass
5MHz_Middle_QPSK_12@0	21.57	23.7	0.234	1	Pass
5MHz_Middle_QPSK_12@7	21.56	23.69	0.234	1	Pass
5MHz_Middle_QPSK_12@13	21.52	23.65	0.232	1	Pass
5MHz_Middle_QPSK_25@0	21.59	23.72	0.236	1	Pass
5MHz_Middle_16QAM_1@0	21.56	23.69	0.234	1	Pass
5MHz_Middle_16QAM_1@12	21.51	23.64	0.231	1	Pass
5MHz_Middle_16QAM_1@24	21.35	23.48	0.223	1	Pass
5MHz_Middle_16QAM_12@0	20.22	22.35	0.172	1	Pass
5MHz_Middle_16QAM_12@7	20.45	22.58	0.181	1	Pass
5MHz_Middle_16QAM_12@13	20.46	22.59	0.182	1	Pass
5MHz_Middle_16QAM_25@0	20.57	22.7	0.186	1	Pass
5MHz_High_QPSK_1@0	22.3	24.43	0.277	1	Pass
5MHz_High_QPSK_1@12	22.66	24.79	0.301	1	Pass
5MHz_High_QPSK_1@24	22.44	24.57	0.286	1	Pass
5MHz_High_QPSK_12@0	21.57	23.7	0.234	1	Pass
5MHz_High_QPSK_12@7	21.59	23.72	0.236	1	Pass
5MHz_High_QPSK_12@13	21.58	23.71	0.235	1	Pass
5MHz_High_QPSK_25@0	21.62	23.75	0.237	1	Pass
5MHz_High_16QAM_1@0	21.32	23.45	0.221	1	Pass
5MHz_High_16QAM_1@12	21.22	23.35	0.216	1	Pass
5MHz_High_16QAM_1@24	21.45	23.58	0.228	1	Pass
5MHz_High_16QAM_12@0	20.38	22.51	0.178	1	Pass
5MHz_High_16QAM_12@7	20.51	22.64	0.184	1	Pass
5MHz_High_16QAM_12@13	20.56	22.69	0.186	1	Pass
5MHz_High_16QAM_25@0	20.63	22.76	0.189	1	Pass
10MHz_Low_QPSK_1@0	21.69	23.82	0.241	1	Pass
10MHz_Low_QPSK_1@25	22.09	24.22	0.264	1	Pass
10MHz_Low_QPSK_1@49	21.97	24.1	0.257	1	Pass
10MHz_Low_QPSK_25@0	20.91	23.04	0.201	1	Pass
10MHz_Low_QPSK_25@12	20.84	22.97	0.198	1	Pass
10MHz_Low_QPSK_25@25	20.96	23.09	0.204	1	Pass

Mode	Average Conducted Power(dBm)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
10MHz_Low_QPSK_50@0	20.91	23.04	0.201	1	Pass
10MHz_Low_16QAM_1@0	21.08	23.21	0.209	1	Pass
10MHz_Low_16QAM_1@25	21.71	23.84	0.242	1	Pass
10MHz_Low_16QAM_1@49	21.06	23.19	0.208	1	Pass
10MHz_Low_16QAM_25@0	19.91	22.04	0.16	1	Pass
10MHz_Low_16QAM_25@12	19.96	22.09	0.162	1	Pass
10MHz_Low_16QAM_25@25	20	22.13	0.163	1	Pass
10MHz_Low_16QAM_50@0	20.01	22.14	0.164	1	Pass
10MHz_Middle_QPSK_1@0	22.64	24.77	0.3	1	Pass
10MHz_Middle_QPSK_1@25	22.8	24.93	0.311	1	Pass
10MHz_Middle_QPSK_1@49	22.84	24.97	0.314	1	Pass
10MHz_Middle_QPSK_25@0	21.6	23.73	0.236	1	Pass
10MHz_Middle_QPSK_25@12	21.58	23.71	0.235	1	Pass
10MHz_Middle_QPSK_25@25	21.57	23.7	0.234	1	Pass
10MHz_Middle_QPSK_50@0	21.61	23.74	0.237	1	Pass
10MHz_Middle_16QAM_1@0	21.45	23.58	0.228	1	Pass
10MHz_Middle_16QAM_1@25	21.6	23.73	0.236	1	Pass
10MHz_Middle_16QAM_1@49	21.77	23.9	0.245	1	Pass
10MHz_Middle_16QAM_25@0	20.52	22.65	0.184	1	Pass
10MHz_Middle_16QAM_25@12	20.64	22.77	0.189	1	Pass
10MHz_Middle_16QAM_25@25	20.55	22.68	0.185	1	Pass
10MHz_Middle_16QAM_50@0	20.52	22.65	0.184	1	Pass
10MHz_High_QPSK_1@0	22.35	24.48	0.281	1	Pass
10MHz_High_QPSK_1@25	22.7	24.83	0.304	1	Pass
10MHz_High_QPSK_1@49	22.7	24.83	0.304	1	Pass
10MHz_High_QPSK_25@0	21.55	23.68	0.233	1	Pass
10MHz_High_QPSK_25@12	21.61	23.74	0.237	1	Pass
10MHz_High_QPSK_25@25	21.57	23.7	0.234	1	Pass
10MHz_High_QPSK_50@0	21.52	23.65	0.232	1	Pass
10MHz_High_16QAM_1@0	21.42	23.55	0.226	1	Pass
10MHz_High_16QAM_1@25	21.41	23.54	0.226	1	Pass
10MHz_High_16QAM_1@49	21.38	23.51	0.224	1	Pass
10MHz_High_16QAM_25@0	20.59	22.72	0.187	1	Pass
10MHz_High_16QAM_25@12	20.76	22.89	0.195	1	Pass

Mode	Average Conducted Power(dBm)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
10MHz_High_16QAM_25@25	20.61	22.74	0.188	1	Pass
10MHz_High_16QAM_50@0	20.44	22.57	0.181	1	Pass
15MHz_Low_QPSK_1@0	21.8	23.93	0.247	1	Pass
15MHz_Low_QPSK_1@37	22.2	24.33	0.271	1	Pass
15MHz_Low_QPSK_1@74	22.17	24.3	0.269	1	Pass
15MHz_Low_QPSK_36@0	20.87	23	0.2	1	Pass
15MHz_Low_QPSK_36@20	20.94	23.07	0.203	1	Pass
15MHz_Low_QPSK_36@39	21.06	23.19	0.208	1	Pass
15MHz_Low_QPSK_75@0	20.97	23.1	0.204	1	Pass
15MHz_Low_16QAM_1@0	21.08	23.21	0.209	1	Pass
15MHz_Low_16QAM_1@37	21.37	23.5	0.224	1	Pass
15MHz_Low_16QAM_1@74	21.05	23.18	0.208	1	Pass
15MHz_Low_16QAM_36@0	19.87	22	0.158	1	Pass
15MHz_Low_16QAM_36@20	19.93	22.06	0.161	1	Pass
15MHz_Low_16QAM_36@39	20	22.13	0.163	1	Pass
15MHz_Low_16QAM_75@0	20.04	22.17	0.165	1	Pass
15MHz_Middle_QPSK_1@0	22.6	24.73	0.297	1	Pass
15MHz_Middle_QPSK_1@37	22.99	25.12	0.325	1	Pass
15MHz_Middle_QPSK_1@74	22.78	24.91	0.31	1	Pass
15MHz_Middle_QPSK_36@0	21.52	23.65	0.232	1	Pass
15MHz_Middle_QPSK_36@20	21.54	23.67	0.233	1	Pass
15MHz_Middle_QPSK_36@39	21.52	23.65	0.232	1	Pass
15MHz_Middle_QPSK_75@0	21.49	23.62	0.23	1	Pass
15MHz_Middle_16QAM_1@0	21.24	23.37	0.217	1	Pass
15MHz_Middle_16QAM_1@37	21.89	24.02	0.252	1	Pass
15MHz_Middle_16QAM_1@74	21.35	23.48	0.223	1	Pass
15MHz_Middle_16QAM_36@0	20.47	22.6	0.182	1	Pass
15MHz_Middle_16QAM_36@20	20.57	22.7	0.186	1	Pass
15MHz_Middle_16QAM_36@39	20.38	22.51	0.178	1	Pass
15MHz_Middle_16QAM_75@0	20.57	22.7	0.186	1	Pass
15MHz_High_QPSK_1@0	22.42	24.55	0.285	1	Pass
15MHz_High_QPSK_1@37	22.86	24.99	0.316	1	Pass
15MHz_High_QPSK_1@74	22.72	24.85	0.305	1	Pass
15MHz_High_QPSK_36@0	21.58	23.71	0.235	1	Pass

Mode	Average Conducted Power(dBm)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
15MHz_High_QPSK_36@20	21.57	23.7	0.234	1	Pass
15MHz_High_QPSK_36@39	21.59	23.72	0.236	1	Pass
15MHz_High_QPSK_75@0	21.53	23.66	0.232	1	Pass
15MHz_High_16QAM_1@0	21.71	23.84	0.242	1	Pass
15MHz_High_16QAM_1@37	21.39	23.52	0.225	1	Pass
15MHz_High_16QAM_1@74	21.25	23.38	0.218	1	Pass
15MHz_High_16QAM_36@0	20.57	22.7	0.186	1	Pass
15MHz_High_16QAM_36@20	20.53	22.66	0.185	1	Pass
15MHz_High_16QAM_36@39	20.52	22.65	0.184	1	Pass
15MHz_High_16QAM_75@0	20.58	22.71	0.187	1	Pass
20MHz_Low_QPSK_1@0	21.46	23.59	0.229	1	Pass
20MHz_Low_QPSK_1@49	21.76	23.89	0.245	1	Pass
20MHz_Low_QPSK_1@99	21.8	23.93	0.247	1	Pass
20MHz_Low_QPSK_50@0	20.84	22.97	0.198	1	Pass
20MHz_Low_QPSK_50@24	21	23.13	0.206	1	Pass
20MHz_Low_QPSK_50@50	21.08	23.21	0.209	1	Pass
20MHz_Low_QPSK_100@0	20.95	23.08	0.203	1	Pass
20MHz_Low_16QAM_1@0	20.84	22.97	0.198	1	Pass
20MHz_Low_16QAM_1@49	21.23	23.36	0.217	1	Pass
20MHz_Low_16QAM_1@99	20.92	23.05	0.202	1	Pass
20MHz_Low_16QAM_50@0	19.95	22.08	0.161	1	Pass
20MHz_Low_16QAM_50@24	19.85	21.98	0.158	1	Pass
20MHz_Low_16QAM_50@50	19.95	22.08	0.161	1	Pass
20MHz_Low_16QAM_100@0	19.85	21.98	0.158	1	Pass
20MHz_Middle_QPSK_1@0	22.42	24.55	0.285	1	Pass
20MHz_Middle_QPSK_1@49	22.87	25	0.316	1	Pass
20MHz_Middle_QPSK_1@99	22.83	24.96	0.313	1	Pass
20MHz_Middle_QPSK_50@0	21.56	23.69	0.234	1	Pass
20MHz_Middle_QPSK_50@24	21.54	23.67	0.233	1	Pass
20MHz_Middle_QPSK_50@50	21.6	23.73	0.236	1	Pass
20MHz_Middle_QPSK_100@0	21.55	23.68	0.233	1	Pass
20MHz_Middle_16QAM_1@0	20.51	22.64	0.184	1	Pass
20MHz_Middle_16QAM_1@49	21.18	23.31	0.214	1	Pass
20MHz_Middle_16QAM_1@99	21.37	23.5	0.224	1	Pass

Mode	Average Conducted Power(dBm)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
20MHz_Middle_16QAM_50@0	20.32	22.45	0.176	1	Pass
20MHz_Middle_16QAM_50@24	20.52	22.65	0.184	1	Pass
20MHz_Middle_16QAM_50@50	20.64	22.77	0.189	1	Pass
20MHz_Middle_16QAM_100@0	20.38	22.51	0.178	1	Pass
20MHz_High_QPSK_1@0	22.18	24.31	0.27	1	Pass
20MHz_High_QPSK_1@49	22.36	24.49	0.281	1	Pass
20MHz_High_QPSK_1@99	22.27	24.4	0.275	1	Pass
20MHz_High_QPSK_50@0	21.47	23.6	0.229	1	Pass
20MHz_High_QPSK_50@24	21.52	23.65	0.232	1	Pass
20MHz_High_QPSK_50@50	21.51	23.64	0.231	1	Pass
20MHz_High_QPSK_100@0	21.54	23.67	0.233	1	Pass
20MHz_High_16QAM_1@0	21.06	23.19	0.208	1	Pass
20MHz_High_16QAM_1@49	21.12	23.25	0.211	1	Pass
20MHz_High_16QAM_1@99	21.03	23.16	0.207	1	Pass
20MHz_High_16QAM_50@0	20.3	22.43	0.175	1	Pass
20MHz_High_16QAM_50@24	20.29	22.42	0.175	1	Pass
20MHz_High_16QAM_50@50	20.18	22.31	0.17	1	Pass
20MHz_High_16QAM_100@0	20.38	22.51	0.178	1	Pass

Note:

EIRP = Average Conducted Power(dBm) + Antenna Gain(dBi) - Cable Loss(dB)

Band 66:

1.Antenna Gain = 2.13dBi;

2.Cable Loss = 0dB.

6.2 EIRP/ERP calculated and results

Test data:

Per-spot check, the conducted output power is consistent with the original report, so the Maximum EIRP/ERP was re-calculated.

GSM 850

Test Mode		Channel	Maximum Conducted Average Output Power(dBm)	ERP(dBm)	ERP Limit (dBm)
Network	Subset				
GPRS	1 TX Slot	Low	33.85	31.77	38.45
	1 TX Slot	Middle	33.65	31.57	38.45
	1 TX Slot	High	33.80	31.72	38.45

PCS 1900

Test Mode		Channel	Maximum Conducted Average Output Power(dBm)	EIRP(dBm)	EIRP Limit (dBm)
Network	Subset				
GPRS	1 TX Slot	Low	31.14	32.40	33.01
	1 TX Slot	Middle	31.13	32.39	33.01
	1 TX Slot	High	31.14	32.40	33.01

WCDMA B2

Test Mode		Channel	Maximum Conducted Average Output Power(dBm)	EIRP(dBm)	EIRP Limit (dBm)
Network	Subset				
RMC	12.2kbps RMC	Low	24.05	25.31	33
		Middle	23.99	25.25	33
		High	23.95	25.21	33

WCDMA B4

Test Mode		Channel	Maximum Conducted Average Output Power(dBm)	EIRP(dBm)	EIRP Limit (dBm)
Network	Subset				
RMC	12.2kbps RMC	Low	23.44	25.27	30
		Middle	23.62	25.45	30
		High	23.58	25.41	30

WCDMA B5

Test Mode		Channel	Maximum Conducted Average Output Power(dBm)	ERP(dBm)	ERP Limit (dBm)
Network	Subset				
RMC	12.2kbps RMC	Low	23.71	21.63	38.45
		Middle	23.96	21.88	38.45
		High	23.84	21.76	38.45

LTE B2

Test Mode	Maximum Conducted Average Output Power(dBm)	EIRP(dBm)	EIRP Limit (dBm)
1.4MHz QPSK	23.33	24.59	33
1.4MHz 16QAM	22.09	23.35	33
3MHz QPSK	23.34	24.60	33
3MHz 16QAM	21.99	23.25	33
5MHz QPSK	23.31	24.57	33
5MHz 16QAM	21.75	23.01	33
10MHz QPSK	23.58	24.84	33
10MHz 16QAM	21.94	23.20	33
15MHz QPSK	23.46	24.72	33
15MHz 16QAM	21.84	23.10	33
20MHz QPSK	23.47	24.73	33
20MHz 16QAM	22.06	23.32	33

LTE B4

Test Mode	Maximum Conducted Average Output Power(dBm)	EIRP(dBm)	EIRP Limit (dBm)
1.4MHz QPSK	23.38	25.21	30
1.4MHz 16QAM	22.24	24.07	30
3MHz QPSK	23.32	25.15	30
3MHz 16QAM	21.86	23.69	30
5MHz QPSK	23.43	25.26	30
5MHz 16QAM	21.93	23.76	30
10MHz QPSK	23.72	25.55	30
10MHz 16QAM	22.39	24.22	30
15MHz QPSK	23.47	25.30	30
15MHz 16QAM	21.75	23.58	30
20MHz QPSK	23.47	25.30	30
20MHz 16QAM	22.03	23.86	30

LTE B5

Test Mode	Maximum Conducted Average Output Power(dBm)	ERP(dBm)	ERP Limit (dBm)
1.4MHz QPSK	23.28	21.20	38.45
1.4MHz 16QAM	22.09	20.01	38.45
3MHz QPSK	23.33	21.25	38.45
3MHz 16QAM	21.78	19.70	38.45
5MHz QPSK	23.39	21.31	38.45
5MHz 16QAM	21.97	19.89	38.45
10MHz QPSK	23.47	21.39	38.45
10MHz 16QAM	22.02	19.94	38.45

LTE B7

Test Mode	Maximum Conducted Average Output Power(dBm)	EIRP(dBm)	EIRP Limit (dBm)
5MHz QPSK	22.94	23.74	33
5MHz 16QAM	21.47	22.27	33
10MHz QPSK	23.47	24.27	33
10MHz 16QAM	22.26	23.06	33
15MHz QPSK	23.24	24.04	33
15MHz 16QAM	21.59	22.39	33
20MHz QPSK	23.24	24.04	33
20MHz 16QAM	21.73	22.53	33

LTE B12

Test Mode	Maximum Conducted Average Output Power(dBm)	ERP(dBm)	ERP Limit (dBm)
1.4MHz QPSK	23.49	19.38	34.77
1.4MHz 16QAM	22.30	18.19	34.77
3MHz QPSK	23.84	19.73	34.77
3MHz 16QAM	22.10	17.99	34.77
5MHz QPSK	23.68	19.57	34.77
5MHz 16QAM	22.02	17.91	34.77
10MHz QPSK	23.60	19.49	34.77
10MHz 16QAM	22.72	18.61	34.77

LTE B17

Test Mode	Maximum Conducted Average Output Power(dBm)	ERP(dBm)	ERP Limit (dBm)
5MHz QPSK	23.39	19.28	34.77
5MHz 16QAM	22.11	18.00	34.77
10MHz QPSK	23.58	19.47	34.77
10MHz 16QAM	22.03	17.92	34.77

LTE B38

Test Mode	Maximum Conducted Average Output Power(dBm)	EIRP(dBm)	EIRP Limit (dBm)
5MHz QPSK	22.79	23.25	33
5MHz 16QAM	21.75	22.21	33
10MHz QPSK	23.02	23.48	33
10MHz 16QAM	21.83	22.29	33
15MHz QPSK	23.06	23.52	33
15MHz 16QAM	21.71	22.17	33
20MHz QPSK	22.89	23.35	33
20MHz 16QAM	21.76	22.22	33

LTE B41:

Test Mode	Maximum Conducted Average Output Power(dBm)	EIRP(dBm)	EIRP Limit (dBm)
5MHz QPSK	22.73	24.27	33
5MHz 16QAM	21.39	22.93	33
10MHz QPSK	22.61	24.15	33
10MHz 16QAM	21.40	22.94	33
15MHz QPSK	22.57	24.11	33
15MHz 16QAM	21.40	22.94	33
20MHz QPSK	22.67	24.21	33
20MHz 16QAM	21.43	22.97	33

LTE B66

Test Mode	Maximum Conducted Average Output Power(dBm)	EIRP(dBm)	EIRP Limit (dBm)
1.4MHz QPSK	23.41	25.54	30
1.4MHz 16QAM	22.38	24.51	30
3MHz QPSK	23.73	25.86	30
3MHz 16QAM	22.18	24.31	30
5MHz QPSK	23.56	25.69	30
5MHz 16QAM	21.98	24.11	30
10MHz QPSK	23.88	26.01	30
10MHz 16QAM	22.22	24.35	30
15MHz QPSK	23.93	26.06	30
15MHz 16QAM	22.07	24.2	30
20MHz QPSK	23.90	26.03	30
20MHz 16QAM	22.06	24.19	30

Note:

1. $EIRP = \text{Maximum Conducted Average Output Power(dBm)} - L_c(\text{dB}) + G_T(\text{dBi})$

ERP= Maximum Conducted Average Output Power(dBm) - $L_c(\text{dB}) + G_T(\text{dBd})$

$G_T(\text{dBd}) = G_T(\text{dBi}) - 2.15$

2. Maximum Conducted Average Output Power please refer to FCC report: SZCR2505001820MO*.

6.3 Radiated Spurious Emissions

Frequency Range:	Below 1 GHz	Above 1 GHz
Temperature:	22.9~23°C	22.9~23°C
Relative Humidity:	57~59%	57~59%
ATM Pressure:	100.1kPa	100.1kPa
Test Date:	2026-06-30~2026-07-02	2026-06-30~2026-07-02
Test Engineer:	Wlif Wu	Wlif Wu

Pre-scan in the X, Y and Z axes of orientation, the worst case Z-axis of orientation was recorded.

6.3.1 30MHz~1GHz

Test Data

Configuration 1# (Scanner variant)

Note: The worst modulation and bandwidth is as below:

GPRS Band850

CPRS Databases

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd)	Cable Loss (dB)			
Frequency: 824.2MHz								
176.81	H	40.06	-69.42	0.00	0.24	-69.66	-13.00	56.66
175.84	V	47.60	-61.69	0.00	0.24	-61.93	-13.00	48.93
246.26	H	39.75	-55.38	0.00	0.28	-55.66	-13.00	42.66
52.07	V	44.07	-65.72	-13.95	0.14	-79.81	-13.00	66.81
Frequency: 836.6MHz								
179.62	H	41.26	-67.98	0.00	0.24	-68.22	-13.00	55.22
177.01	V	48.02	-61.18	0.00	0.24	-61.42	-13.00	48.42
256.64	H	39.68	-56.41	0.00	0.28	-56.69	-13.00	43.69
53.65	V	43.48	-66.83	-13.22	0.14	-80.19	-13.00	67.19
Frequency: 848.8MHz								
180.25	H	41.01	-68.18	0.00	0.24	-68.42	-13.00	55.42
180.34	V	48.31	-60.63	0.00	0.24	-60.87	-13.00	47.87
255.04	H	40.45	-55.17	0.00	0.28	-55.45	-13.00	42.45
55.64	V	44.49	-66.47	-12.31	0.15	-78.93	-13.00	65.93

PCS Band1900

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd)	Cable Loss (dB)			
Frequency: 1850.2MHz								
181.25	H	45.20	-63.90	0.00	0.24	-64.14	-13.00	51.14
88.54	V	42.62	-72.18	0.00	0.18	-72.36	-13.00	59.36
251.66	H	41.25	-53.37	0.00	0.28	-53.65	-13.00	40.65
230.16	V	45.84	-53.28	0.00	0.27	-53.55	-13.00	40.55
Frequency: 1880MHz								
233.65	H	41.62	-56.89	0.00	0.27	-57.16	-13.00	44.16
84.26	V	43.41	-70.98	0.00	0.17	-71.15	-13.00	58.15
184.26	H	46.33	-62.52	0.00	0.24	-62.76	-13.00	49.76
186.69	V	45.29	-63.17	0.00	0.24	-63.41	-13.00	50.41
Frequency: 1909.8MHz								
241.95	H	43.65	-52.63	0.00	0.28	-52.91	-13.00	39.91
89.66	V	42.29	-72.62	0.00	0.18	-72.80	-13.00	59.80
152.32	H	41.20	-70.34	0.00	0.23	-70.57	-13.00	57.57
174.52	V	44.88	-64.51	0.00	0.24	-64.75	-13.00	51.75

WCDMA Band 2:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd)	Cable Loss (dB)			
Frequency: 1852.4MHz								
188.60	H	42.29	-66.19	0.00	0.25	-66.44	-13.00	53.44
183.05	V	43.50	-65.24	0.00	0.24	-65.48	-13.00	52.48
266.94	H	40.21	-58.91	0.00	0.28	-59.19	-13.00	46.19
71.65	V	41.22	-72.12	-4.18	0.16	-76.46	-13.00	63.46
Frequency: 1880MHz								
159.68	H	41.20	-69.72	0.00	0.23	-69.95	-13.00	56.95
186.31	V	42.92	-65.57	0.00	0.24	-65.81	-13.00	52.81
251.54	H	40.33	-54.25	0.00	0.28	-54.53	-13.00	41.53
84.21	V	41.90	-72.48	0.00	0.17	-72.65	-13.00	59.65
Frequency: 1907.6MHz								
161.02	H	40.92	-69.89	0.00	0.23	-70.12	-13.00	57.12
188.99	V	41.44	-66.84	0.00	0.25	-67.09	-13.00	54.09
250.65	H	41.62	-52.70	0.00	0.28	-52.98	-13.00	39.98
80.22	V	43.41	-70.59	0.00	0.17	-70.76	-13.00	57.76

WCDMA Band 4:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd)	Cable Loss (dB)			
Frequency: 1712.4MHz								
183.32	H	41.62	-67.31	0.00	0.24	-67.55	-13.00	54.55
159.62	V	46.39	-64.14	0.00	0.23	-64.37	-13.00	51.37
233.97	H	39.66	-58.76	0.00	0.27	-59.03	-13.00	46.03
99.02	V	43.39	-70.93	0.00	0.20	-71.13	-13.00	58.13
Frequency: 1732.6MHz								
188.28	H	41.30	-67.21	0.00	0.25	-67.46	-13.00	54.46
84.69	V	46.62	-67.81	0.00	0.17	-67.98	-13.00	54.98
259.64	H	42.92	-54.05	0.00	0.28	-54.33	-13.00	41.33
169.62	V	45.14	-64.62	0.00	0.24	-64.86	-13.00	51.86
Frequency:1752.6MHz								
163.69	H	43.92	-66.66	0.00	0.24	-66.90	-13.00	53.90
74.22	V	46.62	-66.92	-2.89	0.16	-69.97	-13.00	56.97
236.95	H	41.02	-56.60	0.00	0.27	-56.87	-13.00	43.87
171.39	V	45.22	-64.41	0.00	0.24	-64.65	-13.00	51.65

WCDMA Band 5:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd)	Cable Loss (dB)			
Frequency: 826.4MHz								
189.62	H	42.62	-65.78	0.00	0.25	-66.03	-13.00	53.03
77.52	V	46.61	-67.18	-1.24	0.17	-68.59	-13.00	55.59
233.41	H	41.94	-56.63	0.00	0.27	-56.90	-13.00	43.90
210.28	V	45.21	-59.39	0.00	0.26	-59.65	-13.00	46.65
Frequency: 836.6MHz								
177.20	H	41.54	-67.90	0.00	0.24	-68.14	-13.00	55.14
71.20	V	47.20	-66.11	-4.40	0.16	-70.67	-13.00	57.67
233.69	H	43.47	-55.03	0.00	0.27	-55.30	-13.00	42.30
246.92	V	45.92	-48.57	0.00	0.28	-48.85	-13.00	35.85
Frequency:846.6MHz								
165.62	H	41.25	-69.17	0.00	0.24	-69.41	-13.00	56.41
74.36	V	45.97	-67.58	-2.82	0.16	-70.56	-13.00	57.56
233.95	H	40.22	-58.21	0.00	0.27	-58.48	-13.00	45.48
269.47	V	46.21	-53.19	0.00	0.28	-53.47	-13.00	40.47

FDD-LTE Band 2:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd)	Cable Loss (dB)			
1.4MHz QPSK RB1#0, Frequency: 1850.7MHz								
172.54	H	43.02	-66.82	0.00	0.24	-67.06	-13.00	54.06
176.69	V	47.45	-61.77	0.00	0.24	-62.01	-13.00	49.01
251.11	H	41.21	-53.25	0.00	0.28	-53.53	-13.00	40.53
50.66	V	43.21	-66.12	-14.60	0.14	-80.86	-13.00	67.86
1.4MHz QPSK RB1#0, Frequency: 1880MHz								
173.25	H	41.65	-68.13	0.00	0.24	-68.37	-13.00	55.37
175.55	V	47.75	-61.56	0.00	0.24	-61.80	-13.00	48.80
253.36	H	43.22	-51.90	0.00	0.28	-52.18	-13.00	39.18
51.33	V	46.58	-62.97	-14.29	0.14	-77.40	-13.00	64.40
1.4MHz QPSK RB1#0, Frequency: 1909.3MHz								
177.05	H	43.22	-66.24	0.00	0.24	-66.48	-13.00	53.48
171.09	V	47.59	-62.06	0.00	0.24	-62.30	-13.00	49.30
255.88	H	42.58	-53.28	0.00	0.28	-53.56	-13.00	40.56
53.69	V	48.79	-61.53	-13.20	0.14	-74.87	-13.00	61.87

FDD-LTE Band 4:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd)	Cable Loss (dB)			
1.4MHz QPSK RB1#0 , Frequency: 1710.7MHz								
188.22	H	43.95	-64.56	0.00	0.25	-64.81	-13.00	51.81
60.21	V	46.84	-65.57	-10.19	0.15	-75.91	-13.00	62.91
236.33	H	42.33	-55.47	0.00	0.27	-55.74	-13.00	42.74
181.32	V	47.21	-61.66	0.00	0.24	-61.90	-13.00	48.90
1.4MHz QPSK RB1#0, Frequency: 1732.5MHz								
177.21	H	43.62	-65.82	0.00	0.24	-66.06	-13.00	53.06
173.63	V	46.84	-62.62	0.00	0.24	-62.86	-13.00	49.86
253.65	H	39.53	-55.68	0.00	0.28	-55.96	-13.00	42.96
85.90	V	48.25	-66.30	0.00	0.18	-66.48	-13.00	53.48
1.4MHz QPSK RB1#0, Frequency: 1754.3MHz								
173.62	H	41.32	-68.43	0.00	0.24	-68.67	-13.00	55.67
177.22	V	45.62	-63.56	0.00	0.24	-63.80	-13.00	50.80
255.32	H	40.25	-55.45	0.00	0.28	-55.73	-13.00	42.73
81.20	V	47.25	-66.84	0.00	0.17	-67.01	-13.00	54.01

FDD-LTE Band 5:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd)	Cable Loss (dB)			
1.4MHz QPSK RB1#0, Frequency: 824.7MHz								
180.30	H	43.36	-65.82	0.00	0.24	-66.06	-13.00	53.06
173.25	V	41.20	-68.29	0.00	0.24	-68.53	-13.00	55.53
251.20	H	44.21	-50.27	0.00	0.28	-50.55	-13.00	37.55
81.32	V	46.52	-67.58	0.00	0.17	-67.75	-13.00	54.75
1.4MHz QPSK RB1#0, Frequency: 836.5MHz								
177.25	H	44.20	-65.24	0.00	0.24	-65.48	-13.00	52.48
169.62	V	46.55	-63.21	0.00	0.24	-63.45	-13.00	50.45
253.62	H	40.65	-54.55	0.00	0.28	-54.83	-13.00	41.83
77.33	V	43.17	-70.60	-1.34	0.17	-72.11	-13.00	59.11
1.4MHz QPSK RB1#0, Frequency: 848.3MHz								
173.25	H	43.33	-66.45	0.00	0.24	-66.69	-13.00	53.69
177.29	V	45.94	-63.24	0.00	0.24	-63.48	-13.00	50.48
251.11	H	40.22	-54.24	0.00	0.28	-54.52	-13.00	41.52
76.24	V	43.45	-70.24	-1.88	0.17	-72.29	-13.00	59.29

FDD-LTE Band 7:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd)	Cable Loss (dB)			
5MHz QPSK RB1#0, Frequency: 2502.5MHz								
171.22	H	44.32	-65.63	0.00	0.24	-65.87	-25.00	40.87
48.62	V	46.63	-61.53	-16.25	0.14	-77.92	-25.00	52.92
255.66	H	41.25	-54.55	0.00	0.28	-54.83	-25.00	29.83
176.69	V	41.92	-67.30	0.00	0.24	-67.54	-25.00	42.54
5MHz QPSK RB1#0, Frequency: 2535MHz								
179.69	H	43.33	-65.90	0.00	0.24	-66.14	-25.00	41.14
81.36	V	45.55	-68.56	0.00	0.17	-68.73	-25.00	43.73
255.81	H	42.68	-53.16	0.00	0.28	-53.44	-25.00	28.44
182.15	V	42.48	-66.33	0.00	0.24	-66.57	-25.00	41.57
5MHz QPSK RB1#0, Frequency: 2567.5MHz								
173.62	H	46.33	-63.42	0.00	0.24	-63.66	-25.00	38.66
84.62	V	45.60	-68.82	0.00	0.17	-68.99	-25.00	43.99
253.05	H	40.36	-54.67	0.00	0.28	-54.95	-25.00	29.95
172.84	V	43.55	-65.97	0.00	0.24	-66.21	-25.00	41.21

FDD-LTE Band 12:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd)	Cable Loss (dB)			
1.4MHz QPSK RB1#0, Frequency: 699.7MHz								
172.32	H	43.51	-66.35	0.00	0.24	-66.59	-13.00	53.59
53.18	V	46.41	-63.74	-13.44	0.14	-77.32	-13.00	64.32
253.61	H	40.26	-54.93	0.00	0.28	-55.21	-13.00	42.21
188.22	V	41.47	-66.87	0.00	0.25	-67.12	-13.00	54.12
1.4MHz QPSK RB1#0, Frequency: 707.5MHz								
177.48	H	43.36	-66.06	0.00	0.24	-66.30	-13.00	53.30
43.21	V	45.15	-59.27	-22.16	0.13	-81.56	-13.00	68.56
255.45	H	41.05	-54.69	0.00	0.28	-54.97	-13.00	41.97
188.21	V	43.65	-64.69	0.00	0.25	-64.94	-13.00	51.94
1.4MHz QPSK RB1#0, Frequency: 715.3MHz								
178.62	H	45.20	-64.12	0.00	0.24	-64.36	-13.00	51.36
52.32	V	46.23	-63.64	-13.83	0.14	-77.61	-13.00	64.61
251.24	H	40.41	-54.09	0.00	0.28	-54.37	-13.00	41.37
182.32	V	42.47	-66.32	0.00	0.24	-66.56	-13.00	53.56

FDD-LTE Band 17:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd)	Cable Loss (dB)			
5MHz QPSK RB1#0, Frequency: 706.5MHz								
173.33	H	43.66	-66.11	0.00	0.24	-66.35	-13.00	53.35
63.55	V	46.29	-66.39	-8.42	0.15	-74.96	-13.00	61.96
255.69	H	40.34	-55.47	0.00	0.28	-55.75	-13.00	42.75
179.62	V	45.22	-63.78	0.00	0.24	-64.02	-13.00	51.02
5MHz QPSK RB1#0, Frequency: 710MHz								
171.32	H	43.25	-66.69	0.00	0.24	-66.93	-13.00	53.93
56.62	V	45.29	-65.99	-11.85	0.15	-77.99	-13.00	64.99
252.44	H	41.24	-53.61	0.00	0.28	-53.89	-13.00	40.89
177.21	V	43.33	-65.85	0.00	0.24	-66.09	-13.00	53.09
5MHz QPSK RB1#0, Frequency: 713.5MHz								
173.56	H	41.27	-68.49	0.00	0.24	-68.73	-13.00	55.73
63.22	V	46.54	-66.11	-8.59	0.15	-74.85	-13.00	61.85
251.24	H	41.45	-53.05	0.00	0.28	-53.33	-13.00	40.33
171.48	V	45.48	-64.14	0.00	0.24	-64.38	-13.00	51.38

FDD-LTE Band 66:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd)	Cable Loss (dB)			
1.4MHz QPSK RB1#0, Frequency: 1710.7MHz								
173.39	H	41.29	-68.48	0.00	0.24	-68.72	-13.00	55.72
175.95	V	46.26	-63.02	0.00	0.24	-63.26	-13.00	50.26
253.14	H	40.55	-54.51	0.00	0.28	-54.79	-13.00	41.79
84.49	V	43.54	-70.87	0.00	0.17	-71.04	-13.00	58.04
1.4MHz QPSK RB1#0, Frequency: 1745MHz								
159.65	H	43.62	-67.31	0.00	0.23	-67.54	-13.00	54.54
173.74	V	46.65	-62.80	0.00	0.24	-63.04	-13.00	50.04
236.66	H	40.84	-56.86	0.00	0.27	-57.13	-13.00	44.13
59.64	V	45.78	-66.49	-10.47	0.15	-77.11	-13.00	64.11
1.4MHz QPSK RB1#0, Frequency: 1779.3MHz								
179.61	H	41.66	-67.58	0.00	0.24	-67.82	-13.00	54.82
174.26	V	46.57	-62.84	0.00	0.24	-63.08	-13.00	50.08
253.35	H	40.33	-54.79	0.00	0.28	-55.07	-13.00	42.07
61.28	V	45.42	-67.07	-9.62	0.15	-76.84	-13.00	63.84

TDD-LTE Band 38:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd)	Cable Loss (dB)			
5MHz QPSK RB1#0, Frequency: 2572.5MHz								
173.25	H	43.33	-66.45	0.00	0.24	-66.69	-25.00	41.69
178.54	V	45.25	-63.83	0.00	0.24	-64.07	-25.00	39.07
239.54	H	41.28	-55.65	0.00	0.27	-55.92	-25.00	30.92
59.64	V	43.47	-68.80	-10.47	0.15	-79.42	-25.00	54.42
5MHz QPSK RB1#0, Frequency: 2595MHz								
175.59	H	43.88	-65.70	0.00	0.24	-65.94	-25.00	40.94
84.21	V	46.24	-68.14	0.00	0.17	-68.31	-25.00	43.31
253.33	H	41.45	-53.66	0.00	0.28	-53.94	-25.00	28.94
177.45	V	44.29	-64.88	0.00	0.24	-65.12	-25.00	40.12
5MHz QPSK RB1#0, Frequency: 2617.5MHz								
173.35	H	44.20	-65.57	0.00	0.24	-65.81	-25.00	40.81
72.21	V	46.94	-66.44	-3.90	0.16	-70.50	-25.00	45.50
251.45	H	40.48	-54.08	0.00	0.28	-54.36	-25.00	29.36
173.66	V	43.58	-65.87	0.00	0.24	-66.11	-25.00	41.11

TDD-LTE Band 41:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd)	Cable Loss (dB)			
5MHz QPSK RB1#0, Frequency: 2498.5MHz								
170.21	H	43.35	-66.68	0.00	0.24	-66.92	-25.00	41.92
177.58	V	46.25	-62.91	0.00	0.24	-63.15	-25.00	38.15
239.54	H	40.21	-56.72	0.00	0.27	-56.99	-25.00	31.99
88.51	V	45.58	-69.22	0.00	0.18	-69.40	-25.00	44.40
5MHz QPSK RB1#0, Frequency: 2593MHz								
173.65	H	43.25	-66.49	0.00	0.24	-66.73	-25.00	41.73
177.48	V	46.29	-62.87	0.00	0.24	-63.11	-25.00	38.11
233.98	H	40.22	-58.20	0.00	0.27	-58.47	-25.00	33.47
253.36	V	43.01	-51.62	0.00	0.28	-51.90	-25.00	26.90
5MHz QPSK RB1#0, Frequency: 2687.5MHz								
172.25	H	42.02	-67.84	0.00	0.24	-68.08	-25.00	43.08
173.33	V	45.29	-64.19	0.00	0.24	-64.43	-25.00	39.43
253.84	H	40.10	-55.16	0.00	0.28	-55.44	-25.00	30.44
88.51	V	42.65	-72.15	0.00	0.18	-72.33	-25.00	47.33

Note:

1. Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

6.3.2 Above 1GHz**Configuration 1#(Scanner version)**

Note: The worst modulation and bandwidth is as below:

GPRS Band850 (1-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
Frequency: 824.2MHz								
1648.400	H	60.53	-47.00	8.00	1.64	-40.64	-13.00	27.64
1648.400	V	64.18	-43.54	8.00	1.64	-37.18	-13.00	24.18
2472.600	H	71.57	-27.01	2.74	1.98	-26.25	-13.00	13.25
2472.600	V	74.78	-25.71	2.74	1.98	-24.95	-13.00	11.95
Frequency: 836.6MHz								
1673.200	H	61.45	-45.67	7.91	1.65	-39.41	-13.00	26.41
1673.200	V	64.42	-42.95	7.91	1.65	-36.69	-13.00	23.69
2509.800	H	69.66	-28.76	2.20	1.99	-28.55	-13.00	15.55
2509.800	V	69.61	-30.73	2.20	1.99	-30.52	-13.00	17.52
Frequency: 848.8MHz								
1697.600	H	58.86	-47.87	7.81	1.66	-41.72	-13.00	28.72
1697.600	V	62.12	-44.92	7.81	1.66	-38.77	-13.00	25.77
2546.400	H	66.70	-31.84	1.84	2.01	-32.01	-13.00	19.01
2546.400	V	73.06	-27.24	1.84	2.01	-27.41	-13.00	14.41

PCS Band1900 (1-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
Frequency: 1850.2MHz								
3700.400	H	46.61	-52.83	6.00	2.39	-49.22	-13.00	36.22
3700.400	V	50.58	-49.78	6.00	2.39	-46.17	-13.00	33.17
5550.600	H	52.15	-46.41	10.20	2.91	-39.12	-13.00	26.12
5550.600	V	51.56	-47.67	10.20	2.91	-40.38	-13.00	27.38
Frequency: 1880MHz								
3760.000	H	48.06	-51.22	5.92	2.41	-47.71	-13.00	34.71
3760.000	V	48.97	-51.46	5.92	2.41	-47.95	-13.00	34.95
5640.000	H	45.74	-52.16	9.90	2.93	-45.19	-13.00	32.19
5640.000	V	48.73	-49.75	9.90	2.93	-42.78	-13.00	29.78
Frequency: 1909.8MHz								
3819.600	H	48.97	-50.14	6.16	2.42	-46.40	-13.00	33.40
3819.600	V	49.52	-50.99	6.16	2.42	-47.25	-13.00	34.25
5729.400	H	46.64	-50.59	9.68	2.95	-43.86	-13.00	30.86
5729.400	V	48.37	-49.36	9.68	2.95	-42.63	-13.00	29.63

WCDMA Band 2(1-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
Frequency: 1852.4MHz								
3704.800	H	56.49	-42.94	5.99	2.40	-39.35	-13.00	26.35
3704.800	V	60.49	-39.87	5.99	2.40	-36.28	-13.00	23.28
5557.200	H	51.13	-47.38	10.16	2.91	-40.13	-13.00	27.13
5557.200	V	50.28	-48.89	10.16	2.91	-41.64	-13.00	28.64
Frequency: 1880MHz								
3760.000	H	53.70	-45.58	5.92	2.41	-42.07	-13.00	29.07
3760.000	V	58.30	-42.13	5.92	2.41	-38.62	-13.00	25.62
5640.000	H	50.66	-47.24	9.90	2.93	-40.27	-13.00	27.27
5640.000	V	52.33	-46.15	9.90	2.93	-39.18	-13.00	26.18
Frequency: 1907.6MHz								
3815.200	H	54.36	-44.76	6.12	2.42	-41.06	-13.00	28.06
3815.200	V	60.42	-40.08	6.12	2.42	-36.38	-13.00	23.38
5722.800	H	51.79	-45.49	9.71	2.95	-38.73	-13.00	25.73
5722.800	V	55.23	-42.56	9.71	2.95	-35.80	-13.00	22.80

WCDMA Band 4(1-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
Frequency: 1712.4MHz								
3424.800	H	60.51	-39.50	4.75	2.32	-37.07	-13.00	24.07
3424.800	V	63.35	-36.71	4.75	2.32	-34.28	-13.00	21.28
5137.200	H	47.63	-51.74	10.73	2.78	-43.79	-13.00	30.79
5137.200	V	48.78	-49.95	10.73	2.78	-42.00	-13.00	29.00
Frequency: 1732.6MHz								
3465.200	H	57.57	-42.44	5.08	2.34	-39.70	-13.00	26.70
3465.200	V	62.58	-37.51	5.08	2.34	-34.77	-13.00	21.77
5197.800	H	48.63	-50.67	10.60	2.80	-42.87	-13.00	29.87
5197.800	V	51.53	-47.35	10.60	2.80	-39.55	-13.00	26.55
Frequency:1752.6MHz								
3505.200	H	56.57	-43.43	5.54	2.35	-40.24	-13.00	27.24
3505.200	V	62.98	-37.14	5.54	2.35	-33.95	-13.00	20.95
5257.800	H	47.82	-51.41	10.83	2.82	-43.40	-13.00	30.40
5257.800	V	51.57	-47.46	10.83	2.82	-39.45	-13.00	26.45

WCDMA Band 5(1-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
Frequency: 826.4MHz								
1652.800	H	54.18	-53.28	7.99	1.64	-46.93	-13.00	33.93
1652.800	V	58.50	-49.16	7.99	1.64	-42.81	-13.00	29.81
2479.200	H	61.42	-37.11	2.63	1.98	-36.46	-13.00	23.46
2479.200	V	71.21	-29.24	2.63	1.98	-28.59	-13.00	15.59
Frequency: 836.6MHz								
1673.200	H	55.30	-51.82	7.91	1.65	-45.56	-13.00	32.56
1673.200	V	53.70	-53.67	7.91	1.65	-47.41	-13.00	34.41
2509.800	H	59.12	-39.30	2.20	1.99	-39.09	-13.00	26.09
2509.800	V	63.49	-36.85	2.20	1.99	-36.64	-13.00	23.64
Frequency:846.6MHz								
1693.200	H	53.38	-53.42	7.83	1.66	-47.25	-13.00	34.25
1693.200	V	50.38	-56.72	7.83	1.66	-50.55	-13.00	37.55
2539.800	H	60.12	-38.40	1.90	2.00	-38.50	-13.00	25.50
2539.800	V	60.50	-39.80	1.90	2.00	-39.90	-13.00	26.90

FDD-LTE Band 2(1-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
1.4MHz QPSK RB1#0, Frequency: 1850.7MHz								
3701.400	H	56.95	-48.03	6.00	2.39	-44.42	-13.00	31.42
3701.400	V	62.56	-42.69	6.00	2.39	-39.08	-13.00	26.08
5552.100	H	52.03	-53.75	10.19	2.91	-46.47	-13.00	33.47
5552.100	V	52.94	-53.37	10.19	2.91	-46.09	-13.00	33.09
1.4MHz QPSK RB1#0, Frequency: 1880 MHz								
3760.000	H	55.57	-49.36	5.92	2.41	-45.85	-13.00	32.85
3760.000	V	59.11	-45.98	5.92	2.41	-42.47	-13.00	29.47
5640.000	H	53.32	-52.15	9.90	2.93	-45.18	-13.00	32.18
5640.000	V	57.21	-48.82	9.90	2.93	-41.85	-13.00	28.85
1.4MHz QPSK RB1#0, Frequency: 1909.3 MHz								
3818.600	H	53.60	-51.28	6.15	2.42	-47.55	-13.00	34.55
3818.600	V	58.25	-46.67	6.15	2.42	-42.94	-13.00	29.94
5727.900	H	53.18	-51.99	9.69	2.95	-45.25	-13.00	32.25
5727.900	V	58.03	-47.72	9.69	2.95	-40.98	-13.00	27.98

FDD-LTE Band 4(1-18GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
1.4MHz QPSK RB1#0, Frequency: 1710.7MHz								
3421.400	H	64.34	-40.79	4.73	2.32	-38.38	-13.00	25.38
3421.400	V	66.45	-39.28	4.73	2.32	-36.87	-13.00	23.87
5132.100	H	49.06	-56.69	10.74	2.77	-48.72	-13.00	35.72
5132.100	V	46.86	-59.41	10.74	2.77	-51.44	-13.00	38.44
1.4MHz QPSK RB1#0, Frequency: 1732.5MHz								
3465.000	H	60.36	-44.79	5.08	2.34	-42.05	-13.00	29.05
3465.000	V	64.01	-41.78	5.08	2.34	-39.04	-13.00	26.04
5197.500	H	56.48	-49.31	10.61	2.80	-41.50	-13.00	28.50
5197.500	V	55.92	-50.38	10.61	2.80	-42.57	-13.00	29.57
1.4MHz QPSK RB1#0, Frequency: 1754.3MHz								
3508.600	H	58.76	-46.39	5.57	2.35	-43.17	-13.00	30.17
3508.600	V	65.90	-39.91	5.57	2.35	-36.69	-13.00	23.69
5262.900	H	46.53	-59.30	10.85	2.82	-51.27	-13.00	38.27
5262.900	V	47.69	-58.65	10.85	2.82	-50.62	-13.00	37.62

FDD-LTE Band 5(1-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
1.4MHz QPSK RB1#0, Frequency: 824.7MHz								
1649.400	H	56.30	-57.62	8.00	1.64	-51.26	-13.00	38.26
1649.400	V	60.13	-54.17	8.00	1.64	-47.81	-13.00	34.81
2474.100	H	69.70	-36.90	2.71	1.98	-36.17	-13.00	23.17
2474.100	V	70.06	-36.90	2.71	1.98	-36.17	-13.00	23.17
1.4MHz QPSK RB1#0, Frequency: 836.5MHz								
1673.000	H	62.57	-51.06	7.91	1.65	-44.80	-13.00	31.80
1673.000	V	60.85	-53.15	7.91	1.65	-46.89	-13.00	33.89
2509.500	H	67.82	-38.59	2.21	1.99	-38.37	-13.00	25.37
2509.500	V	77.76	-29.01	2.21	1.99	-28.79	-13.00	15.79
1.4MHz QPSK RB1#0, Frequency: 848.3MHz								
1696.600	H	59.18	-54.16	7.81	1.66	-48.01	-13.00	35.01
1696.600	V	56.31	-57.39	7.81	1.66	-51.24	-13.00	38.24
2544.900	H	65.06	-41.25	1.85	2.01	-41.41	-13.00	28.41
2544.900	V	65.69	-40.97	1.85	2.01	-41.13	-13.00	28.13

FDD-LTE Band 7(1-26GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
5MHz QPSK RB1#0, Frequency:2502.5MHz								
5005.000	H	52.64	-53.04	10.60	2.73	-45.17	-25.00	20.17
5005.000	V	52.14	-54.05	10.60	2.73	-46.18	-25.00	21.18
7507.500	H	46.68	-53.85	7.56	3.34	-49.63	-25.00	24.63
7507.500	V	46.95	-54.71	7.56	3.34	-50.49	-25.00	25.49
5MHz QPSK RB1#0, Frequency: 2535MHz								
5070.000	H	50.30	-55.42	10.68	2.75	-47.49	-25.00	22.49
5070.000	V	51.13	-55.10	10.68	2.75	-47.17	-25.00	22.17
7605.000	H	47.41	-52.93	8.20	3.38	-48.11	-25.00	23.11
7605.000	V	49.73	-51.69	8.20	3.38	-46.87	-25.00	21.87
5MHz QPSK RB1#0, Frequency: 2567.5MHz								
5135.000	H	49.74	-56.02	10.73	2.78	-48.07	-25.00	23.07
5135.000	V	54.13	-52.14	10.73	2.78	-44.19	-25.00	19.19
7702.500	H	44.96	-55.18	7.44	3.43	-51.17	-25.00	26.17
7702.500	V	45.94	-55.24	7.44	3.43	-51.23	-25.00	26.23

FDD-LTE Band 12(1-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
1.4MHz QPSK RB1#0, Frequency: 699.7MHz								
1399.400	H	56.55	-59.27	7.70	1.53	-53.10	-13.00	40.10
1399.400	V	55.71	-60.58	7.70	1.53	-54.41	-13.00	41.41
2099.100	H	68.40	-40.57	3.58	1.82	-38.81	-13.00	25.81
2099.100	V	67.76	-41.45	3.58	1.82	-39.69	-13.00	26.69
1.4MHz QPSK RB1#0, Frequency: 707.5MHz								
1415.000	H	59.59	-56.22	7.76	1.54	-50.00	-13.00	37.00
1415.000	V	54.27	-62.01	7.76	1.54	-55.79	-13.00	42.79
2122.500	H	67.27	-41.56	3.74	1.83	-39.65	-13.00	26.65
2122.500	V	72.80	-36.27	3.74	1.83	-34.36	-13.00	21.36
1.4MHz QPSK RB1#0, Frequency: 715.3MHz								
1430.600	H	62.25	-53.55	7.82	1.55	-47.28	-13.00	34.28
1430.600	V	57.04	-59.23	7.82	1.55	-52.96	-13.00	39.96
2145.900	H	62.22	-46.46	3.88	1.84	-44.42	-13.00	31.42
2145.900	V	67.79	-41.13	3.88	1.84	-39.09	-13.00	26.09

FDD-LTE Band 17(1-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
5MHz QPSK RB1#0, Frequency:706.5MHz								
1413.000	H	59.31	-56.50	7.75	1.54	-50.29	-13.00	37.29
1413.000	V	57.55	-58.73	7.75	1.54	-52.52	-13.00	39.52
2119.500	H	65.76	-43.08	3.72	1.83	-41.19	-13.00	28.19
2119.500	V	71.70	-37.38	3.72	1.83	-35.49	-13.00	22.49
5MHz QPSK RB1#0, Frequency: 710MHz								
1420.000	H	60.65	-55.16	7.78	1.54	-48.92	-13.00	35.92
1420.000	V	57.36	-58.92	7.78	1.54	-52.68	-13.00	39.68
2130.000	H	68.91	-39.87	3.78	1.83	-37.92	-13.00	24.92
2130.000	V	70.90	-38.12	3.78	1.83	-36.17	-13.00	23.17
5MHz QPSK RB1#0, Frequency: 713.5MHz								
1427.000	H	57.11	-58.69	7.81	1.54	-52.42	-13.00	39.42
1427.000	V	52.83	-63.44	7.81	1.54	-57.17	-13.00	44.17
2140.500	H	66.57	-42.14	3.84	1.84	-40.14	-13.00	27.14
2140.500	V	70.22	-38.74	3.84	1.84	-36.74	-13.00	23.74

FDD-LTE Band 66(1-18GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
1.4MHz QPSK RB1#0, Frequency: 1710.7MHz								
3421.400	H	63.87	-41.26	4.73	2.32	-38.85	-13.00	25.85
3421.400	V	65.74	-39.99	4.73	2.32	-37.58	-13.00	24.58
5132.100	H	52.92	-52.83	10.74	2.77	-44.86	-13.00	31.86
5132.100	V	57.33	-48.94	10.74	2.77	-40.97	-13.00	27.97
1.4MHz QPSK RB1#0, Frequency: 1745MHz								
3490.000	H	59.03	-46.13	5.38	2.35	-43.10	-13.00	30.10
3490.000	V	65.99	-39.83	5.38	2.35	-36.80	-13.00	23.80
5235.000	H	54.74	-51.07	10.74	2.81	-43.14	-13.00	30.14
5235.000	V	59.00	-47.33	10.74	2.81	-39.40	-13.00	26.40
1.4MHz QPSK RB1#0, Frequency: 1779.3MHz								
3558.600	H	59.63	-45.48	5.92	2.36	-41.92	-13.00	28.92
3558.600	V	64.67	-40.99	5.92	2.36	-37.43	-13.00	24.43
5337.900	H	57.15	-48.72	10.92	2.84	-40.64	-13.00	27.64
5337.900	V	54.28	-52.11	10.92	2.84	-44.03	-13.00	31.03

TDD-LTE Band 38(1-26.5GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
5MHz QPSK RB1#0, Frequency: 2572.5MHz								
5145.000	H	46.44	-59.32	10.71	2.78	-51.39	-25.00	26.39
5145.000	V	46.80	-59.47	10.71	2.78	-51.54	-25.00	26.54
7717.500	H	44.77	-55.34	7.72	3.43	-51.05	-25.00	26.05
7717.500	V	47.06	-54.08	7.72	3.43	-49.79	-25.00	24.79
5MHz QPSK RB1#0, Frequency: 2595MHz								
5190.000	H	46.57	-59.22	10.62	2.79	-51.39	-25.00	26.39
5190.000	V	47.51	-58.79	10.62	2.79	-50.96	-25.00	25.96
7785.000	H	46.41	-53.56	8.30	3.46	-48.72	-25.00	23.72
7785.000	V	44.85	-56.12	8.30	3.46	-51.28	-25.00	26.28
5MHz QPSK RB1#0, Frequency: 2617.5MHz								
5235.000	H	46.24	-59.57	10.74	2.81	-51.64	-25.00	26.64
5235.000	V	45.94	-60.39	10.74	2.81	-52.46	-25.00	27.46
7852.500	H	45.78	-54.06	8.60	3.49	-48.95	-25.00	23.95
7852.500	V	44.36	-56.45	8.60	3.49	-51.34	-25.00	26.34

TDD-LTE Band 41(1-27GHz)

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)			
5MHz QPSK RB1#0, Frequency: 2498.5MHz								
4997.000	H	53.61	-52.07	10.61	2.73	-44.19	-25.00	19.19
4997.000	V	58.26	-47.93	10.61	2.73	-40.05	-25.00	15.05
7495.500	H	47.94	-52.62	7.52	3.34	-48.44	-25.00	23.44
7495.500	V	47.38	-54.30	7.52	3.34	-50.12	-25.00	25.12
5MHz QPSK RB1#0, Frequency: 2593MHz								
5186.000	H	46.94	-58.84	10.63	2.79	-51.00	-25.00	26.00
5186.000	V	46.08	-60.22	10.63	2.79	-52.38	-25.00	27.38
7779.000	H	44.61	-55.38	8.30	3.46	-50.54	-25.00	25.54
7779.000	V	46.56	-54.43	8.30	3.46	-49.59	-25.00	24.59
5MHz QPSK RB1#0, Frequency: 2687.5MHz								
5375.000	H	45.65	-60.24	10.80	2.86	-52.30	-25.00	27.30
5375.000	V	46.10	-60.31	10.80	2.86	-52.37	-25.00	27.37
8062.500	H	47.93	-51.01	9.60	3.55	-44.96	-25.00	19.96
8062.500	V	47.75	-51.79	9.60	3.55	-45.74	-25.00	20.74

Note:

1. Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

7. EUT PHOTOGRAPHS

Please refer to the attachment 2607P41361E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2607P41361E-RF-INP EUT INTERNAL PHOTOGRAPHS.

8. TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2607P41361E-RF-TSP-02 SETUP PHOTOGRAPHS.

Declarations

1. Bay Area Compliance Laboratories Corp. (Xiamen) is not responsible for authenticity of any information provided by the applicant. Information from the applicant that may affect test results are marked with an asterisk “★”.
2. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested.
3. Unless required by the rule provided by the applicant or product regulations, then decision rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor k with the 95% confidence interval.
5. This report cannot be reproduced except in full, without prior written approval of Bay Area Compliance Laboratories Corp. (Xiamen).
6. This report is valid only with a valid digital signature. The digital signature may be available only under the adobe software above version 7.0.

******* END OF REPORT *******