



LCIE

TEST REPORT

N°: 678803CR2016-01-28

JDE : 137591

Subject

Electromagnetic compatibility (EMC) :
Publication CFR 47 PART 15.225; RSS-210 issue 8 & RSS-GEN issue 4 (Limited program)

FCC Registration number

166175

Industry Canada number

6230B

Issued to

INGENICO
28-32 Boulevard de Grenelle
75015 Paris
FRANCE

Apparatus under test

↳ Product

Payment terminal

↳ Trade mark

Ingenico

↳ Manufacturer

Ingenico

↳ Model under test

ISC480 INT

↳ Serial number

14197SC80301170

↳ FCC ID

XKB-ISC480CLINT

↳ IC

2586D-ISC480CLINT

Test date

November 26th, 2015 to November 27th, 2015

Test location

Fontenay Aux Roses

Test performed by

Laurent Deneux

Composition of document

16 pages

Initial issued on


January 12th, 2016

Modified on

January 28th, 2016

Written by :
Laurent DENEUX
Tests operator

Approved by :

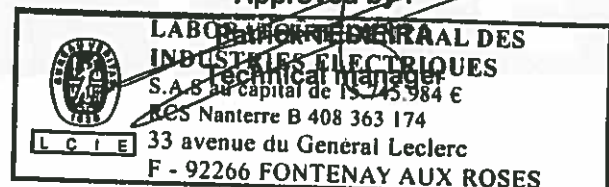

This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the item tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measures. This document doesn't anticipate any certification decision.



SUMMARY

1.	TEST PROGRAM	3
2.	EQUIPMENT DESCRIPTION (DECLARED BY PROVIDER)	4
3.	MEASUREMENT OF RADIATED EMISSIONS.....	7
4.	MEASUREMENT OF CONDUCTED DISTURBANCE	10
5.	UNCERTAINTIES CHART	16



1. Test Program

References

- 47 CFR Part 15C
- RSS-210 issue 8
- RSS-Gen issue 4
- CISPR 16-4-2
- ANSI C63.10 (2013)

Emission tests:

Test Description	Test Description	Test result - Comments
RSS-Gen § 6.6	Occupied Bandwidth	☐ PASS ☐ FAIL ☐ NA ☒ NP (Limited Program)
CFR 47 § 15.225 (e) RSS-210 § A2.6	Frequency tolerance	☐ PASS ☐ FAIL ☐ NA ☒ NP (Limited Program)
CFR 47 § 15.207 RSS-Gen § 8.8	AC Power Line Conducted Emissions	☒ PASS ☐ FAIL ☐ NA ☐ NP (Limited Program)
CFR 47 § 15.225 (a) (b) (c) RSS-210 § A2.6 (a) (b) (c)	Field strength within the band 13.110-14.010 MHz	☐ PASS ☐ FAIL ☐ NA ☒ NP (Limited Program)
CFR 47 § 15.209 (a) CFR 47 § 15.225 (d) RSS-210 § A2.6 (d)	Field strength outside of the bands 13.110-14.010 MHz	☒ PASS (30MHz-1GHz only) ☐ FAIL ☐ NA ☐ NP (Limited Program)
RSS-Gen § 7.1	Receiver Radiated emissions	☐ PASS ☐ FAIL ☒ NA (Transceiver equipment. Include in Field strength test) ☐ NP (Limited Program)

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement



NA: Not Applicable

NP: Test Not Performed



2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Serial Number: 14797SC80301170



Equipment Under Test

**Inputs/outputs - Cable:**

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
Power supply AC	-	-	☒	☐	☐	Nothing to report

Auxiliary equipment used during test:

Type	Reference	Sn	Comments
-	-	-	-

Equipment information: (Declared by provider)

Apparatus Description	The ISC480 contactless interne is a payment terminal.			
Type of power source:	☒ AC power supply	☐ DC power supply	☐ Battery (Select Type)	
Test source voltage:	Vmin-Vmax:	☒ 120V -60Hz	☐ Vdc	
Operating Modes	Mode 1	Loop increment:  Operation frequency : 13.56MHz		

2.2. EQUIPMENT LABELLING





2.3. EQUIPMENT MODIFICATIONS
☒ None ☐ Modification:

3. Measurement of radiated emissions

3.1. ENVIRONMENTAL CONDITIONS

Test performed by : Laurent Deneux
Date of test : 2015/11/26
Ambient temperature : 21°C
Relative humidity : 46%

3.2. TEST SETUP

Specifications:

Frequency 30 – 1000 MHz RBW 120 kHz

Detector Peak and Quasi-Peak

Pre characterization in semi anechoic room is performed to define the critical frequencies

Operating conditions:

- The Equipment under Test is installed:

☐ Measure in semi anechoic room

☒ Measure in open area site

- Measuring distance:

☐ 3m

☒ 10m

- Deviation method:

☐ Yes

☒ No


-Product installation:

☒ The EUT was tested as a tabletop equipment and was placed on a non-conducting platform the top of which is 0.8m above the metal ground plane.

☐ The EUT is at 10cm height from reference plane

Operating mode:

☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ...

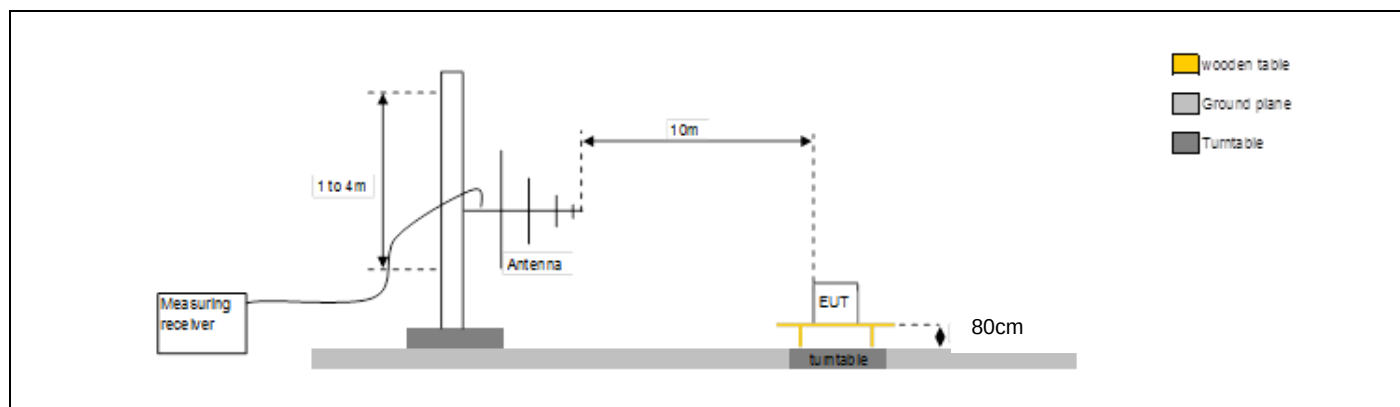

Test Set up for radiated measurement in open area site(30MHz to 1000MHz)

**3.3. TEST EQUIPMENT LIST**

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Open test site	LCIE	-	F2000400	2015-06	2016-06
EMI Test Receiver	ROHDE & SCHWARZ	ESU	A2642018	2015-01	2016-01
Cable	-	-	A5329442	2015-10	2016-10
cable	-	-	A5329362	2015-03	2016-03
Bilog antenna	CHASE	CBL 6112A	C2040040	2015-04	2016-04
Cable	-	-	A5329449	2015-10	2016-10
Cable	-	-	A5329368	2015-03	2016-03
cable	-	-	A5329444	2015-10	2016-10


3.4. RESULTS**Table N°1**

10 m radiated measurement graph from 30 to 1000 MHz

<u>Frequency (MHz)</u>	<u>Quasi-peak measurements @ 10m (dBμV/m)</u>	<u>Limits @ 10m (dBμV/m)</u>
40.7	26.3	29.5
166.7	28.5	33
244.1	33.6	35.5
400	34.7	35.5
600	34.2	35.5
800	33.9	35.5



Diagram N°1
Horizontal & vertical Polarization (30MHz-1GHz)

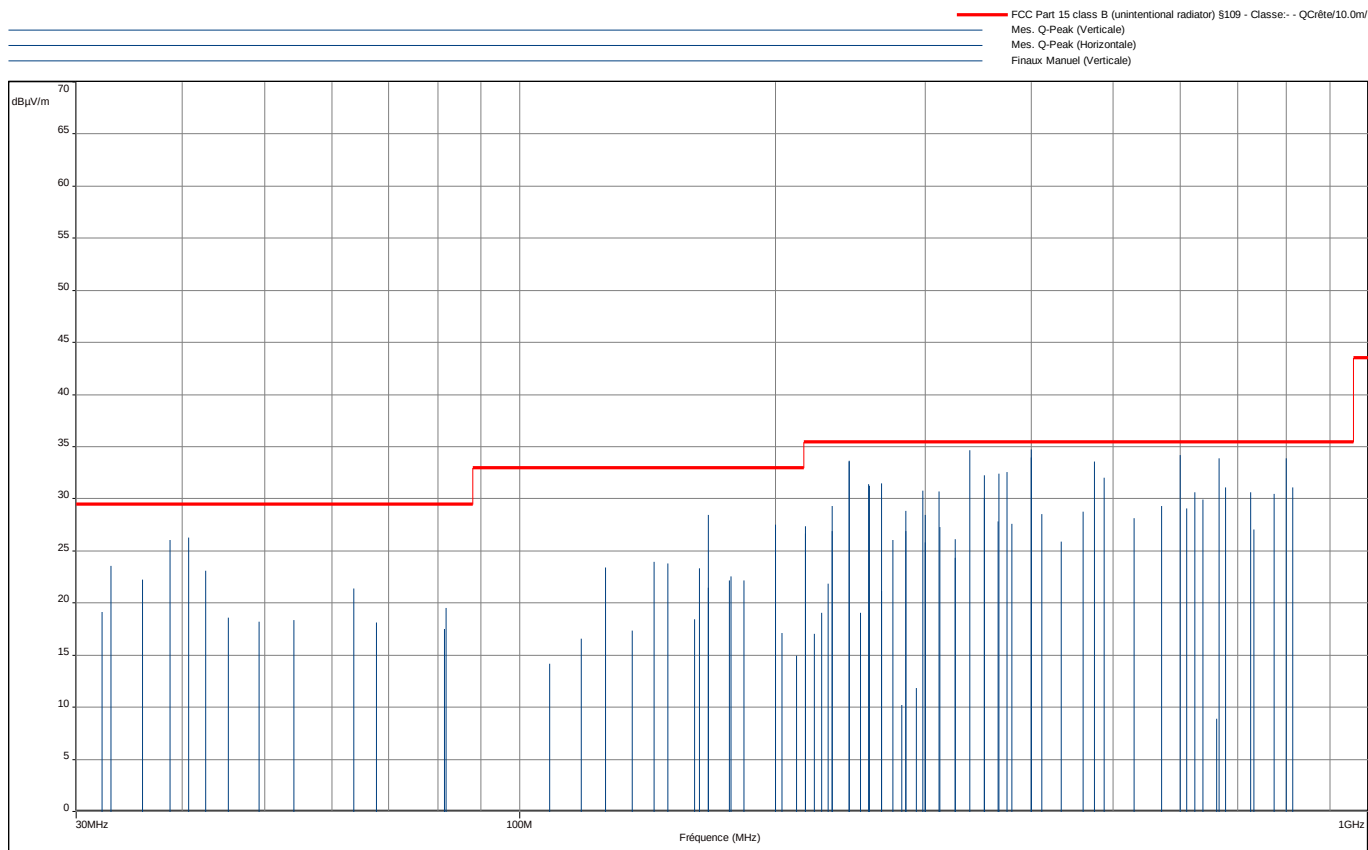

3.5. CONCLUSION

Measures of Radiated Emission, performed on the sample of the product **ISC480 INT**, SN: **14197SC80301170**, in configuration and description presented in this test report, show levels **conform to** the FCC part 15 & RSS-GEN §7.2.4 limits.



4. Measurement of conducted disturbance

4.1. ENVIRONMENTAL CONDITIONS

Test performed by : Laurent Deneux
Date of test : 2015/11/27
Ambient temperature : 21°C
Relative humidity : 46%

4.2. TEST SETUP

Specifications:

Frequency 0.15 – 30 MHz RBW 9 kHz
Detector Peak , Quasi Peak and average

The measurement is performed on power supply with a LISN and telecommunication lines with RSI or current clamp for shielded cables.

Operating conditions:

- Deviation method:


- ☐ Yes
☒ No

-Product installation:

- ☐ The EUT is installed on a wooden table 80 cm above the reference plane, at 80cm of the 50Ohm/50microhenry LISN and at 40cm of the vertical conductive wall
☒ The EUT is installed on a wooden table 40 cm above the reference plane, at 80cm of the 50Ohm/50microhenry LISN.
☐ The EUT is installed 10 cm above the reference plane, at 80cm of the 50Ohm/50microhenry LISN.

Operating mode:


- ☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ...

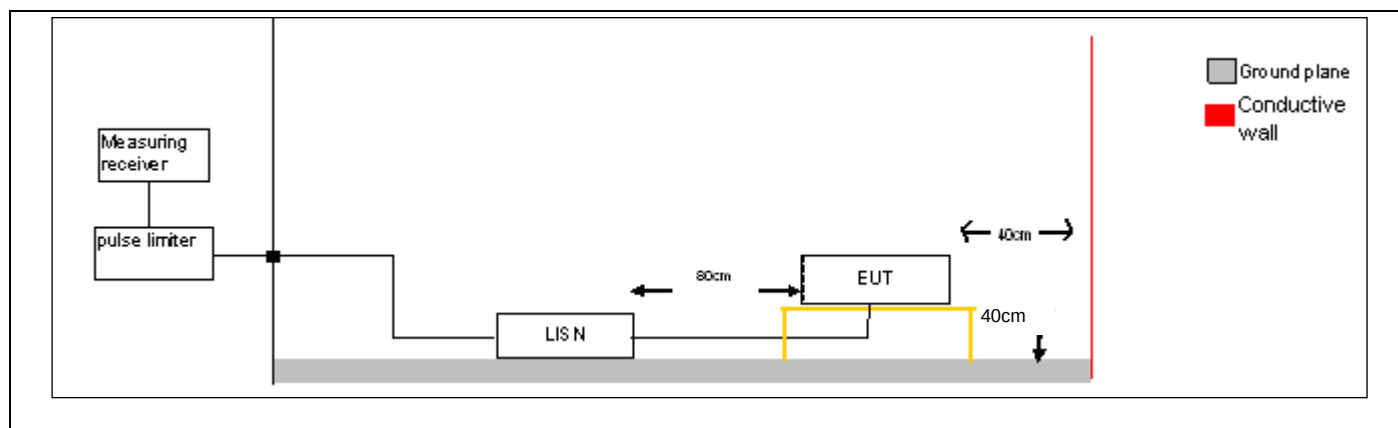

Test set up of conducted emission on power supply



Test set up of conducted emission on power supply

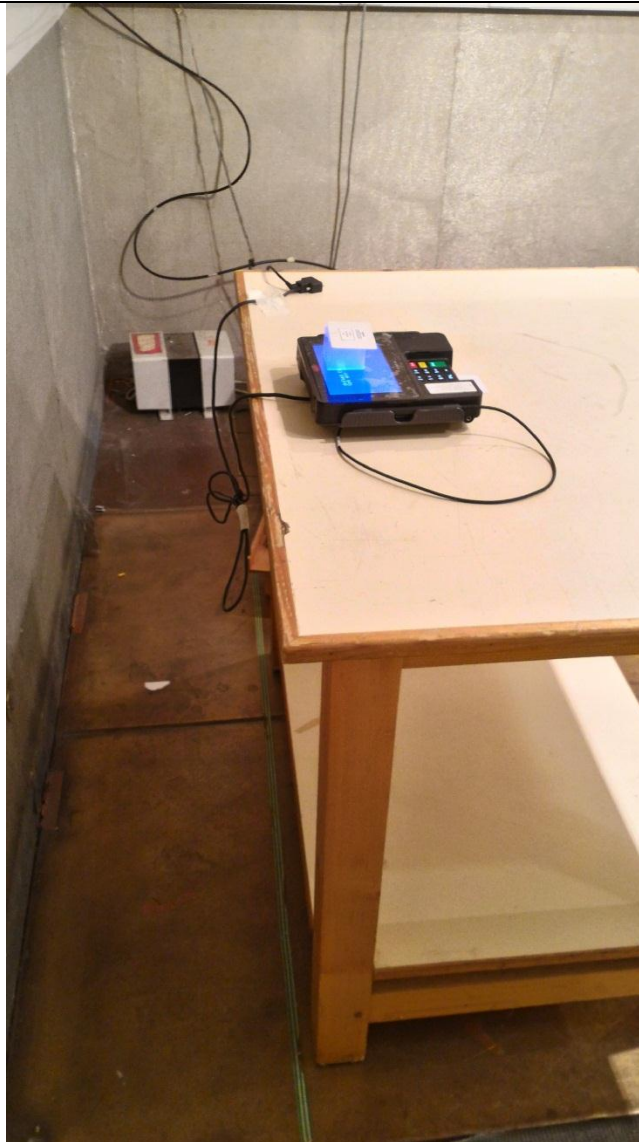

Test set up of conducted emission on power supply

4.3. LIMIT

☐ Power supply Class A

Frequency Bands/frequencies	dB μ V quasi-peak	dB μ V average
0.15-0.5MHz	79	66
0.5-30 MHz	73	60

☒ Power supply Class B

Frequency Bands/frequencies	dB μ V quasi-peak	dB μ V average
0.15-0.5MHz	66-56	56-46
0.5-5 MHz	56	46
5-30 MHz	60	50




4.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal. Date	Cal. Due
Reference ground plan 2 x 3m	L.C.I.E.	-	-	-	-
Recepteur/ Receiver	RHODE & SCHWARZ	ESU	A2642018	2015-01	2016-01
Cable	-	-	A5329417	2015-10	2016-10
Réseau V / V ISLN	ROHDE & SCHWARZ	ESH2-Z5	C2322002	2015-06	2016-06
Limiteur d'impulsion / Pulse limiter	ROHDE & SCHWARZ	ESH3-Z2	A2649008	2015-02	2016-02

4.5. RESULTS


Diagram N°1
Phase

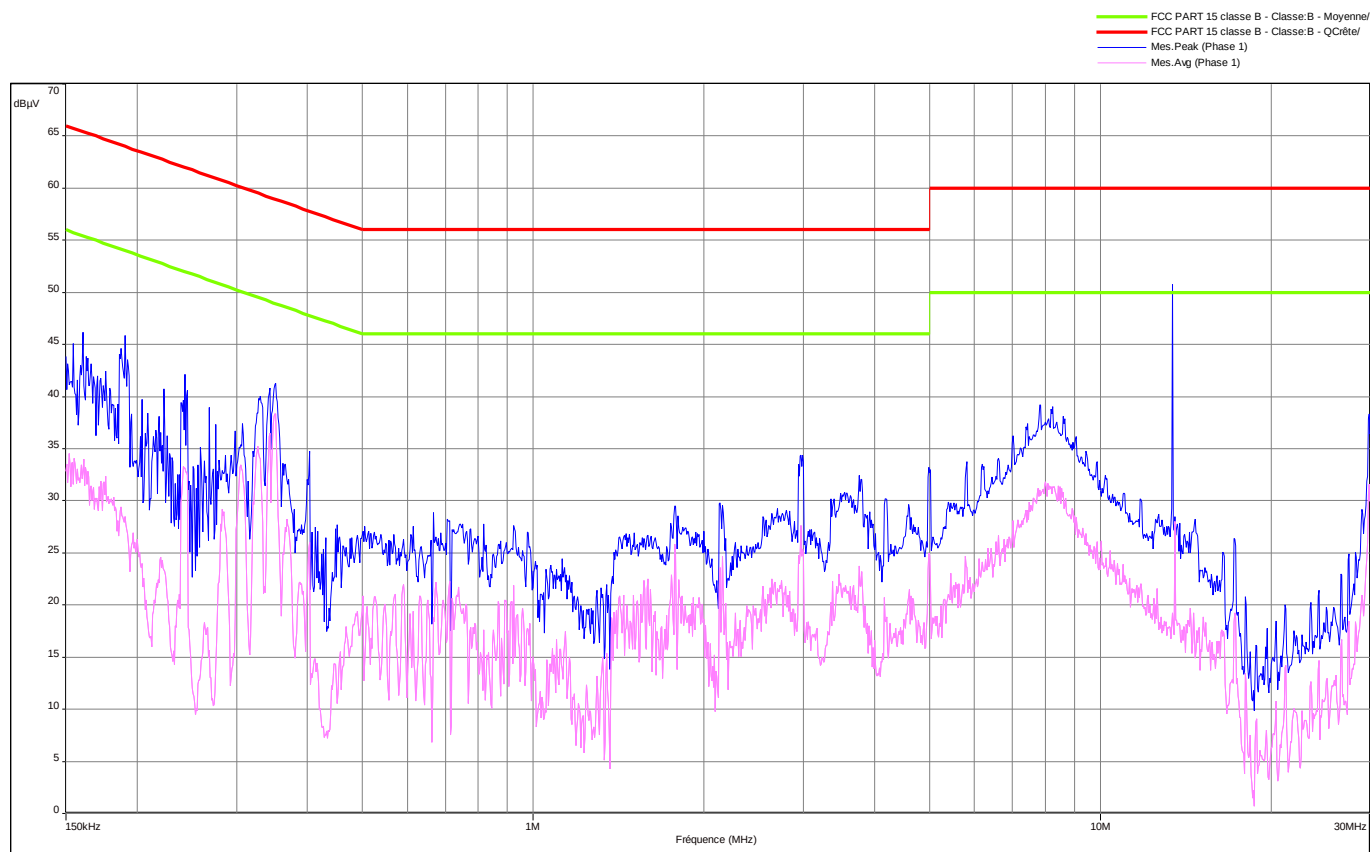

Frequency (MHz)	Peak measurements (dBμV)	Quasi-Peak measurements (dBμV)	Quasi-Peak limits (dBμV)	Average measurement (dBμV)	Average limits (dBμV)
0.160	46	-	65.5	34.5	55.5
0.350	41.2	-	59	38.3	49
2.966	34.4	-	56	27.6	46
13.56	50.5	-	60	28	50
30	38	-	60	31.6	50

Diagram N°2
Neutral

— FCC PART 15 classe B - Classe:B - Moyenne/
— FCC PART 15 classe B - Classe:B - QCrête/
— Mes. Peak (Neutre)
— Mes. Avg (Neutre)

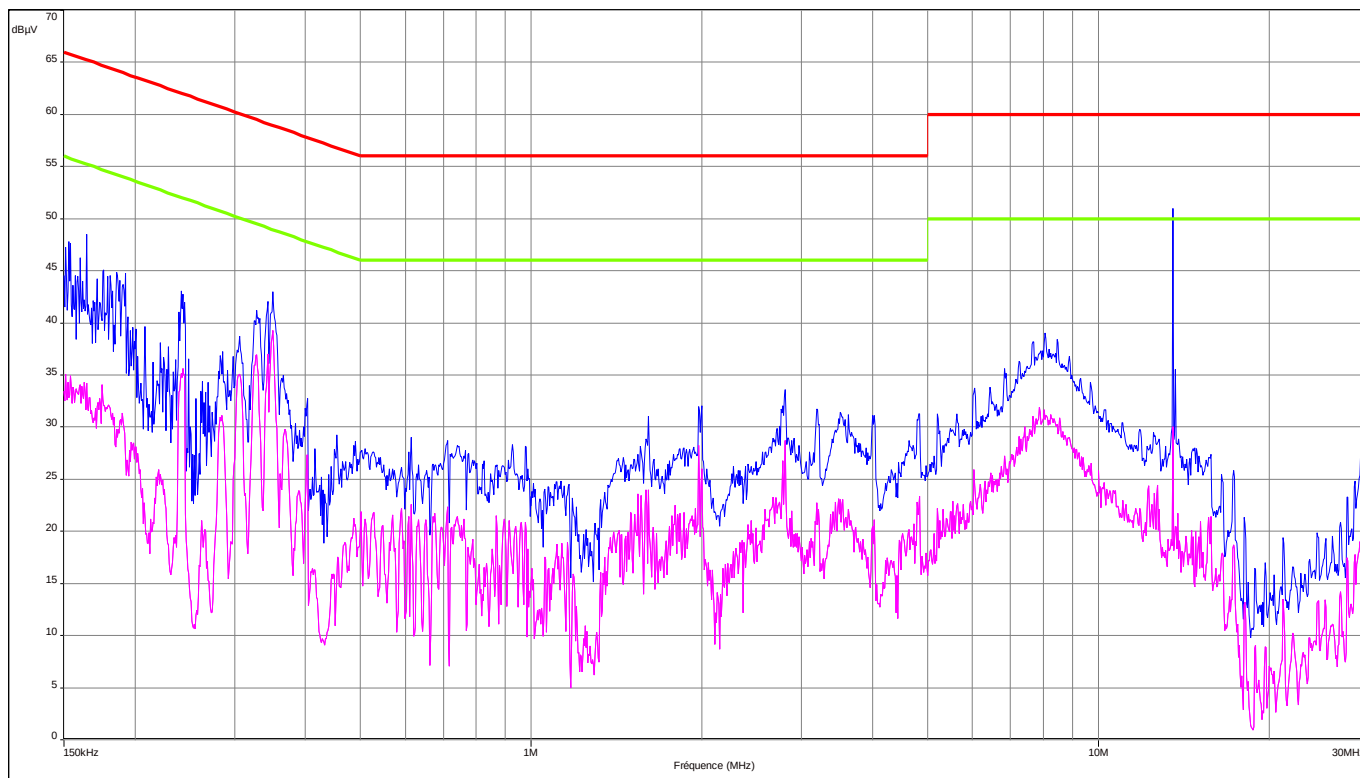

Frequency (MHz)	Peak measurements (dBμV)	Quasi-Peak measurements (dBμV)	Quasi-Peak limits (dBμV)	Average measurement (dBμV)	Average limits (dBμV)
0.164	48.5	-	65.2	35	55.2
0.350	43	-	58.9	39.3	48.9
2.808	33.6	-	56	28.8	46
13.56	51	-	60	30	50
30	35	-	60	32	50

4.6. CONCLUSION

Measures of Conducted Emission, performed on the sample of the product **ISC480 INT**, SN: **14197SC80301170**, in configuration and description presented in this test report, show levels **conform to** the FCC part 15 RSS-GEN §7.2.5 limits.



5. Uncertainties Chart

Kind of measurement	Wide uncertainty laboratory (k=2) $\pm x$ (dB)	CISPR uncertainty limit $\pm y$ (dB)
Measurement of conducted disturbances in voltage on the AC power port on the Fontenay-aux-Roses site.	3.51	3.6
Measurement of discontinuous conducted disturbances in voltage on the AC power port on the Fontenay-aux-Roses site. (S48 room)	3.45	3.6
Measurement of conducted disturbances in voltage on the AC power port on the Ecuelles site.	3.86	3.6
In Situ measurement of conducted disturbances in voltage on the AC power port with ESH2 receiver	3.51	3.6
Measurement of conducted disturbances in voltage on the DC power port on the Fontenay-aux-Roses site.	3.49	3.6
Measurement of conducted disturbances in voltage on the DC power port on the Ecuelles site.	3.72	3.6
Measurement of conducted disturbances in voltage on the telecommunication port.	3.26	Under consideration
Measurement of conducted disturbances in voltage on the telecommunication port at Ecuelles Site.	3.45	Under consideration
Measurement of conducted disturbances in current	3.09	Under consideration
Measurement of radiated electric field from 30 to 200MHz on the Fontenay-aux-Roses site (with EATON 96002 antenna)	5.2	5.2
Measurement of radiated electric field from 200 to 1000MHz on the Fontenay-aux-Roses site	5.3	5.2
Measurement of radiated electric field from 1 to 18GHz on the Fontenay-aux-Roses site	4.8	Under consideration
Measurement of radiated electric field from 30 to 80MHz in horizontal position on the Ecuelles site (dipole antenna)	3.77	5.2
Measurement of radiated electric field from 30 to 80MHz in vertical position on the Ecuelles site (dipole antenna)	4.12	5.2
Measurement of radiated electric field from 80 to 1000MHz in horizontal position on the Ecuelles site (R&S HL023 A2 logper antenna)	4.19	5.2
Measurement of radiated electric field from 80 to 1000MHz in vertical position on the Ecuelles site (R&S HL023 A2 logper antenna)	4.50	5.2
Measurement of radiated electric field from 30 to 1000MHz in horizontal position on the Ecuelles site (CBL6112 bilog antenna)	4.24	5.2
Measurement of radiated electric field from 30 to 1000MHz in vertical position on the Ecuelles site (CBL6112 bilog antenna)	4.55	5.2
Measurement of radiated electric field from 1 to 18GHz on the Ecuelles site	5.16	Under consideration
Measurement of current harmonics	11.11%	/
Flicker measurement	9.26%	/
Measurement of disturbance power	3.32	4.5
Immunity to conducted disturbances, induced by radio-frequency fields	2.36	/
Immunity to conducted disturbances, induced by radio-frequency fields with injection clamp	2.76	/
Immunity to radiated electromagnetic field	2.64	/
EMF measurement according to EN62233 from 10KHz to 400KHz	23,51%	/

Unless otherwise specified, the decision of conformity takes into account the uncertainty of measures.

End of test report