

Test Plot 1#:WLAN 2.4G Handheld Back Low Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 52.674$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.56, 7.56, 7.56); Calibrated: 2016/10/4;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.473 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.397 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.757 W/kg

SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.564 W/kg

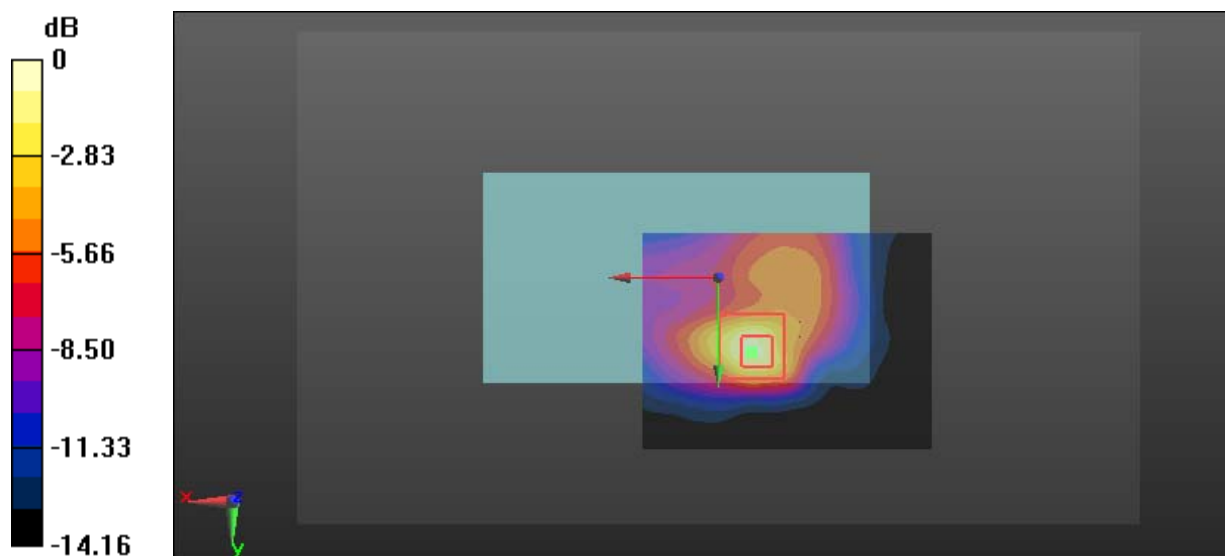

0 dB = 0.564 W/kg = -2.49 dBW/kg

Test Plot 2#:WLAN 2.4G Handheld Back Middle Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.958$ S/m; $\epsilon_r = 54.418$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.56, 7.56, 7.56); Calibrated: 2016/10/4;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.643 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.231 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.793 W/kg

SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.584 W/kg

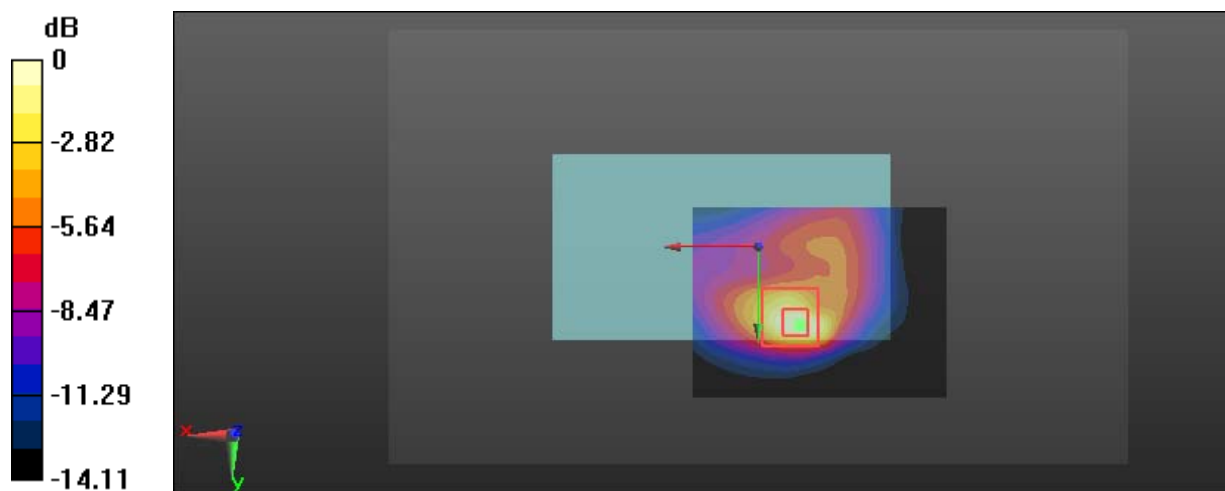

0 dB = 0.584 W/kg = -2.34 dBW/kg

Test Plot 3#:WLAN 2.4G Handheld Back High Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.911$ S/m; $\epsilon_r = 53.422$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.56, 7.56, 7.56); Calibrated: 2016/10/4;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.476 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.395 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.642 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.489 W/kg

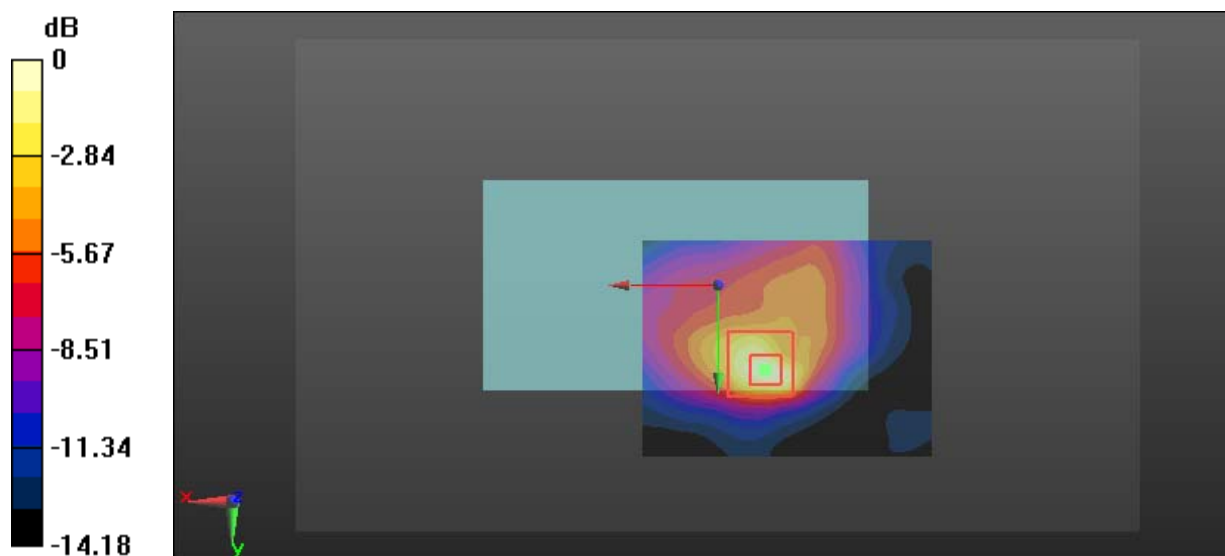

0 dB = 0.489 W/kg = -3.11 dBW/kg

Test Plot 4#:WLAN 2.4G Handheld Front Middle Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.958$ S/m; $\epsilon_r = 54.418$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.56, 7.56, 7.56); Calibrated: 2016/10/4;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.245 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.784 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.340 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.0824 W/kg

Maximum value of SAR (measured) = 0.241 W/kg

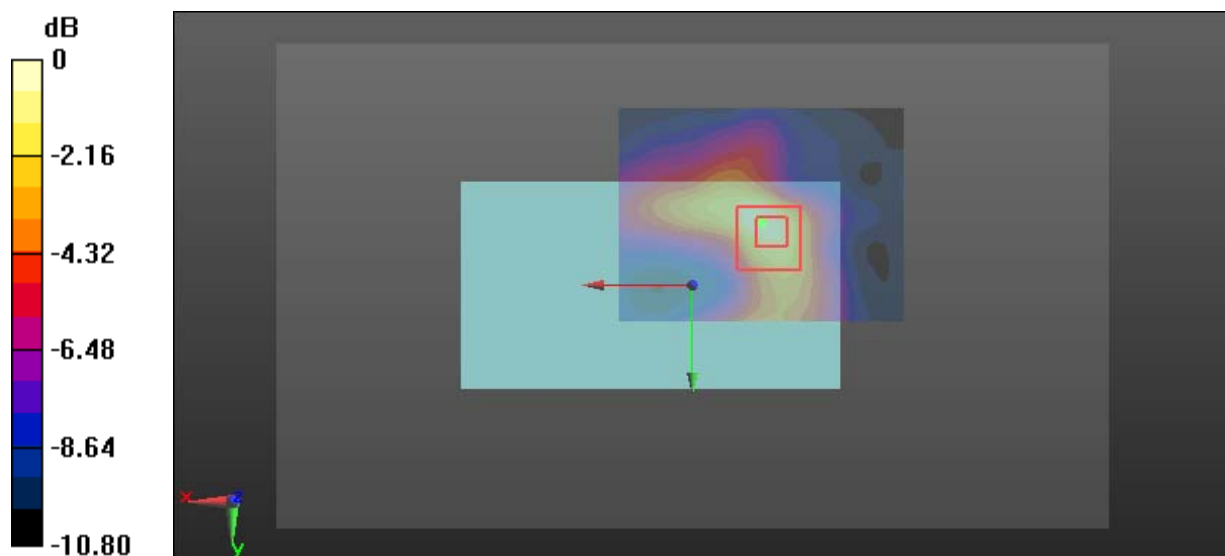

0 dB = 0.241 W/kg = -6.18 dBW/kg

Test Plot 5#:WLAN 2.4G Handheld Left Middle Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.958$ S/m; $\epsilon_r = 54.418$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.56, 7.56, 7.56); Calibrated: 2016/10/4;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.754 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.10 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.964 W/kg

SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.123 W/kg

Maximum value of SAR (measured) = 0.744 W/kg

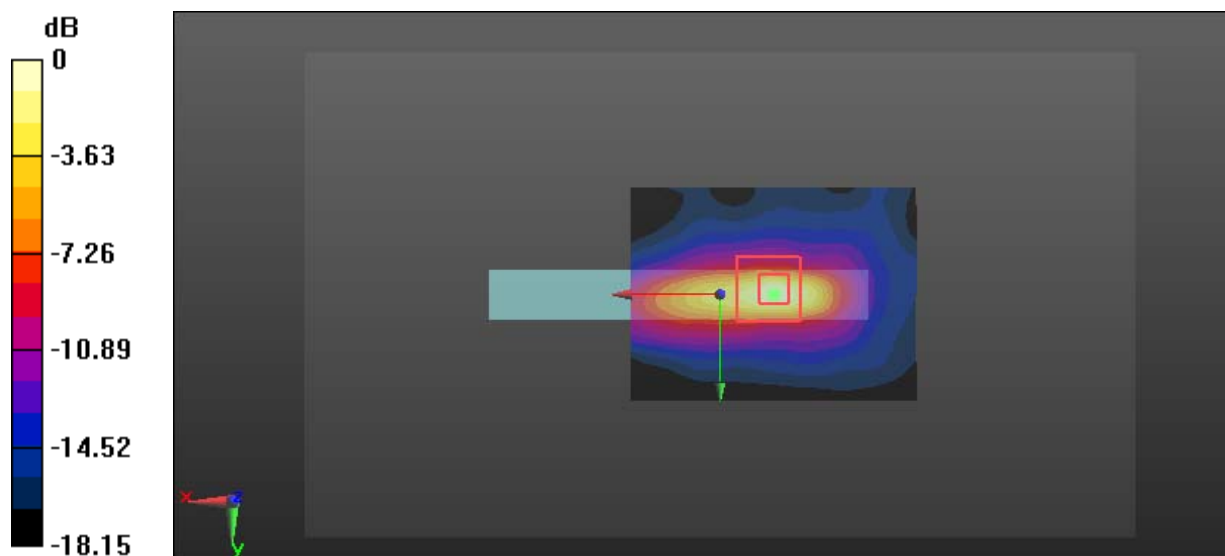

0 dB = 0.744 W/kg = -1.28 dBW/kg

Test Plot 6#:WLAN 2.4G Handheld Top Middle Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.958$ S/m; $\epsilon_r = 54.418$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.56, 7.56, 7.56); Calibrated: 2016/10/4;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.117 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.592 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.0372 W/kg

Maximum value of SAR (measured) = 0.124 W/kg

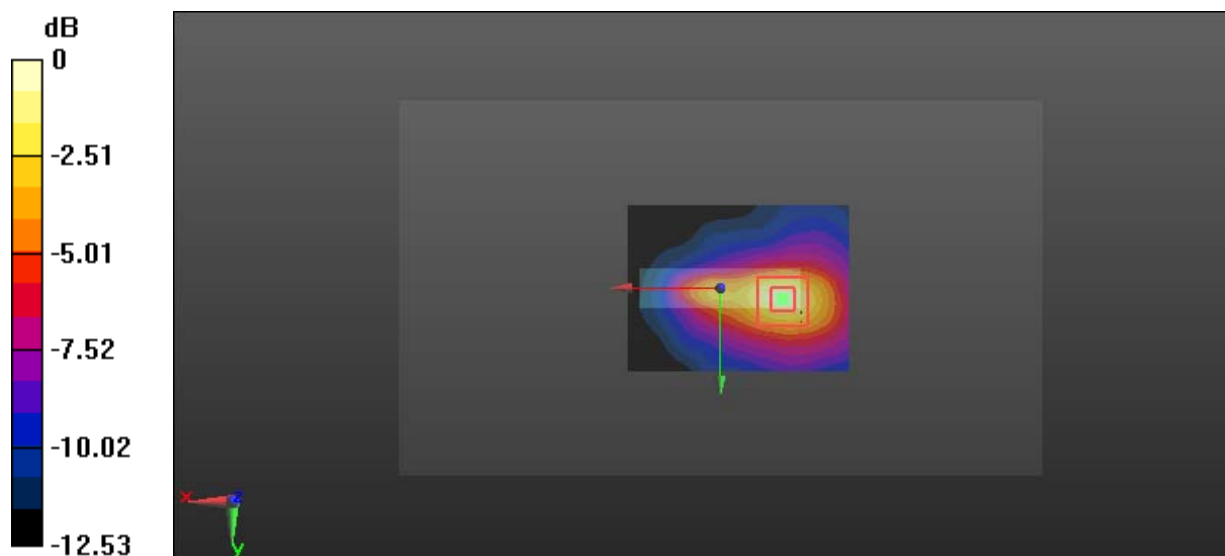

0 dB = 0.124 W/kg = -9.07 dBW/kg

Test Plot 7#:WLAN 5.2G Handheld Back Middle Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.150$ S/m; $\epsilon_r = 49.558$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.98, 4.98, 4.98); Calibrated: 2016/10/4;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.30 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.677 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 0.615 W/kg; SAR(10 g) = 0.255 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

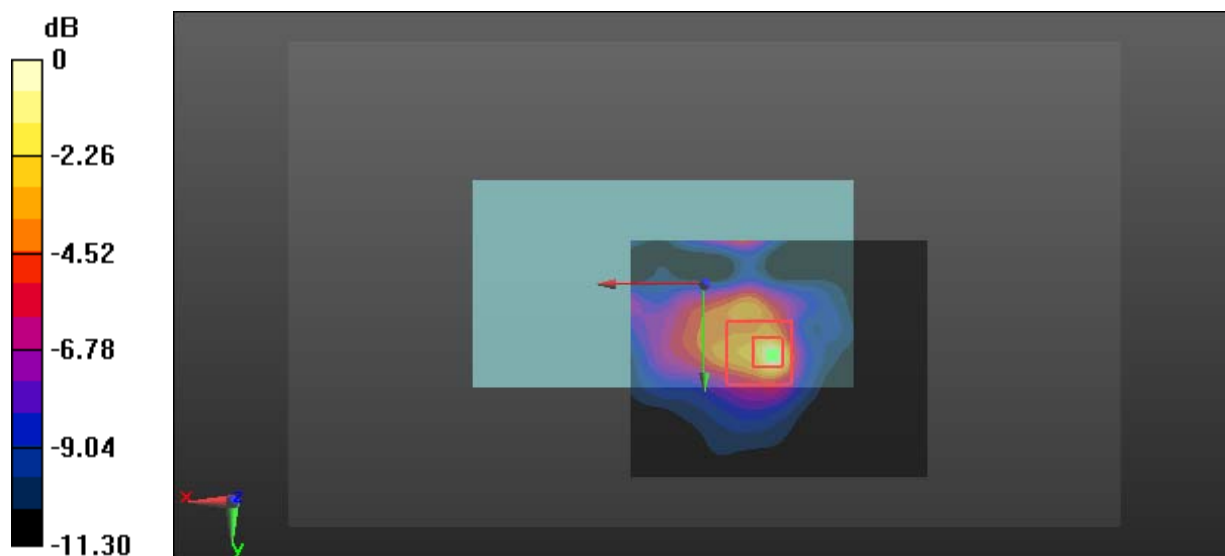

0 dB = 1.29 W/kg = 1.11 dBW/kg

Test Plot 8#:WLAN 5.2G Handheld Front Middle Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.150$ S/m; $\epsilon_r = 49.558$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.98, 4.98, 4.98); Calibrated: 2016/10/4;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.373 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.639 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.629 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.396 W/kg

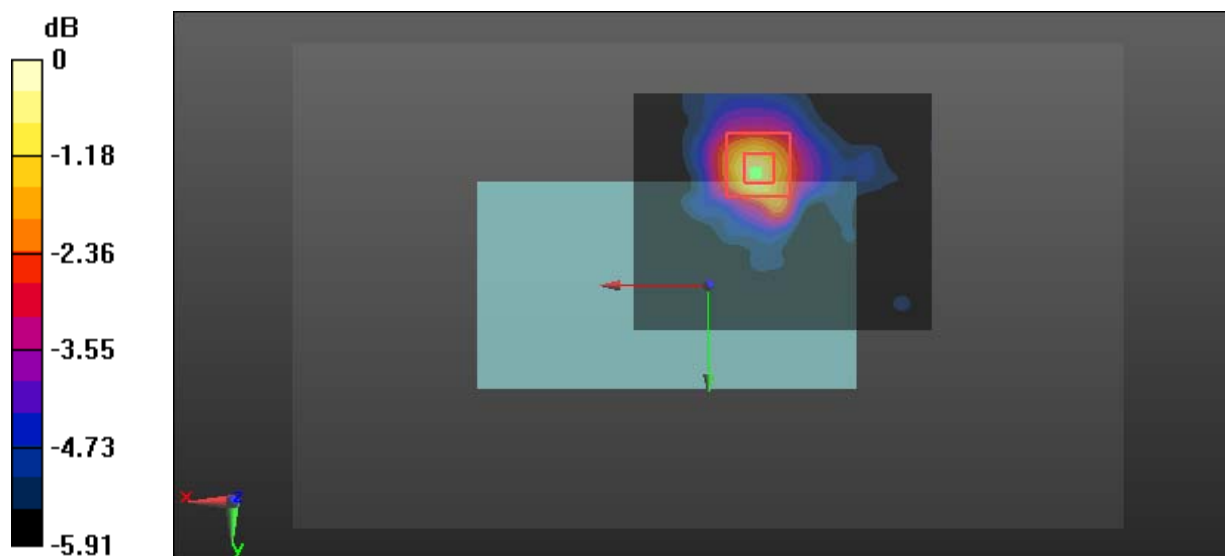

0 dB = 0.396 W/kg = -4.02 dBW/kg

Test Plot 9#: WLAN 5.2G Handheld Left Low Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 5.188 \text{ S/m}$; $\epsilon_r = 49.502$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.98, 4.98, 4.98); Calibrated: 2016/10/4;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x81x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 2.06 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.540 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 0.947 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 2.07 W/kg

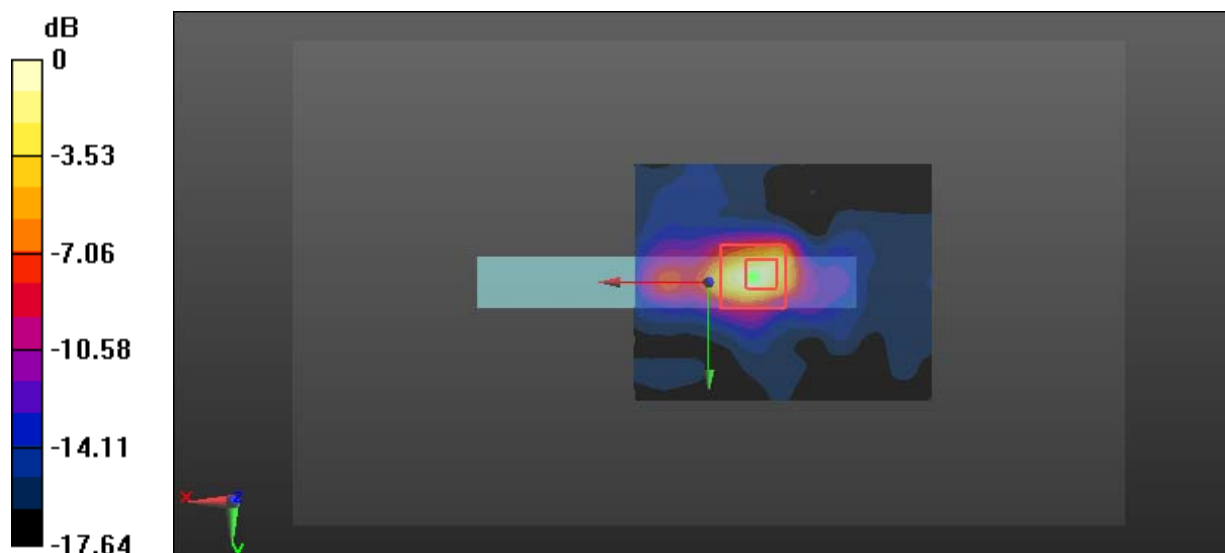

0 dB = 2.07 W/kg = 3.16 dBW/kg

Test Plot 10#: WLAN 5.2G Handheld Left Middle Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.150$ S/m; $\epsilon_r = 49.558$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.98, 4.98, 4.98); Calibrated: 2016/10/4;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.39 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 7.929 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 4.80 W/kg

SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.350 W/kg

Maximum value of SAR (measured) = 2.69 W/kg

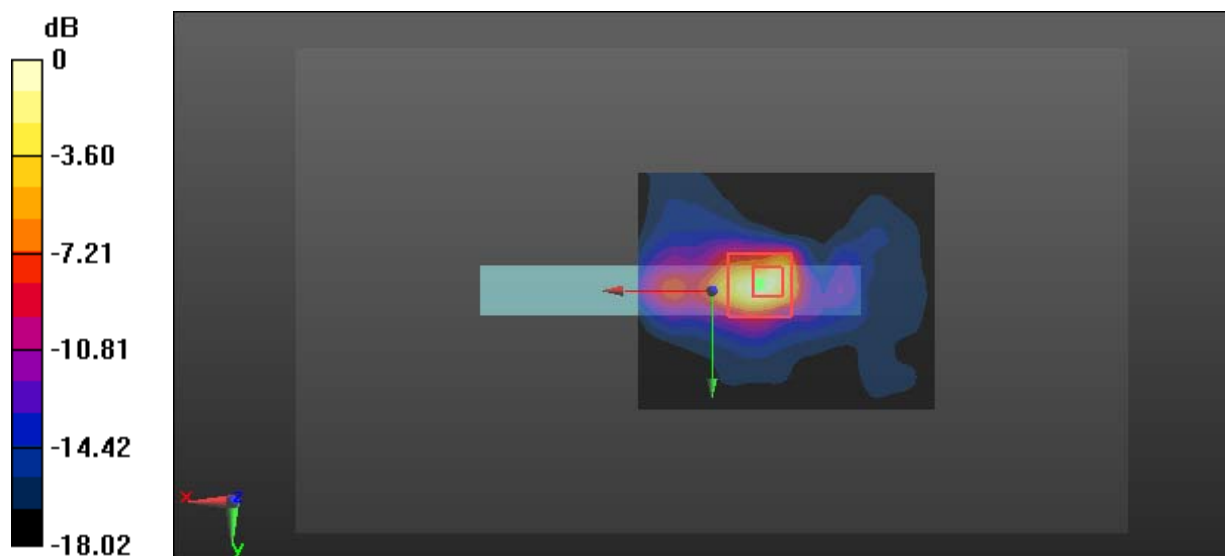

0 dB = 2.69 W/kg = 4.30 dBW/kg

Test Plot 11#: WLAN 5.2G Handheld Left High Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5240$ MHz; $\sigma = 5.311$ S/m; $\epsilon_r = 49.293$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.98, 4.98, 4.98); Calibrated: 2016/10/4;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.47 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 7.567 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 4.54 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.344 W/kg

Maximum value of SAR (measured) = 2.55 W/kg

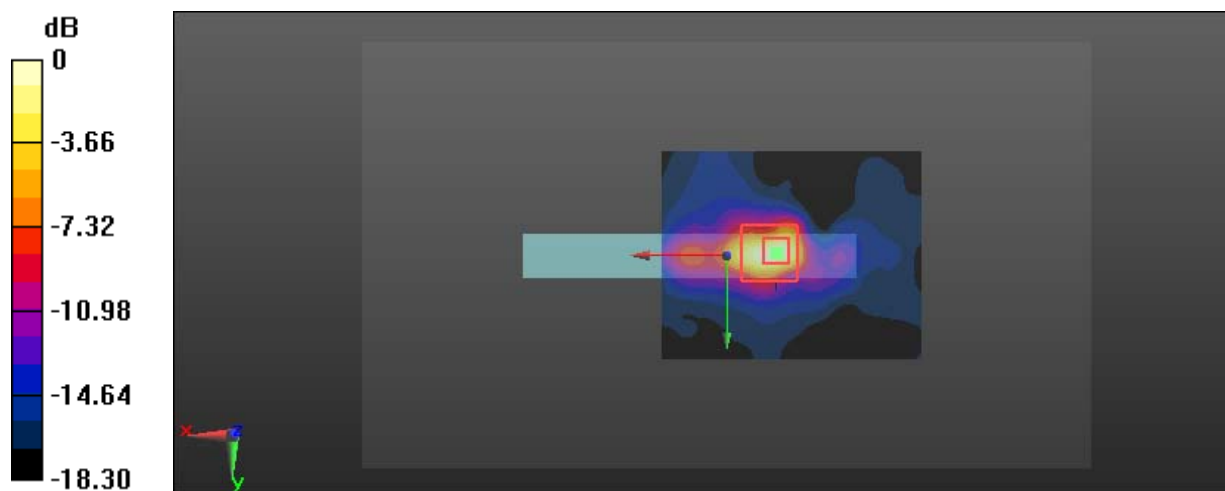

0 dB = 2.55 W/kg = 4.07 dBW/kg

Test Plot 12#: WLAN 5.2G Handheld Left Middle Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.150$ S/m; $\epsilon_r = 49.558$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.98, 4.98, 4.98); Calibrated: 2016/10/4;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0484 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 1.726 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0537 W/kg

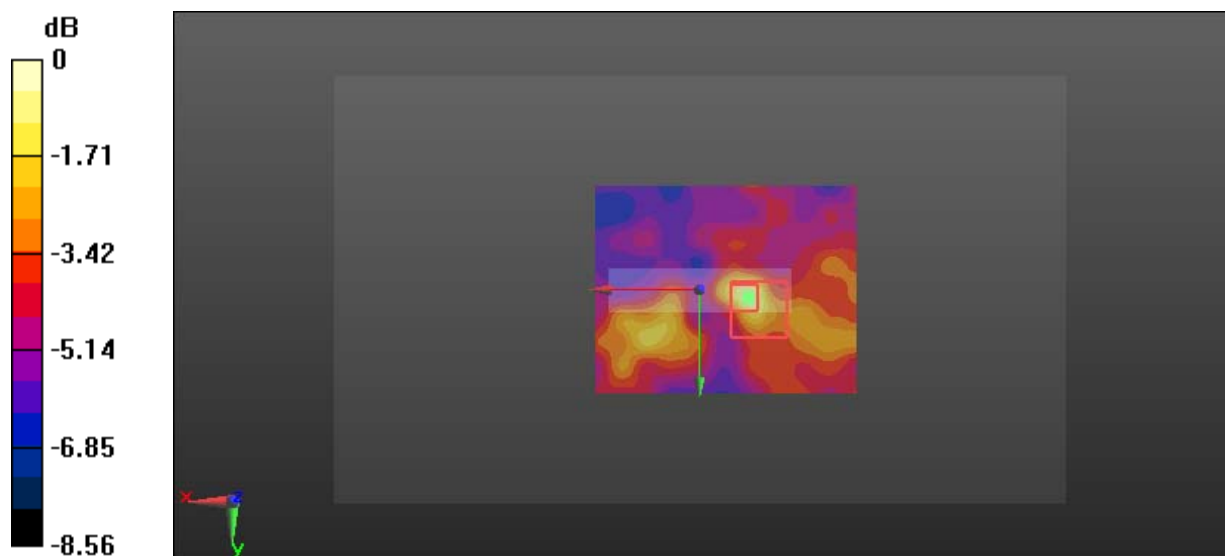

0 dB = 0.0537 W/kg = -12.70 dBW/kg

Test Plot 13#: WLAN 5.3G Handheld Back Middle Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11a WiFi 5.3 GHz; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.437$ S/m; $\epsilon_r = 48.749$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.24, 5.24, 5.24); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.45 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2$ mm

Reference Value = 4.453 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 0.626 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 1.42 W/kg

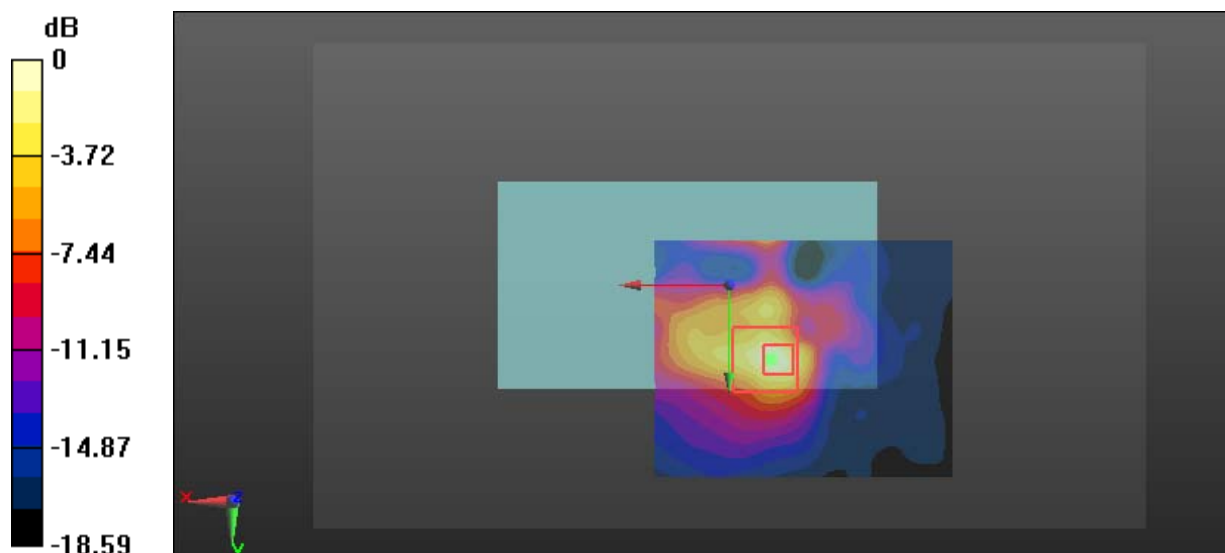

0 dB = 1.42 W/kg = 1.52 dBW/kg

Test Plot 14#: WLAN 5.3G Handheld Front Middle Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11a WiFi 5.3 GHz; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.437$ S/m; $\epsilon_r = 48.749$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.24, 5.24, 5.24); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.211 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 1.557 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.364 W/kg

SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.209 W/kg

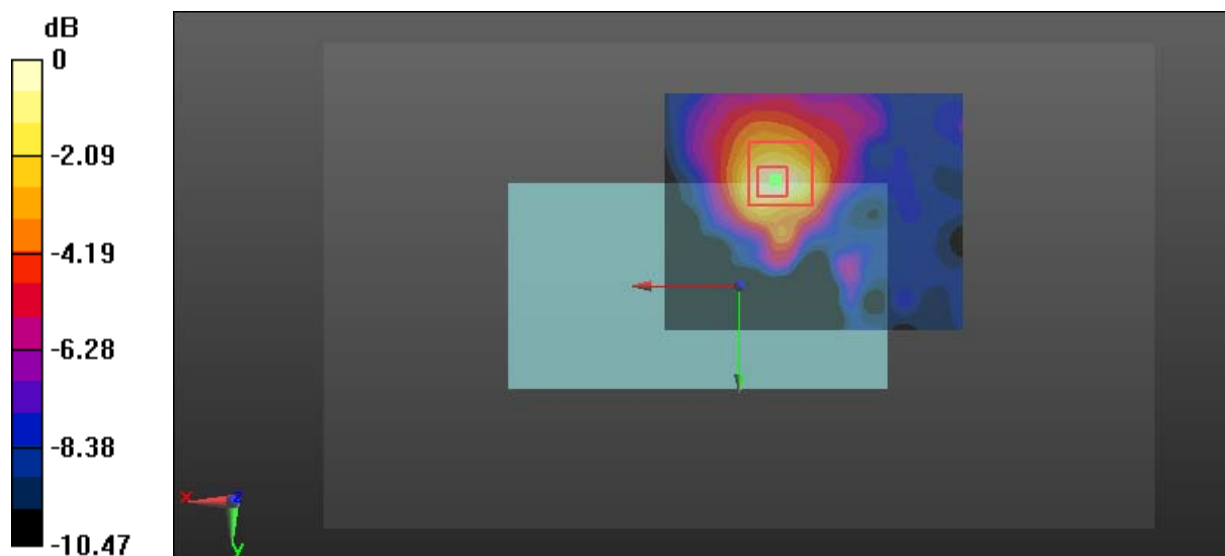

0 dB = 0.209 W/kg = -6.80 dBW/kg

Test Plot 15#: WLAN 5.3G Handheld Left Middle Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11a WiFi 5.3 GHz; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.437$ S/m; $\epsilon_r = 48.749$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.24, 5.24, 5.24); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.50 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 8.203 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 4.71 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.335 W/kg

Maximum value of SAR (measured) = 2.56 W/kg

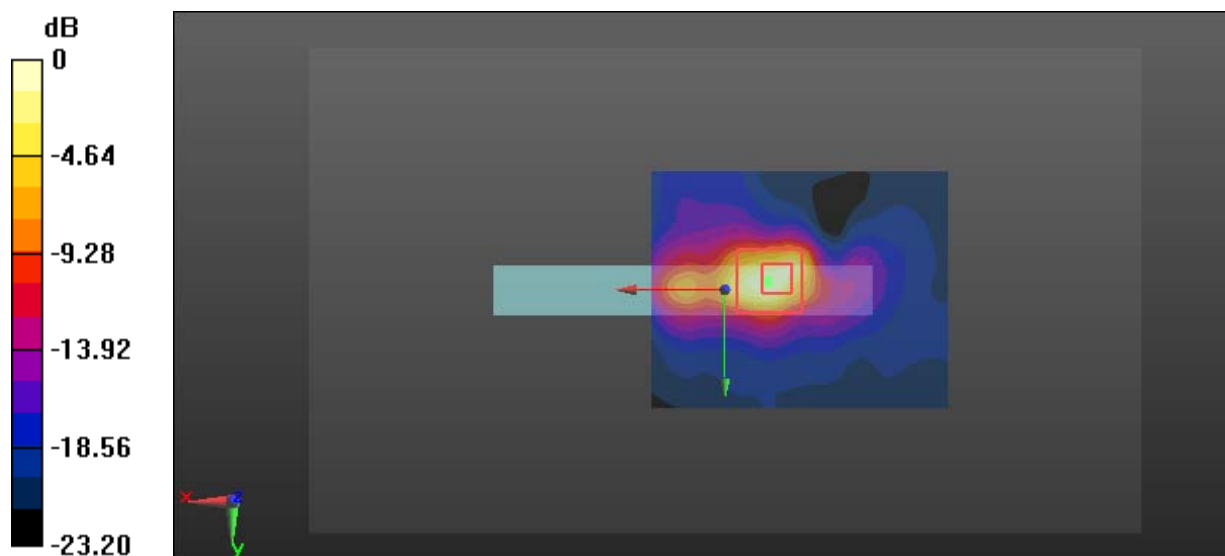

0 dB = 2.56 W/kg = 4.08 dBW/kg

Test Plot 16#: WLAN 5.3G Handheld Top Middle Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11a WiFi 5.3 GHz; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.437$ S/m; $\epsilon_r = 48.749$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.24, 5.24, 5.24); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0645 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.962 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0774 W/kg

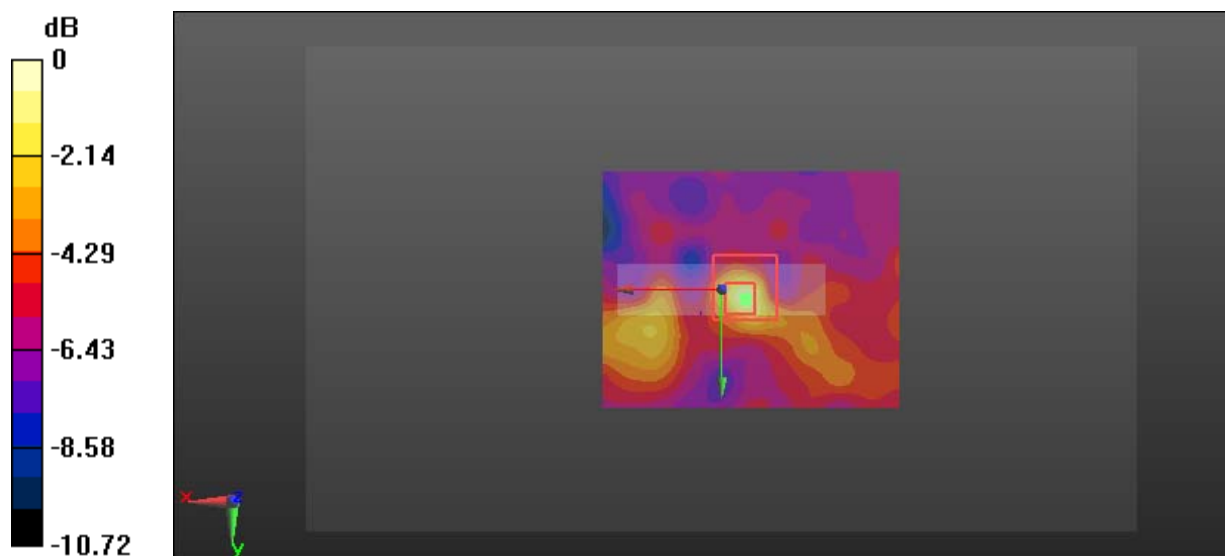

0 dB = 0.0774 W/kg = -11.11 dBW/kg

Test Plot 17#: WLAN 5.6G Handheld Back Low Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11a WiFi 5.6 GHz; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.523$ S/m; $\epsilon_r = 48.984$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.742 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2$ mm

Reference Value = 3.041 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 0.817 W/kg

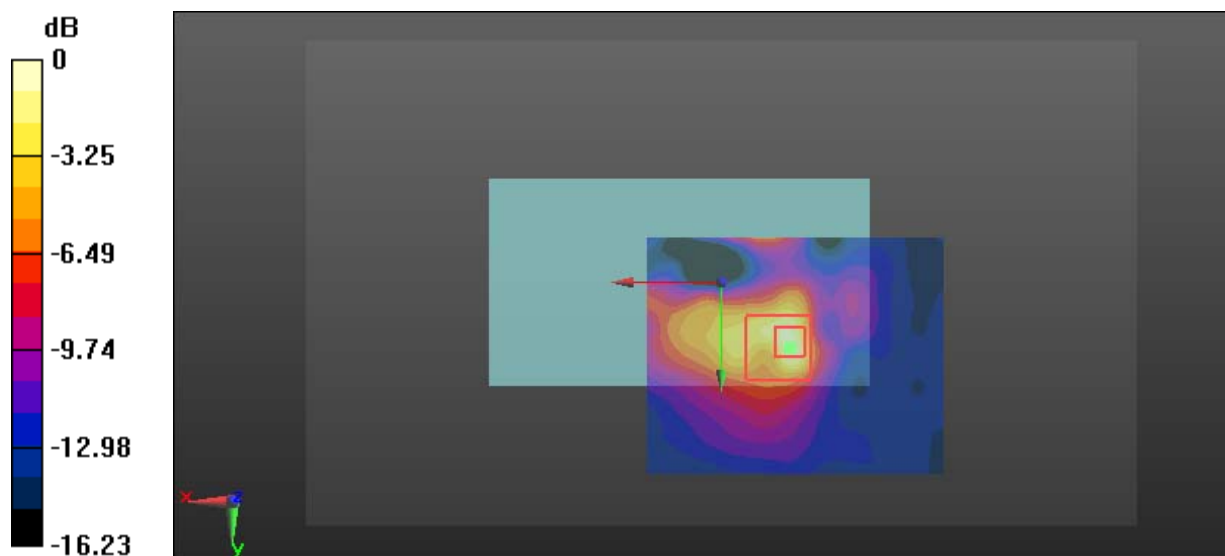 $0 \text{ dB} = 0.817 \text{ W/kg} = -0.88 \text{ dBW/kg}$

Test Plot 18#: WLAN 5.6G Handheld Front Low Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11a WiFi 5.6 GHz; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.523$ S/m; $\epsilon_r = 48.984$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.161 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.107 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.166 W/kg

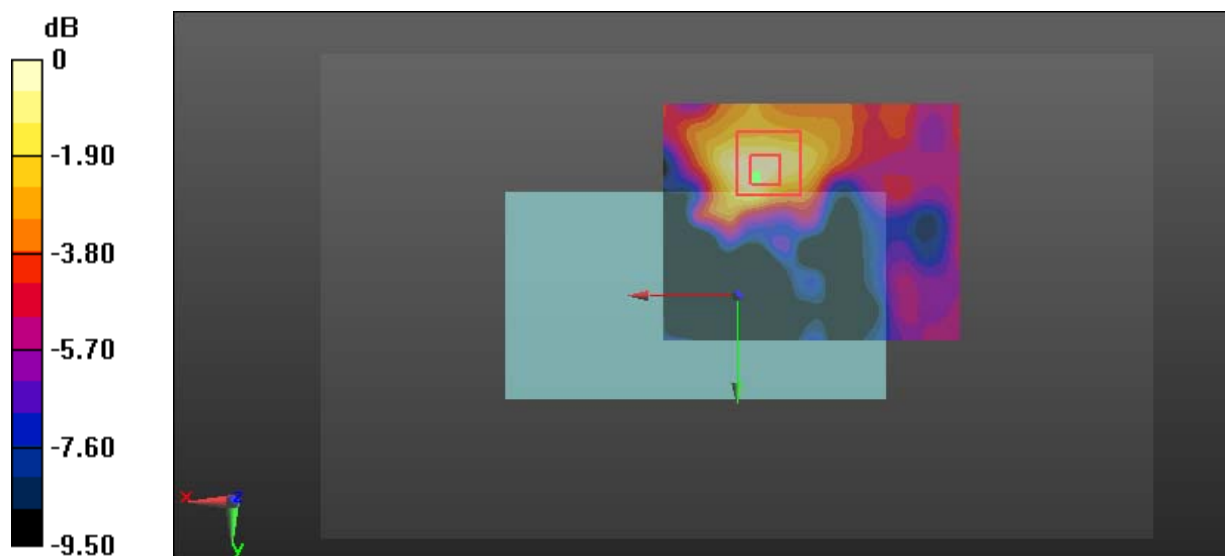

0 dB = 0.166 W/kg = -7.80 dBW/kg

Test Plot 19#: WLAN 5.6G Handheld Left Low Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11a WiFi 5.6 GHz; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.523$ S/m; $\epsilon_r = 48.984$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.981 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2$ mm

Reference Value = 5.659 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

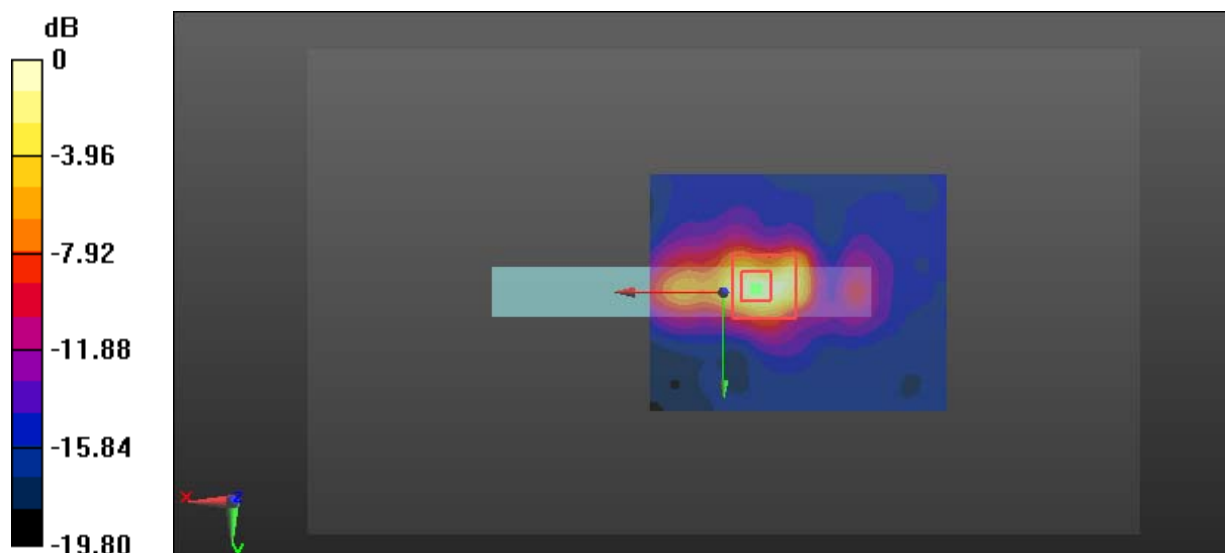

0 dB = 1.05 W/kg = 0.21 dBW/kg

Test Plot 20#: WLAN 5.6G Handheld Top Low Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11a WiFi 5.6 GHz; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.523$ S/m; $\epsilon_r = 48.984$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.33, 4.33, 4.33); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0405 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.151 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0760 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0449 W/kg

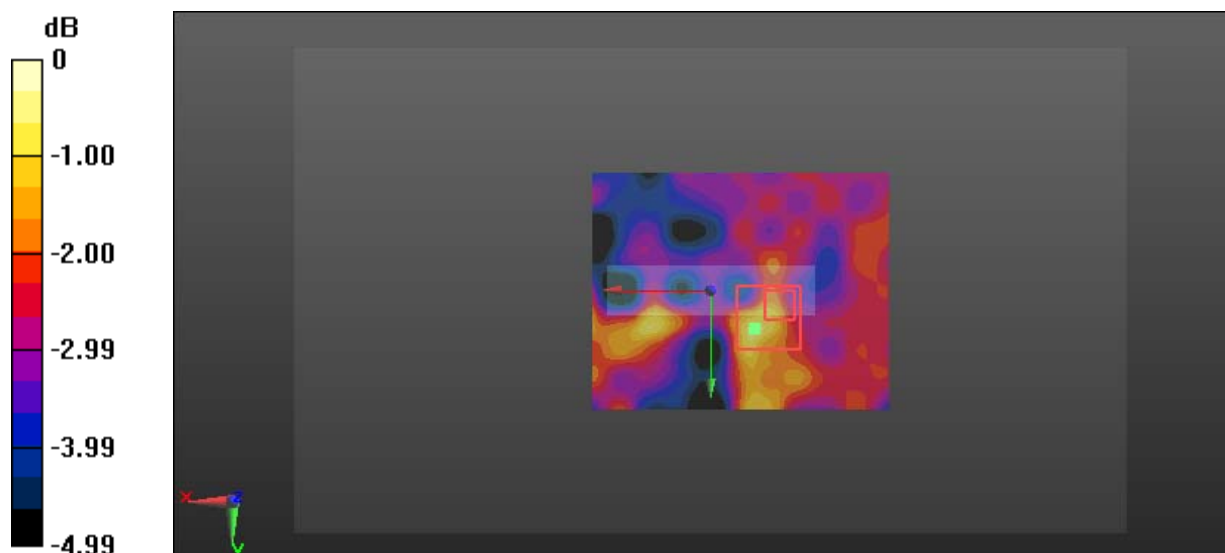

0 dB = 0.0449 W/kg = -13.48 dBW/kg

Test Plot 21#: WLAN 5.8G Handheld Left Middle Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.899 \text{ S/m}$; $\epsilon_r = 48.518$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.38, 4.38, 4.38); Calibrated: 2016/10/4;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

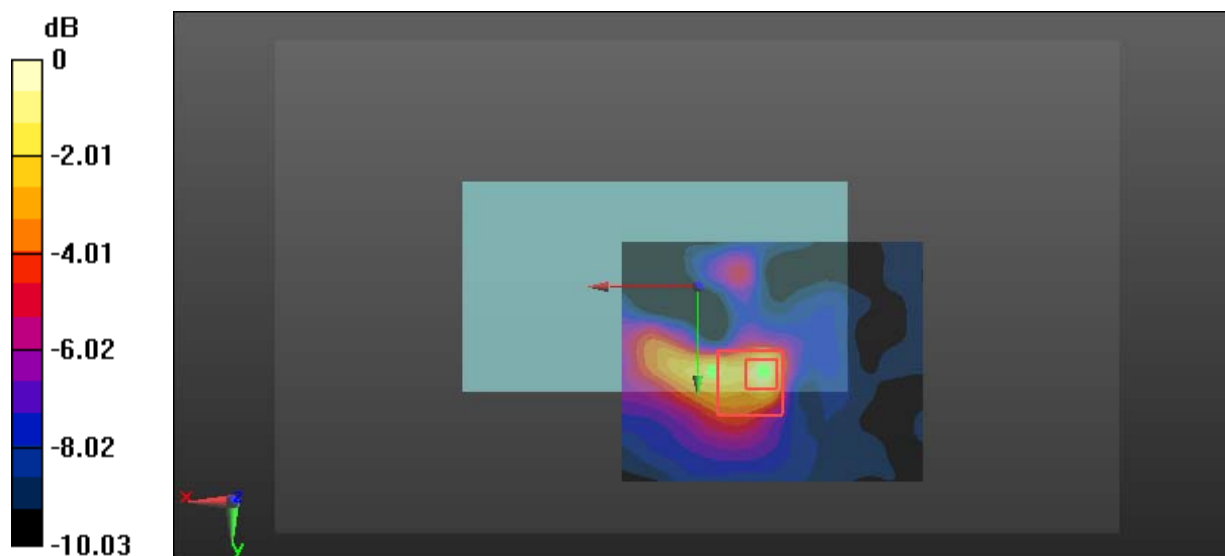Area Scan (101x81x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.808 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 4.142 V/m ; Power Drift = 0.15 dB Peak SAR (extrapolated) = 1.52 W/kg **SAR(1 g) = 0.439 W/kg ; SAR(10 g) = 0.223 W/kg** Maximum value of SAR (measured) = 0.884 W/kg  $0 \text{ dB} = 0.884 \text{ W/kg} = -0.54 \text{ dBW/kg}$

Test Plot 22#: WLAN 5.8G Handheld Front Middle Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.899 \text{ S/m}$; $\epsilon_r = 48.518$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.38, 4.38, 4.38); Calibrated: 2016/10/4;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

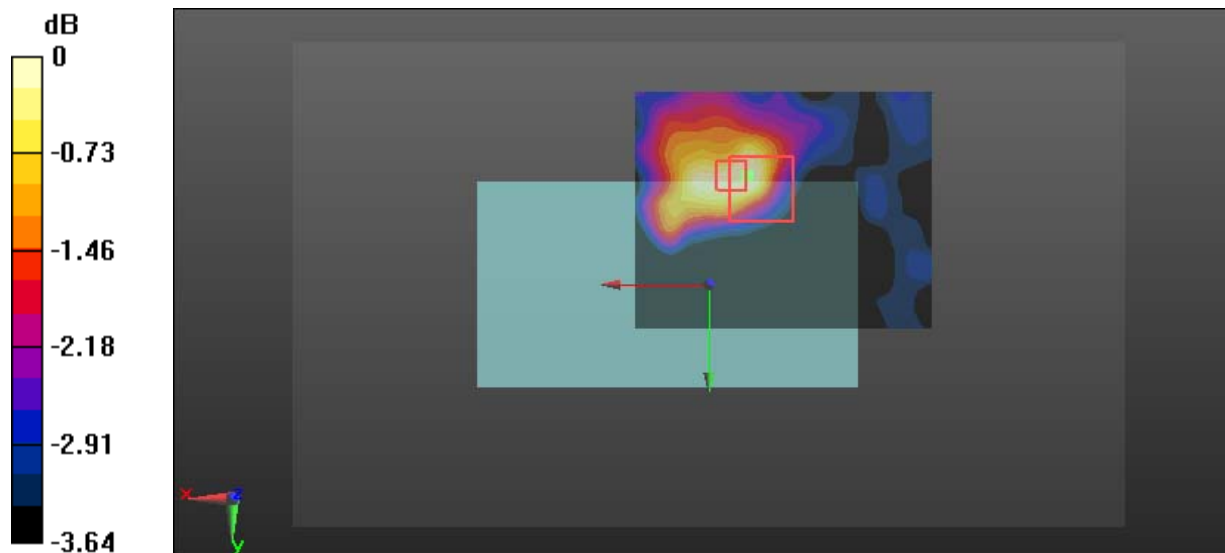Area Scan (101x81x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.260 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 4.019 V/m ; Power Drift = 0.11 dB Peak SAR (extrapolated) = 0.345 W/kg **SAR(1 g) = 0.190 W/kg ; SAR(10 g) = 0.166 W/kg** Maximum value of SAR (measured) = 0.244 W/kg  $0 \text{ dB} = 0.244 \text{ W/kg} = -6.13 \text{ dBW/kg}$

Test Plot 23#: WLAN 5.8G Handheld Left Middle Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**

Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.899 \text{ S/m}$; $\epsilon_r = 48.518$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.38, 4.38, 4.38); Calibrated: 2016/10/4;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x81x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.42 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.184 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 3.00 W/kg

SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.221 W/kg

Maximum value of SAR (measured) = 1.60 W/kg

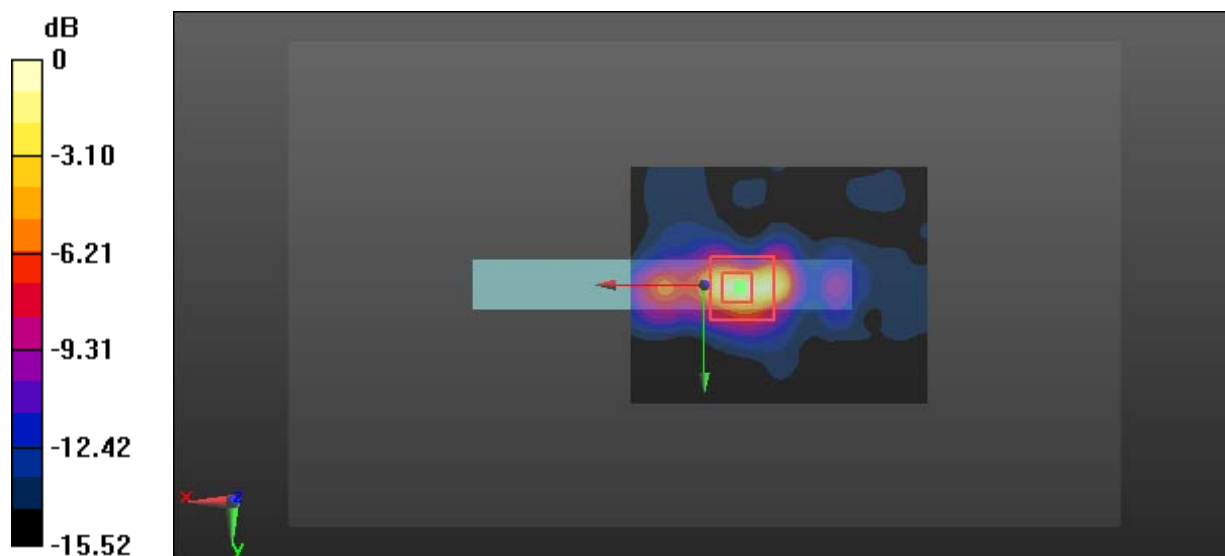 $0 \text{ dB} = 1.60 \text{ W/kg} = 2.04 \text{ dBW/kg}$

Test Plot 24#: WLAN 5.8G Handheld Top Middle Channel**DUT: Link/2500; Type: Link/2500 CL/WiFi/BT; Serial: 17021705121**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.899 \text{ S/m}$; $\epsilon_r = 48.518$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.38, 4.38, 4.38); Calibrated: 2016/10/4;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

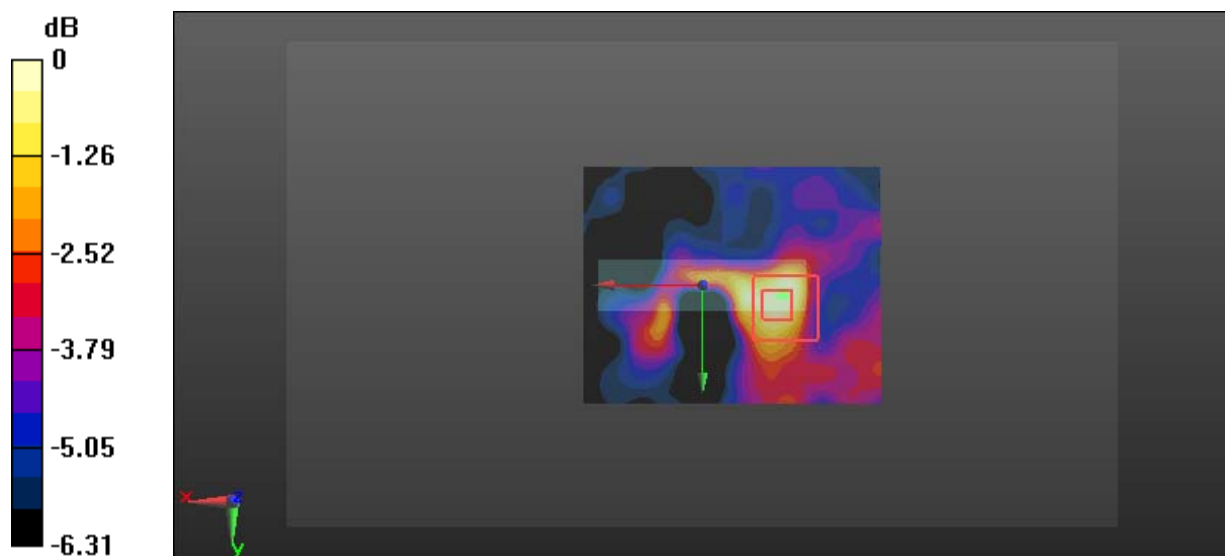Area Scan (101x81x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0791 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 2.003 V/m ; Power Drift = 0.15 dB Peak SAR (extrapolated) = 0.103 W/kg **SAR(1 g) = 0.044 W/kg ; SAR(10 g) = 0.0357 W/kg** Maximum value of SAR (measured) = 0.0743 W/kg  $0 \text{ dB} = 0.0743 \text{ W/kg} = -11.29 \text{ dBW/kg}$