

## TEST REPORT

BNetzA-CAB-02/21-102

Test report no.: 1-6608\_23-01-18\_TR1

### Testing laboratory

**cetecom advanced GmbH**  
Untertuerkheimer Strasse 6 – 10  
66117 Saarbruecken / Germany  
Phone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <https://cetecomadvanced.com>  
e-mail: [mail@cetecomadvanced.com](mailto:mail@cetecomadvanced.com)

#### Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS).

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12047-01-00.

ISED Testing Laboratory Recognized Listing Number: DE0001

FCC designation number: DE0002

### Applicant

**Ingenico**  
9 Avenue de la Gare - Rovaltain TGV  
26958 Valence Cedex 9 / FRANCE  
Phone: -/-  
Contact: Nicolas Jacquemont  
e-mail: [nicolas.jacquemont@ingenico.com](mailto:nicolas.jacquemont@ingenico.com)

### Manufacturer

**Ingenico**  
9 Avenue de la Gare - Rovaltain TGV  
26958 Valence Cedex 9 / FRANCE

### Test standard/s

FCC - Title 47 CFR Part 15      FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 247 Issue 2      Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:**      **Payment Terminal**

**Model name:**      **Link/2500 LE**

**FCC ID:**      **XKB-L25LECLWIBT**

**ISED certification number:**      **2586D-L25LECLWIBT**

**Frequency:**      5150 – 5250 MHz, 5250 – 5350 MHz, 5470 – 5725 MHz, 5725 – 5825 MHz

**Technology tested:**      WLAN

**Antenna:**      Integrated antenna

**Power supply:**      3.6 V DC by Li-ion battery / 230 V AC by mains

**Temperature range:**      -20°C to +55°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:



cn=Marco Bertolino, o=cetecom advanced GmbH, ou=BTL-230530, email=marco.bertolino@cetecomadvanced.com, c=DE  
2023.11.24 10:51:45 +01'00'

Marco Bertolino  
Supervisor Radio Services  
Radio Labs

### Test performed:



cn=Michael Dorongovski, o=cetecom advanced GmbH, ou=DOR-230601, email=michael.dorongovski@cetecomadvanced.com, c=DE  
2023.11.27 10:03:14 +01'00'

Michael Dorongovski  
Lab Manager  
Radio Labs

## 1 Table of contents

|        |                                                             |    |
|--------|-------------------------------------------------------------|----|
| 1      | Table of contents.....                                      | 2  |
| 2      | General information .....                                   | 4  |
| 2.1    | Notes and disclaimer .....                                  | 4  |
| 2.2    | Application details .....                                   | 4  |
| 2.3    | Test laboratories sub-contracted .....                      | 4  |
| 3      | Test standard/s, references and accreditations .....        | 5  |
| 4      | Reporting statements of conformity – decision rule .....    | 6  |
| 5      | Test environment.....                                       | 7  |
| 6      | Test item .....                                             | 7  |
| 6.1    | General description .....                                   | 7  |
| 6.2    | Additional information .....                                | 7  |
| 7      | Sequence of testing.....                                    | 8  |
| 7.1    | Sequence of testing radiated spurious 9 kHz to 30 MHz ..... | 8  |
| 7.2    | Sequence of testing radiated spurious 30 MHz to 1 GHz.....  | 9  |
| 7.3    | Sequence of testing radiated spurious 1 GHz to 18 GHz.....  | 10 |
| 7.4    | Sequence of testing radiated spurious above 18 GHz.....     | 11 |
| 8      | Description of the test setup.....                          | 12 |
| 8.1    | Shielded semi anechoic chamber .....                        | 13 |
| 8.2    | Shielded fully anechoic chamber.....                        | 14 |
| 8.3    | Radiated measurements > 18 GHz .....                        | 15 |
| 8.4    | Conducted measurements system .....                         | 16 |
| 8.5    | AC conducted.....                                           | 17 |
| 9      | Measurement uncertainty .....                               | 18 |
| 10     | Summary of measurement results .....                        | 19 |
| 11     | Additional comments.....                                    | 20 |
| 12     | Measurement results .....                                   | 22 |
| 12.1   | Identify worst case data rate.....                          | 22 |
| 12.2   | Antenna gain .....                                          | 23 |
| 12.3   | Maximum output power.....                                   | 24 |
| 12.3.1 | Maximum output power according to FCC requirements.....     | 24 |
| 12.3.2 | Maximum output power according to ISED requirements.....    | 27 |
| 12.4   | Power spectral density .....                                | 31 |
| 12.4.1 | Power spectral density according to FCC requirements.....   | 31 |
| 12.4.2 | Power spectral density according to ISED requirements ..... | 34 |
| 12.5   | Minimum emission bandwidth for the band 5.725-5.85 GHz..... | 37 |
| 12.6   | Spectrum bandwidth / 26 dB bandwidth .....                  | 39 |
| 12.7   | Occupied bandwidth / 99% emission bandwidth .....           | 42 |
| 12.8   | Band edge compliance radiated .....                         | 45 |
| 12.9   | Spurious emissions radiated below 30 MHz .....              | 51 |
| 12.10  | Spurious emissions radiated 30 MHz to 1 GHz .....           | 63 |
| 12.11  | Spurious emissions radiated 1 GHz to 40 GHz .....           | 67 |

|    |       |                                                               |    |
|----|-------|---------------------------------------------------------------|----|
|    | 12.12 | Spurious emissions conducted below 30 MHz (AC conducted)..... | 82 |
| 13 |       | Glossary .....                                                | 85 |
| 14 |       | Document history .....                                        | 86 |

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.

The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".

cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.

All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

Date of receipt of order: 2023-09-05

Date of receipt of test item: 2023-09-18

Start of test:\* 2023-11-06

End of test:\* 2023-11-22

Person(s) present during the test: -/-

\*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

### 2.3 Test laboratories sub-contracted

None

### 3 Test standard/s, references and accreditations


| Test standard                           | Date          | Description                                                                                                                                                         |
|-----------------------------------------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC - Title 47 CFR Part 15              | -/-           | FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices                                                                     |
| RSS - 247 Issue 2                       | February 2017 | Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices                                      |
| RSS - Gen Issue 5 incl. Amendment 1 & 2 | February 2021 | Spectrum Management and Telecommunications Radio Standards Specification<br>- General Requirements for Compliance of Radio Apparatus                                |
| Guidance                                | Version       | Description                                                                                                                                                         |
| KDB 789033 D02                          | v02r01        | Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E                                            |
| ANSI C63.4-2014                         | -/-           | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| ANSI C63.10-2013                        | -/-           | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                                                                      |

#### 4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

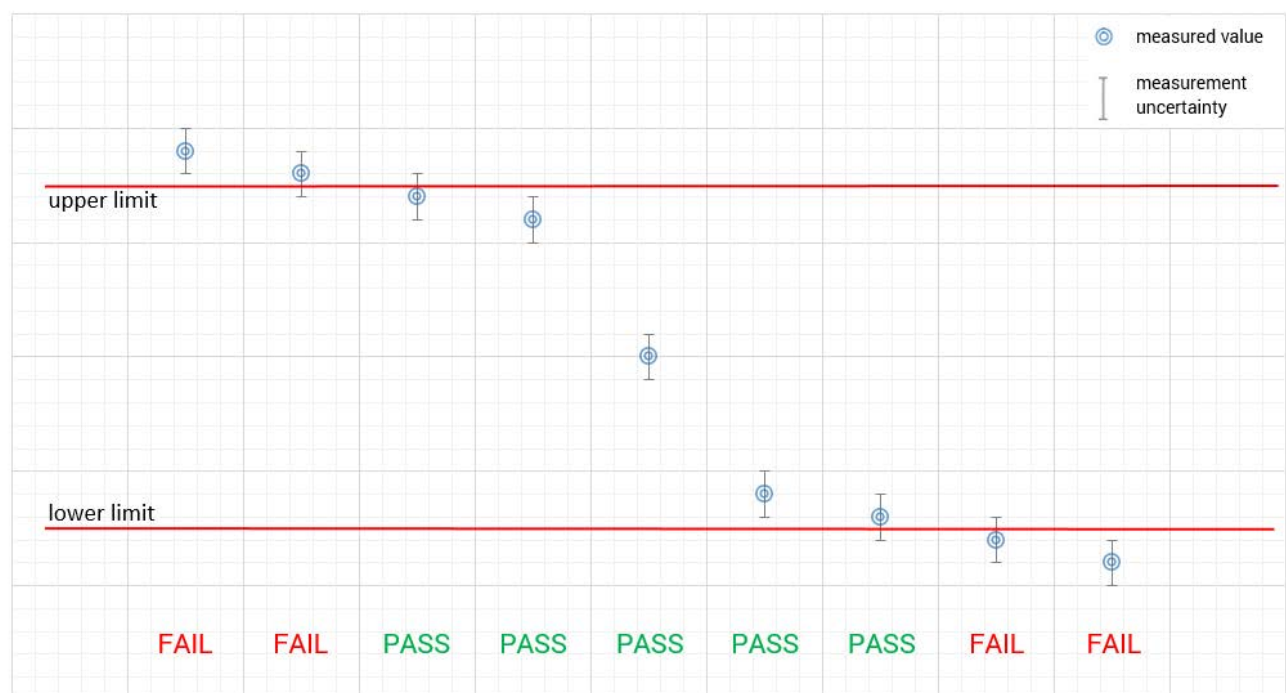

## 5 Test environment

|                             |                                                          |                                                                                                                                            |
|-----------------------------|----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature :               | T <sub>nom</sub><br>T <sub>max</sub><br>T <sub>min</sub> | +22 °C during room temperature tests<br>No test under extreme conditions required.<br>No test under extreme conditions required.           |
| Relative humidity content : |                                                          | 55 %                                                                                                                                       |
| Barometric pressure :       |                                                          | 1021 hpa                                                                                                                                   |
| Power supply :              | V <sub>nom</sub><br>V <sub>max</sub><br>V <sub>min</sub> | 3.6 V DC by Li-ion battery / 230 V AC by mains<br>No test under extreme conditions required.<br>No test under extreme conditions required. |

## 6 Test item

### 6.1 General description

|                              |                                                                    |
|------------------------------|--------------------------------------------------------------------|
| Kind of test item :          | Payment Terminal                                                   |
| Model name :                 | Link/2500 LE                                                       |
| HMN :                        | NA                                                                 |
| PMN :                        | Link/2500 LE                                                       |
| HVIN :                       | Link/2500 LE CL/WiFi/BT                                            |
| FVIN :                       | NA                                                                 |
| S/N serial number :          | Rad. 231297317091367951157940<br>Cond. 232067317201366052749607    |
| Hardware status :            | MP135 / iW416                                                      |
| Software status :            | OS_150075_HTB_0320                                                 |
| Firmware status :            | -/-                                                                |
| Frequency band :             | 5150 – 5250 MHz, 5250 – 5350 MHz, 5470 – 5725 MHz, 5725 – 5825 MHz |
| Type of radio transmission : | OFDM                                                               |
| Use of frequency spectrum :  |                                                                    |
| Type of modulation :         | (D)BPSK, (D)QPSK, 16 – QAM, 64 – QAM                               |
| Number of channels :         | 24 (20 MHz); 11 (40 MHz); 5 (80 MHz)                               |
| Antenna :                    | Integrated antenna                                                 |
| Power supply :               | 3.6 V DC by Li-ion battery / 230 V AC by mains                     |
| Temperature range :          | -20°C to +55°C                                                     |

### 6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

1-6608\_23-01-01\_A101  
1-6608\_23-01-01\_A102  
1-6608\_23-01-01\_A104

## 7 Sequence of testing

### 7.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement\*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

\*Note: The sequence will be repeated three times with different EUT orientations.

## 7.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 7.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 7.4 Sequence of testing radiated spurious above 18 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

### Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

### Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

## 8 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).


Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

### **Agenda:** Kind of Calibration

|      |                                            |     |                                                      |
|------|--------------------------------------------|-----|------------------------------------------------------|
| k    | calibration / calibrated                   | EK  | limited calibration                                  |
| ne   | not required (k, ev, izw, zw not required) | zw  | cyclical maintenance (external cyclical maintenance) |
| ev   | periodic self verification                 | izw | internal cyclical maintenance                        |
| Ve   | long-term stability recognized             | g   | blocked for accredited testing                       |
| vlk! | Attention: extended calibration interval   |     |                                                      |
| NK!  | Attention: not calibrated                  | *)  | next calibration ordered / currently in progress     |

## 8.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

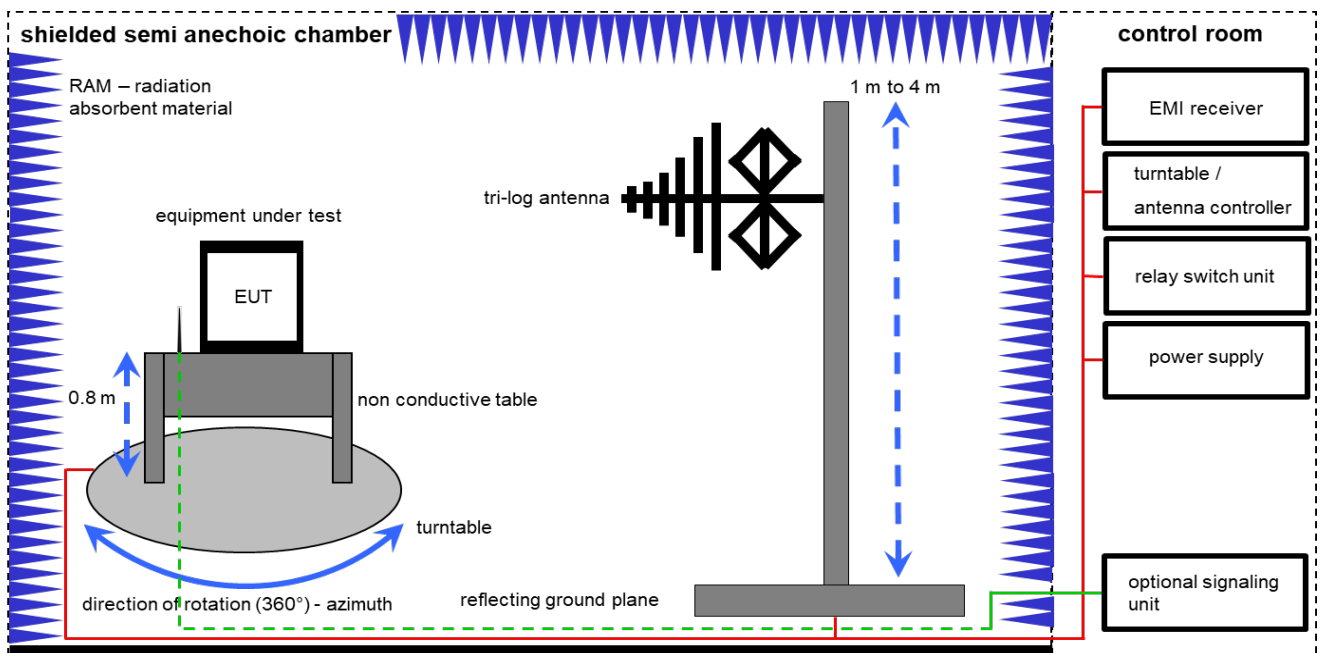

Measurement distance: tri-log antenna 10 meter; EMC32 software version: 10.59.00

$FS = UR + CL + AF$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$FS \text{ [dB}\mu\text{V/m]} = 12.35 \text{ [dB}\mu\text{V/m]} + 1.90 \text{ [dB]} + 16.80 \text{ [dB/m]} = 31.05 \text{ [dB}\mu\text{V/m]} \text{ (35.69 } \mu\text{V/m)}$

**Equipment table:**

| No. | Setup | Equipment                                    | Type         | Manufacturer                | Serial No. | INV. No.  | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|----------------------------------------------|--------------|-----------------------------|------------|-----------|---------------------|------------------|------------------|
| 1   | A     | Switch-Unit                                  | 3488A        | HP                          | 2719A14505 | 300000368 | ev                  | -/-              | -/-              |
| 2   | A     | Semi anechoic chamber                        | 3000023      | MWB AG                      | -/-        | 300000551 | ne                  | -/-              | -/-              |
| 3   | A     | Antenna Tower                                | Model 2175   | ETS-Lindgren                | 64762      | 300003745 | izw                 | -/-              | -/-              |
| 4   | A     | Positioning Controller                       | Model 2090   | ETS-Lindgren                | 64672      | 300003746 | izw                 | -/-              | -/-              |
| 5   | A     | Turntable Interface-Box                      | Model 105637 | ETS-Lindgren                | 44583      | 300003747 | izw                 | -/-              | -/-              |
| 6   | A     | TRILOG Broadband Test-Antenna 30 MHz - 3 GHz | VULB9163     | Schwarzbeck Mess-Elektronik | 216        | 300003288 | vIKI!               | 31.08.2023       | 31.08.2025       |
| 7   | A     | Turntable                                    | 2089-4.0     | EMCO                        | -/-        | 300004394 | ne                  | -/-              | -/-              |
| 8   | A     | PC                                           | TecLine      | F+W                         | -/-        | 300004388 | ne                  | -/-              | -/-              |
| 9   | A     | EMI Test Receiver                            | ESR3         | Rohde & Schwarz             | 102587     | 300005771 | k                   | 09.12.2022       | 31.12.2023       |

## 8.2 Shielded fully anechoic chamber

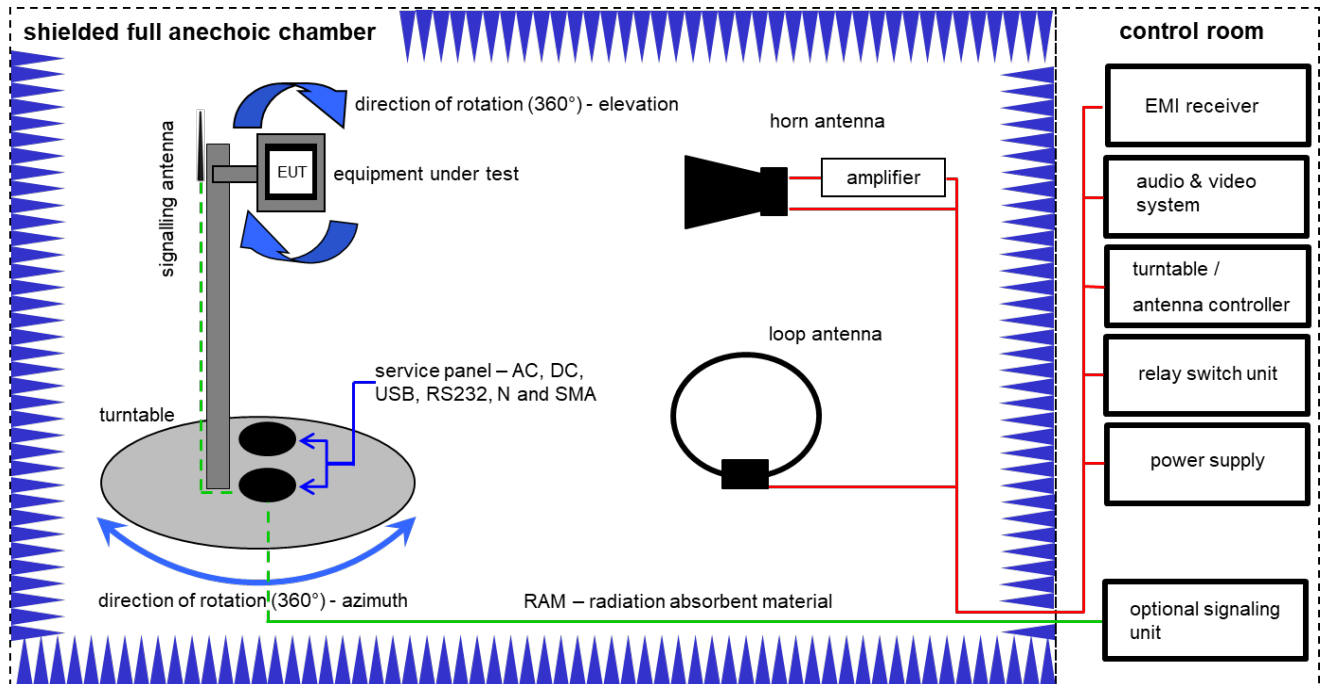

Measurement distance: horn antenna 3 meter; loop antenna 3 meter / 1 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


### Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-35.8) \text{ [dB]} + 32.9 \text{ [dB/m]} = 37.1 \text{ [dB}\mu\text{V/m]} \text{ (71.61 } \mu\text{V/m)}$$

### Equipment table:

| No. | Setup   | Equipment                                      | Type                                  | Manufacturer         | Serial No.      | INV. No.  | Kind of Calibration | Last Calibration | Next Calibration |
|-----|---------|------------------------------------------------|---------------------------------------|----------------------|-----------------|-----------|---------------------|------------------|------------------|
| 1   | A, B    | Double-Ridged Waveguide Horn Antenna 1-18.0GHz | 3115                                  | EMCO                 | 8812-3089       | 300000307 | vKI!                | 11.02.2022       | 29.02.2024       |
| 2   | C       | Active Loop Antenna 9 kHz to 30 MHz            | 6502                                  | EMCO                 | 2210            | 300001015 | vKI!                | 02.08.2023       | 31.08.2025       |
| 3   | B       | Highpass Filter                                | WHKX7.0/18G-8SS                       | Wainwright           | 18              | 300003789 | ne                  | -/-              | -/-              |
| 4   | A, B, C | Broadband Amplifier 0.5-18 GHz                 | CBLU5184540                           | CERNEX               | 22051           | 300004483 | ev                  | -/-              | -/-              |
| 5   | A, B, C | 4U RF Switch Platform                          | L4491A                                | Agilent Technologies | MY50000032      | 300004510 | ne                  | -/-              | -/-              |
| 6   | A, B, C | Computer                                       | Intel Core i3 3220/3,3 GHz, Prozessor | -/-                  | 2V2403033A54 21 | 300004591 | ne                  | -/-              | -/-              |
| 7   | A, B, C | NEXIO EMV-Software                             | BAT EMC V2022.0.22.0                  | Nexio                | -/-             | 300004682 | ne                  | -/-              | -/-              |
| 8   | A, B, C | Anechoic chamber                               | -/-                                   | TDK                  | -/-             | 300003726 | ne                  | -/-              | -/-              |
| 9   | A, B, C | EMI Test Receiver 9kHz-26,5GHz                 | ESR26                                 | Rohde & Schwarz      | 101376          | 300005063 | k                   | 13.12.2022       | 31.12.2023       |
| 10  | A, B    | RF-Amplifier                                   | AMF-6F06001800-30-10P-R               | NARDA-MITEQ Inc      | 2011571         | 300005240 | ev                  | -/-              | -/-              |

### 8.3 Radiated measurements > 18 GHz

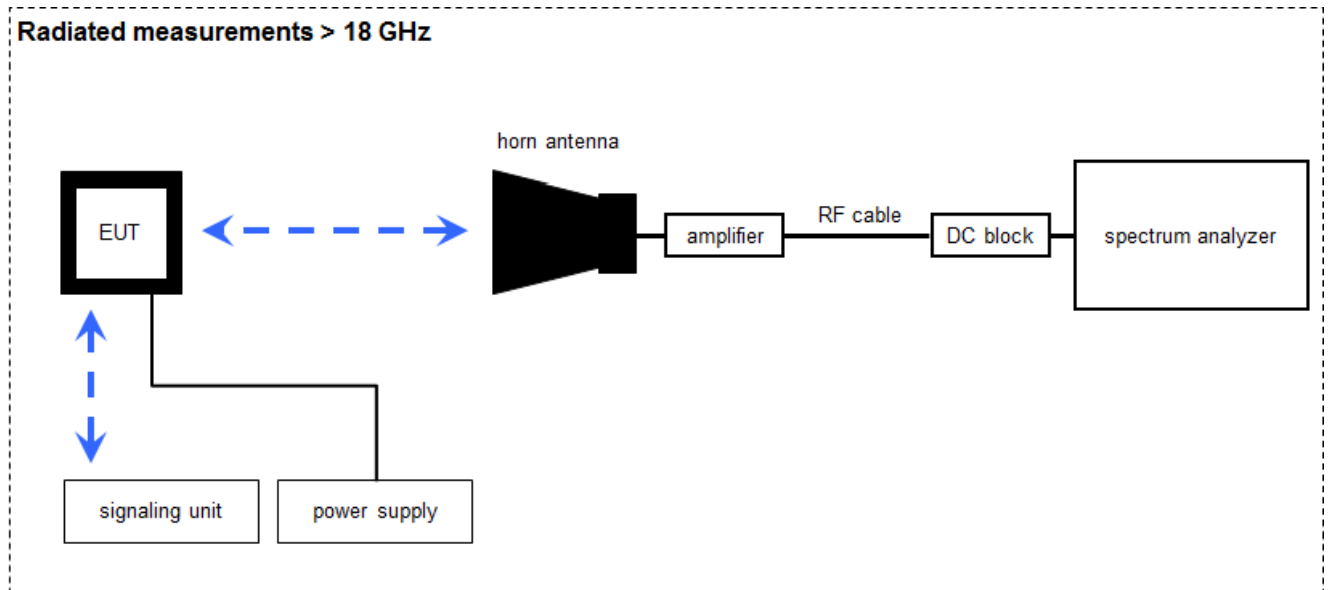

Measurement distance: horn antenna 50 cm

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)


Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-60.1) \text{ [dB]} + 36.74 \text{ [dB/m]} = 16.64 \text{ [dB}\mu\text{V/m]} \text{ (6.79 } \mu\text{V/m)}$$

#### Equipment table:

| No. | Setup | Equipment                               | Type               | Manufacturer   | Serial No.       | INV. No.  | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|-----------------------------------------|--------------------|----------------|------------------|-----------|---------------------|------------------|------------------|
| 1   | A     | Std. Gain Horn Antenna 18.0-26.5 GHz    | 638                | Narda          | 8205             | 300002442 | k                   | 17.01.2022       | 31.01.2024       |
| 2   | A     | Signal analyzer                         | FSV40              | Rohde&Schwarz  | 101042           | 300004517 | k                   | 12.12.2022       | 31.12.2023       |
| 3   | A     | RF-Cable                                | ST18/SMAm/SMAm /48 | Huber & Suhner | Batch no. 600918 | 400001182 | ev                  | -/-              | -/-              |
| 4   | A     | DC-Blocker 0.1-40 GHz                   | 8141A              | Inmet          | -/-              | 400001185 | ev                  | -/-              | -/-              |
| 5   | A     | Std. Gain Horn Antenna 26.5-40.0 GHz    | V637               | Narda          | 82-16            | 300000510 | vIKI!               | 17.01.2022       | 31.01.2024       |
| 6   | A     | Broadband Low Noise Amplifier 18-50 GHz | CBL18503070-XX     | CERNEX         | 19338            | 300004273 | ev                  | -/-              | -/-              |

## 8.4 Conducted measurements system

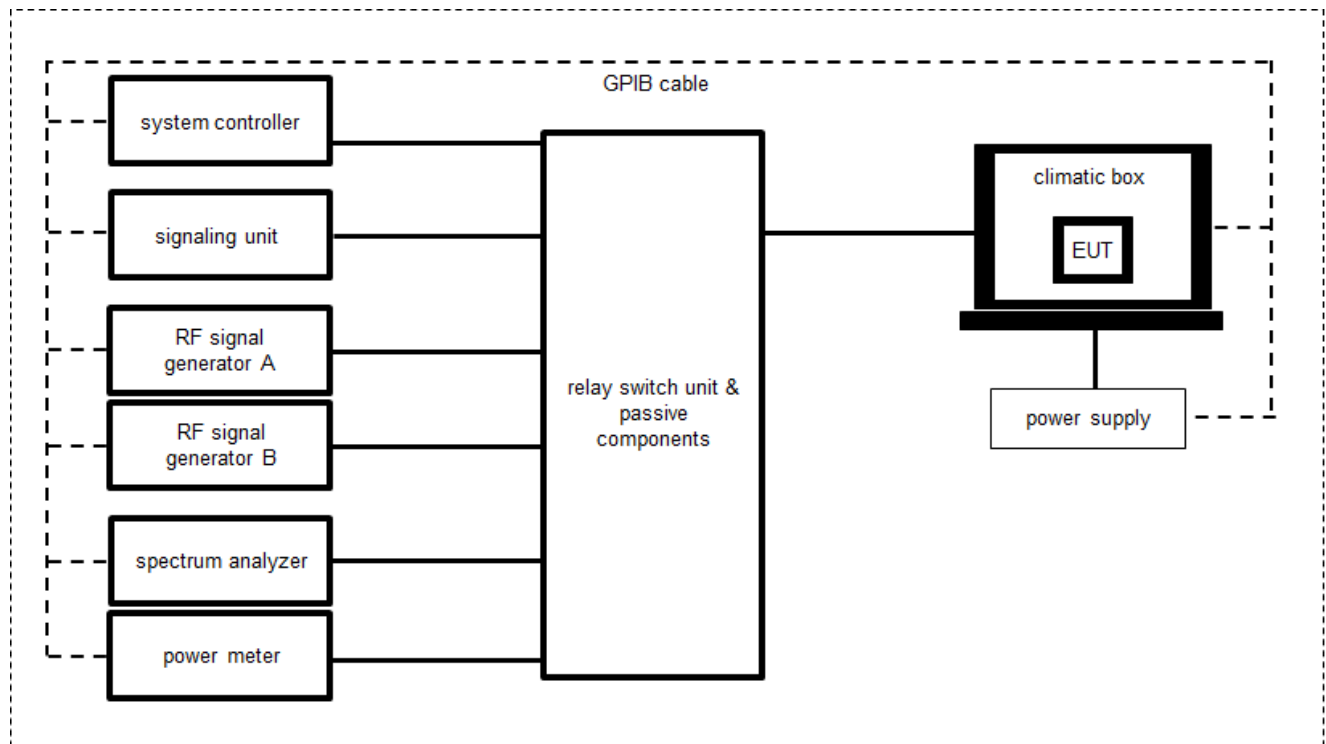

$$OP = AV + CA$$

(OP-output power; AV-analyzer value; CA-loss signal path)


### Example calculation:

$$OP \text{ [dBm]} = 6.0 \text{ [dBm]} + 11.7 \text{ [dB]} = 17.7 \text{ [dBm]} \text{ (58.88 mW)}$$

### Equipment table:

| No. | Setup | Equipment                                            | Type                 | Manufacturer          | Serial No.          | INV. No.  | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|------------------------------------------------------|----------------------|-----------------------|---------------------|-----------|---------------------|------------------|------------------|
| 1   | A     | Switch / Control Unit (including DC-Block, Splitter) | 3488A                | HP                    | -/-                 | 300000929 | ne                  | -/-              | -/-              |
| 2   | A     | Hygro-Thermometer                                    | -/-, 5-45C, 20-100rF | Thies Clima           | -/-                 | 400000080 | ev                  | 15.09.2022       | 14.09.2024       |
| 3   | A     | Signal analyzer                                      | FSV30                | Rohde&Schwarz         | 1321.3008K30/103170 | 300004855 | vKI!                | 09.12.2022       | 31.12.2024       |
| 4   | A     | USB-GPIB-Interface                                   | 82357B               | Agilent Technologies  | MY54323070          | 300004852 | ne                  | -/-              | -/-              |
| 5   | A     | Tester Software C.BER                                | Version 5.0          | cetecom advanced GmbH | 0001                | 400001379 | ne                  | -/-              | -/-              |
| 6   | A     | Switch matrix                                        | RSM 1.1              | cetecom advanced GmbH | 31534892            | 400001456 | ev                  | 20.09.2023       | 19.09.2024       |

## 8.5 AC conducted

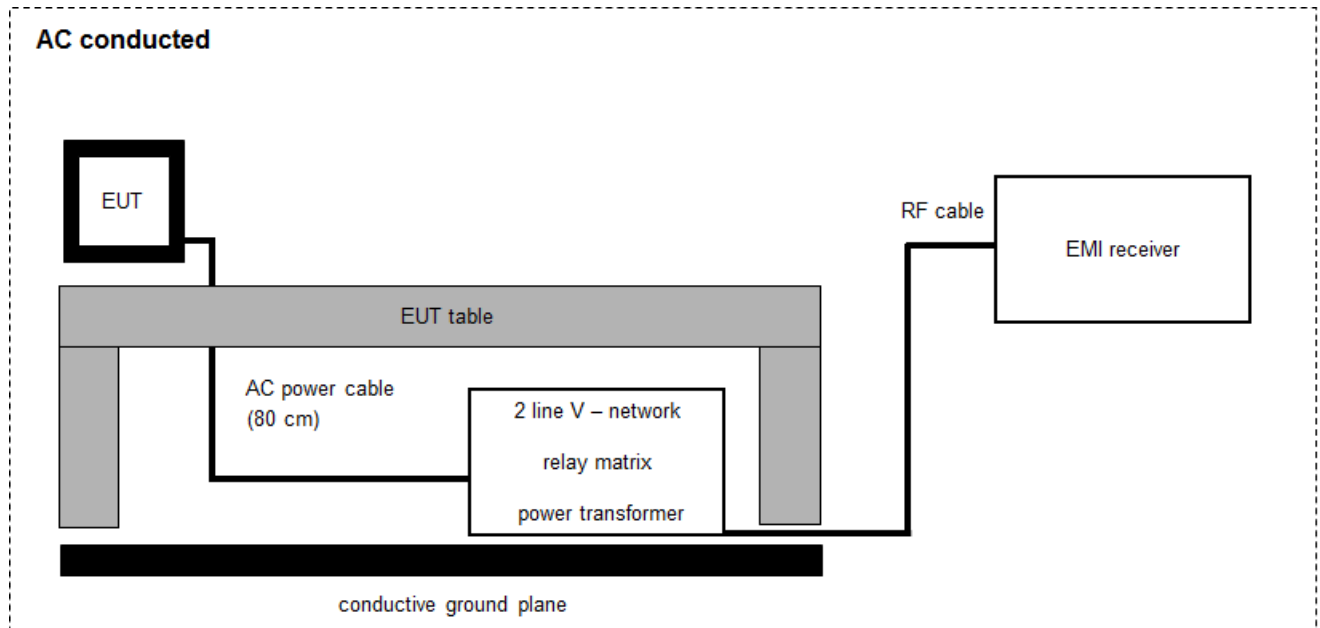

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

### Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 37.62 \text{ [dB}\mu\text{V/m]} + 9.90 \text{ [dB]} + 0.23 \text{ [dB]} = 47.75 \text{ [dB}\mu\text{V/m]} \text{ (244.06 } \mu\text{V/m)}$$

### Equipment table:

| No. | Setup | Equipment                                 | Type    | Manufacturer    | Serial No. | INV. No.  | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|-------------------------------------------|---------|-----------------|------------|-----------|---------------------|------------------|------------------|
| 1   | A     | Two-line V-Network (LISN) 9 kHz to 30 MHz | ESH3-Z5 | Rohde & Schwarz | 892475/017 | 300002209 | vIKI!               | 14.12.2021       | 31.12.2023       |
| 2   | A     | RF-Filter-section                         | 85420E  | HP              | 3427A00162 | 300002214 | NK!                 | -/-              | -/-              |
| 3   | A     | Hochpass 150 kHz                          | EZ-25   | R&S             | 100010     | 300003798 | ev                  | -/-              | -/-              |
| 4   | A     | PC                                        | TecLine | F+W             |            | 300003532 | ne                  | -/-              | -/-              |
| 5   | A     | EMI Test Receiver 3.6 GHz                 | ESR3    | Rohde & Schwarz | 102981     | 300006318 | k                   | 09.12.2022       | 31.12.2023       |

## 9 Measurement uncertainty

| Measurement uncertainty                                  |                                         |               |
|----------------------------------------------------------|-----------------------------------------|---------------|
| Test case                                                | Uncertainty                             |               |
| Antenna gain                                             | $\pm 3$ dB                              |               |
| Power spectral density                                   | $\pm 1.56$ dB                           |               |
| DTS bandwidth                                            | $\pm 100$ kHz (depends on the used RBW) |               |
| Occupied bandwidth                                       | $\pm 100$ kHz (depends on the used RBW) |               |
| Maximum output power conducted                           | $\pm 1.56$ dB                           |               |
| Detailed spurious emissions @ the band edge - conducted  | $\pm 1.56$ dB                           |               |
| Band edge compliance radiated                            | $\pm 3$ dB                              |               |
| Spurious emissions conducted                             | > 3.6 GHz                               | $\pm 1.56$ dB |
|                                                          | > 7 GHz                                 | $\pm 1.56$ dB |
|                                                          | > 18 GHz                                | $\pm 2.31$ dB |
|                                                          | $\geq 40$ GHz                           | $\pm 2.97$ dB |
| Spurious emissions radiated below 30 MHz                 | $\pm 3$ dB                              |               |
| Spurious emissions radiated 30 MHz to 1 GHz              | $\pm 3$ dB                              |               |
| Spurious emissions radiated 1 GHz to 12.75 GHz           | $\pm 3.7$ dB                            |               |
| Spurious emissions radiated above 12.75 GHz              | $\pm 4.5$ dB                            |               |
| Spurious emissions conducted below 30 MHz (AC conducted) | $\pm 2.6$ dB                            |               |

## 10 Summary of measurement results

|                                     |                                                                                                                          |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | No deviations from the technical specifications were ascertained                                                         |
| <input type="checkbox"/>            | There were deviations from the technical specifications ascertained                                                      |
| <input type="checkbox"/>            | This test report is only a partial test report.<br>The content and verdict of the performed test cases are listed below. |

| TC Identifier | Description                              | Verdict   | Date       | Remark |
|---------------|------------------------------------------|-----------|------------|--------|
| RF-Testing    | CFR Title 47 Part 15<br>RSS 247, Issue 2 | See table | 2023-11-24 | -/-    |

| Test specification clause         | Test case                                         | C                                   | NC                       | NA                       | NP                       | Remark                        |
|-----------------------------------|---------------------------------------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|-------------------------------|
| -/-                               | Output power verification (cond.)                 | -/-                                 |                          |                          |                          | Declared                      |
| -/-                               | Antenna gain                                      | -/-                                 |                          |                          |                          | Declared                      |
| U-NII Part 15                     | Duty cycle                                        | -/-                                 |                          |                          |                          | -/-                           |
| §15.407(a)<br>RSS - 247 (6.2.x.1) | Maximum output power<br>(conducted & radiated)    | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-                           |
| §15.407(a)<br>RSS - 247 (6.2.x.1) | Power spectral density                            | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-                           |
| RSS - 247 (6.2.4.1)               | Spectrum bandwidth<br>6dB bandwidth               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-                           |
| §15.407(a)<br>RSS - 247 (6.2.x.2) | Spectrum bandwidth<br>26dB bandwidth              | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-                           |
| RSS Gen clause<br>6.6             | Spectrum bandwidth<br>99% bandwidth               | -/-                                 |                          |                          |                          | -/-                           |
| §15.205<br>RSS - 247 (6.2.x.2)    | Band edge compliance radiated                     | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-                           |
| §15.407(b)<br>RSS - 247 (6.2.x.2) | TX spurious emissions radiated                    | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-                           |
| §15.209(a)<br>RSS-Gen             | Spurious emissions radiated<br>< 30 MHz           | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-                           |
| §15.107(a)<br>§15.207             | Spurious emissions conducted<br>emissions< 30 MHz | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/-                           |
| §15.407<br>RSS - 247 (6.3)        | DFS                                               | -/-                                 |                          |                          |                          | See report<br>1-6608_23-01-24 |

Notes:

|    |           |     |               |     |                |     |               |
|----|-----------|-----|---------------|-----|----------------|-----|---------------|
| C: | Compliant | NC: | Not compliant | NA: | Not applicable | NP: | Not performed |
|----|-----------|-----|---------------|-----|----------------|-----|---------------|

## 11 Additional comments

Reference documents: DFS report: 1-6608\_23-01-24  
1-6608\_23-01-18\_TR1-A201.pdf

Special test descriptions: Used power settings:  
a-mode: 14  
nHT20-mode: 13  
nHT40-mode: 11

Configuration descriptions: Duty cycle was >98% for all tests.

EUT selection:

- ☐ Only one device available
- ☐ Devices selected by the customer
- ☒ Devices selected by the laboratory (Randomly)

Provided channels:

Channels with 20 MHz channel bandwidth:

| U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz)<br>channel number & center frequency |             |             |      |             |             |             |      |             |
|-------------------------------------------------------------------------------------------------------|-------------|-------------|------|-------------|-------------|-------------|------|-------------|
| channel                                                                                               | <b>36</b>   | <b>40</b>   | 44   | <b>48</b>   | <b>52</b>   | <b>56</b>   | 60   | <b>64</b>   |
| f <sub>c</sub> / MHz                                                                                  | <b>5180</b> | <b>5200</b> | 5220 | <b>5240</b> | <b>5260</b> | <b>5280</b> | 5300 | <b>5320</b> |

| U-NII-2C (5470 MHz to 5725 MHz)<br>channel number & center frequency |             |      |      |      |      |             |      |      |      |      |             |
|----------------------------------------------------------------------|-------------|------|------|------|------|-------------|------|------|------|------|-------------|
| channel                                                              | <b>100</b>  | 104  | 108  | 112  | 116  | <b>120</b>  | 124  | 128  | 132  | 136  | <b>140</b>  |
| f <sub>c</sub> / MHz                                                 | <b>5500</b> | 5520 | 5540 | 5560 | 5580 | <b>5600</b> | 5620 | 5640 | 5660 | 5680 | <b>5700</b> |

| U-NII-3 (5725 MHz to 5850 MHz)<br>channel number & center frequency |             |      |             |      |             |
|---------------------------------------------------------------------|-------------|------|-------------|------|-------------|
| channel                                                             | <b>149</b>  | 153  | <b>157</b>  | 161  | <b>165</b>  |
| f <sub>c</sub> / MHz                                                | <b>5745</b> | 5765 | <b>5785</b> | 5805 | <b>5825</b> |

Channels with 40 MHz channel bandwidth:

| U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz & 5250 MHz to 5350 MHz)<br>channel number & center frequency |             |             |             |             |
|-------------------------------------------------------------------------------------------------------|-------------|-------------|-------------|-------------|
| channel                                                                                               | <b>38</b>   | <b>46</b>   | <b>54</b>   | <b>62</b>   |
| f <sub>c</sub> / MHz                                                                                  | <b>5190</b> | <b>5230</b> | <b>5270</b> | <b>5310</b> |

| U-NII-2C (5470 MHz to 5725 MHz)<br>channel number & center frequency |             |      |             |      |
|----------------------------------------------------------------------|-------------|------|-------------|------|
| channel                                                              | <b>102</b>  | 110  | <b>118</b>  | 126  |
| f <sub>c</sub> / MHz                                                 | <b>5510</b> | 5550 | <b>5590</b> | 5630 |

| U-NII-3 (5725 MHz to 5850 MHz)<br>channel number & center frequency |             |             |  |
|---------------------------------------------------------------------|-------------|-------------|--|
| channel                                                             | <b>151</b>  | <b>159</b>  |  |
| f <sub>c</sub> / MHz                                                | <b>5755</b> | <b>5795</b> |  |

Note: The channels used for the tests were marked in bold in the list.

- Test mode:
- ☐ No test mode available.  
lperf is used to transmit data to a companion device
- ☒ Special software is used.  
EUT is transmitting pseudo random data by itself

Antennas and transmit operating modes:

- ☒ Operating mode 1 (single antenna)
- Equipment with 1 antenna,
  - Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,
  - Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)
- ☐ Operating mode 2 (multiple antennas, no beamforming)
- Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.
- ☐ Operating mode 3 (multiple antennas, with beamforming)
- Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.
- In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.

## 12 Measurement results

### 12.1 Identify worst case data rate

Measurement parameters:

| Measurement parameter    |                     |
|--------------------------|---------------------|
| Detector:                | Peak                |
| Sweep time:              | Auto                |
| Resolution bandwidth:    | 3 MHz               |
| Video bandwidth:         | 3 MHz               |
| Trace mode:              | Max hold            |
| Used test setup:         | See chapter 8.4 – A |
| Measurement uncertainty: | See chapter 9       |

Results:

| OFDM – mode   | Modulation scheme / bandwidth |                 |                |                 |                |                 |
|---------------|-------------------------------|-----------------|----------------|-----------------|----------------|-----------------|
|               | U-NII-1 & U-NII-2A            |                 | U-NII-2C       |                 | U-NII-3        |                 |
|               | lowest channel                | highest channel | lowest channel | highest channel | lowest channel | highest channel |
| a – mode      | 6 Mbit/s                      | 6 Mbit/s        | 6 Mbit/s       | 6 Mbit/s        | 6 Mbit/s       | 6 Mbit/s        |
| n HT20 – mode | MCS0                          | MCS0            | MCS0           | MCS0            | MCS0           | MCS0            |
| n HT40 – mode | MCS0                          | MCS0            | MCS0           | MCS0            | MCS0           | MCS0            |

## 12.2 Antenna gain

Limits:

| Antenna Gain                                                      |
|-------------------------------------------------------------------|
| 6 dBi / > 6 dBi output power and power density reduction required |

Results: Extracted from test report no. 1-6608\_23-01-06 and 1-6608\_23-01-07

| U-NII-1<br>(5150 MHz to 5250 MHz)   | Antenna gain   |                |                 |
|-------------------------------------|----------------|----------------|-----------------|
|                                     | Lowest channel | Middle channel | Highest channel |
| Gain / dBi (calculated or declared) | -3.0           |                |                 |

| U-NII-2A<br>(5250 MHz to 5350 MHz)  | Antenna gain   |                |                 |
|-------------------------------------|----------------|----------------|-----------------|
|                                     | Lowest channel | Middle channel | Highest channel |
| Gain / dBi (calculated or declared) | -1.7           |                |                 |

| U-NII-2C<br>(5470 MHz to 5725 MHz)  | Antenna gain   |                |                 |
|-------------------------------------|----------------|----------------|-----------------|
|                                     | Lowest channel | Middle channel | Highest channel |
| Gain / dBi (calculated or declared) | 0.4            | 2.5            | 2.5             |

| U-NII-3<br>(5725 MHz to 5850 MHz)   | Antenna gain   |                |                 |
|-------------------------------------|----------------|----------------|-----------------|
|                                     | Lowest channel | Middle channel | Highest channel |
| Gain / dBi (calculated or declared) | 1.5            | 1.2            | 0.7             |

## 12.3 Maximum output power

### 12.3.1 Maximum output power according to FCC requirements

Description:

Measurement of the maximum output power conducted

Measurement:

| Measurement parameter               |                                                                          |
|-------------------------------------|--------------------------------------------------------------------------|
| According to: KDB789033 D02, E.2.e. |                                                                          |
| External result file(s)             | 1-6608_23-01-18_TR1-A201.pdf<br>FCC Part 15.407 Max Output Power and PSD |
| Used test setup:                    | See chapter 8.4 – A                                                      |
| Measurement uncertainty:            | See chapter 9                                                            |

Limits:

| Limits                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Radiated output power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Conducted output power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Band 5150 MHz – 5250 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <p><b>For an outdoor access point:</b><br/>Conducted power + 6 dBi antenna gain</p> <p><b>For an indoor access point:</b><br/>Conducted power + 6 dBi antenna gain</p> <p><b>For fixed point-to-point access points</b><br/>Conducted power + 23 dBi antenna gain</p> <p><b>For client devices</b><br/>Conducted power + 6 dBi antenna gain</p> <p>(If the Antenna gain is greater than the Limit: 1dB reduction in the max. conducted output power for each 1 dB of antenna gain in excess of the Limit)</p> | <p><b>For an outdoor access point:</b><br/>output power <math>\leq 1\text{W}/30\text{dBm}</math><br/>The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm)</p> <p><b>For an indoor access point</b><br/>output power <math>\leq 1\text{W}/30\text{dBm}</math></p> <p><b>For fixed point-to-point access points</b><br/>output power <math>\leq 1\text{W}/30\text{dBm}</math></p> <p><b>For client devices</b><br/>output power <math>\leq 250\text{ mW}/24\text{dBm}</math></p> |
| Band 5250MHz – 5350 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Conducted power + 6 dBi antenna gain                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Output power $\leq$ lesser of 250mW or 11dBm +10logB<br>(B is the 26 dB emission bandwidth in megahertz)                                                                                                                                                                                                                                                                                                                                                                                                                                            |

|                                                                                                                                                                                                                                                                                                     |                                                                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| (Antenna gain higher than the Limit: 1dB reduction in the max. conducted output power for each 1 dB of antenna gain in excess of the Limit)                                                                                                                                                         |                                                                                                          |
| Band 5470MHz – 5725 MHz                                                                                                                                                                                                                                                                             |                                                                                                          |
| Conducted power + 6 dBi antenna gain<br><br>(Antenna gain higher than the Limit: 1dB reduction in the max. conducted output power for each 1 dB of antenna gain in excess of the Limit)                                                                                                             | Output power $\leq$ lesser of 250mW or 11dBm +10logB<br>(B is the 26 dB emission bandwidth in megahertz) |
| Band 5725MHz – 5850 MHz                                                                                                                                                                                                                                                                             |                                                                                                          |
| Conducted power + 6 dBi antenna gain<br><br>(Antenna gain higher than the Limit: 1dB reduction in the max. conducted output power for each 1 dB of antenna gain in excess of the Limit<br>Exception: fixed point-to-point U-NII devices, no corresponding reduction in transmitter conducted power) | output power $\leq$ 1W/30dBm                                                                             |

## Results:

|   |                                      |                |                 |
|---|--------------------------------------|----------------|-----------------|
| a | Maximum output power conducted [dBm] |                |                 |
|   | U-NII-1 (5150 MHz to 5250 MHz)       |                |                 |
|   | Lowest channel                       | Middle channel | Highest channel |
|   | 7.0                                  | 7.0            | 6.8             |
|   | U-NII-2A (5250 MHz to 5350 MHz)      |                |                 |
|   | Lowest channel                       | Middle channel | Highest channel |
|   | 6.1                                  | 7.6            | 6.8             |
|   | U-NII-2C (5470 MHz to 5725 MHz)      |                |                 |
|   | Lowest channel                       | Middle channel | Highest channel |
|   | 7.3                                  | 6.2            | 6.1             |
|   | U-NII-3 (5725 MHz to 5850 MHz)       |                |                 |
|   | Lowest channel                       | Middle channel | Highest channel |
|   | 6.4                                  | 6.6            | 6.6             |

|        |                                      |                |                 |
|--------|--------------------------------------|----------------|-----------------|
| n HT20 | Maximum output power conducted [dBm] |                |                 |
|        | U-NII-1 (5150 MHz to 5250 MHz)       |                |                 |
|        | Lowest channel                       | Middle channel | Highest channel |
|        | 6.1                                  | 6.3            | 6.0             |
|        | U-NII-2A (5250 MHz to 5350 MHz)      |                |                 |
|        | Lowest channel                       | Middle channel | Highest channel |
|        | 5.4                                  | 6.9            | 6.1             |
|        | U-NII-2C (5470 MHz to 5725 MHz)      |                |                 |
|        | Lowest channel                       | Middle channel | Highest channel |
|        | 6.7                                  | 5.5            | 5.4             |
|        | U-NII-3 (5725 MHz to 5850 MHz)       |                |                 |
|        | Lowest channel                       | Middle channel | Highest channel |
|        | 5.7                                  | 5.9            | 6.0             |

|        |                                      |                 |                 |
|--------|--------------------------------------|-----------------|-----------------|
| n HT40 | Maximum output power conducted [dBm] |                 |                 |
|        | U-NII-1 (5150 MHz to 5250 MHz)       |                 |                 |
|        | Lowest channel                       | Highest channel |                 |
|        | 4.1                                  | 4.4             |                 |
|        | U-NII-2A (5250 MHz to 5350 MHz)      |                 |                 |
|        | Lowest channel                       | Highest channel |                 |
|        | 4.2                                  | 4.2             |                 |
|        | U-NII-2C (5470 MHz to 5725 MHz)      |                 |                 |
|        | Lowest channel                       | Middle channel  | Highest channel |
|        | 4.5                                  | 3.9             | 3.5             |
|        | U-NII-3 (5725 MHz to 5850 MHz)       |                 |                 |
|        | Lowest channel                       | Highest channel |                 |
|        | 3.4                                  | 3.4             |                 |

### 12.3.2 Maximum output power according to ISED requirements

Description:

Measurement of the maximum output power conducted + radiated

Measurement:

| Measurement parameter    |                                                               |
|--------------------------|---------------------------------------------------------------|
| External result file(s)  | 1-6608_23-01-18_TR1-A201.pdf<br>ISED Max Output Power and PSD |
| Used test setup:         | See chapter 8.4 – A                                           |
| Measurement uncertainty: | See chapter 9                                                 |

Limits:

| Radiated output power                                                                                                                                                                                                                                                                                                                                                                                                                                       | Conducted output power for mobile equipment                                                                                                                                                                                |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>The lesser one of</p> <p>200 mW or 10 dBm + 10 log Bandwidth 5.150-5.250 GHz</p> <p>1 W or 17 dBm + 10 log Bandwidth 5.250-5.350 GHz</p> <p>1 W or 17 dBm + 10 log Bandwidth 5.470-5.725 GHz</p> <p>(where Bandwidth is the 99% Bandwidth [MHz])</p> <p>Conducted power + 6dBi antenna gain 5.725-5.825 GHz</p> <p><b>Devices other than client devices</b> 5925-7125 MHz:</p> <p>≤ 30dBm</p> <p><b>Client devices</b> 5925-7125 MHz:</p> <p>≤ 24dBm</p> | <p>The lesser one of</p> <p>250mW or 11 dBm + 10 log Bandwidth 5.250-5.350 GHz</p> <p>250mW or 11 dBm + 10 log Bandwidth 5.470-5.725 GHz</p> <p>(where Bandwidth is the 99% Bandwidth [MHz])</p> <p>1W 5.725-5.825 GHz</p> |

## Results:

|   |                                                  |                |                 |
|---|--------------------------------------------------|----------------|-----------------|
| a | Maximum output power [dBm]                       |                |                 |
|   | U-NII-1 (5150 MHz to 5250 MHz)                   |                |                 |
|   | Lowest channel                                   | Middle channel | Highest channel |
|   | Conducted                                        |                |                 |
|   | 6.9                                              | 7.0            | 6.7             |
|   | Radiated (calculated – see chapter antenna gain) |                |                 |
|   | 3.9                                              | 4.0            | 3.7             |
|   | U-NII-2A (5250 MHz to 5350 MHz)                  |                |                 |
|   | Lowest channel                                   | Middle channel | Highest channel |
|   | Conducted                                        |                |                 |
|   | 6.0                                              | 7.5            | 6.7             |
|   | Radiated (calculated – see chapter antenna gain) |                |                 |
|   | 4.3                                              | 5.8            | 5.0             |
|   | U-NII-2C (5470 MHz to 5725 MHz)                  |                |                 |
|   | Lowest channel                                   | Middle channel | Highest channel |
|   | Conducted                                        |                |                 |
|   | 7.3                                              | 6.1            | 6.0             |
|   | Radiated (calculated – see chapter antenna gain) |                |                 |
|   | 7.7                                              | 8.6            | 8.5             |
|   | U-NII-3 (5725 MHz to 5850 MHz)                   |                |                 |
|   | Lowest channel                                   | Middle channel | Highest channel |
|   | Conducted                                        |                |                 |
|   | 6.3                                              | 6.5            | 6.6             |
|   | Radiated (calculated – see chapter antenna gain) |                |                 |
|   | 7.8                                              | 7.7            | 7.3             |

## Results:

|        |                                                  |                |                 |
|--------|--------------------------------------------------|----------------|-----------------|
| n HT20 | Maximum output power [dBm]                       |                |                 |
|        | U-NII-1 (5150 MHz to 5250 MHz)                   |                |                 |
|        | Lowest channel                                   | Middle channel | Highest channel |
|        | Conducted                                        |                |                 |
|        | 6.0                                              | 6.2            | 5.9             |
|        | Radiated (calculated – see chapter antenna gain) |                |                 |
|        | 3.0                                              | 3.2            | 2.9             |
|        | U-NII-2A (5250 MHz to 5350 MHz)                  |                |                 |
|        | Lowest channel                                   | Middle channel | Highest channel |
|        | Conducted                                        |                |                 |
|        | 5.3                                              | 6.8            | 6.0             |
|        | Radiated (calculated – see chapter antenna gain) |                |                 |
|        | 3.6                                              | 5.1            | 4.3             |
|        | U-NII-2C (5470 MHz to 5725 MHz)                  |                |                 |
|        | Lowest channel                                   | Middle channel | Highest channel |
|        | Conducted                                        |                |                 |
|        | 6.6                                              | 5.4            | 5.3             |
|        | Radiated (calculated – see chapter antenna gain) |                |                 |
|        | 7.0                                              | 7.9            | 7.8             |
|        | U-NII-3 (5725 MHz to 5850 MHz)                   |                |                 |
|        | Lowest channel                                   | Middle channel | Highest channel |
|        | Conducted                                        |                |                 |
|        | 5.6                                              | 5.8            | 5.9             |
|        | Radiated (calculated – see chapter antenna gain) |                |                 |
|        | 7.1                                              | 7.0            | 6.6             |

## Results:

|        |                                                  |  |                 |                 |
|--------|--------------------------------------------------|--|-----------------|-----------------|
| n HT40 | Maximum output power [dBm]                       |  |                 |                 |
|        | U-NII-1 (5150 MHz to 5250 MHz)                   |  |                 |                 |
|        | Lowest channel                                   |  | Highest channel |                 |
|        | Conducted                                        |  |                 |                 |
|        | 4.0                                              |  | 4.4             |                 |
|        | Radiated (calculated – see chapter antenna gain) |  |                 |                 |
|        | 1.0                                              |  | 1.4             |                 |
|        | U-NII-2A (5250 MHz to 5350 MHz)                  |  |                 |                 |
|        | Lowest channel                                   |  | Highest channel |                 |
|        | Conducted                                        |  |                 |                 |
|        | 4.1                                              |  | 4.2             |                 |
|        | Radiated (calculated – see chapter antenna gain) |  |                 |                 |
|        | 2.4                                              |  | 2.5             |                 |
|        | U-NII-2C (5470 MHz to 5725 MHz)                  |  |                 |                 |
|        | Lowest channel                                   |  | Middle channel  | Highest channel |
|        | Conducted                                        |  |                 |                 |
|        | 4.4                                              |  | 3.8             | 3.4             |
|        | Radiated (calculated – see chapter antenna gain) |  |                 |                 |
|        | 4.8                                              |  | 7.3             | 5.9             |
|        | U-NII-3 (5725 MHz to 5850 MHz)                   |  |                 |                 |
|        | Lowest channel                                   |  | Highest channel |                 |
|        | Conducted                                        |  |                 |                 |
|        | 3.4                                              |  | 3.3             |                 |
|        | Radiated (calculated – see chapter antenna gain) |  |                 |                 |
|        | 5.9                                              |  | 4.0             |                 |

## 12.4 Power spectral density

### 12.4.1 Power spectral density according to FCC requirements

Measurement:

|                                 |                                                                          |
|---------------------------------|--------------------------------------------------------------------------|
| Measurement parameter           |                                                                          |
| According to: KDB789033 D02, F. |                                                                          |
| External result file(s)         | 1-6608_23-01-18_TR1-A201.pdf<br>FCC Part 15.407 Max Output Power and PSD |
| Used test setup:                | See chapter 8.4 – A                                                      |
| Measurement uncertainty:        | See chapter 9                                                            |

Limits:

| Power Spectral Density                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Band 5150 MHz – 5250 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <p>For an outdoor access point power spectral density conducted <math>\leq 17</math> dBm in any 1 MHz band*</p> <p>For an indoor access point power spectral density conducted <math>\leq 17</math> dBm in any 1 MHz band*</p> <p>For fixed point-to-point access points power spectral density conducted <math>\leq 17</math> dBm in any 1 MHz band**</p> <p>For client devices point power spectral density conducted <math>\leq 11</math> dBm in any 1 MHz band*</p> <p>*If transmitting antennas of directional gain greater than 6 dBi are used the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi</p> <p>**Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.</p> |
| Band 5250MHz – 5350 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <p>power spectral density conducted <math>\leq 11</math> dBm in any 1 MHz band*</p> <p>*If transmitting antennas of directional gain greater than 6 dBi are used the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Band 5470MHz – 5725 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <p>power spectral density conducted <math>\leq 11</math> dBm in any 1 MHz band*</p> <p>*If transmitting antennas of directional gain greater than 6 dBi are used the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Band 5725MHz – 5850 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <p>power spectral density conducted <math>\leq 30</math> dBm in any 500 kHz band</p> <p>If transmitting antennas of directional gain greater than 6 dBi are used the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

Results:

|   |                                                 |                |                 |
|---|-------------------------------------------------|----------------|-----------------|
| a | Power spectral density (dBm/1MHz or dBm/500kHz) |                |                 |
|   | U-NII-1 (5150 MHz to 5250 MHz)                  |                |                 |
|   | Lowest channel                                  | Middle channel | Highest channel |
|   | -4.2                                            | -4.2           | -4.0            |
|   | U-NII-2A (5250 MHz to 5350 MHz)                 |                |                 |
|   | Lowest channel                                  | Middle channel | Highest channel |
|   | -5.0                                            | -3.5           | -4.3            |
|   | U-NII-2C (5470 MHz to 5725 MHz)                 |                |                 |
|   | Lowest channel                                  | Middle channel | Highest channel |
|   | -3.9                                            | -5.0           | -5.1            |
|   | U-NII-3 (5725 MHz to 5850 MHz)                  |                |                 |
|   | Lowest channel                                  | Middle channel | Highest channel |
|   | -7.7                                            | -7.5           | -7.5            |

Results:

|        |                                                 |                |                 |
|--------|-------------------------------------------------|----------------|-----------------|
| n HT20 | Power spectral density (dBm/1MHz or dBm/500kHz) |                |                 |
|        | U-NII-1 (5150 MHz to 5250 MHz)                  |                |                 |
|        | Lowest channel                                  | Middle channel | Highest channel |
|        | -5.3                                            | -5.2           | -4.9            |
|        | U-NII-2A (5250 MHz to 5350 MHz)                 |                |                 |
|        | Lowest channel                                  | Middle channel | Highest channel |
|        | -5.8                                            | -4.5           | -5.2            |
|        | U-NII-2C (5470 MHz to 5725 MHz)                 |                |                 |
|        | Lowest channel                                  | Middle channel | Highest channel |
|        | -4.8                                            | -5.9           | -6.0            |
|        | U-NII-3 (5725 MHz to 5850 MHz)                  |                |                 |
|        | Lowest channel                                  | Middle channel | Highest channel |
|        | -8.6                                            | -8.4           | -8.4            |

## Results:

|        |                                                 |                |                 |
|--------|-------------------------------------------------|----------------|-----------------|
| n HT40 | Power spectral density (dBm/1MHz or dBm/500kHz) |                |                 |
|        | U-NII-1 (5150 MHz to 5250 MHz)                  |                |                 |
|        | Lowest channel                                  |                | Highest channel |
|        | -10.3                                           |                | -9.8            |
|        | U-NII-2A (5250 MHz to 5350 MHz)                 |                |                 |
|        | Lowest channel                                  |                | Highest channel |
|        | -9.2                                            |                | -9.7            |
|        | U-NII-2C (5470 MHz to 5725 MHz)                 |                |                 |
|        | Lowest channel                                  | Middle channel | Highest channel |
|        | -9.8                                            | -10.4          | -10.6           |
|        | U-NII-3 (5725 MHz to 5850 MHz)                  |                |                 |
|        | Lowest channel                                  |                | Highest channel |
|        | -13.8                                           |                | -13.8           |

## 12.4.2 Power spectral density according to ISED requirements

### Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

### Measurement:

| Measurement parameter    |                                                               |
|--------------------------|---------------------------------------------------------------|
| External result file(s)  | 1-6608_23-01-18_TR1-A201.pdf<br>ISED Max Output Power and PSD |
| Used test setup:         | See chapter 8.4 – A                                           |
| Measurement uncertainty: | See chapter 9                                                 |

### Limits:

| Power Spectral Density                                                                    |
|-------------------------------------------------------------------------------------------|
| power spectral density e.i.r.p. $\leq 10$ dBm in any 1 MHz band (band 5150 – 5250 MHz)    |
| power spectral density conducted $\leq 11$ dBm in any 1 MHz band (band 5250 – 5350 MHz)   |
| power spectral density conducted $\leq 11$ dBm in any 1 MHz band (band 5470 – 5725 MHz)   |
| power spectral density conducted $\leq 30$ dBm in any 500 kHz band (band 5725 – 5850 MHz) |

Results:

|   |                                                  |                |                 |
|---|--------------------------------------------------|----------------|-----------------|
| a | Power spectral density (dBm/1MHz or dBm/500kHz)  |                |                 |
|   | U-NII-1 (5150 MHz to 5250 MHz)                   |                |                 |
|   | Lowest channel                                   | Middle channel | Highest channel |
|   | Conducted                                        |                |                 |
|   | -4.3                                             | -4.2           | -4.0            |
|   | Radiated (calculated – see chapter antenna gain) |                |                 |
|   | -7.3                                             | -7.2           | -7.0            |
|   | U-NII-2A (5250 MHz to 5350 MHz)                  |                |                 |
|   | Lowest channel                                   | Middle channel | Highest channel |
|   | -5.0                                             | -3.5           | -4.3            |
|   | U-NII-2C (5470 MHz to 5725 MHz)                  |                |                 |
|   | Lowest channel                                   | Middle channel | Highest channel |
|   | -3.9                                             | -5.0           | -5.1            |
|   | U-NII-3 (5725 MHz to 5850 MHz)                   |                |                 |
|   | Lowest channel                                   | Middle channel | Highest channel |
|   | -7.7                                             | -7.6           | -7.5            |

Results:

|        |                                                  |                |                 |
|--------|--------------------------------------------------|----------------|-----------------|
| n HT20 | Power spectral density (dBm/1MHz or dBm/500kHz)  |                |                 |
|        | U-NII-1 (5150 MHz to 5250 MHz)                   |                |                 |
|        | Lowest channel                                   | Middle channel | Highest channel |
|        | Conducted                                        |                |                 |
|        | -5.3                                             | -5.2           | -4.9            |
|        | Radiated (calculated – see chapter antenna gain) |                |                 |
|        | -8.3                                             | -8.2           | -7.9            |
|        | U-NII-2A (5250 MHz to 5350 MHz)                  |                |                 |
|        | Lowest channel                                   | Middle channel | Highest channel |
|        | -5.8                                             | -4.5           | -5.2            |
|        | U-NII-2C (5470 MHz to 5725 MHz)                  |                |                 |
|        | Lowest channel                                   | Middle channel | Highest channel |
|        | -4.8                                             | -5.9           | -6.0            |
|        | U-NII-3 (5725 MHz to 5850 MHz)                   |                |                 |
|        | Lowest channel                                   | Middle channel | Highest channel |
|        | -8.6                                             | -8.4           | -8.4            |

## Results:

|        |                                                  |                |                 |
|--------|--------------------------------------------------|----------------|-----------------|
| n HT40 | Power spectral density (dBm/1MHz or dBm/500kHz)  |                |                 |
|        | U-NII-1 (5150 MHz to 5250 MHz)                   |                |                 |
|        | Lowest channel                                   |                | Highest channel |
|        | Conducted                                        |                |                 |
|        | -10.3                                            |                | -9.8            |
|        | Radiated (calculated – see chapter antenna gain) |                |                 |
|        | -13.3                                            |                | -12.8           |
|        | U-NII-2A (5250 MHz to 5350 MHz)                  |                |                 |
|        | Lowest channel                                   |                | Highest channel |
|        | -9.2                                             |                | -9.7            |
|        | U-NII-2C (5470 MHz to 5725 MHz)                  |                |                 |
|        | Lowest channel                                   | Middle channel | Highest channel |
|        | -9.8                                             | -10.3          | -10.6           |
|        | U-NII-3 (5725 MHz to 5850 MHz)                   |                |                 |
|        | Lowest channel                                   |                | Highest channel |
|        | -13.8                                            |                | -13.8           |

## 12.5 Minimum emission bandwidth for the band 5.725-5.85 GHz

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

| Measurement parameter             |                                                                             |
|-----------------------------------|-----------------------------------------------------------------------------|
| According to: KDB789033 D02, C.2. |                                                                             |
| External result file(s)           | 1-6608_23-01-18_TR1-A201.pdf<br>FCC Part 15.407 & ISSED Minimum Emission BW |
| Used test setup:                  | See chapter 8.4 – A                                                         |
| Measurement uncertainty:          | See chapter 9                                                               |

Limits:

| FCC                                                   | ISED |
|-------------------------------------------------------|------|
| The minimum 6 dB bandwidth shall be at least 500 kHz. |      |

Results:

|   |                                |                |                 |
|---|--------------------------------|----------------|-----------------|
| a | 6 dB emission bandwidth (MHz)  |                |                 |
|   | U-NII-3 (5725 MHz to 5850 MHz) |                |                 |
|   | Lowest channel                 | Middle channel | Highest channel |
|   | 16.4                           | 16.4           | 16.4            |

Results:

|        |                                |                |                 |
|--------|--------------------------------|----------------|-----------------|
| n HT20 | 6 dB emission bandwidth (MHz)  |                |                 |
|        | U-NII-3 (5725 MHz to 5850 MHz) |                |                 |
|        | Lowest channel                 | Middle channel | Highest channel |
|        | 17.6                           | 17.6           | 17.6            |

Results:

|        |                                |                 |
|--------|--------------------------------|-----------------|
| n HT40 | 6 dB emission bandwidth (MHz)  |                 |
|        | U-NII-3 (5725 MHz to 5850 MHz) |                 |
|        | Lowest channel                 | Highest channel |
|        | 35.7                           | 35.5            |

## 12.6 Spectrum bandwidth / 26 dB bandwidth

Description:

Measurement of the 26 dB bandwidth of the modulated signal.

Measurement:

| Measurement parameter             |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| According to: KDB789033 D02, C.1. |                                                                    |
| External result file(s)           | 1-6608_23-01-18_TR1-A201.pdf<br>FCC Part 15.407 & ISSED Bandwidths |
| Used test setup:                  | See chapter 8.4 – A                                                |
| Measurement uncertainty:          | See chapter 9                                                      |

Limits:

| Spectrum Bandwidth – 26 dB Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>IC:</b> Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.</p> <p><b>FCC:</b> Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.</p> |

Results:

|   |                                 |                |                 |
|---|---------------------------------|----------------|-----------------|
| a | 26 dB bandwidth (MHz)           |                |                 |
|   | U-NII-1 (5150 MHz to 5250 MHz)  |                |                 |
|   | Lowest channel                  | Middle channel | Highest channel |
|   | 20.2                            | 20.0           | 20.3            |
|   | U-NII-2A (5250 MHz to 5350 MHz) |                |                 |
|   | Lowest channel                  | Middle channel | Highest channel |
|   | 20.4                            | 20.1           | 20.3            |
|   | U-NII-2C (5470 MHz to 5725 MHz) |                |                 |
|   | Lowest channel                  | Middle channel | Highest channel |
|   | 20.1                            | 20.6           | 20.2            |
|   | U-NII-3 (5725 MHz to 5850 MHz)  |                |                 |
|   | Lowest channel                  | Middle channel | Highest channel |
|   | 18.9                            | 18.9           | 19.0            |

Results:

|        |                                 |                |                 |
|--------|---------------------------------|----------------|-----------------|
| n HT20 | 26 dB bandwidth (MHz)           |                |                 |
|        | U-NII-1 (5150 MHz to 5250 MHz)  |                |                 |
|        | Lowest channel                  | Middle channel | Highest channel |
|        | 20.8                            | 20.9           | 21.0            |
|        | U-NII-2A (5250 MHz to 5350 MHz) |                |                 |
|        | Lowest channel                  | Middle channel | Highest channel |
|        | 20.1                            | 20.6           | 20.7            |
|        | U-NII-2C (5470 MHz to 5725 MHz) |                |                 |
|        | Lowest channel                  | Middle channel | Highest channel |
|        | 20.5                            | 21.4           | 21.6            |
|        | U-NII-3 (5725 MHz to 5850 MHz)  |                |                 |
|        | Lowest channel                  | Middle channel | Highest channel |
|        | 19.4                            | 19.3           | 19.4            |

## Results:

|        |                                 |                |                 |
|--------|---------------------------------|----------------|-----------------|
| n HT40 | 26 dB bandwidth (MHz)           |                |                 |
|        | U-NII-1 (5150 MHz to 5250 MHz)  |                |                 |
|        | Lowest channel                  |                | Highest channel |
|        | 41.9                            |                | 42.3            |
|        | U-NII-2A (5250 MHz to 5350 MHz) |                |                 |
|        | Lowest channel                  |                | Highest channel |
|        | 41.3                            |                | 41.9            |
|        | U-NII-2C (5470 MHz to 5725 MHz) |                |                 |
|        | Lowest channel                  | Middle channel | Highest channel |
|        | 41.2                            | 41.6           | 41.6            |
|        | U-NII-3 (5725 MHz to 5850 MHz)  |                |                 |
|        | Lowest channel                  |                | Highest channel |
|        | 39.2                            |                | 39.1            |

## 12.7 Occupied bandwidth / 99% emission bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

Measurement:

| Measurement parameter    |                                                                   |
|--------------------------|-------------------------------------------------------------------|
| External result file(s)  | 1-6608_23-01-18_TR1-A201.pdf<br>FCC Part 15.407 & ISED Bandwidths |
| Test setup:              | See chapter 8.4 – A                                               |
| Measurement uncertainty: | See chapter 9                                                     |

Usage:

| -/-                                      | ISED |
|------------------------------------------|------|
| OBW is necessary for Emission Designator |      |

Results:

|   |                                 |                |                 |
|---|---------------------------------|----------------|-----------------|
| a | 99% bandwidth (kHz)             |                |                 |
|   | U-NII-1 (5150 MHz to 5250 MHz)  |                |                 |
|   | Lowest channel                  | Middle channel | Highest channel |
|   | 16883                           | 16883          | 16883           |
|   | U-NII-2A (5250 MHz to 5350 MHz) |                |                 |
|   | Lowest channel                  | Middle channel | Highest channel |
|   | 16883                           | 16883          | 16883           |
|   | U-NII-2C (5470 MHz to 5725 MHz) |                |                 |
|   | Lowest channel                  | Middle channel | Highest channel |
|   | 16883                           | 16883          | 16883           |
|   | U-NII-3 (5725 MHz to 5850 MHz)  |                |                 |
|   | Lowest channel                  | Middle channel | Highest channel |
|   | 16883                           | 16883          | 16883           |

Results:

|        |                                 |                |                 |
|--------|---------------------------------|----------------|-----------------|
| n HT20 | 99% bandwidth (kHz)             |                |                 |
|        | U-NII-1 (5150 MHz to 5250 MHz)  |                |                 |
|        | Lowest channel                  | Middle channel | Highest channel |
|        | 17782                           | 17782          | 17782           |
|        | U-NII-2A (5250 MHz to 5350 MHz) |                |                 |
|        | Lowest channel                  | Middle channel | Highest channel |
|        | 17732                           | 17732          | 17782           |
|        | U-NII-2C (5470 MHz to 5725 MHz) |                |                 |
|        | Lowest channel                  | Middle channel | Highest channel |
|        | 17782                           | 17732          | 17782           |
|        | U-NII-3 (5725 MHz to 5850 MHz)  |                |                 |
|        | Lowest channel                  | Middle channel | Highest channel |
|        | 17782                           | 17732          | 17782           |

## Results:

|        |                                 |                |                 |
|--------|---------------------------------|----------------|-----------------|
| n HT40 | 99% bandwidth (kHz)             |                |                 |
|        | U-NII-1 (5150 MHz to 5250 MHz)  |                |                 |
|        | Lowest channel                  |                | Highest channel |
|        | 36364                           |                | 36264           |
|        | U-NII-2A (5250 MHz to 5350 MHz) |                |                 |
|        | Lowest channel                  |                | Highest channel |
|        | 36364                           |                | 36364           |
|        | U-NII-2C (5470 MHz to 5725 MHz) |                |                 |
|        | Lowest channel                  | Middle channel | Highest channel |
|        | 36364                           | 36264          | 36364           |
|        | U-NII-3 (5725 MHz to 5850 MHz)  |                |                 |
|        | Lowest channel                  |                | Highest channel |
|        | 36364                           |                | 36364           |

## 12.8 Band edge compliance radiated

### Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to the lowest channel for the lower restricted band and to the highest channel for the upper restricted band. Measurement distance is 3m.

### Measurement:



| Measurement parameter    |                            |
|--------------------------|----------------------------|
| Detector:                | Peak / RMS                 |
| Sweep time:              | Auto                       |
| Resolution bandwidth:    | 1 MHz                      |
| Video bandwidth:         | $\geq 3 \times \text{RBW}$ |
| Span:                    | See plots!                 |
| Trace mode:              | Max Hold                   |
| Test setup:              | See chapter 8.2 – A        |
| Measurement uncertainty: | See chapter 9              |



### Limits:



| Band Edge Compliance Radiated                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)). |
| 74 dB $\mu$ V/m (peak)<br>54 dB $\mu$ V/m (average)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |



### Result:

| Scenario  | Band Edge Compliance Radiated [dB $\mu$ V/m]            |
|-----------|---------------------------------------------------------|
| band edge | < 74 dB $\mu$ V/m (peak)<br>< 54 dB $\mu$ V/m (average) |

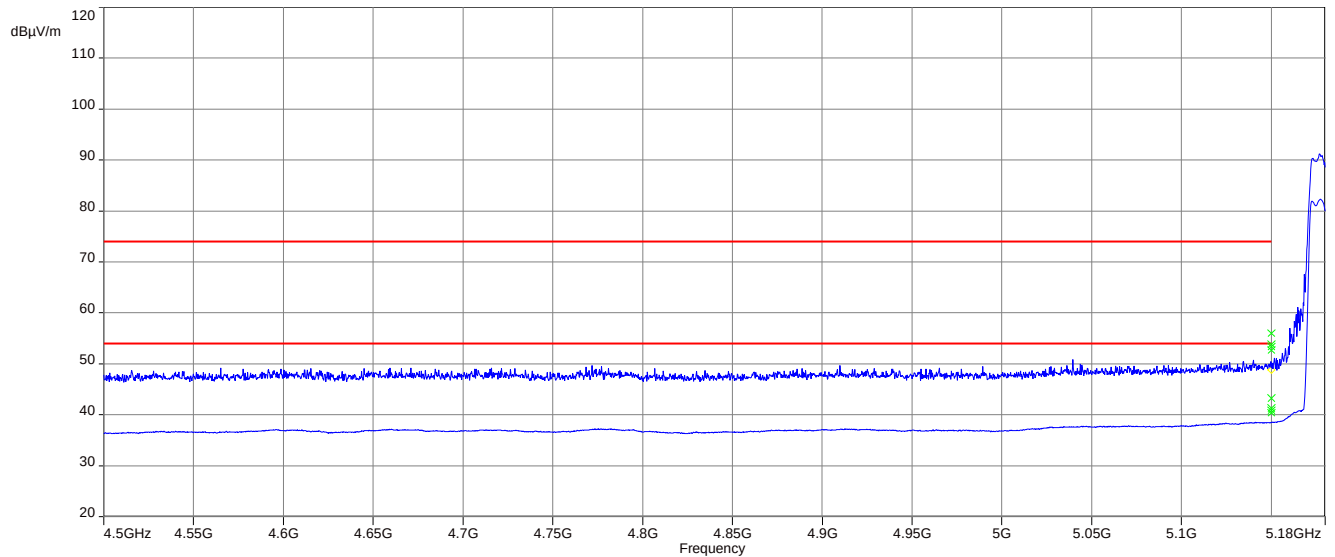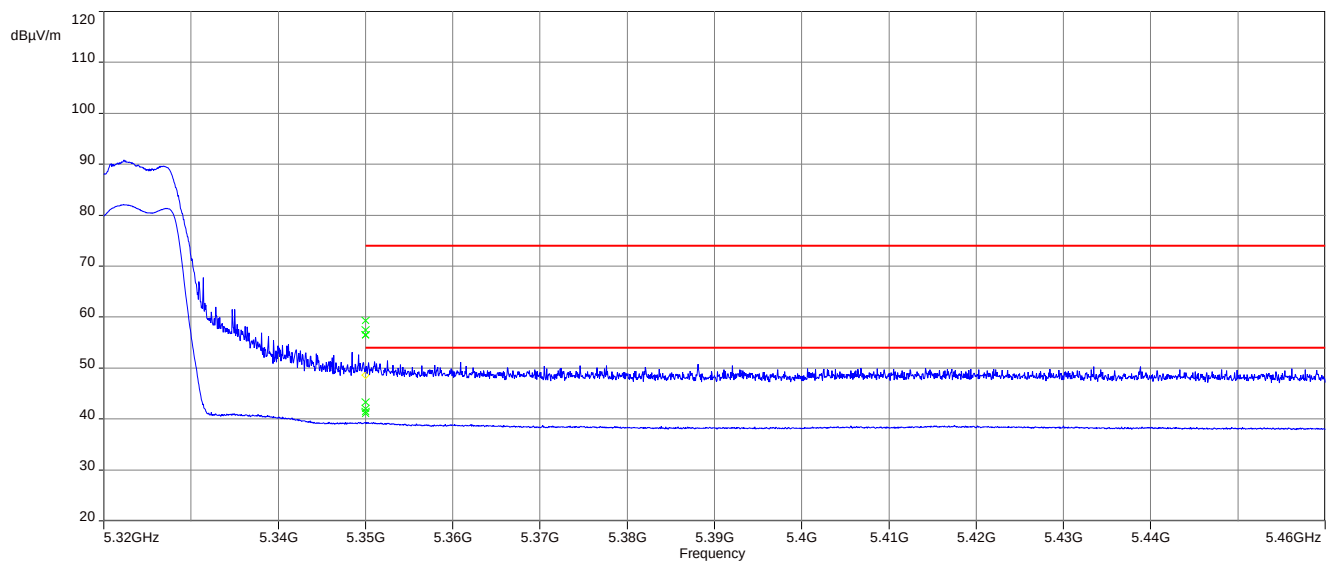
**Plots:****Plot 1:** lower band edge; U-NII-1; lowest channel; a-mode**Plot 2:** upper band edge; U-NII-2A; highest channel; a-mode

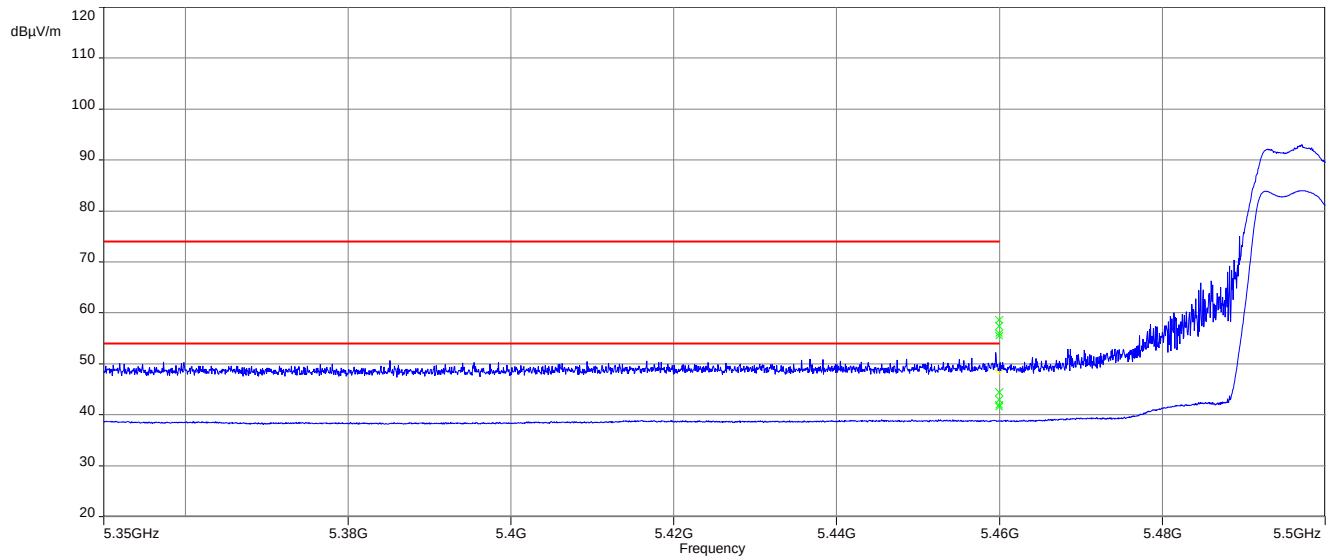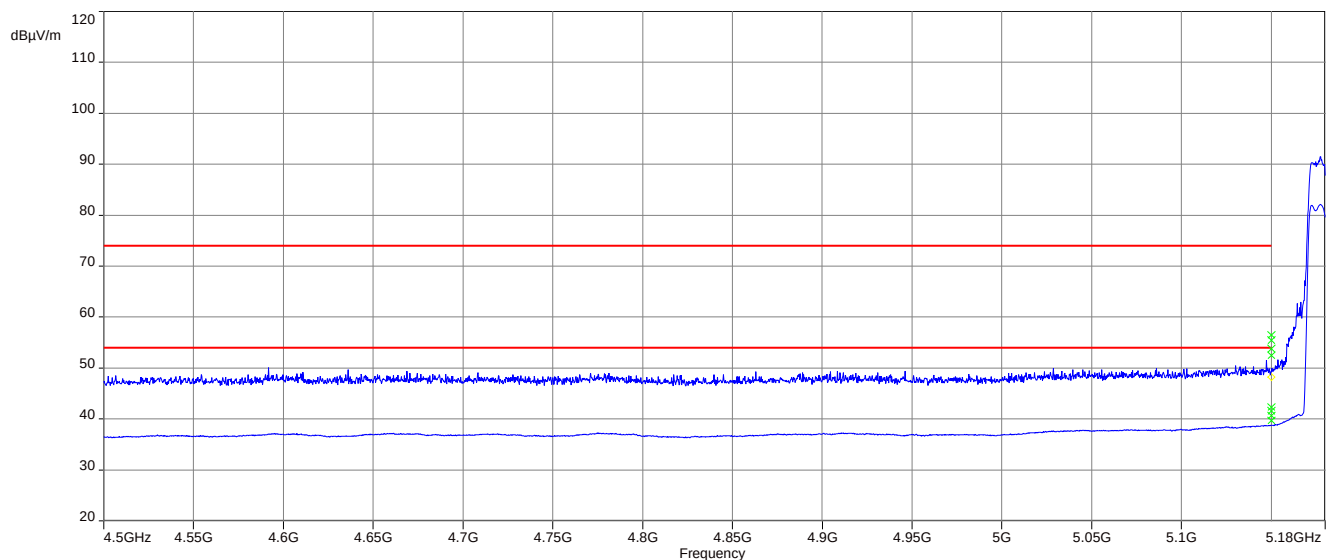**Plot 3:** lower band edge; U-NII-2C; lowest channel; a-mode**Plot 4:** lower band edge; U-NII-1; lowest channel; nHT20-mode

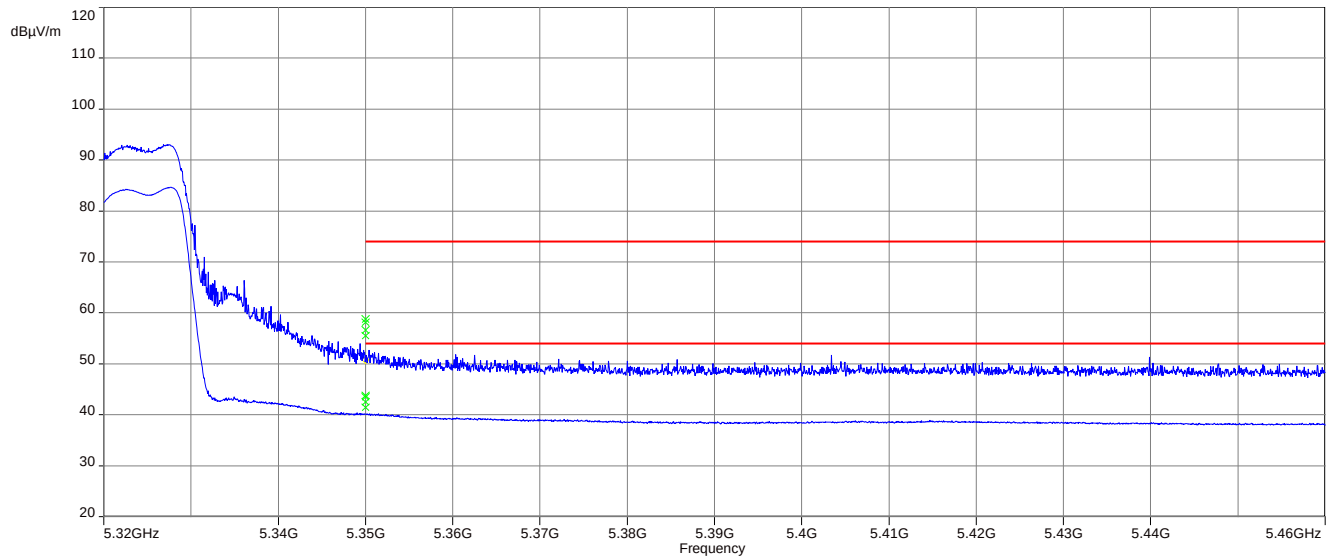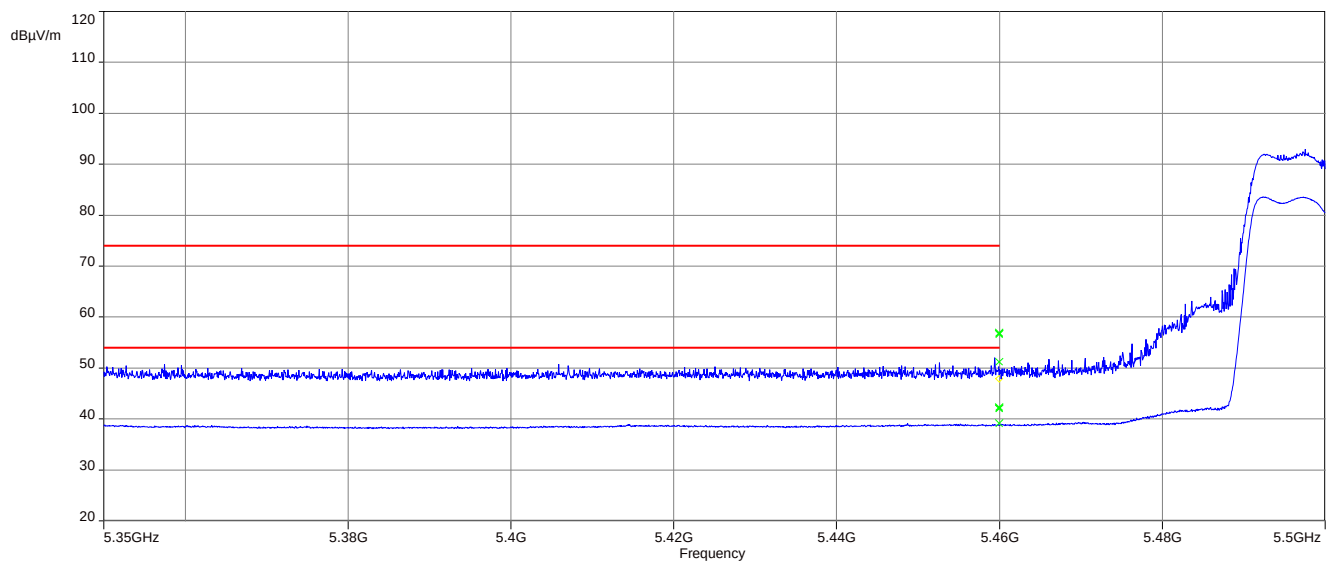**Plot 5:** upper band edge; U-NII-2A; highest channel; nHT20-mode**Plot 6:** lower band edge; U-NII-2C; lowest channel; nHT20-mode

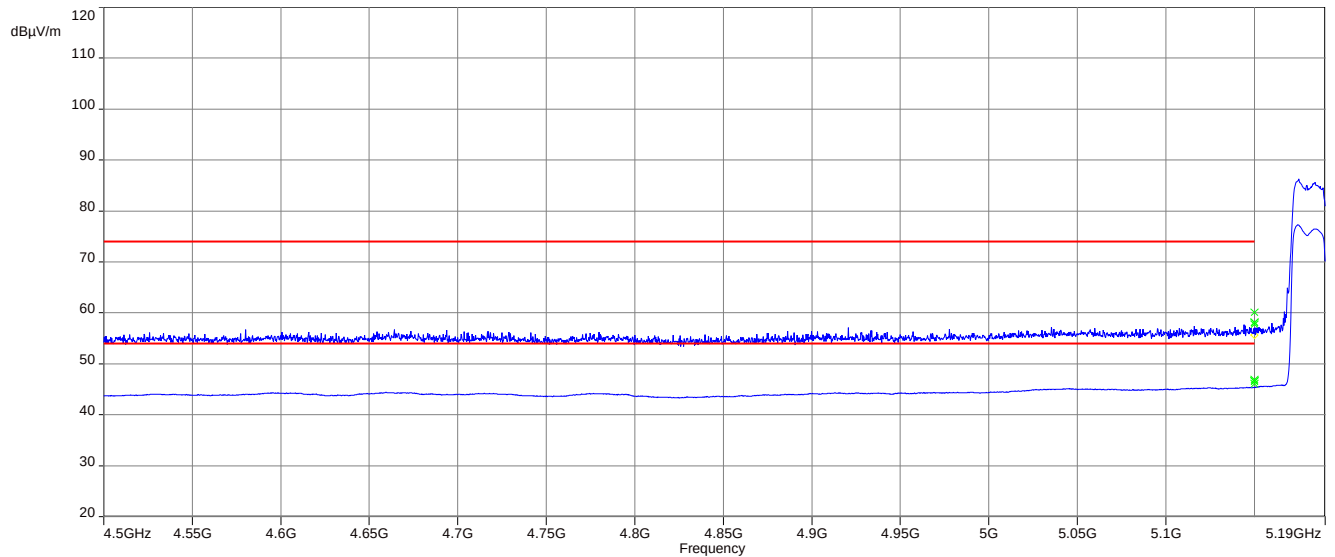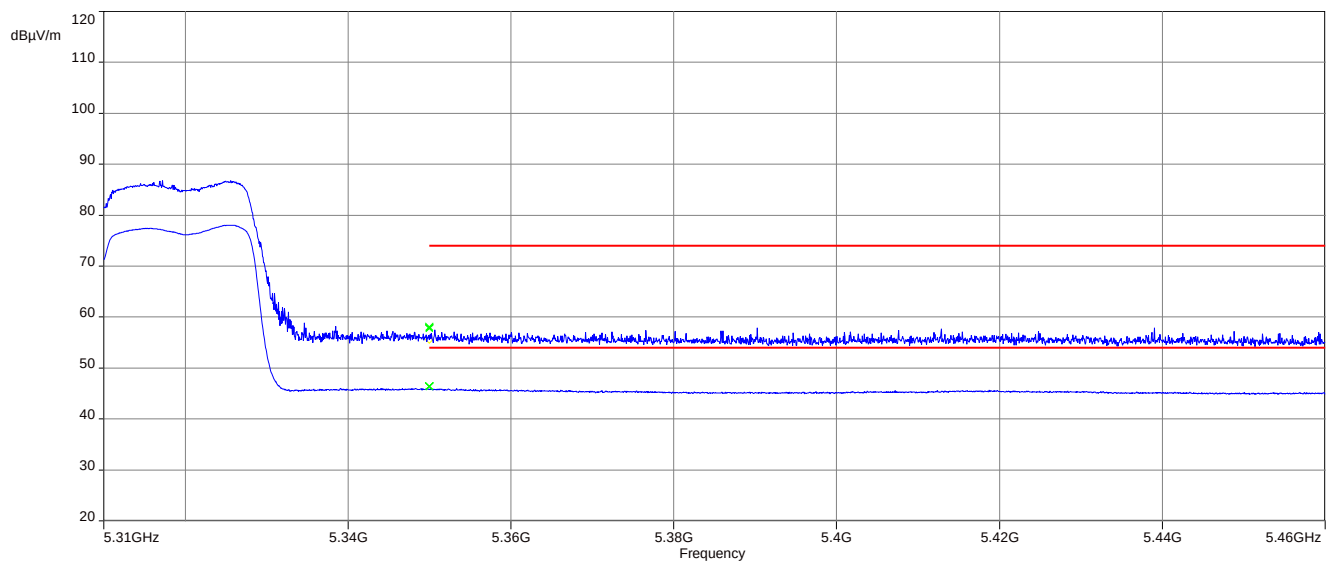**Plot 7:** lower band edge; U-NII-1; lowest channel; nHT40-mode**Plot 8:** upper band edge; U-NII-2A; highest channel; nHT40-mode

**Plot 9:** lower band edge; U-NII-2C; lowest channel; nHT40-mode

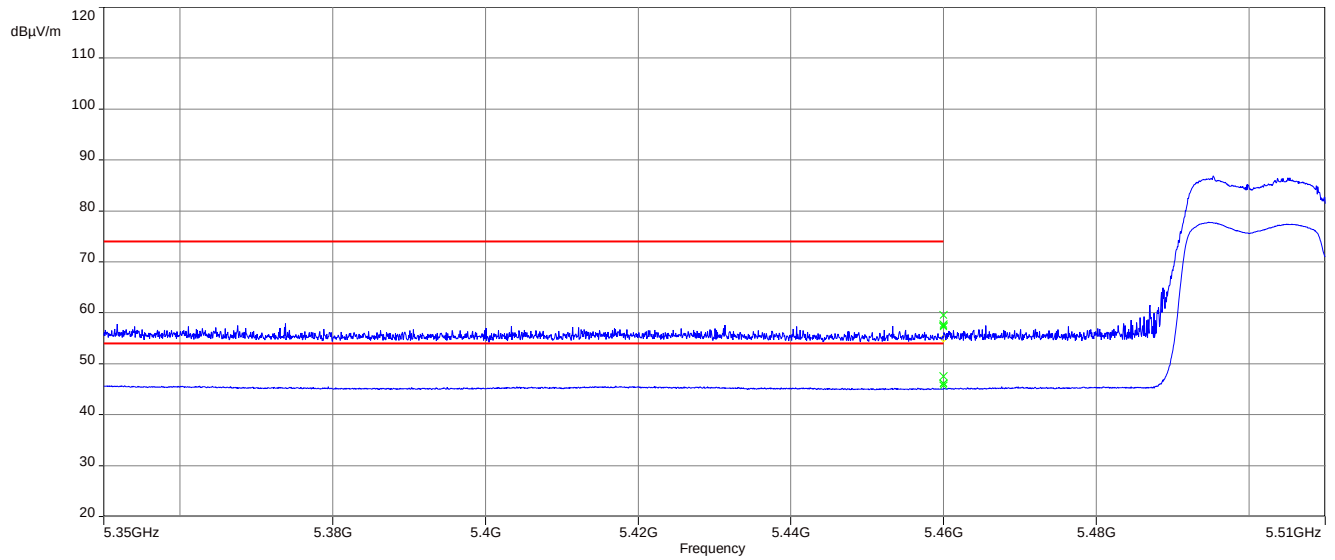

## 12.9 Spurious emissions radiated below 30 MHz

### Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The limits are re-calculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

### Measurement:

| Measurement parameter    |                                            |
|--------------------------|--------------------------------------------|
| Detector:                | Peak / Quasi Peak                          |
| Sweep time:              | Auto                                       |
| Video bandwidth:         | F < 150 kHz: 200 Hz<br>F > 150 kHz: 9 kHz  |
| Resolution bandwidth:    | F < 150 kHz: 1 kHz<br>F > 150 kHz: 100 kHz |
| Span:                    | 9 kHz to 30 MHz                            |
| Trace mode:              | Max Hold                                   |
| Test setup:              | See chapter 8.2 – C                        |
| Measurement uncertainty: | See chapter 9                              |

### Limits:


| Spurious Emissions Radiated < 30 MHz |                               |                      |
|--------------------------------------|-------------------------------|----------------------|
| Frequency (MHz)                      | Field Strength (dB $\mu$ V/m) | Measurement distance |
| 0.009 – 0.490                        | 2400/F(kHz)                   | 300                  |
| 0.490 – 1.705                        | 24000/F(kHz)                  | 30                   |
| 1.705 – 30.0                         | 30                            | 30                   |

### Results:


| Spurious Emissions Radiated < 30 MHz [dB $\mu$ V/m]         |          |                      |
|-------------------------------------------------------------|----------|----------------------|
| F [MHz]                                                     | Detector | Level [dB $\mu$ V/m] |
| All detected emissions are more than 20 dB below the limit. |          |                      |
|                                                             |          |                      |
|                                                             |          |                      |

**Plots:** 20 MHz channel bandwidth


**Plot 1:** 9 kHz to 30 MHz, U-NII-1; lowest channel

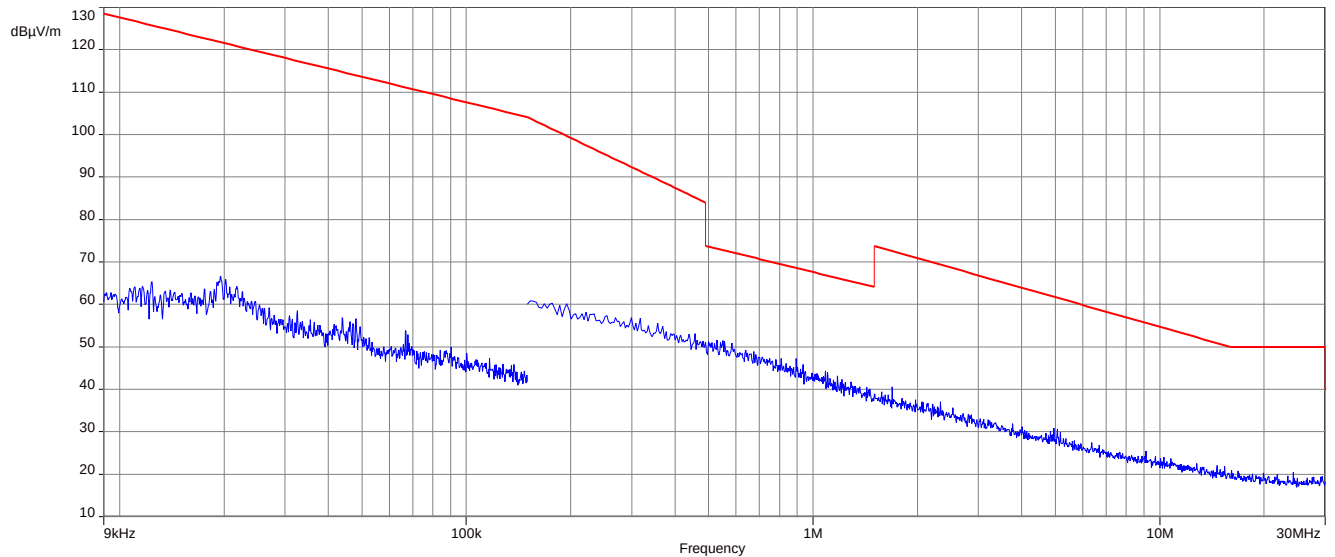


**Plot 2:** 9 kHz to 30 MHz, U-NII-1; middle channel

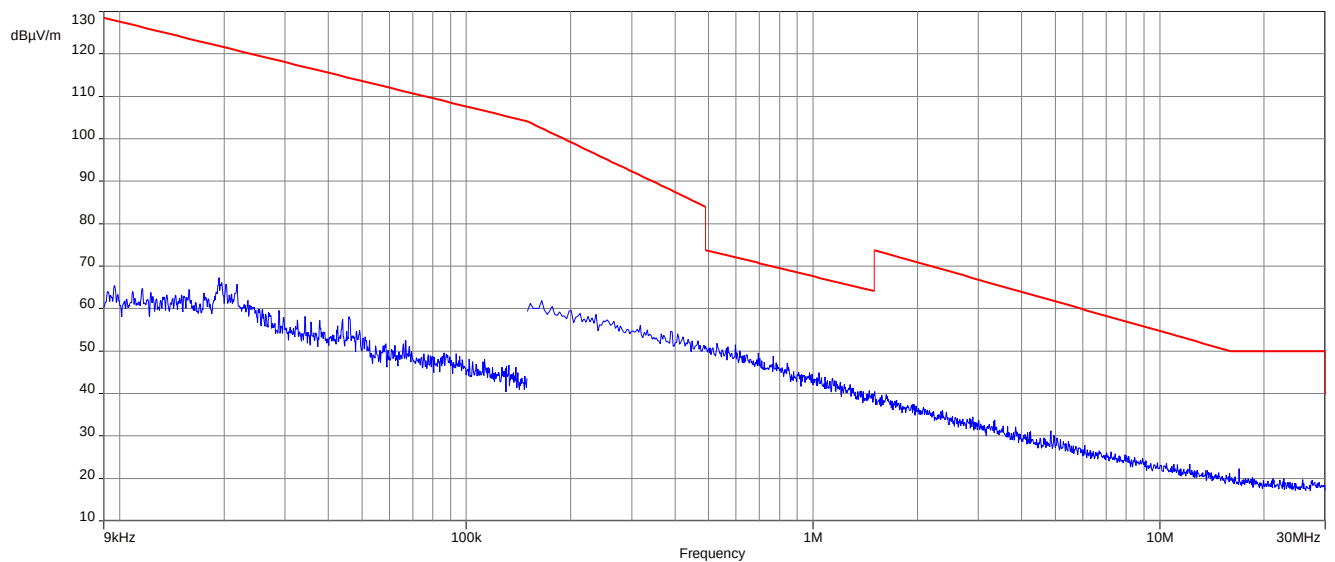


**Plot 3:** 9 kHz to 30 MHz, U-NII-1; highest channel

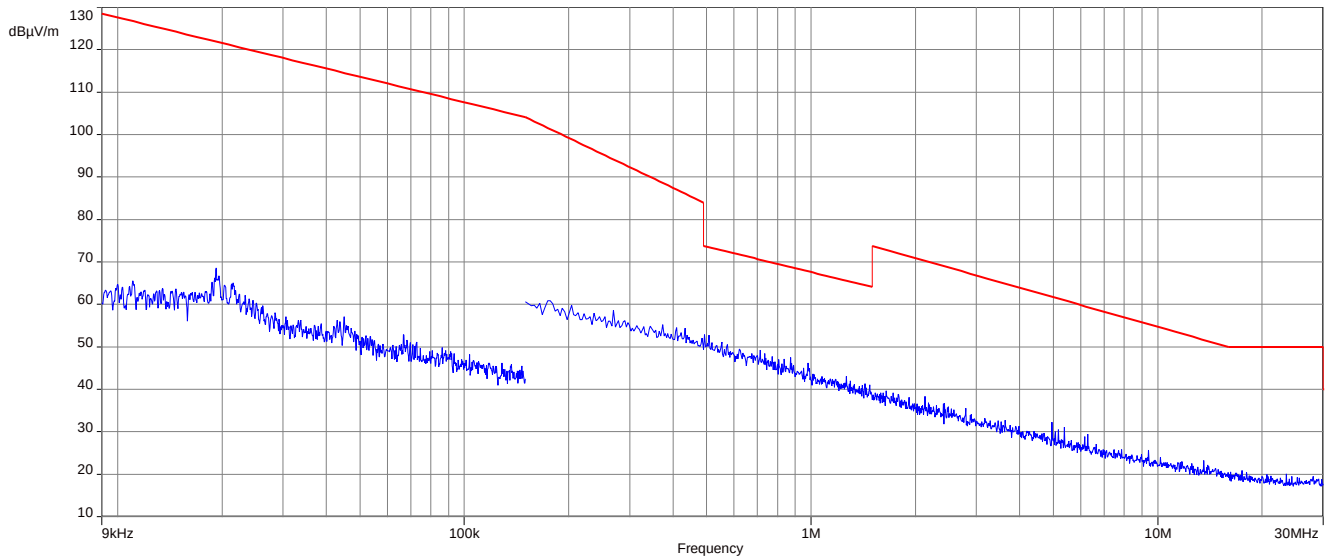


**Plot 4:** 9 kHz to 30 MHz, U-NII-2A; lowest channel

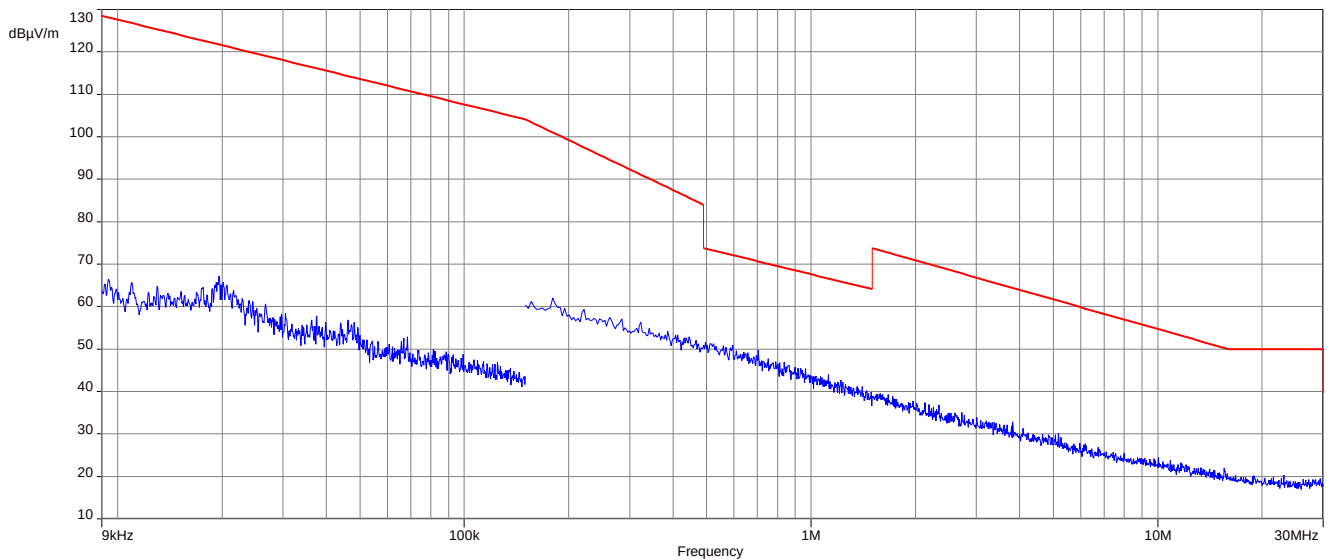


**Plot 5:** 9 kHz to 30 MHz, U-NII-2A; middle channel

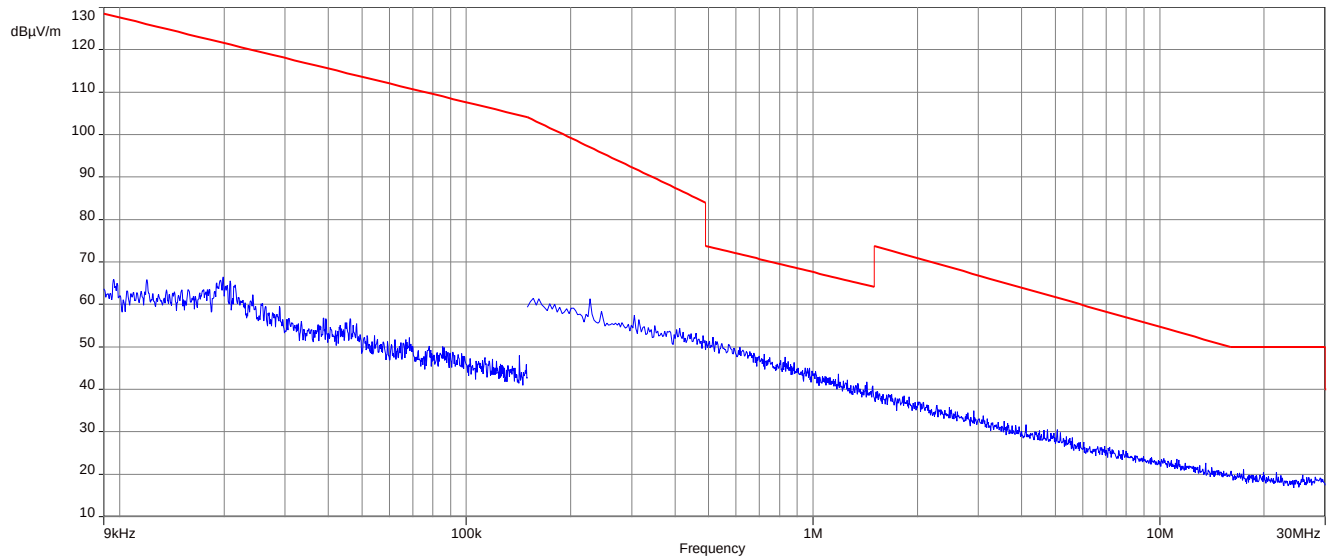


**Plot 6:** 9 kHz to 30 MHz, U-NII-2A; highest channel


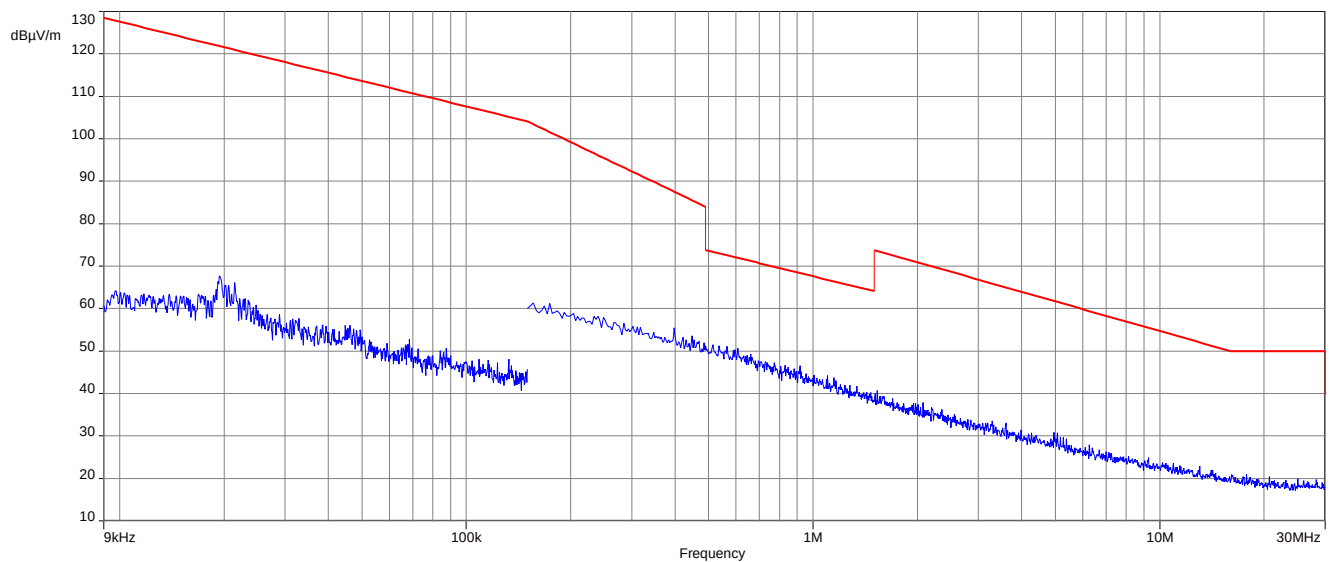


**Plot 7:** 9 kHz to 30 MHz, U-NII-2C; lowest channel

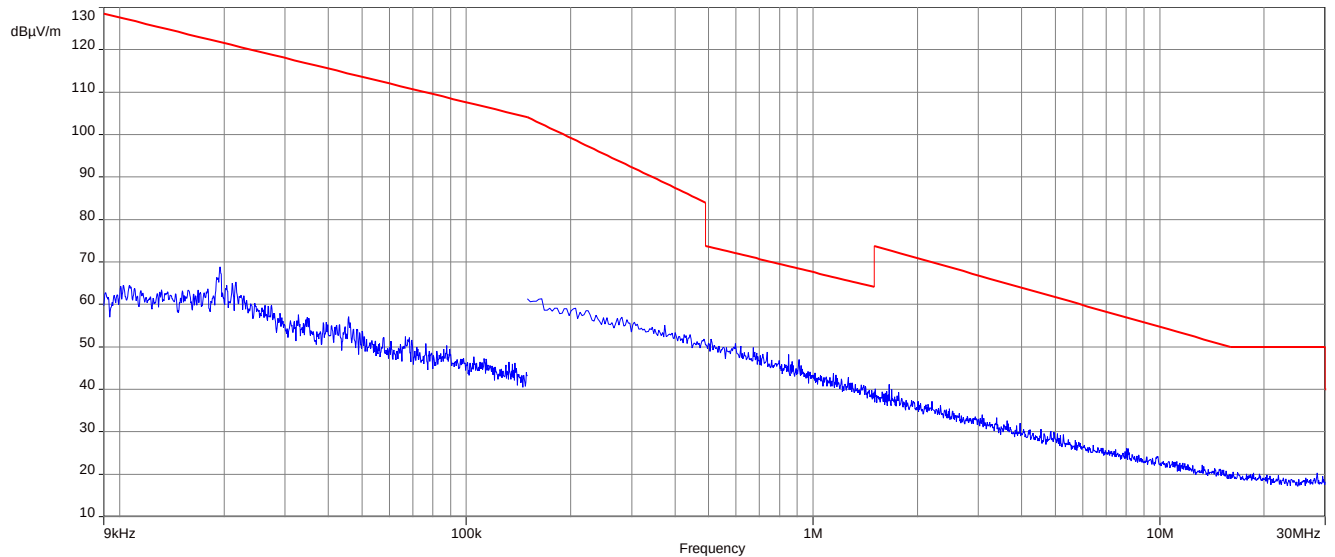


**Plot 8:** 9 kHz to 30 MHz, U-NII-2C; middle channel

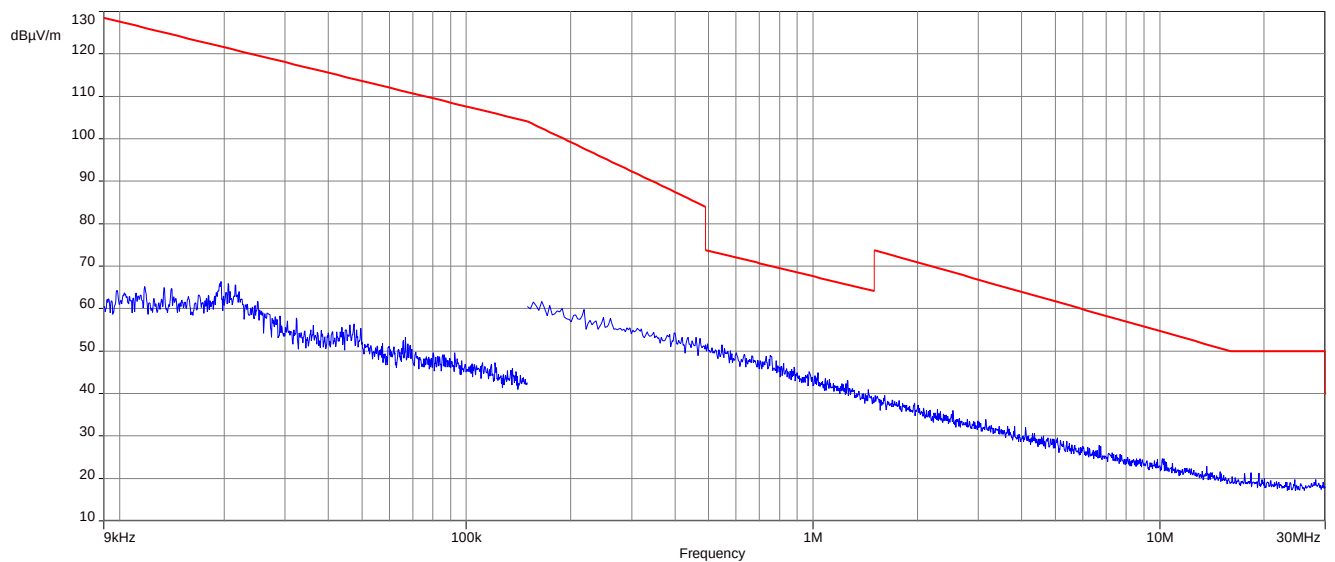


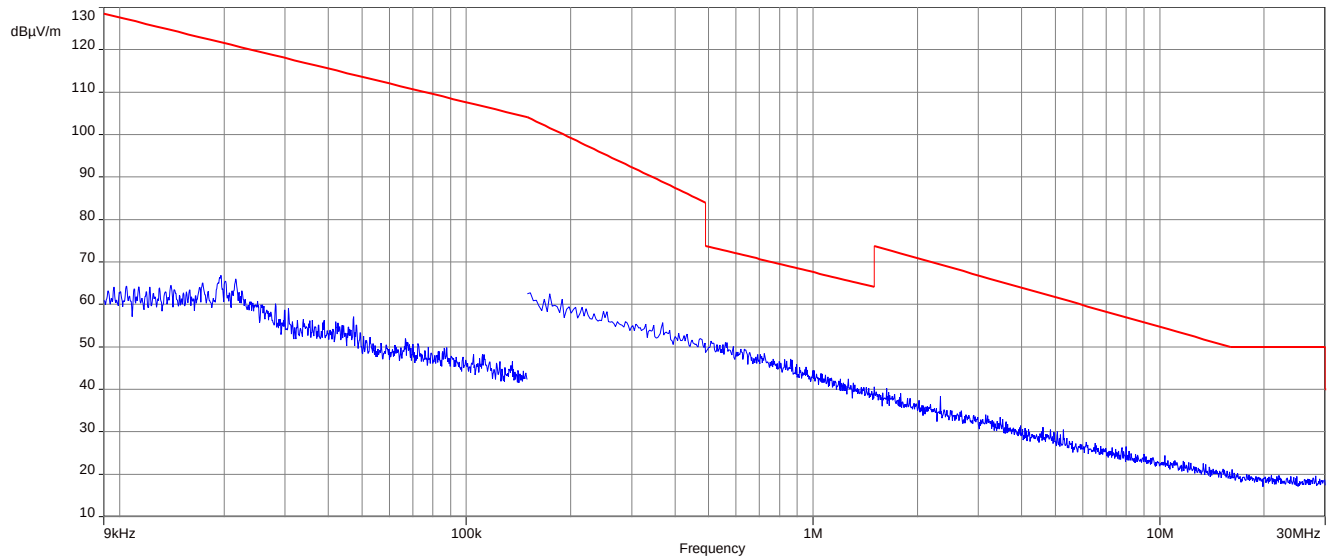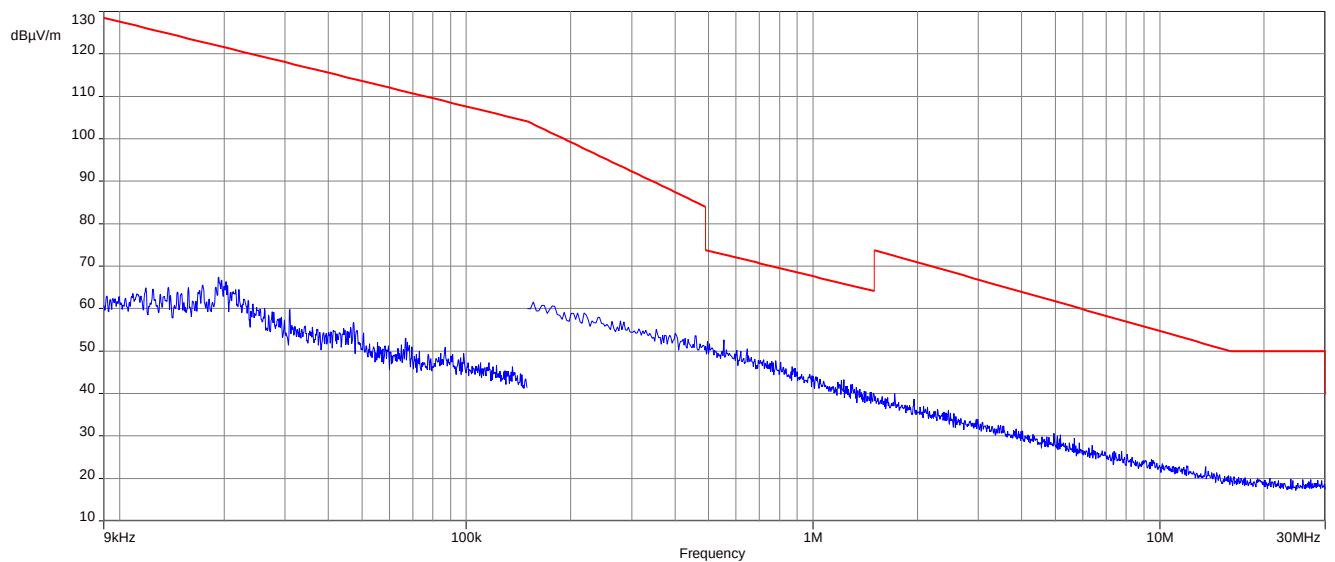**Plot 9:** 9 kHz to 30 MHz, U-NII-2C; highest channel**Plot 10:** 9 kHz to 30 MHz, U-NII-3; lowest channel

**Plot 11:** 9 kHz to 30 MHz, U-NII-3; middle channel

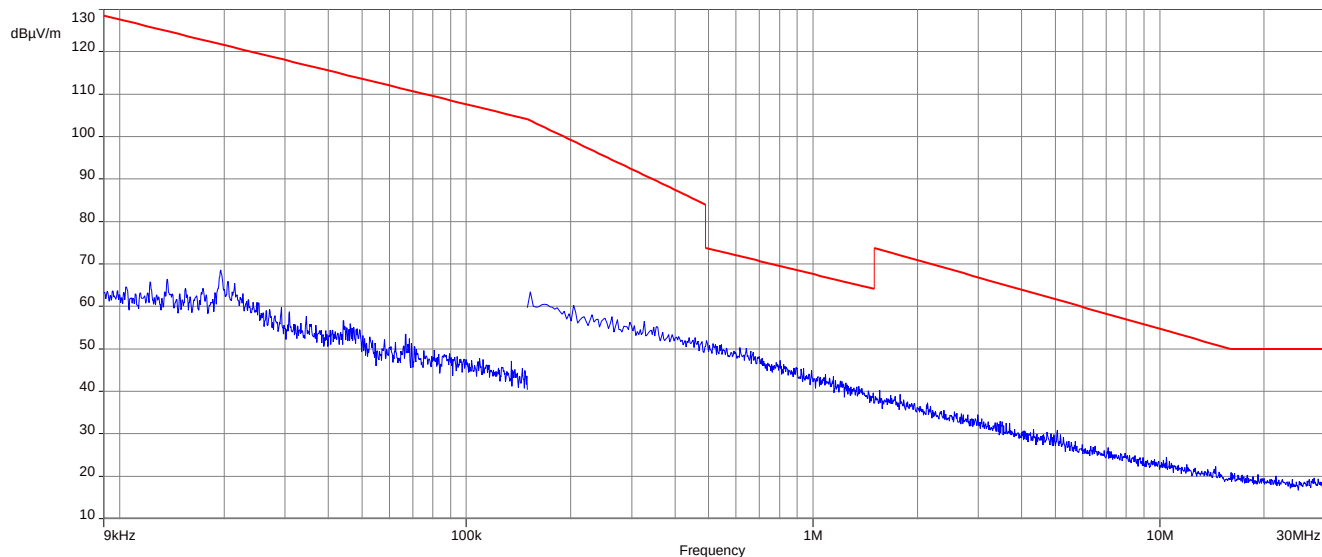


**Plot 12:** 9 kHz to 30 MHz, U-NII-3; highest channel

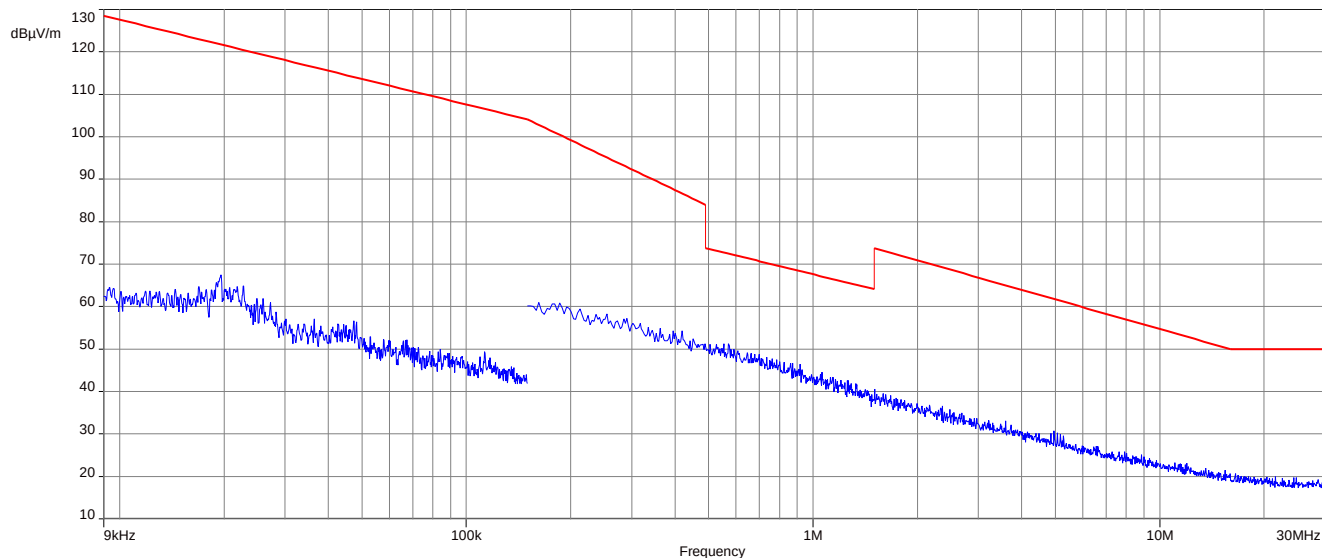


**Plots:** 40 MHz channel bandwidth


**Plot 1:** 9 kHz to 30 MHz, U-NII-1; lowest channel

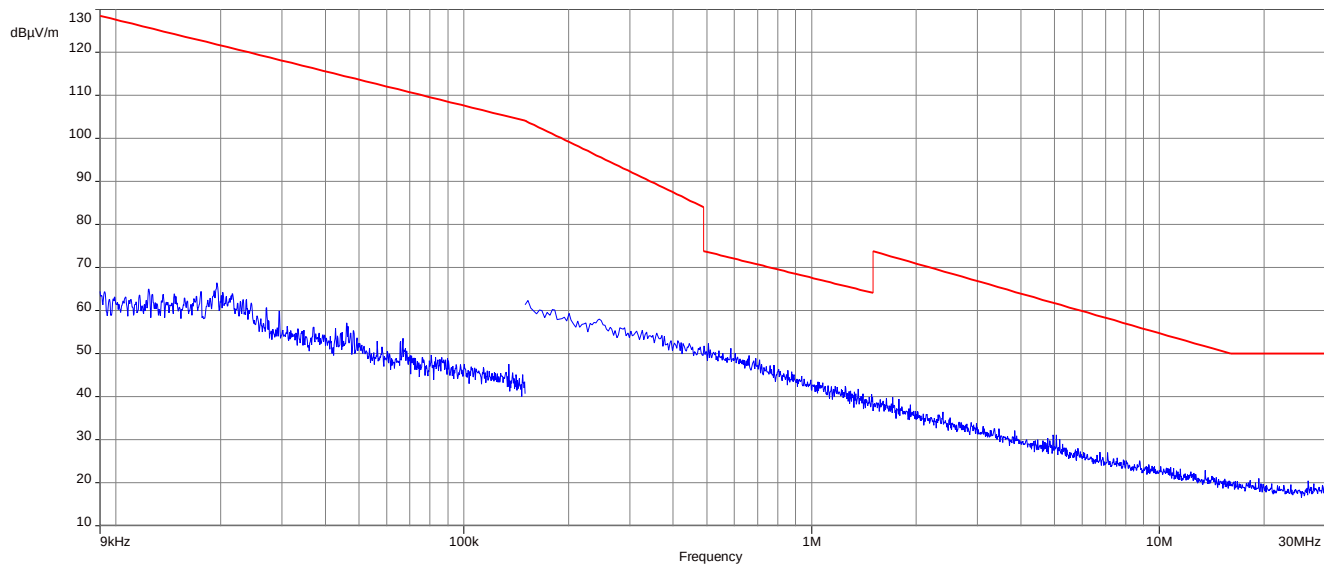


**Plot 2:** 9 kHz to 30 MHz, U-NII-1; highest channel


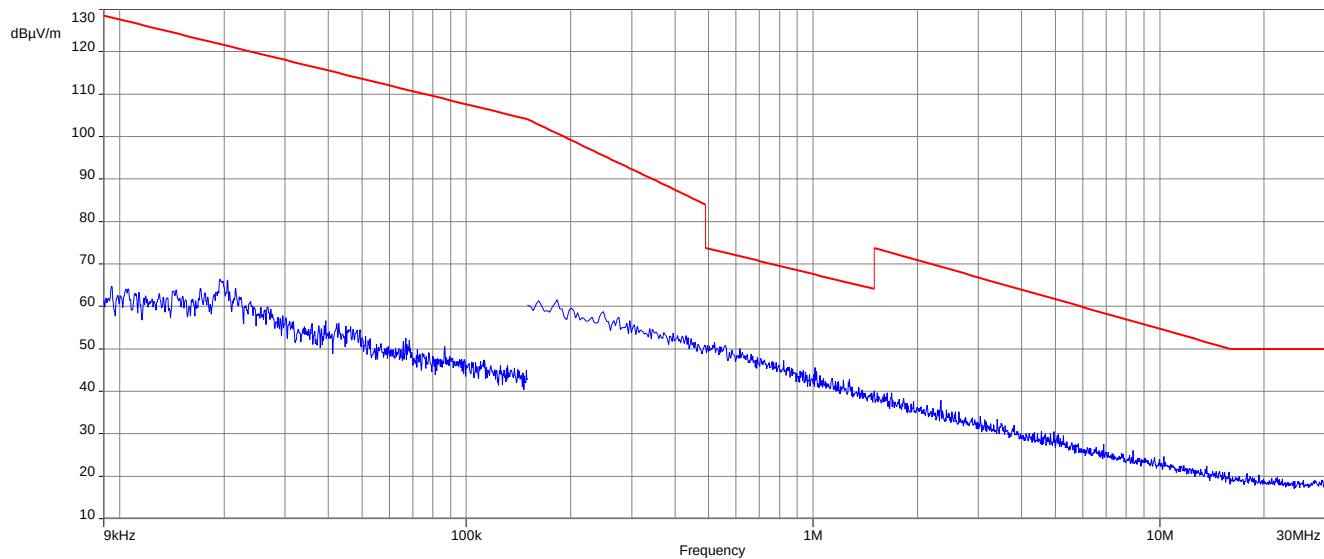


**Plot 3:** 9 kHz to 30 MHz, U-NII-2A; lowest channel

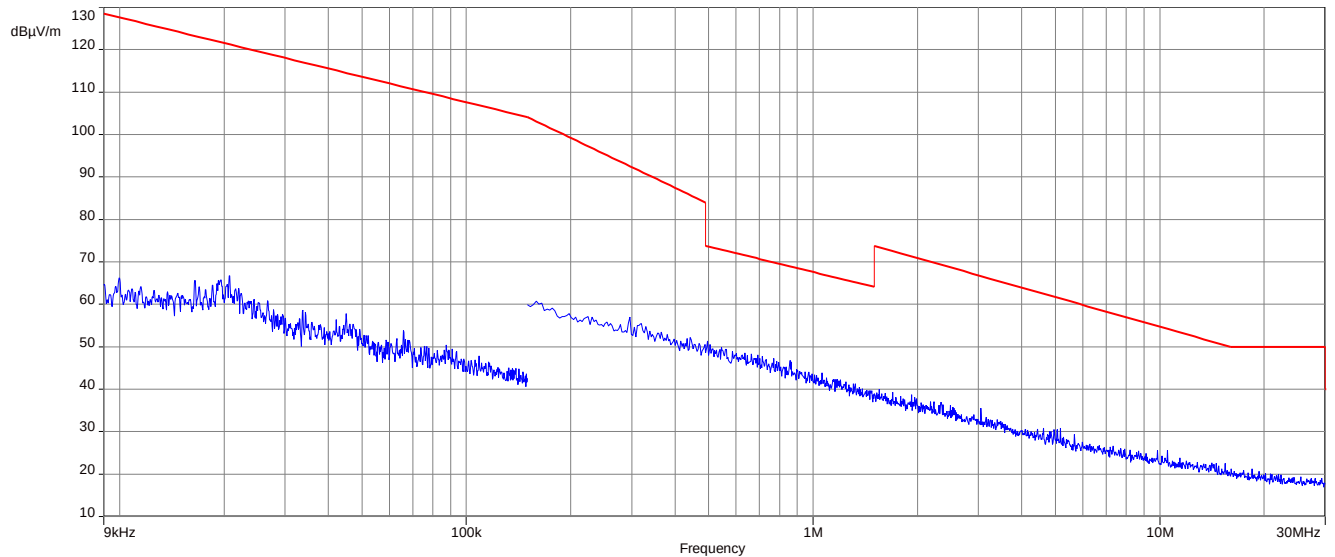


**Plot 4:** 9 kHz to 30 MHz, U-NII-2A; highest channel

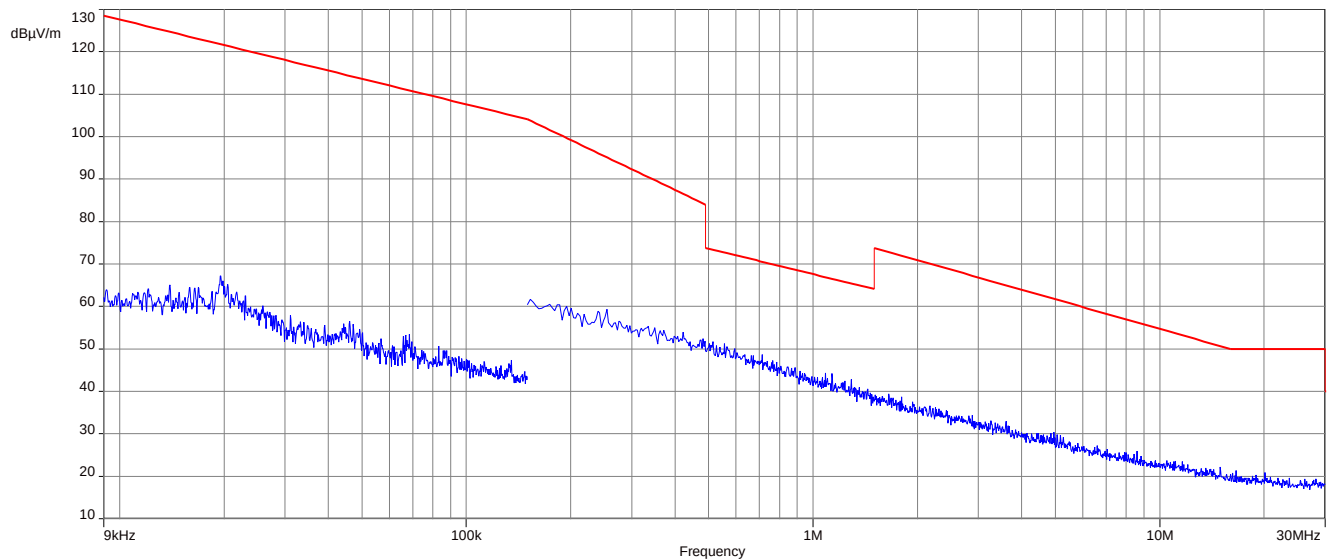


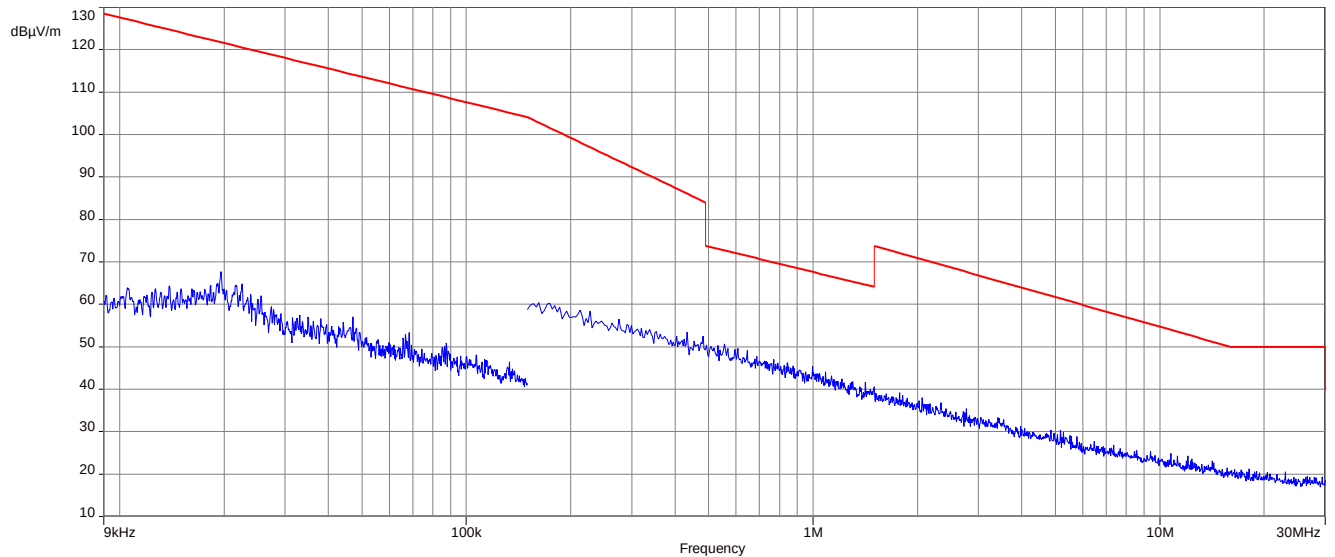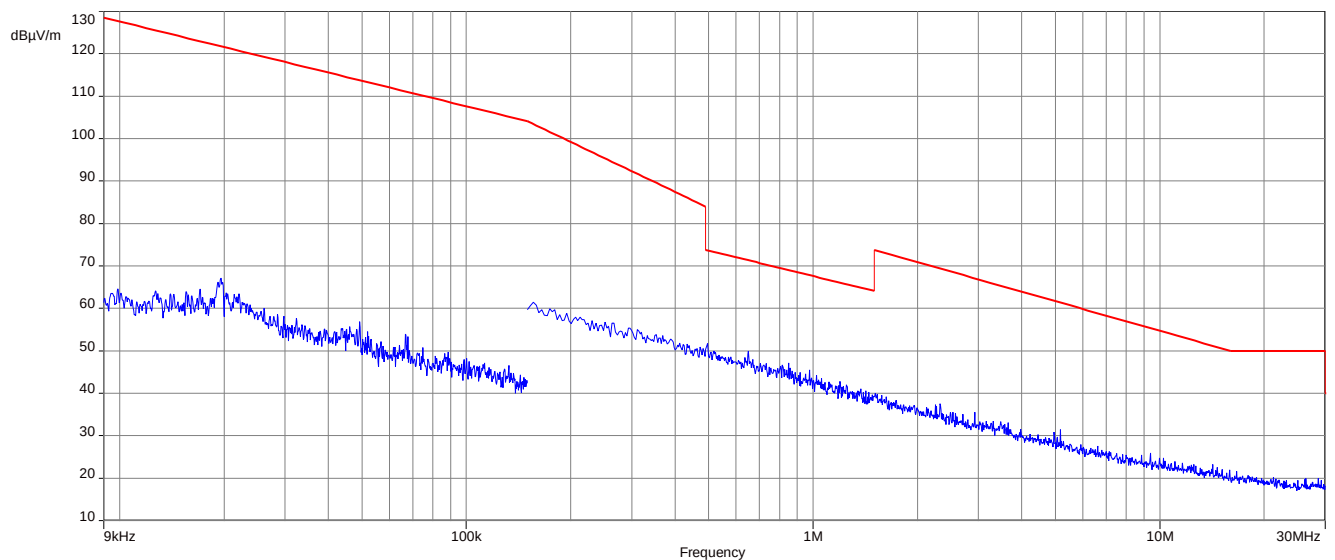**Plot 5:** 9 kHz to 30 MHz, U-NII-2C; lowest channel**Plot 6:** 9 kHz to 30 MHz, U-NII-2C; middle channel


**Plot 7:** 9 kHz to 30 MHz, U-NII-2C; highest channel

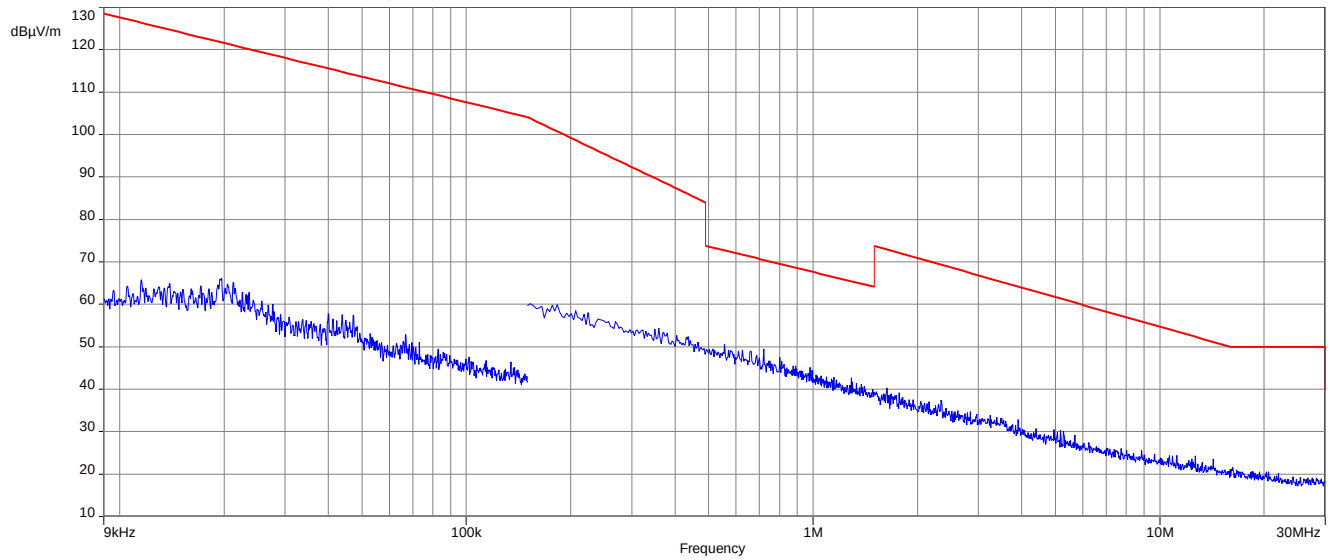

**Plot 8:** 9 kHz to 30 MHz, U-NII-3; lowest channel

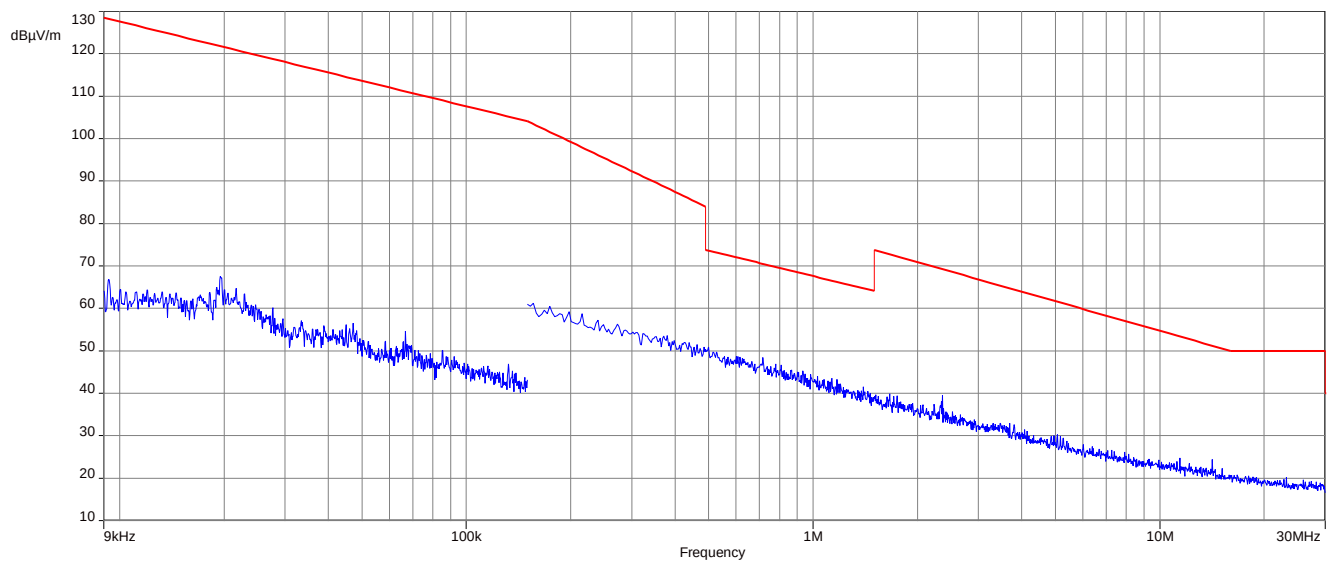

**Plot 9:** 9 kHz to 30 MHz, U-NII-3; highest channel

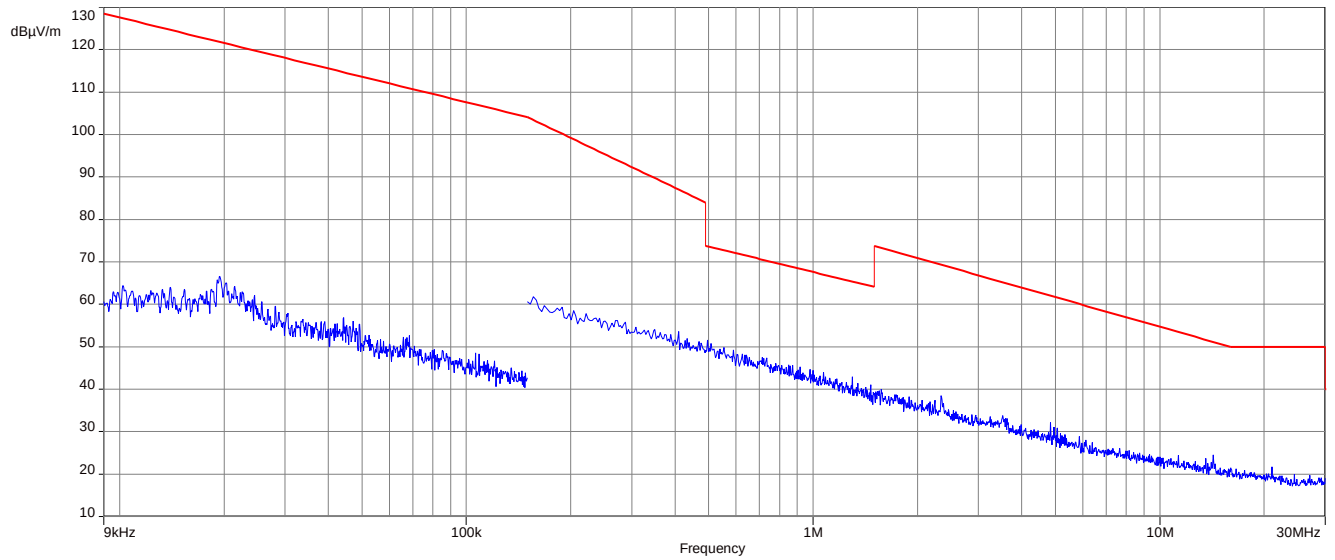

## 12.10 Spurious emissions radiated 30 MHz to 1 GHz

Description:

Measurement of the radiated spurious emissions and cabinet radiations below 1 GHz.

Measurement:


| Measurement parameter    |                     |
|--------------------------|---------------------|
| Detector:                | Quasi Peak          |
| Sweep time:              | Auto                |
| Resolution bandwidth:    | 120 kHz             |
| Video bandwidth:         | 500 kHz             |
| Span:                    | 30 MHz to 1 GHz     |
| Test setup:              | See chapter 8.1 – A |
| Measurement uncertainty: | See chapter 9       |

Limits:

| TX Spurious Emissions Radiated |                         |                      |
|--------------------------------|-------------------------|----------------------|
| §15.209 / RSS-247              |                         |                      |
| Frequency (MHz)                | Field Strength (dBµV/m) | Measurement distance |
| 30 - 88                        | 30.0                    | 10                   |
| 88 – 216                       | 33.5                    | 10                   |
| 216 – 960                      | 36.0                    | 10                   |
| Above 960                      | 54.0                    | 3                    |
| §15.407                        |                         |                      |
| Outside the restricted bands!  | -27 dBm / MHz           |                      |


**Plots:** 20 MHz channel bandwidth

**Plot 1:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-1; valid for all channels and modes

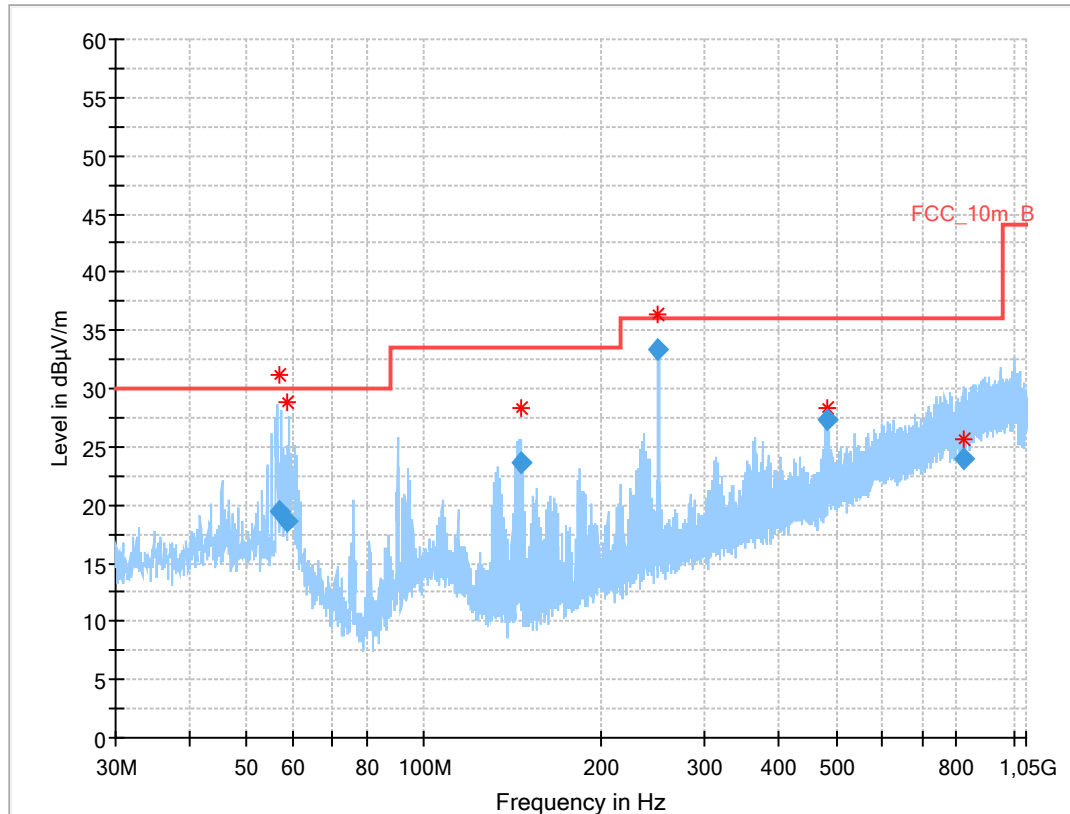


## Results:

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 56.874          | 19.42              | 30.0           | 10.6        | 1000            | 120.0           | 170.0       | V   | 265           | 16         |
| 58.497          | 18.53              | 30.0           | 11.5        | 1000            | 120.0           | 136.0       | V   | 255           | 15         |
| 146.139         | 23.67              | 33.5           | 9.8         | 1000            | 120.0           | 195.0       | V   | 22            | 10         |
| 249.989         | 33.37              | 36.0           | 2.6         | 1000            | 120.0           | 195.0       | H   | 37            | 14         |
| 481.912         | 27.38              | 36.0           | 8.6         | 1000            | 120.0           | 98.0        | V   | 97            | 19         |
| 823.552         | 24.05              | 36.0           | 12.0        | 1000            | 120.0           | 102.0       | V   | -37           | 24         |

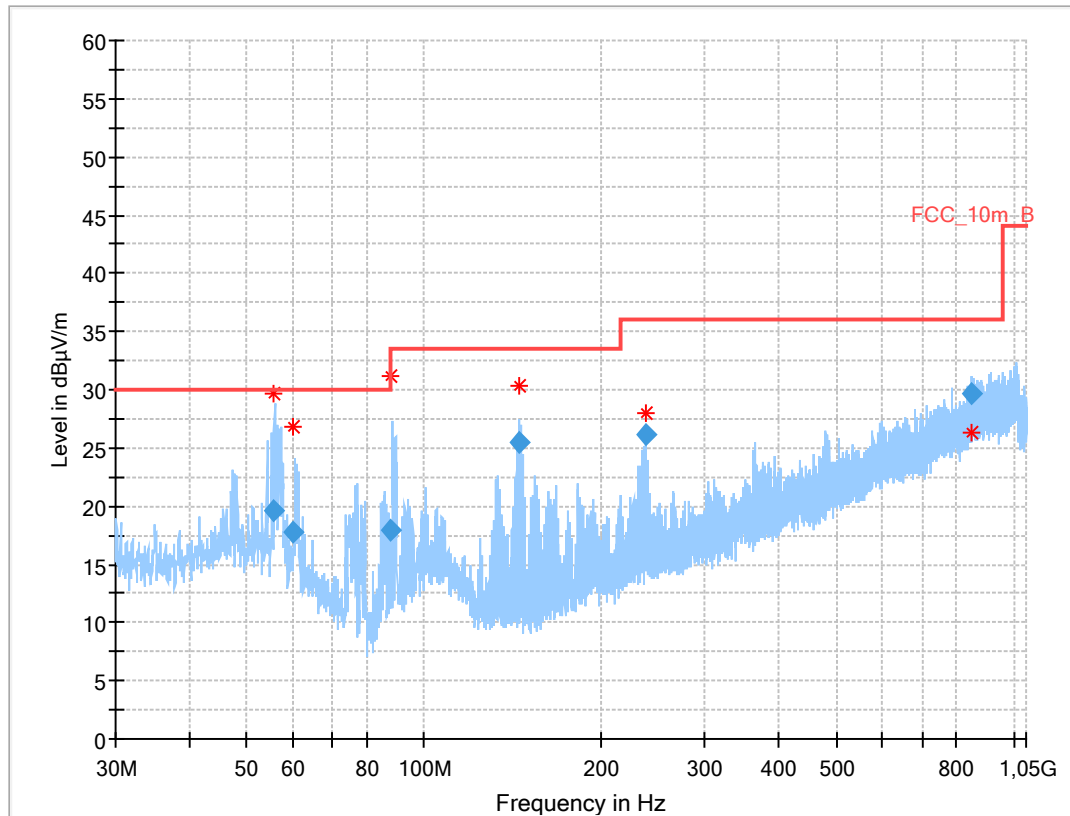**Plot 2:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-2A and 2C; valid for all channels and modes**Results:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 55.739          | 19.64              | 30.0           | 10.4        | 1000            | 120.0           | 130.0       | V   | -24           | 16         |
| 60.105          | 17.76              | 30.0           | 12.2        | 1000            | 120.0           | 162.0       | V   | 30            | 14         |
| 87.983          | 17.96              | 30.0           | 12.0        | 1000            | 120.0           | 195.0       | V   | 168           | 11         |
| 145.138         | 25.43              | 33.5           | 8.1         | 1000            | 120.0           | 147.0       | V   | 21            | 10         |
| 238.048         | 26.08              | 36.0           | 9.9         | 1000            | 120.0           | 121.0       | V   | 105           | 14         |
| 845.886         | 29.61              | 36.0           | 6.4         | 1000            | 120.0           | 110.0       | V   | -37           | 25         |

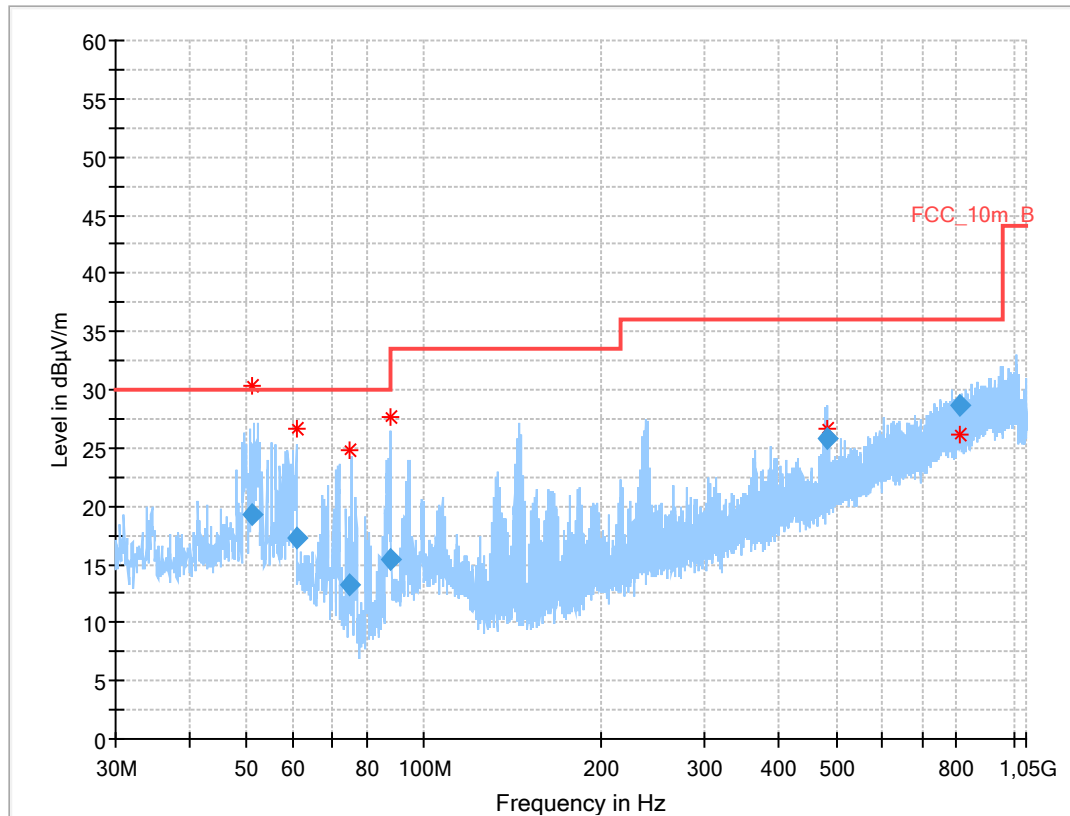**Plot 3:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-3; valid for all channels and modes**Results:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 51.050          | 19.21              | 30.0           | 10.8        | 1000            | 120.0           | 108.0       | V   | -2            | 15         |
| 60.745          | 17.27              | 30.0           | 12.7        | 1000            | 120.0           | 195.0       | V   | 297           | 14         |
| 74.662          | 13.21              | 30.0           | 16.8        | 1000            | 120.0           | 195.0       | V   | 279           | 9          |
| 87.896          | 15.35              | 30.0           | 14.7        | 1000            | 120.0           | 152.0       | V   | 52            | 11         |
| 481.917         | 25.86              | 36.0           | 10.1        | 1000            | 120.0           | 101.0       | V   | 52            | 19         |
| 809.575         | 28.72              | 36.0           | 7.3         | 1000            | 120.0           | 174.0       | V   | 52            | 24         |

## 12.11 Spurious emissions radiated 1 GHz to 40 GHz

Description:

Measurement of the radiated spurious emissions and cabinet radiations from 1 GHz to 40 GHz.

Measurement:

| Measurement parameter    |                                                  |
|--------------------------|--------------------------------------------------|
| Detector:                | Peak above 1 GHz / RMS                           |
| Sweep time:              | Auto                                             |
| Resolution bandwidth:    | 1 MHz                                            |
| Video bandwidth:         | 3 MHz                                            |
| Span:                    | 1 GHz to 40 GHz                                  |
| Test setup:              | See sub clause 8.2 – B<br>See sub clause 8.3 – A |
| Measurement uncertainty: | See chapter 9                                    |

Limits:

| TX Spurious Emissions Radiated |                               |                      |
|--------------------------------|-------------------------------|----------------------|
| §15.209 / RSS-247              |                               |                      |
| Frequency (MHz)                | Field Strength (dB $\mu$ V/m) | Measurement distance |
| Above 960                      | 54.0                          | 3                    |
| §15.407                        |                               |                      |
| Outside the restricted bands!  | -27 dBm / MHz                 |                      |

**Results:** 20 MHz channel bandwidth

| TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm |          |                      |                |          |                      |                 |          |                      |
|-----------------------------------------------------|----------|----------------------|----------------|----------|----------------------|-----------------|----------|----------------------|
| U-NII-1 (5150 MHz to 5250 MHz)                      |          |                      |                |          |                      |                 |          |                      |
| Lowest channel                                      |          |                      | Middle channel |          |                      | Highest channel |          |                      |
| F [MHz]                                             | Detector | Level [dB $\mu$ V/m] | F [MHz]        | Detector | Level [dB $\mu$ V/m] | F [MHz]         | Detector | Level [dB $\mu$ V/m] |
| 15545                                               | Peak     | 55.4                 | 15600          | Peak     | 55.1                 | 15720           | Peak     | 55.4                 |
|                                                     | AVG      | 46.5                 |                | AVG      | 46.6                 |                 | AVG      | 46.1                 |

| TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm |          |                      |                |          |                      |                 |          |                      |
|-----------------------------------------------------|----------|----------------------|----------------|----------|----------------------|-----------------|----------|----------------------|
| U-NII-2A (5250 MHz to 5350 MHz)                     |          |                      |                |          |                      |                 |          |                      |
| Lowest channel                                      |          |                      | Middle channel |          |                      | Highest channel |          |                      |
| F [MHz]                                             | Detector | Level [dB $\mu$ V/m] | F [MHz]        | Detector | Level [dB $\mu$ V/m] | F [MHz]         | Detector | Level [dB $\mu$ V/m] |
| 15780                                               | Peak     | 58.7                 | 15836          | Peak     | 59.3                 | 15960           | Peak     | 61.5                 |
|                                                     | AVG      | 49.9                 |                | AVG      | 51.6                 |                 | AVG      | 52.6                 |

| TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm |          |                      |                |          |                      |                 |          |                      |
|-----------------------------------------------------|----------|----------------------|----------------|----------|----------------------|-----------------|----------|----------------------|
| U-NII-2C (5470 MHz to 5725 MHz)                     |          |                      |                |          |                      |                 |          |                      |
| Lowest channel                                      |          |                      | Middle channel |          |                      | Highest channel |          |                      |
| F [MHz]                                             | Detector | Level [dB $\mu$ V/m] | F [MHz]        | Detector | Level [dB $\mu$ V/m] | F [MHz]         | Detector | Level [dB $\mu$ V/m] |
| 11000                                               | Peak     | 51.3                 | -/-            | Peak     | -/-                  | -/-             | Peak     | -/-                  |
|                                                     | AVG      | 42.0                 |                | AVG      | -/-                  |                 | AVG      | -/-                  |

| TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm      |          |                      |                |          |                      |                 |          |                      |
|----------------------------------------------------------|----------|----------------------|----------------|----------|----------------------|-----------------|----------|----------------------|
| U-NII-3 (5725 MHz to 5850 MHz)                           |          |                      |                |          |                      |                 |          |                      |
| Lowest channel                                           |          |                      | Middle channel |          |                      | Highest channel |          |                      |
| F [MHz]                                                  | Detector | Level [dB $\mu$ V/m] | F [MHz]        | Detector | Level [dB $\mu$ V/m] | F [MHz]         | Detector | Level [dB $\mu$ V/m] |
| All detected peak emissions are below the average limit. |          |                      |                |          |                      |                 |          |                      |
| -/-                                                      | Peak     | -/-                  | -/-            | Peak     | -/-                  | -/-             | Peak     | -/-                  |
|                                                          | AVG      | -/-                  | -/-            | AVG      | -/-                  |                 | AVG      | -/-                  |

**Results:** 40 MHz channel bandwidth

| TX Spurious Emissions Radiated [dBμV/m] / dBm            |          |                |                |          |                |                 |          |                |
|----------------------------------------------------------|----------|----------------|----------------|----------|----------------|-----------------|----------|----------------|
| U-NII-1 (5150 MHz to 5250 MHz)                           |          |                |                |          |                |                 |          |                |
| Lowest channel                                           |          |                | Middle channel |          |                | Highest channel |          |                |
| F [MHz]                                                  | Detector | Level [dBμV/m] | F [MHz]        | Detector | Level [dBμV/m] | F [MHz]         | Detector | Level [dBμV/m] |
| All detected peak emissions are below the average limit. |          |                |                |          |                |                 |          |                |
| -/-                                                      | Peak     | -/-            | -/-            | Peak     | -/-            | -/-             | Peak     | -/-            |
|                                                          | AVG      | -/-            |                | AVG      | -/-            |                 | AVG      | -/-            |


| TX Spurious Emissions Radiated [dBμV/m] / dBm |          |                |                |          |                |                 |          |                |
|-----------------------------------------------|----------|----------------|----------------|----------|----------------|-----------------|----------|----------------|
| U-NII-2A (5250 MHz to 5350 MHz)               |          |                |                |          |                |                 |          |                |
| Lowest channel                                |          |                | Middle channel |          |                | Highest channel |          |                |
| F [MHz]                                       | Detector | Level [dBμV/m] | F [MHz]        | Detector | Level [dBμV/m] | F [MHz]         | Detector | Level [dBμV/m] |
| -/-                                           | Peak     | -/-            | -/-            | Peak     | -/-            | 15802           | Peak     | 55.3           |
|                                               | AVG      | -/-            |                | AVG      | -/-            |                 | AVG      | 46.8           |

| TX Spurious Emissions Radiated [dBμV/m] / dBm            |          |                |                |          |                |                 |          |                |
|----------------------------------------------------------|----------|----------------|----------------|----------|----------------|-----------------|----------|----------------|
| U-NII-2C (5470 MHz to 5725 MHz)                          |          |                |                |          |                |                 |          |                |
| Lowest channel                                           |          |                | Middle channel |          |                | Highest channel |          |                |
| F [MHz]                                                  | Detector | Level [dBμV/m] | F [MHz]        | Detector | Level [dBμV/m] | F [MHz]         | Detector | Level [dBμV/m] |
| All detected peak emissions are below the average limit. |          |                |                |          |                |                 |          |                |
| -/-                                                      | Peak     | -/-            | -/-            | Peak     | -/-            | -/-             | Peak     | -/-            |
|                                                          | AVG      | -/-            |                | AVG      | -/-            |                 | AVG      | -/-            |


| TX Spurious Emissions Radiated [dBμV/m] / dBm            |          |                |                |          |                |                 |          |                |
|----------------------------------------------------------|----------|----------------|----------------|----------|----------------|-----------------|----------|----------------|
| U-NII-3 (5725 MHz to 5850 MHz)                           |          |                |                |          |                |                 |          |                |
| Lowest channel                                           |          |                | Middle channel |          |                | Highest channel |          |                |
| F [MHz]                                                  | Detector | Level [dBμV/m] | F [MHz]        | Detector | Level [dBμV/m] | F [MHz]         | Detector | Level [dBμV/m] |
| All detected peak emissions are below the average limit. |          |                |                |          |                |                 |          |                |
| -/-                                                      | Peak     | -/-            | -/-            | Peak     | -/-            | -/-             | Peak     | -/-            |
|                                                          | AVG      | -/-            |                | AVG      | -/-            |                 | AVG      | -/-            |



**Plots:** 20 MHz channel bandwidth



**Plot 1:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; lowest channel

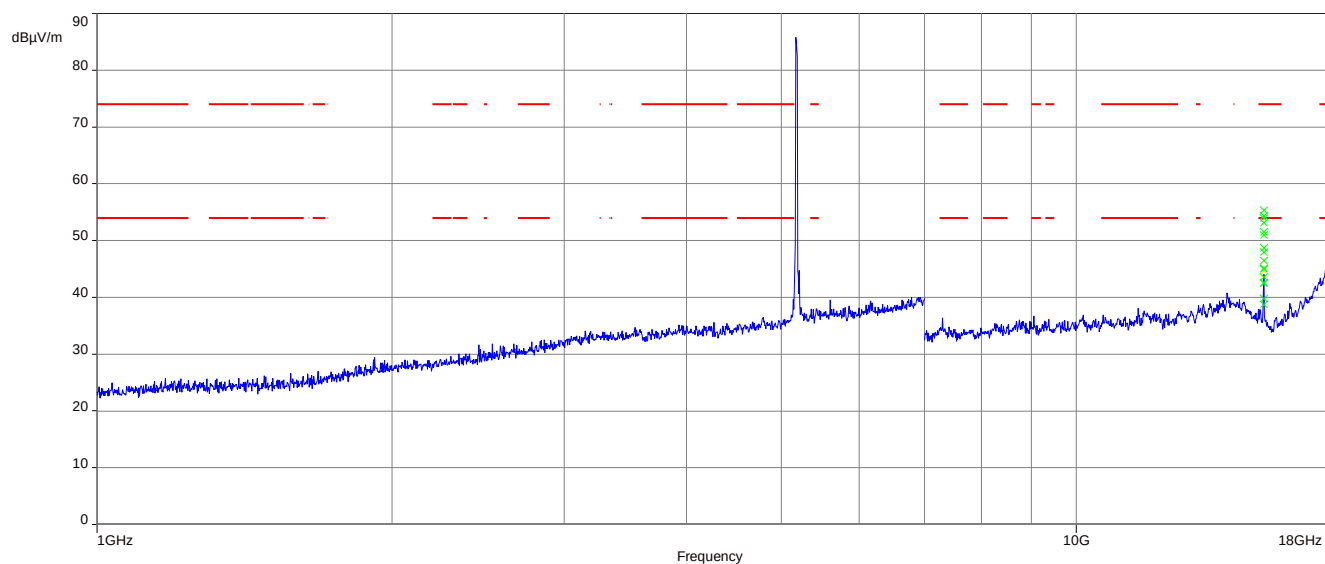


**Plot 2:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; middle channel

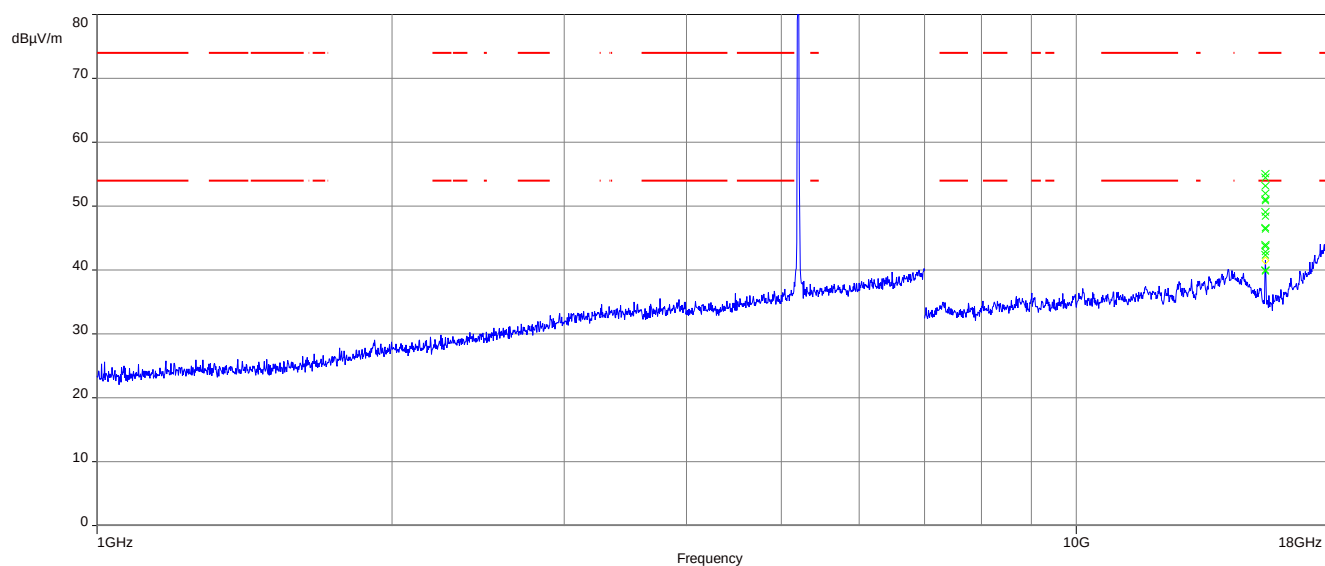

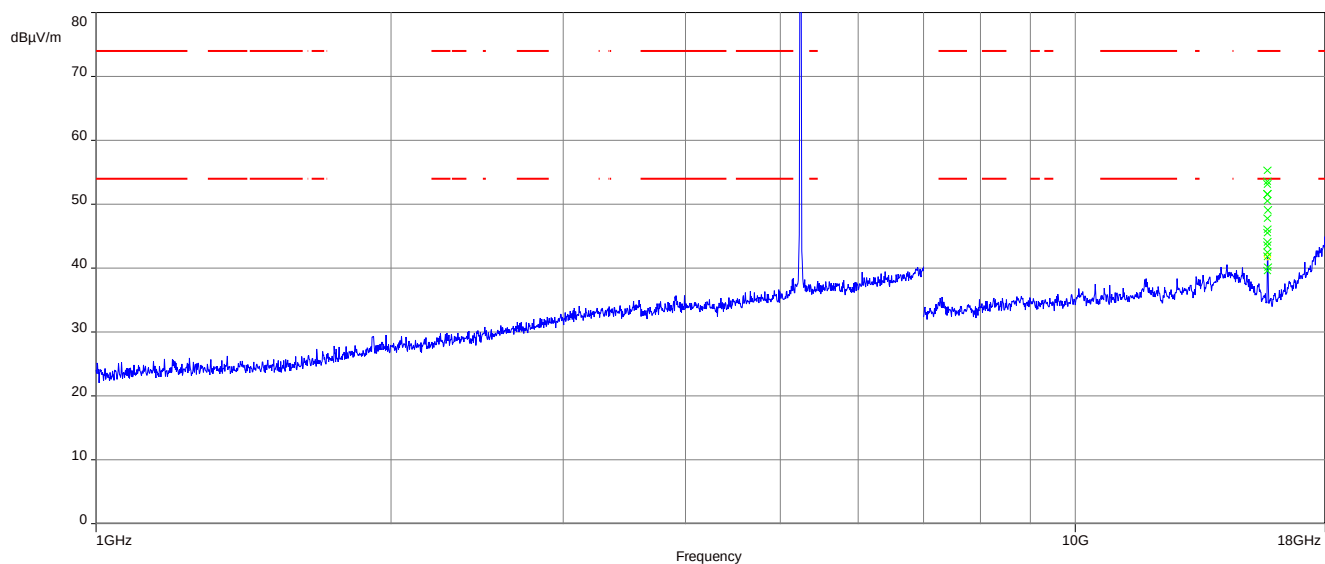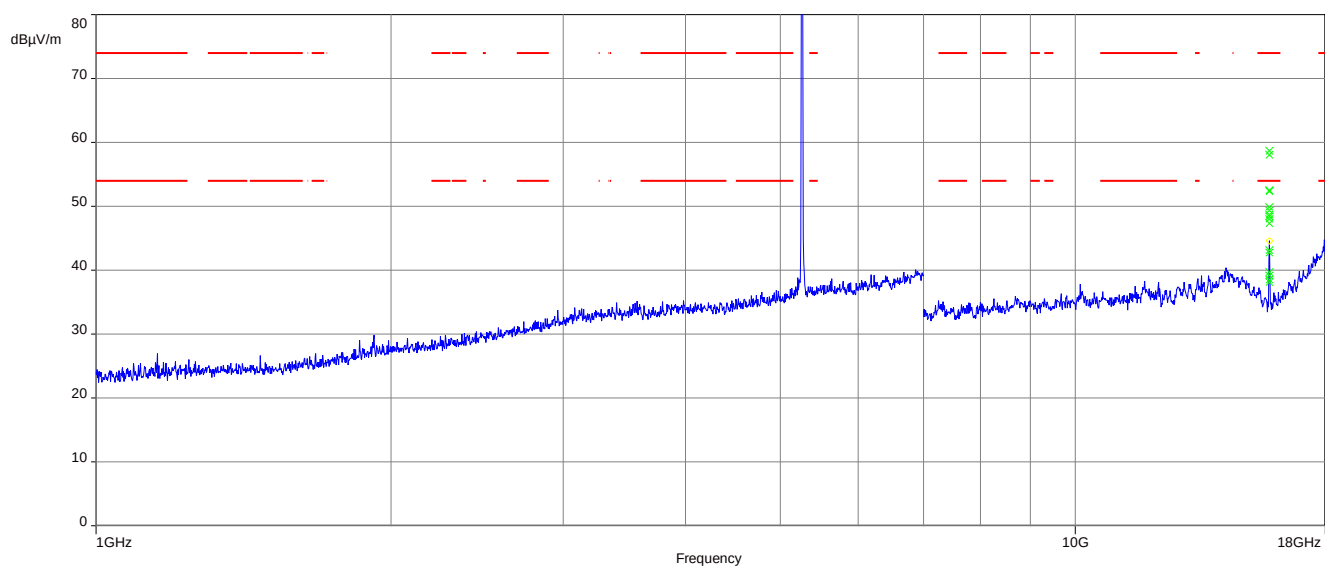
**Plot 3:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; highest channel**Plot 4:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; lowest channel

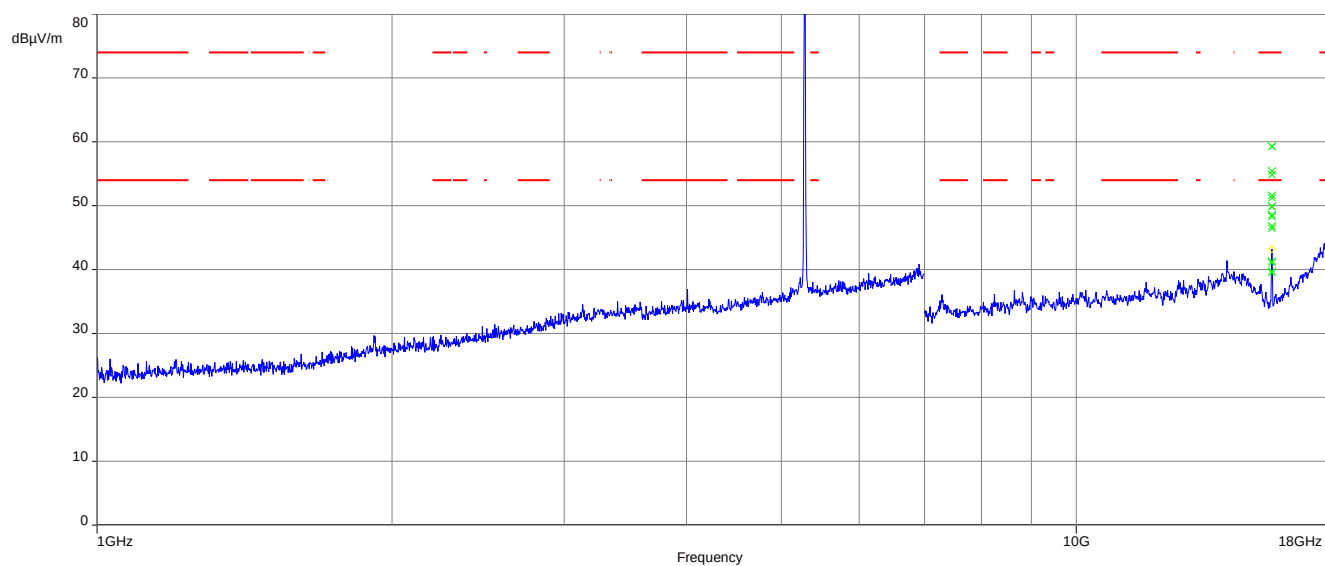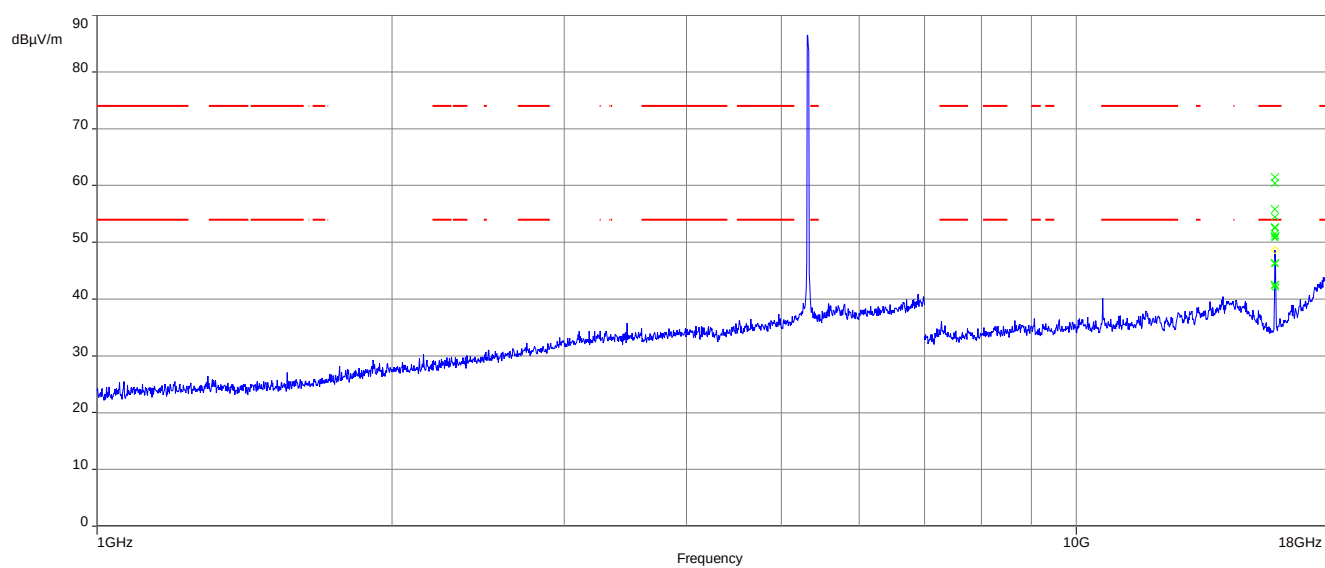**Plot 5:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; middle channel**Plot 6:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; highest channel


**Plot 7:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; lowest channel

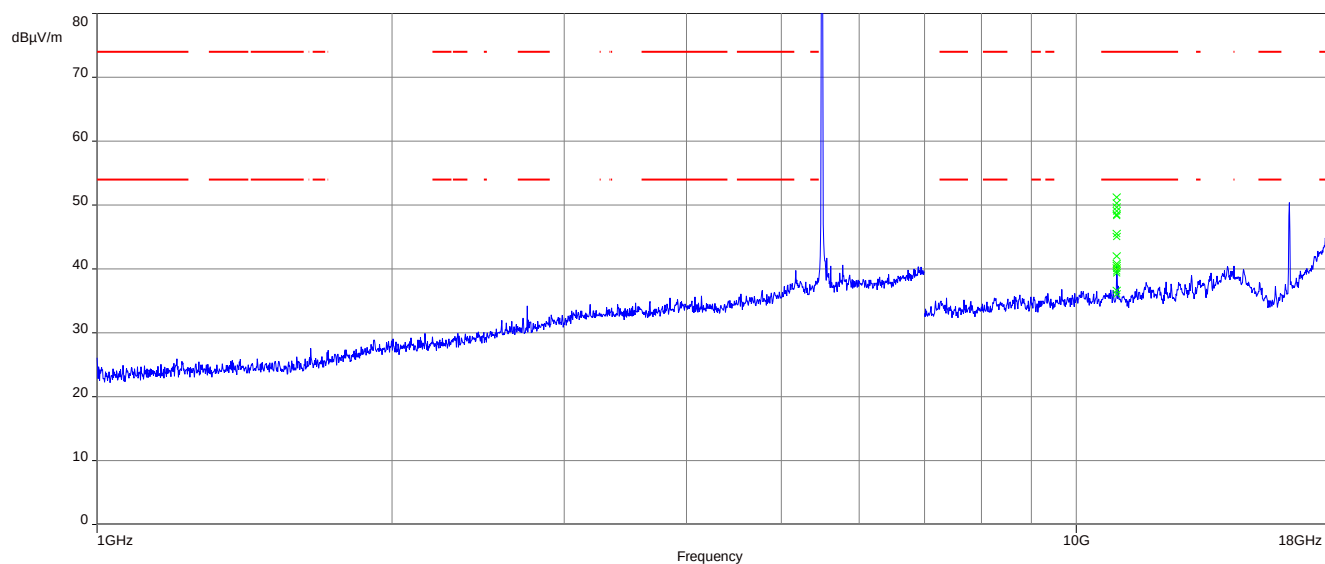


**Plot 8:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; middle channel


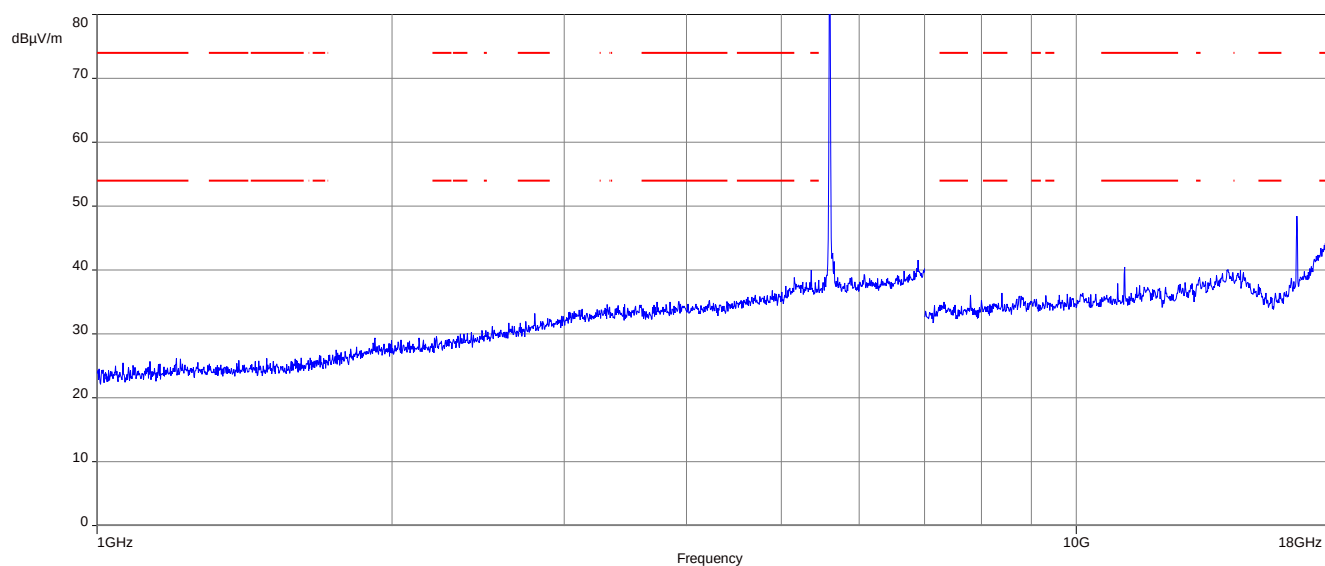


**Plot 9:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; highest channel

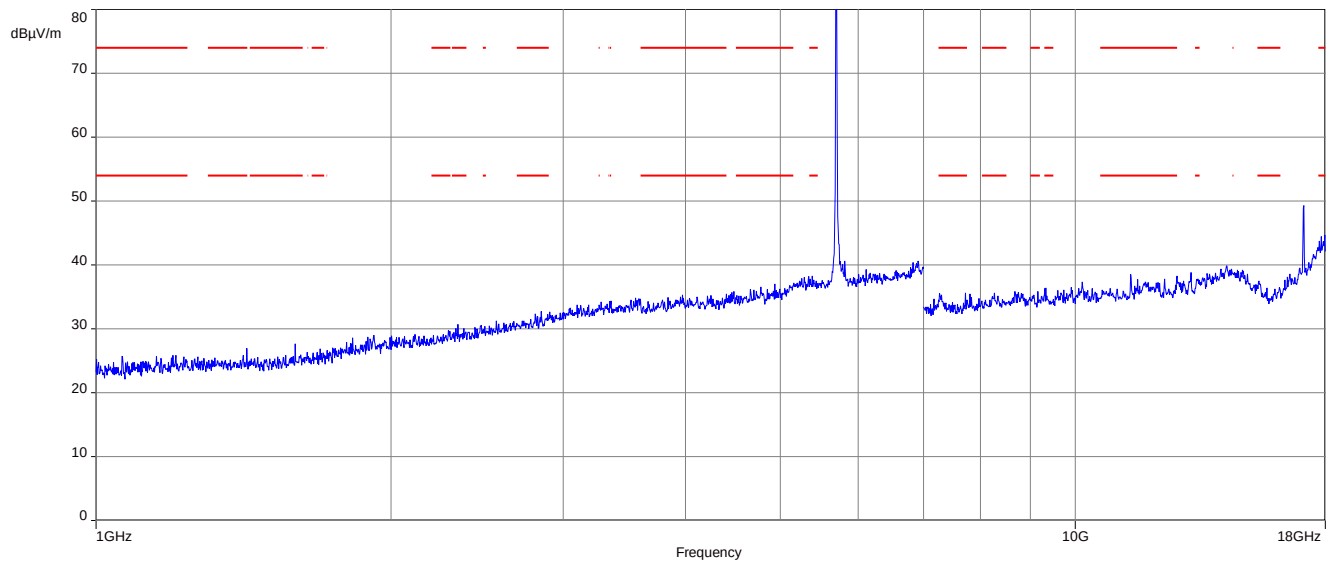


**Plot 10:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; lowest channel

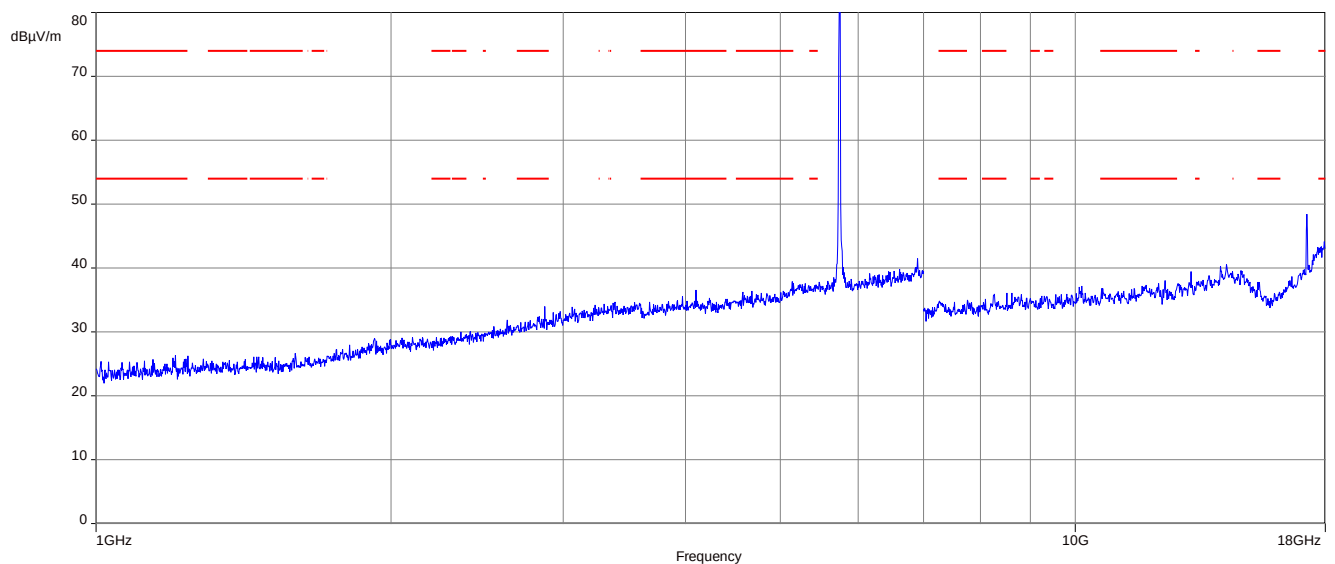

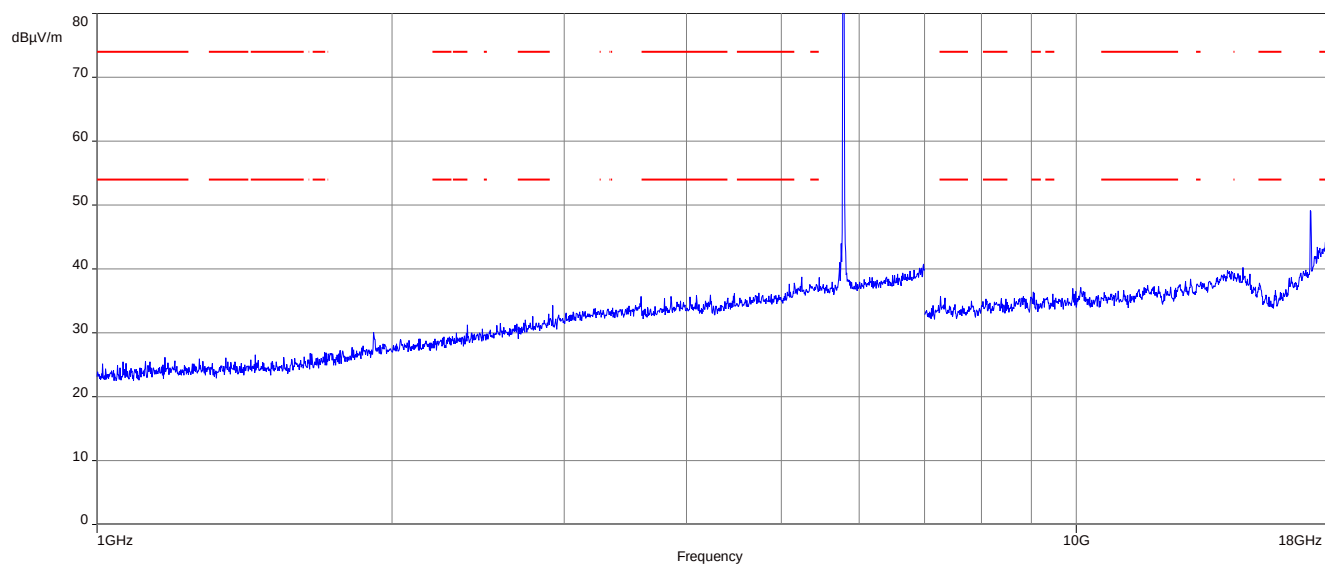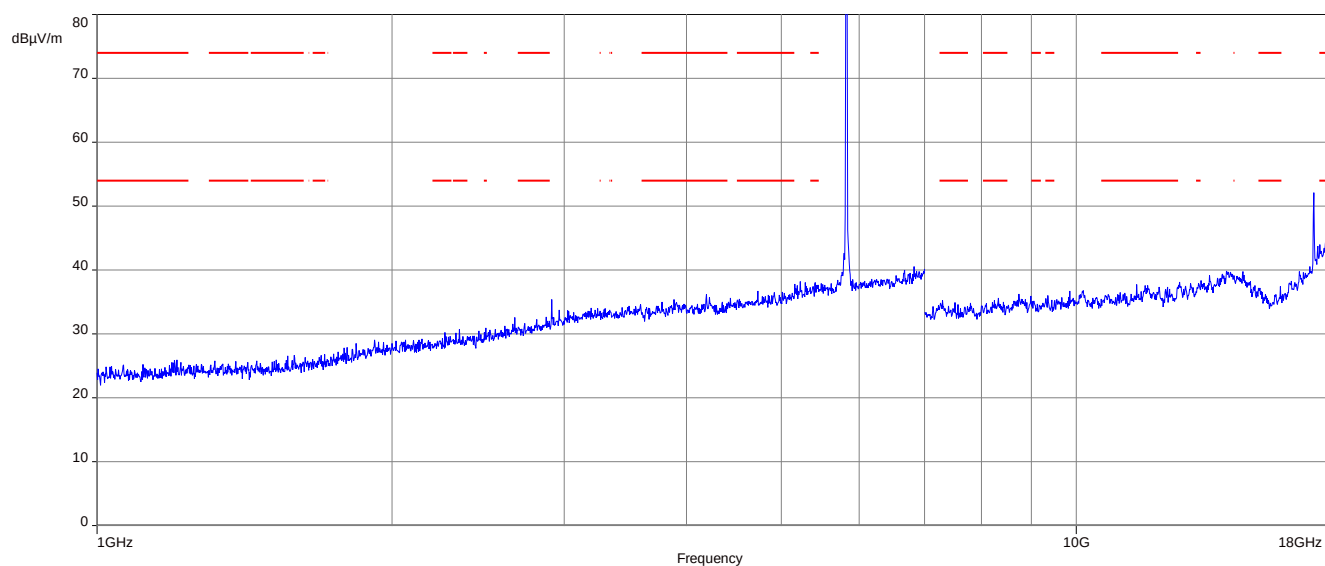
**Plot 11:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; middle channel**Plot 12:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; highest channel



**Plots:** 40 MHz channel bandwidth

**Plot 1:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; lowest channel

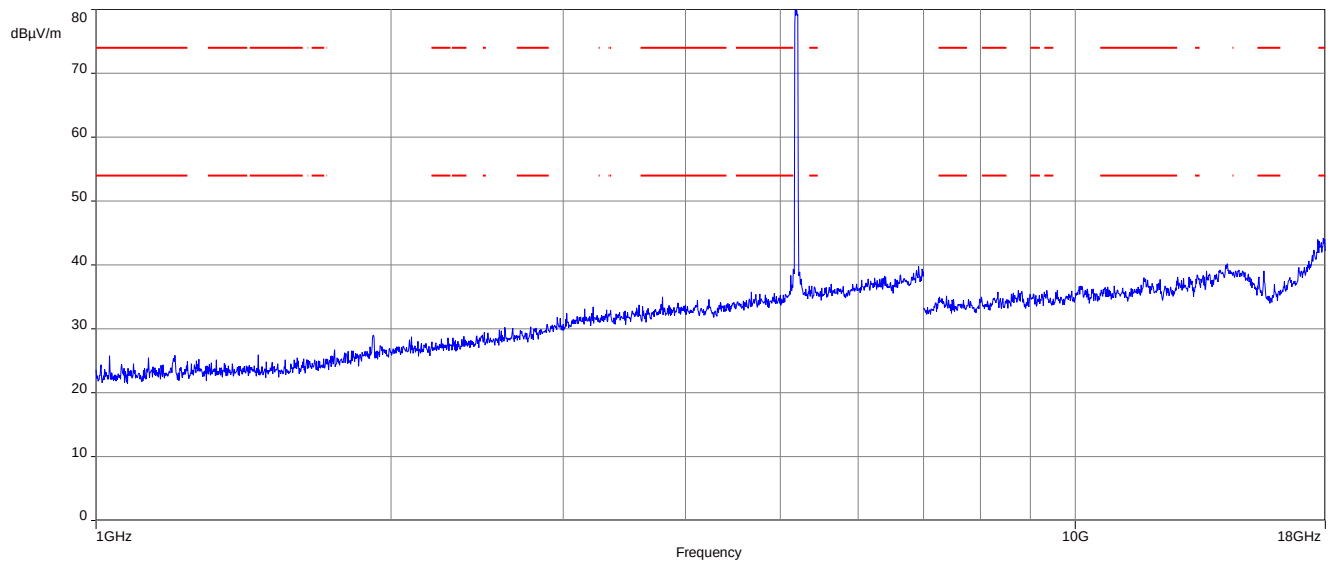


**Plot 2:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; highest channel

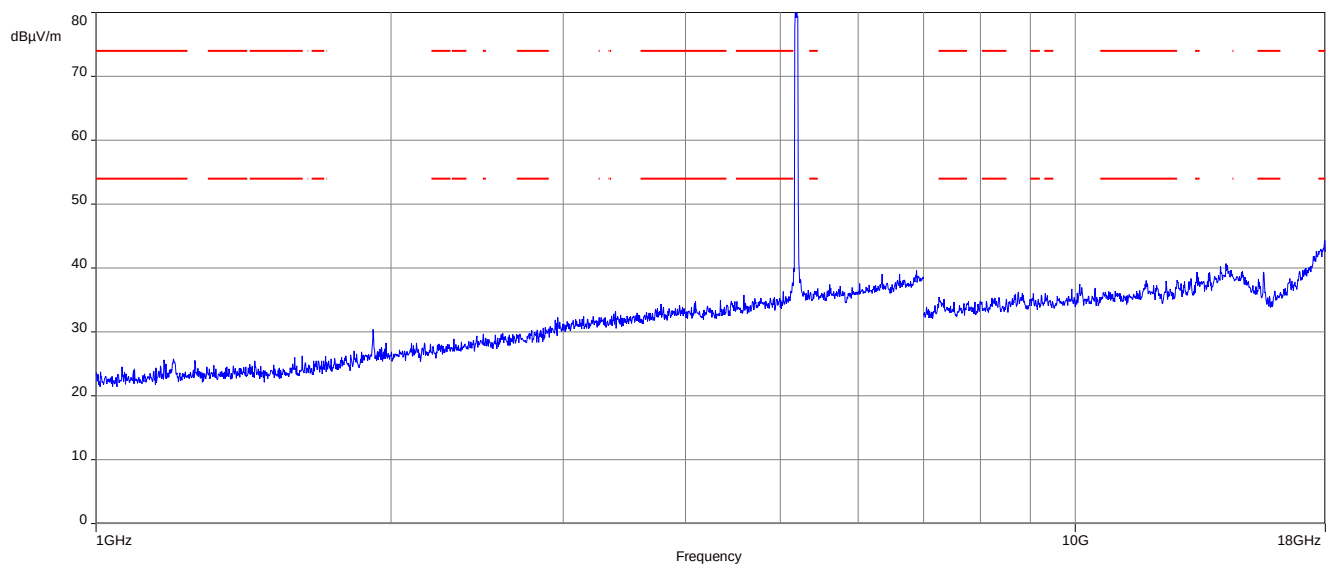


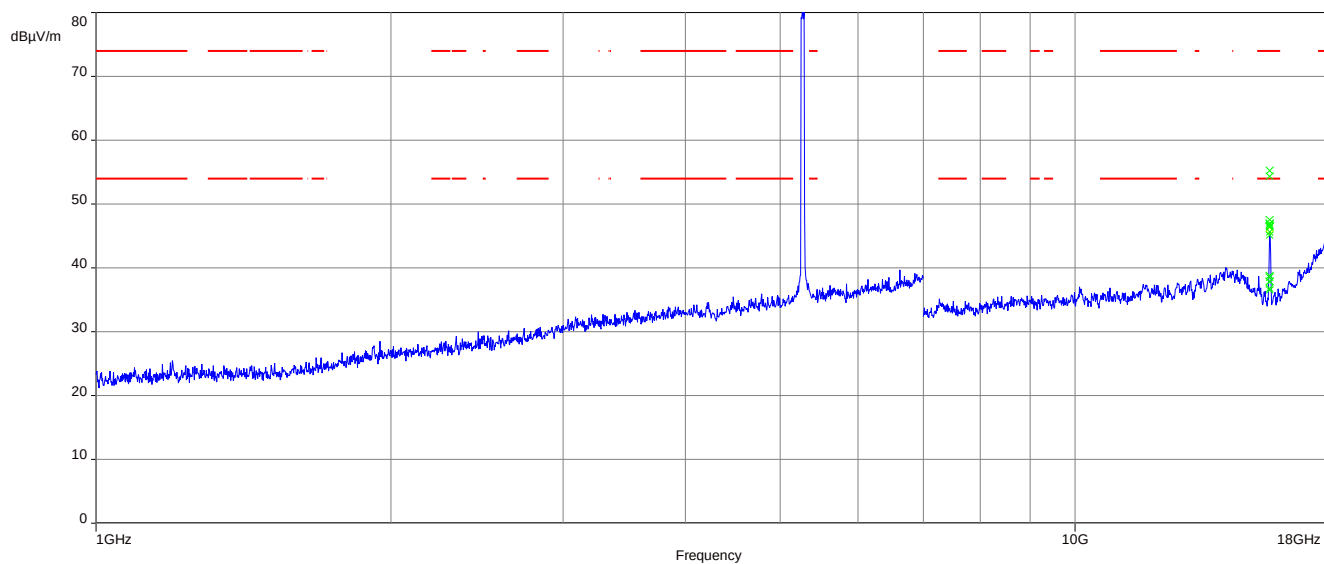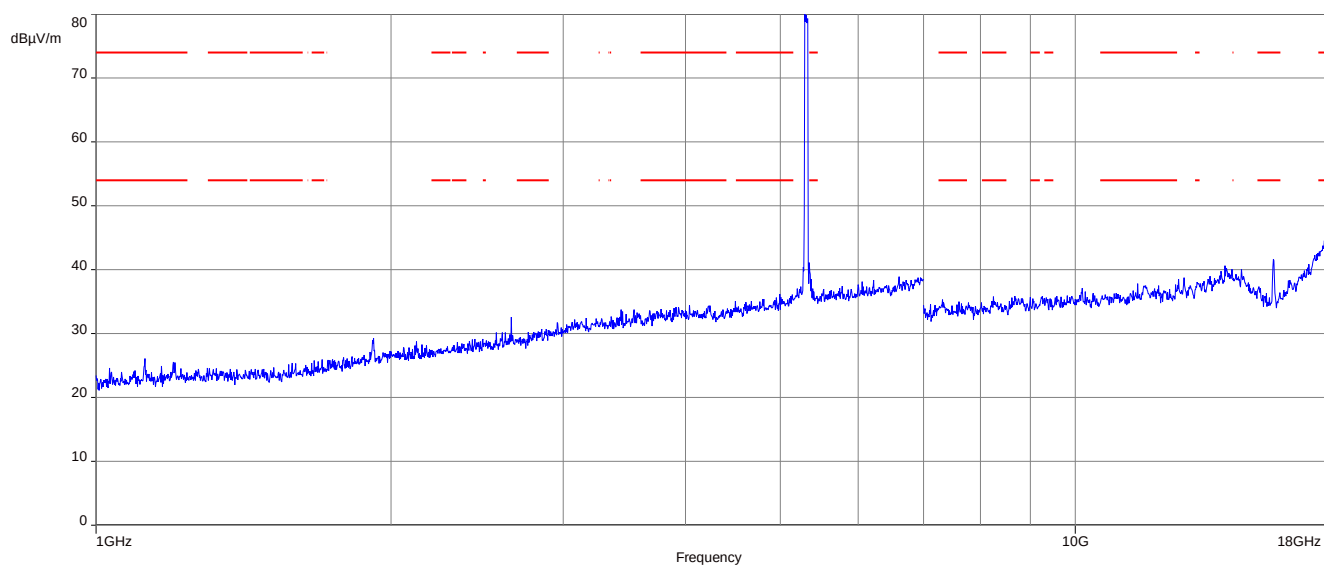**Plot 3:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; lowest channel**Plot 4:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2A; highest channel


**Plot 5:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; lowest channel

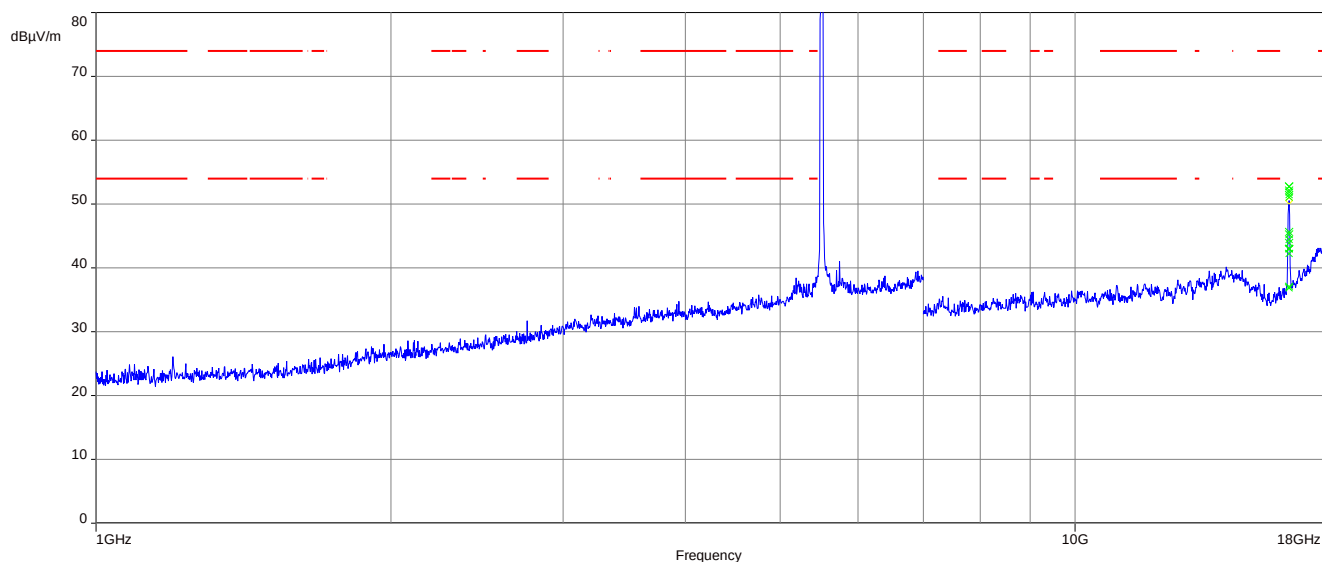


**Plot 6:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; middle channel


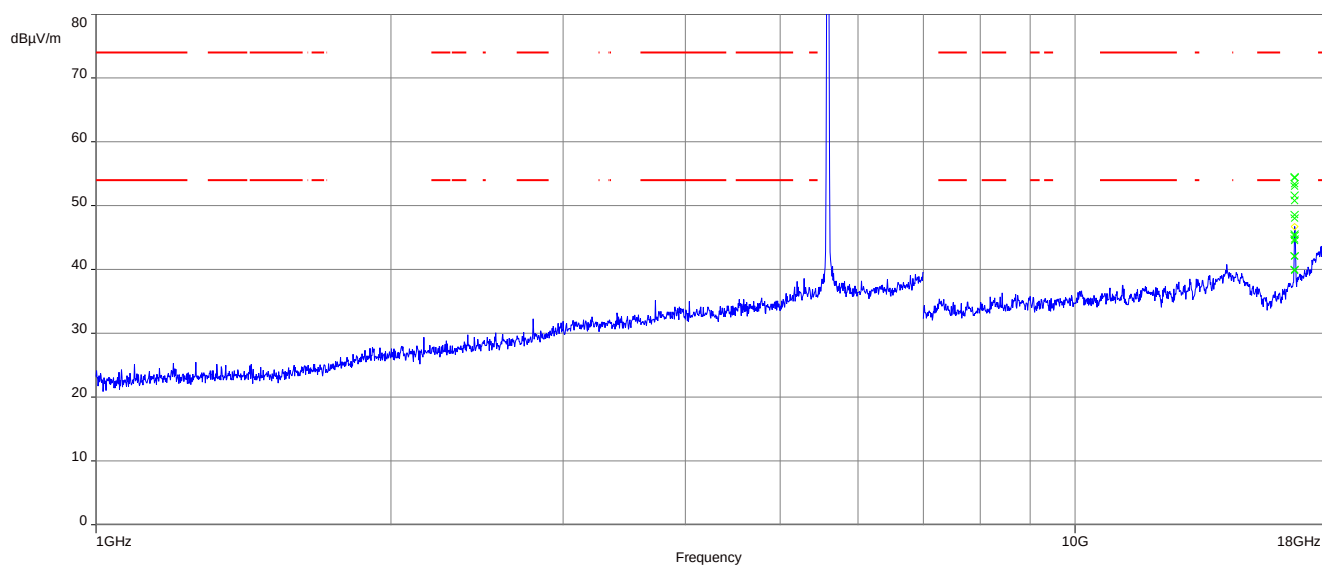


**Plot 7:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-2C; highest channel

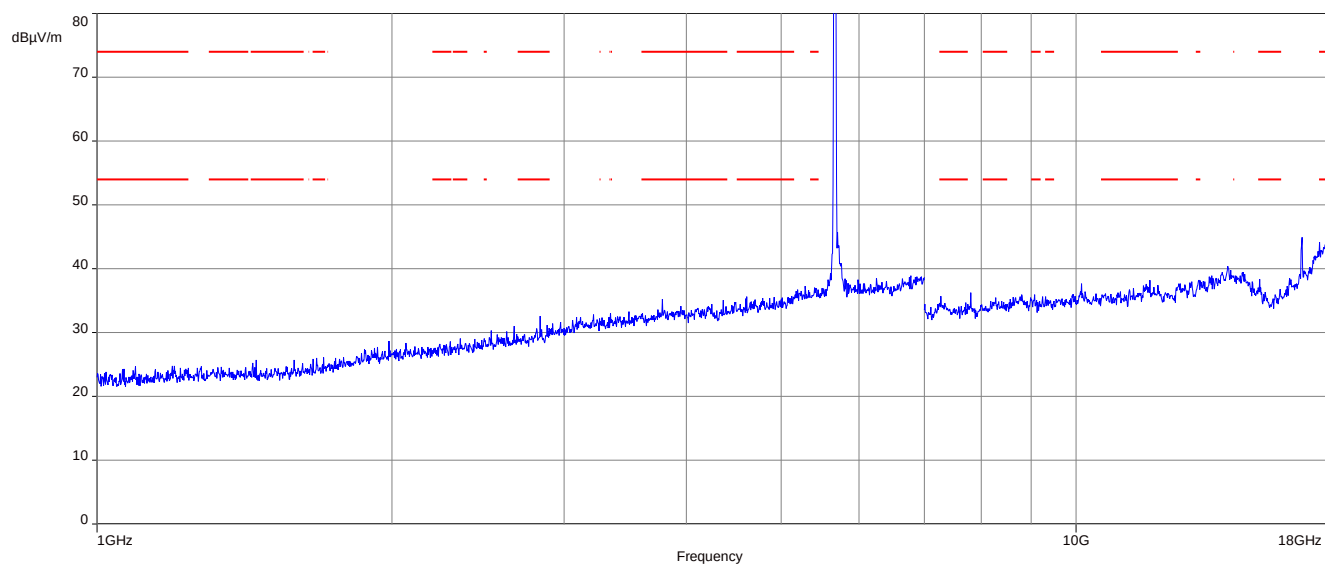


**Plot 8:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; lowest channel

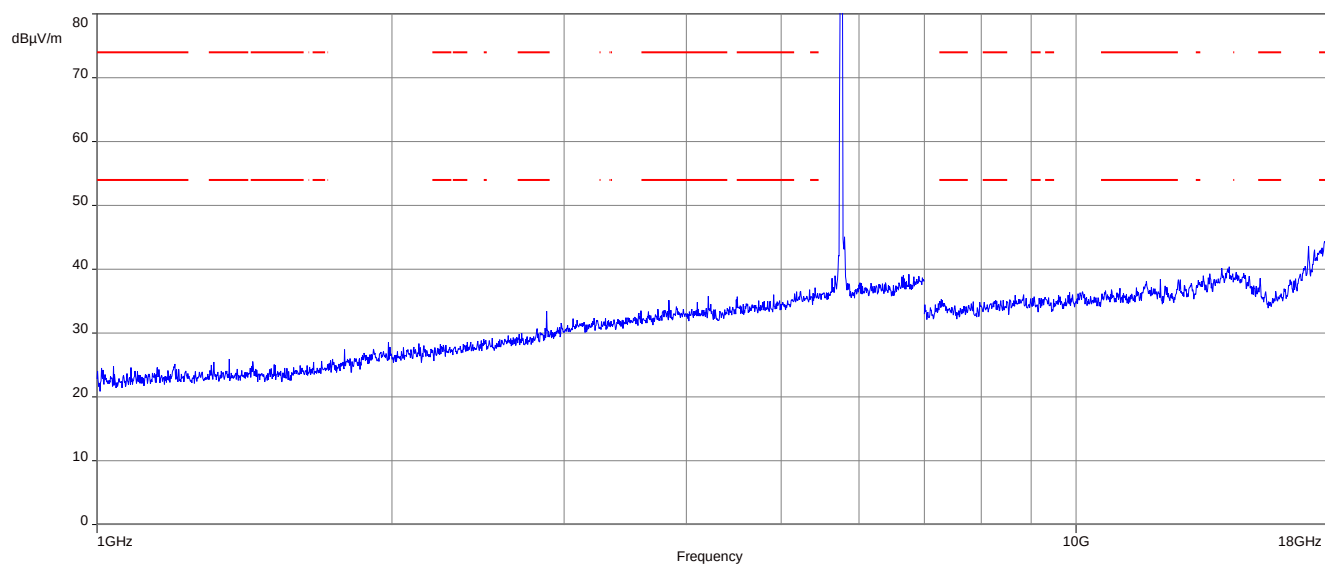

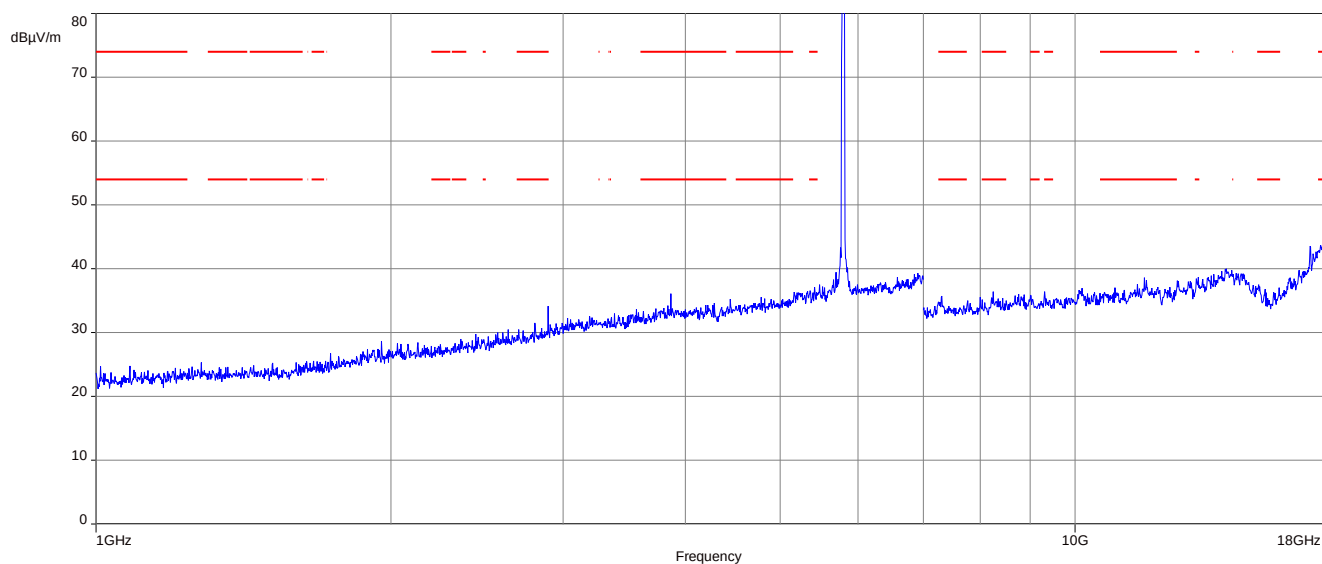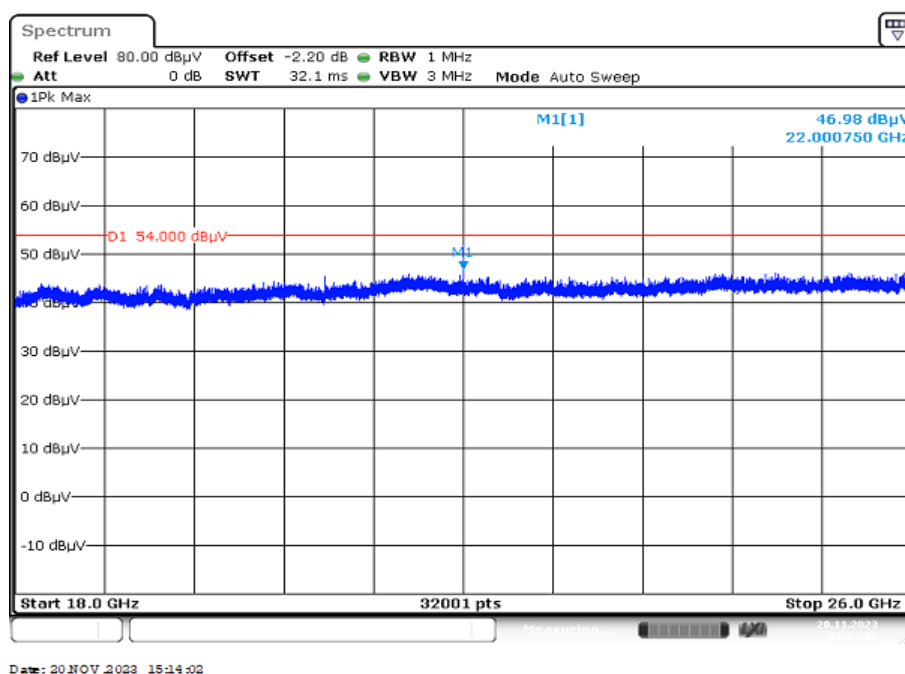**Plot 9:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; highest channel**Plot 10:** 18 GHz to 26 GHz; vertical & horizontal polarization; valid for all channels and modes

**Plot 11:** 26 GHz to 40 GHz; vertical & horizontal polarization; valid for all channels and modes

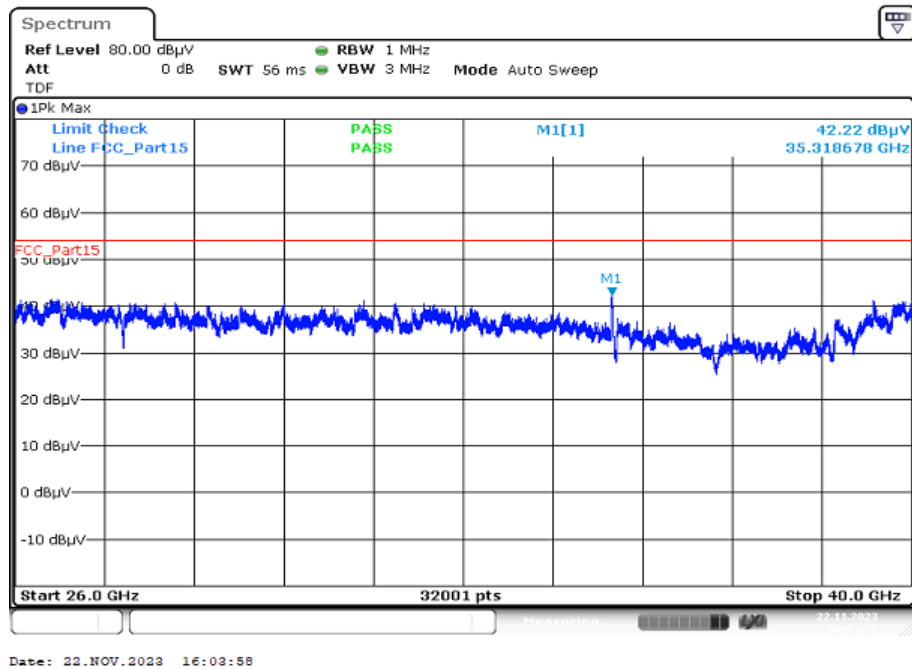

## 12.12 Spurious emissions conducted below 30 MHz (AC conducted)

### Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.


### Measurement:

| Measurement parameter   |                                            |
|-------------------------|--------------------------------------------|
| Detector                | Peak - Quasi Peak / Average                |
| Sweep time              | Auto                                       |
| Resolution bandwidth    | F < 150 kHz: 200 Hz<br>F > 150 kHz: 9 kHz  |
| Video bandwidth         | F < 150 kHz: 1 kHz<br>F > 150 kHz: 100 kHz |
| Span                    | 9 kHz to 30 MHz                            |
| Trace mode              | Max. hold                                  |
| Test setup              | See chapter 7.5 setup A                    |
| Measurement uncertainty | See chapter 9                              |


### Limits:

| FCC              |                         | ISED                 |
|------------------|-------------------------|----------------------|
| Frequency / MHz) | Quasi-Peak / (dBμV / m) | Average / (dBμV / m) |
| 0.15 – 0.5       | 66 to 56*               | 56 to 46*            |
| 0.5 – 5          | 56                      | 46                   |
| 5 – 30.0         | 60                      | 50                   |

\*Decreases with the logarithm of the frequency

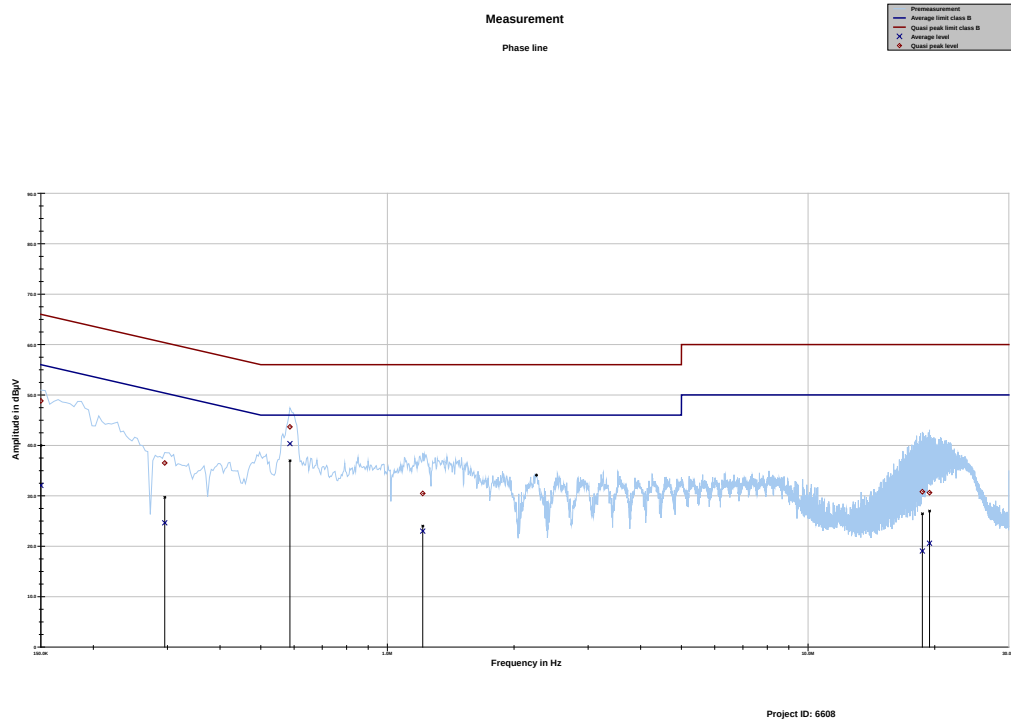**Plots:****Plot 1:** 150 kHz to 30 MHz, phase line**Final results:**

| Frequency<br>MHz | Quasi peak<br>level<br>dBµV | Margin quasi<br>peak<br>dB | Limit QP<br>dBµV | Average<br>level<br>dBµV | Margin<br>average<br>dB | Limit AV<br>dBµV |
|------------------|-----------------------------|----------------------------|------------------|--------------------------|-------------------------|------------------|
| 0.150000         | 48.82                       | 17.18                      | 66.000           | 32.06                    | 23.94                   | 56.000           |
| 0.295519         | 36.51                       | 23.86                      | 60.368           | 24.64                    | 27.20                   | 51.842           |
| 0.586556         | 43.67                       | 12.33                      | 56.000           | 40.34                    | 5.66                    | 46.000           |
| 1.213406         | 30.47                       | 25.53                      | 56.000           | 23.00                    | 23.00                   | 46.000           |
| 18.694312        | 30.80                       | 29.20                      | 60.000           | 19.05                    | 30.95                   | 50.000           |
| 19.436831        | 30.62                       | 29.38                      | 60.000           | 20.59                    | 29.41                   | 50.000           |

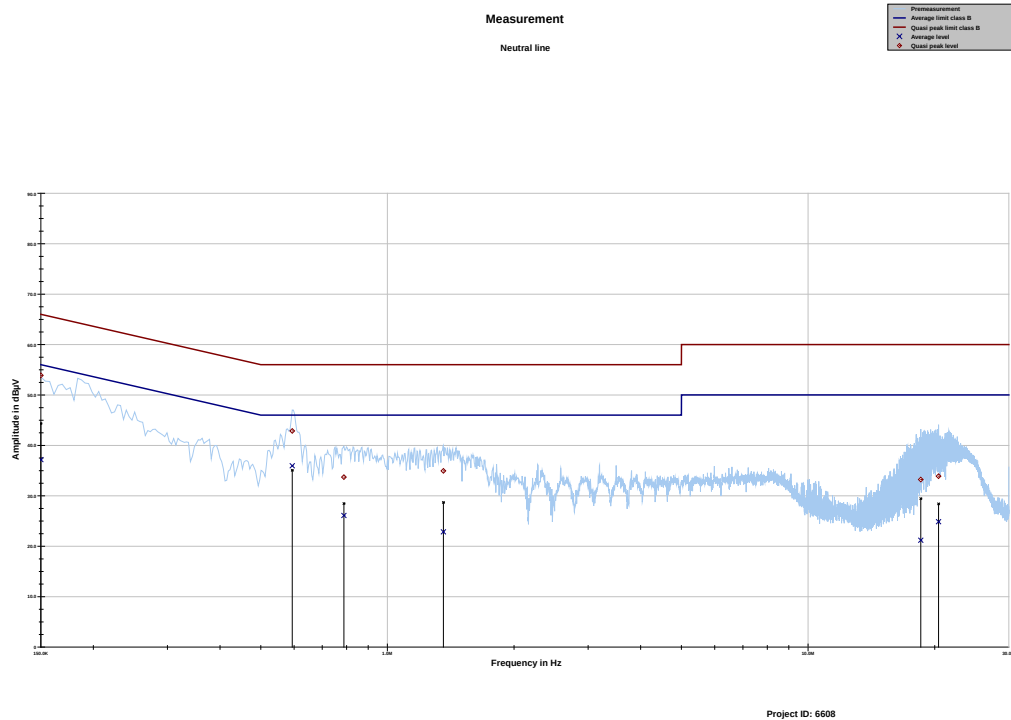**Plot 2: 150 kHz to 30 MHz, neutral line****Final results:**

| Frequency<br>MHz | Quasi peak<br>level<br>dBµV | Margin quasi<br>peak<br>dB | Limit QP<br>dBµV | Average<br>level<br>dBµV | Margin<br>average<br>dB | Limit AV<br>dBµV |
|------------------|-----------------------------|----------------------------|------------------|--------------------------|-------------------------|------------------|
| 0.150000         | 53.89                       | 12.11                      | 66.000           | 37.17                    | 18.83                   | 56.000           |
| 0.594019         | 42.85                       | 13.15                      | 56.000           | 35.96                    | 10.04                   | 46.000           |
| 0.788044         | 33.70                       | 22.30                      | 56.000           | 26.09                    | 19.91                   | 46.000           |
| 1.358925         | 34.94                       | 21.06                      | 56.000           | 22.85                    | 23.15                   | 46.000           |
| 18.533869        | 33.22                       | 26.78                      | 60.000           | 21.18                    | 28.82                   | 50.000           |
| 20.429344        | 33.88                       | 26.12                      | 60.000           | 24.85                    | 25.15                   | 50.000           |

## 13 Glossary

|                        |                                                    |
|------------------------|----------------------------------------------------|
| <b>AVG</b>             | Average                                            |
| <b>C</b>               | Compliant                                          |
| <b>C/N<sub>0</sub></b> | Carrier to noise-density ratio, expressed in dB-Hz |
| <b>CAC</b>             | Channel availability check                         |
| <b>CW</b>              | Clean wave                                         |
| <b>DC</b>              | Duty cycle                                         |
| <b>DFS</b>             | Dynamic frequency selection                        |
| <b>DSSS</b>            | Dynamic sequence spread spectrum                   |
| <b>DUT</b>             | Device under test                                  |
| <b>EN</b>              | European Standard                                  |
| <b>ETSI</b>            | European Telecommunications Standards Institute    |
| <b>EMC</b>             | Electromagnetic Compatibility                      |
| <b>EUT</b>             | Equipment under test                               |
| <b>FCC</b>             | Federal Communications Commission                  |
| <b>FCC ID</b>          | Company Identifier at FCC                          |
| <b>FHSS</b>            | Frequency hopping spread spectrum                  |
| <b>FVIN</b>            | Firmware version identification number             |
| <b>GNSS</b>            | Global Navigation Satellite System                 |
| <b>GUE</b>             | GNSS User Equipment                                |
| <b>HMN</b>             | Host marketing name                                |
| <b>HVIN</b>            | Hardware version identification number             |
| <b>HW</b>              | Hardware                                           |
| <b>IC</b>              | Industry Canada                                    |
| <b>Inv. No.</b>        | Inventory number                                   |
| <b>MC</b>              | Modulated carrier                                  |
| <b>NA</b>              | Not applicable                                     |
| <b>NC</b>              | Not compliant                                      |
| <b>NOP</b>             | Non occupancy period                               |
| <b>NP</b>              | Not performed                                      |
| <b>OBW</b>             | Occupied bandwidth                                 |
| <b>OC</b>              | Operating channel                                  |
| <b>OCW</b>             | Operating channel bandwidth                        |
| <b>OFDM</b>            | Orthogonal frequency division multiplexing         |
| <b>OOB</b>             | Out of band                                        |
| <b>OP</b>              | Occupancy period                                   |
| <b>PER</b>             | Packet error rate                                  |
| <b>PMN</b>             | Product marketing name                             |
| <b>PP</b>              | Positive peak                                      |
| <b>QP</b>              | Quasi peak                                         |
| <b>RLAN</b>            | Radio local area network                           |
| <b>S/N or SN</b>       | Serial number                                      |
| <b>SW</b>              | Software                                           |
| <b>UUT</b>             | Unit under test                                    |
| <b>WLAN</b>            | Wireless local area network                        |

## 14 Document history

| Version | Applied changes | Date of release |
|---------|-----------------|-----------------|
| -/-     | Initial release | 2023-11-24      |

##### END OF TEST REPORT #####