



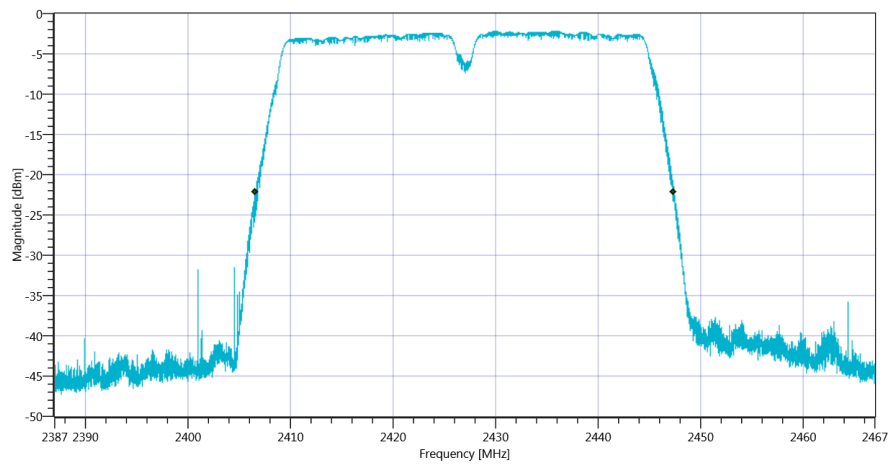

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode 20dB_15012020_132459.png

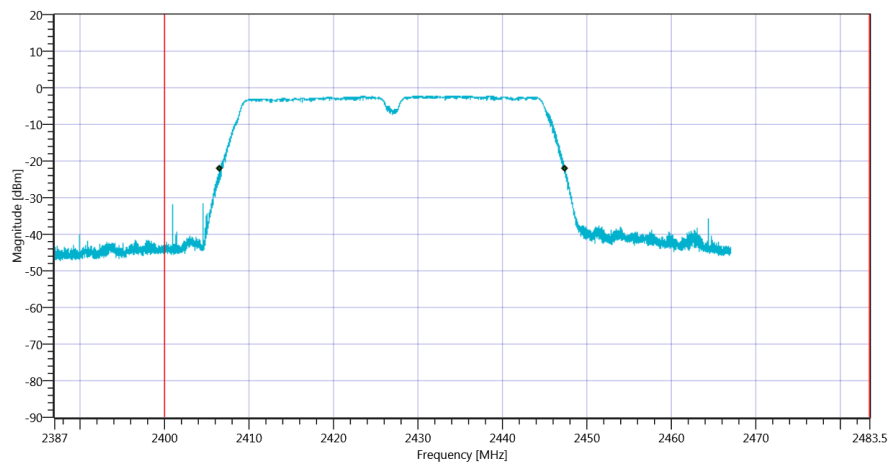

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode_15012020_132504.png

TEST FINISHED

General Verdict

15.01.2020 13:25:04 / RT: 44 s

PASS

41. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 13:35:22
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	
Class / TC Version / TC ID	TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01 Version: 0.0.2 TCID_FCC15247_2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2432
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60



Test at TX 2432 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.28 9.88 10
Start [MHz] Stop [MHz]	2392.000 2472.000
RBW [MHz] VBW [MHz]	1.000000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT: TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36948	kHz	Information
T1 99%	2400.000000	---	2413.6258	MHz	PASS
T2 99%	---	2483.500000	2450.5741	MHz	PASS

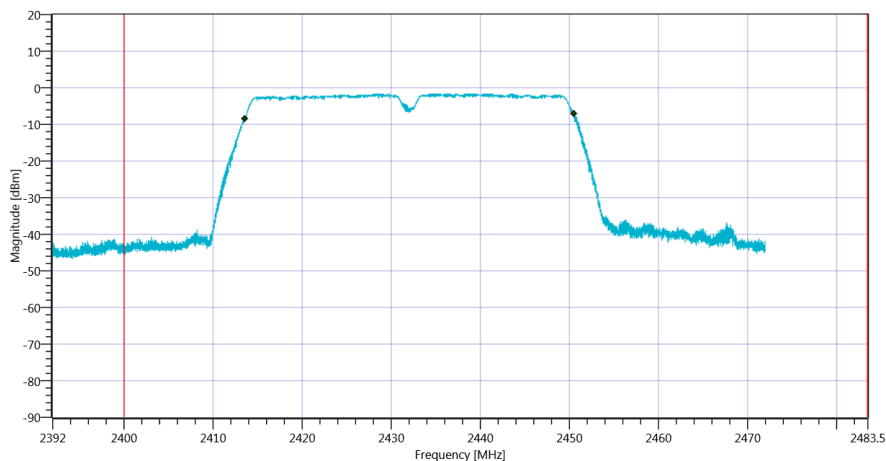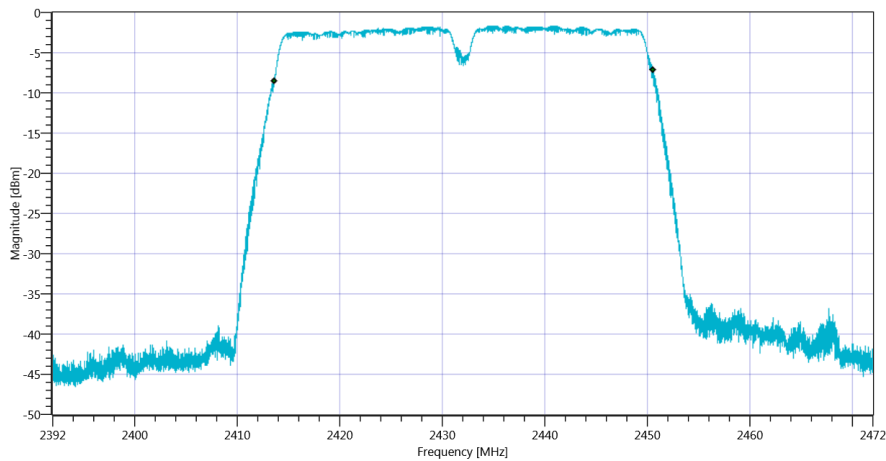


RESULT: TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	40816	kHz	Information
T1 20dB	2400.000000	---	2411.6000	MHz	PASS
T2 20dB	---	2483.500000	2452.4160	MHz	PASS

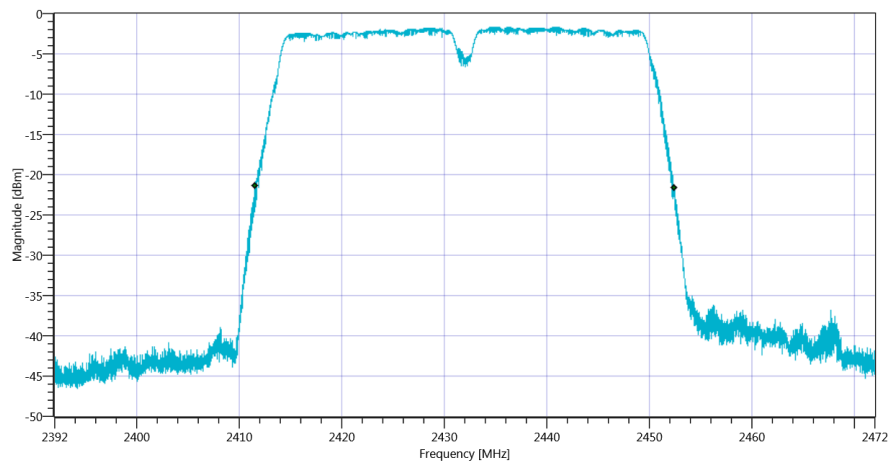

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode 20dB_15012020_133600.png

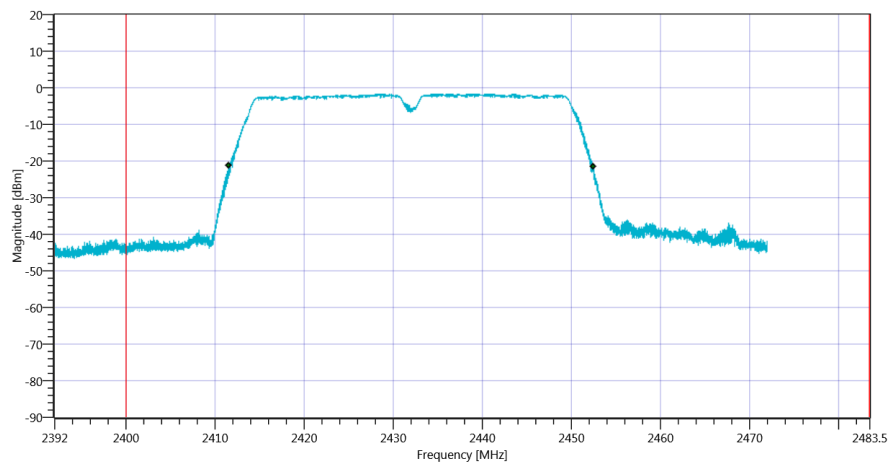

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode_15012020_133605.png

TEST FINISHED

General Verdict

15.01.2020 13:36:05 / RT: 43 s

PASS

42. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 14:08:44
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	
Class / TC Version / TC ID	TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01 Version: 0.0.2 TCID_FCC15247_2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60



Test at TX 2437 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.39 9.89 10
Start [MHz] Stop [MHz]	2397.000 2477.000
RBW [MHz] VBW [MHz]	1.000000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT: TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36972	kHz	Information
T1 99%	2400.000000	---	2418.6338	MHz	PASS
T2 99%	---	2483.500000	2455.6061	MHz	PASS

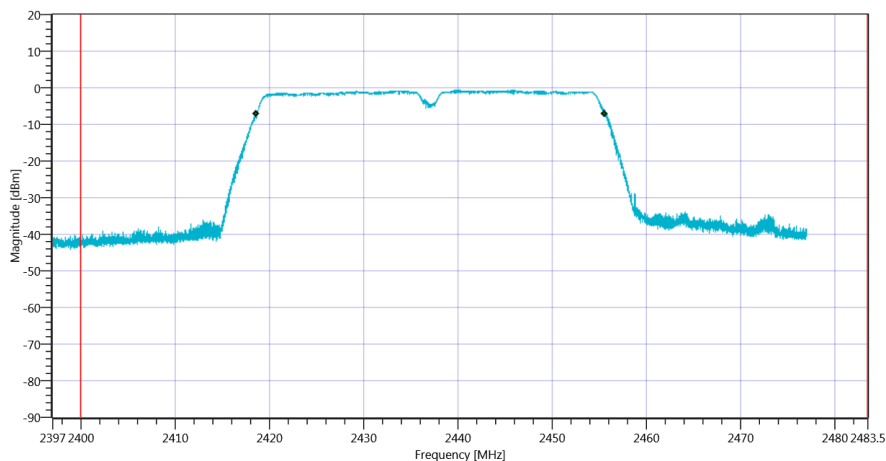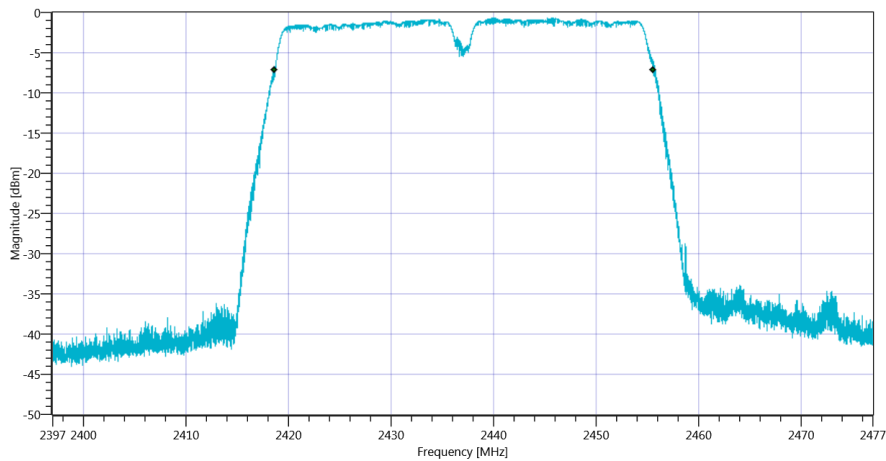


RESULT: TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	40808	kHz	Information
T1 20dB	2400.000000	---	2416.5920	MHz	PASS
T2 20dB	---	2483.500000	2457.4000	MHz	PASS

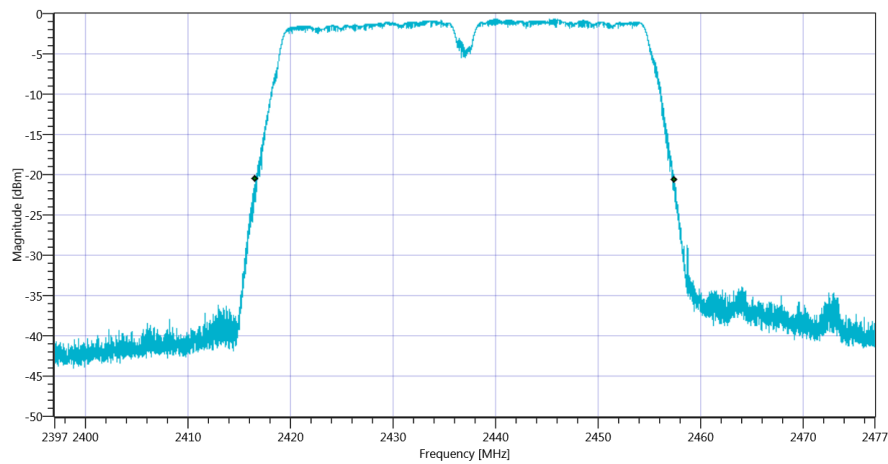

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode 20dB_15012020_140922.png

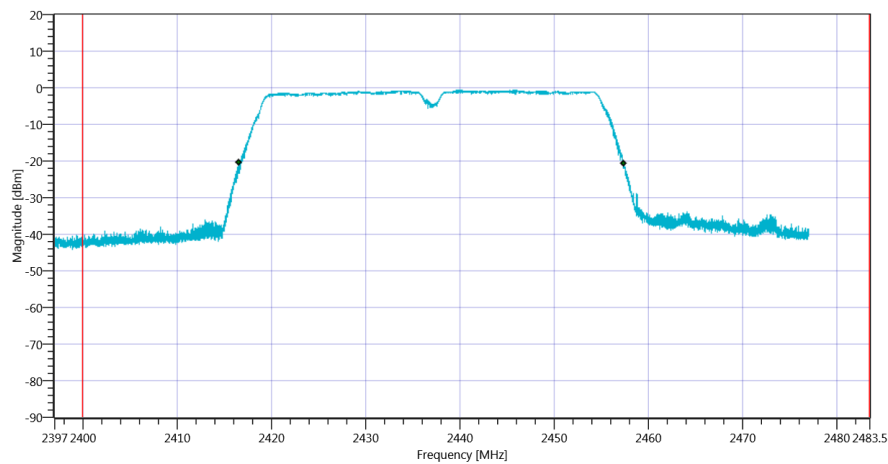

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode_15012020_140926.png

TEST FINISHED

General Verdict

15.01.2020 14:09:27 / RT: 43 s

PASS

43. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 14:26:17
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	
Class / TC Version / TC ID	TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01 Version: 0.0.2 TCID_FCC15247_2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2442
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2442 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.01 9.91 10
Start [MHz] Stop [MHz]	2402.000 2482.000
RBW [MHz] VBW [MHz]	1.000000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT: TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36956	kHz	Information
T1 99%	2400.000000	---	2423.6338	MHz	PASS
T2 99%	---	2483.500000	2460.5901	MHz	PASS

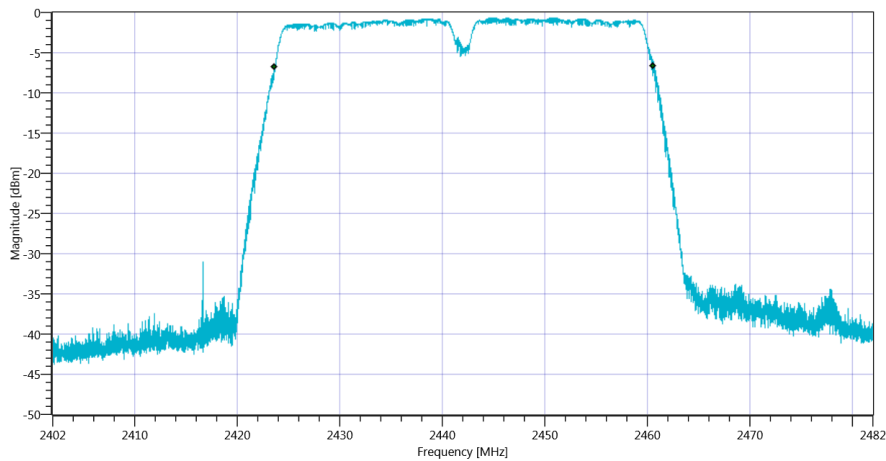


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode 99PCT_15012020_142645.png

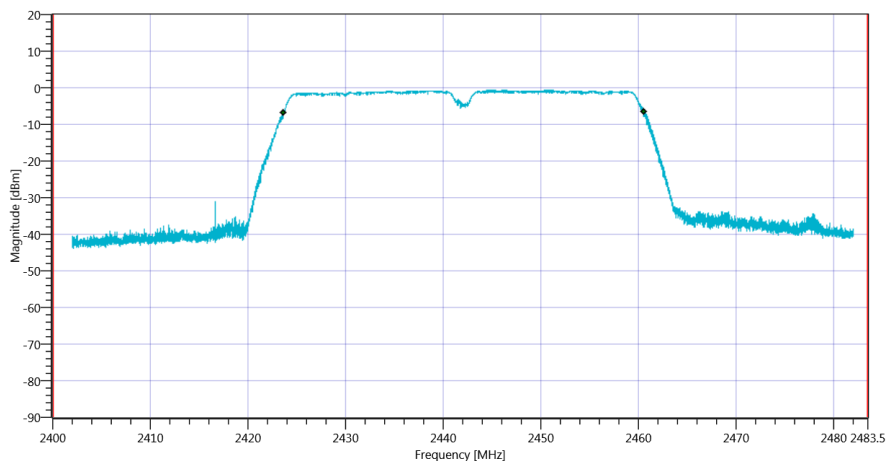


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode_15012020_142650.png

RESULT: TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	40848	kHz	Information
T1 20dB	2400.000000	---	2421.5920	MHz	PASS
T2 20dB	---	2483.500000	2462.4400	MHz	PASS

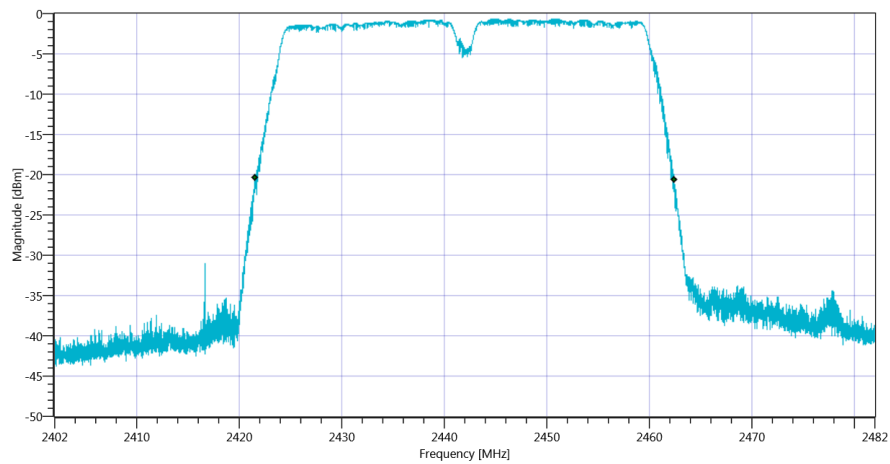

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode 20dB_15012020_142655.png

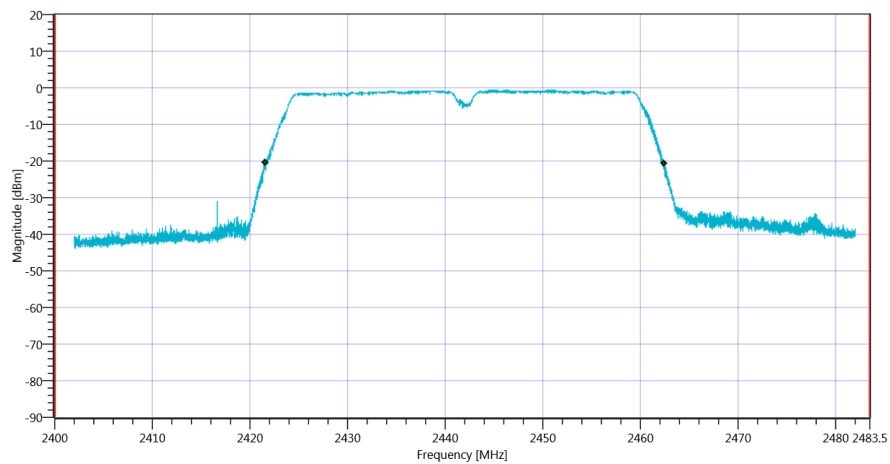

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode_15012020_142659.png

TEST FINISHED

General Verdict

15.01.2020 14:27:00 / RT: 43 s

PASS

44. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 14:35:21
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	
Class / TC Version / TC ID	TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01 Version: 0.0.2 TCID_FCC15247_2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2447
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60



Test at TX 2447 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.16 9.92 10
Start [MHz] Stop [MHz]	2407.000 2487.000
RBW [MHz] VBW [MHz]	1.000000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT: TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36956	kHz	Information
T1 99%	2400.000000	---	2428.5938	MHz	PASS
T2 99%	---	2483.500000	2465.5501	MHz	PASS

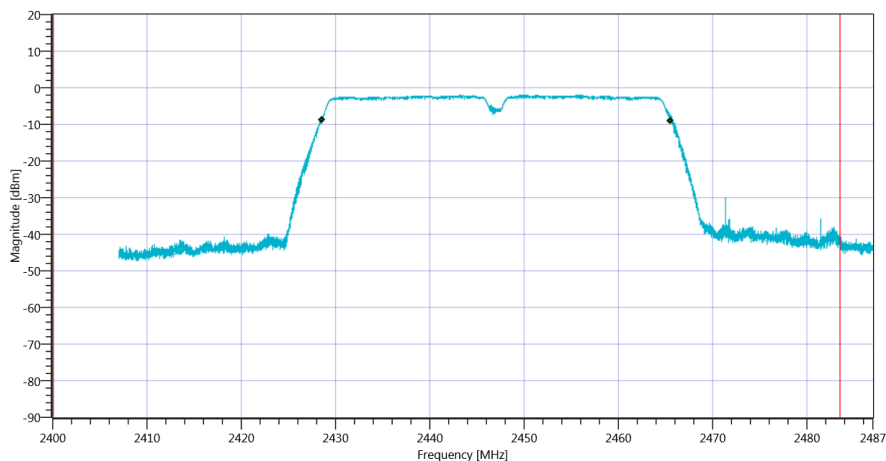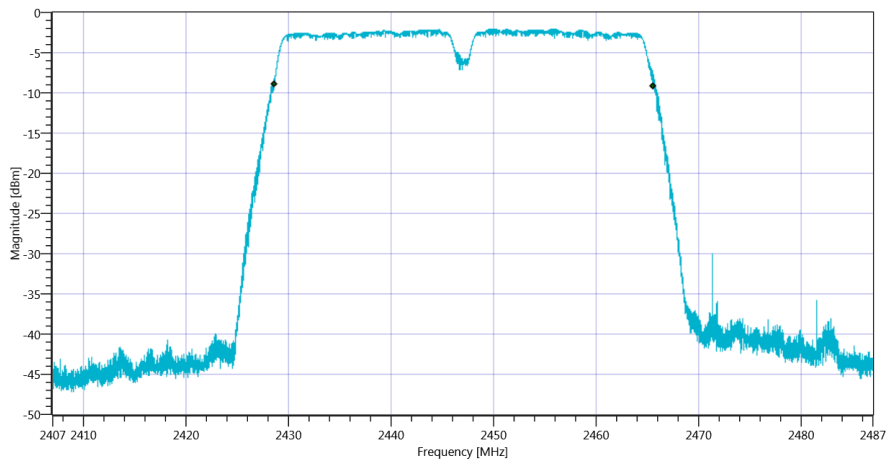


RESULT: TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	40800	kHz	Information
T1 20dB	2400.000000	---	2426.5680	MHz	PASS
T2 20dB	---	2483.500000	2467.3680	MHz	PASS

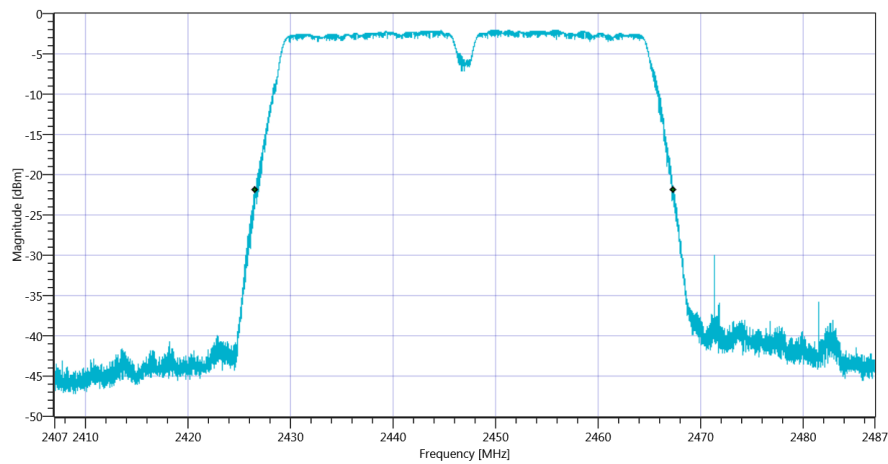

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode 20dB_15012020_143600.png

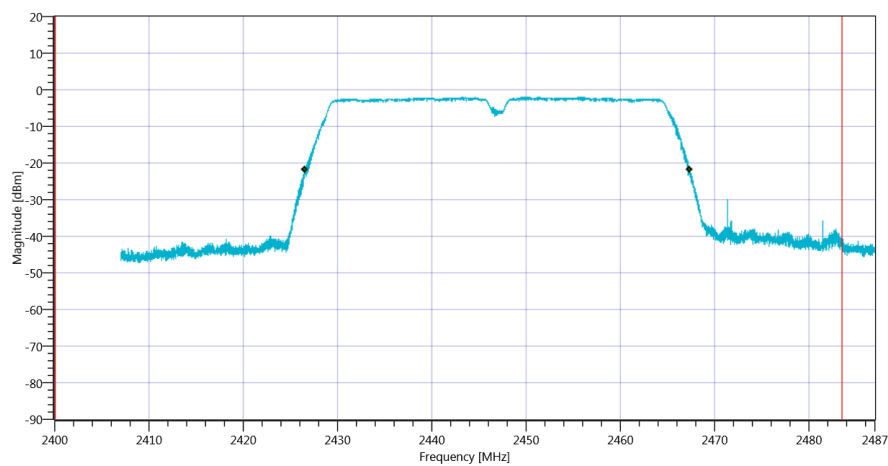

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode_15012020_143604.png

TEST FINISHED

General Verdict

15.01.2020 14:36:05 / RT: 43 s

PASS

45. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 14:44:31
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	
Class / TC Version / TC ID	TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01 Version: 0.0.2 TCID_FCC15247_2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2452 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	0.99 9.93 10
Start [MHz] Stop [MHz]	2412.000 2492.000
RBW [MHz] VBW [MHz]	1.000000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT: TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36940	kHz	Information
T1 99%	2400.000000	---	2433.5938	MHz	PASS
T2 99%	---	2483.500000	2470.5341	MHz	PASS

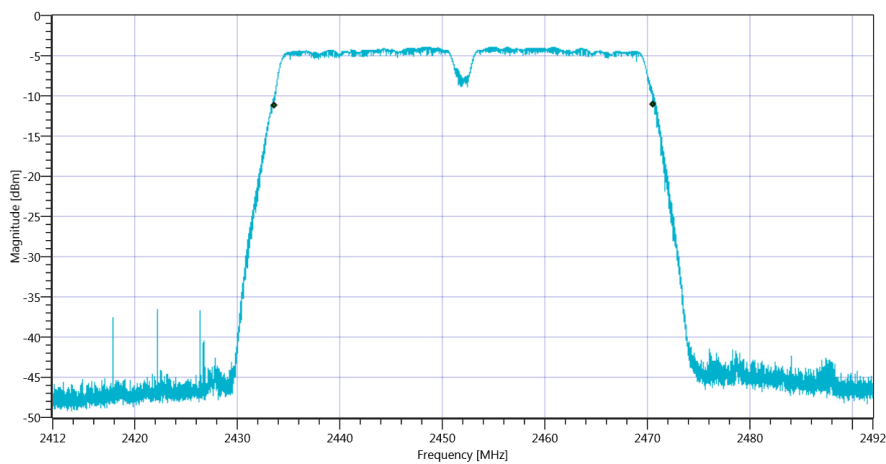


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode 99PCT_15012020_144500.png

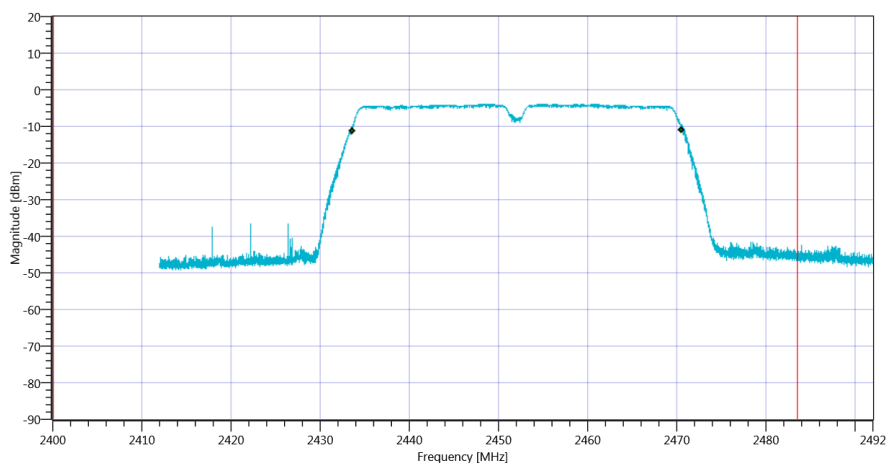


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode_15012020_144504.png

RESULT: TC_VM_FCC15247_Bandwidth_99PCT_20dB_DTS_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	40760	kHz	Information
T1 20dB	2400.000000	---	2431.5920	MHz	PASS
T2 20dB	---	2483.500000	2472.3520	MHz	PASS

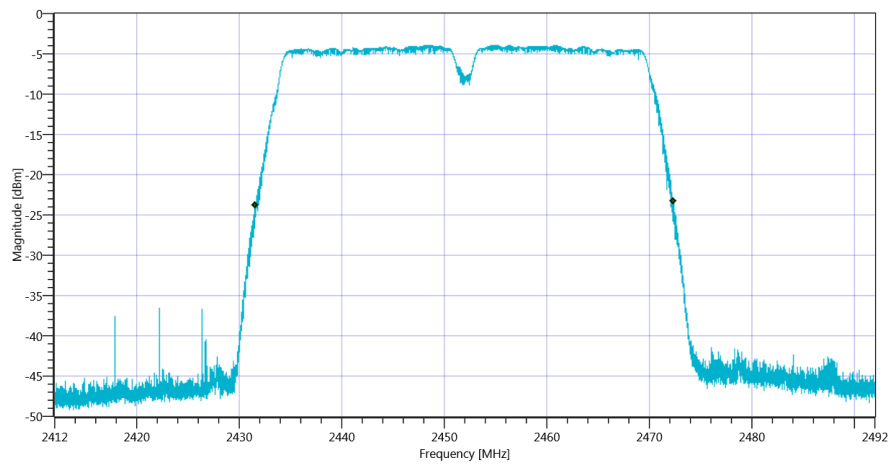

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode 20dB_15012020_144510.png

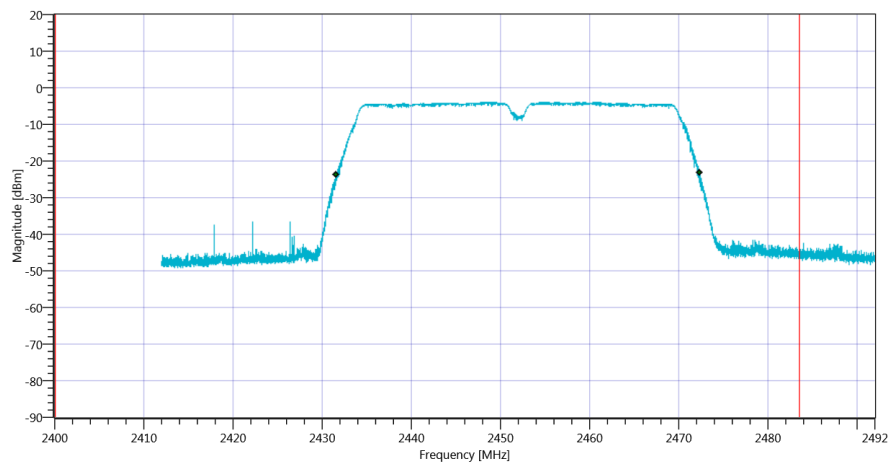

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT40-mode_15012020_144514.png

TEST FINISHED

General Verdict

15.01.2020 14:45:15 / RT: 43 s

PASS

46. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode

Test References	
TC Start	15.01.2020 09:53:40
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2412 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.03 9.83 20
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-18.52	dBm/3KHz	PASS

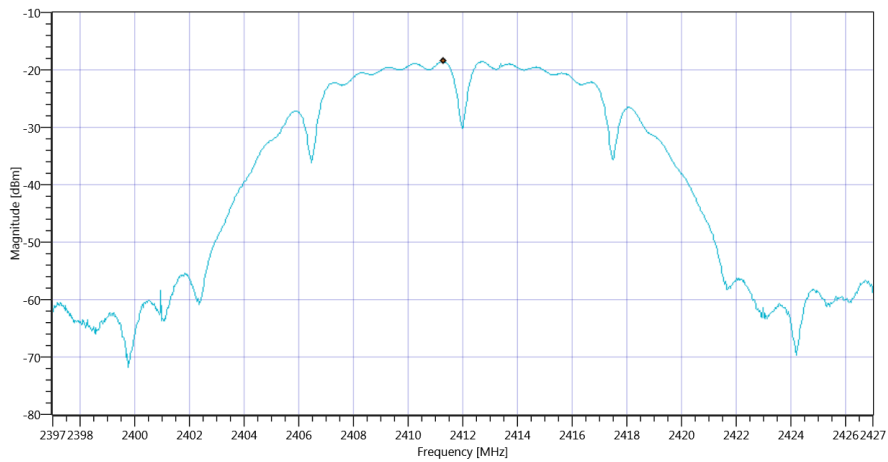

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode_15012020_095525.png

TEST FINISHED

General Verdict 15.01.2020 09:55:25 / RT: 105 s

PASS

47. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode

Test References	
TC Start	15.01.2020 10:06:56
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2437 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.86 9.89 15
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-18.64	dBm/3KHz	PASS

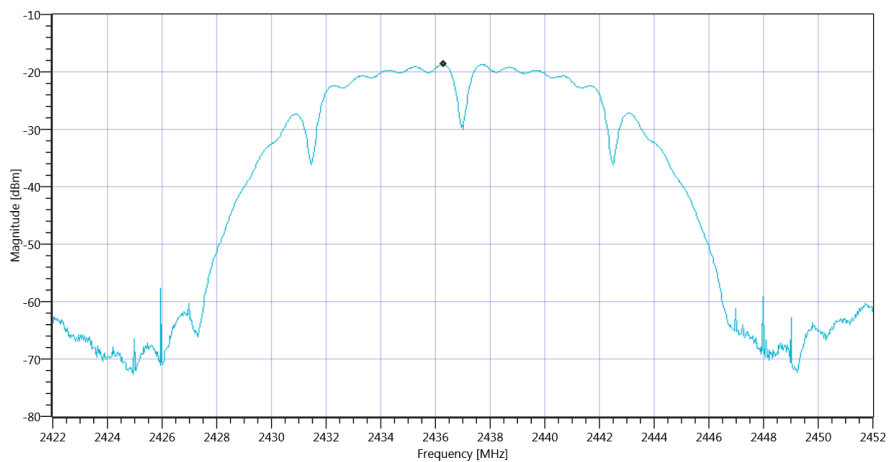

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode_15012020_100736.png

TEST FINISHED

General Verdict	15.01.2020 10:07:37 / RT: 41 s	PASS
-----------------	--------------------------------	------

48. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode

Test References	
TC Start	15.01.2020 10:18:12
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2462 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.97 9.94 20
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-17.13	dBm/3KHz	PASS

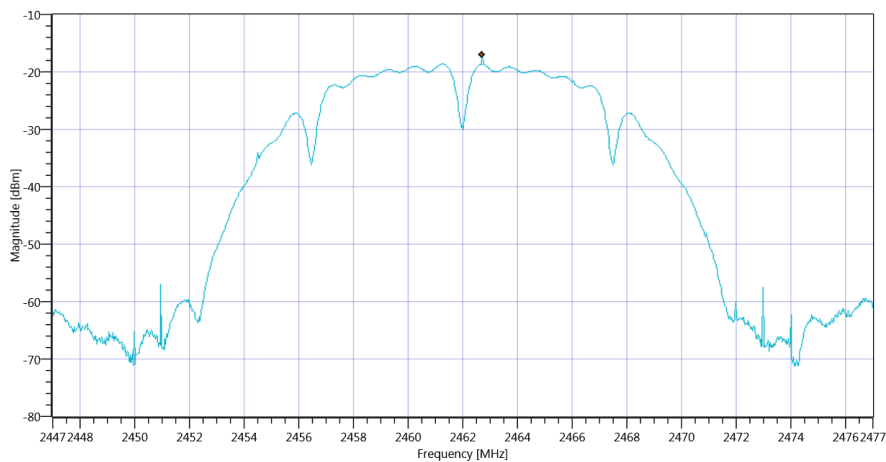

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode_15012020_101852.png

TEST FINISHED

General Verdict 15.01.2020 10:18:52 / RT: 40 s

PASS

49. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 10:36:52
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2412 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.25 9.83 15
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-21.75	dBm/3KHz	PASS

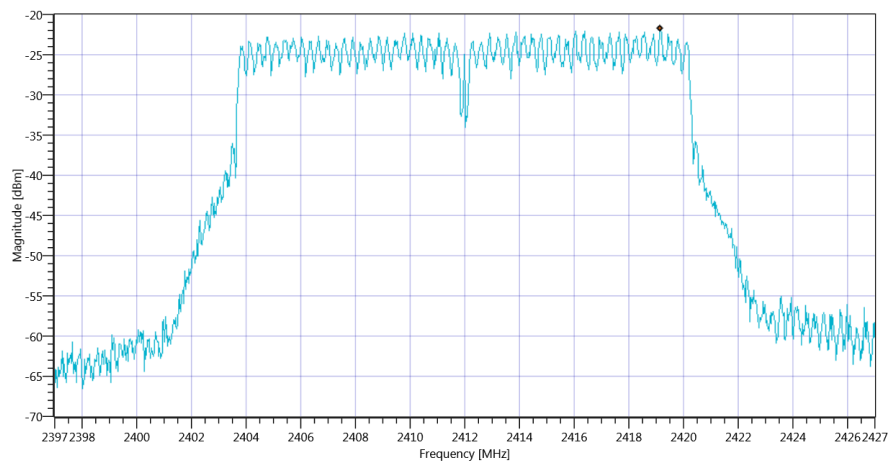

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode_15012020_103730.png

TEST FINISHED

General Verdict 15.01.2020 10:37:31 / RT: 39 s

PASS

50. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 10:45:53
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2417
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2417 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.60 9.84 15
Start [MHz] Stop [MHz]	2402.000 2432.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-20.21	dBm/3KHz	PASS

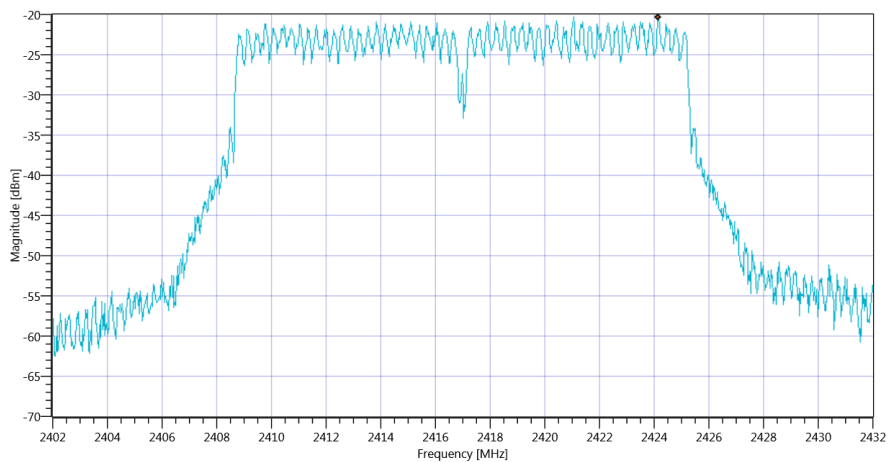

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode_15012020_104631.png

TEST FINISHED

General Verdict

15.01.2020 10:46:31 / RT: 38 s

PASS

51. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 10:54:59
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2422 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.26 9.85 20
Start [MHz] Stop [MHz]	2407.000 2437.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-19.77	dBm/3KHz	PASS

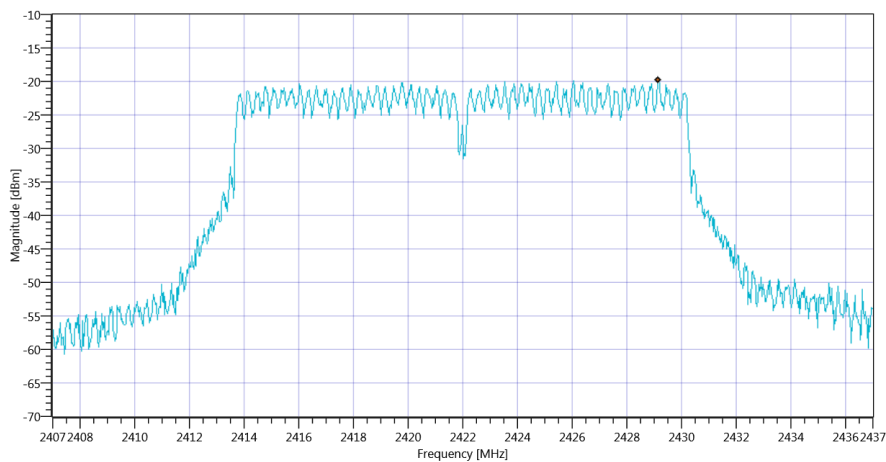

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode_15012020_105537.png

TEST FINISHED

General Verdict	15.01.2020 10:55:38 / RT: 39 s	PASS
-----------------	--------------------------------	------

52. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 11:04:39
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2437 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.12 9.89 20
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-19.8	dBm/3KHz	PASS

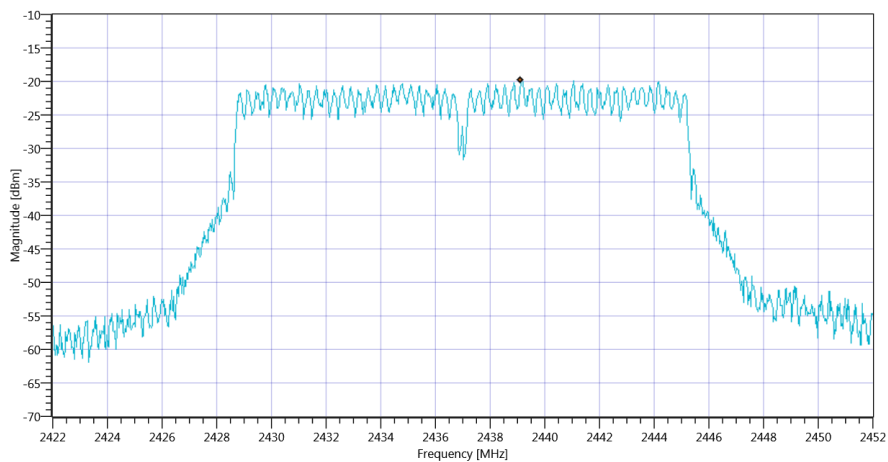

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode_15012020_110517.png

TEST FINISHED

General Verdict	15.01.2020 11:05:17 / RT: 38 s	PASS
-----------------	--------------------------------	------

53. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 11:13:53
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2457
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2457 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.88 9.94 20
Start [MHz] Stop [MHz]	2442.000 2472.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-19.07	dBm/3KHz	PASS

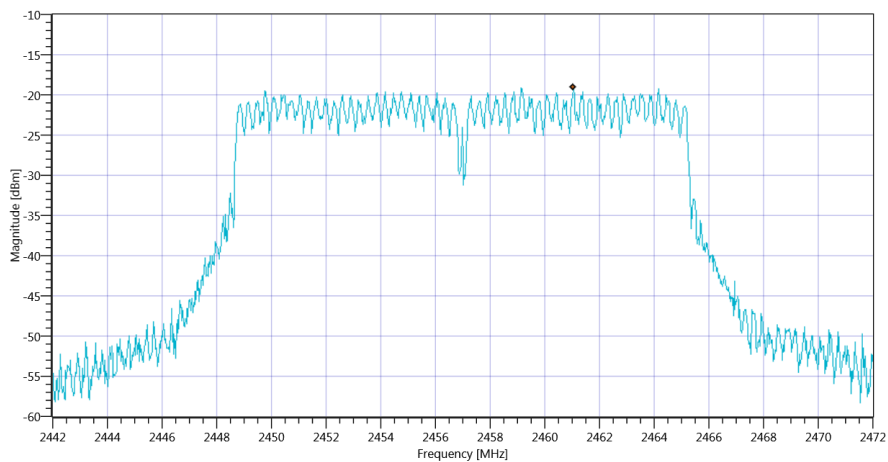

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode_15012020_111432.png

TEST FINISHED

General Verdict	15.01.2020 11:14:33 / RT: 40 s	PASS
-----------------	--------------------------------	------

54. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 11:24:49
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2462 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.09 9.94 15
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-21.07	dBm/3KHz	PASS

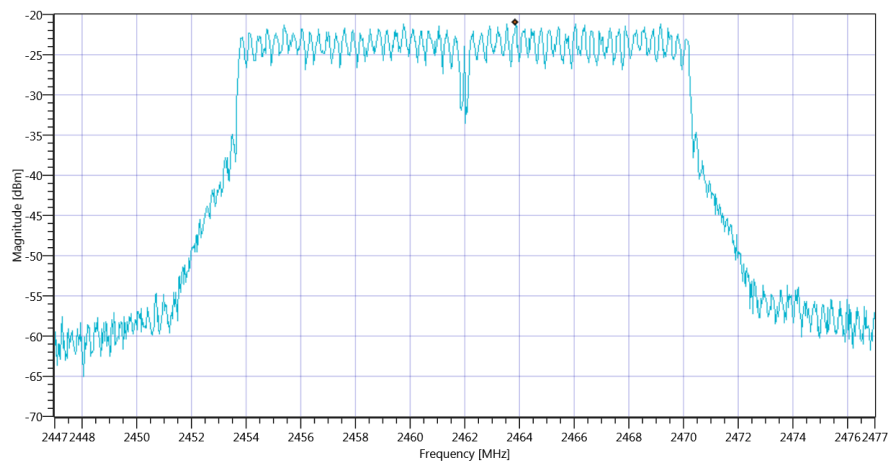

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode_15012020_112528.png

TEST FINISHED

General Verdict	15.01.2020 11:25:29 / RT: 39 s	PASS
-----------------	--------------------------------	------

55. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode

Test References	
TC Start	15.01.2020 11:42:54
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2412 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.65 9.83 15
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-21.59	dBm/3KHz	PASS

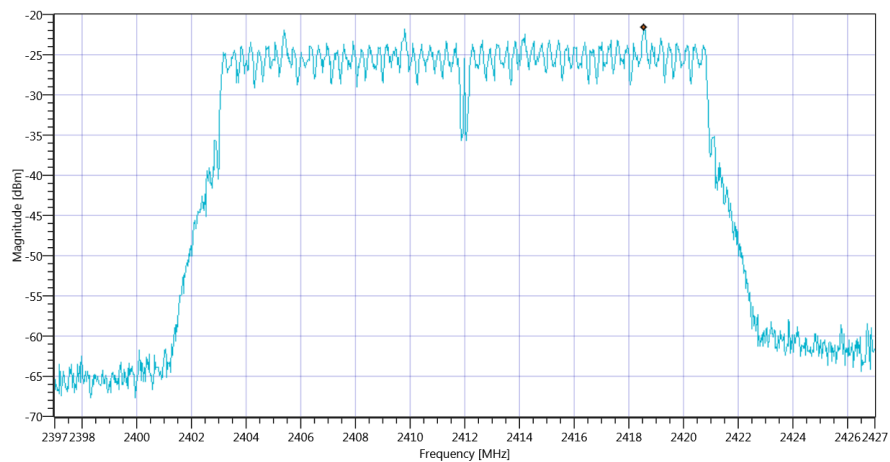

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode_15012020_114332.png

TEST FINISHED

General Verdict	15.01.2020 11:43:33 / RT: 39 s	PASS
-----------------	--------------------------------	------

56. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode

Test References	
TC Start	15.01.2020 11:56:21
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2417
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2417 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.49 9.84 15
Start [MHz] Stop [MHz]	2402.000 2432.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-19.69	dBm/3KHz	PASS

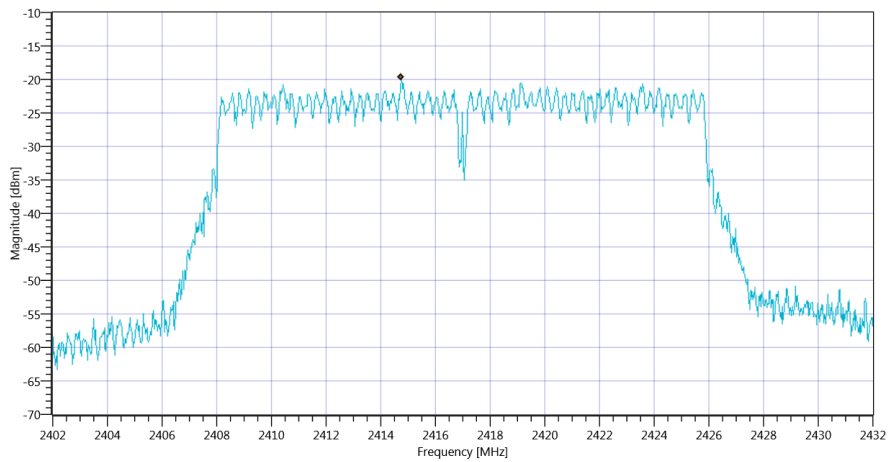

TEST FINISHED

General Verdict	15.01.2020 11:57:00 / RT: 39 s	PASS
-----------------	--------------------------------	------

57. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode

Test References	
TC Start	15.01.2020 12:31:01
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2437 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.11 9.89 15
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-19.8	dBm/3KHz	PASS

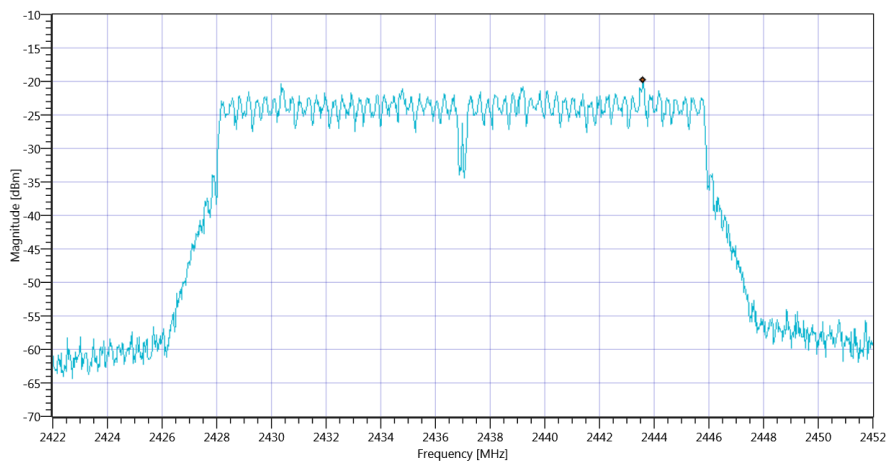

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode_15012020_123139.png

TEST FINISHED

General Verdict	15.01.2020 12:31:40 / RT: 39 s	PASS
-----------------	--------------------------------	------

58. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode

Test References	
TC Start	15.01.2020 12:46:15
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2457
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2457 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.66 9.94 15
Start [MHz] Stop [MHz]	2442.000 2472.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-19.07	dBm/3KHz	PASS

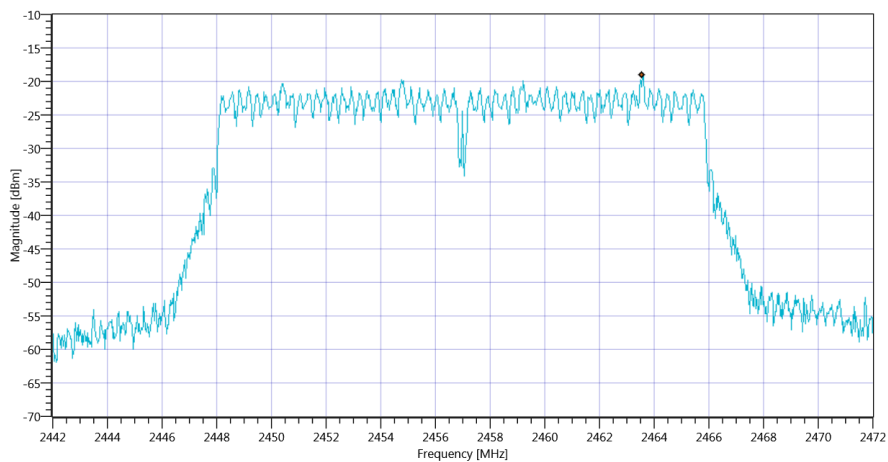

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode_15012020_124653.png

TEST FINISHED

General Verdict	15.01.2020 12:46:54 / RT: 38 s	PASS
-----------------	--------------------------------	------

59. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode

Test References	
TC Start	15.01.2020 13:00:29
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2462 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.97 9.94 15
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-20.09	dBm/3KHz	PASS

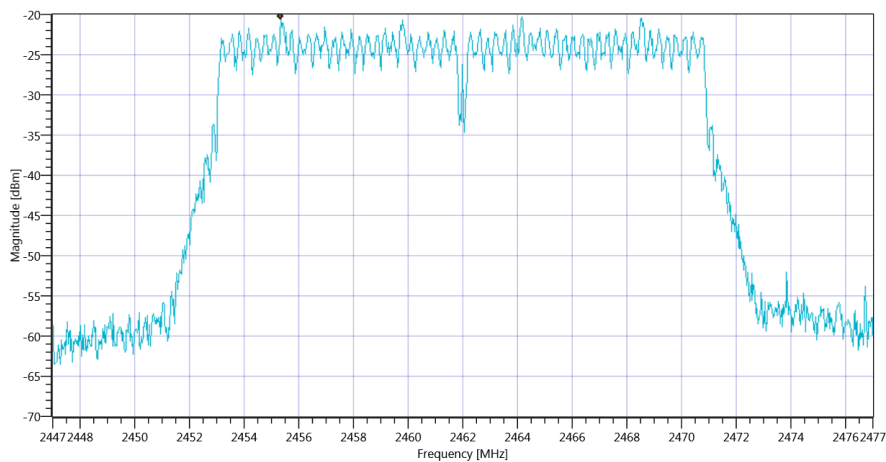

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode_15012020_130107.png

TEST FINISHED

General Verdict	15.01.2020 13:01:08 / RT: 39 s	PASS
-----------------	--------------------------------	------

60. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 13:14:13
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2422 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.55 9.85 10
Start [MHz] Stop [MHz]	2392.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-25.68	dBm/3KHz	PASS

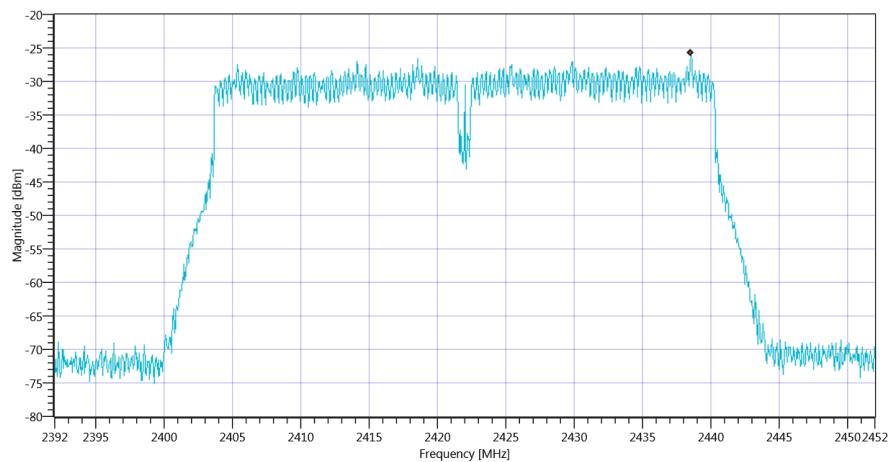

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode_15012020_131452.png

TEST FINISHED

General Verdict	15.01.2020 13:14:53 / RT: 39 s	PASS
-----------------	--------------------------------	------

61. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 13:23:34
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2427
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2427 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.72 9.87 10
Start [MHz] Stop [MHz]	2397.000 2457.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-25.84	dBm/3KHz	PASS

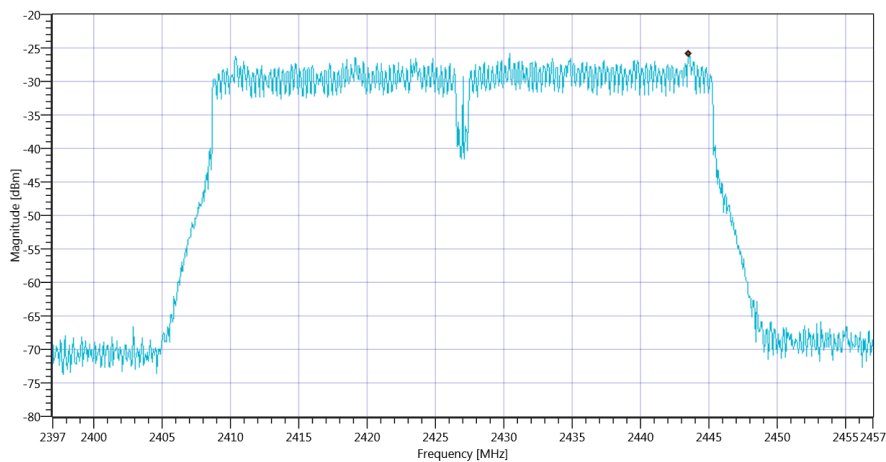

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode_15012020_132414.png

TEST FINISHED

General Verdict	15.01.2020 13:24:15 / RT: 40 s	PASS
-----------------	--------------------------------	------

62. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 13:34:37
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2432
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2432 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.54 9.88 10
Start [MHz] Stop [MHz]	2402.000 2462.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-25.11	dBm/3KHz	PASS

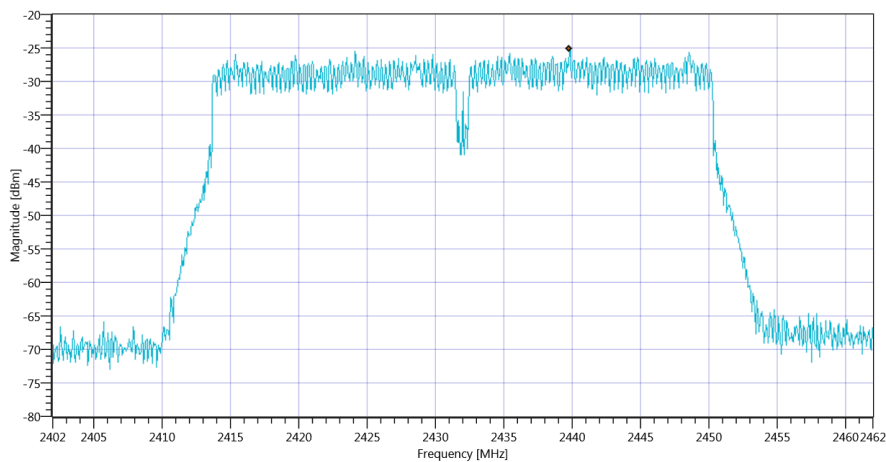

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode_15012020_133517.png

TEST FINISHED

General Verdict	15.01.2020 13:35:18 / RT: 41 s	PASS
-----------------	--------------------------------	------

63. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 14:07:58
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2437 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.50 9.89 10
Start [MHz] Stop [MHz]	2407.000 2467.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-22.64	dBm/3KHz	PASS

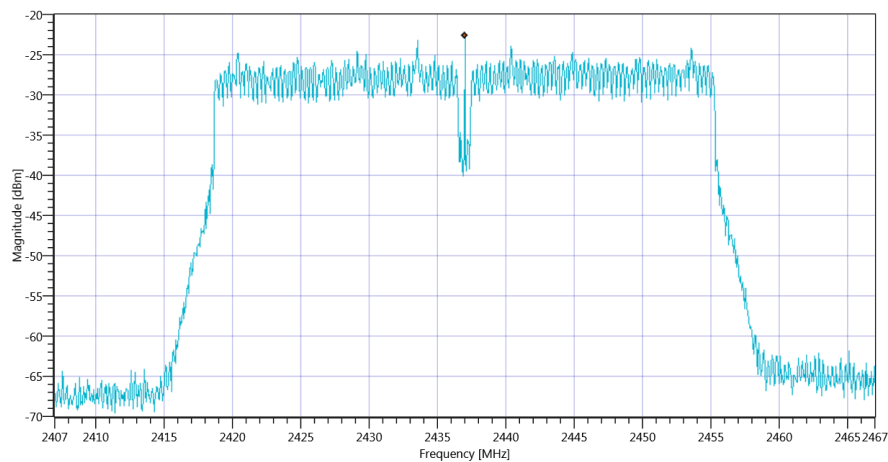

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode_15012020_140838.png

TEST FINISHED

General Verdict	15.01.2020 14:08:39 / RT: 41 s	PASS
-----------------	--------------------------------	------

64. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 14:25:32
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2442
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2442 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.43 9.91 10
Start [MHz] Stop [MHz]	2412.000 2472.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-23.05	dBm/3KHz	PASS

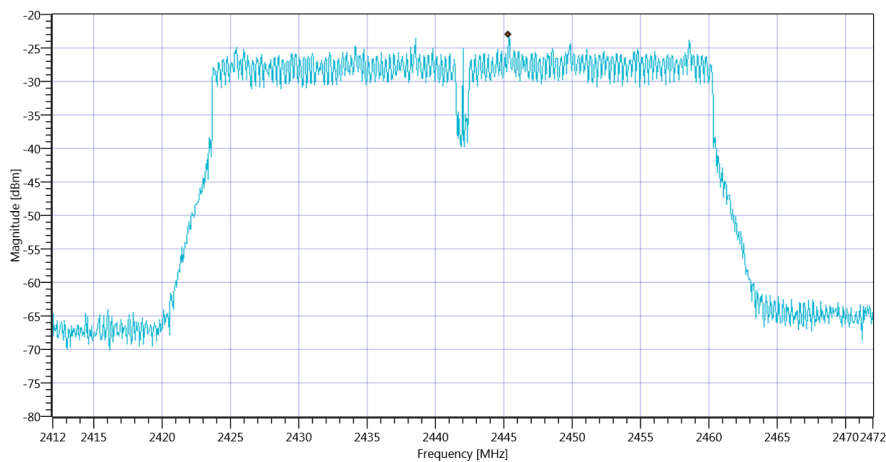

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode_15012020_142612.png

TEST FINISHED

General Verdict	15.01.2020 14:26:13 / RT: 40 s	PASS
-----------------	--------------------------------	------

65. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 14:34:35
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2447
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2447 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.11 9.92 10
Start [MHz] Stop [MHz]	2417.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-24.59	dBm/3KHz	PASS

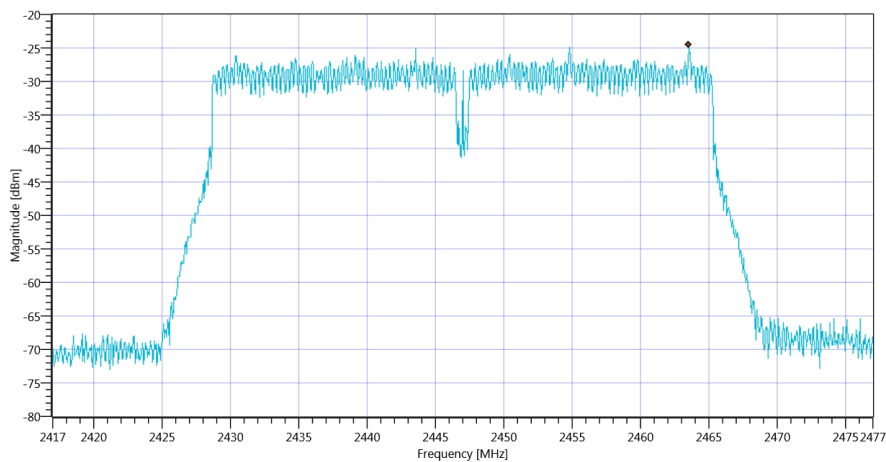

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode_15012020_143515.png

TEST FINISHED

General Verdict	15.01.2020 14:35:16 / RT: 40 s	PASS
-----------------	--------------------------------	------

66. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 14:43:46
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Class / TC Version / TC ID	TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01 Version: 0.0.1 TCID_FCC15247_6
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Test at TX 2452 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.01 9.93 10
Start [MHz] Stop [MHz]	2422.000 2482.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT: TC_VM_FCC15247_Peak_Power_Spectral_Density_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-26.37	dBm/3KHz	PASS

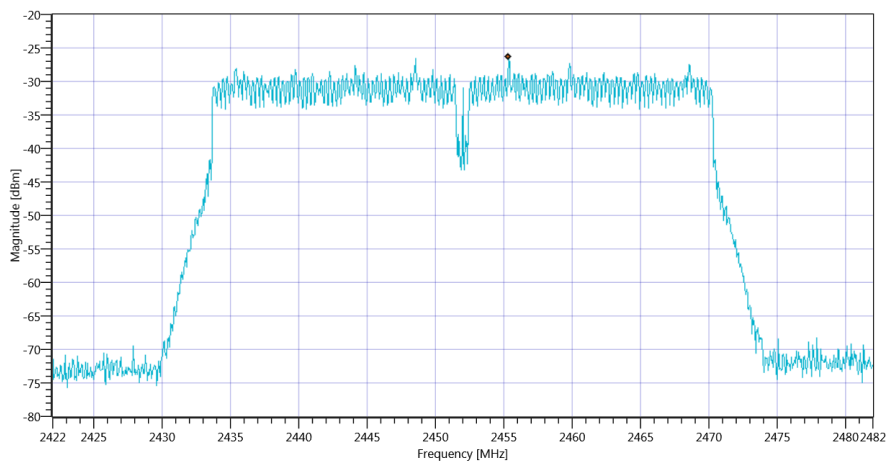

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode_15012020_144426.png

TEST FINISHED

General Verdict	15.01.2020 14:44:26 / RT: 40 s	PASS
-----------------	--------------------------------	------

67. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 b-mode

Test References	
TC Start	15.01.2020 10:03:35
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2412 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	12.88	dBm	PASS

TEST FINISHED

General Verdict 15.01.2020 10:04:46 / RT: 70 s

PASS

68. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 b-mode

Test References	
TC Start	15.01.2020 10:14:40
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2437 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	12.78	dBm	PASS

TEST FINISHED

General Verdict 15.01.2020 10:14:55 / RT: 14 s

PASS

69. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 b-mode

Test References	
TC Start	15.01.2020 10:25:34
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2462 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	12.74	dBm	PASS

TEST FINISHED

General Verdict 15.01.2020 10:25:57 / RT: 22 s

PASS

70. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 10:44:07
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2412 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	15.76	dBm	PASS

TEST FINISHED

General Verdict 15.01.2020 10:44:15 / RT: 8 s

PASS

71. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 10:53:07
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2417
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2417 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	16.91	dBm	PASS

TEST FINISHED

General Verdict	15.01.2020 10:53:15 / RT: 8 s	PASS
-----------------	-------------------------------	------

72. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 11:02:16
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2422 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	16.79	dBm	PASS

TEST FINISHED

General Verdict 15.01.2020 11:02:25 / RT: 9 s

PASS

73. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 11:11:56
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2437 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	16.7	dBm	PASS

TEST FINISHED

General Verdict 15.01.2020 11:12:04 / RT: 8 s

PASS

74. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 11:21:09
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2457
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2457 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	17.34	dBm	PASS

TEST FINISHED

General Verdict 15.01.2020 11:21:19 / RT: 9 s

PASS

75. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 11:32:06
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2462 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	15.47	dBm	PASS

TEST FINISHED

General Verdict	15.01.2020 11:32:15 / RT: 8 s	PASS
-----------------	-------------------------------	------

76. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT20-mode

Test References	
TC Start	15.01.2020 11:50:09
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 nHT20-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2412 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	13.56	dBm	PASS

TEST FINISHED

General Verdict 15.01.2020 11:50:17 / RT: 8 s

PASS

77. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT20-mode

Test References	
TC Start	15.01.2020 12:03:36
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 nHT20-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2417
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2417 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	15.52	dBm	PASS

TEST FINISHED

General Verdict 15.01.2020 12:03:44 / RT: 8 s

PASS

78. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT20-mode

Test References	
TC Start	15.01.2020 12:38:17
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 nHT20-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2437 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	15.13	dBm	PASS

TEST FINISHED

General Verdict	15.01.2020 12:38:26 / RT: 8 s	PASS
-----------------	-------------------------------	------

79. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT20-mode

Test References	
TC Start	15.01.2020 12:53:32
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 nHT20-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2457
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2457 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	15.62	dBm	PASS

TEST FINISHED

General Verdict 15.01.2020 12:53:40 / RT: 8 s

PASS

80. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT20-mode

Test References	
TC Start	15.01.2020 13:07:46
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 nHT20-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2462 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	14.54	dBm	PASS

TEST FINISHED

General Verdict 15.01.2020 13:07:55 / RT: 9 s

PASS

81. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 13:21:32
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 nHT40-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2422 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	10.41	dBm	PASS

TEST FINISHED

General Verdict 15.01.2020 13:21:41 / RT: 8 s

PASS

82. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 13:30:53
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 nHT40-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2427
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2427 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	11.87	dBm	PASS

TEST FINISHED

General Verdict	15.01.2020 13:31:01 / RT: 8 s	PASS
-----------------	-------------------------------	------

83. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 13:41:55
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 nHT40-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2432
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2432 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	12.24	dBm	PASS

TEST FINISHED

General Verdict 15.01.2020 13:42:04 / RT: 8 s

PASS

84. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 14:15:15
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 nHT40-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2437 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	12.81	dBm	PASS

TEST FINISHED

General Verdict	15.01.2020 14:15:24 / RT: 8 s	PASS
-----------------	-------------------------------	------

85. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 14:32:49
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 nHT40-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2442
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2442 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	12.53	dBm	PASS

TEST FINISHED

General Verdict 15.01.2020 14:32:58 / RT: 8 s

PASS

86. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 14:41:54
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 nHT40-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2447
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2447 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	11.85	dBm	PASS

TEST FINISHED

General Verdict	15.01.2020 14:42:03 / RT: 8 s	PASS
-----------------	-------------------------------	------

87. FCC Part 15.247 Maximum Peak Conducted Output Power Powermeter DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 14:51:05
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01 Version: 0.0.1 TCID_FCC15247_3
My Description	FCC 15.247 Maximum Peak Output Power Powermeter Conducted DTS - WLAN 2G4 nHT40-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - PowerMeter
Devices in use	PM: Keysight Technologies,U2042XA,MY58020014,A.02.06

Test at TX 2452 MHz

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_Powermeter_DTS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	9.97	dBm	PASS

TEST FINISHED

General Verdict	15.01.2020 14:51:13 / RT: 8 s	PASS
-----------------	-------------------------------	------


88. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 b-mode

Test References	
TC Start	15.01.2020 10:02:37
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
Class / TC Version / TC ID	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01 Version: 0.0.1 TCID_FCC15247_7
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2412 MHz


RESULT: Duty Cycle evaluation					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	Information
Duty Cycle max	---	---	0	dB	Information
Duty Cycle (Burst Ratio) min	---	---	1	---	Information
Duty Cycle min	---	---	0	dB	Information

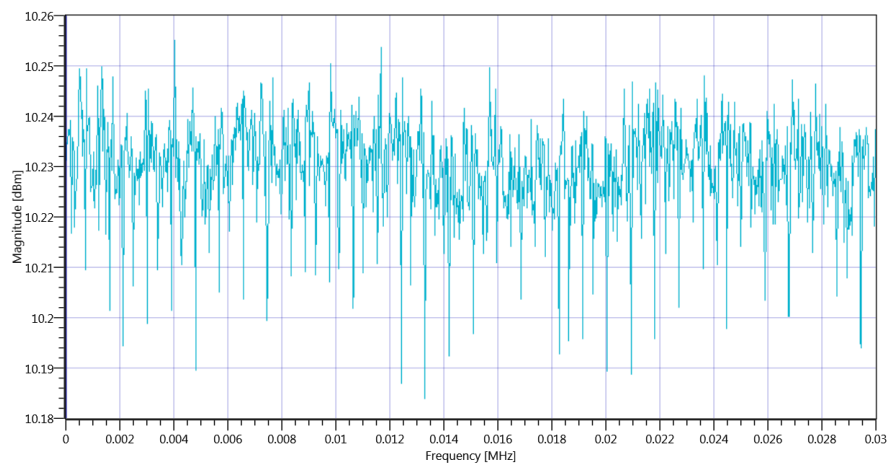

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 b-mode 2412 MHz - Duty Cycle_15012020_100306.png

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.02 9.83 25
Start [MHz] Stop [MHz]	2388.000 2390.000
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

RESULT: TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0	dB	Information
Band Power without Antenna Gain Avg	---	---	-52.41	dBm	Information
Band Power without Antenna Gain Avg DC corrected	---	---	-52.41	dBm	Information
Band Power incl. Antenna Gain Avg DC corrected	---	-41.23	-49.11	dBm	PASS

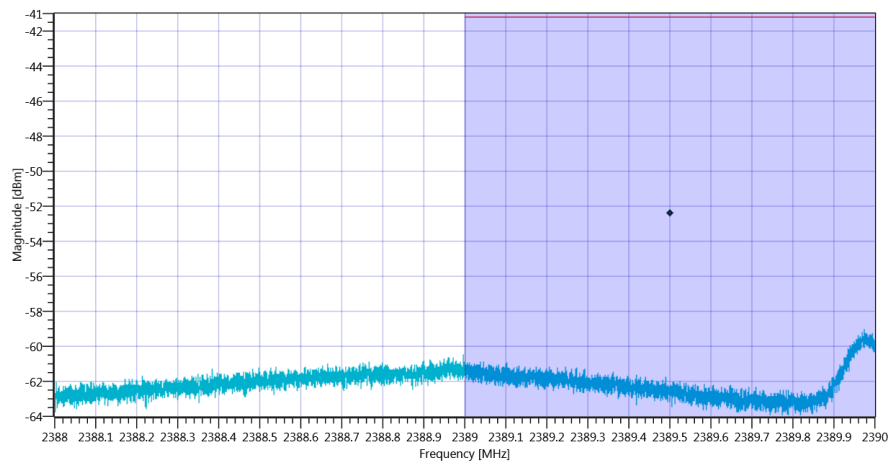

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 b-mode_15012020_100330.png

TEST FINISHED

General Verdict

15.01.2020 10:03:31 / RT: 53 s

PASS


89. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 b-mode

Test References	
TC Start	15.01.2020 10:24:48
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
Class / TC Version / TC ID	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01 Version: 0.0.1 TCID_FCC15247_7
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2462 MHz


RESULT: Duty Cycle evaluation					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	Information
Duty Cycle max	---	---	0	dB	Information
Duty Cycle (Burst Ratio) min	---	---	1	---	Information
Duty Cycle min	---	---	0	dB	Information

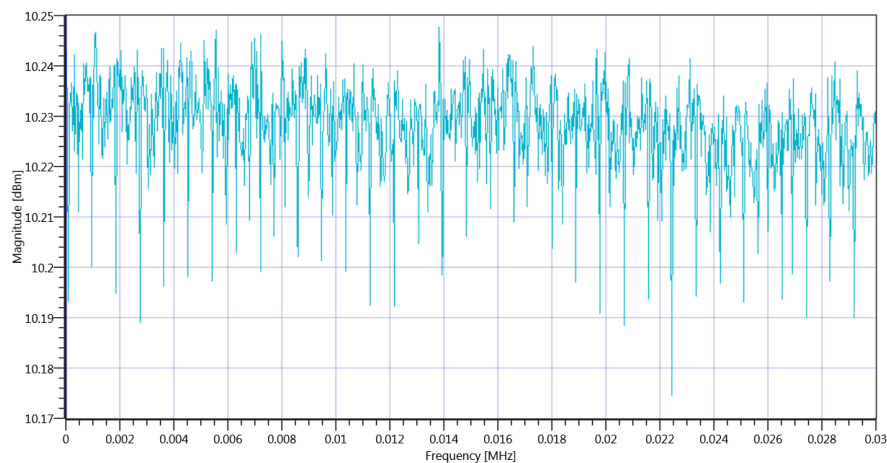

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 b-mode 2462 MHz - Duty Cycle_15012020_102505.png

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.93 9.94 20
Start [MHz] Stop [MHz]	2483.500 2485.500
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

RESULT: TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0	dB	Information
Band Power without Antenna Gain Avg	---	---	-54.94	dBm	Information
Band Power without Antenna Gain Avg DC corrected	---	---	-54.94	dBm	Information
Band Power incl. Antenna Gain Avg DC corrected	---	-41.23	-51.64	dBm	PASS

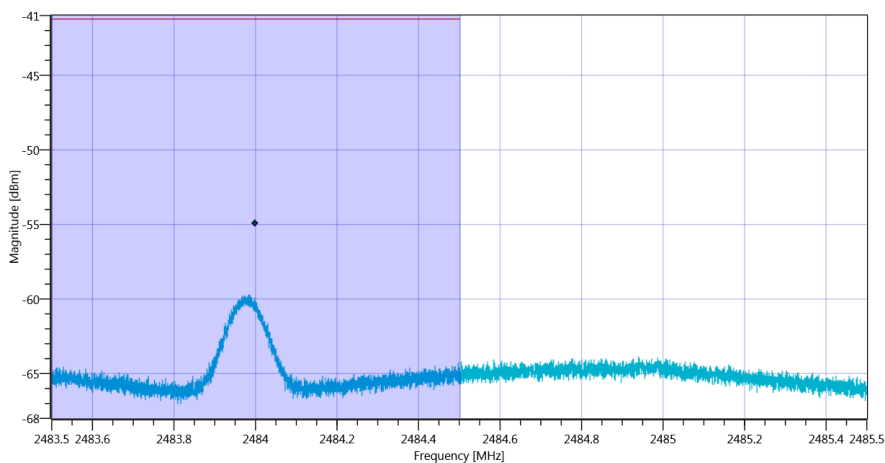

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 b-mode_15012020_102529.png

TEST FINISHED		
General Verdict	15.01.2020 10:25:30 / RT: 41 s	PASS


90. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 10:43:22
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
Class / TC Version / TC ID	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01 Version: 0.0.1 TCID_FCC15247_7
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2412 MHz


RESULT: Duty Cycle evaluation					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	Information
Duty Cycle max	---	---	0	dB	Information
Duty Cycle (Burst Ratio) min	---	---	1	---	Information
Duty Cycle min	---	---	0	dB	Information

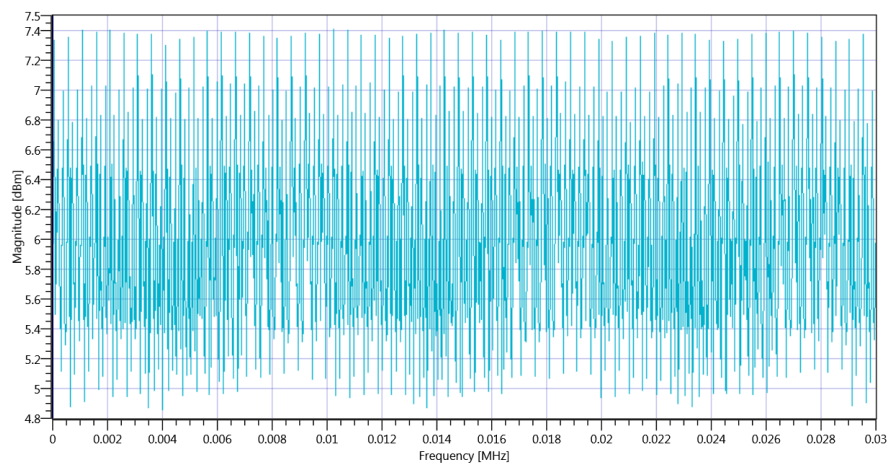

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode 2412 MHz - Duty Cycle_15012020_104338.png

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.58 9.83 20
Start [MHz] Stop [MHz]	2388.000 2390.000
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

RESULT: TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0	dB	Information
Band Power without Antenna Gain Avg	---	---	-51.22	dBm	Information
Band Power without Antenna Gain Avg DC corrected	---	---	-51.22	dBm	Information
Band Power incl. Antenna Gain Avg DC corrected	---	-41.23	-47.92	dBm	PASS

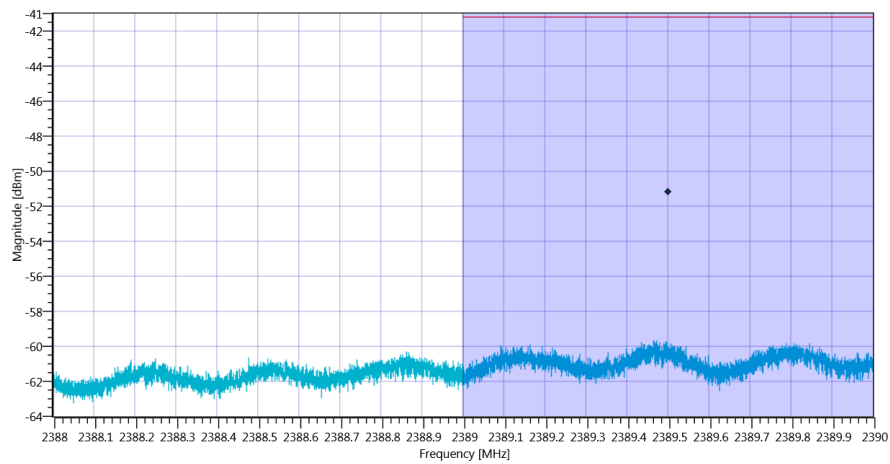

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode_15012020_104402.png

TEST FINISHED

General Verdict

15.01.2020 10:44:03 / RT: 40 s

PASS


91. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 10:52:21
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
Class / TC Version / TC ID	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01 Version: 0.0.1 TCID_FCC15247_7
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2417
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2417 MHz


RESULT: Duty Cycle evaluation					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	Information
Duty Cycle max	---	---	0	dB	Information
Duty Cycle (Burst Ratio) min	---	---	1	---	Information
Duty Cycle min	---	---	0	dB	Information

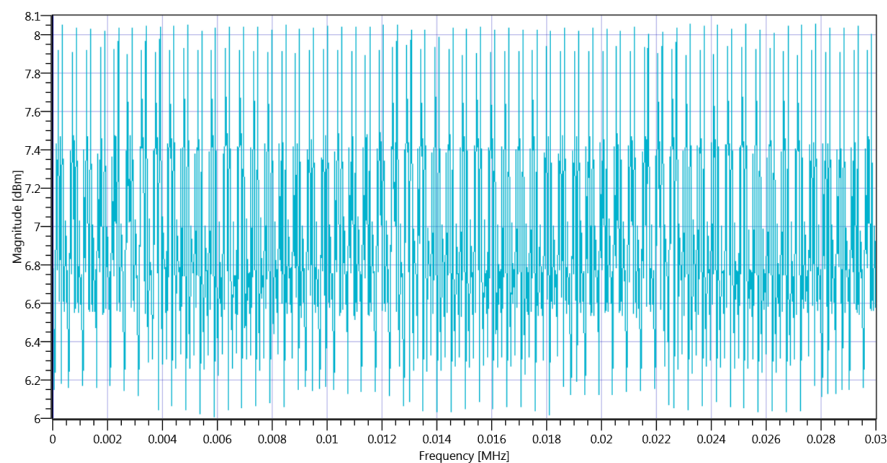

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode 2417 MHz - Duty Cycle_15012020_105238.png

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.66 9.84 20
Start [MHz] Stop [MHz]	2388.000 2390.000
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

RESULT: TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0	dB	Information
Band Power without Antenna Gain Avg	---	---	-53.42	dBm	Information
Band Power without Antenna Gain Avg DC corrected	---	---	-53.42	dBm	Information
Band Power incl. Antenna Gain Avg DC corrected	---	-41.23	-50.12	dBm	PASS

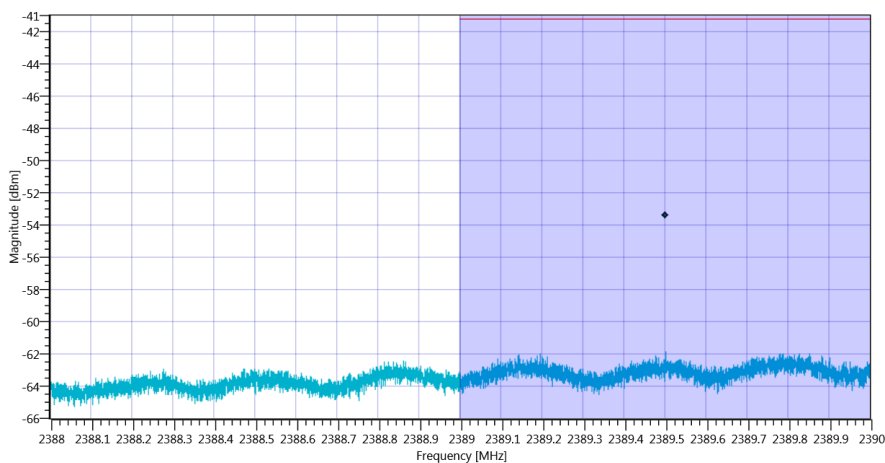

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode_15012020_105302.png

TEST FINISHED		
General Verdict	15.01.2020 10:53:03 / RT: 41 s	PASS


92. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 11:01:30
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
Class / TC Version / TC ID	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01 Version: 0.0.1 TCID_FCC15247_7
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2422 MHz


RESULT: Duty Cycle evaluation					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	Information
Duty Cycle max	---	---	0	dB	Information
Duty Cycle (Burst Ratio) min	---	---	1	---	Information
Duty Cycle min	---	---	0	dB	Information

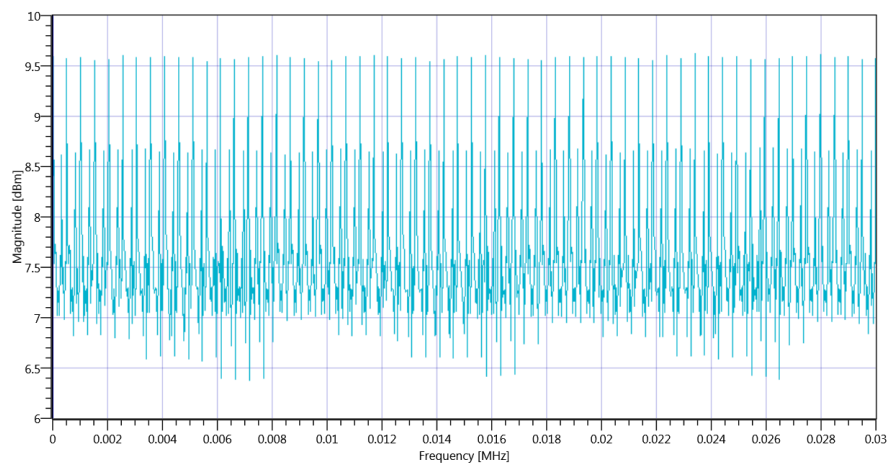

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode 2422 MHz - Duty Cycle_15012020_110147.png

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.05 9.85 25
Start [MHz] Stop [MHz]	2388.000 2390.000
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

RESULT: TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0	dB	Information
Band Power without Antenna Gain Avg	---	---	-52.92	dBm	Information
Band Power without Antenna Gain Avg DC corrected	---	---	-52.92	dBm	Information
Band Power incl. Antenna Gain Avg DC corrected	---	-41.23	-49.62	dBm	PASS

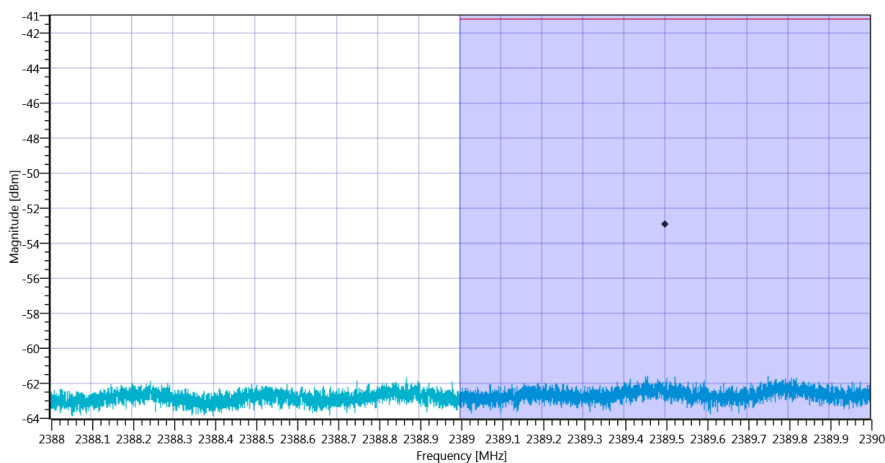

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode_15012020_110211.png

TEST FINISHED		
General Verdict	15.01.2020 11:02:11 / RT: 41 s	PASS


93. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 11:20:24
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
Class / TC Version / TC ID	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01 Version: 0.0.1 TCID_FCC15247_7
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2457
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2457 MHz


RESULT: Duty Cycle evaluation					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	Information
Duty Cycle max	---	---	0	dB	Information
Duty Cycle (Burst Ratio) min	---	---	1	---	Information
Duty Cycle min	---	---	0	dB	Information

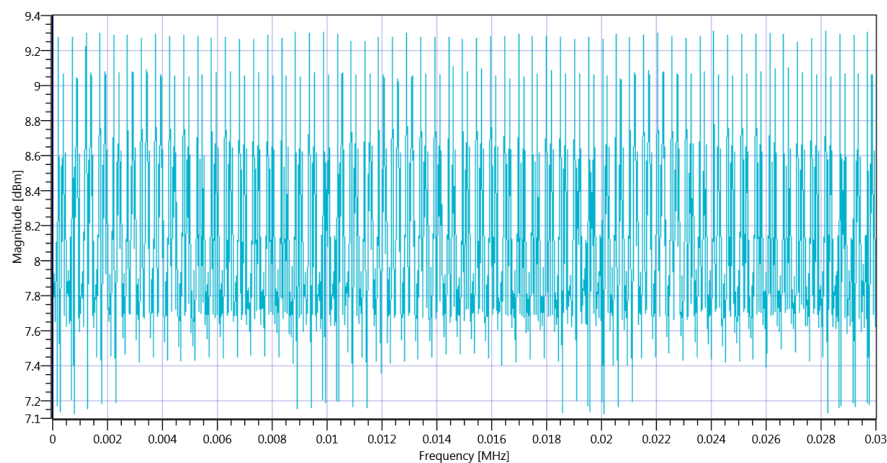

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode 2457 MHz - Duty Cycle_15012020_112040.png

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.69 9.94 25
Start [MHz] Stop [MHz]	2483.500 2485.500
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

RESULT: TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0	dB	Information
Band Power without Antenna Gain Avg	---	---	-47.75	dBm	Information
Band Power without Antenna Gain Avg DC corrected	---	---	-47.75	dBm	Information
Band Power incl. Antenna Gain Avg DC corrected	---	-41.23	-44.45	dBm	PASS

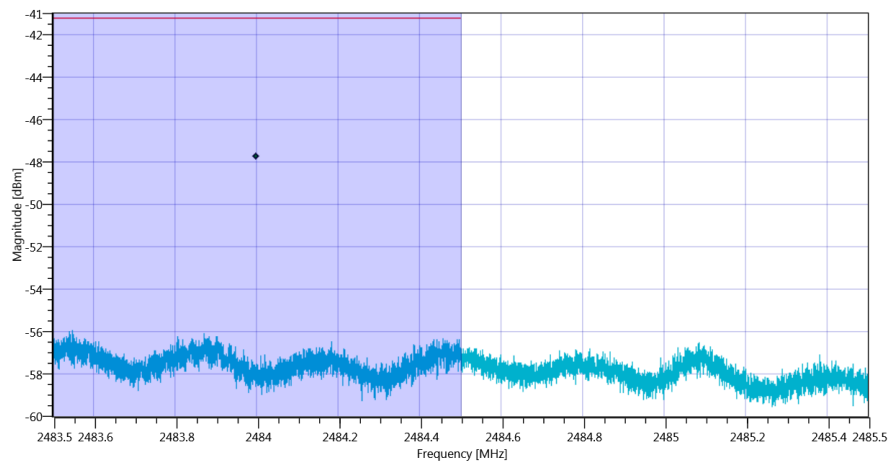

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode_15012020_112104.png

TEST FINISHED

General Verdict

15.01.2020 11:21:05 / RT: 41 s

PASS


94. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode

Test References	
TC Start	15.01.2020 11:31:20
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
Class / TC Version / TC ID	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01 Version: 0.0.1 TCID_FCC15247_7
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2462 MHz


RESULT: Duty Cycle evaluation					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	Information
Duty Cycle max	---	---	0	dB	Information
Duty Cycle (Burst Ratio) min	---	---	1	---	Information
Duty Cycle min	---	---	0	dB	Information

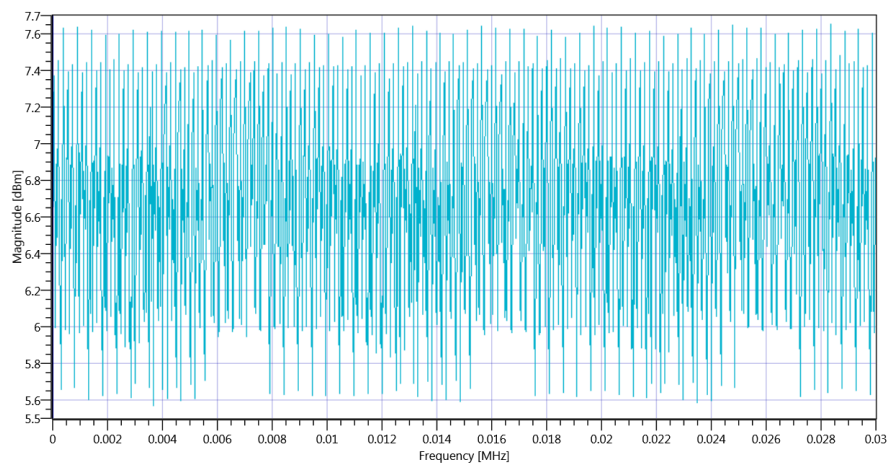

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode 2462 MHz - Duty Cycle_15012020_113137.png

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.31 9.94 20
Start [MHz] Stop [MHz]	2483.500 2485.500
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

RESULT: TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0	dB	Information
Band Power without Antenna Gain Avg	---	---	-48.9	dBm	Information
Band Power without Antenna Gain Avg DC corrected	---	---	-48.9	dBm	Information
Band Power incl. Antenna Gain Avg DC corrected	---	-41.23	-45.6	dBm	PASS

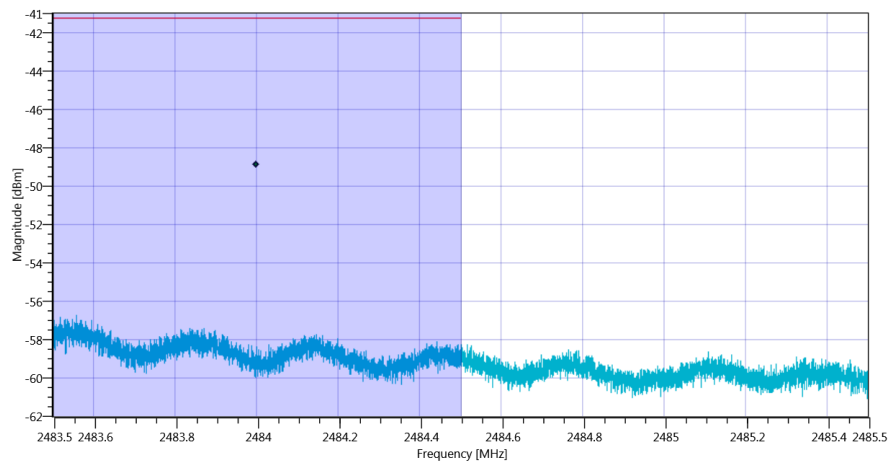

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode_15012020_113201.png

TEST FINISHED

General Verdict

15.01.2020 11:32:02 / RT: 41 s

PASS


95. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT20-mode

Test References	
TC Start	15.01.2020 11:49:23
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
Class / TC Version / TC ID	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01 Version: 0.0.1 TCID_FCC15247_7
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2412 MHz


RESULT: Duty Cycle evaluation					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	Information
Duty Cycle max	---	---	0	dB	Information
Duty Cycle (Burst Ratio) min	---	---	1	---	Information
Duty Cycle min	---	---	0	dB	Information

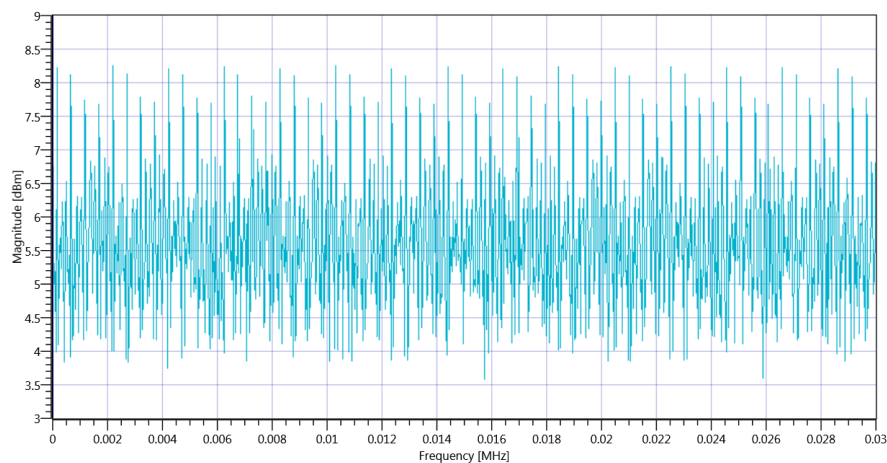

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT20-mode 2412 MHz - Duty Cycle_15012020_114940.png

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.43 9.83 20
Start [MHz] Stop [MHz]	2388.000 2390.000
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

RESULT: TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0	dB	Information
Band Power without Antenna Gain Avg	---	---	-52.05	dBm	Information
Band Power without Antenna Gain Avg DC corrected	---	---	-52.05	dBm	Information
Band Power incl. Antenna Gain Avg DC corrected	---	-41.23	-48.75	dBm	PASS

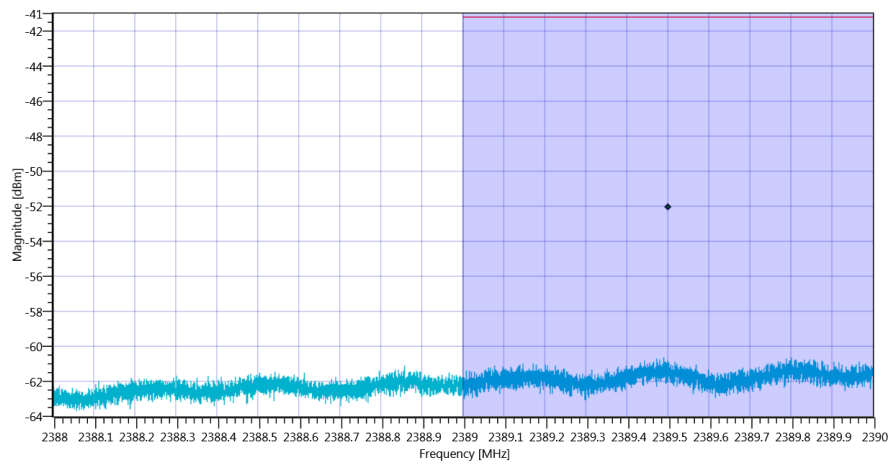

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT20-mode_15012020_115004.png

TEST FINISHED

General Verdict

15.01.2020 11:50:05 / RT: 41 s

PASS


96. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT20-mode

Test References	
TC Start	15.01.2020 12:02:50
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
Class / TC Version / TC ID	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01 Version: 0.0.1 TCID_FCC15247_7
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2417
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2417 MHz


RESULT: Duty Cycle evaluation					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	Information
Duty Cycle max	---	---	0	dB	Information
Duty Cycle (Burst Ratio) min	---	---	1	---	Information
Duty Cycle min	---	---	0	dB	Information

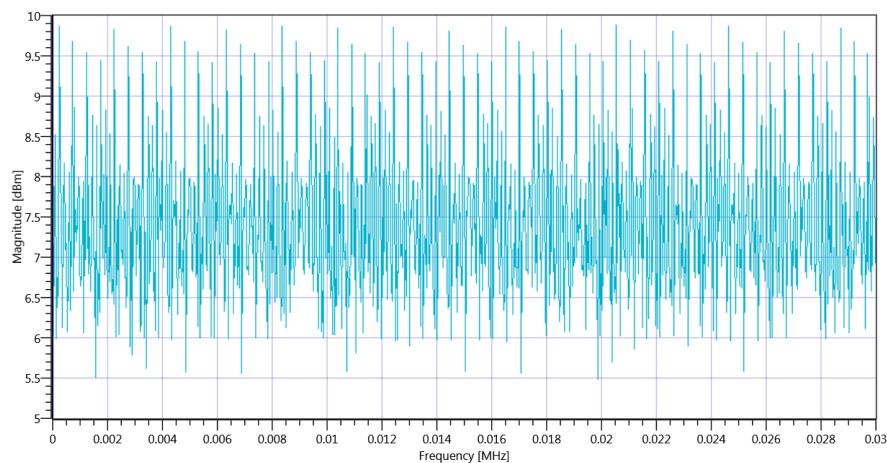

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT20-mode 2417 MHz - Duty Cycle_15012020_120307.png

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.28 9.84 20
Start [MHz] Stop [MHz]	2388.000 2390.000
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

RESULT: TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0	dB	Information
Band Power without Antenna Gain Avg	---	---	-53.46	dBm	Information
Band Power without Antenna Gain Avg DC corrected	---	---	-53.46	dBm	Information
Band Power incl. Antenna Gain Avg DC corrected	---	-41.23	-50.16	dBm	PASS

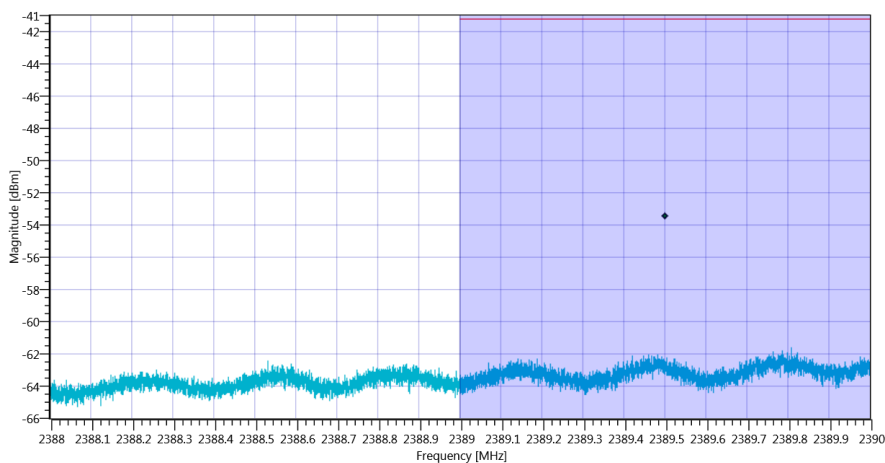

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT20-mode_15012020_120330.png

TEST FINISHED		
General Verdict	15.01.2020 12:03:31 / RT: 40 s	PASS


97. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT20-mode

Test References	
TC Start	15.01.2020 12:52:45
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
Class / TC Version / TC ID	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01 Version: 0.0.1 TCID_FCC15247_7
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2457
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2457 MHz


RESULT: Duty Cycle evaluation					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	Information
Duty Cycle max	---	---	0	dB	Information
Duty Cycle (Burst Ratio) min	---	---	1	---	Information
Duty Cycle min	---	---	0	dB	Information

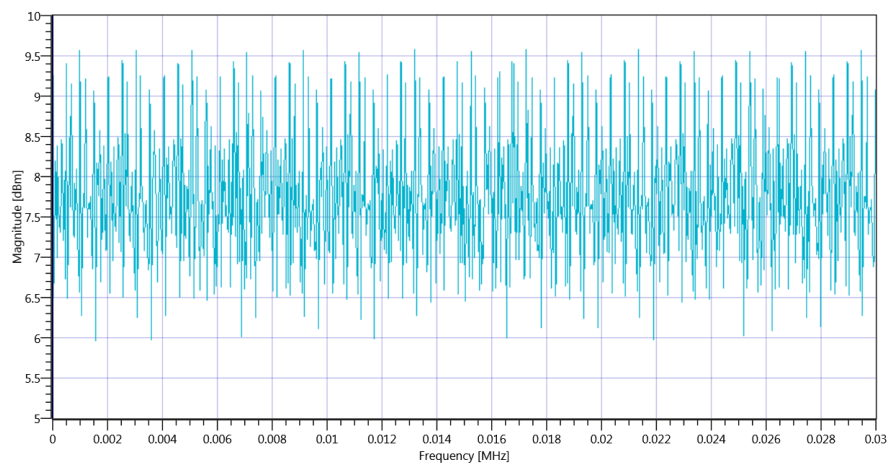

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT20-mode 2457 MHz - Duty Cycle_15012020_125302.png

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.75 9.94 20
Start [MHz] Stop [MHz]	2483.500 2485.500
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

RESULT: TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0	dB	Information
Band Power without Antenna Gain Avg	---	---	-51.4	dBm	Information
Band Power without Antenna Gain Avg DC corrected	---	---	-51.4	dBm	Information
Band Power incl. Antenna Gain Avg DC corrected	---	-41.23	-48.1	dBm	PASS

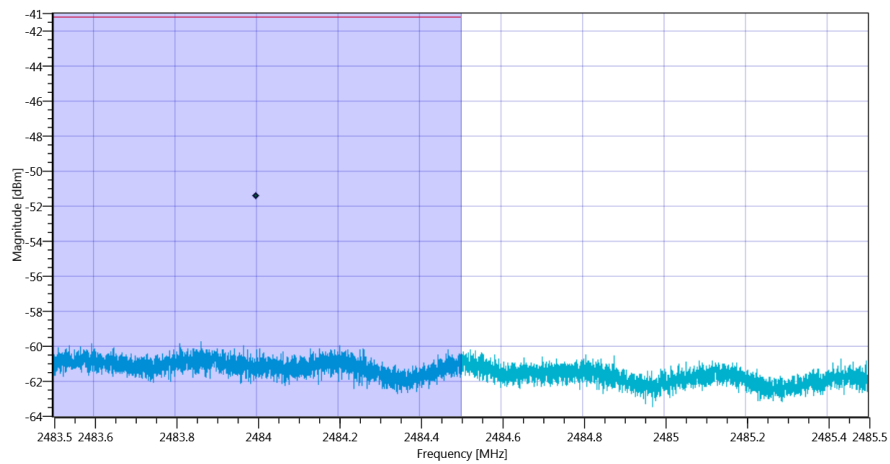

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT20-mode_15012020_125326.png

TEST FINISHED

General Verdict

15.01.2020 12:53:27 / RT: 41 s

PASS


98. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT20-mode

Test References	
TC Start	15.01.2020 13:06:59
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
Class / TC Version / TC ID	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01 Version: 0.0.1 TCID_FCC15247_7
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2462 MHz


RESULT: Duty Cycle evaluation					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	Information
Duty Cycle max	---	---	0	dB	Information
Duty Cycle (Burst Ratio) min	---	---	1	---	Information
Duty Cycle min	---	---	0	dB	Information

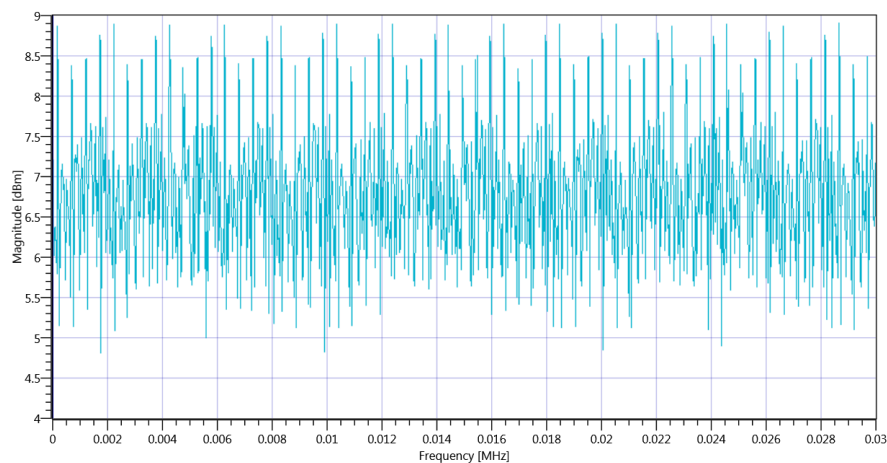

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT20-mode 2462 MHz - Duty Cycle_15012020_130716.png

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.81 9.94 20
Start [MHz] Stop [MHz]	2483.500 2485.500
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

RESULT: TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0	dB	Information
Band Power without Antenna Gain Avg	---	---	-47.9	dBm	Information
Band Power without Antenna Gain Avg DC corrected	---	---	-47.9	dBm	Information
Band Power incl. Antenna Gain Avg DC corrected	---	-41.23	-44.6	dBm	PASS

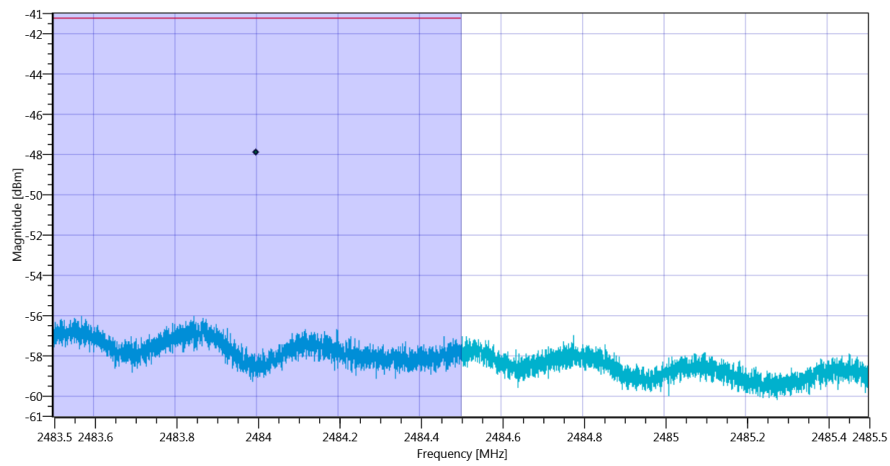

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT20-mode_15012020_130740.png

TEST FINISHED

General Verdict

15.01.2020 13:07:41 / RT: 41 s

PASS


99. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 13:20:47
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
Class / TC Version / TC ID	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01 Version: 0.0.1 TCID_FCC15247_7
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2422 MHz


RESULT: Duty Cycle evaluation					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	Information
Duty Cycle max	---	---	0	dB	Information
Duty Cycle (Burst Ratio) min	---	---	1	---	Information
Duty Cycle min	---	---	0	dB	Information

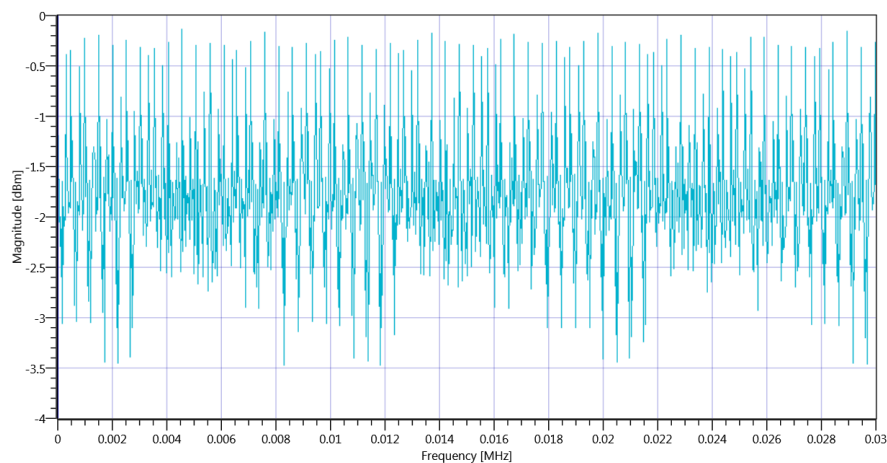

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT40-mode 2422 MHz - Duty Cycle_15012020_132103.png

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.88 9.85 15
Start [MHz] Stop [MHz]	2388.000 2390.000
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

RESULT: TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0	dB	Information
Band Power without Antenna Gain Avg	---	---	-56.33	dBm	Information
Band Power without Antenna Gain Avg DC corrected	---	---	-56.33	dBm	Information
Band Power incl. Antenna Gain Avg DC corrected	---	-41.23	-53.03	dBm	PASS

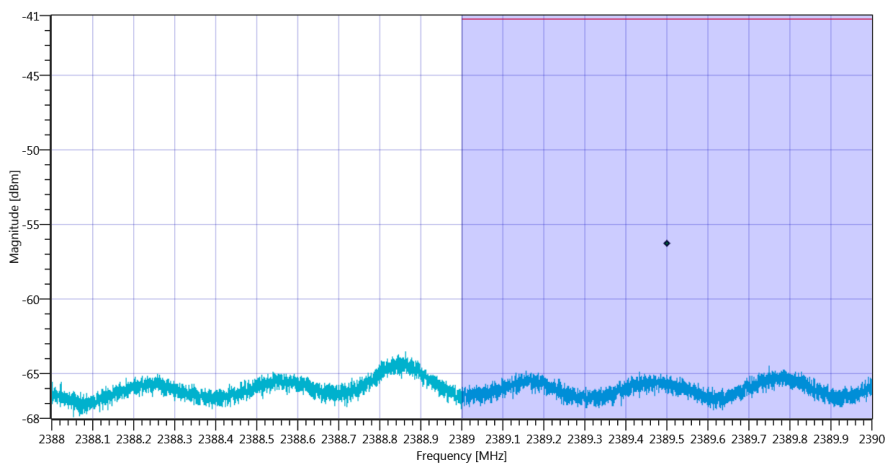

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT40-mode_15012020_132127.png

TEST FINISHED		
General Verdict	15.01.2020 13:21:28 / RT: 41 s	PASS


100. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 13:30:07
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
Class / TC Version / TC ID	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01 Version: 0.0.1 TCID_FCC15247_7
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2427
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2427 MHz


RESULT: Duty Cycle evaluation					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	Information
Duty Cycle max	---	---	0	dB	Information
Duty Cycle (Burst Ratio) min	---	---	1	---	Information
Duty Cycle min	---	---	0	dB	Information

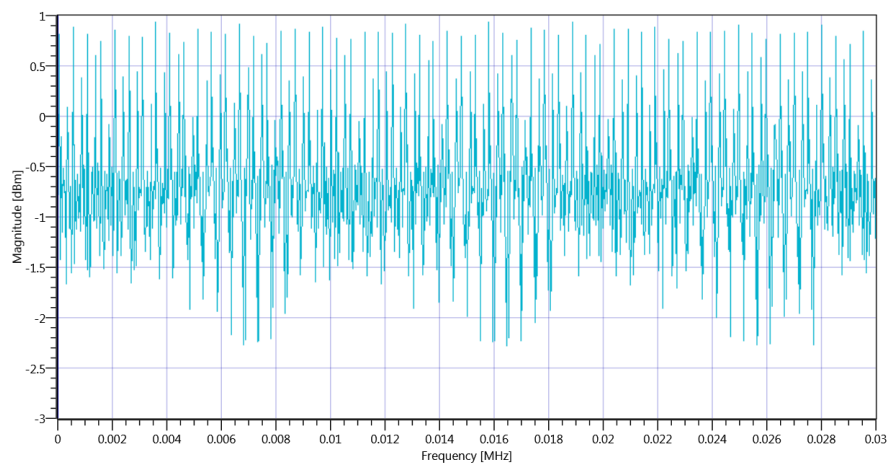

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT40-mode 2427 MHz - Duty Cycle_15012020_133024.png

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.75 9.87 15
Start [MHz] Stop [MHz]	2388.000 2390.000
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

RESULT: TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0	dB	Information
Band Power without Antenna Gain Avg	---	---	-55.76	dBm	Information
Band Power without Antenna Gain Avg DC corrected	---	---	-55.76	dBm	Information
Band Power incl. Antenna Gain Avg DC corrected	---	-41.23	-52.46	dBm	PASS

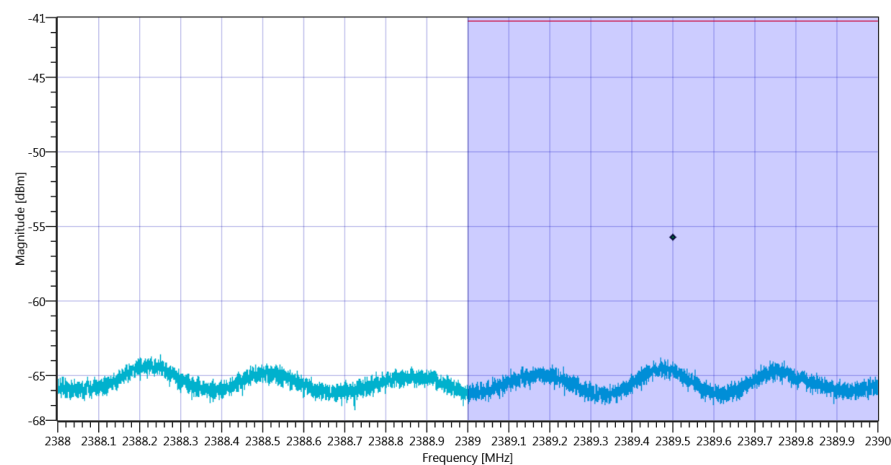

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT40-mode_15012020_133048.png

TEST FINISHED		
General Verdict	15.01.2020 13:30:48 / RT: 41 s	PASS


101. FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT40-mode

Test References	
TC Start	15.01.2020 13:41:09
System Version	1.0.0.29
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
Class / TC Version / TC ID	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01 Version: 0.0.1 TCID_FCC15247_7
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2432
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test at TX 2432 MHz

RESULT: Duty Cycle evaluation					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	Information
Duty Cycle max	---	---	0	dB	Information
Duty Cycle (Burst Ratio) min	---	---	1	---	Information
Duty Cycle min	---	---	0	dB	Information

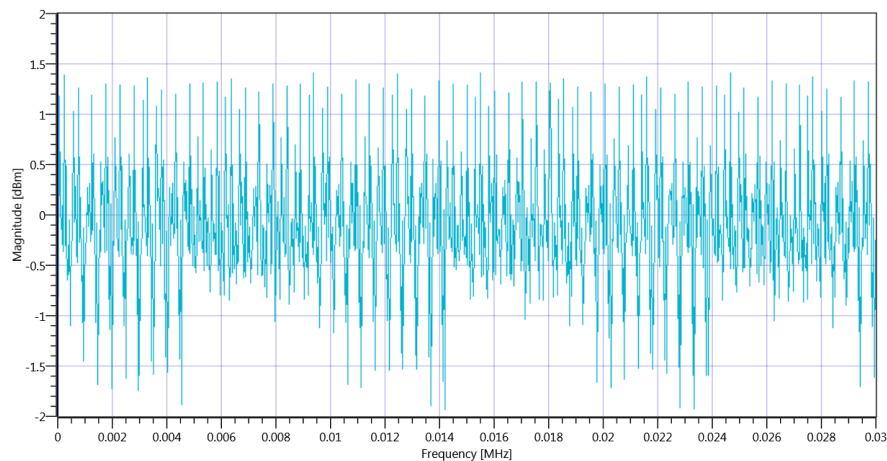

Plot_FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT40-mode 2432 MHz - Duty Cycle_15012020_134126.png

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.26 9.88 15
Start [MHz] Stop [MHz]	2388.000 2390.000
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

RESULT: TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Avg_DC_corrected_V01					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0	dB	Information
Band Power without Antenna Gain Avg	---	---	-56.28	dBm	Information
Band Power without Antenna Gain Avg DC corrected	---	---	-56.28	dBm	Information
Band Power incl. Antenna Gain Avg DC corrected	---	-41.23	-52.98	dBm	PASS