



LCIE



Accreditation
N°1-1633
Scope available on
www.cofrac.fr

Template : May 28th, 2024

TEST REPORT

N°: 21490906-798426-B(FILE#7873522)

Version: 01

Subject

Radio spectrum tests according to the standards:
FCC CFR 47 Part 15.247 & ANSI C63.10
RSS-247 & RSS-Gen

Issued to

INGENICO

9 Avenue de la gare - Rovaltain TGV BP25156
26958 – VALENCE Cedex 9
FRANCE

Apparatus under test

- Product
- Trade mark
- Manufacturer
- Family range
- Model under test
- Serial number
- FCCID
- IC

Payment terminal

INGENICO
INGENICO
AXIUM
AXIUM RX9000
2419MR900209 / 2419MR900267
XKB-RX9CLWBT
2586D-RX9CLWBT

Conclusion

See Test Program chapter

Test date
Test location
FCC Test site
ISED Test site
Sample receipt date
Composition of document
Document issued on

May 13, 2024 to June 07, 2024
LCIE Grenoble
FR0008 - 918017 (MOI)
6500A (MOI)
May 10, 2024
67 pages
August 12, 2024

Written by :

Akram HAKKARI
Tests operator

Approved by :

Majid MOURZAGH
Technical manager



Reproduction of this document is only authorized in its complete form. Any partial reproduction or any insertion of results in an accompanying text with a view to their distribution must receive prior and formal agreement from LCIE. This document results from tests carried out on a specimen, sample or test piece. It does not prejudice the conformity of all the products manufactured to the object tested. Unless otherwise indicated or rule specified by the test method, the decision of conformity does not take into account measurement uncertainty. It in no way prejudices a certification decision. The accreditation of the COFRAC Testing Section attests to the technical competence of the laboratories for the tests covered by the accreditation only. If certain tests mentioned in this report were carried out outside the framework of COFRAC accreditation, they are identified by the symbol

LCIE

Laboratoire Central des Industries Electriques
Une société Bureau Veritas

Z.I Centr'alp
170, Rue de Chatagnon
38430 Moirans
FRANCE

Tél. + 33 4 76 07 36 36
contact@lcie.fr
www.lcie.fr



PUBLICATION HISTORY

Version	Date	Author	Modification
01	August 12, 2024	Akram HAKKARI	Creation of the document

Each new edition of this test report replaces and cancels the previous edition. The control of the old editions of report is under responsibility of client.



SUMMARY

1.	TEST PROGRAM	4
2.	EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)	5
3.	OCCUPIED BANDWIDTH.....	12
4.	6DB BANDWIDTH	17
5.	MAXIMUM CONDUCTED OUTPUT POWER	22
6.	POWER SPECTRAL DENSITY	28
7.	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	33
8.	UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS	40
9.	UNCERTAINTIES CHART	67



1. TEST PROGRAM

References

- 47 CFR Part 15.247 (2023)
- RSS 247 Issue 3
- RSS Gen Issue 5
- KDB 558074 D01 DTS Meas Guidance v05r02 [Pb](#)
- KDB 662911 D01 Multiple Transmitter Output v02r01 [Pb](#)
- ANSI C63.10 (2013)

Radio requirement:

Clause - Test Description		Test result - Comments
Occupied Bandwidth	<i>ISED</i>	PASS
6dB Bandwidth	<i>FCC & ISED</i>	PASS
Maximum Conducted Output Power	<i>FCC & ISED</i>	PASS
Power Spectral Density	<i>FCC & ISED</i>	PASS
Unwanted Emissions in Non-Restricted Frequency Bands	<i>FCC & ISED</i>	PASS
Unwanted Emissions in Restricted Frequency Bands	<i>FCC & ISED</i>	PASS
Receiver Radiated Emissions	<i>ISED</i>	PASS(2)
This table is a summary of test report, see conclusion of each clause of this test report for detail.		

(1) Limited program

(2) Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement


NA: Not Applicable

NP: Test Not Performed

2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT):

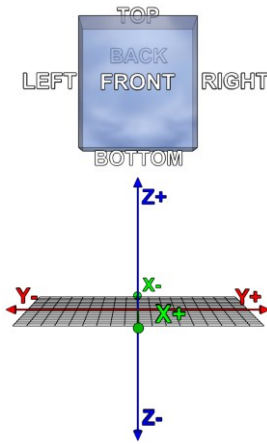Model under test:	AXIUM RX9000		
Serial Number:	2419MR900209 / 2419MR900267		
			
Dimensions:	16cm x 20cm x 2.5cm (Length x Width x Height)		
Type:	Table-Top		

Power supply:

Name	Type	Rating	Reference / Sn	Comments
Supply1	DC	8-14 VDC	NC	-
Supply2	PoE	12.95W max	NC	-

NC: Not communicated by provider

**Inputs/outputs - Cable:**

Access	Type	Length used (m)	Declared <3m	Shielded	Comments
Supply1	240 VAC – 50Hz	1.5	NC	No	-
Supply2	PoE	1.5	NC	Yes	-
Access1	COMBOX	2.2	No	NC	-

NC: Not communicated by provider

Auxiliary equipment used during test:

Type	Reference	Sn	Comments
Laptop	DELL	-	-

NC: Not communicated by provider



Equipment information (declaration of provider):

Bluetooth Low Energy:	v5.0
Chipset / RF Module	FCS950U
Frequency band:	[2400 – 2483.5] MHz
Spectrum Modulation:	DSSS (Tested like it – international agreements)
Number of Channel:	40
Spacing channel:	2MHz
Channel bandwidth:	2MHz
Antenna Type:	Internal
Antenna connector:	Temporary for tests
Antenna requirements §15.203	The transmitter uses an integral antenna and it permanently connected
Transmit chains:	1
Receiver chains	1

CHANNEL PLAN			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
Cmin: 0	2402	Cmid: 20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	Cmax: 39	2480

DATA RATE			
Available	Data Rate (Mbps)	Modulation Type	Worst Case Modulation
☐	0.25	GFSK (1MHz)	☐
☒	1	GFSK (1MHz)	☒
☒	2	GFSK (2MHz)	☐



Antenna Characteristic			
Antenna reference	Gain (dBi)	Frequency Band (MHz)	Impedance(Ω)
M830520	1.1	2400 – 2483.5	50

Hardware information				
Highest internal frequency (PLL, Quartz, Clock, Microprocessor...):		F _{Highest} :	1800	MHz
Firmware (if applicable):		V:	NA	
Software (if applicable):		V:	NA	
Equipment intended:	Mobile			
Type of equipment:	Stand-alone			
Equipment sample:	Production model			
Duty cycle:	Continuous operation			
Operating temperature range:	T _{min} :	-10 °C		
	T _{nom} :	20°C		
	T _{max} :	45 °C		
Operating voltage:	V _{min} (85% Vnom):	204 VAC		
	V _{nom} :	240VAC		
	V _{max} (115% Vnom):	276 VAC		

NC: Not communicated by provider



2.2. RUNNING MODE

Test mode	Description of test mode
Test mode 1	Permanent emission adb root adb remount adb shell bdt_unisoc enable le_enhanced_transmitter_test channel pac_len pattern LE_PHY channel: channel number(hexadecimal). pac_len: Packet length(hexadecimal). Pattern: 0-> PRBS9, 1->11110000, 2->10101010, 3->PRBS15, 4->11111111, 5->00000000, 6->00001111, 7->01010101 LE_PHY: 1->LE1M, 2->LE2M, 3->LE Coded S8, 4->LE Coded S2 le_test_end_cmd
Test mode 2	Permanent reception adb root adb remount adb shell bdt_unisoc enable le_enhanced_receiver_test channel LE_PHY Mod_index channel: channel number(hexadecimal). LE_PHY: 1->LE1M, 2->LE2M, 3->LE Coded Mod_index: 1means stable, 0 means standard. get_nonsig_rx_data 1 % Gets the value of rssi&per&ber% le_test_end_cmd %Stop BLE RX test%

Test	Running mode
Occupied Bandwidth	Test mode 1
6dB Bandwidth	Test mode 1
Maximum Conducted Output Power	Test mode 1
Power Spectral Density	Test mode 1
Conducted Spurious Emission at the Band Edge	Test mode 1
Unwanted Emissions in Non-Restricted Frequency Bands	Test mode 1
Unwanted Emissions in Restricted Frequency Bands	Test mode 1
Receiver Radiated Emissions	Test mode 2 (1)

(1) Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.

2.3. EQUIPMENT LABELLING

Label



2.4. EQUIPMENT MODIFICATIONS DURING THE TESTS

None



2.5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow:

$$FS = RA + AF + CF - AG$$

Where:

FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Factor

AG = Amplifier Gain

Example:

Assume a receiver reading of 52.5dBμV is obtained. The antenna factor of 7.4 and a cable factor of 1.1 are added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dBμV/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dBμV/m value can be mathematically converted to its corresponding level in μV/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}.$$

2.6. TEST DISTANCE EXTRAPOLATION – FCC/ISED

The field strength is extrapolated to the new measurement distance using formula from FCC Part15.31 (f) and §6.5-6.6 RSS-GEN:

Below 30MHz,

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

Above 30MHz,

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

Where:

FS_{limit} is the calculation of field strength at the limit distance, expressed in dBμV/m

FS_{max} is the measured field strength, expressed in dBμV/m

d_{measure} is the distance of the measurement point from the EUT

d_{limit} is the reference limit distance

2.7. CALIBRATION DATE

The calibration intervals are extended at 12+2 months. This extended interval is based on the fact that there is sufficient calibration data to statistically establish a trend or based on experience of use of the test equipment to assure good measurement results for a longer period.

2.8. METHOD TO DETERMINATE THE SPURIOUS RADIATED EMISSION

The Normalized Site Attenuation (NSA) is added to the maximum values observed during the azimuth search in order to obtain the spurious radiated emission. For spurious above -6dB from the limit found with the NSA, the Substitution Method is applied.

The substitution antenna replaces the equipment under test (EUT) for Effective Radiated Power (ERP) or Effective Isotropically Radiated Power (EIRP) measurement following the standard. Power is measured for a high level and calculated for the same level of radiated field strength obtained on the measuring antenna and EUT.

3. OCCUPIED BANDWIDTH

3.1. TEST CONDITIONS

Date of test : May 22, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 32
Ambient temperature (°C) : 21

3.2. TEST SETUP


The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure:

ANSI C63.10 § 6.9.2 and RSS-Gen Issue 5 § 6.7

- RBW used in the range of 1% to 5% of the anticipated emission bandwidth
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = Max Hold.
- Sweep = Auto couple.
- Allow the trace to stabilize.
- OBW 99% function of spectrum analyzer used

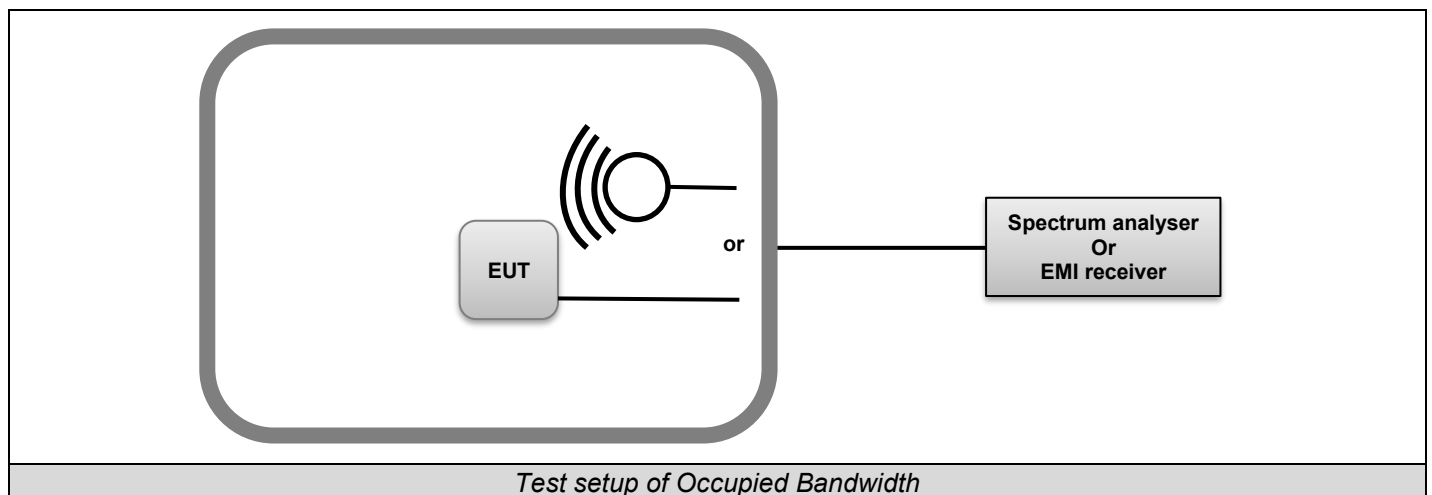

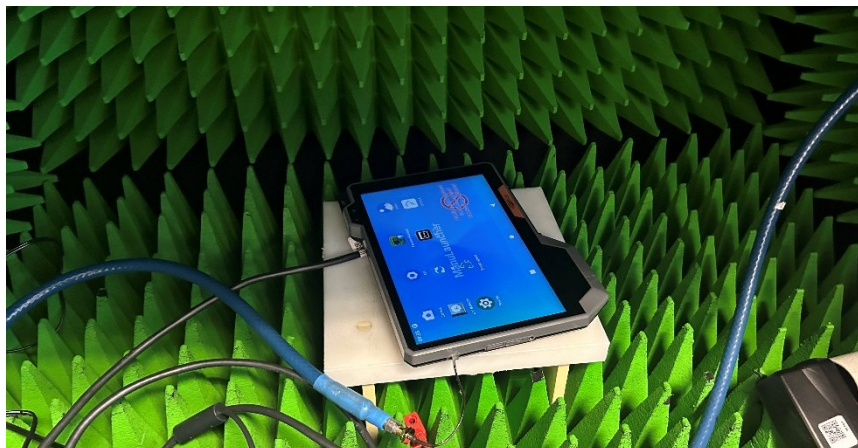


Photo of Occupied bandwidth

3.3. **LIMIT**

None




3.4. TEST EQUIPMENT LIST


TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
Cable Measure	—	36G	A5329604	02/24	02/25
Full Anechoic Room	SIEPEL	—	D3044024		
Multimeter - CEM	FLUKE	87	A1240251	10/23	10/25
SMK 1.2m (Ampl <-> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	04/24	04/26
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25

3.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

3.6. RESULTS

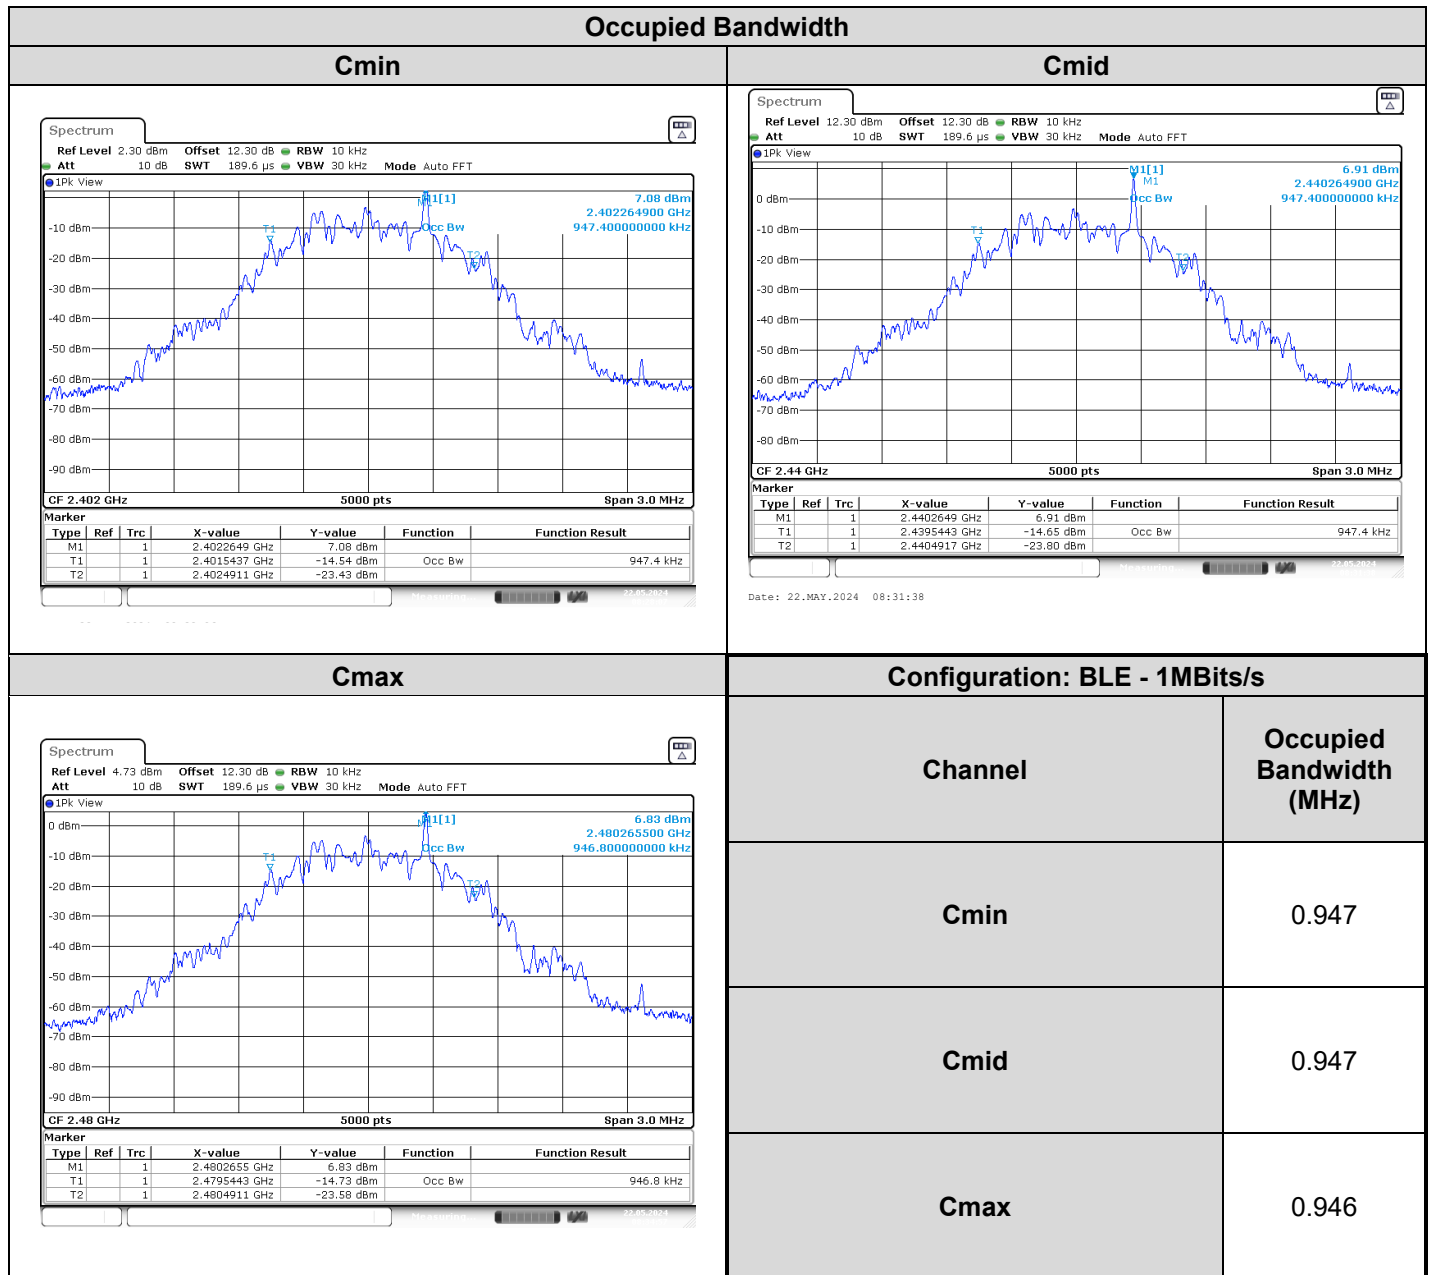

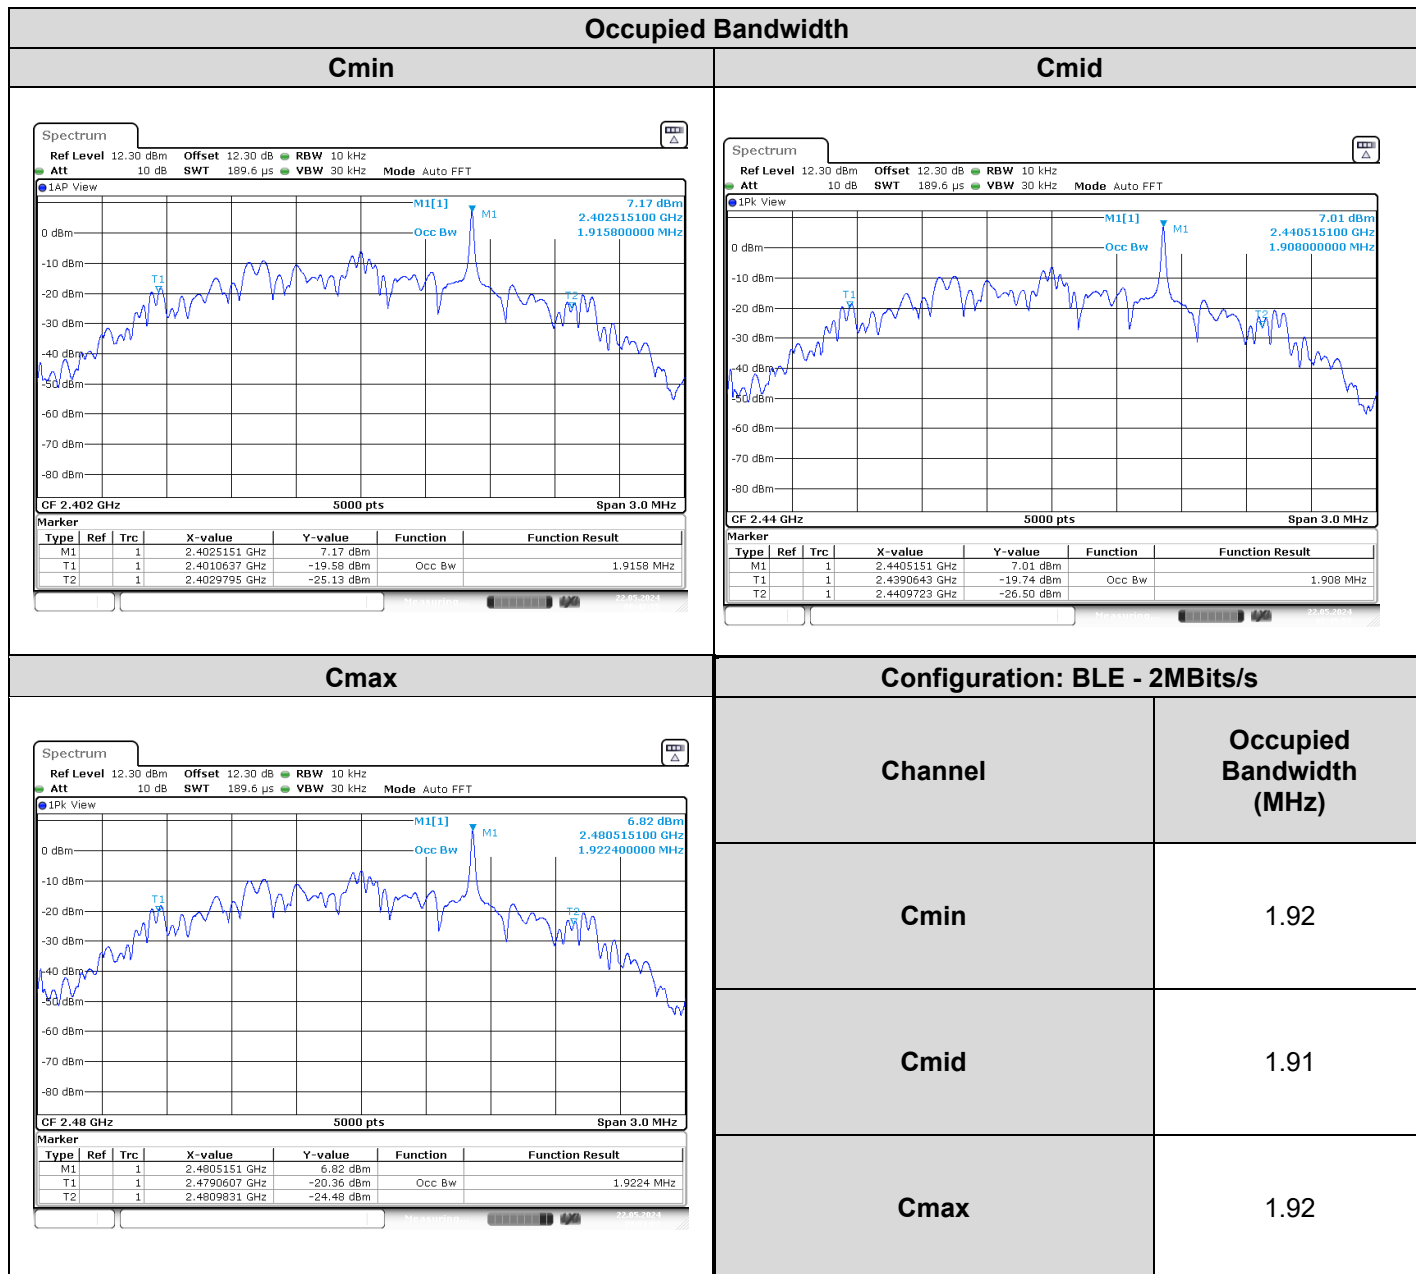

3.7. CONCLUSION

Occupied Channel Bandwidth measurement performed on the sample of the product **AXIUM RX9000**, Sn: **2419MR900209 / 2419MR900267**, in configuration and description presented in this test report, show levels **compliant** to the **RSS-GEN** limits.

4. 6dB BANDWIDTH

4.1. TEST CONDITIONS

Date of test : May 22, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 32
Ambient temperature (°C) : 21

4.2. TEST SETUP


The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure:

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.2

- Set resolution bandwidth (RBW) = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer.

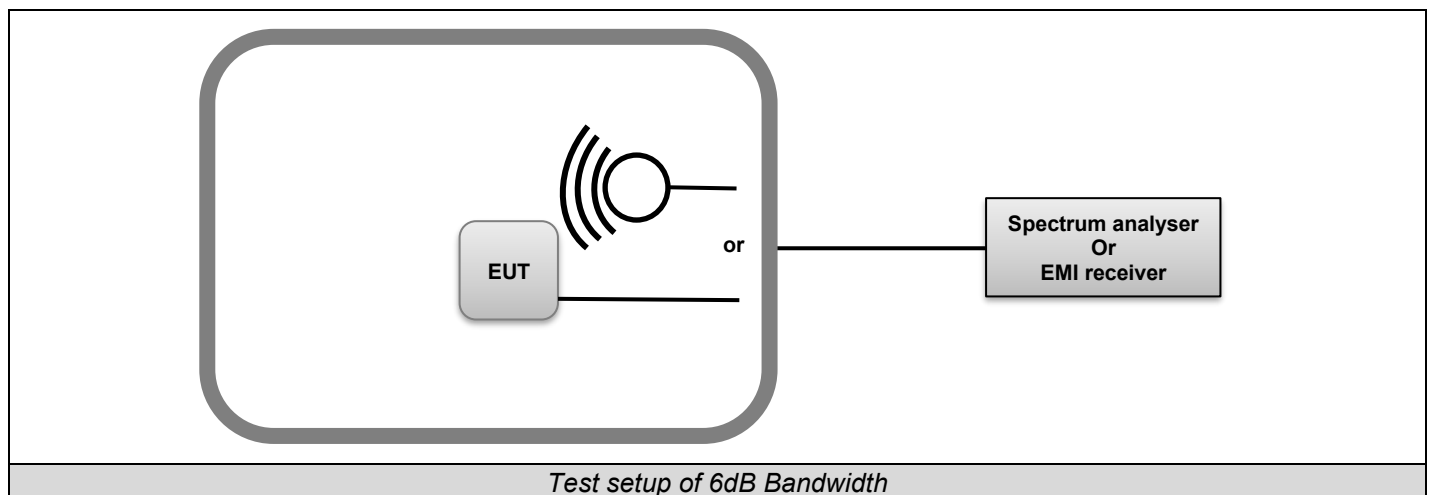

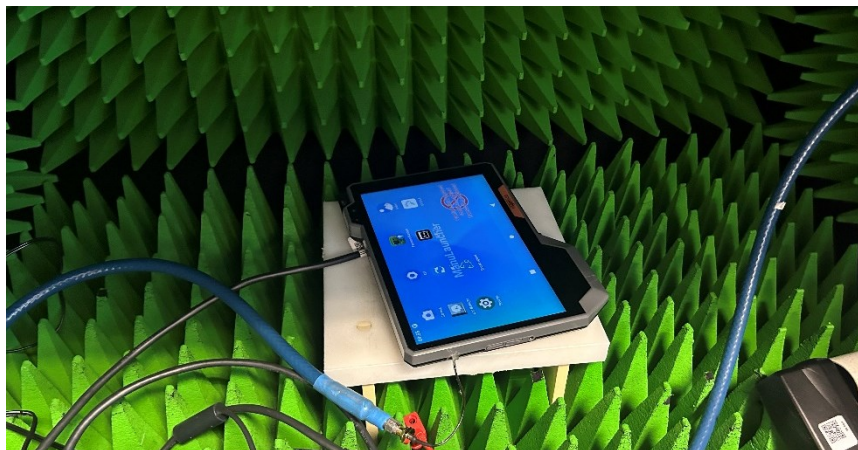


Photo of 6dB bandwidth

4.3. **LIMIT**

Frequency range	6dB bandwidth
902-928MHz 2400MHz to 2483.5MHz 5725-5850 MHz	≥500kHz




4.4. TEST EQUIPMENT LIST


TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
Cable Measure	—	36G	A5329604	02/24	02/25
Full Anechoic Room	SIEPEL	—	D3044024		
Multimeter - CEM	FLUKE	87	A1240251	10/23	10/25
SMK 1.2m (Ampl <-> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	04/24	04/26
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25

4.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

4.6. RESULTS

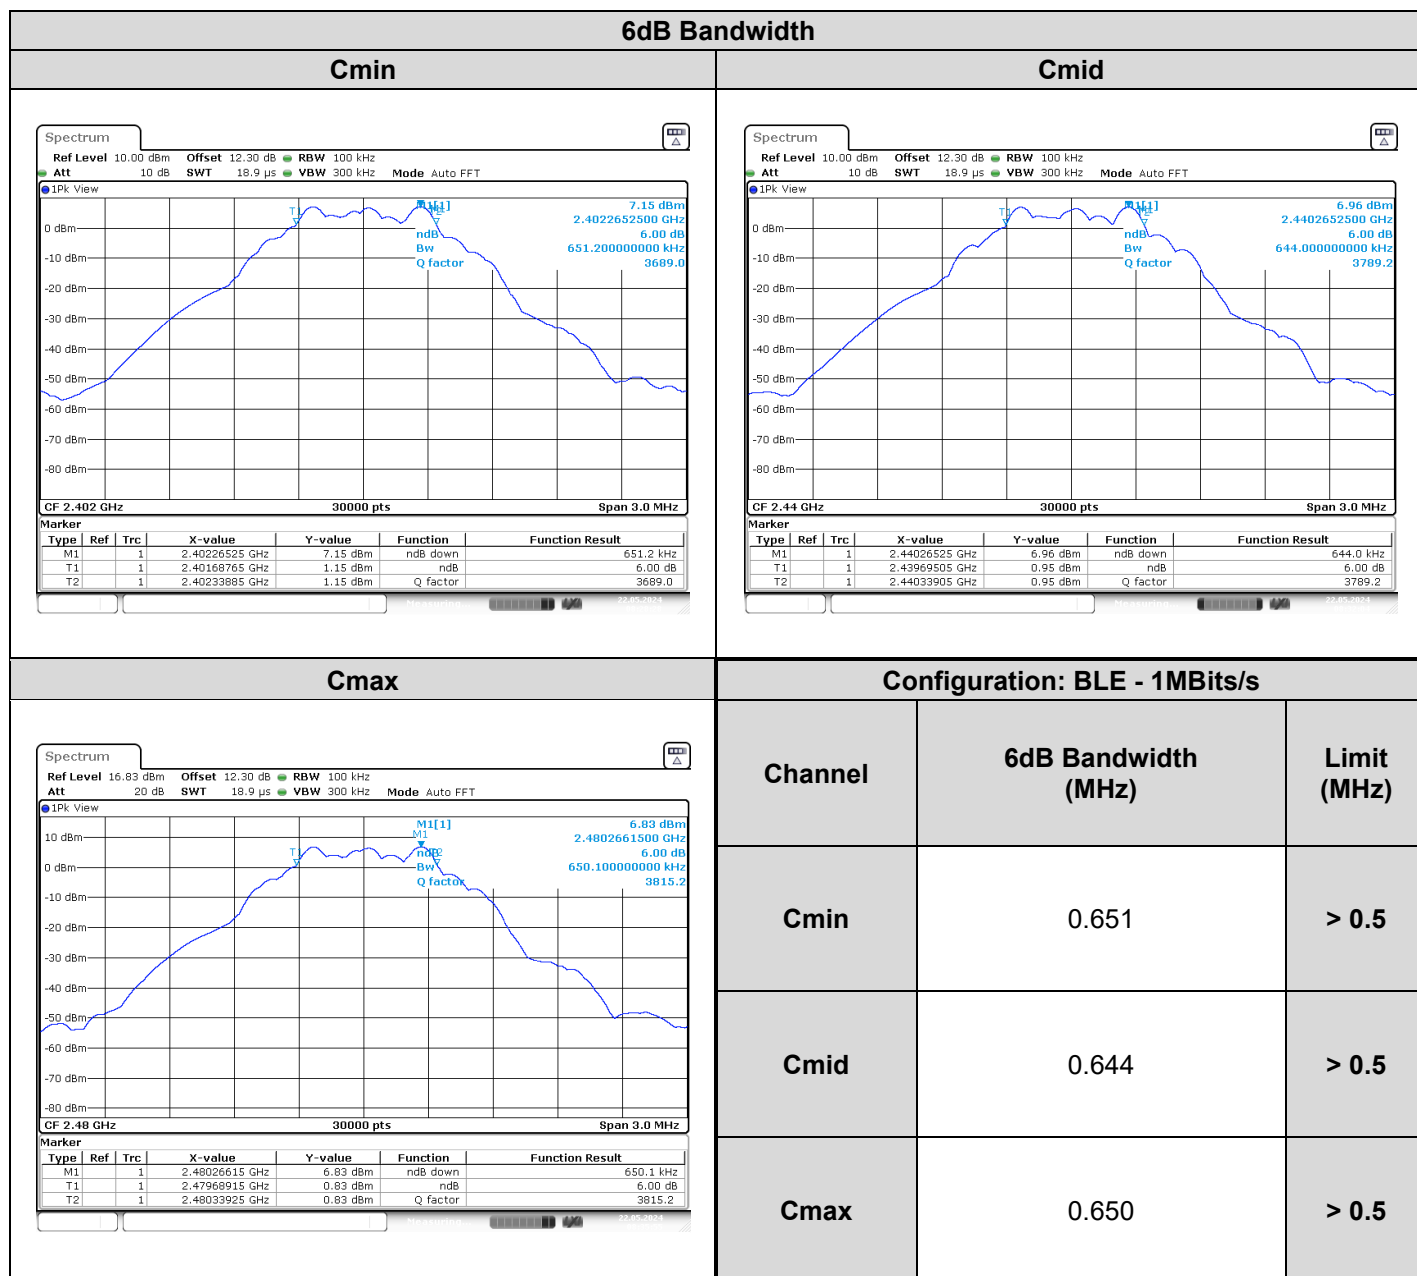

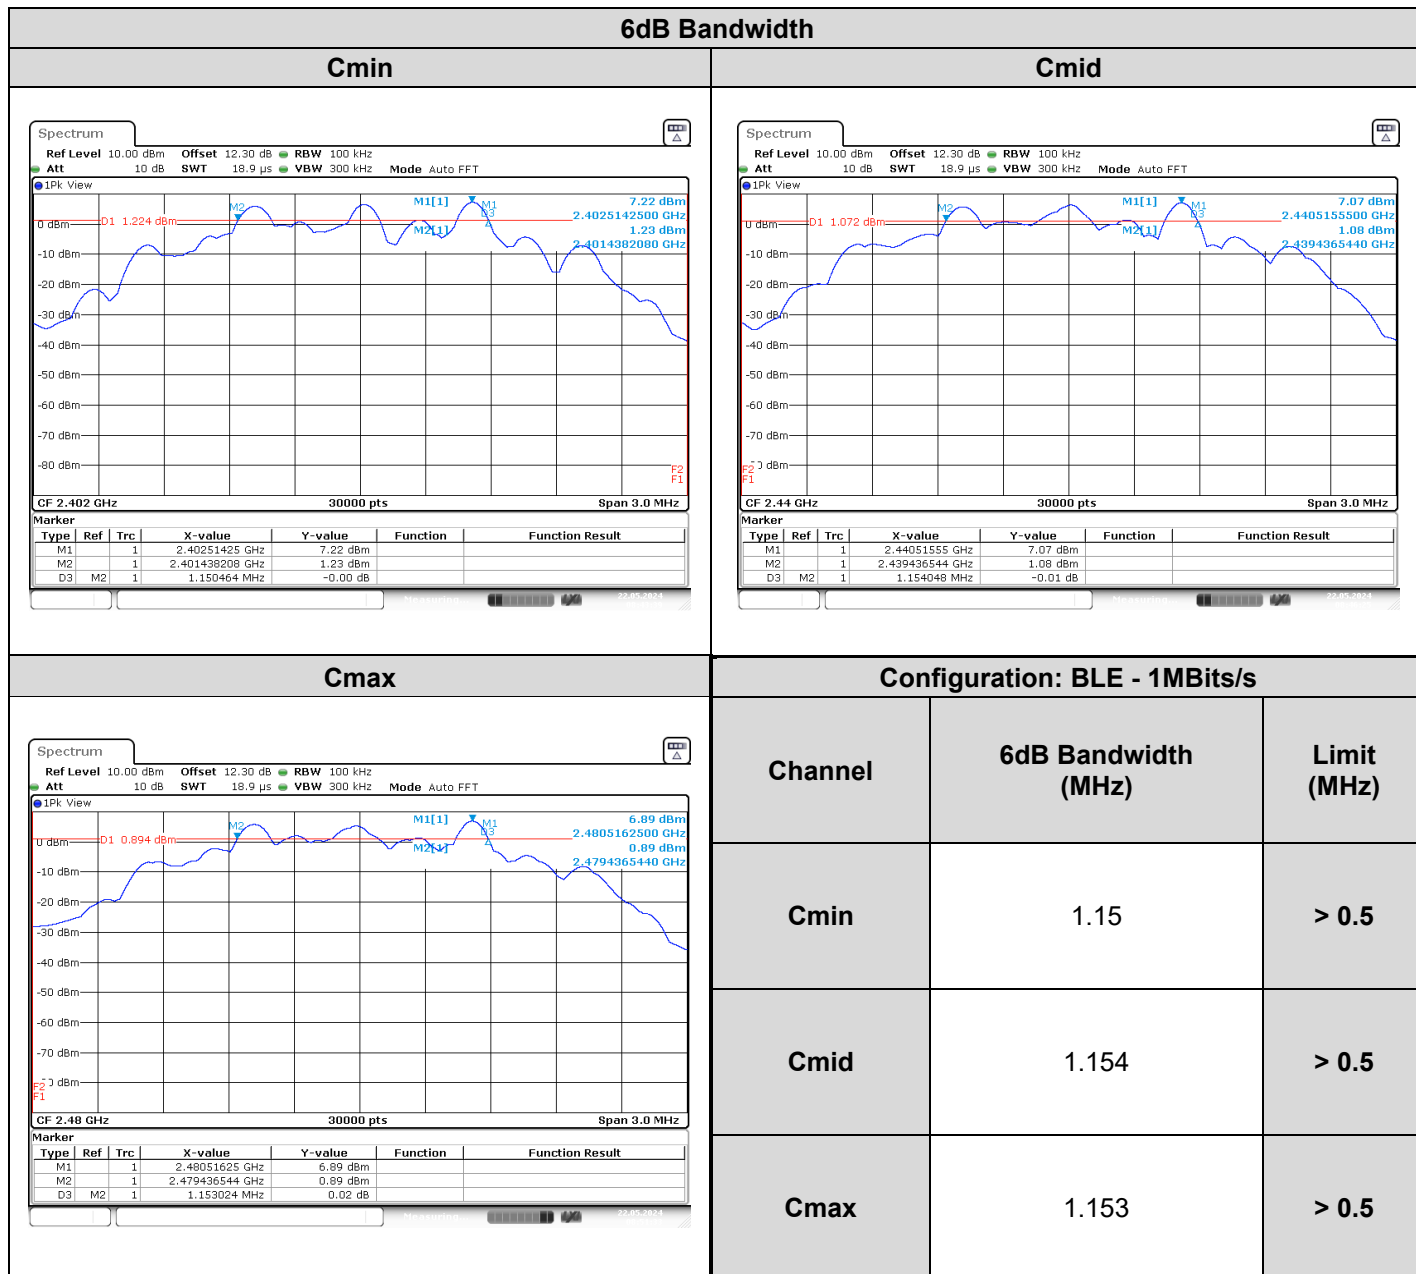

4.7. CONCLUSION

6dB Bandwidth measurement performed on the sample of the product **AXIUM RX9000**, Sn: **2419MR900209 / 2419MR900267**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.



5. MAXIMUM CONDUCTED OUTPUT POWER

5.1. TEST CONDITIONS

Date of test : May 22, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 31
Ambient temperature (°C) : 21

5.2. TEST SETUP

The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure used: KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.1.1

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.1.1

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- o Set the RBW $\geq$ DTS bandwidth.
- o Set VBW $\geq 3 \times$ RBW.
- o Set span $\geq 3 \times$ RBW
- o Sweep time = auto couple.
- o Detector = peak.
- o Trace mode = max hold.
- o Allow trace to fully stabilize.
- o Use peak marker function to determine the peak amplitude level.

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.1.2

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- o Set the RBW = 1 MHz.
- o Set the VBW $\geq 3 \times$ RBW
- o Set the span $\geq 1.5 \times$ DTS bandwidth.
- o Detector = peak.
- o Sweep time = auto couple.
- o Trace mode = max hold.
- o Allow trace to fully stabilize.
- o Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.2.2(Method AVGSA-1)

Subclause 11.9.2.2 of ANSI C63.10 is applicable, Method AVGSA-1 uses trace averaging with the EUT transmitting at full power throughout each sweep.


- o a) Set span to at least 1.5 times the OBW.
- o b) Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- o c) Set VBW $\geq [3 \times$ RBW].
- o d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- o e) Sweep time = auto.
- o f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- o g) If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- o h) Trace average at least 100 traces in power averaging (rms) mode.
- o i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.2.2(Method AVGSA-2)

Subclause 11.9.2.2 of ANSI C63.10 is applicable.

Method AVGSA-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:

- a) Measure the duty cycle D of the transmitter output signal as described in 11.6.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- d) Set VBW $\geq [3 \times \text{RBW}]$.
- e) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- f) Sweep time = auto.
- g) Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.
- h) Do not use sweep triggering. Allow the sweep to “free run.”
- i) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- j) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- k) Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

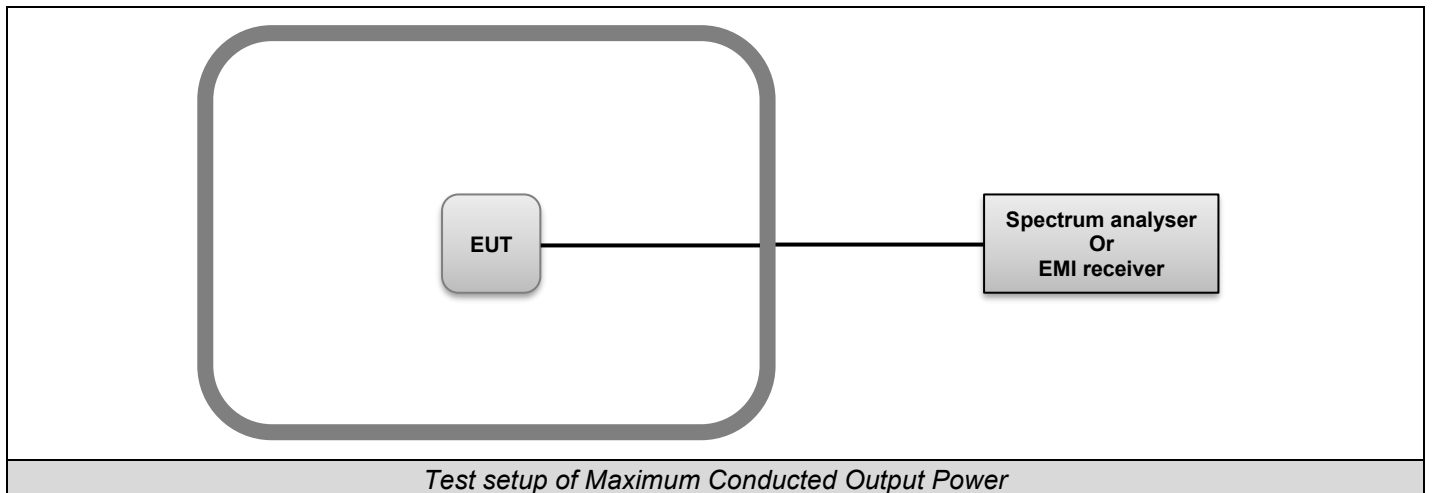

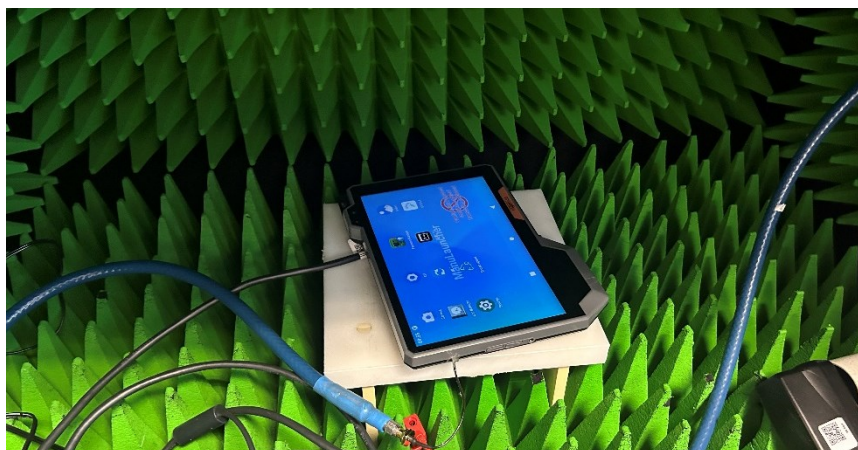


Photo of Maximum Conducted Output Power



5.3. LIMIT

Frequency range	Maximum Conducted Output Power
902-928MHz 2400MHz to 2483.5MHz 5725-5850 MHz	≤30dBm*

*Remark: Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi


5.4. TEST EQUIPMENT LIST


TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
Cable Measure	—	36G	A5329604	02/24	02/25
Full Anechoic Room	SIEPEL	—	D3044024		
Multimeter - CEM	FLUKE	87	A1240251	10/23	10/25
SMK 1.2m (Ampl <-> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	04/24	04/26
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25

5.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

5.6. RESULTS

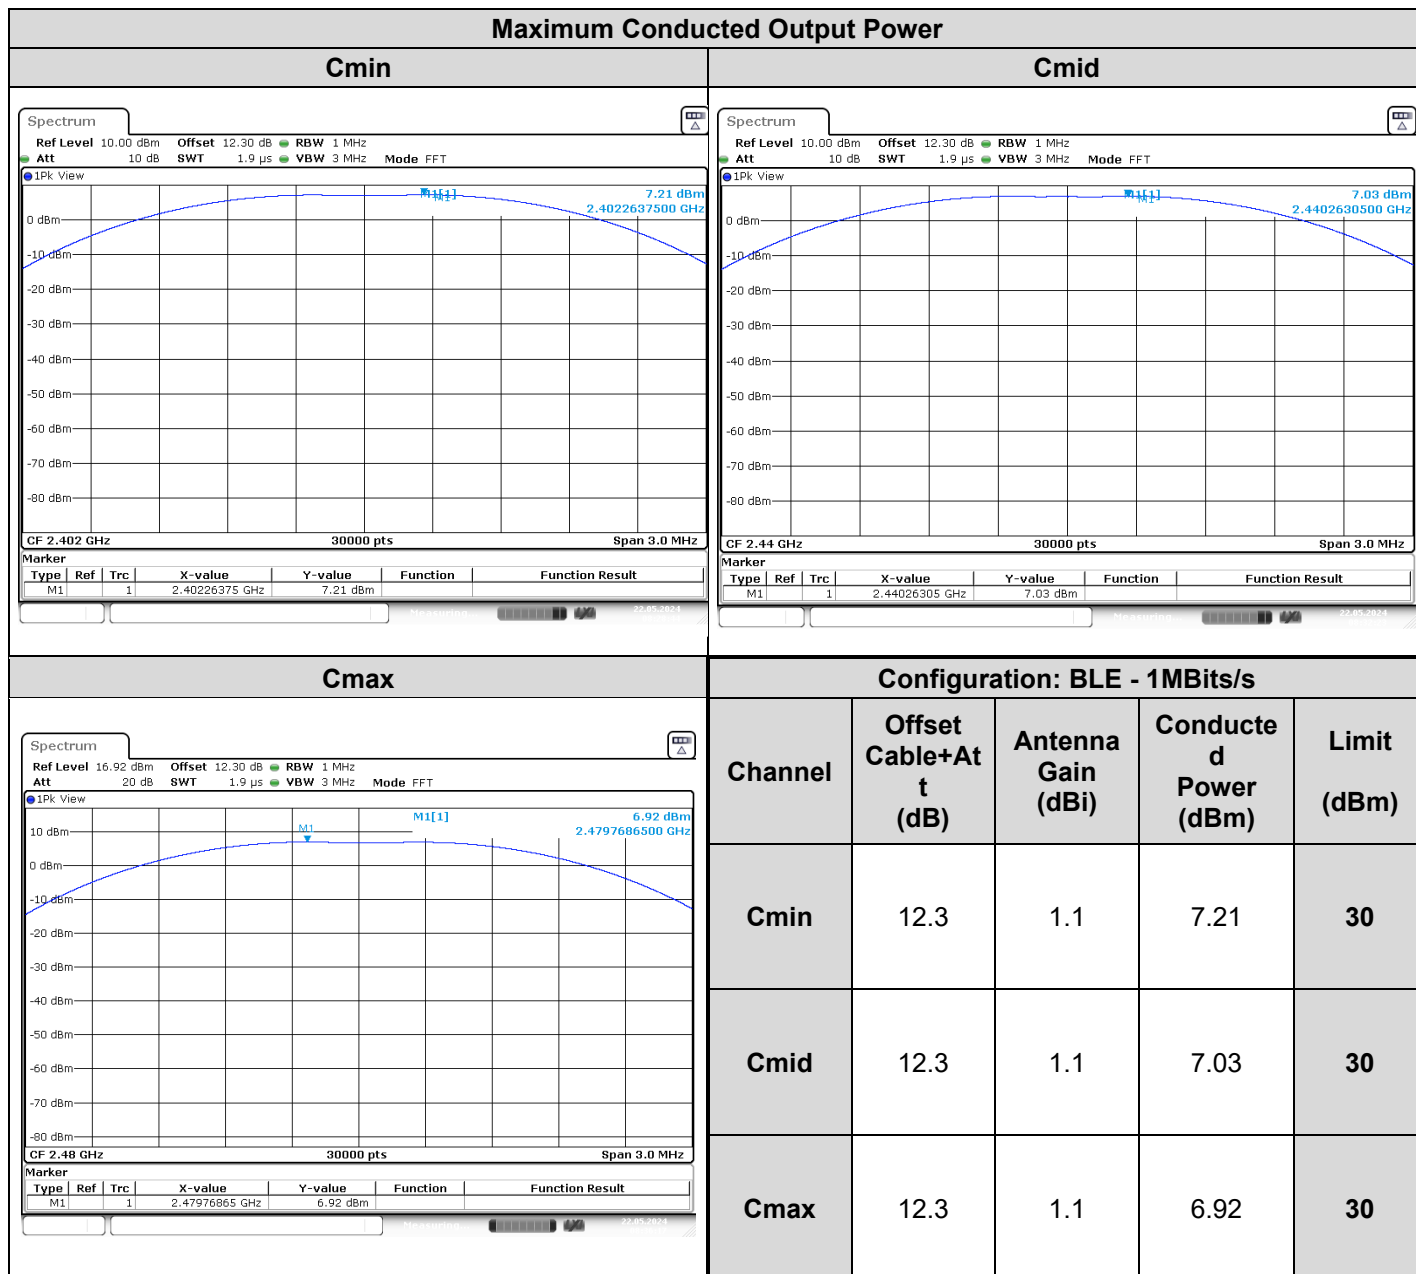

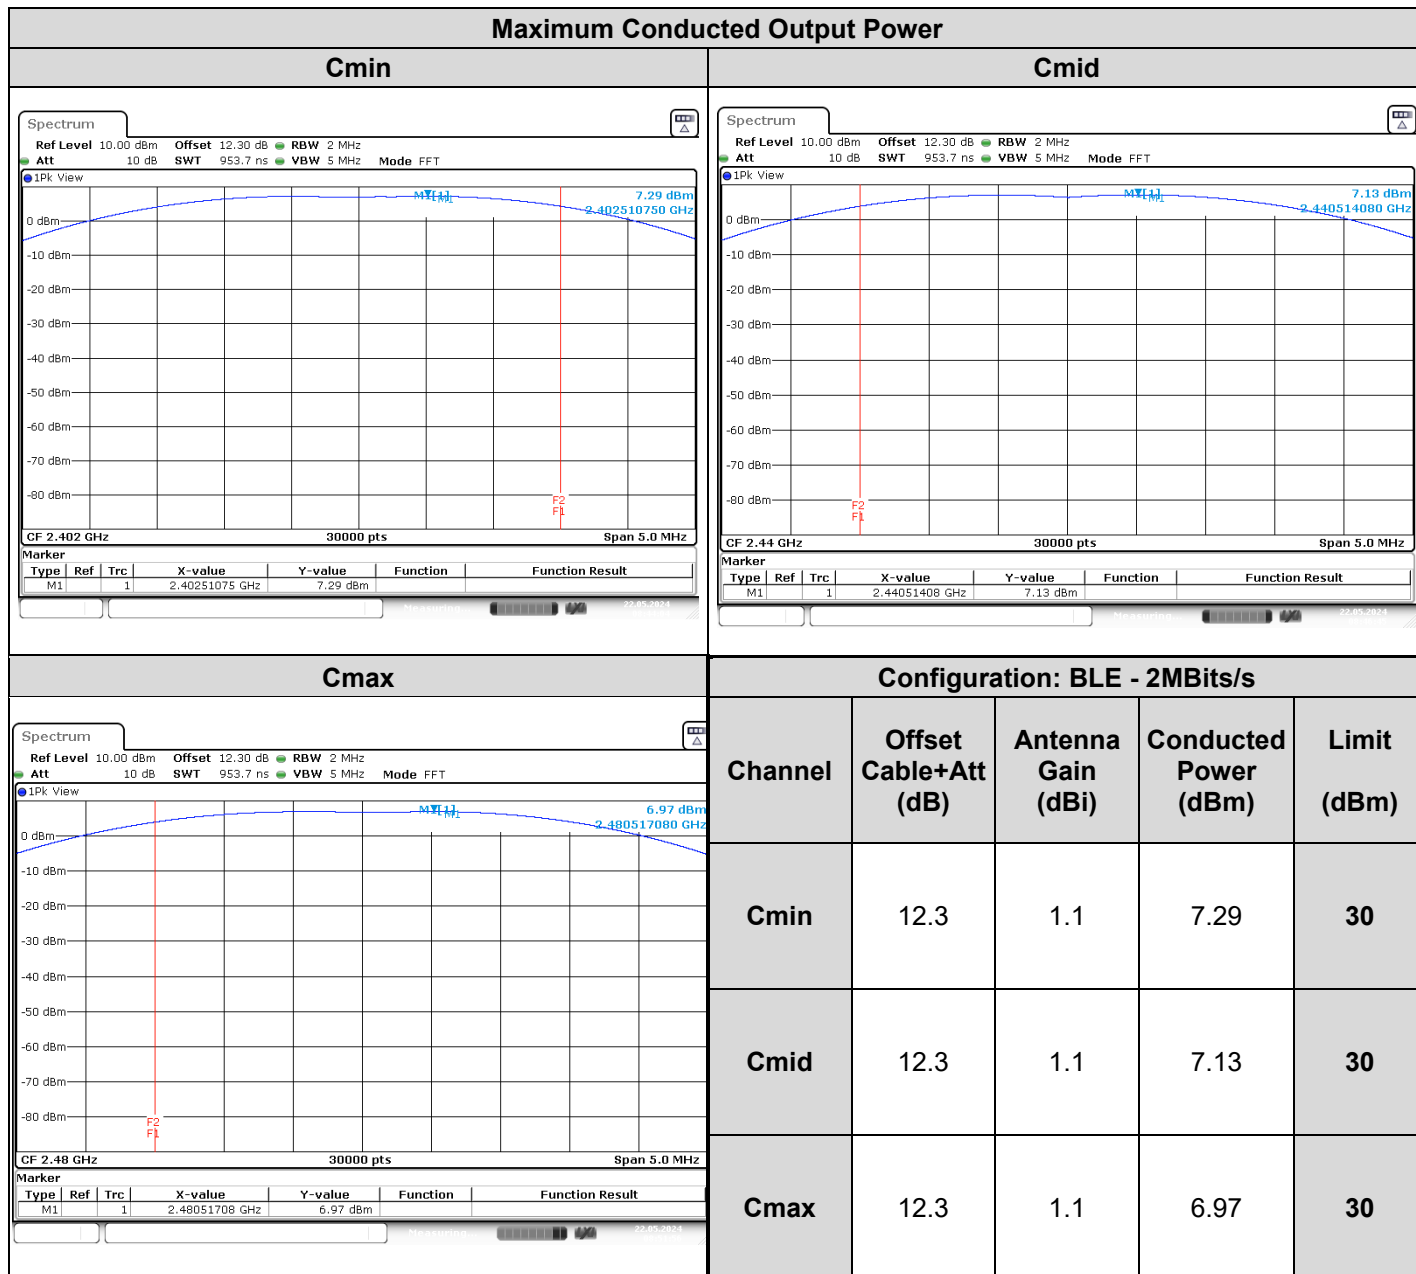

5.7. CONCLUSION

Maximum Output Conducted Power measurement performed on the sample of the product **AXIUM RX9000**, Sn: **2419MR900209 / 2419MR900267**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.

6. POWER SPECTRAL DENSITY

6.1. TEST CONDITIONS

Date of test : May 22, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 31
Ambient temperature (°C) : 21

6.2. TEST SETUP

The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure used: KDB 558074 D01 DTS Meas Guidance v05r02 § 8.4 (Method PKPSD)

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.4 (Method PKPSD)

Subclause 11.10 of ANSI C63.10 is applicable


- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: 3 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.4 (Method AVGPS-1)

Subclause 11.10 of ANSI C63.10 is applicable

Method AVGPS-1 uses trace averaging with EUT transmitting at full power throughout each sweep. The following procedure may be used when the maximum (average) conducted output power was used to determine compliance to the fundamental output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has a power averaging (rms) detector, then it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously ($D \geq 98\%$), or else sweep triggering/signal gating must be implemented to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter OFF time to be considered):

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = power averaging (rms) or sample detector (when rms not available).
- f) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (rms) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

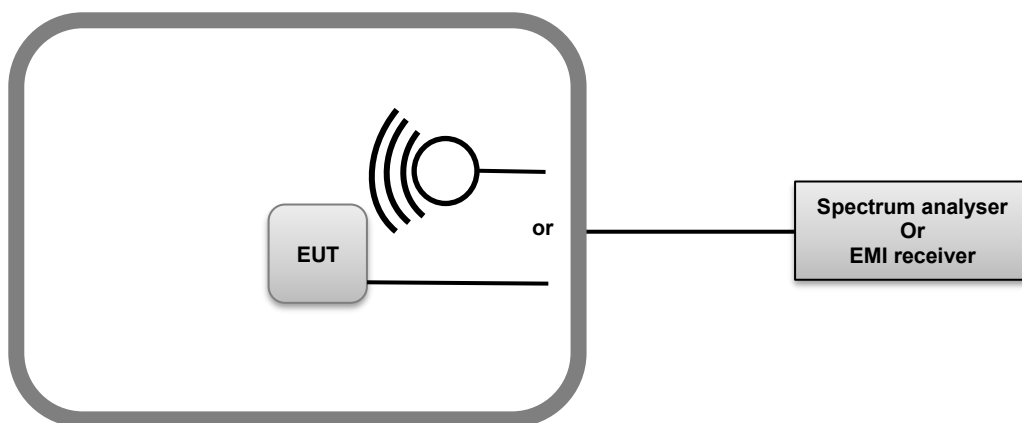

Test setup of Power Spectral Density

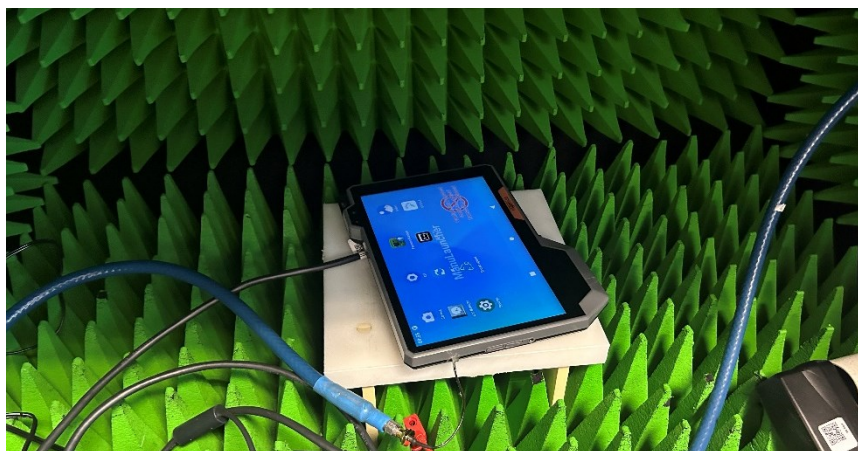


Photo of Power Spectral Density

6.3. LIMIT

Frequency range	Power Spectral Density
902-928MHz 2400MHz to 2483.5MHz 5725-5850 MHz	≤8dBm / 3kHz *

*Remark: Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi


6.4. TEST EQUIPMENT LIST


TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
Cable Measure	—	36G	A5329604	02/24	02/25
Full Anechoic Room	SIEPEL	—	D3044024		
Multimeter - CEM	FLUKE	87	A1240251	10/23	10/25
SMK 1.2m (Ampl <-> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	04/24	04/26
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25

6.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

6.6. RESULTS

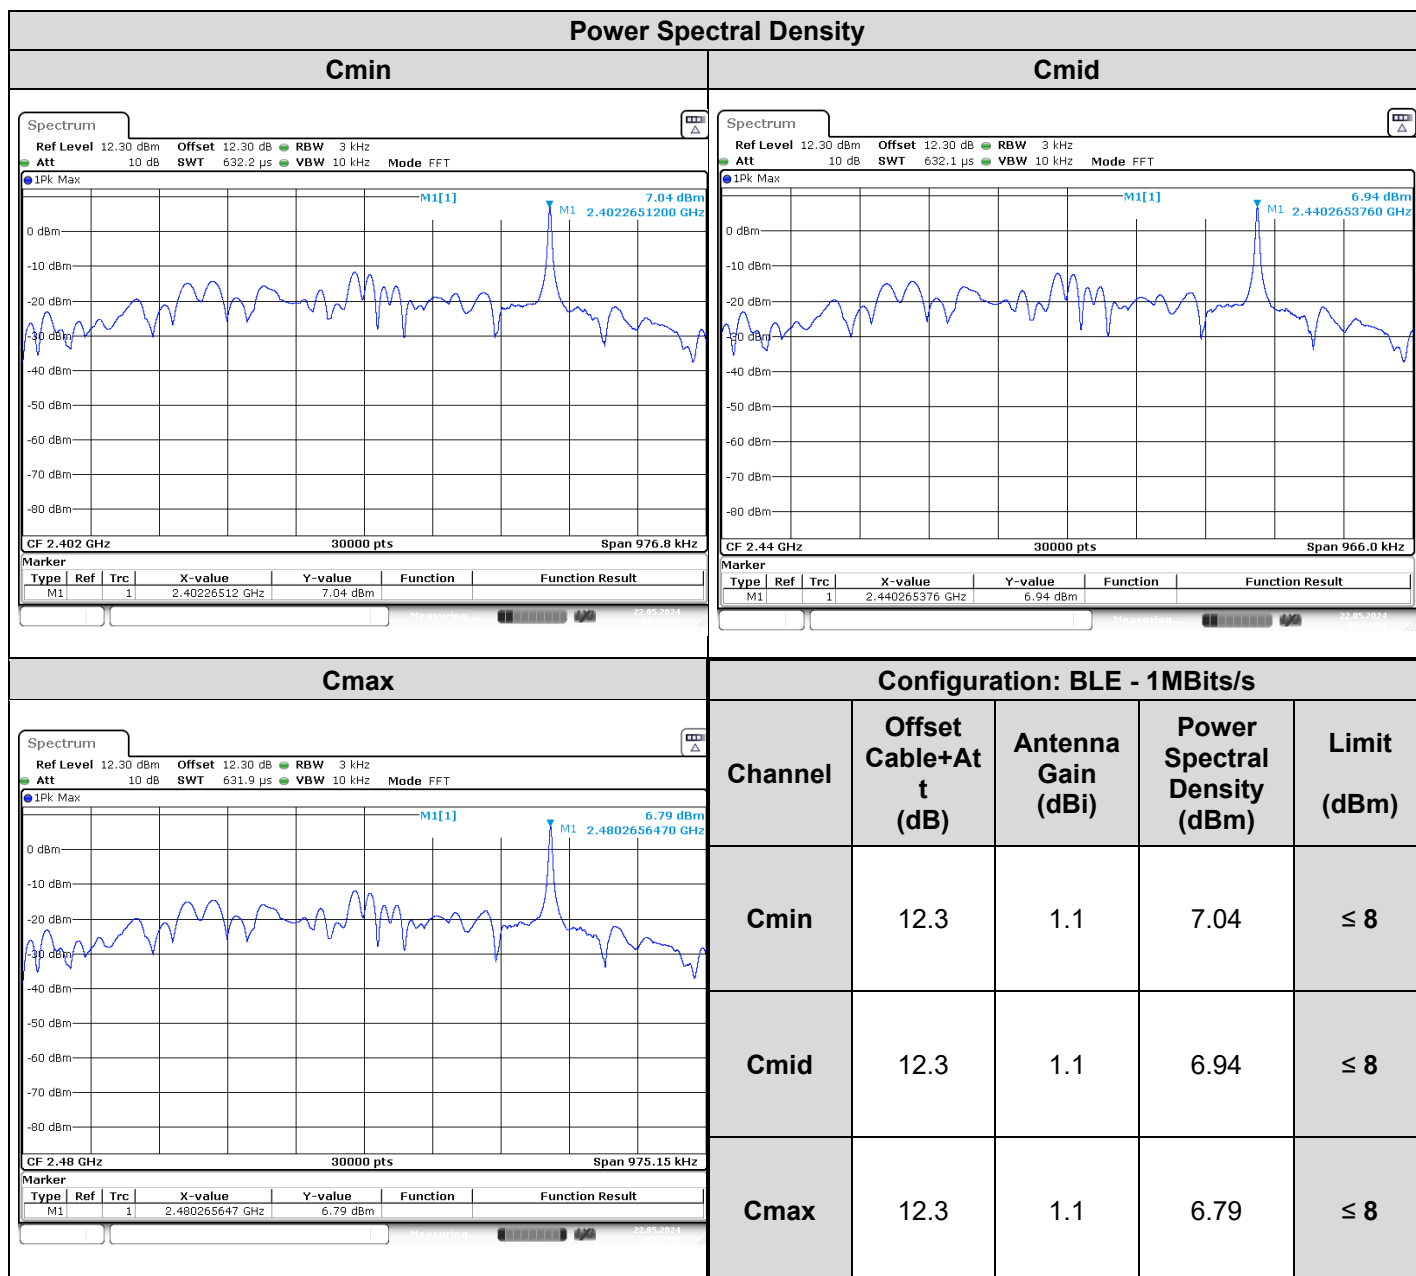

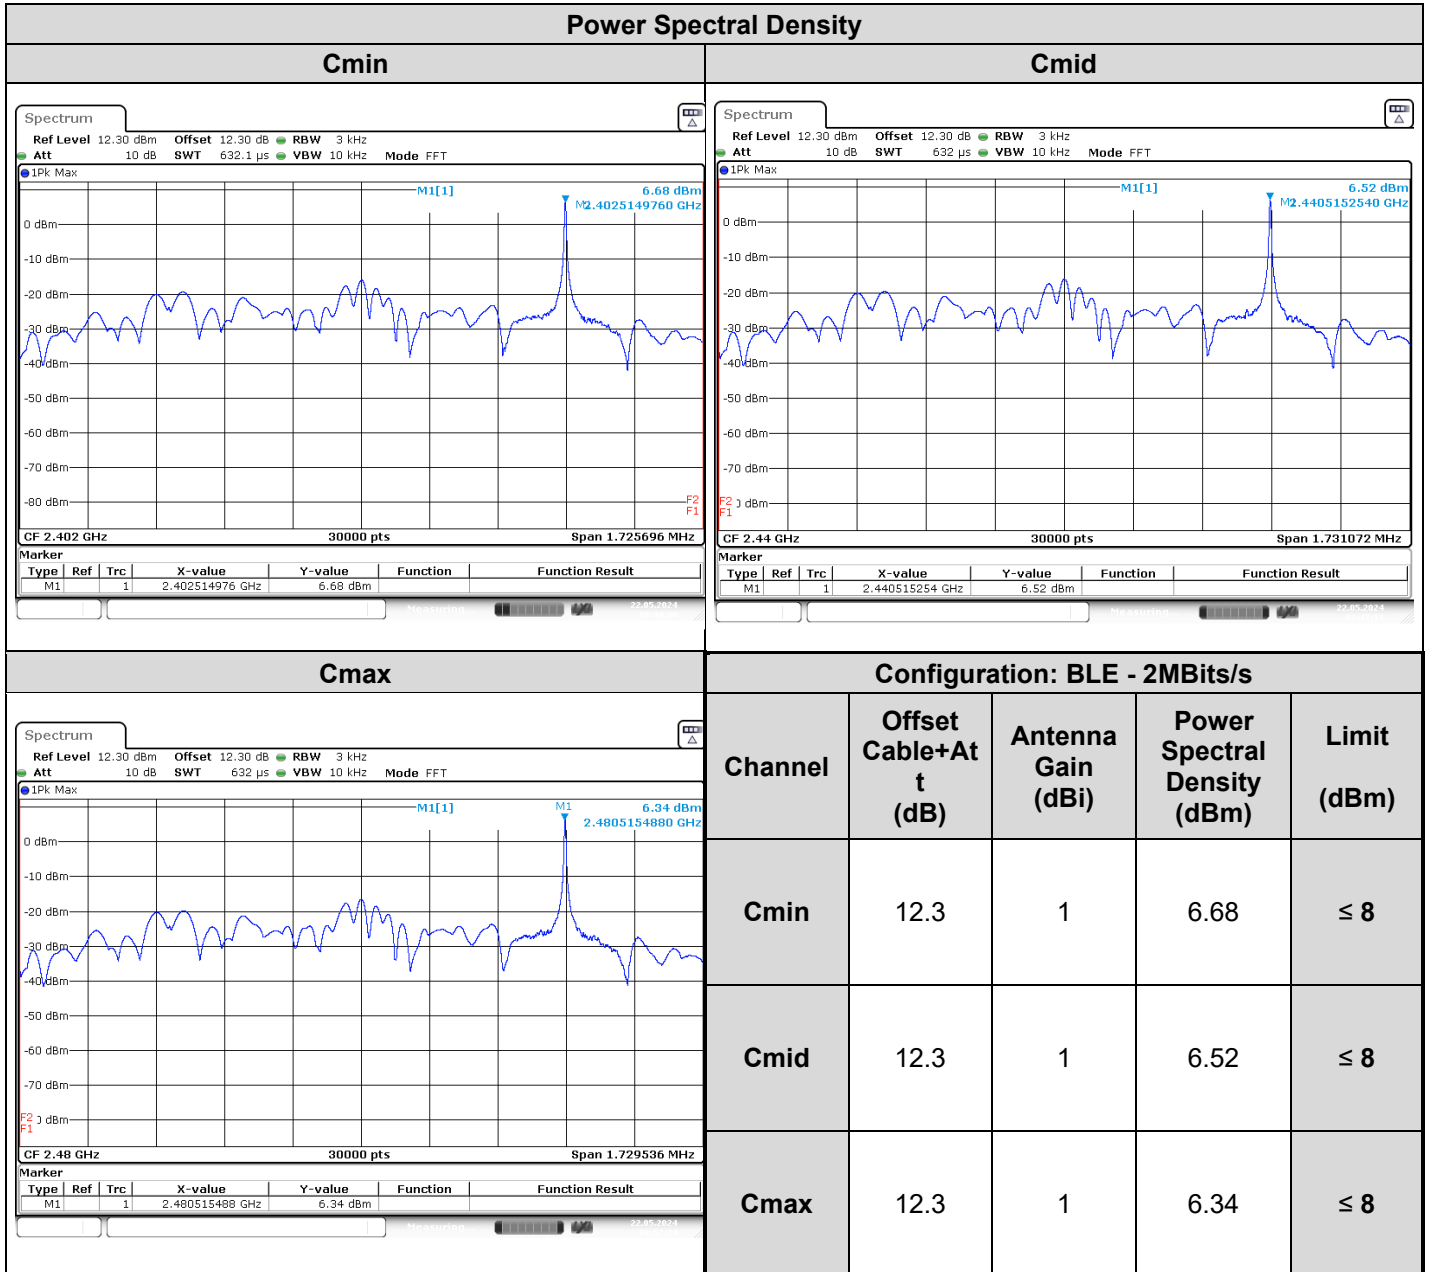

6.7. CONCLUSION

Power Spectral Density measurement performed on the sample of the product **AXIUM RX9000**, Sn: **2419MR900209 / 2419MR900267**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.

7. UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

7.1. TEST CONDITIONS


Date of test : May 27, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 33
Ambient temperature (°C) : 22

7.2. TEST SETUP

The Equipment Under Test is installed in an anechoic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure:
KDB 558074 D01 DTS Meas Guidance v05r02 § 8.5

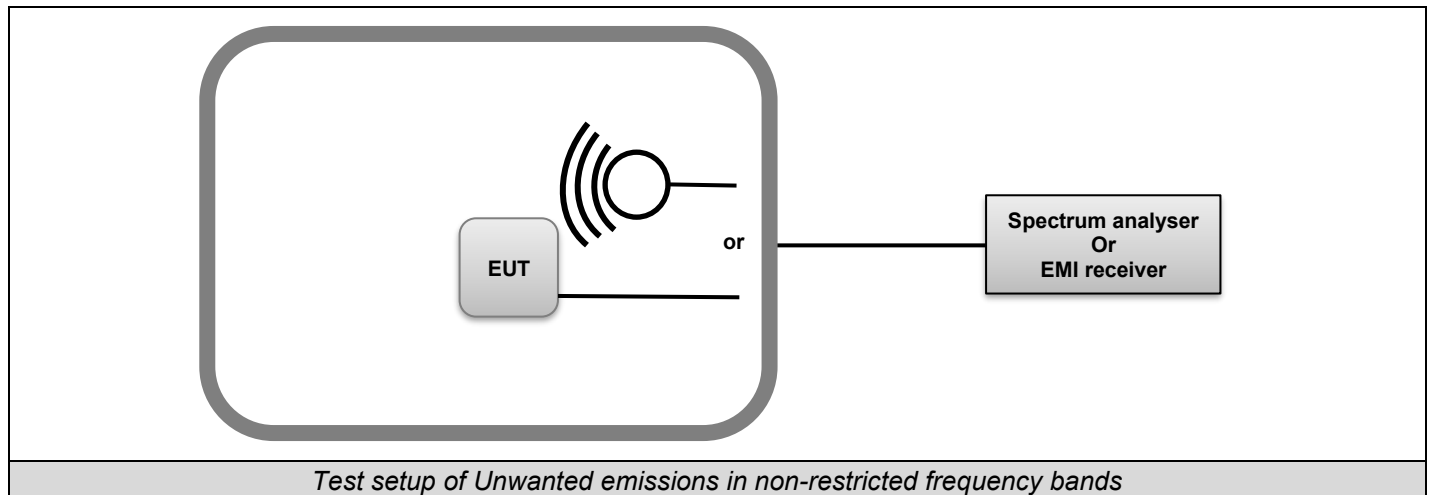

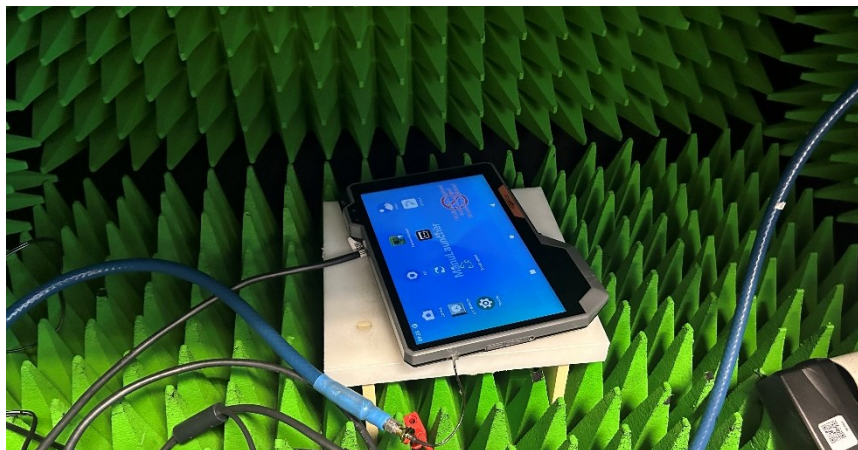


Photo of Unwanted emissions in non-restricted frequency bands



7.3. LIMIT

All Spurious Emissions must be at least 20dB below the Fundamental Radiator Level at the Band Edge of operating frequency band and in non-restricted bands.

7.4. TEST EQUIPMENT LIST


TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
Cable Measure	—	36G	A5329604	02/24	02/25
Full Anechoic Room	SIEPEL	—	D3044024		
Multimeter - CEM	FLUKE	87	A1240251	10/23	10/25
SMK 1.2m (Ampl <-> chamber)	HUBER-SUHNER	SUCOFLEX 102	A5330062	04/23	04/26
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	04/24	04/26
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25

7.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

7.6. RESULTS

7.6.1. Operational frequency band

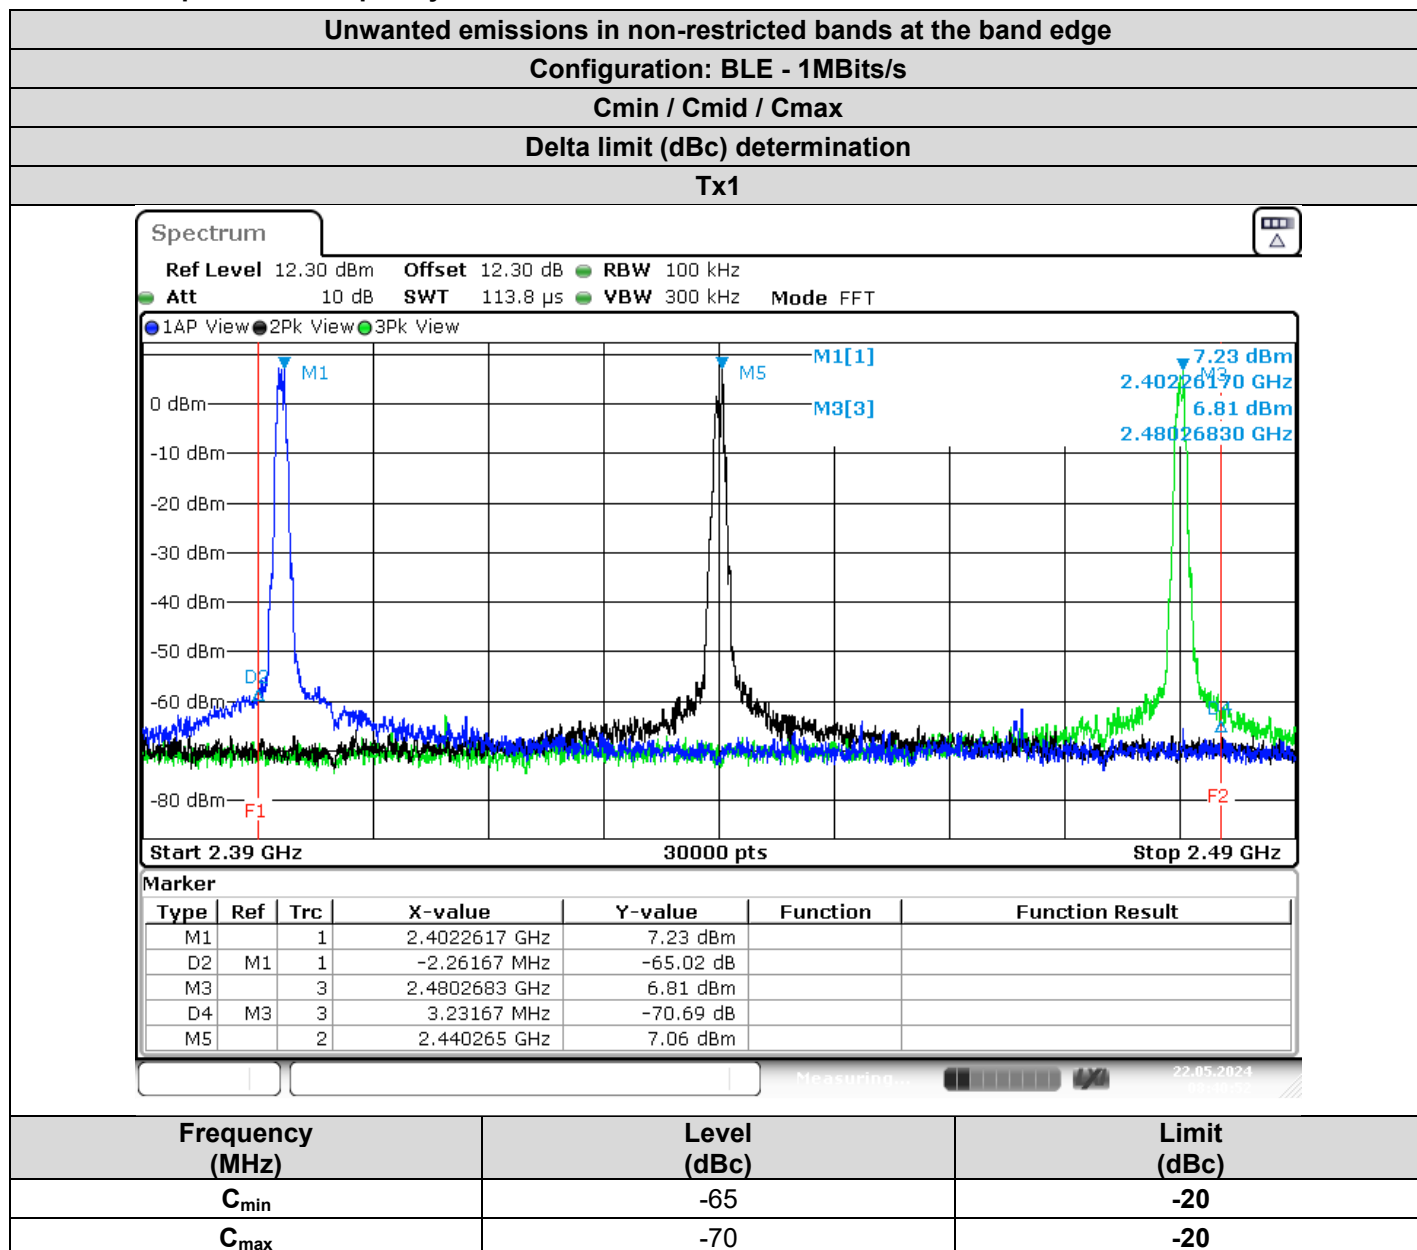



L C I E


Unwanted emissions in non-restricted bands at the band edge

Configuration: BLE - 2Mbits/s

Cmin / Cmid / Cmax

Delta limit (dBc) determination


Tx1

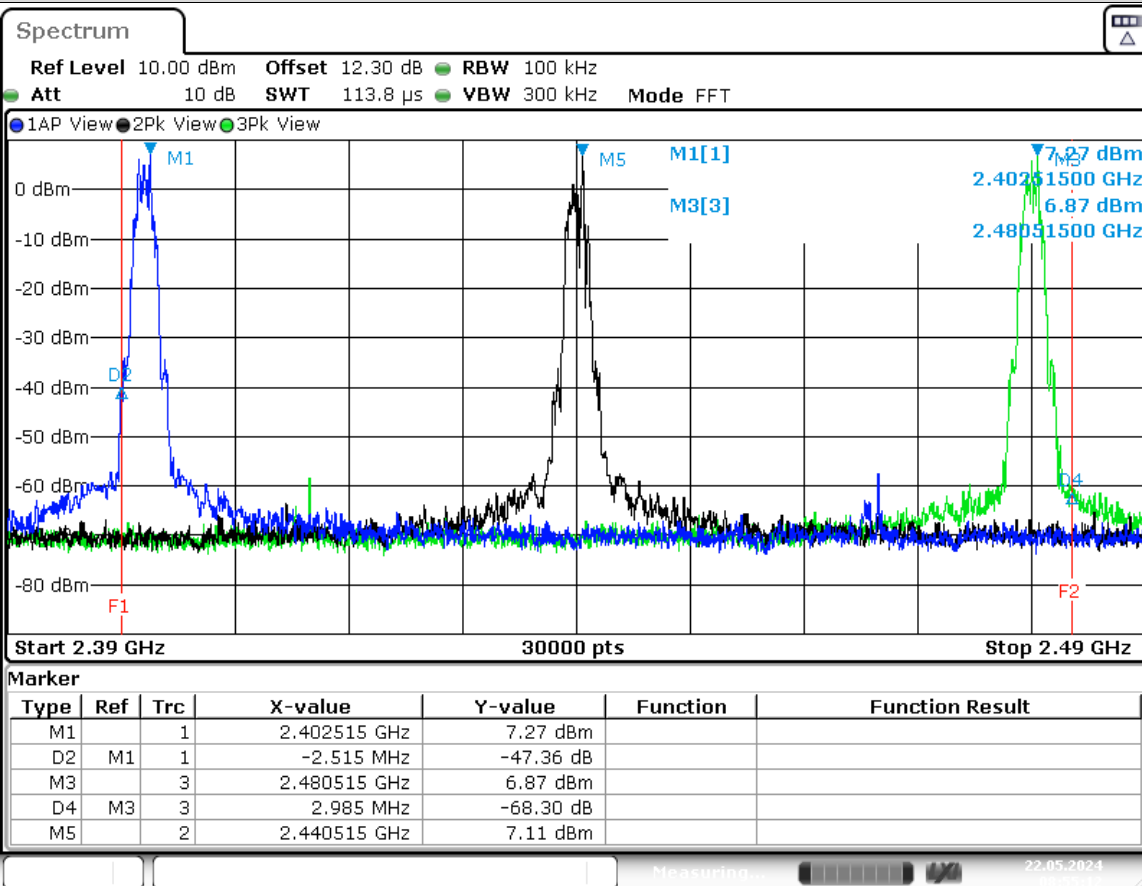


Date: 22.MAY.2024 08:55:12

Frequency (MHz)	Level (dBc)	Limit (dBc)
Cmin	-47	-20
Cmax	-68	-20

7.6.2. Non restricted frequency bands

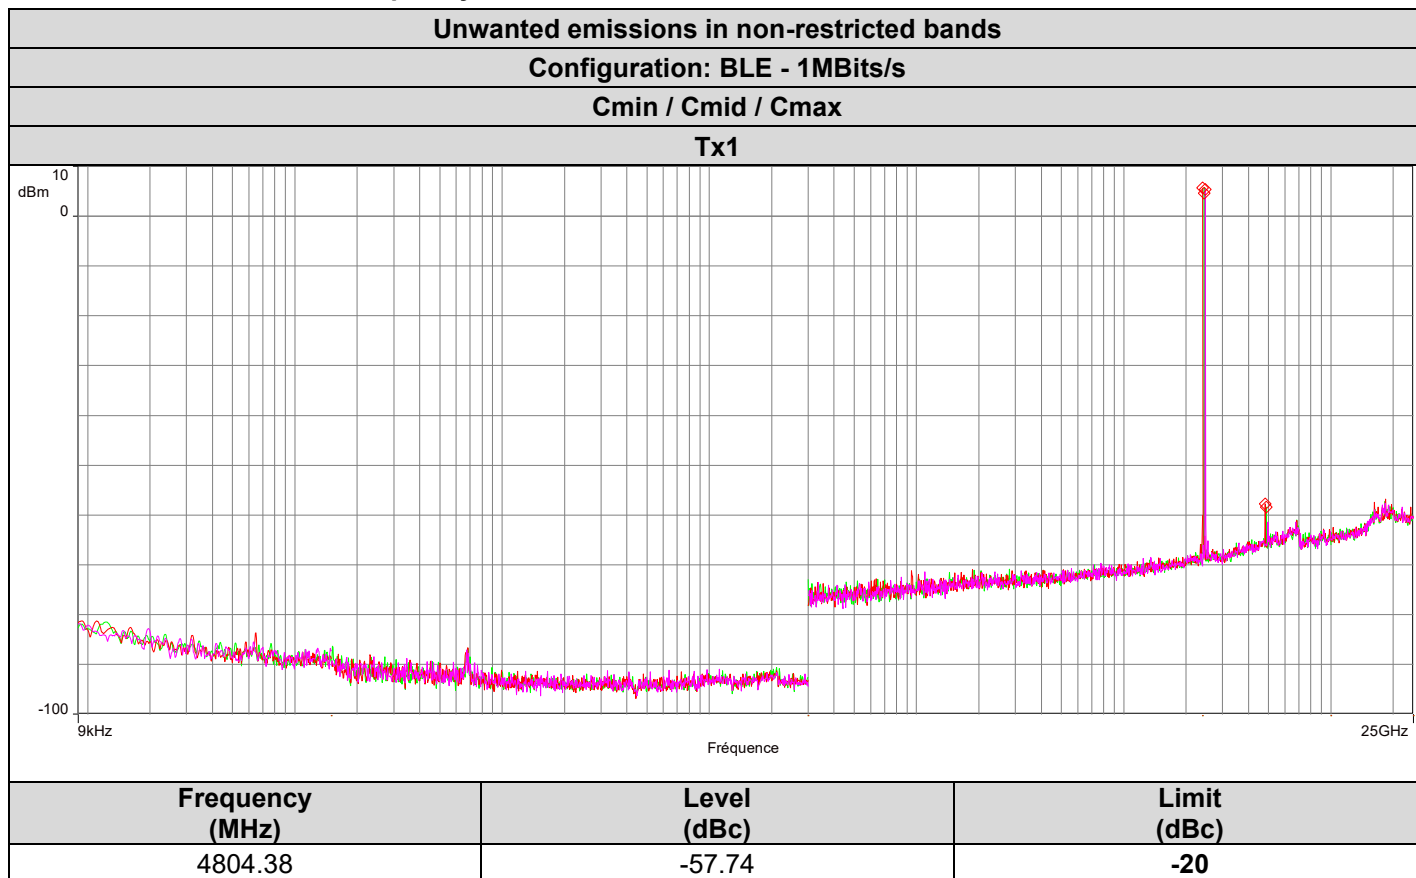

Frequency (MHz)	Level (dBm)	Level (dBc)	Limit (dBc)
2480.3	5.62		
4960.94	-59.04	-64.6	-20

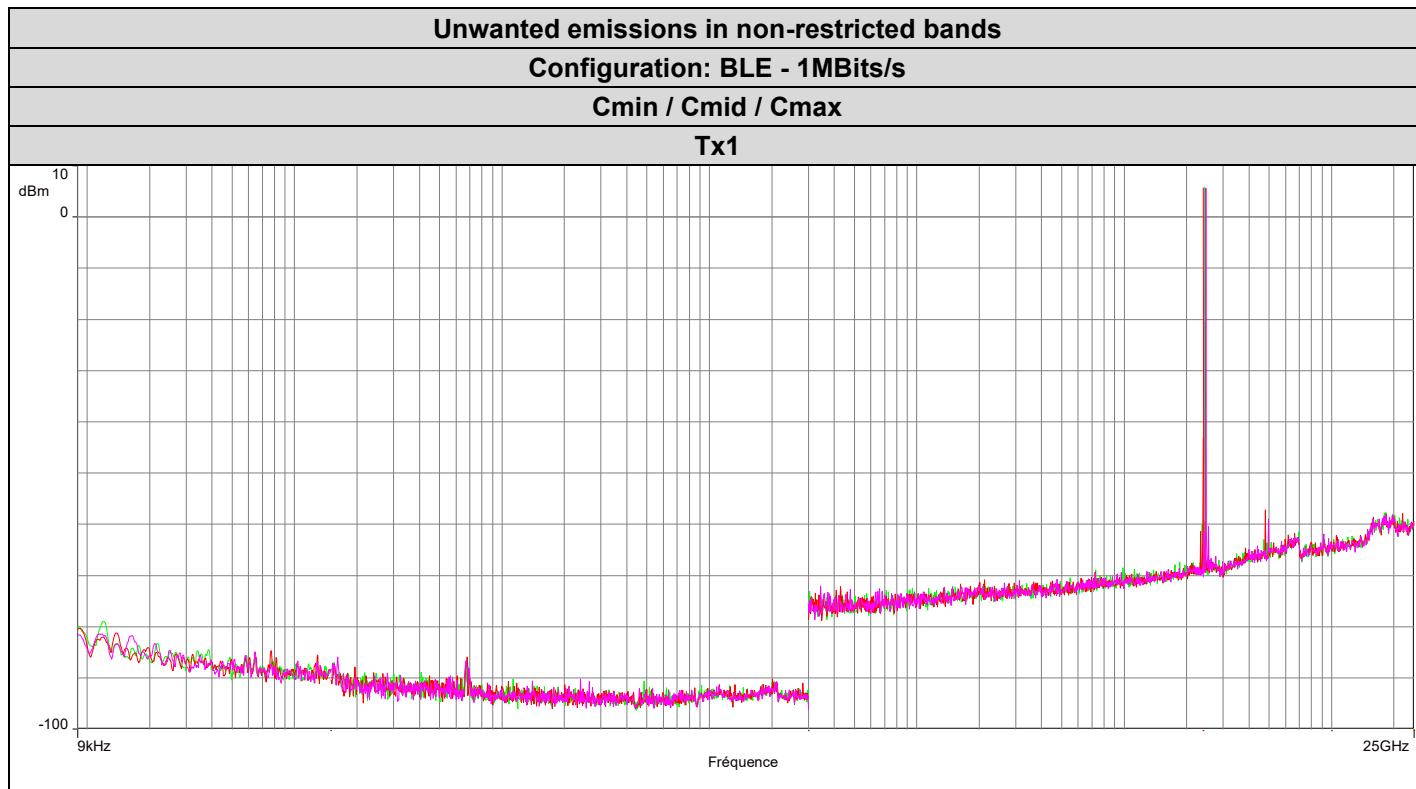

Frequency (MHz)	Level (dBm)	Level (dBc)	Limit (dBc)
2402.02	5.69		
4804.8	-57.21	-62.9	-20

7.7. CONCLUSION

Unwanted emissions in non-restricted bands and at the band edge measurement performed on the sample of the product **AXIUM RX9000**, Sn: **2419MR900209 / 2419MR900267**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.



8. UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS

8.1. TEST CONDITIONS

Date of test : May 16, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 32
Ambient temperature (°C) : 21

8.2. TEST SETUP

Test procedure:
ANSI C63.10 & FCC Part 15 subpart C

Following frequency ranges, test setup parameters are different and specified in this table:

Frequency range:	9kHz to 30MHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Parallel, Perpendicular and Ground parallel	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	1m
Antenna Type:	Loop	
RBW Filter:	200Hz below 150kHz / 9kHz above 150kHz	
Maximization:	Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration	
EUT height:	1.5m	0.8m
Test site:	Full Anechoic Chamber	Open Aera Test Site
Distance EUT - Antenna:	3m	10m
Detector:	Peak	QPeak

Frequency range:	30MHz to 1GHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Horizontal and Vertical	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	Varied from 1m to 4m
Antenna Type:	Horn	
RBW Filter:	120kHz	
Maximization:	Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration	
EUT height:	1.5m	0.8m
Test site:	Full Anechoic Chamber	Open Aera Test Site
Distance EUT - Antenna:	3m	10m
Detector:	Peak	QPeak



Frequency range:	1GHz to 14GHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Horizontal and Vertical	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	Centered on EUT (§6.6.5 ANSI C63-10)
Antenna Type:	Horn	
RBW Filter:	1MHz	
Maximization:	Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration	
EUT height:	1.5m	1.5m
Test site:	Full Anechoic Chamber	Full Anechoic Chamber
Distance EUT - Antenna:	3m	3m
Detector:	Peak & Average	Peak & Average

Frequency range:	14GHz to 25GHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Horizontal and Vertical	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	Centered on EUT (§6.6.5 ANSI C63-10)
Antenna Type:	Horn	
RBW Filter:	1MHz	
Maximization:	Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration	
EUT height:	1.5m	1.5m
Test site:	Full Anechoic Chamber	Full Anechoic Chamber
Distance EUT - Antenna:	1m	1m
Detector:	Peak & Average	Peak & Average

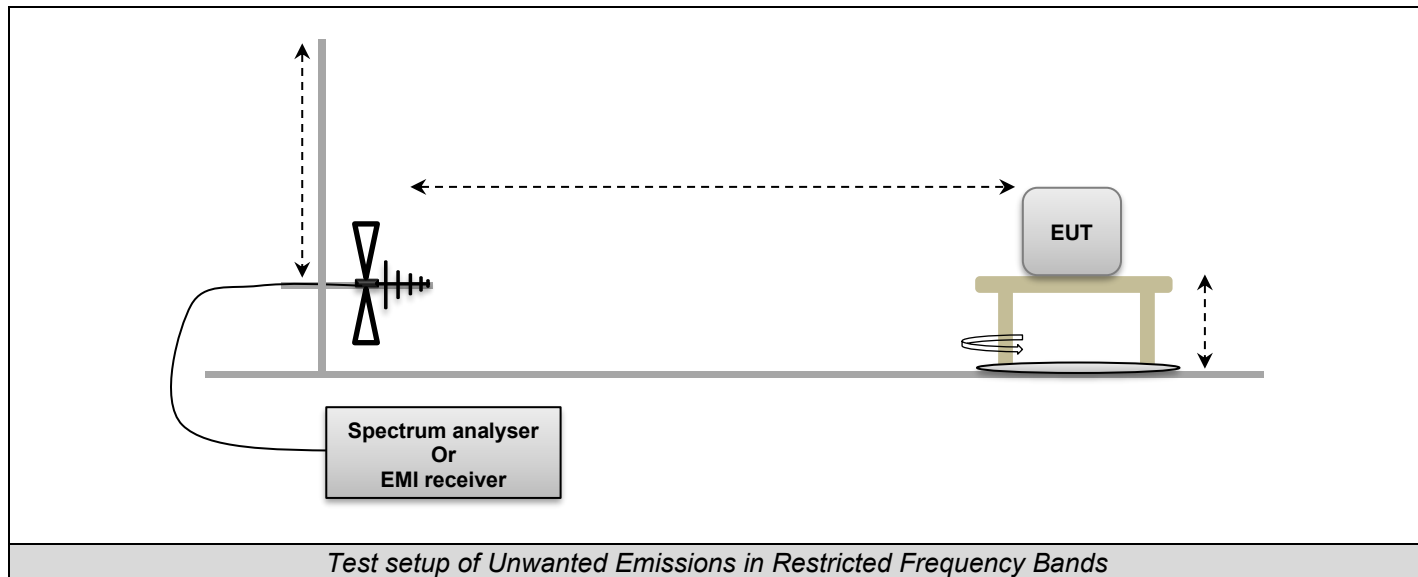




Photo of Unwanted Emissions in Restricted Frequency Bands

8.3. LIMIT

Measure at 300m		
Frequency range	Level	Detector
9kHz-490kHz	67.6dB μ V/m /F(kHz)	QPeak
Measure at 30m		
Frequency range	Level	Detector
490kHz-1.705MHz	87.6dB μ V/m /F(kHz)	QPeak
1.705MHz-30MHz	29.5dB μ V/m	QPeak
Measure at 10m		
Frequency range	Level	Detector
30MHz to 88MHz	29.5dB μ V/m	QPeak
88MHz to 216MHz	33dB μ V/m	QPeak
216MHz to 960MHz	35.5B μ V/m	QPeak
960MHz to 1000MHz	43.5dB μ V/m	QPeak
Above 1000MHz	63.5dB μ V/m	Peak
	43.5dB μ V/m	Average
Measure at 3m		
Frequency range	Level	Detector
30MHz to 88MHz	40dB μ V/m	QPeak
88MHz to 216MHz	43.5dB μ V/m	QPeak
216MHz to 960MHz	46B μ V/m	QPeak
960MHz to 1000MHz	54dB μ V/m	QPeak
Above 1000MHz	74dB μ V/m	Peak
	54dB μ V/m	Average

8.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Amplifier 10MHz - 18GHz	LCIE SUD EST	—	A7102082	05/22	05/24
Antenna Bi-log	AH System	SAS-521-7	C2040180	05/23	05/25
Antenna horn 18GHz	EMCO	3115	C2042029	03/22	03/25
BAT EMC	NEXIO	v3.21.0.32	L1000115		
CABLE	TELEDYNE	R82-0404-0.5M	A5330010	03/22	03/25
Cable 0.75m	-	18GHz	A5329900	08/22	08/24
Cable SMA 40cm	WITHWAVE	W101-SM1-0.4M	A5329979	10/23	10/26
Comb EMR HF	YORK	CGE01	A3169114		
CONTROLLER	INNCO	CO3000	D3044034		
Emission Cable (SMA 1m)	TELEDYNE	26GHz	A5329874	08/22	08/25
Emission Cable (SMA 3.3m)	TELEDYNE	26GHz	A5329875	08/22	08/25
Filter Matrice	LCIE SUD EST	Combined filters	A7484078	03/23	03/25
Rehausse Table C3	LCIE	—	F2000511		
Rehausse Table C3	LCIE	—	F2000507		
Semi-Anechoic chamber #3 (BF)	SIEPEL	—	D3044017_BF	04/22	04/25
Semi-Anechoic chamber #3 (VSWR)	SIEPEL	—	D3044017_VSWR	04/22	04/25
Spectrum analyzer	ROHDE & SCHWARZ	FSU 26	A4060058	09/23	09/25
Table C3	LCIE	—	F2000461		
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25
TILT	INNCO	TILT	D3044033		
Turntable chamber (Cage#3)	ETS Lingren	Model 2165	F2000371		
Turntable controller (Cage#3)	ETS Lingren	Model 2090	F2000444		

8.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



8.6. RESULTS

For all following measurements, worst case is presented with different configurations and modulations of EUT.

8.6.1. 30MHz to 14GHz


Graphs – Pre characterization:

Graph identifier	Polarization	Mode	Channel	EUT position	Comments
Emr# 1	H/V	TX	Cmin	Axis XY/Z	BLE 1M Supply 1
Emr# 2	H/V	TX	Cmid	Axis XY/Z	BLE 1M Supply 1
Emr# 3	H/V	TX	Cmax	Axis XY/Z	BLE 1M Supply 1
Emr# 4	H/V	TX	Cmin	Axis XY/Z	BLE 2M Supply 1
Emr# 5	H/V	TX	Cmid	Axis XY/Z	BLE 2M Supply 1
Emr# 6	H/V	TX	Cmax	Axis XY/Z	BLE 2M Supply 1
Emr# 7	H/V	TX	Cmin	Axis XY/Z	BLE 1M Supply 2
Emr# 8	H/V	TX	Cmid	Axis XY/Z	BLE 1M Supply 2
Emr# 9	H/V	TX	Cmax	Axis XY/Z	BLE 1M Supply 2
Emr# 10	H/V	TX	Cmin	Axis XY/Z	BLE 2M Supply 2
Emr# 11	H/V	TX	Cmid	Axis XY/Z	BLE 2M Supply 2
Emr# 12	H/V	TX	Cmax	Axis XY/Z	BLE 2M Supply 2

Radiated Emissions

Graph name: Emr#1
Frequency range: 30 MHz to 14 GHz

(H+V) - Cmin - TX mode - Automatic Axis

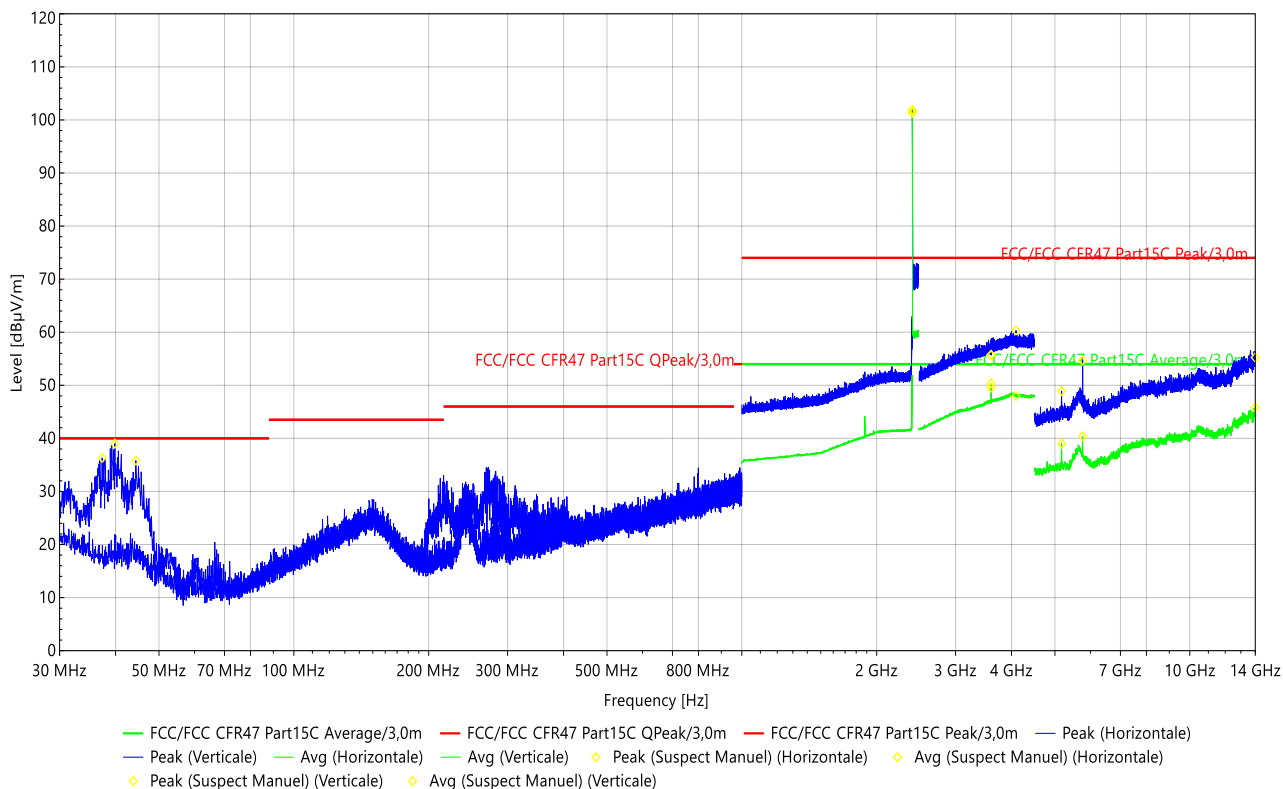


Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Avg (dBμV/m)	Lim.Avg (dBμV/m)	Lim.QP (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
2.402171 GHz*	101.72	74.00	101.48	54.00		267	H	35.51
2.40221275 GHz*	101.86	74.00	101.38	54.00		267	H	35.51
3.599834399 GHz	55.77	74.00	50.34	54.00		354	H	40.05
4.0930703 GHz	60.35	74.00	47.95	54.00		167	H	41.24
5.17545 GHz	48.94	74.00	39.02	54.00		68	V	-17.80
5.76445 GHz	54.69	74.00	40.39	54.00		203	V	-15.20
13.9886 GHz	55.23	74.00	45.81	54.00		263	V	-3.99
3.599834399 GHz	55.67	74.00	49.56	54.00		313	V	40.05
37.3235 MHz	36.34				40.00	334	V	18.08
39.8455 MHz	39.03				40.00	266	V	16.79
44.4045 MHz	35.84				40.00	39	V	14.54

*Carrier frequency

No significant frequency observed, the NSA margin >6dB (1GHz to 12.75 GHz)

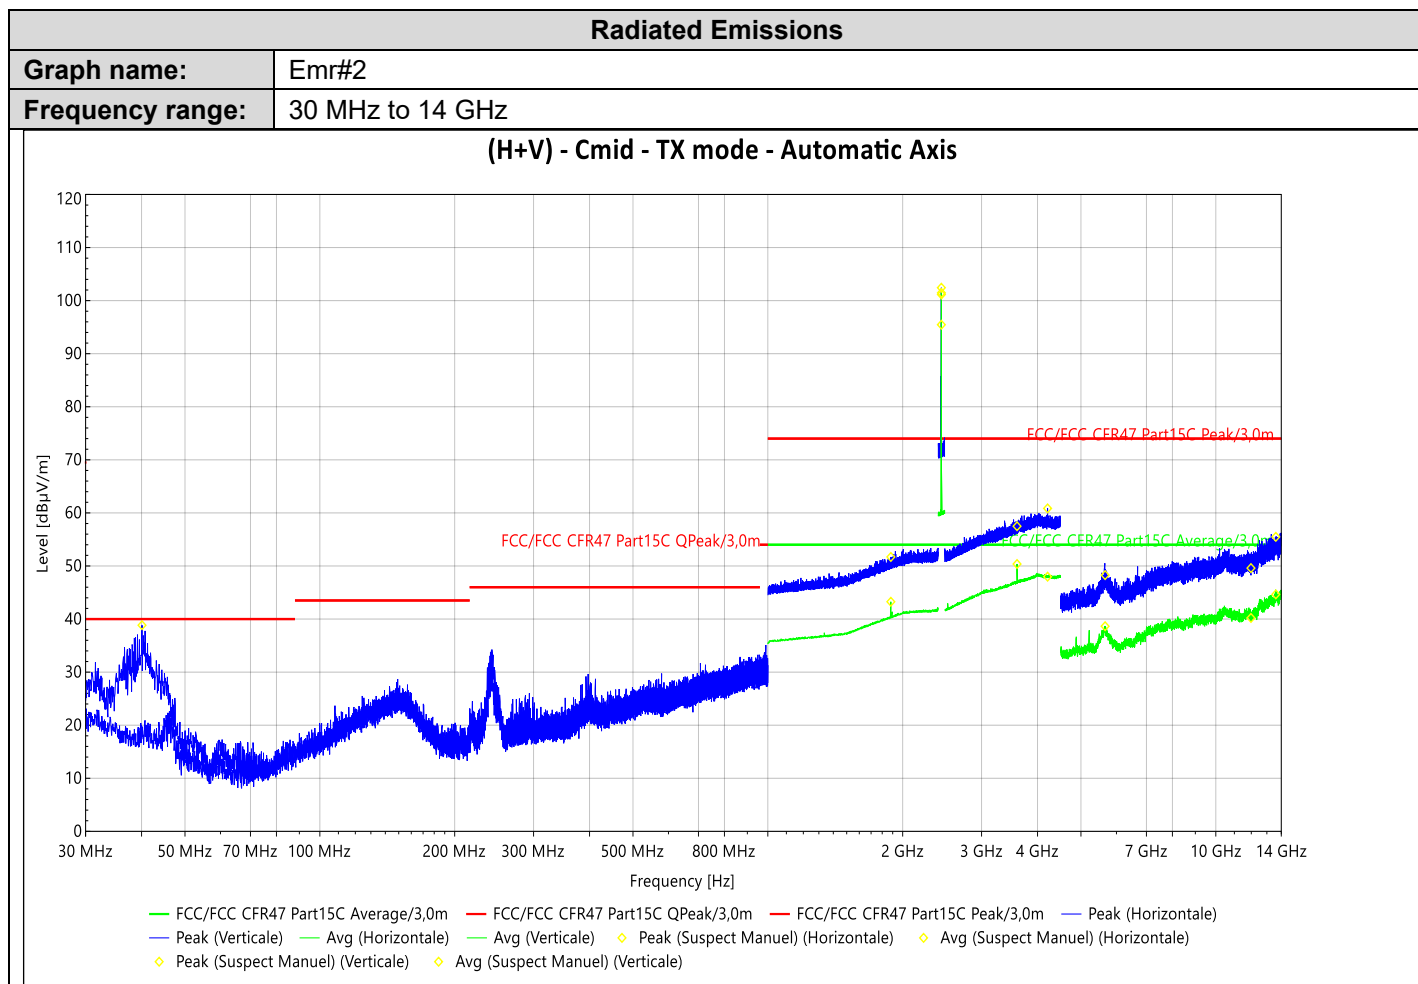

Pre-Characterization:

Frequency	PK Level (dBµV/m)	Lim.PK (dBµV/m)	Avg (dBµV/m)	Lim.Avg (dBµV/m)	Lim.QP (dBµV/m)	Angle (°)	Polar.	Correct. (dB)
1.882 GHz	51.70	74.00	43.26	54.00		0	H	34.49
3.599834399 GHz	57.49	74.00	50.37	54.00		0	H	40.05
4.212043799 GHz	60.85	74.00	47.99	54.00		0	H	41.23
13.6143 GHz	55.49	74.00	44.65	54.00		306	H	-5.79
5.6609 GHz	48.28	74.00	38.65	54.00		283	V	-14.35
11.9803 GHz	49.60	74.00	40.21	54.00		297	V	-10.65
2.439746 GHz*	102.43	74.00	95.46	54.00		168	V	35.55
2.440414 GHz*	101.46	74.00	101.15	54.00		192	V	35.55
40.088 MHz	38.84				40.00	48	V	16.67


*Carrier frequency

No significant frequency observed, the NSA margin >6dB (1GHz to 12.75 GHz)

Radiated Emissions

Graph name: Emr#3
Frequency range: 30 MHz to 14 GHz

(H+V) - Cmax - TX mode - Automatic Axis

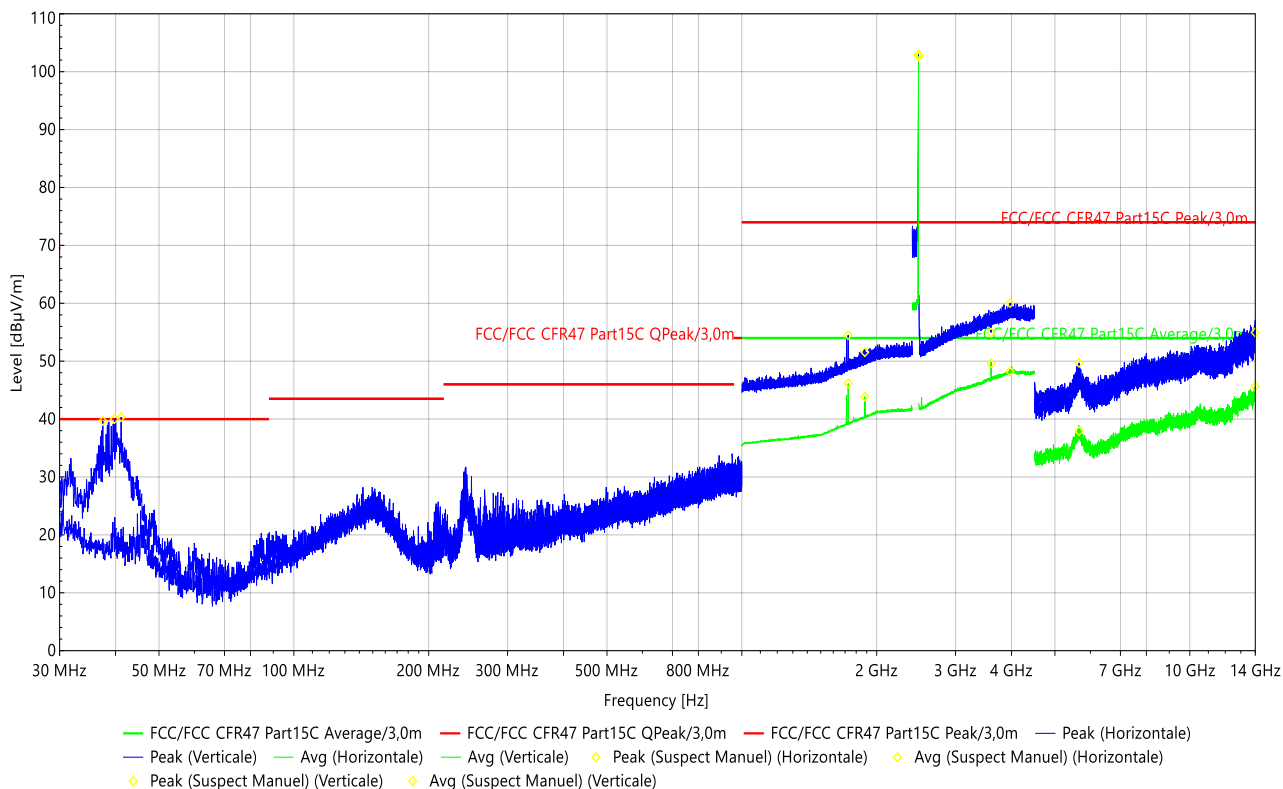

Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Avg (dBμV/m)	Lim.Avg (dBμV/m)	Lim.QP (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
3.599834399 GHz	54.94	74.00	49.61	54.00		194	H	40.05
3.9688539 GHz	60.05	74.00	48.23	54.00		69	H	41.23
5.65805 GHz	49.72	74.00	37.92	54.00		0	H	-14.38
13.9905 GHz	54.96	74.00	45.62	54.00		108	H	-3.97
2.4802435 GHz*	103.00	74.00	102.71	54.00		191	V	35.55
1.726949999 GHz	54.51	74.00	46.16	54.00		355	V	33.43
1.882 GHz	51.56	74.00	43.89	54.00		184	V	34.49
37.469 MHz	39.68				40.00	34	V	18.01
39.7485 MHz	40.00				40.00	258	V	16.84
41.155 MHz	40.34				40.00	130	V	16.12


*Carrier frequency

No significant frequency observed, the NSA margin >6dB (1GHz to 12.75 GHz)

Radiated Emissions

Graph name: Emr#4
Frequency range: 30 MHz to 14 GHz

(H+V) - Cmin - TX mode - Automatic Axis

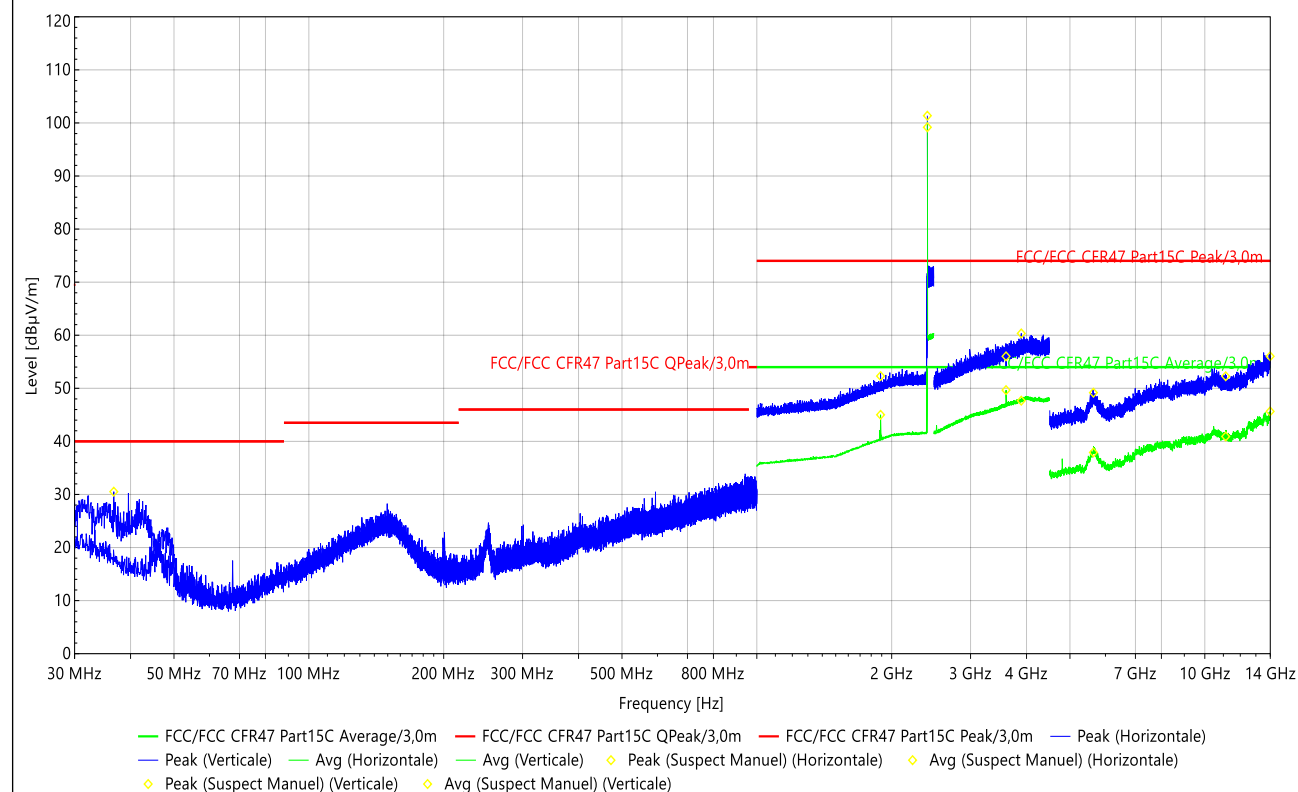

Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Avg (dBμV/m)	Lim.Avg (dBμV/m)	Lim.QP (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
2.402505 GHz*	101.36	74.00	99.18	54.00		264	H	35.51
3.599834399 GHz	56.02	74.00	49.66	54.00		0	H	40.05
3.8930335 GHz	60.34	74.00	47.67	54.00		340	H	40.91
5.64095 GHz	49.17	74.00	37.91	54.00		232	H	-14.58
11.1329 GHz	52.27	74.00	40.92	54.00		0	H	-10.27
13.98955 GHz	56.03	74.00	45.66	54.00		53	V	-3.98
1.889 GHz	52.30	74.00	45.01	54.00		96	V	34.53
36.693 MHz	30.52				40.00	195	V	18.42


*Carrier frequency

No significant frequency observed, the NSA margin >6dB (1GHz to 12.75 GHz)

Radiated Emissions

Graph name: Emr#5
Frequency range: 30 MHz to 14 GHz

(H+V) - Cmid - TX mode - Automatic Axis

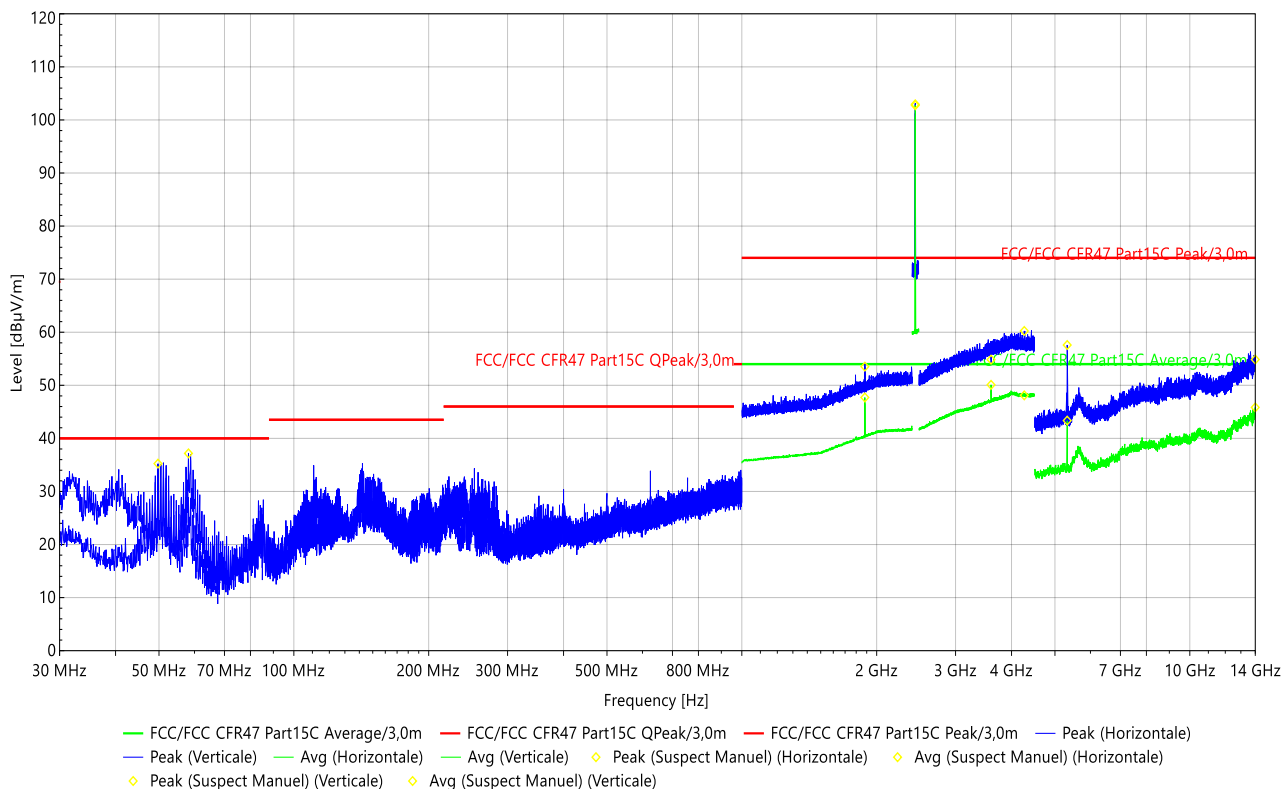

Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Avg (dBμV/m)	Lim.Avg (dBμV/m)	Lim.QP (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
2.438577 GHz*	102.95	74.00	102.76	54.00		192	H	35.77
4.270522299 GHz	60.24	74.00	48.10	54.00		265	H	41.53
5.3246 GHz	57.59	74.00	43.35	54.00		243	H	-17.51
13.9981 GHz	54.86	74.00	45.84	54.00		316	V	-3.89
3.599834399 GHz	54.84	74.00	50.10	54.00		313	V	40.39
1.882 GHz	53.52	74.00	47.71	54.00		0	V	34.64
49.7395 MHz	35.24				40.00	273	V	12.30
58.1785 MHz	37.17				40.00	100	V	10.32


*Carrier frequency

No significant frequency observed, the NSA margin >6dB (1GHz to 12.75 GHz)

Radiated Emissions

Graph name: Emr#6
Frequency range: 30 MHz to 14 GHz

(H+V) - Cmax - TX mode - Automatic Axis

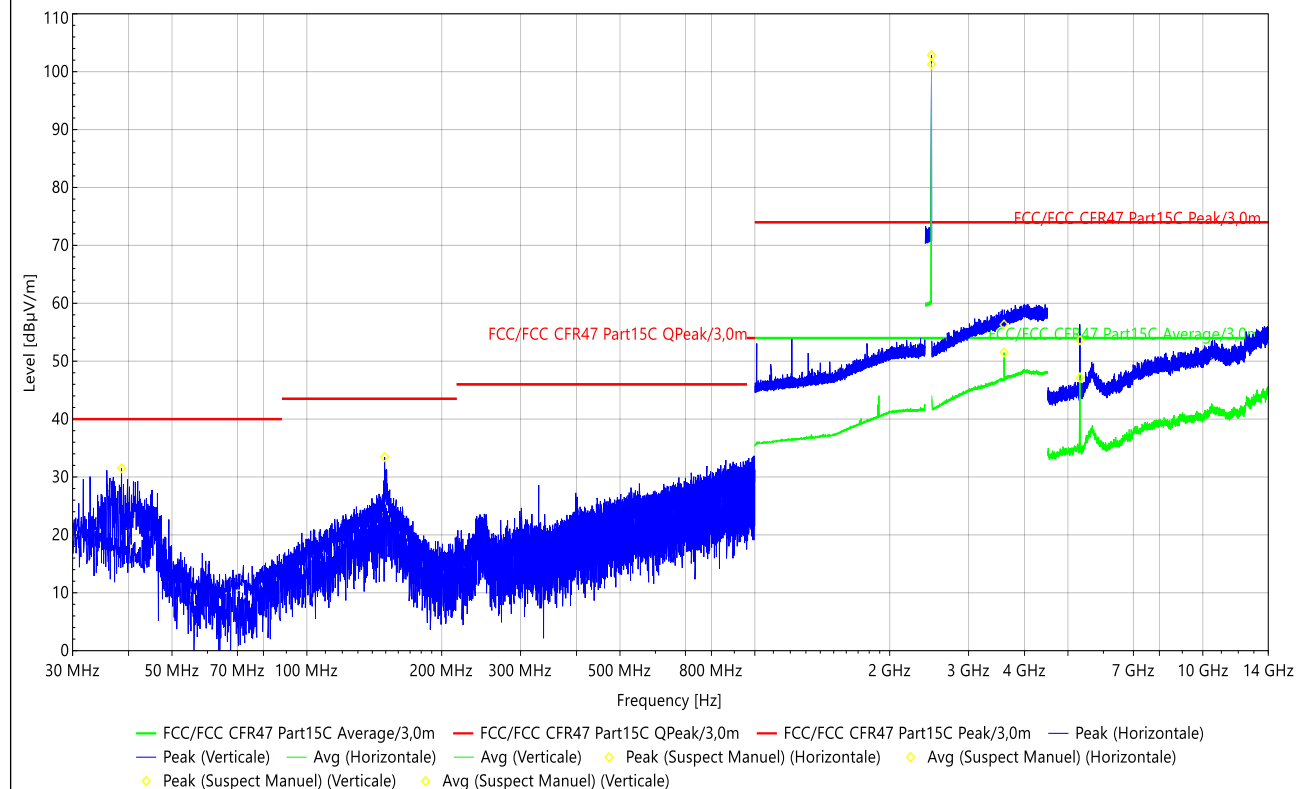


Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Avg (dBμV/m)	Lim.Avg (dBμV/m)	Lim.QP (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
149.1573 MHz	33.38					94	H	24.20
3.59436794 GHz	56.42	74.00	51.49	54.00		114	H	40.05
5.318426 GHz	53.73	74.00	47.21	54.00		0	H	-17.54
2.4798465 GHz*	102.76	74.00	101.30	54.00		165	V	35.55
38.5364 MHz	31.43				40.00	0	V	17.42
3.8930253 GHz	60.12	74.00	47.56	54.00		340	H	40.91

Radiated Emissions

Graph name: Emr#7
Frequency range: 30 MHz to 14 GHz

(H+V) - Cmin - TX mode - Automatic Axis

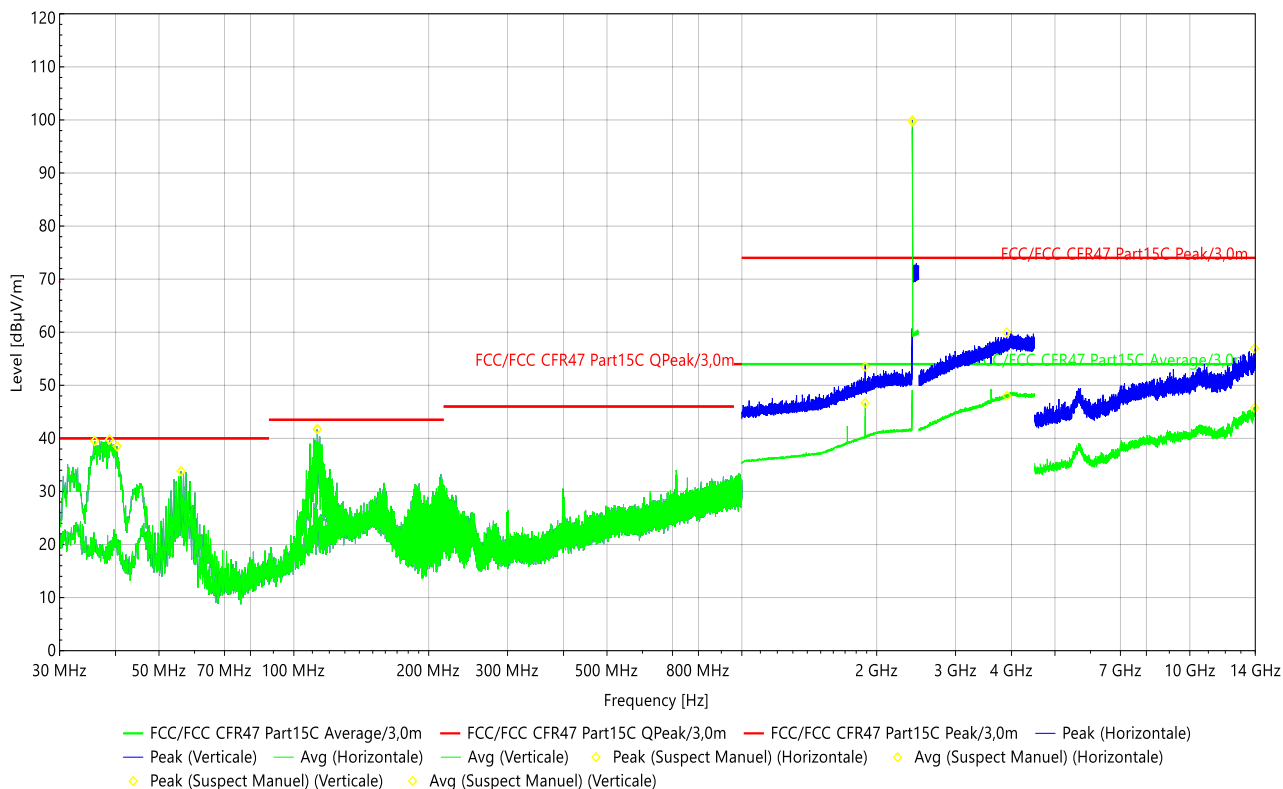

Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Avg (dBμV/m)	Lim.Avg (dBμV/m)	Lim.QP (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
112.7895 MHz	41.76		41.76		43.50	47	H	19.20
1.8855 GHz	53.51	74.00	46.68	54.00		86	H	34.66
2.4022545 GHz*	99.96	74.00	99.70	54.00		152	H	35.71
14.000 GHz	56.94	74.00	45.76	54.00		101	V	-3.87
3.903116 GHz	59.99	74.00	48.04	54.00		108	V	41.28
35.917 MHz	39.51		39.51		40.00	225	V	18.85
38.7785 MHz	39.79		39.79		40.00	64	V	17.32
40.3305 MHz	38.51		38.51		40.00	93	V	16.55
56.0445 MHz	33.83		33.83		40.00	124	V	10.62


*Carrier frequency

No significant frequency observed, the NSA margin >6dB (1GHz to 12.75 GHz)

Radiated Emissions

Graph name: Emr#8
Frequency range: 30 MHz to 14 GHz

(H+V) - Cmid - TX mode - Automatic Axis

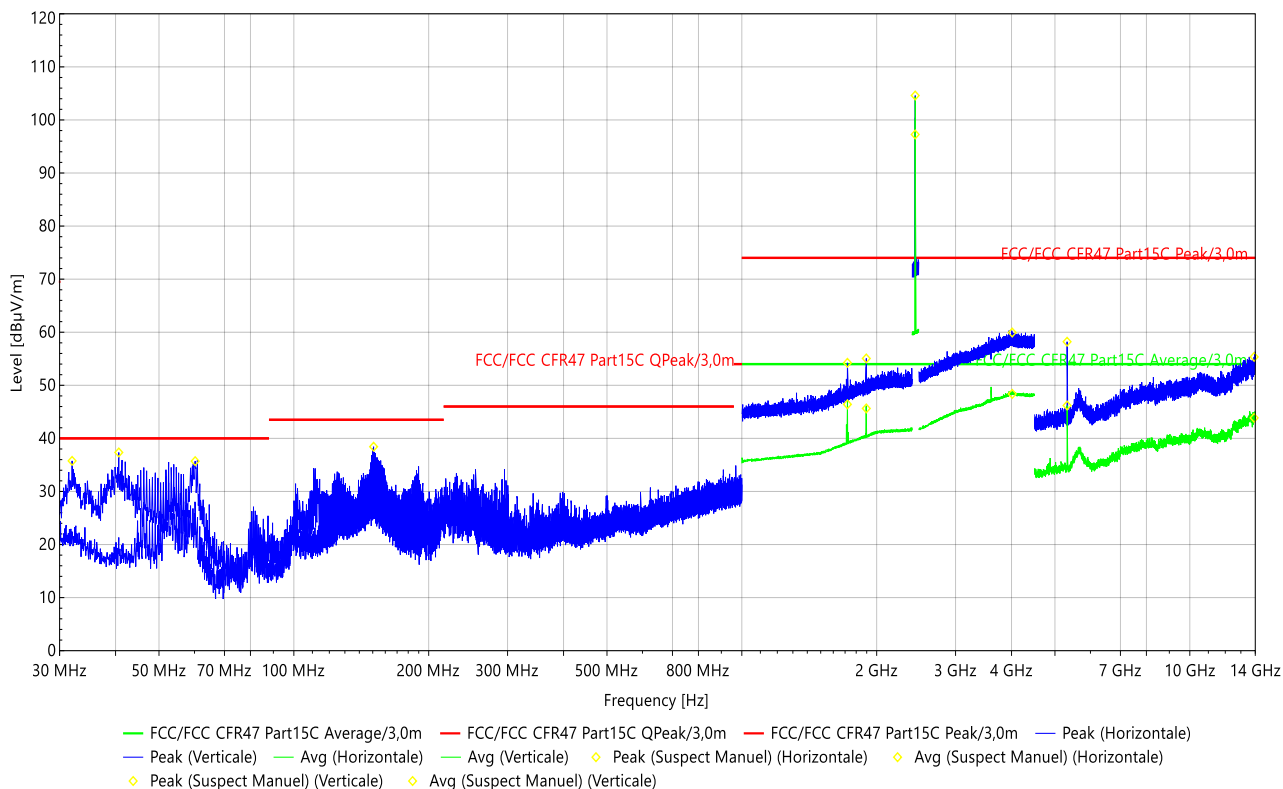

Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Avg (dBμV/m)	Lim.Avg (dBμV/m)	Lim.QP (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
2.437742 GHz*	104.60	74.00	97.26	54.00		181	H	35.77
5.32175 GHz	58.22	74.00	46.20	54.00		281	V	-17.53
13.9183 GHz	55.35	74.00	43.86	54.00		175	V	-4.46
4.0140235 GHz	59.94	74.00	48.38	54.00		5	V	41.72
1.72065 GHz	54.24	74.00	46.41	54.00		249	V	33.57
1.896 GHz	55.06	74.00	45.64	54.00		341	V	34.74
31.9885 MHz	35.76				40.00	219	V	20.91
40.67 MHz	37.35				40.00	296	V	16.37
60.2155 MHz	35.71				40.00	309	V	10.16
150.668 MHz	38.43				43.50	136	V	24.17


*Carrier frequency

No significant frequency observed, the NSA margin >6dB (1GHz to 12.75 GHz)

Radiated Emissions

Graph name: Emr#9
Frequency range: 30 MHz to 14 GHz

(H+V) - Cmax - TX mode - Automatic Axis

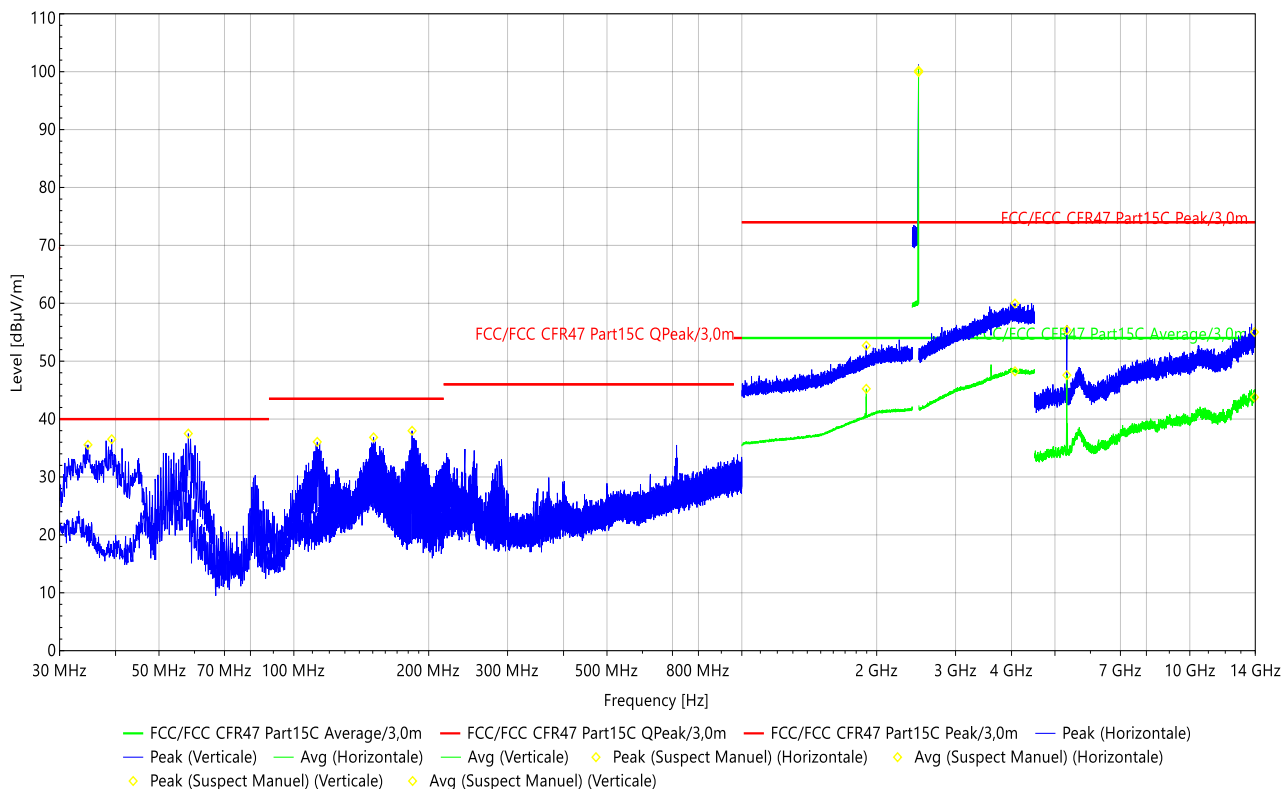

Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Avg (dBμV/m)	Lim.Avg (dBμV/m)	Lim.QP (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
2.4802435 GHz*	100.18	74.00	99.93	54.00		30	H	35.77
112.7895 MHz	36.06				43.50	49	H	19.20
150.668 MHz	36.84				43.50	146	H	24.17
183.5995 MHz	37.98				43.50	9	H	16.75
1.896 GHz	52.69	74.00	45.23	54.00		0	H	34.74
5.31605 GHz	55.39	74.00	47.58	54.00		159	V	-17.55
13.94015 GHz	55.02	74.00	43.77	54.00		69	V	-4.36
4.071292099 GHz	59.96	74.00	48.25	54.00		139	V	41.65
34.7045 MHz	35.55				40.00	230	V	19.49
39.215 MHz	36.52				40.00	44	V	17.10
58.13 MHz	37.50				40.00	113	V	10.33


*Carrier frequency

No significant frequency observed, the NSA margin >6dB (1GHz to 12.75 GHz)

Radiated Emissions

Graph name: Emr#10
Frequency range: 30 MHz to 14 GHz

(H+V) - Cmin - TX mode - Automatic Axis

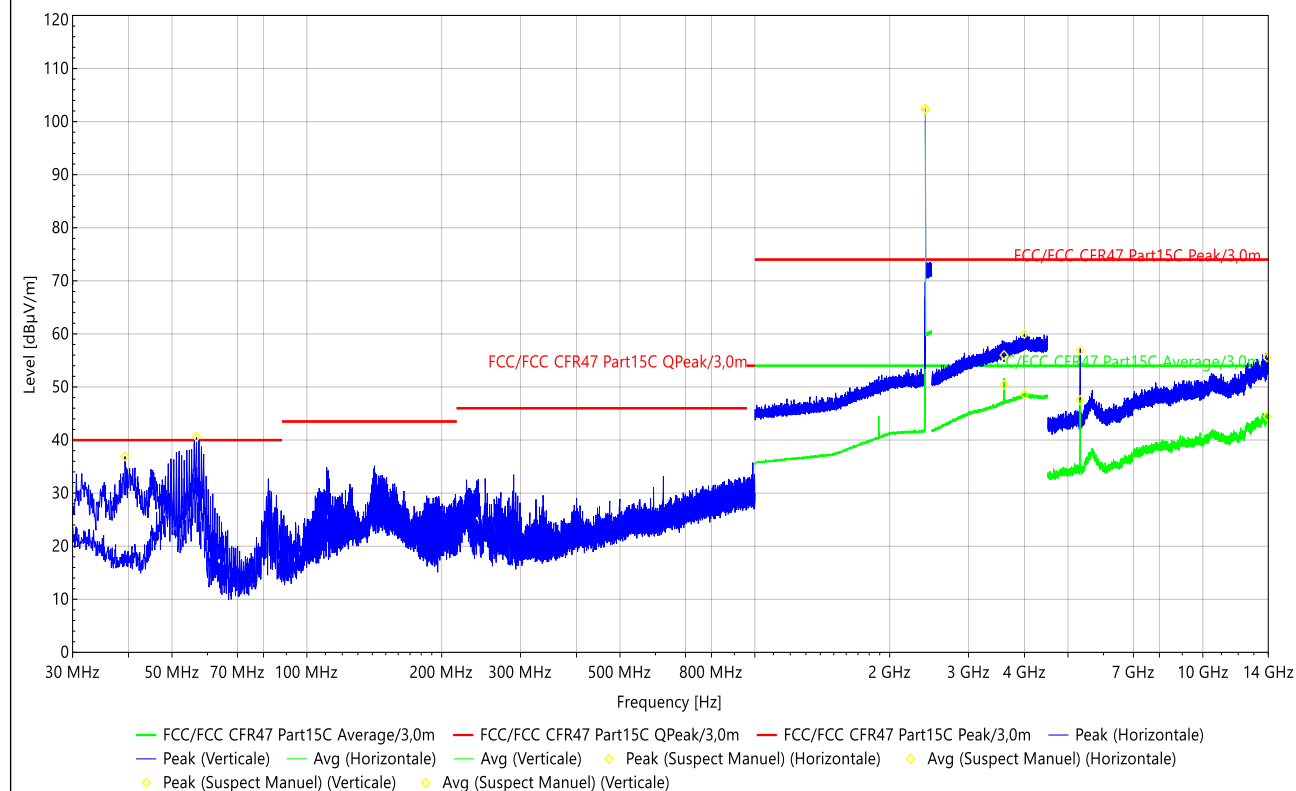


Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Avg (dBμV/m)	Lim.Avg (dBμV/m)	Lim.QP (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
2.40246325 GHz*	102.42	74.00	102.26	54.00		169	H	35.71
3.599834399 GHz	56.00	74.00	50.40	54.00		74	H	40.39
5.32365 GHz	56.94	74.00	47.54	54.00		192	V	-17.52
13.9221 GHz	55.56	74.00	44.44	54.00		0	V	-4.44
3.9966816 GHz	60.00	74.00	48.66	54.00		83	V	41.71
39.2635 MHz	36.91				40.00	0	V	17.07
56.7235 MHz	40.58				40.00	94	V	10.49

*Carrier frequency

No significant frequency observed, the NSA margin >6dB (1GHz to 12.75 GHz)

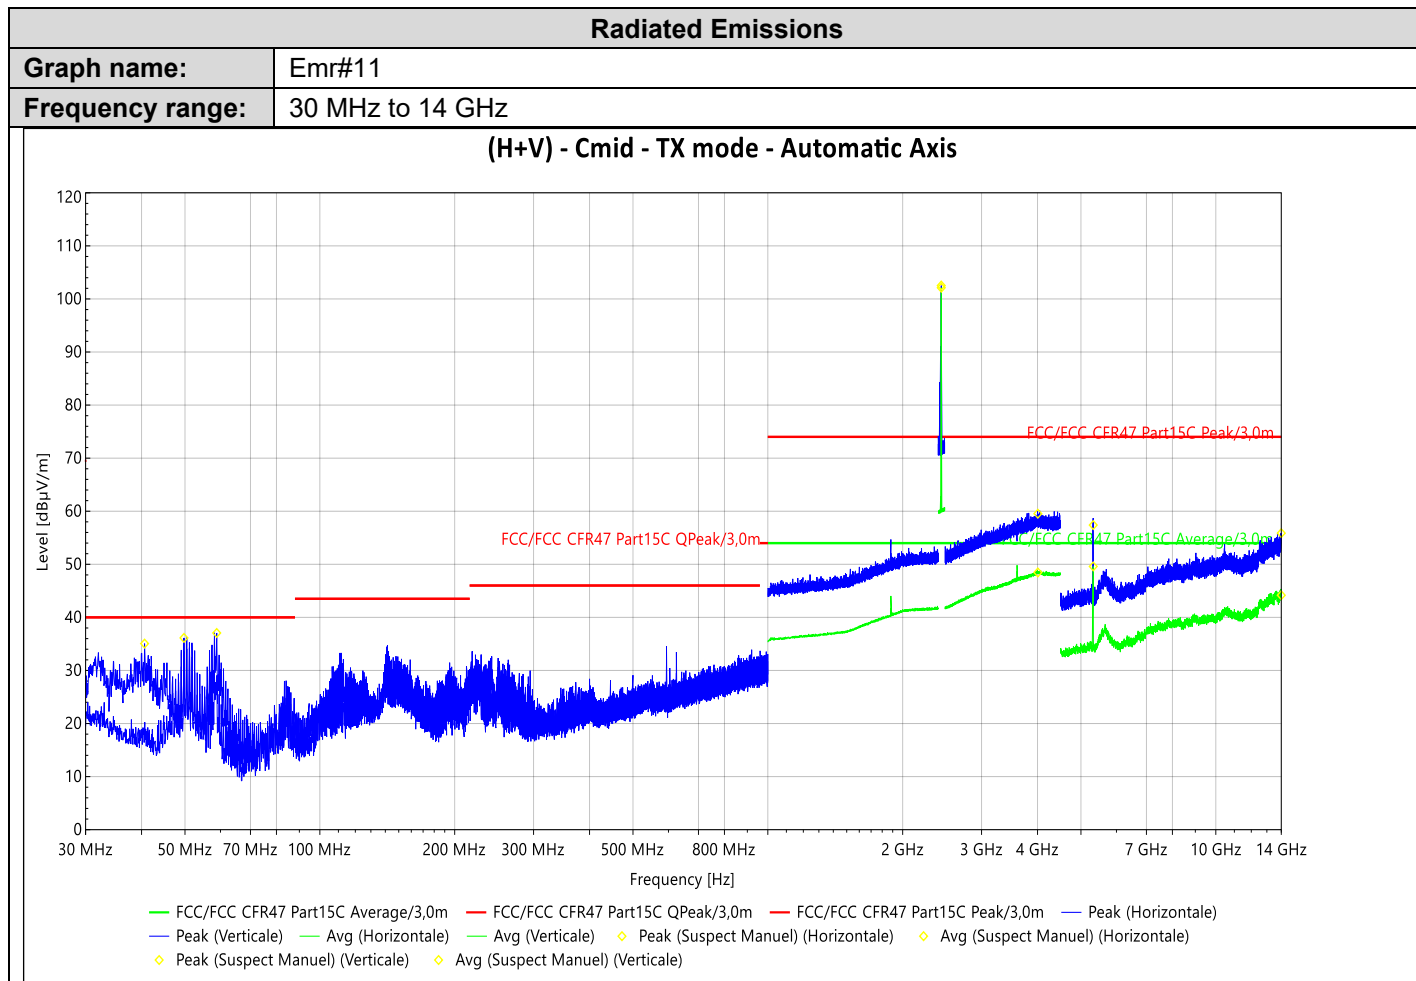

Pre-Characterization:

Frequency	PK Level (dBµV/m)	Lim.PK (dBµV/m)	Avg (dBµV/m)	Lim.Avg (dBµV/m)	Lim.QP (dBµV/m)	Angle (°)	Polar.	Correct. (dB)
2.43845175 GHz*	102.52	74.00	102.11	54.00		168	H	35.77
4.0063608 GHz	59.53	74.00	48.46	54.00		19	H	41.73
13.99905 GHz	55.87	74.00	44.17	54.00		14	H	-3.88
5.32555 GHz	57.40	74.00	49.60	54.00		0	V	-17.51
40.6215 MHz	35.06				40.00	308	V	16.40
49.7395 MHz	36.13				40.00	285	V	12.30
58.8575 MHz	37.06				40.00	102	V	10.25


*Carrier frequency

No significant frequency observed, the NSA margin >6dB (1GHz to 12.75 GHz)

Radiated Emissions

Graph name: Emr#12
Frequency range: 30 MHz to 14 GHz

(H+V) - Cmax - TX mode - Automatic Axis

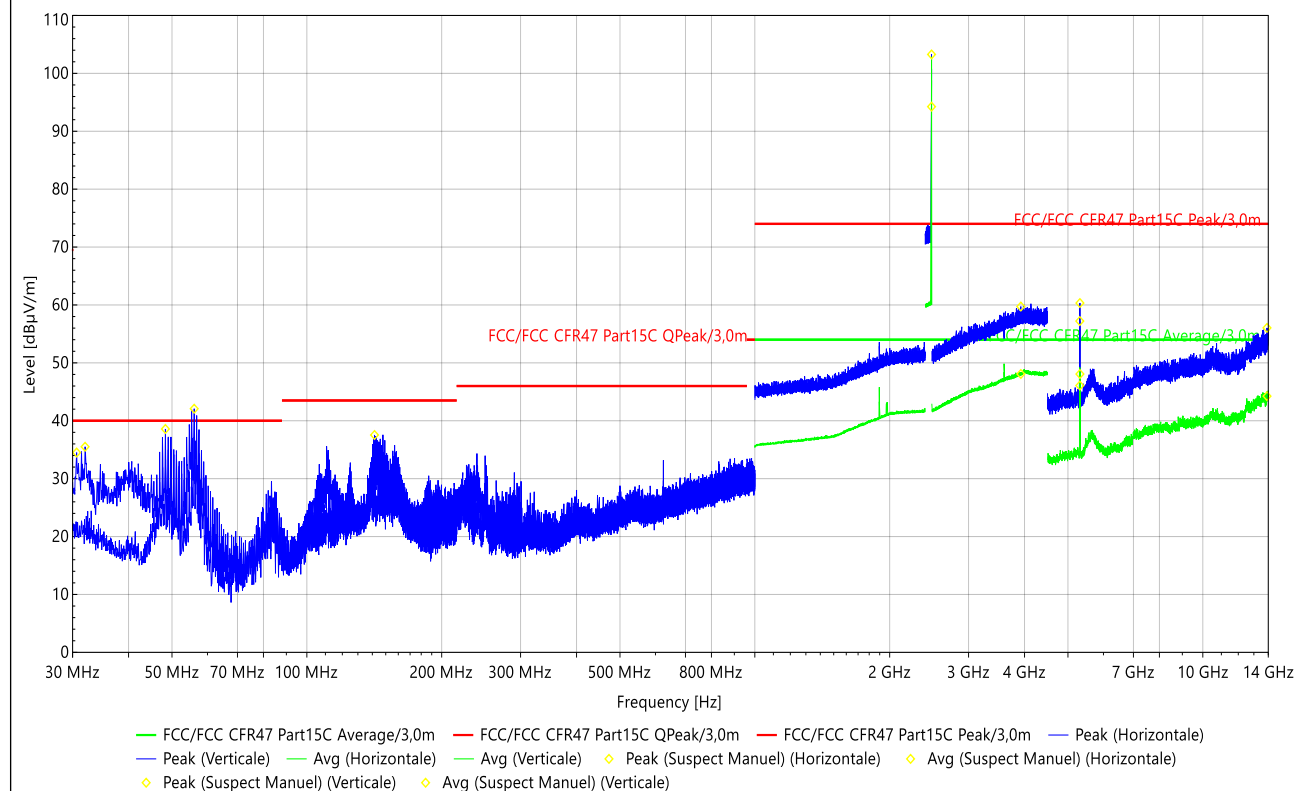

Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Avg (dBμV/m)	Lim.Avg (dBμV/m)	Lim.QP (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
2.479993 GHz*	103.27	74.00	94.25	54.00		182	H	35.77
5.317 GHz	60.33	74.00	48.07	54.00		136	H	-17.55
5.31415 GHz	57.22	74.00	46.08	54.00		38	V	-17.56
13.9088 GHz	56.04	74.00	44.25	54.00		223	V	-4.50
3.9244909 GHz	59.74	74.00	48.08	54.00		259	V	41.36
30.6305 MHz	34.51				40.00	141	V	21.64
31.9885 MHz	35.52				40.00	174	V	20.91
48.333 MHz	38.58				40.00	302	V	12.81
56.0445 MHz	42.08				40.00	110	V	10.62
141.5985 MHz	37.54				43.50	141	V	23.56

*Carrier frequency

No significant frequency observed, the NSA margin >6dB (1GHz to 12.75 GHz)

Final measurement:

Test Frequency (MHz)	Meter Reading dB(μV)	Detector (Pk/QP/Av)	Transducer Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
39.8455	24.6	QP	13.9	38.5	40.0	-1.5
44.4045	23.4	QP	13.3	36.7	40.0	-3.3
40.0880	23.7	QP	13.9	37.6	40.0	-2.4
37.4690	23.7	QP	14.1	37.8	40.0	-2.2
39.7485	23.3	QP	13.9	37.2	40.0	-2.8
41.1550	23.7	QP	13.8	37.5	40.0	-2.5
39.021	24.0	QP	14.0	38.0	40.0	-2.0
41.2035	23.7	QP	13.8	37.5	40.0	-2.5
38.9725	22.6	QP	14.0	36.6	40.0	-3.4
44.8895	21.8	QP	13.2	35.0	40.0	-5.0
41.155	24.6	QP	13.8	38.4	40.0	-1.6
36.693	23.3	QP	14.1	37.4	40.0	-2.6
39.5545	24.2	QP	14.0	38.2	40.0	-1.8
41.4945	22.5	QP	13.8	36.3	40.0	-3.7
40.6215	23.4	QP	13.9	37.3	40.0	-2.7
40.4760	24.0	QP	13.9	37.9	40.0	-2.1
64.9685	22.2	QP	7.9	30.1	40.0	-9.9
35.9170	24.2	QP	14.2	38.4	40.0	-1.6
38.7785	23.1	QP	14.0	37.1	40.0	-2.9
40.3305	23.3	QP	13.9	37.2	40.0	-2.8
56.0445	23.7	QP	10.4	34.1	40.0	-5.9
112.7895	24.3	QP	12.7	37.0	43.5	-6.5
31.9885	23.0	QP	13.9	36.9	40.0	-3.1
60.2155	23.6	QP	9.1	32.7	40.0	-7.3
150.668	23.4	QP	18.9	42.3	43.5	-1.2
183.5995	23.9	QP	16.3	40.2	43.5	-3.3
58.8575	23.2	QP	9.5	32.7	40.0	-7.3
141.5985	22.8	QP	17.5	40.3	43.5	-3.2



8.6.2. 14GHz to 25GHz


Graphs – Pre characterization:

Graph identifier		Polarization	Mode	Channel	EUT position	Comments
Emr#	13	H/V	TX	Cmin	Axis XY/Z	BLE 1M
Emr#	14	H/V	TX	Cmid	Axis XY/Z	BLE 1M
Emr#	15	H/V	TX	Cmax	Axis XY/Z	BLE 1M
Emr#	16	H/V	TX	Cmin	Axis XY/Z	BLE 2M
Emr#	17	H/V	TX	Cmid	Axis XY/Z	BLE 2M
Emr#	18	H/V	TX	Cmax	Axis XY/Z	BLE 2M

Radiated Emissions


Graph name: Emr#7
Frequency range: 14 GHz to 26 GHz

(H+V) - CMin - TX mode - Automatic Axis

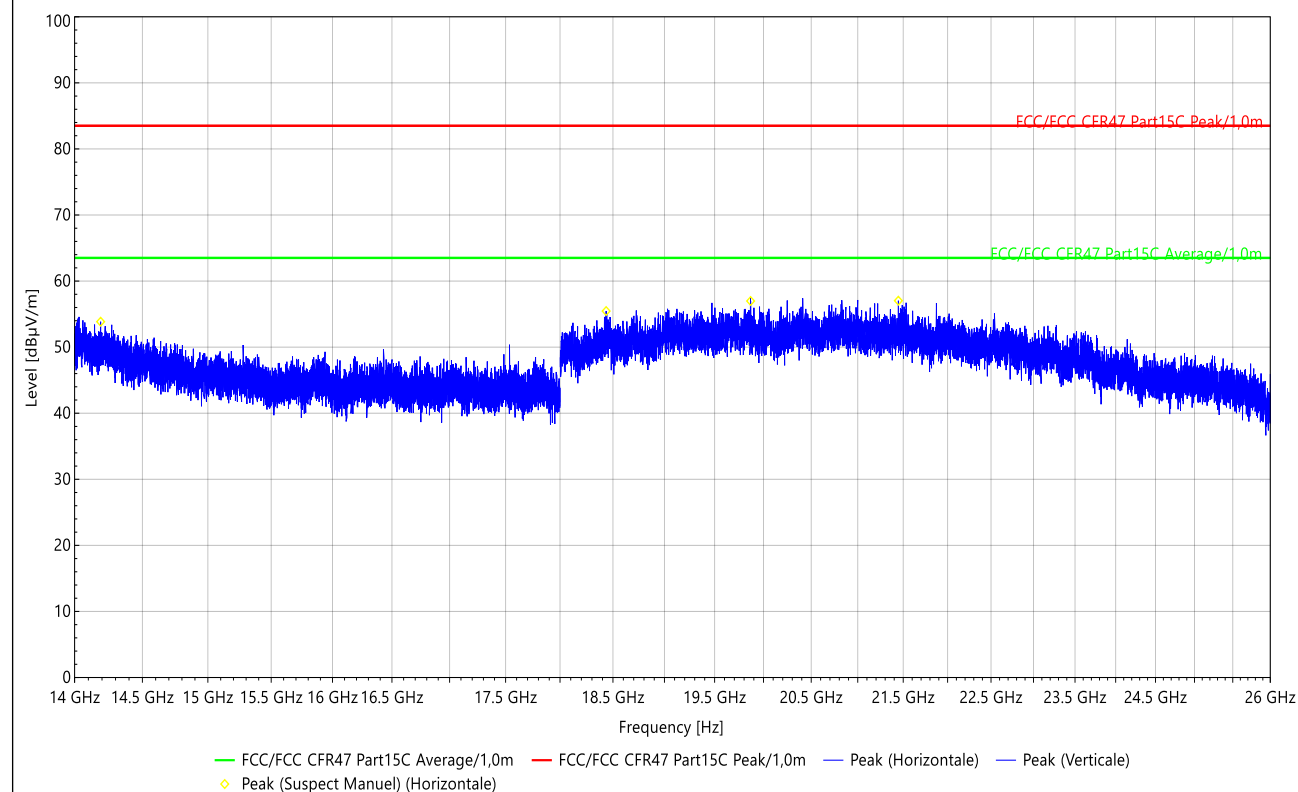


Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Lim.Avg (dBμV/m)	Polar.	Correct. (dB)
14,19 GHz	53.85	83.50	63.50	H	2.11
18,435 GHz	55.46	83.50	63.50	H	3.29
19,867 GHz	56.98	83.50	63.50	H	3.67
21,446 GHz	57.03	83.50	63.50	H	2.53

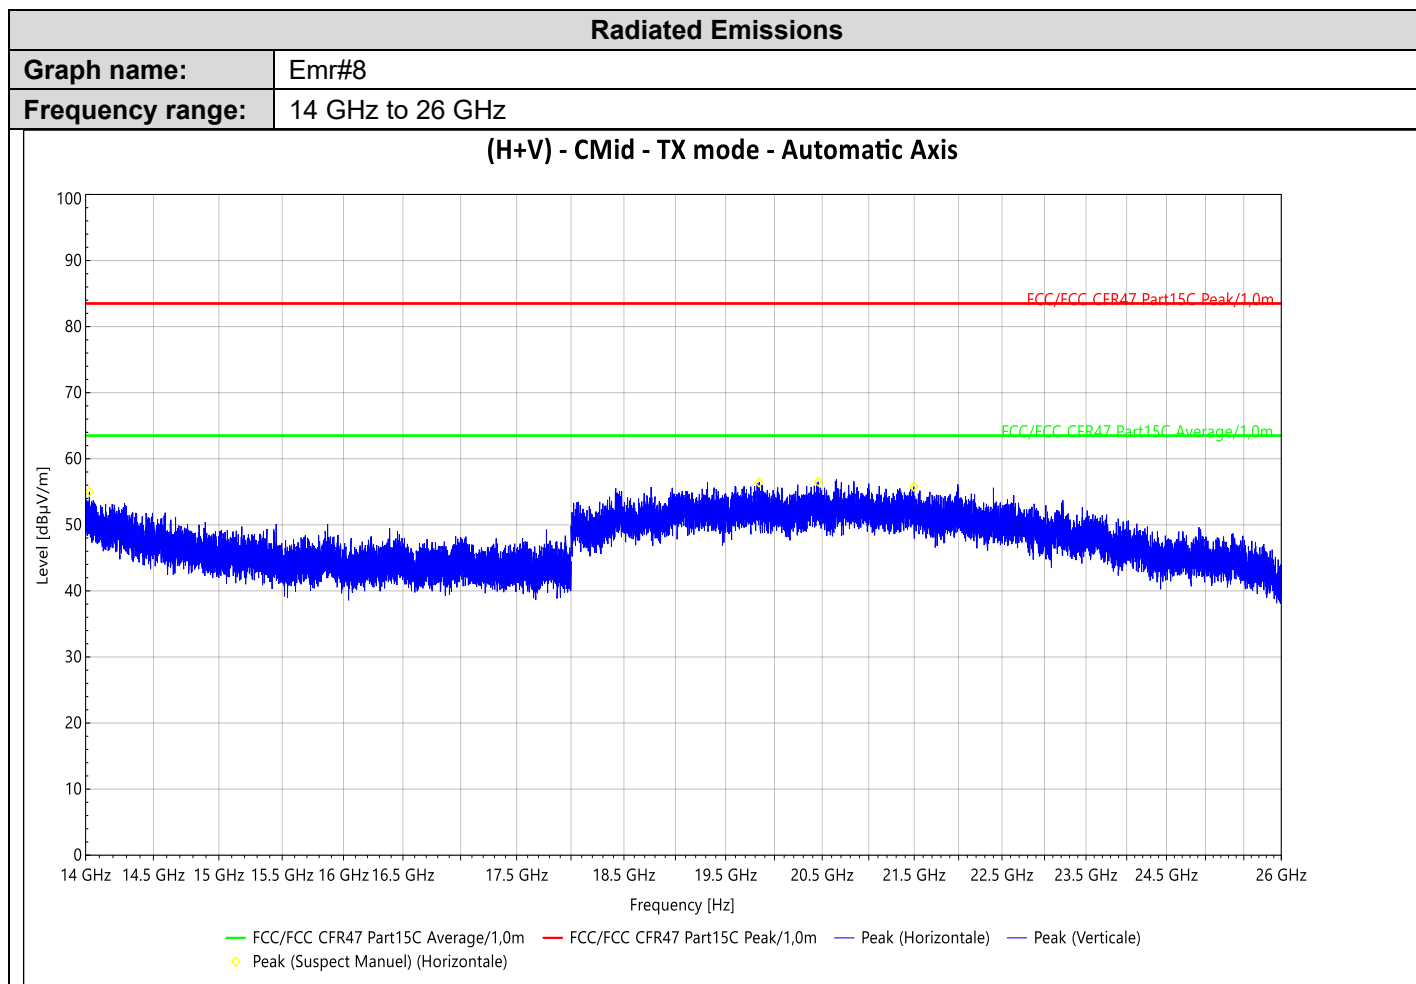

Pre-Characterization:

Frequency	PK Level (dBµV/m)	Lim.PK (dBµV/m)	Lim.Avg (dBµV/m)	Polar.	Correct. (dB)
14,0275 GHz	54.99	83.50	63.50	H	3.47
19,841 GHz	56.41	83.50	63.50	H	3.78
20,457 GHz	56.52	83.50	63.50	H	3.51
21,495 GHz	55.77	83.50	63.50	H	2.59

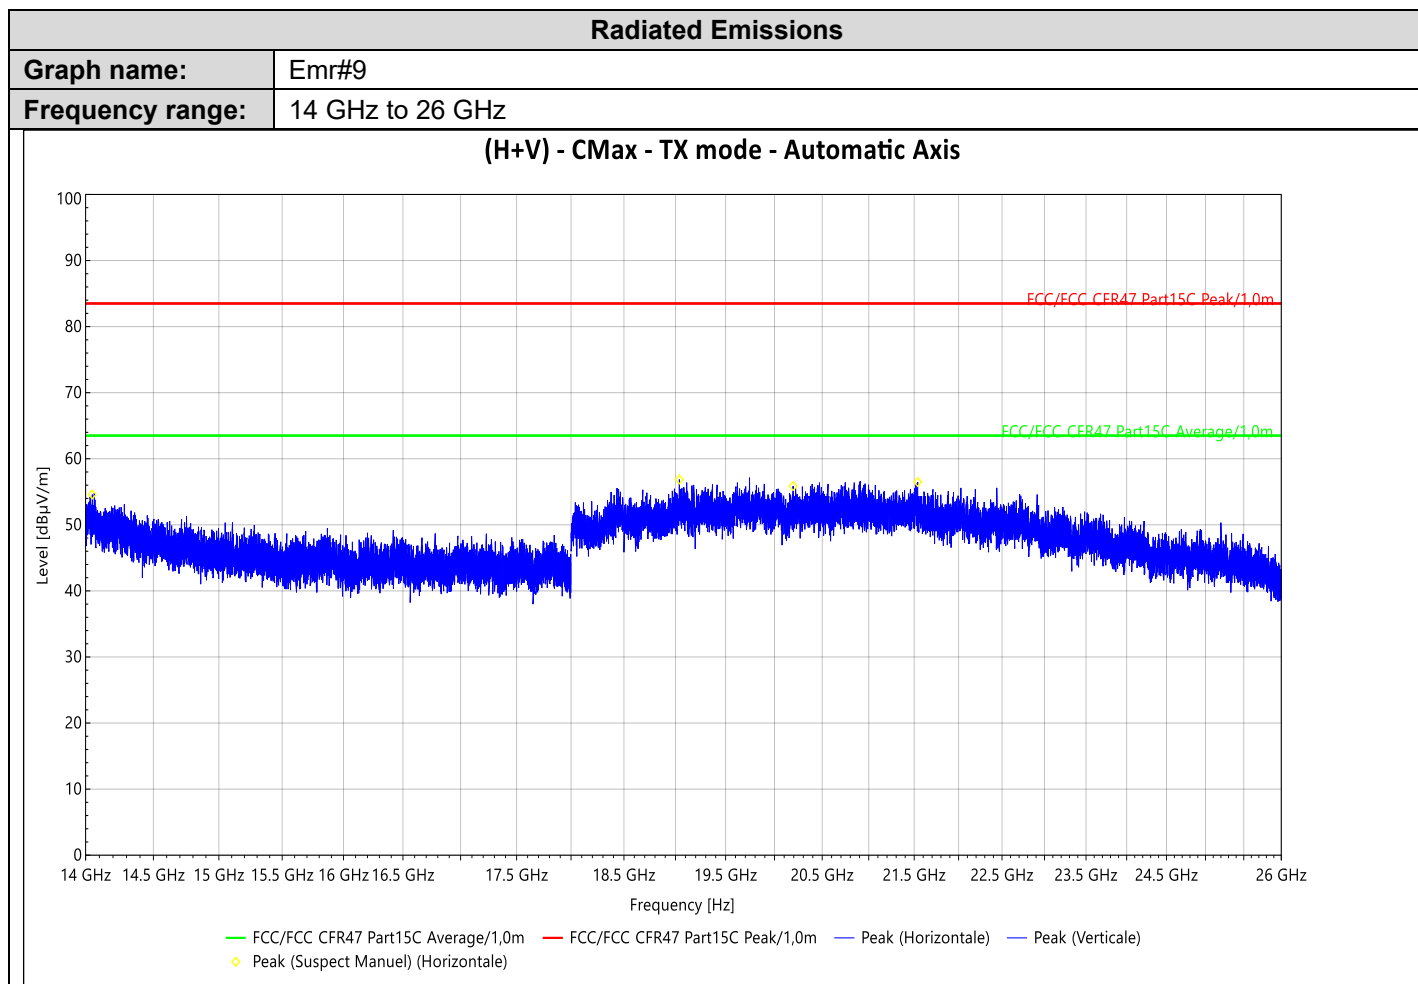


Pre-Characterization:

Frequency	PK Level (dBµV/m)	Lim.PK (dBµV/m)	Lim.Avg (dBµV/m)	Polar.	Correct. (dB)
14,0485 GHz	54.59	83.50	63.50	H	3.34
19,038 GHz	56.86	83.50	63.50	H	4.08
20,193 GHz	55.86	83.50	63.50	H	3.06
21,539 GHz	56.48	83.50	63.50	H	2.64

Radiated Emissions

Graph name: Emr#10
Frequency range: 14 GHz to 26 GHz

Copie de (H+V) - CMin - TX mode - Automatic Axis

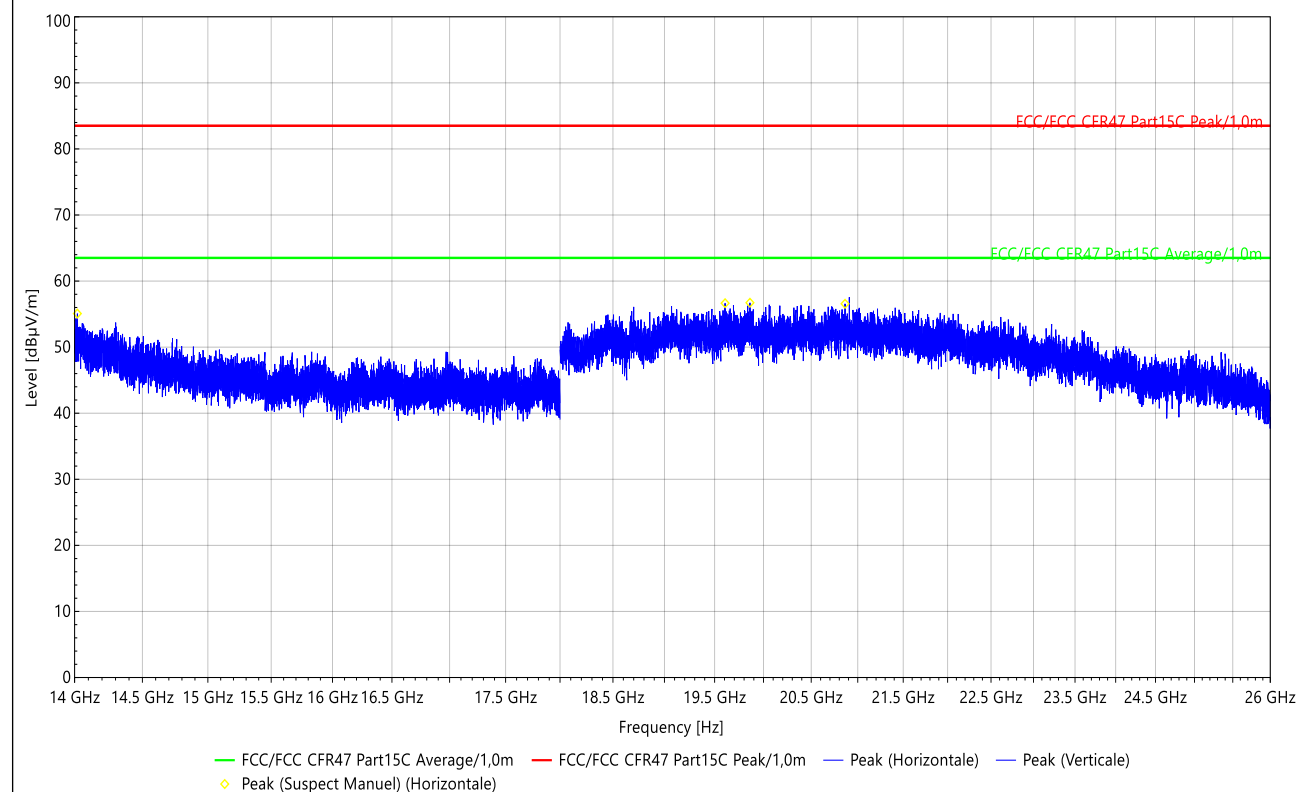


Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Lim.Avg (dBμV/m)	Polar.	Correct. (dB)
14,02 GHz	55.08	83.50	63.50	H	3.51
19,606 GHz	56.65	83.50	63.50	H	3.75
19,86 GHz	56.72	83.50	63.50	H	3.71
20,862 GHz	56.56	83.50	63.50	H	2.74

Radiated Emissions


Graph name: Emr#11
Frequency range: 14 GHz to 26 GHz

Copie de (H+V) - CMid - TX mode - Automatic Axis

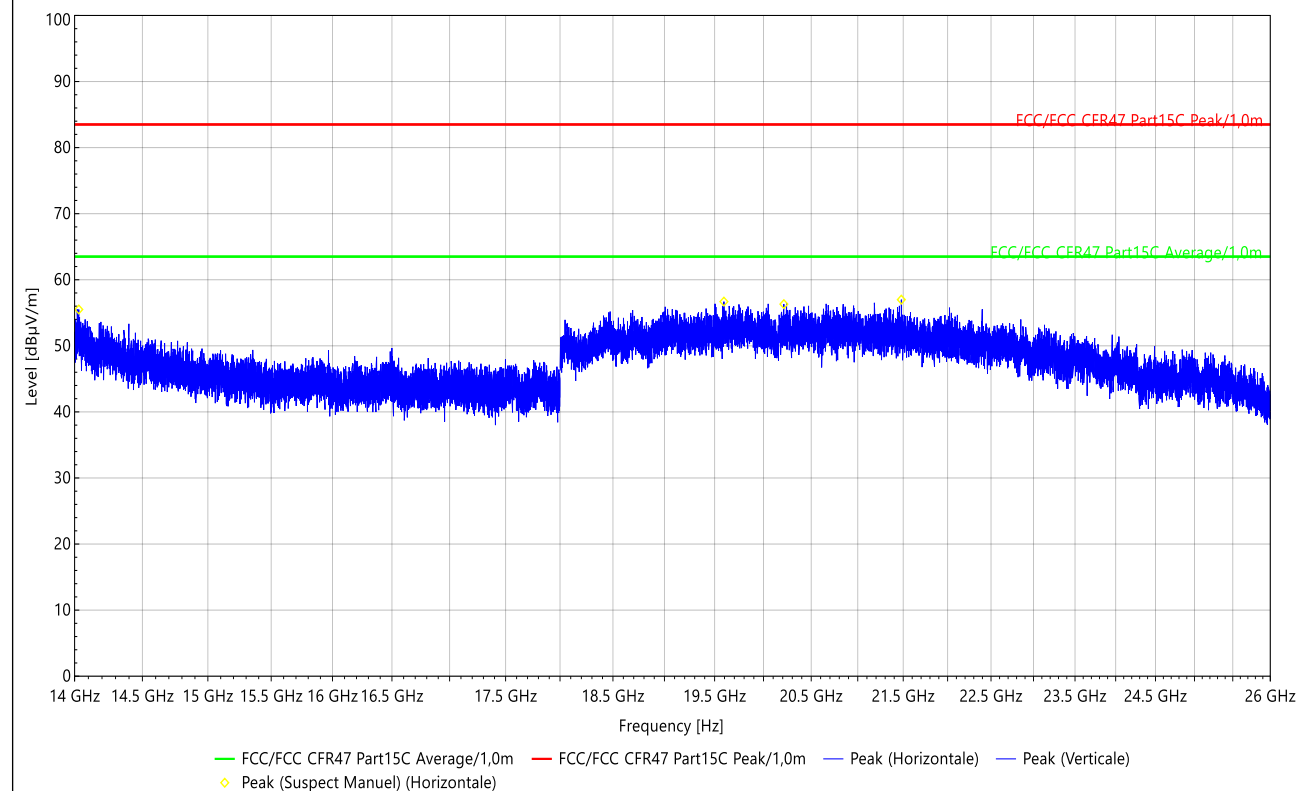

Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Lim.Avg (dBμV/m)	Polar.	Correct. (dB)
14,0305 GHz	55.50	83.50	63.50	H	3.45
19,594 GHz	56.69	83.50	63.50	H	3.70
20,212 GHz	56.31	83.50	63.50	H	3.12
21,479 GHz	56.99	83.50	63.50	H	2.57

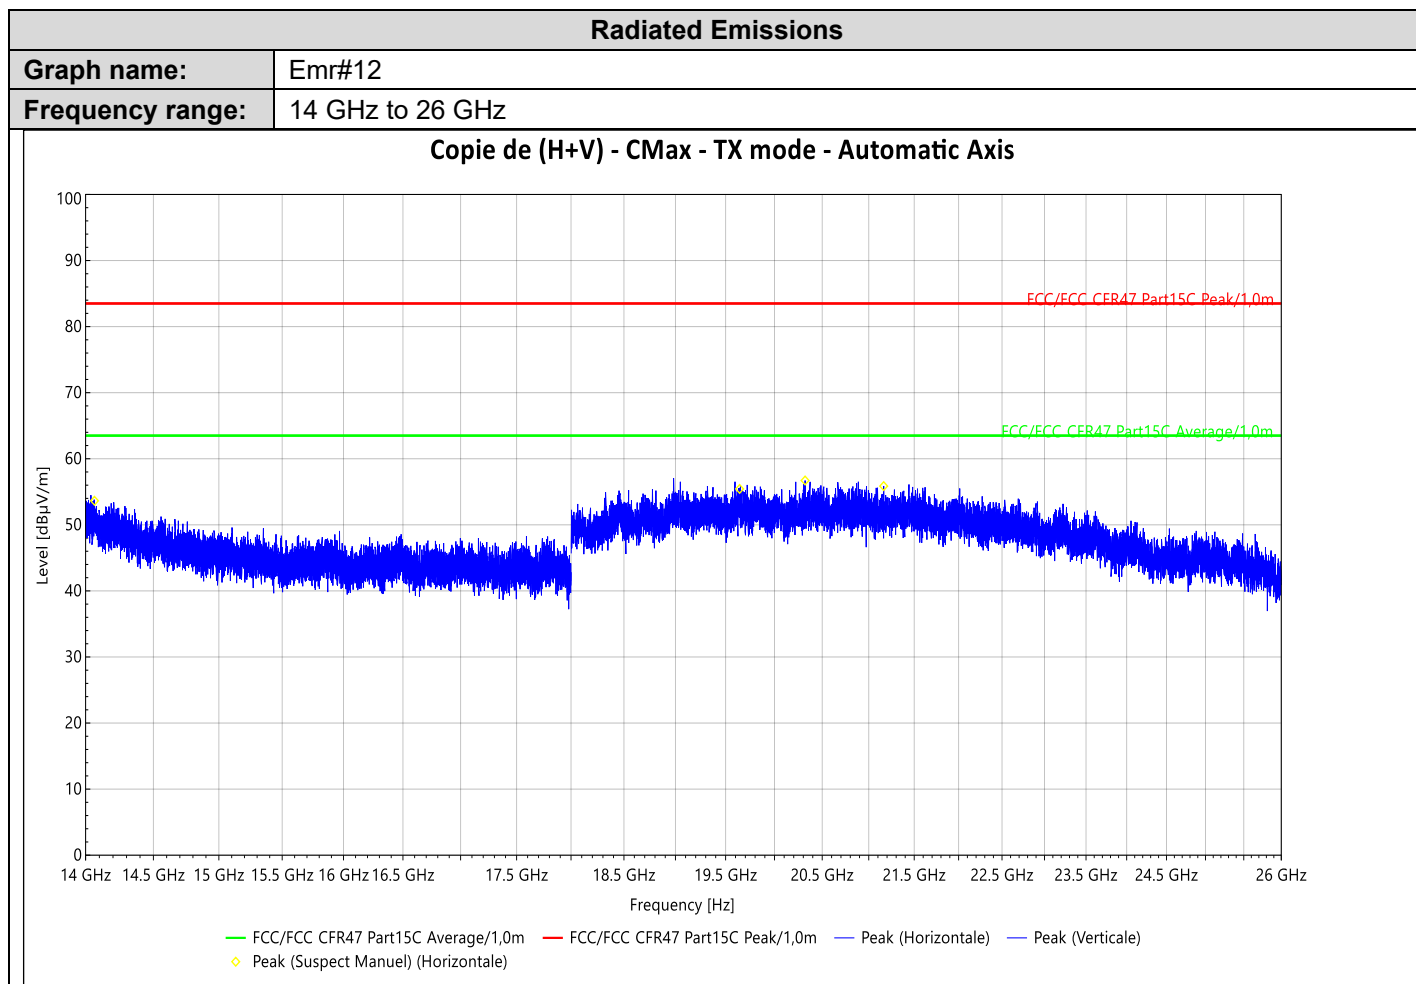

Pre-Characterization:

Frequency	PK Level (dBµV/m)	Lim.PK (dBµV/m)	Lim.Avg (dBµV/m)	Polar.	Correct. (dB)
14,0645 GHz	53.64	83.50	63.50	H	3.23
19,642 GHz	55.44	83.50	63.50	H	3.77
20,319 GHz	56.71	83.50	63.50	H	3.35
21,163 GHz	55.86	83.50	63.50	H	2.59

8.7. CONCLUSION

Unwanted emissions in non-restricted bands measurement performed on the sample of the product **AXIUM RX9000**, Sn: **2419MR900209 / 2419MR900267**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.

9. UNCERTAINTIES CHART

<i>Kind of measurement</i>	<i>Wide uncertainty laboratory</i>
Occupied Channel Bandwidth	±2.8 %
Humidity	±3.2 %
Power Spectral Density, Conducted	±1.7 dB
Radio frequency	±0.3 ppm
RF power, conducted	±1.2 dB
RF power, radiated (Full anechoic chamber above 1GHz)	±3.7 dB
RF power, radiated (Semi anechoic chamber & open test site)	±5.6 dB
Spurious emission, conducted	±2.3 dB
Spurious emission, radiated (Full anechoic chamber above 1GHz)	±3.8 dB
Spurious emission, radiated (Semi anechoic chamber & open test site)	±5.7 dB
Temperature	±0.75 °C
Time	±2.3 %
Voltage	±1.7 %

The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the standard. The conformity of the sample is directly established by the applicable limit values. This table includes all uncertainties maximum feasible for testing in the laboratory, whether or not made in this report.