TEST REPORT

Applicant:	Lightcomm Technology Co., Ltd.
Address of Applicant:	UNIT 1306 13/F ARION COMMERCIAL CENTRE,2-12 QUEEN'S ROAD WEST,SHEUNG WAN HK
Manufacturer:	Lightcomm Technology Co., Ltd.
Address of Manufacturer:	UNIT 1306 13/F ARION COMMERCIAL CENTRE,2-12 QUEEN'S ROAD WEST,SHEUNG WAN HK
Factory:	Huizhou Hengdu Electronics Co.,Ltd.
Address of Factory:	No.8 Huitai Road, Huinan High-tech Industrial Park, Huiao Avenue, Huizhou, Guangdong, China

Equipment Under Test (EUT)

Product Name:	Car Multimedia System
Model No.:	CAR136, J6CA13, DCA13W, DMCPA13W, AVM13W, CAR106, J6CA10, CAR126, J6CA12, CVS1543-MD
FCC ID:	XMF-CAR136
Applicable standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of sample receipt:	July 13, 2026
Date of Test:	July 14, 2026-August 03, 2026
Date of report issued:	August 03, 2026
Test Result :	PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

深圳市环球众一科技有限公司 Global United Technology Services Co., Ltd. 检验检测专用章 Inspection&Testing Services

Robinson Luo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	*August 03, 2026*	*Original*

Tested By:	Jacob. Cai	***Date:***	*August 03, 2026*
	Test Engineer		
Prepared By:		***Date:***	*August 03, 2026*
	Project Engineer		
Check By:		***Date:***	*August 03, 2026*
	Reviewer		

3 Contents

Page

1 COVER PAGE 1

2 VERSION 2

3 CONTENTS 3

4 TEST SUMMARY 4

5 GENERAL INFORMATION 5

5.1 GENERAL DESCRIPTION OF EUT 5
5.2 TEST MODE 7
5.3 DESCRIPTION OF SUPPORT UNITS 7
5.4 DEVIATION FROM STANDARDS 7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS 7
5.6 TEST FACILITY 7
5.7 TEST LOCATION 7
5.8 ADDITIONAL INSTRUCTIONS 7

6 TEST INSTRUMENTS LIST 8

7 TEST RESULTS AND MEASUREMENT DATA 10

7.1 ANTENNA REQUIREMENT 10
7.2 CONDUCTED OUTPUT POWER 11
7.3 CHANNEL BANDWIDTH 12
7.4 POWER SPECTRAL DENSITY 13
7.5 SPURIOUS EMISSION IN NON-RESTRICTED & RESTRICTED BANDS 14
7.5.1 Conducted Emission Method 14
7.5.2 Radiated Emission Method 15

8 TEST SETUP PHOTO 30

9 EUT CONSTRUCTIONAL DETAILS 30

4 Test Summary

Test Item	Section	Result
Antenna requirement	FCC part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	FCC part 15.207	N/A
Conducted Peak Output Power	FCC part 15.247 (b)(3)	Pass
Channel Bandwidth & 99% OCB	FCC part 15.247 (a)(2)	Pass
Power Spectral Density	FCC part 15.247 (e)	Pass
Band Edge	FCC part 15.247(d)	Pass
Spurious Emission	FCC part 15.205/15.209	Pass

Remark:

1. Test according to ANSI C63.10:2020

2. Pass: The EUT complies with the essential requirements in the standard.

3. N/A: Not applicable, The product is for use in a vehicle and is powered only by a battery.

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz-30MHz	3.1dB	(1)
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.			

5 General Information

5.1 General Description of EUT

Product Name:	Car Multimedia System
Model No.:	CAR136, J6CA13, DCA13W, DMCPA13W, AVM13W, CAR106, J6CA10, CAR126, J6CA12, CVS1543-MD
Test Model No.:	CAR136
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color and model name for commercial purpose.	
Test sample(s) ID:	GTS2026070259-1
Sample(s) Status	Engineer sample
S/N:	Z19597700000016
Operation Frequency:	802.11b/802.11g/802.11n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
Channel Numbers:	802.11b/802.11g /802.11n(HT20): 11 802.11n(HT40):7
Channel Separation:	5MHz
Modulation Technology:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n(HT20) /802.11n(HT40): Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	Glue stick antenna
Antenna Gain:	3.31dBi(Declared by applicant)
Power Supply:	DC 12V

Disclaimer statement:
1. Antenna gain information provided by the customer, and the laboratory is not responsible for its authenticity.
2. The information in this section is provided by the applicant or manufacturer, GTS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	**Frequency (MHz)**	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
MEILI	DC POWER SUPPLY	MCH-305A	11121168

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC —Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

● **ISED—Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing.

● **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.
Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102
Tel: 0755-27798480
Fax: 0755-27798960

5.8 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Apr. 10, 2026	Apr. 09, 2031
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Apr. 10, 2026	Apr. 09, 2027
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	Apr. 11, 2026	Apr. 10, 2027
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	Apr. 11, 2026	Apr. 10, 2027
6	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	Jul 17, 2026	Jul 16, 2027
7	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov.22, 2025	Nov.21, 2026
8	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	Apr. 10, 2026	Apr. 09, 2027
9	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	Apr. 10, 2026	Apr. 09, 2027
10	Horn Antenna (18GH-40GHz)	Schwarzbeck	BBHA 9170	GTS691	Apr. 11, 2026	Apr. 10, 2027
11	Spectrum analyzer (9kHz-40GHz)	Rohde & Schwarz	FSV40-N	GTS666	Mar. 10, 2026	Mar. 09, 2027
12	Amplifier	/	LNA-1000-30S	GTS650	Apr. 10, 2026	Apr. 09, 2027
13	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS692	Nov. 24, 2025	Nov. 23, 2026
14	Wideband Amplifier	/	WDA-01004000-15P35	GTS602	Apr. 10, 2026	Apr. 09, 2027
15	Thermo meter	JINCHUANG	GSP-8A	GTS643	Apr. 13, 2026	Apr. 12, 2027
16	RE cable 1	GTS	N/A	GTS675	Jul. 17, 2026	Jul. 16, 2027
17	RE cable 2	GTS	N/A	GTS676	Jul. 17, 2026	Jul. 16, 2027
18	RE cable 3	GTS	N/A	GTS677	Jul. 17, 2026	Jul. 16, 2027
19	RE cable 4	GTS	N/A	GTS678	Jul. 17, 2026	Jul. 16, 2027
20	RE cable 5	GTS	N/A	GTS679	Jul. 17, 2026	Jul. 16, 2027
21	RE cable 6	GTS	N/A	GTS680	Jul. 17, 2026	Jul. 16, 2027
22	RE cable 7	GTS	N/A	GTS681	Jul. 22, 2026	Jul. 21, 2027
23	RE cable 8	GTS	N/A	GTS682	Jul. 22, 2026	Jul. 21, 2027
24	CE cable 9	GTS	N/A	GTS683	Jul. 23, 2026	Jul. 22, 2027
25	EMI Test Software	AUDIX	E3-6.100614a	GTS725	N/A	N/A

RF Conducted Test:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Serial No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	Wireless Connectivity Test Set	Anritsu	MT8862A	SN6272327180	Aug. 26, 2025	Aug. 25, 2026
2	Bluetooth Test Set	Anritsu	MT8852B	SN6262097212	Aug. 26, 2025	Aug. 25, 2026
3	EXA Signal Analyzer	Keysight	N9010B	MY60241168	Aug. 26, 2025	Aug. 25, 2026
4	Vector Signal Generator	Keysight	N5182B	MY61250192	Apr. 16, 2026	Apr. 15, 2027
5	Analog Signal Generator	Keysight	N5171B	MY61252573	Aug. 26, 2025	Aug. 25, 2026
6	RF Control Unit and Power Test Unit	Tonscend	JS0806-2	SN21F8060437	Apr. 16, 2026	Apr. 15, 2027
7	Power Control Unit	Tonscend	JS0806-4ADC	SN21C8060386	N/A	N/A
8	Wideband Radio Communication Tester	R&S	CWM500	GTS569	Aug. 26, 2025	Aug. 25, 2026
9	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	Apr. 10, 2026	Apr. 09, 2027
10	Thermo meter	JINCHUANG	GSP-8A	GTS641	Apr. 14, 2026	Apr. 13, 2027
11	Test Software	Tonscend	JS1120-3 V3.5.39	N/A	N/A	N/A

General used equipment:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	Barometer	KUMAO	SF132	GTS647	Jul. 21, 2026	Jul. 20, 2027

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. **15.247(c) (1)(i) requirement:** (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is glue stick antenna, reference to the appendix II for details	

7.2 Conducted Output Power

Test Requirement :	FCC Part15 C Section 15.247 (b)(3)
Test Method :	KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	30dBm The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
Test setup:	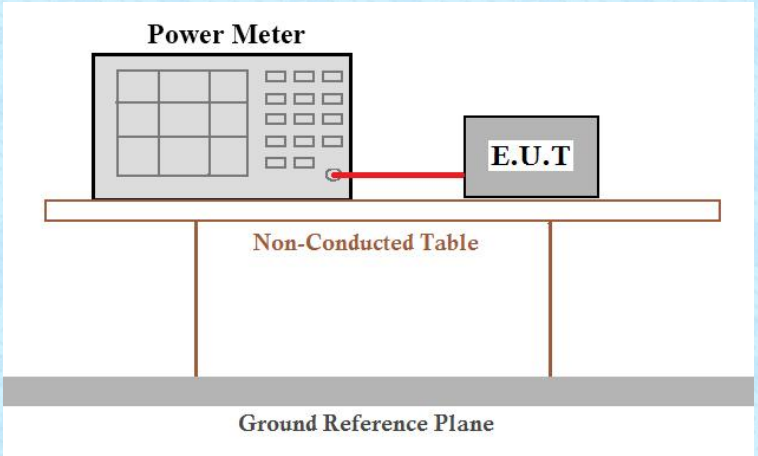
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for WIFI 2.4G.

7.3 Channel Bandwidth

Test Requirement :	FCC Part15 C Section 15.247 (a)(2)
Test Method :	KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	>500KHz
Test setup:	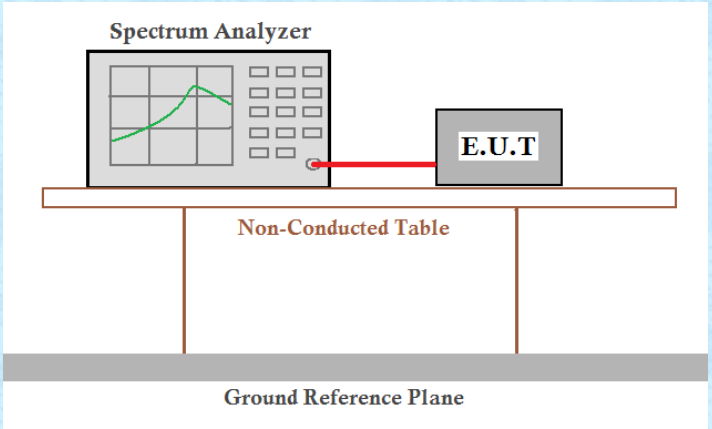
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for WIFI 2.4G.

7.4 Power Spectral Density

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	8dBm/3kHz
Test setup:	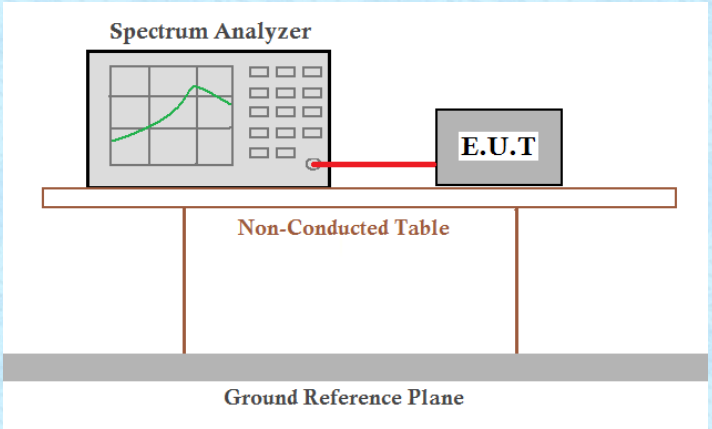
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for WIFI 2.4G.

7.5 Spurious Emission in Non-restricted & restricted Bands

7.5.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	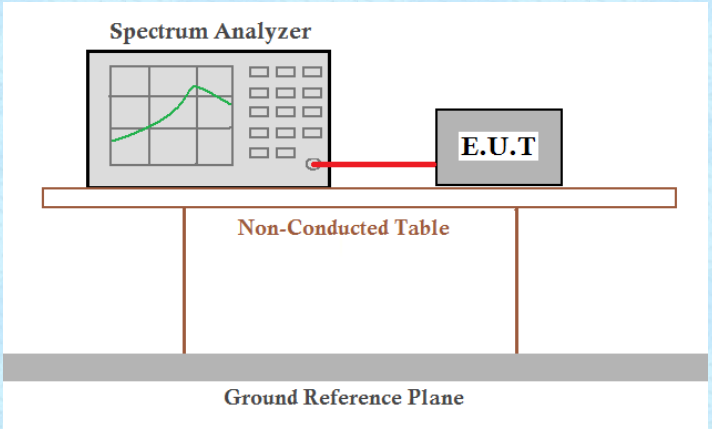
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for WIFI 2.4G.

7.5.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209
Test Method:	ANSI C63.10:2020
Test Frequency Range:	9kHz to 25GHz
Test site:	Measurement Distance: 3m

Receiver setup:

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Note: For Duty cycle ≥ 98%, average detector set as above For Duty cycle < 98%, average detector set as below: VBW ≥ 1 / T

Limit:

Frequency	Limit (uV/m)	Value	Measurement Distance
0.009MHz-0.490MHz	2400/F(KHz)	PK/QP/AV	300m
0.490MHz-1.705MHz	24000/F(KHz)	QP	30m
1.705MHz-30MHz	30	QP	30m
30MHz-88MHz	100	QP	3m
88MHz-216MHz	150	QP	
216MHz-960MHz	200	QP	
960MHz-1GHz	500	QP	
Above 1GHz	500	Average	
	5000	Peak	

Test setup:

For radiated emissions from 9kHz to 30MHz

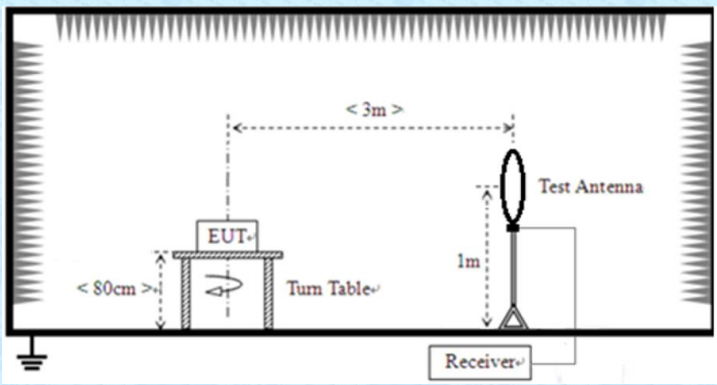

For radiated emissions from 30MHz to1GHz

<table>
<tr><td></td><td>
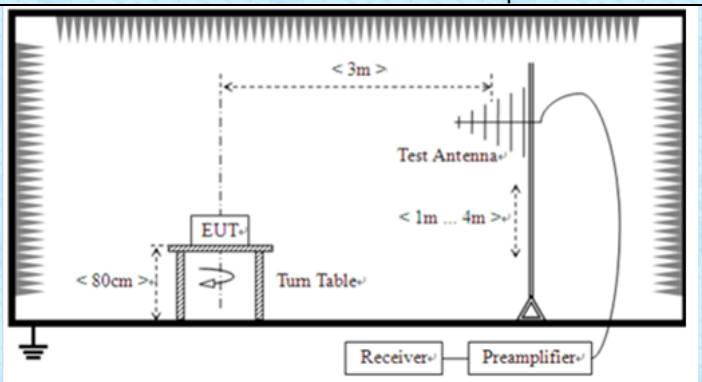

For radiated emissions above 1GHz

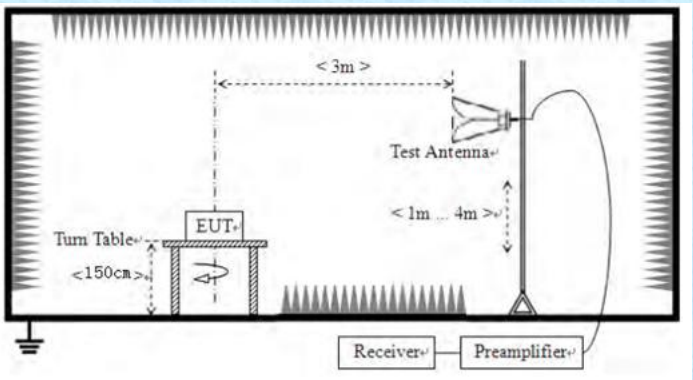

</td></tr>
<tr><td>Test Procedure:</td><td>
1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
</td></tr>
<tr><td>Test Instruments:</td><td>Refer to section 6.0 for details</td></tr>
<tr><td>Test mode:</td><td>Refer to section 5.2 for details</td></tr>
</table>

Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	DC 12V					
Test results:	Pass					

Remarks:

1. *Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

Measurement data:

- **9kHz~30MHz**

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

■ **Below 1GHz**

Pre-scan all test modes, found worst case at 802.11g 2437MHz, and so only show the test result of it.

Horizontal:

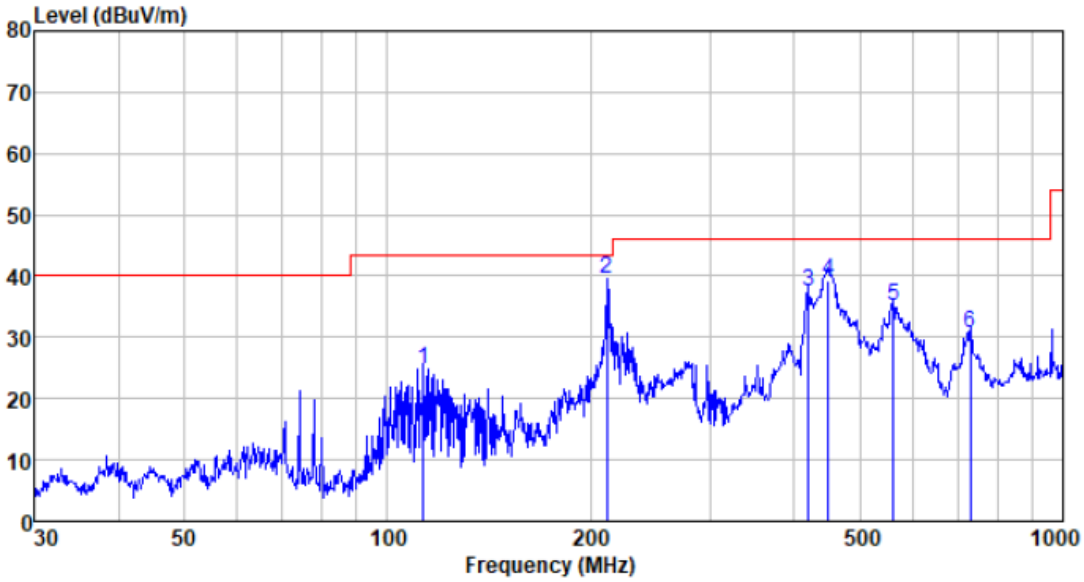

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
112.920	44.67	11.20	2.11	33.26	24.72	43.50	-18.78	QP
211.527	59.68	10.05	2.90	33.07	39.56	43.50	-3.94	QP
420.580	50.10	15.89	4.24	32.77	37.46	46.00	-8.54	QP
449.556	51.00	16.69	4.37	32.74	39.32	46.00	-6.68	QP
560.693	44.54	18.21	4.89	32.53	35.11	46.00	-10.89	QP
729.358	36.28	20.81	5.69	32.14	30.64	46.00	-15.36	QP

Remarks:
Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Vertical:

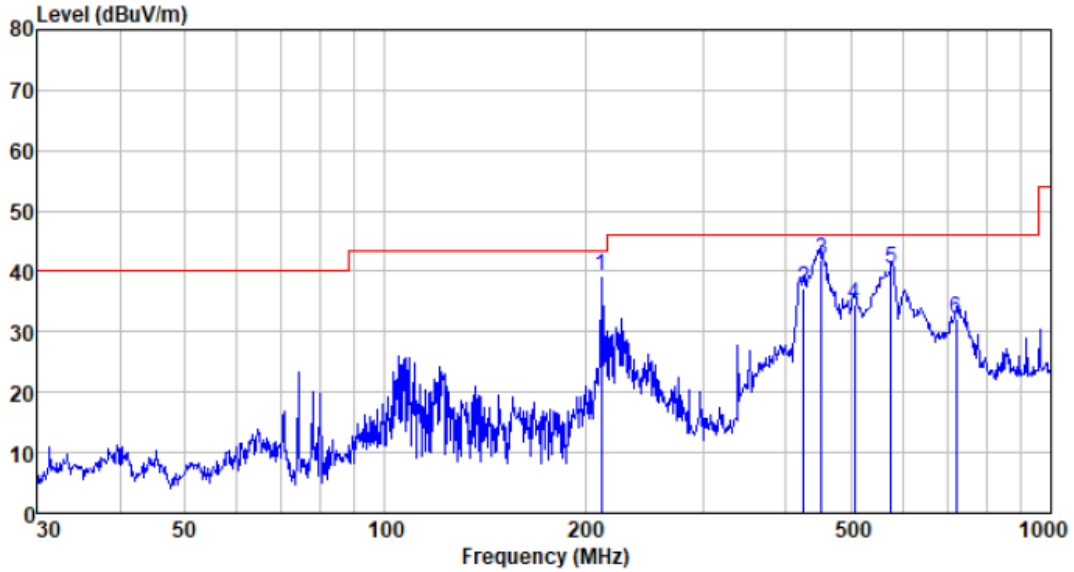

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
211.527	59.25	10.05	2.90	33.07	39.13	43.50	-4.37	QP
425.028	49.92	15.80	4.26	32.76	37.22	46.00	-8.78	QP
452.720	53.72	16.59	4.38	32.74	41.95	46.00	-4.05	QP
506.479	45.39	17.23	4.62	32.68	34.56	46.00	-11.44	QP
574.626	49.36	18.60	4.96	32.49	40.43	46.00	-5.57	QP
719.200	37.84	20.87	5.63	32.16	32.18	46.00	-13.82	QP

Remarks:
Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

- **Above 1GHz**
- **Unwanted Emissions in non-restricted Frequency Bands**

Test mode:	802.11b	Test channel:	Lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	37.12	31.22	4.63	37.68	35.29	74.00	-38.71	Vertical
7236.00	32.21	36.25	6.52	37.81	37.17	74.00	-36.83	Vertical
9648.00	31.28	37.97	7.99	37.93	39.31	74.00	-34.69	Vertical
4824.00	36.28	31.22	4.63	37.68	34.45	74.00	-39.55	Horizontal
7236.00	32.21	36.25	6.52	37.81	37.17	74.00	-36.83	Horizontal
9648.00	30.97	37.97	7.99	37.93	39.00	74.00	-35.00	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	26.45	31.22	4.63	37.68	24.62	54.00	-29.38	Vertical
7236.00	21.15	36.25	6.52	37.81	26.11	54.00	-27.89	Vertical
9648.00	21.68	37.97	7.99	37.93	29.71	54.00	-24.29	Vertical
4824.00	25.99	31.22	4.63	37.68	24.16	54.00	-29.84	Horizontal
7236.00	20.85	36.25	6.52	37.81	25.81	54.00	-28.19	Horizontal
9648.00	20.76	37.97	7.99	37.93	28.79	54.00	-25.21	Horizontal

Test mode:	802.11b	Test channel:	Middle

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	36.72	31.31	4.69	37.63	35.09	74.00	-38.91	Vertical
7311.00	32.63	36.39	6.61	37.78	37.85	74.00	-36.15	Vertical
9748.00	32.55	38.10	8.03	37.95	40.73	74.00	-33.27	Vertical
4874.00	37.61	31.31	4.69	37.63	35.98	74.00	-38.02	Horizontal
7311.00	31.48	36.39	6.61	37.78	36.70	74.00	-37.30	Horizontal
9748.00	32.53	38.10	8.03	37.95	40.71	74.00	-33.29	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	27.78	31.31	4.69	37.63	26.15	54.00	-27.85	Vertical
7311.00	21.00	36.39	6.61	37.78	26.22	54.00	-27.78	Vertical
9748.00	21.85	38.10	8.03	37.95	30.03	54.00	-23.97	Vertical
4874.00	27.86	31.31	4.69	37.63	26.23	54.00	-27.77	Horizontal
7311.00	20.61	36.39	6.61	37.78	25.83	54.00	-28.17	Horizontal
9748.00	22.28	38.10	8.03	37.95	30.46	54.00	-23.54	Horizontal

Test mode:	802.11b	Test channel:	Highest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	40.36	31.37	4.75	37.58	38.90	74.00	-35.10	Vertical
7386.00	32.10	36.57	6.71	37.74	37.64	74.00	-36.36	Vertical
9848.00	34.98	38.20	8.07	37.58	43.67	74.00	-30.33	Vertical
4924.00	40.37	31.37	4.75	37.58	38.91	74.00	-35.09	Horizontal
7386.00	31.36	36.57	6.71	37.74	36.90	74.00	-37.10	Horizontal
9848.00	31.31	38.20	8.07	37.58	40.00	74.00	-34.00	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	31.63	31.37	4.75	37.58	30.17	54.00	-23.83	Vertical
7386.00	22.12	36.57	6.71	37.74	27.66	54.00	-26.34	Vertical
9848.00	23.57	38.20	8.07	37.58	32.26	54.00	-21.74	Vertical
4924.00	30.97	31.37	4.75	37.58	29.51	54.00	-24.49	Horizontal
7386.00	20.83	36.57	6.71	37.74	26.37	54.00	-27.63	Horizontal
9848.00	20.64	38.20	8.07	37.58	29.33	54.00	-24.67	Horizontal

Test mode:	802.11g	Test channel:	lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	37.16	31.24	4.63	37.68	35.35	74.00	-38.65	Vertical
7236.00	32.23	36.25	6.52	37.80	37.20	74.00	-36.80	Vertical
9648.00	31.30	37.97	7.98	37.93	39.32	74.00	-34.68	Vertical
4824.00	36.31	31.24	4.63	37.68	34.50	74.00	-39.50	Horizontal
7236.00	32.23	36.25	6.52	37.80	37.20	74.00	-36.80	Horizontal
9648.00	30.98	37.97	7.98	37.93	39.00	74.00	-35.00	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	26.49	31.24	4.63	37.68	24.68	54.00	-29.32	Vertical
7236.00	21.17	36.25	6.52	37.80	26.14	54.00	-27.86	Vertical
9648.00	21.70	37.97	7.98	37.93	29.72	54.00	-24.28	Vertical
4824.00	26.02	31.24	4.63	37.68	24.21	54.00	-29.79	Horizontal
7236.00	20.87	36.25	6.52	37.80	25.84	54.00	-28.16	Horizontal
9648.00	20.78	37.97	7.98	37.93	28.80	54.00	-25.20	Horizontal

Test mode:	802.11g	Test channel:	Middle

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	36.76	31.31	4.69	37.62	35.14	74.00	-38.86	Vertical
7311.00	32.65	36.39	6.61	37.78	37.87	74.00	-36.13	Vertical
9748.00	32.56	38.10	8.02	37.95	40.73	74.00	-33.27	Vertical
4874.00	37.64	31.31	4.69	37.62	36.02	74.00	-37.98	Horizontal
7311.00	31.50	36.39	6.61	37.78	36.72	74.00	-37.28	Horizontal
9748.00	32.54	38.10	8.02	37.95	40.71	74.00	-33.29	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	27.81	31.31	4.69	37.62	26.19	54.00	-27.81	Vertical
7311.00	21.02	36.39	6.61	37.78	26.24	54.00	-27.76	Vertical
9748.00	21.86	38.10	8.02	37.95	30.03	54.00	-23.97	Vertical
4874.00	27.89	31.31	4.69	37.62	26.27	54.00	-27.73	Horizontal
7311.00	20.63	36.39	6.61	37.78	25.85	54.00	-28.15	Horizontal
9748.00	22.29	38.10	8.02	37.95	30.46	54.00	-23.54	Horizontal

Test mode:	802.11g	Test channel:	Highest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	40.41	31.37	4.75	37.58	38.95	74.00	-35.05	Vertical
7386.00	32.14	36.57	6.71	37.74	37.68	74.00	-36.32	Vertical
9848.00	35.01	38.20	8.07	37.58	43.70	74.00	-30.30	Vertical
4924.00	40.41	31.37	4.75	37.58	38.95	74.00	-35.05	Horizontal
7386.00	31.39	36.57	6.71	37.74	36.93	74.00	-37.07	Horizontal
9848.00	31.33	38.20	8.07	37.58	40.02	74.00	-33.98	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	31.67	31.37	4.75	37.58	30.21	54.00	-23.79	Vertical
7386.00	22.15	36.57	6.71	37.74	27.69	54.00	-26.31	Vertical
9848.00	23.59	38.20	8.07	37.58	32.28	54.00	-21.72	Vertical
4924.00	31.01	31.37	4.75	37.58	29.55	54.00	-24.45	Horizontal
7386.00	20.86	36.57	6.71	37.74	26.40	54.00	-27.60	Horizontal
9848.00	20.66	38.20	8.07	37.58	29.35	54.00	-24.65	Horizontal

Test mode:	802.11n(HT20)	Test channel:	Lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	37.34	31.24	4.63	37.68	35.53	74.00	-38.47	Vertical
7236.00	32.35	36.25	6.52	37.80	37.32	74.00	-36.68	Vertical
9648.00	31.38	37.97	7.98	37.93	39.40	74.00	-34.60	Vertical
4824.00	36.47	31.24	4.63	37.68	34.66	74.00	-39.34	Horizontal
7236.00	32.34	36.25	6.52	37.80	37.31	74.00	-36.69	Horizontal
9648.00	31.06	37.97	7.98	37.93	39.08	74.00	-34.92	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	26.66	31.24	4.63	37.68	24.85	54.00	-29.15	Vertical
7236.00	21.28	36.25	6.52	37.80	26.25	54.00	-27.75	Vertical
9648.00	21.78	37.97	7.98	37.93	29.80	54.00	-24.20	Vertical
4824.00	26.16	31.24	4.63	37.68	24.35	54.00	-29.65	Horizontal
7236.00	20.97	36.25	6.52	37.80	25.94	54.00	-28.06	Horizontal
9648.00	20.85	37.97	7.98	37.93	28.87	54.00	-25.13	Horizontal

Test mode:	802.11n(HT20)	Test channel:	Middle

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	36.91	31.31	4.69	37.62	35.29	74.00	-38.71	Vertical
7311.00	32.75	36.39	6.61	37.78	37.97	74.00	-36.03	Vertical
9748.00	32.63	38.10	8.02	37.95	40.80	74.00	-33.20	Vertical
4874.00	37.77	31.31	4.69	37.62	36.15	74.00	-37.85	Horizontal
7311.00	31.58	36.39	6.61	37.78	36.80	74.00	-37.20	Horizontal
9748.00	32.60	38.10	8.02	37.95	40.77	74.00	-33.23	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	27.95	31.31	4.69	37.62	26.33	54.00	-27.67	Vertical
7311.00	21.12	36.39	6.61	37.78	26.34	54.00	-27.66	Vertical
9748.00	21.93	38.10	8.02	37.95	30.10	54.00	-23.90	Vertical
4874.00	28.01	31.31	4.69	37.62	26.39	54.00	-27.61	Horizontal
7311.00	20.71	36.39	6.61	37.78	25.93	54.00	-28.07	Horizontal
9748.00	22.36	38.10	8.02	37.95	30.53	54.00	-23.47	Horizontal

Test mode:	802.11n(HT20)	Test channel:	Highest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	40.67	31.37	4.75	37.58	39.21	74.00	-34.79	Vertical
7386.00	32.30	36.57	6.71	37.74	37.84	74.00	-36.16	Vertical
9848.00	35.13	38.20	8.07	37.58	43.82	74.00	-30.18	Vertical
4924.00	40.63	31.37	4.75	37.58	39.17	74.00	-34.83	Horizontal
7386.00	31.54	36.57	6.71	37.74	37.08	74.00	-36.92	Horizontal
9848.00	31.44	38.20	8.07	37.58	40.13	74.00	-33.87	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	31.92	31.37	4.75	37.58	30.46	54.00	-23.54	Vertical
7386.00	22.31	36.57	6.71	37.74	27.85	54.00	-26.15	Vertical
9848.00	23.71	38.20	8.07	37.58	32.40	54.00	-21.60	Vertical
4924.00	31.22	31.37	4.75	37.58	29.76	54.00	-24.24	Horizontal
7386.00	21.00	36.57	6.71	37.74	26.54	54.00	-27.46	Horizontal
9848.00	20.77	38.20	8.07	37.58	29.46	54.00	-24.54	Horizontal

Test mode:	802.11n(HT40)	Test channel:	Lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	37.46	31.26	4.65	37.66	35.71	74.00	-38.29	Vertical
7266.00	32.43	36.30	6.57	37.79	37.51	74.00	-36.49	Vertical
9688.00	31.44	38.03	8.00	37.94	39.53	74.00	-34.47	Vertical
4844.00	36.57	31.26	4.65	37.66	34.82	74.00	-39.18	Horizontal
7266.00	32.40	36.30	6.57	37.79	37.48	74.00	-36.52	Horizontal
9688.00	31.11	38.03	8.00	37.94	39.20	74.00	-34.80	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	26.77	31.26	4.65	37.66	25.02	54.00	-28.98	Vertical
7266.00	21.36	36.30	6.57	37.79	26.44	54.00	-27.56	Vertical
9688.00	21.83	38.03	8.00	37.94	29.92	54.00	-24.08	Vertical
4844.00	26.26	31.26	4.65	37.66	24.51	54.00	-29.49	Horizontal
7266.00	21.03	36.30	6.57	37.79	26.11	54.00	-27.89	Horizontal
9688.00	20.90	38.03	8.00	37.94	28.99	54.00	-25.01	Horizontal

Test mode:	802.11n(HT40)	Test channel:	Middle

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	37.01	31.31	4.69	37.62	35.39	74.00	-38.61	Vertical
7311.00	32.81	36.39	6.61	37.78	38.03	74.00	-35.97	Vertical
9748.00	32.67	38.10	8.03	37.95	40.85	74.00	-33.15	Vertical
4874.00	37.85	31.31	4.69	37.62	36.23	74.00	-37.77	Horizontal
7311.00	31.64	36.39	6.61	37.78	36.86	74.00	-37.14	Horizontal
9748.00	32.65	38.10	8.03	37.95	40.83	74.00	-33.17	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	28.05	31.31	4.69	37.62	26.43	54.00	-27.57	Vertical
7311.00	21.18	36.39	6.61	37.78	26.40	54.00	-27.60	Vertical
9748.00	21.97	38.10	8.03	37.95	30.15	54.00	-23.85	Vertical
4874.00	28.09	31.31	4.69	37.62	26.47	54.00	-27.53	Horizontal
7311.00	20.76	36.39	6.61	37.78	25.98	54.00	-28.02	Horizontal
9748.00	22.40	38.10	8.03	37.95	30.58	54.00	-23.42	Horizontal

Test mode:	802.11n(HT40)	Test channel:	Highest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	40.85	31.35	4.71	37.60	39.31	74.00	-34.69	Vertical
7356.00	32.41	36.53	6.67	37.76	37.85	74.00	-36.15	Vertical
9808.00	35.21	38.17	8.05	37.96	43.47	74.00	-30.53	Vertical
4904.00	40.78	31.35	4.71	37.60	39.24	74.00	-34.76	Horizontal
7356.00	31.64	36.53	6.67	37.76	37.08	74.00	-36.92	Horizontal
9808.00	31.52	38.17	8.05	37.96	39.78	74.00	-34.22	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	32.08	31.35	4.71	37.60	30.54	54.00	-23.46	Vertical
7356.00	22.42	36.53	6.67	37.76	27.86	54.00	-26.14	Vertical
9808.00	23.78	38.17	8.05	37.96	32.04	54.00	-21.96	Vertical
4904.00	31.35	31.35	4.71	37.60	29.81	54.00	-24.19	Horizontal
7356.00	21.09	36.53	6.67	37.76	26.53	54.00	-27.47	Horizontal
9808.00	20.84	38.17	8.05	37.96	29.10	54.00	-24.90	Horizontal

Notes:

1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Level(dBuV/m)=Reading level(dBuV)+Antenna Factor(dB/m)+Cable Loss(dB)-Preamp Factor(dB)
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

■ **Unwanted Emissions in restricted Frequency Bands**

Test mode:	802.11b	Test channel:	Lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	39.59	27.14	2.81	38.64	30.90	74.00	-43.10	Horizontal
2390.00	47.91	27.37	2.91	38.84	39.35	74.00	-34.65	Horizontal
2310.00	38.13	27.14	2.81	38.64	29.44	74.00	-44.56	Vertical
2390.00	49.16	27.37	2.91	38.84	40.60	74.00	-33.40	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	29.95	27.14	2.81	38.64	21.26	54.00	-32.74	Horizontal
2390.00	37.02	27.37	2.91	38.84	28.46	54.00	-25.54	Horizontal
2310.00	28.60	27.14	2.81	38.64	19.91	54.00	-34.09	Vertical
2390.00	38.98	27.37	2.91	38.84	30.42	54.00	-23.58	Vertical

Test mode:	802.11b	Test channel:	Highest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.36	27.82	2.99	39.05	40.12	74.00	-33.88	Horizontal
2500.00	40.85	27.70	3.01	39.10	32.46	74.00	-41.54	Horizontal
2483.50	48.20	27.82	2.99	39.05	39.96	74.00	-34.04	Vertical
2500.00	42.00	27.70	3.01	39.10	33.61	74.00	-40.39	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	37.00	27.82	2.99	39.05	28.76	54.00	-25.24	Horizontal
2500.00	33.49	27.70	3.01	39.10	25.10	54.00	-28.90	Horizontal
2483.50	37.76	27.82	2.99	39.05	29.52	54.00	-24.48	Vertical
2500.00	32.29	27.70	3.01	39.10	23.90	54.00	-30.10	Vertical

Test mode:	802.11g	Test channel:	Lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	39.50	27.14	2.81	38.64	30.81	74.00	-43.19	Horizontal
2390.00	47.80	27.37	2.91	38.84	39.24	74.00	-34.76	Horizontal
2310.00	38.04	27.14	2.81	38.64	29.35	74.00	-44.65	Vertical
2390.00	49.01	27.37	2.91	38.84	40.45	74.00	-33.55	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	29.88	27.14	2.81	38.64	21.19	54.00	-32.81	Horizontal
2390.00	36.94	27.37	2.91	38.84	28.38	54.00	-25.62	Horizontal
2310.00	28.53	27.14	2.81	38.64	19.84	54.00	-34.16	Vertical
2390.00	38.91	27.37	2.91	38.84	30.35	54.00	-23.65	Vertical

Test mode:	802.11g	Test channel:	Highest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.24	27.82	2.99	39.05	40.00	74.00	-34.00	Horizontal
2500.00	40.75	27.70	3.01	39.10	32.36	74.00	-41.64	Horizontal
2483.50	48.06	27.82	2.99	39.05	39.82	74.00	-34.18	Vertical
2500.00	41.89	27.70	3.01	39.10	33.50	74.00	-40.50	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	36.92	27.82	2.99	39.05	28.68	54.00	-25.32	Horizontal
2500.00	33.43	27.70	3.01	39.10	25.04	54.00	-28.96	Horizontal
2483.50	37.68	27.82	2.99	39.05	29.44	54.00	-24.56	Vertical
2500.00	32.23	27.70	3.01	39.10	23.84	54.00	-30.16	Vertical

Test mode:	802.11n(HT20)	Test channel:	Lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	39.68	27.14	2.81	38.64	30.99	74.00	-43.01	Horizontal
2390.00	48.04	27.37	2.91	38.84	39.48	74.00	-34.52	Horizontal
2310.00	38.23	27.14	2.81	38.64	29.54	74.00	-44.46	Vertical
2390.00	49.30	27.37	2.91	38.84	40.74	74.00	-33.26	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	30.01	27.14	2.81	38.64	21.32	54.00	-32.68	Horizontal
2390.00	37.09	27.37	2.91	38.84	28.53	54.00	-25.47	Horizontal
2310.00	28.67	27.14	2.81	38.64	19.98	54.00	-34.02	Vertical
2390.00	39.07	27.37	2.91	38.84	30.51	54.00	-23.49	Vertical

Test mode:	802.11n(HT20)	Test channel:	Highest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.50	27.82	2.99	39.05	40.26	74.00	-33.74	Horizontal
2500.00	40.95	27.70	3.01	39.10	32.56	74.00	-41.44	Horizontal
2483.50	48.35	27.82	2.99	39.05	40.11	74.00	-33.89	Vertical
2500.00	42.12	27.70	3.01	39.10	33.73	74.00	-40.27	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	37.08	27.82	2.99	39.05	28.84	54.00	-25.16	Horizontal
2500.00	33.56	27.70	3.01	39.10	25.17	54.00	-28.83	Horizontal
2483.50	37.85	27.82	2.99	39.05	29.61	54.00	-24.39	Vertical
2500.00	32.36	27.70	3.01	39.10	23.97	54.00	-30.03	Vertical

Test mode:	802.11n(HT40)	Test channel:	Lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	39.50	27.14	2.81	38.64	30.81	74.00	-43.19	Horizontal
2390.00	47.79	27.37	2.91	38.84	39.23	74.00	-34.77	Horizontal
2310.00	38.03	27.14	2.81	38.64	29.34	74.00	-44.66	Vertical
2390.00	49.00	27.37	2.91	38.84	40.44	74.00	-33.56	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	29.88	27.14	2.81	38.64	21.19	54.00	-32.81	Horizontal
2390.00	36.94	27.37	2.91	38.84	28.38	54.00	-25.62	Horizontal
2310.00	28.53	27.14	2.81	38.64	19.84	54.00	-34.16	Vertical
2390.00	38.90	27.37	2.91	38.84	30.34	54.00	-23.66	Vertical

Test mode:	802.11n(HT40)	Test channel:	Highest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.23	27.82	2.99	39.05	39.99	74.00	-34.01	Horizontal
2500.00	40.75	27.70	3.01	39.10	32.36	74.00	-41.64	Horizontal
2483.50	48.05	27.82	2.99	39.05	39.81	74.00	-34.19	Vertical
2500.00	41.88	27.70	3.01	39.10	33.49	74.00	-40.51	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	36.92	27.82	2.99	39.05	28.68	54.00	-25.32	Horizontal
2500.00	33.43	27.70	3.01	39.10	25.04	54.00	-28.96	Horizontal
2483.50	37.67	27.82	2.99	39.05	29.43	54.00	-24.57	Vertical
2500.00	32.23	27.70	3.01	39.10	23.84	54.00	-30.16	Vertical

Notes:
1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Level(dBuV/m)=Reading level(dBuV)+Antenna Factor(dB/m)+Cable Loss(dB)-Preamp Factor(dB)
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

------End------