


Test Mode:	802.11N40 5190MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

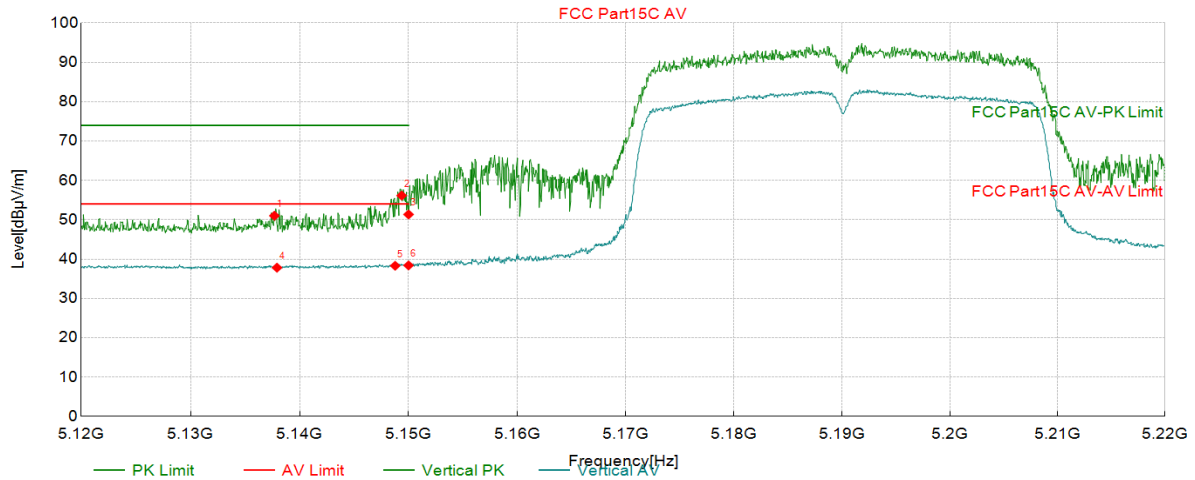

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5137.69	36.93	14.09	51.02	74.00	22.98	PK	Vertical	PASS
2	5149.37	42.03	14.12	56.15	74.00	17.85	PK	Vertical	PASS
3	5150.00	37.23	14.12	51.35	74.00	22.65	PK	Vertical	PASS
4	5137.92	23.73	14.09	37.82	54.00	16.18	AV	Vertical	PASS
5	5148.77	24.19	14.12	38.31	54.00	15.69	AV	Vertical	PASS
6	5150.00	24.28	14.12	38.40	54.00	15.60	AV	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40 5190MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

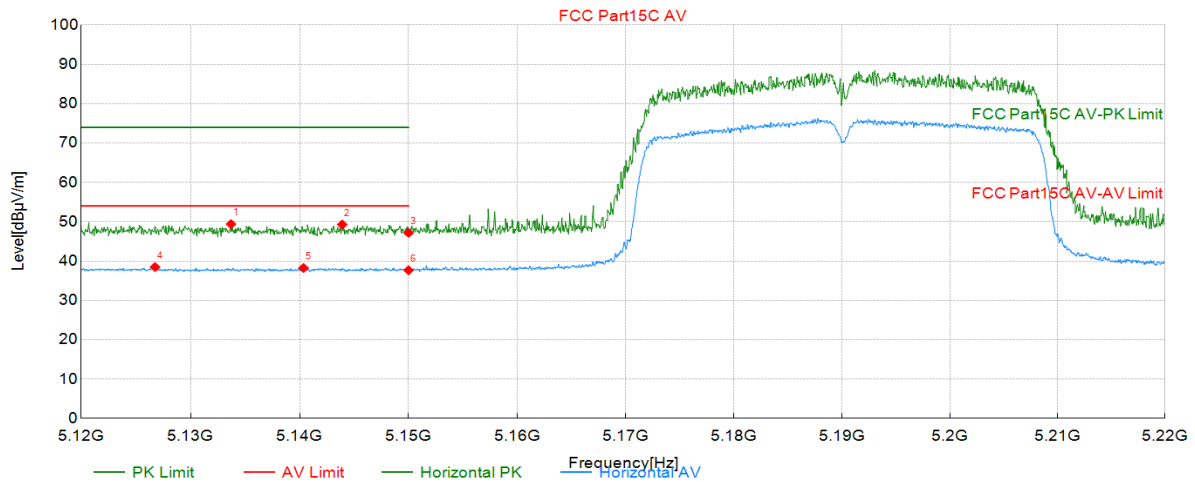

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5133.71	35.33	14.08	49.41	74.00	24.59	PK	Horizontal	PASS
2	5143.91	35.18	14.11	49.29	74.00	24.71	PK	Horizontal	PASS
3	5150.00	33.06	14.12	47.18	74.00	26.82	PK	Horizontal	PASS
4	5126.75	24.44	14.05	38.49	54.00	15.51	AV	Horizontal	PASS
5	5140.36	24.16	14.09	38.25	54.00	15.75	AV	Horizontal	PASS
6	5150.00	23.56	14.12	37.68	54.00	16.32	AV	Horizontal	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40 5190MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

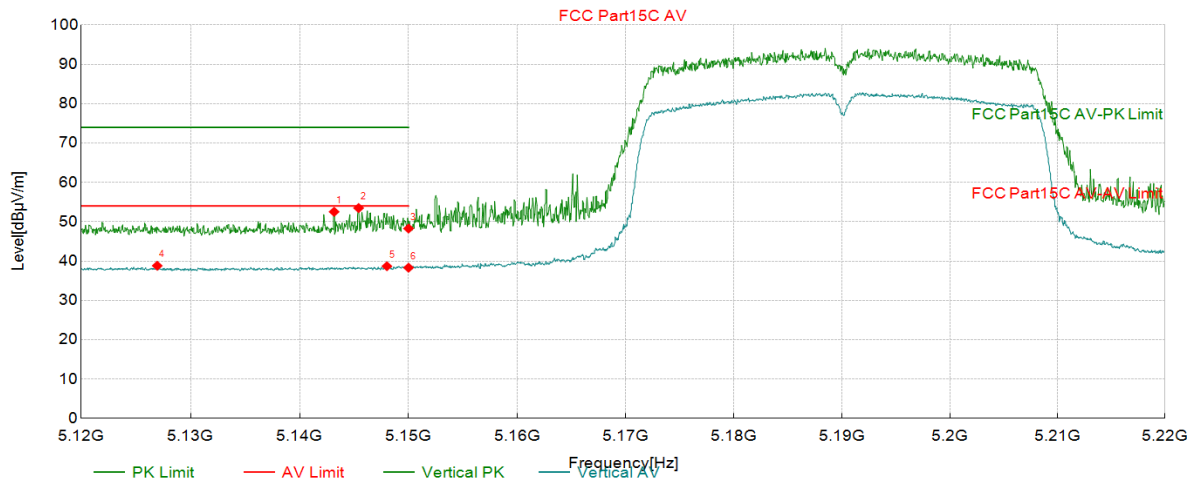

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5143.16	38.42	14.11	52.53	74.00	21.47	PK	Vertical	PASS
2	5145.41	39.37	14.11	53.48	74.00	20.52	PK	Vertical	PASS
3	5150.00	34.16	14.12	48.28	74.00	25.72	PK	Vertical	PASS
4	5126.95	24.77	14.05	38.82	54.00	15.18	AV	Vertical	PASS
5	5148.01	24.58	14.12	38.70	54.00	15.30	AV	Vertical	PASS
6	5150.00	24.20	14.12	38.32	54.00	15.68	AV	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC80 5210MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

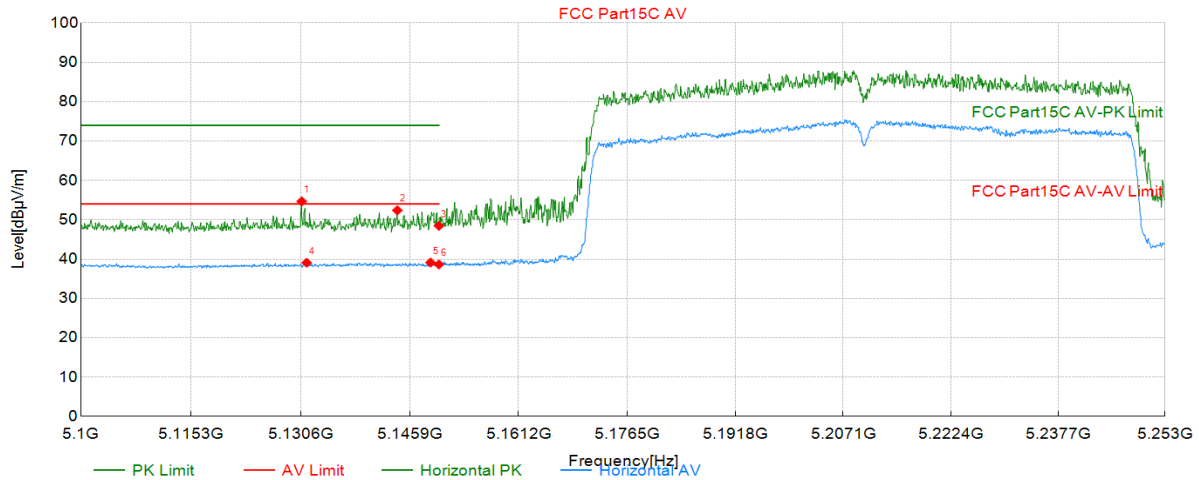

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5130.77	40.59	14.07	54.66	74.00	19.34	PK	Horizontal	PASS
2	5144.16	38.28	14.11	52.39	74.00	21.61	PK	Horizontal	PASS
3	5150.00	34.34	14.12	48.46	74.00	25.54	PK	Horizontal	PASS
4	5131.46	25.00	14.07	39.07	54.00	14.93	AV	Horizontal	PASS
5	5148.83	25.00	14.12	39.12	54.00	14.88	AV	Horizontal	PASS
6	5150.00	24.52	14.12	38.64	54.00	15.36	AV	Horizontal	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC80 5210MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

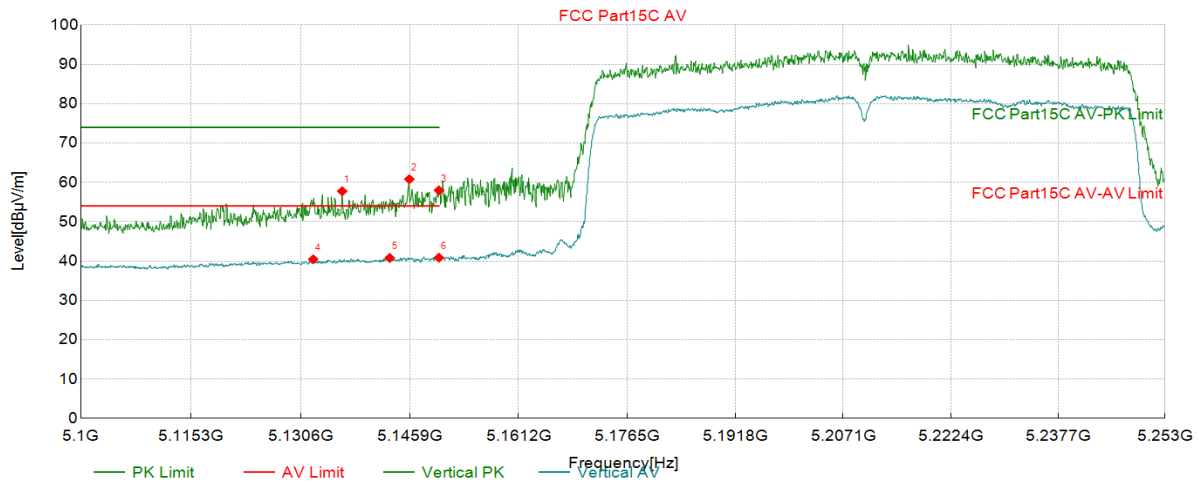

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5136.43	43.69	14.08	57.77	74.00	16.23	PK	Vertical	PASS
2	5145.85	46.72	14.11	60.83	74.00	13.17	PK	Vertical	PASS
3	5150.00	43.87	14.12	57.99	74.00	16.01	PK	Vertical	PASS
4	5132.38	26.39	14.07	40.46	54.00	13.54	AV	Vertical	PASS
5	5143.09	26.70	14.11	40.81	54.00	13.19	AV	Vertical	PASS
6	5150.00	26.75	14.12	40.87	54.00	13.13	AV	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11A 5320MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

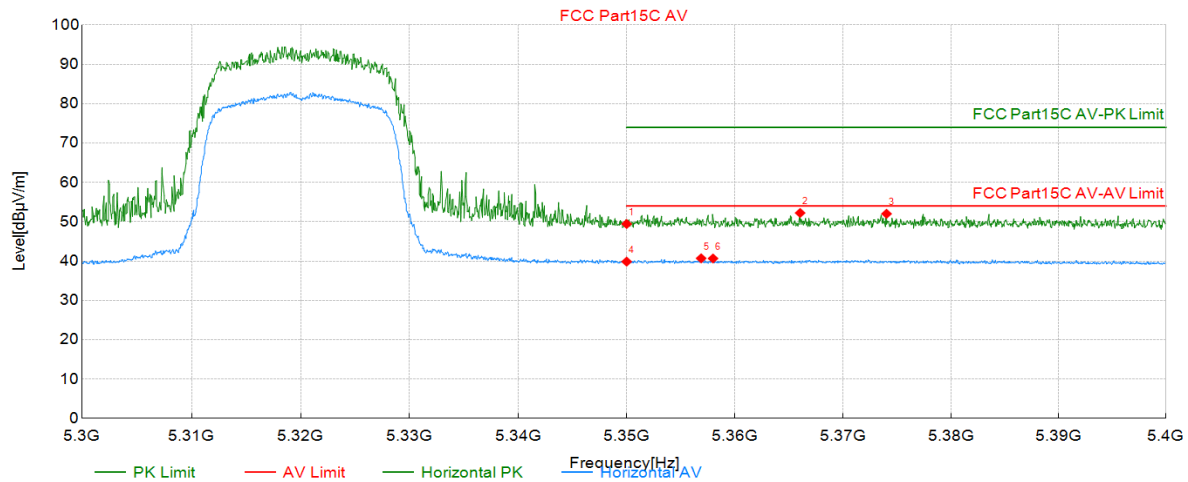

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	34.93	14.52	49.45	74.00	24.55	PK	Horizontal	PASS
2	5366.03	37.77	14.47	52.24	74.00	21.76	PK	Horizontal	PASS
3	5374.04	37.59	14.44	52.03	74.00	21.97	PK	Horizontal	PASS
4	5350.00	25.35	14.52	39.87	54.00	14.13	AV	Horizontal	PASS
5	5356.88	26.21	14.49	40.70	54.00	13.30	AV	Horizontal	PASS
6	5357.98	26.18	14.49	40.67	54.00	13.33	AV	Horizontal	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11A 5320MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

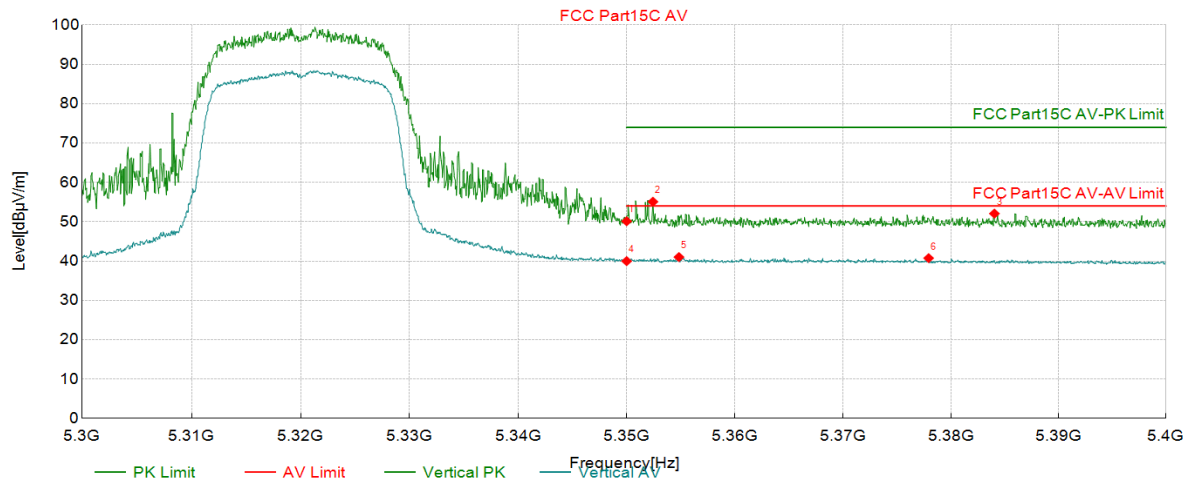

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	35.61	14.52	50.13	74.00	23.87	PK	Vertical	PASS
2	5352.43	40.58	14.51	55.09	74.00	18.91	PK	Vertical	PASS
3	5384.04	37.67	14.41	52.08	74.00	21.92	PK	Vertical	PASS
4	5350.00	25.48	14.52	40.00	54.00	14.00	AV	Vertical	PASS
5	5354.83	26.52	14.50	41.02	54.00	12.98	AV	Vertical	PASS
6	5377.94	26.33	14.43	40.76	54.00	13.24	AV	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N20 5320MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

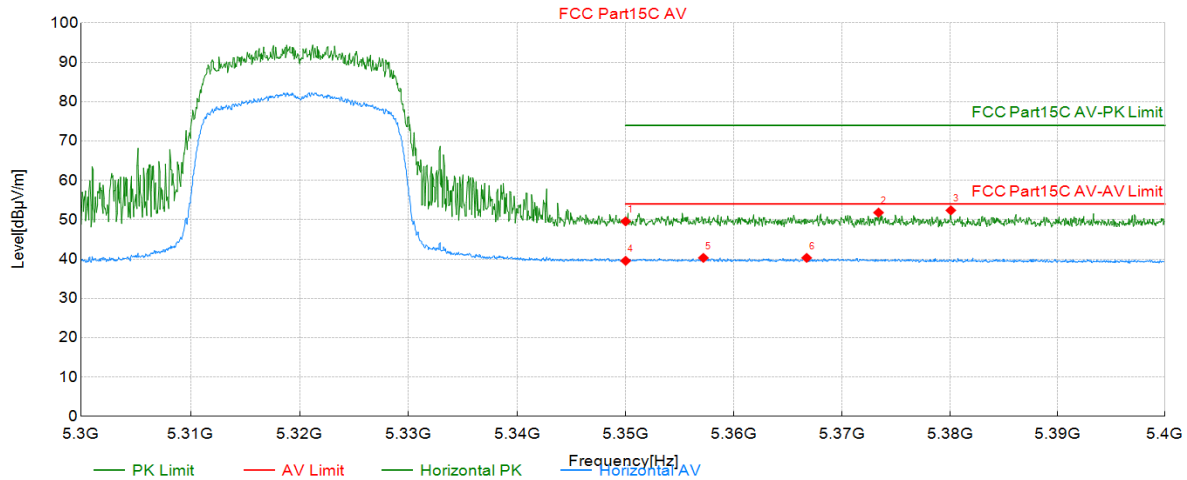

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	35.06	14.52	49.58	74.00	24.42	PK	Horizont	PASS
2	5373.39	37.37	14.45	51.82	74.00	22.18	PK	Horizont	PASS
3	5380.09	37.97	14.42	52.39	74.00	21.61	PK	Horizont	PASS
4	5350.00	25.04	14.52	39.56	54.00	14.44	AV	Horizont	PASS
5	5357.18	25.82	14.49	40.31	54.00	13.69	AV	Horizont	PASS
6	5366.73	25.85	14.46	40.31	54.00	13.69	AV	Horizont	PASS


Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)
2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11N20 5320MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

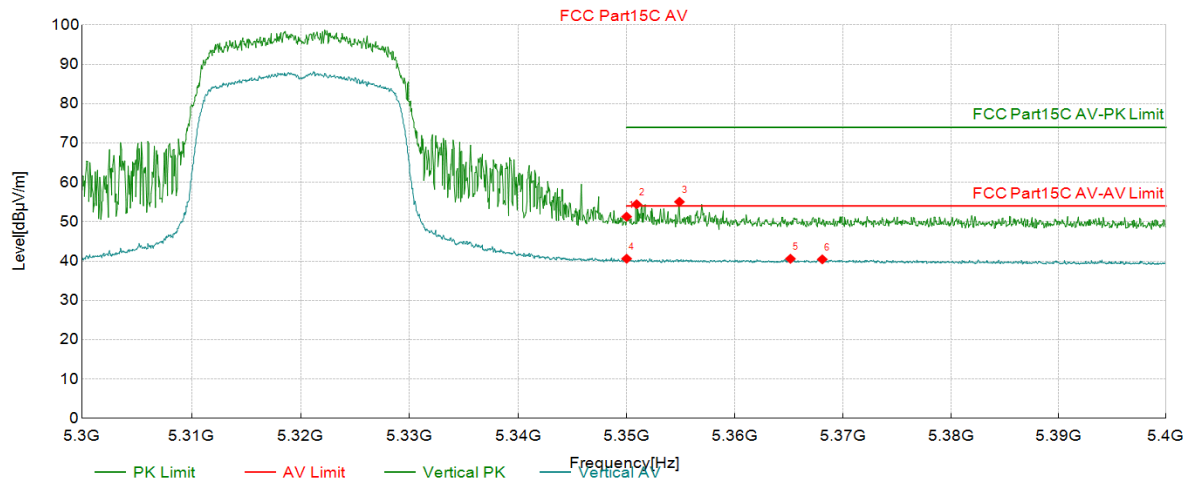

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	36.77	14.52	51.29	74.00	22.71	PK	Vertical	PASS
2	5350.93	39.92	14.52	54.44	74.00	19.56	PK	Vertical	PASS
3	5354.88	40.57	14.50	55.07	74.00	18.93	PK	Vertical	PASS
4	5350.00	26.08	14.52	40.60	54.00	13.40	AV	Vertical	PASS
5	5365.13	26.12	14.47	40.59	54.00	13.41	AV	Vertical	PASS
6	5368.08	25.98	14.46	40.44	54.00	13.56	AV	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC20 5320MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

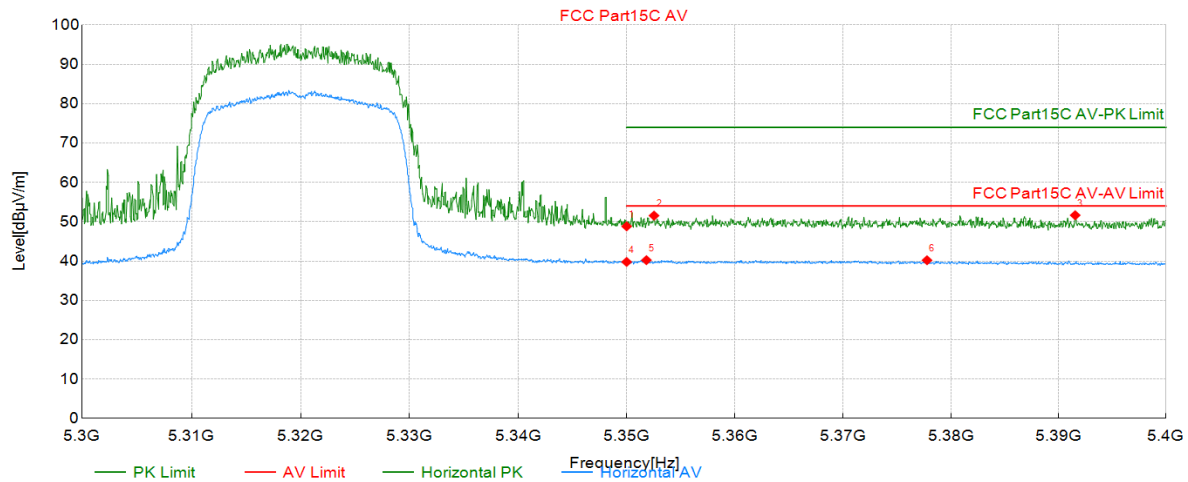

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	34.32	14.52	48.84	74.00	25.16	PK	Horizontal	PASS
2	5352.53	37.04	14.51	51.55	74.00	22.45	PK	Horizontal	PASS
3	5391.55	37.26	14.39	51.65	74.00	22.35	PK	Horizontal	PASS
4	5350.00	25.27	14.52	39.79	54.00	14.21	AV	Horizontal	PASS
5	5351.83	25.73	14.51	40.24	54.00	13.76	AV	Horizontal	PASS
6	5377.79	25.79	14.43	40.22	54.00	13.78	AV	Horizontal	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC20 5320MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

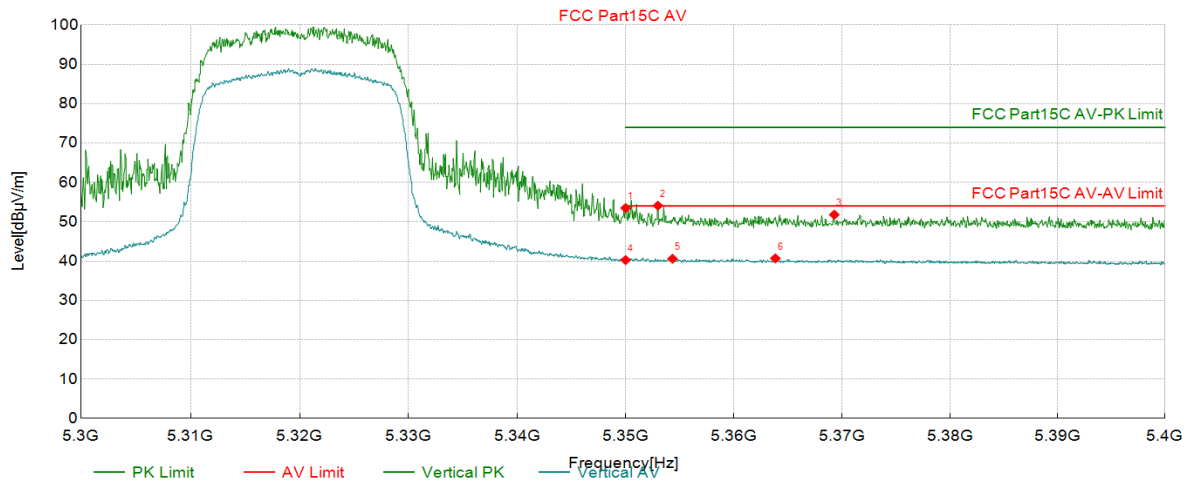

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	38.96	14.52	53.48	74.00	20.52	PK	Vertical	PASS
2	5352.98	39.59	14.51	54.10	74.00	19.90	PK	Vertical	PASS
3	5369.28	37.35	14.45	51.80	74.00	22.20	PK	Vertical	PASS
4	5350.00	25.74	14.52	40.26	54.00	13.74	AV	Vertical	PASS
5	5354.33	26.10	14.50	40.60	54.00	13.40	AV	Vertical	PASS
6	5363.83	26.22	14.47	40.69	54.00	13.31	AV	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N40 5310MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

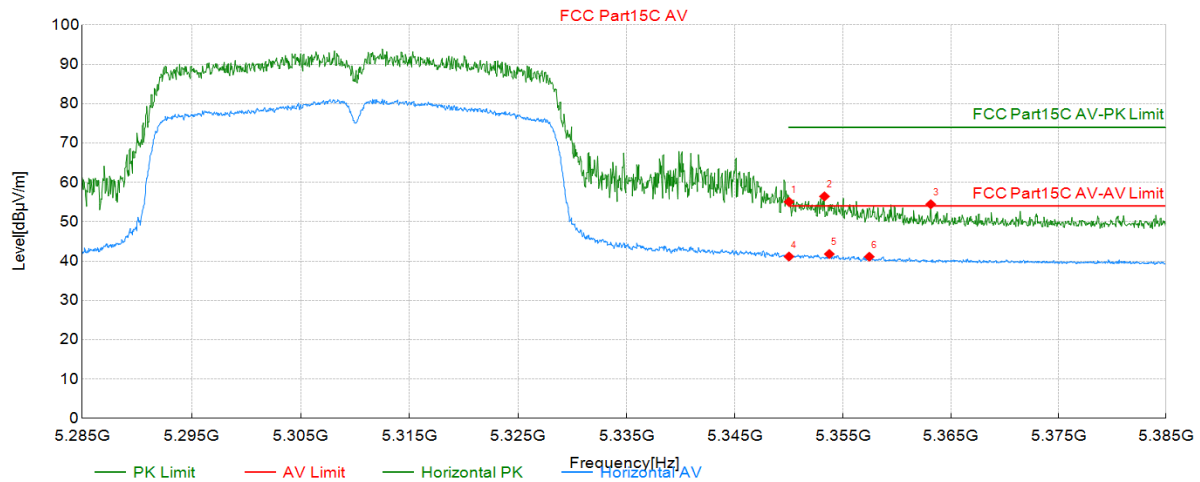

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	40.54	14.52	55.06	74.00	18.94	PK	Horizont	PASS
2	5353.28	41.94	14.51	56.45	74.00	17.55	PK	Horizont	PASS
3	5363.14	39.97	14.48	54.45	74.00	19.55	PK	Horizont	PASS
4	5350.00	26.64	14.52	41.16	54.00	12.84	AV	Horizont	PASS
5	5353.73	27.29	14.51	41.80	54.00	12.20	AV	Horizont	PASS
6	5357.44	26.62	14.49	41.11	54.00	12.89	AV	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N40 5310MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

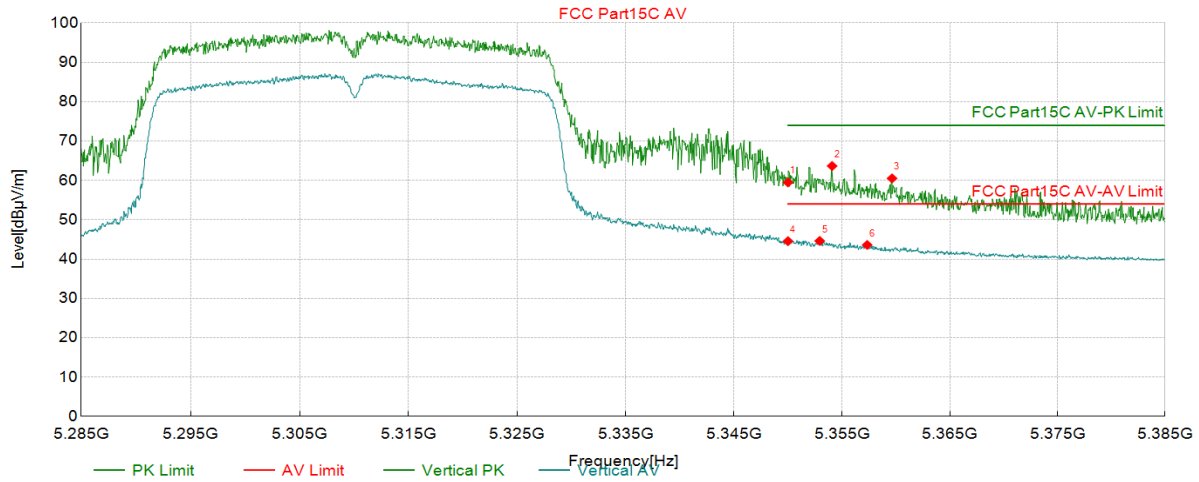

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	44.98	14.52	59.50	74.00	14.50	PK	Vertical	PASS
2	5354.08	49.17	14.50	63.67	74.00	10.33	PK	Vertical	PASS
3	5359.64	46.03	14.49	60.52	74.00	13.48	PK	Vertical	PASS
4	5350.00	30.04	14.52	44.56	54.00	9.44	AV	Vertical	PASS
5	5352.93	30.11	14.51	44.62	54.00	9.38	AV	Vertical	PASS
6	5357.34	29.11	14.49	43.60	54.00	10.40	AV	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40 5310MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

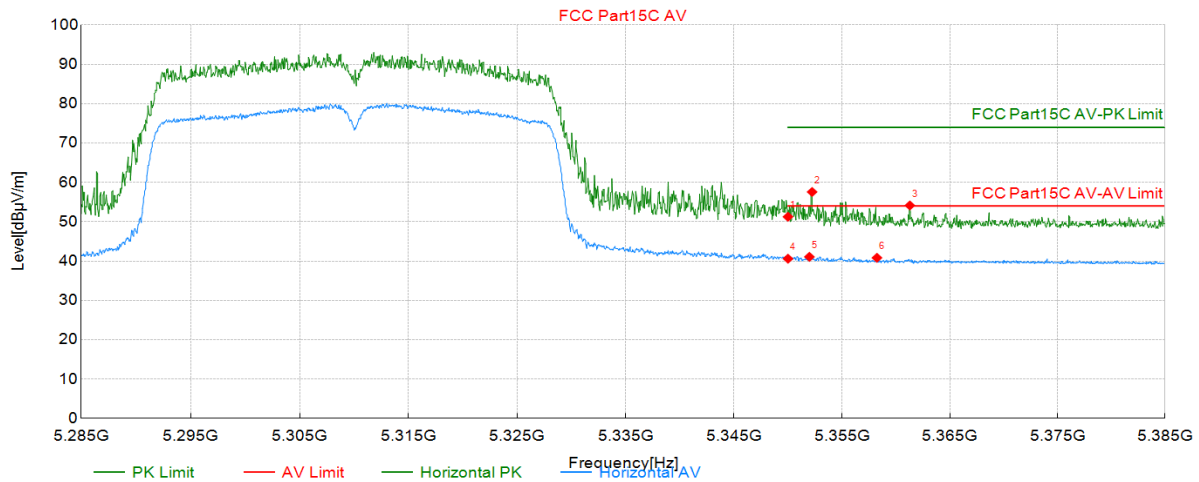

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	36.75	14.52	51.27	74.00	22.73	PK	Horizont	PASS
2	5352.23	43.06	14.51	57.57	74.00	16.43	PK	Horizont	PASS
3	5361.29	39.67	14.48	54.15	74.00	19.85	PK	Horizont	PASS
4	5350.00	26.09	14.52	40.61	54.00	13.39	AV	Horizont	PASS
5	5351.98	26.57	14.51	41.08	54.00	12.92	AV	Horizont	PASS
6	5358.24	26.35	14.49	40.84	54.00	13.16	AV	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40 5310MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

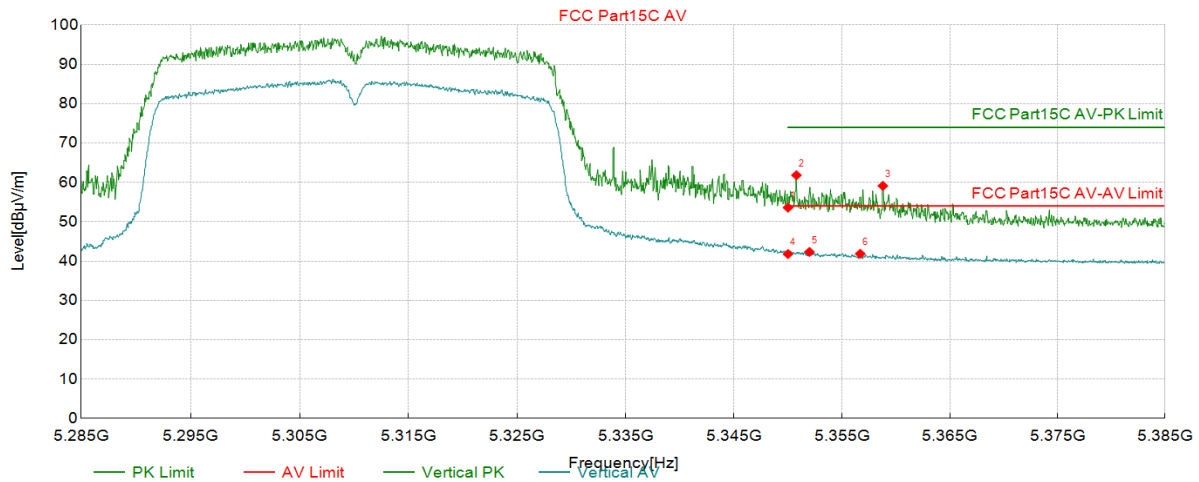

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	39.08	14.52	53.60	74.00	20.40	PK	Vertical	PASS
2	5350.78	47.32	14.52	61.84	74.00	12.16	PK	Vertical	PASS
3	5358.79	44.64	14.48	59.12	74.00	14.88	PK	Vertical	PASS
4	5350.00	27.27	14.52	41.79	54.00	12.21	AV	Vertical	PASS
5	5351.98	27.82	14.51	42.33	54.00	11.67	AV	Vertical	PASS
6	5356.69	27.38	14.49	41.87	54.00	12.13	AV	Vertical	PASS


Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)
2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11AC80 5290MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

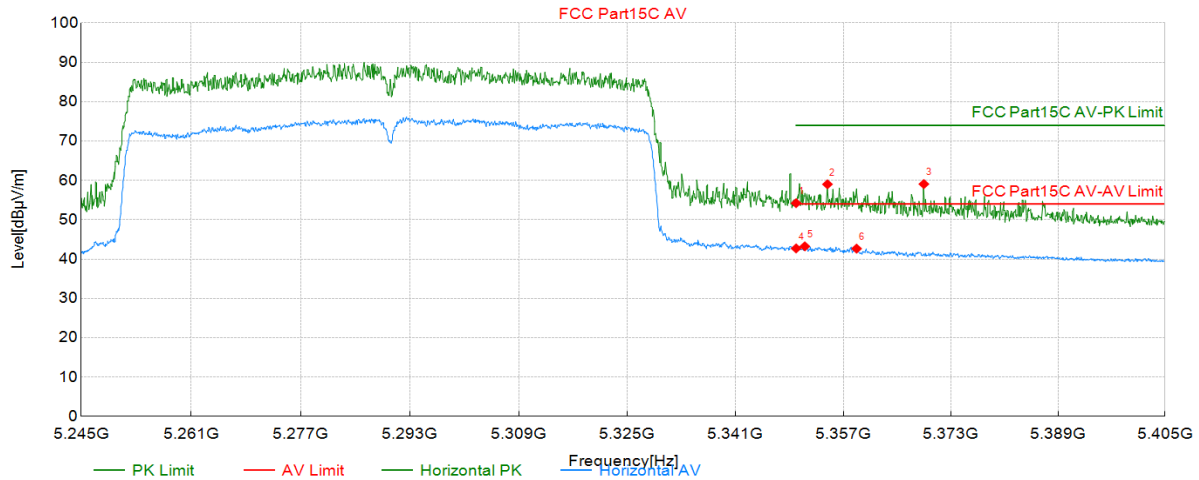

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	39.71	14.52	54.23	74.00	19.77	PK	Horizont	PASS
2	5354.65	44.52	14.50	59.02	74.00	14.98	PK	Horizont	PASS
3	5368.98	44.62	14.45	59.07	74.00	14.93	PK	Horizont	PASS
4	5350.00	28.20	14.52	42.72	54.00	11.28	AV	Horizont	PASS
5	5351.29	28.73	14.51	43.24	54.00	10.76	AV	Horizont	PASS
6	5358.98	28.18	14.48	42.66	54.00	11.34	AV	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC80 5290MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

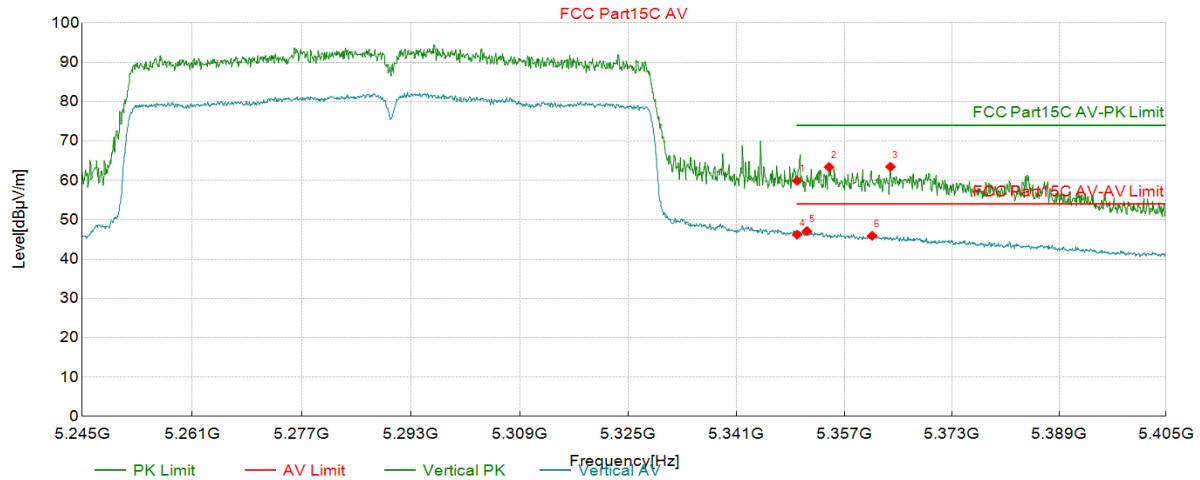


Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5350.00	45.36	14.52	59.88	74.00	14.12	PK	Vertical	PASS
2	5354.73	48.90	14.50	63.40	74.00	10.60	PK	Vertical	PASS
3	5363.86	49.00	14.47	63.47	74.00	10.53	PK	Vertical	PASS
4	5350.00	31.68	14.52	46.20	54.00	7.80	AV	Vertical	PASS
5	5351.45	32.61	14.51	47.12	54.00	6.88	AV	Vertical	PASS
6	5361.14	31.43	14.49	45.92	54.00	8.08	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11A 5500MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

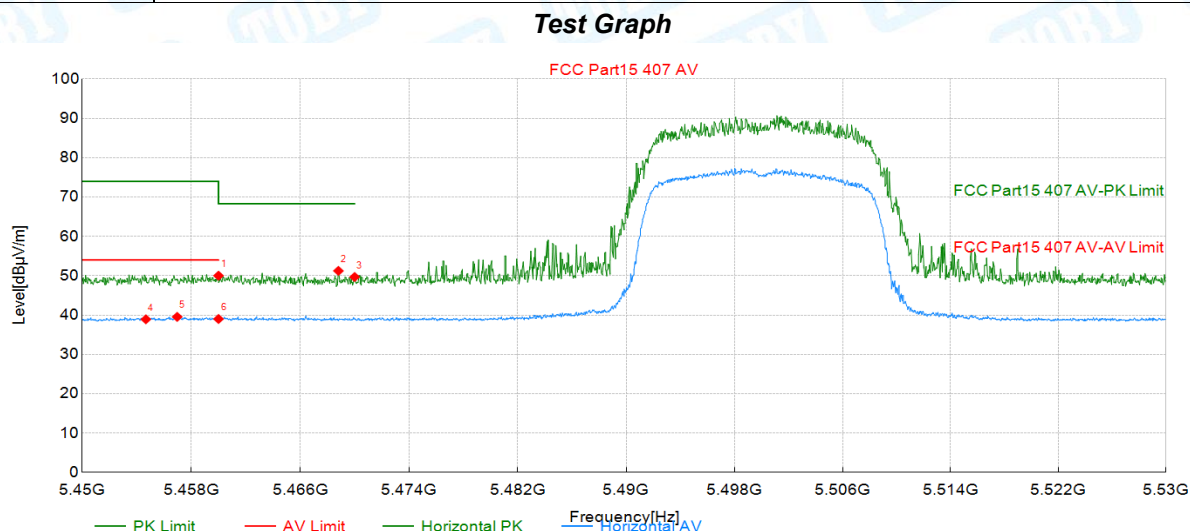

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5460.00	35.46	14.56	50.02	68.30	18.28	PK	Horizont	PASS
2	5468.81	36.72	14.52	51.24	68.30	17.06	PK	Horizont	PASS
3	5470.00	35.18	14.51	49.69	68.30	18.61	PK	Horizont	PASS
4	5454.67	24.34	14.59	38.93	54.00	15.07	AV	Horizont	PASS
5	5456.96	24.97	14.58	39.55	54.00	14.45	AV	Horizont	PASS
6	5460.00	24.45	14.56	39.01	54.00	14.99	AV	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11A 5500MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

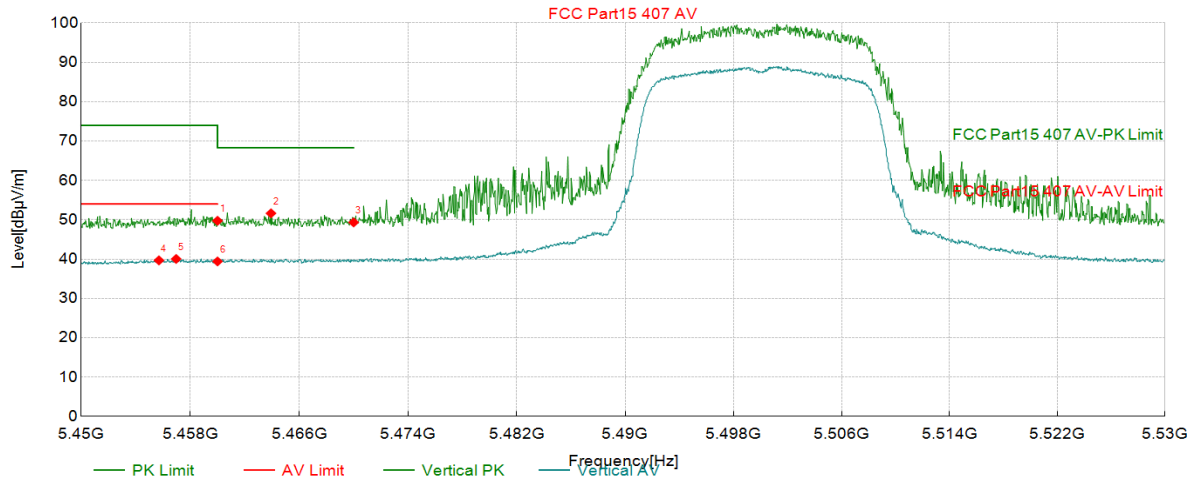

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5460.00	35.18	14.56	49.74	68.30	18.56	PK	Vertical	PASS
2	5463.93	37.09	14.55	51.64	68.30	16.66	PK	Vertical	PASS
3	5470.00	34.82	14.51	49.33	68.30	18.97	PK	Vertical	PASS
4	5455.70	25.09	14.59	39.68	54.00	14.32	AV	Vertical	PASS
5	5456.96	25.46	14.58	40.04	54.00	13.96	AV	Vertical	PASS
6	5460.00	24.85	14.56	39.41	54.00	14.59	AV	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N20 5500MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

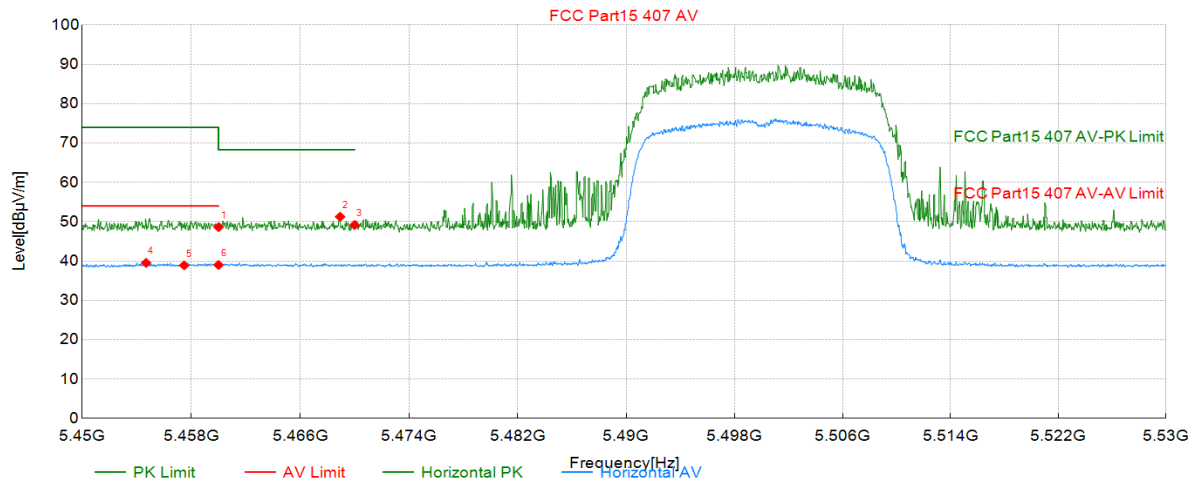

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5460.00	34.09	14.56	48.65	68.30	19.65	PK	Horizont	PASS
2	5468.93	36.76	14.52	51.28	68.30	17.02	PK	Horizont	PASS
3	5470.00	34.67	14.51	49.18	68.30	19.12	PK	Horizont	PASS
4	5454.68	24.96	14.59	39.55	54.00	14.45	AV	Horizont	PASS
5	5457.48	24.34	14.58	38.92	54.00	15.08	AV	Horizont	PASS
6	5460.00	24.46	14.56	39.02	54.00	14.98	AV	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N20 5500MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

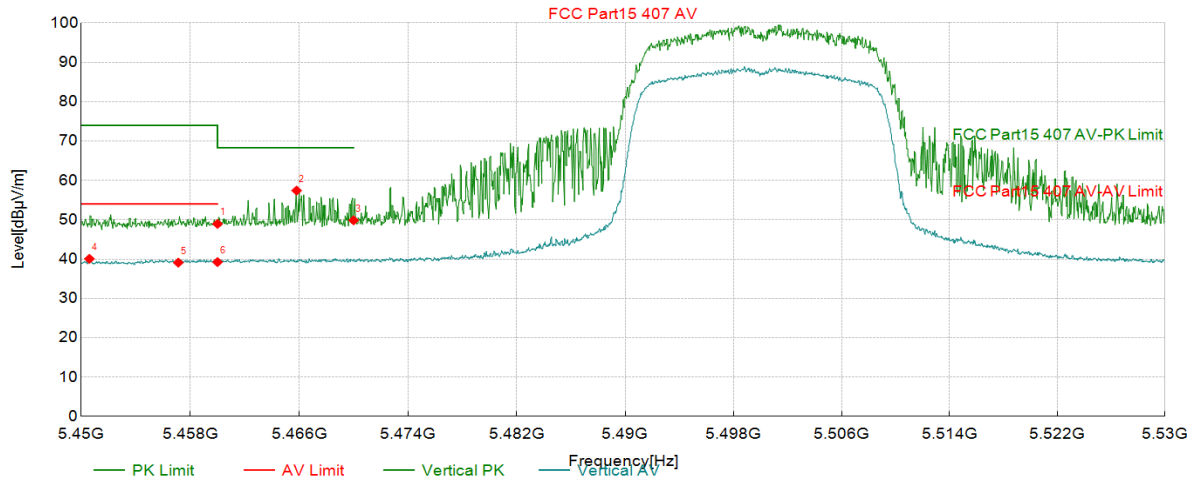

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5460.00	34.39	14.56	48.95	68.30	19.35	PK	Vertical	PASS
2	5465.81	42.88	14.54	57.42	68.30	10.88	PK	Vertical	PASS
3	5470.00	35.35	14.51	49.86	68.30	18.44	PK	Vertical	PASS
4	5450.60	25.46	14.61	40.07	54.00	13.93	AV	Vertical	PASS
5	5457.12	24.52	14.58	39.10	54.00	14.90	AV	Vertical	PASS
6	5460.00	24.68	14.56	39.24	54.00	14.76	AV	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC20 5500MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

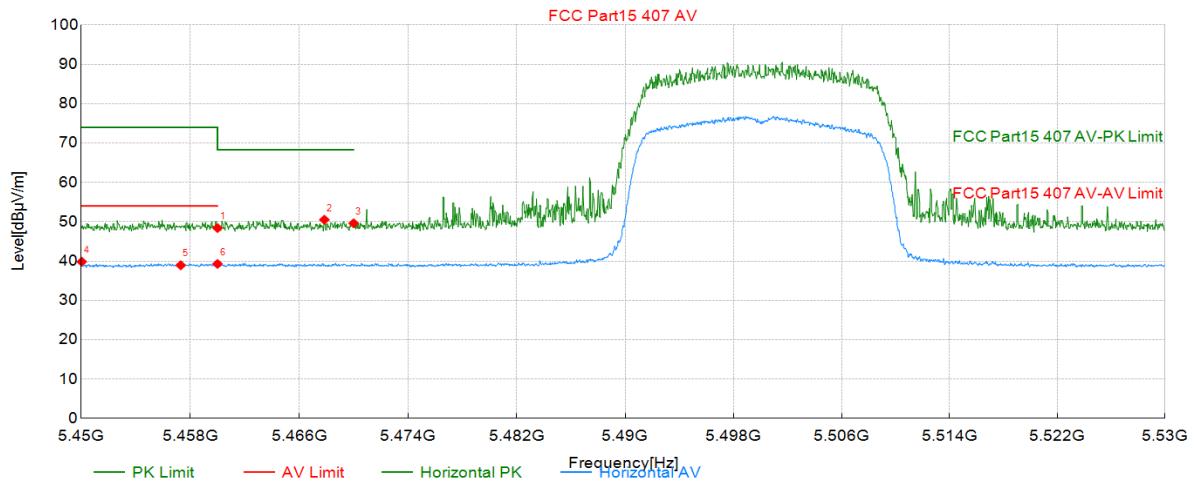

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5460.00	33.84	14.56	48.40	68.30	19.90	PK	Horizontal	PASS
2	5467.85	35.99	14.52	50.51	68.30	17.79	PK	Horizontal	PASS
3	5470.00	35.11	14.51	49.62	68.30	18.68	PK	Horizontal	PASS
4	5450.04	25.24	14.61	39.85	54.00	14.15	AV	Horizontal	PASS
5	5457.30	24.36	14.58	38.94	54.00	15.06	AV	Horizontal	PASS
6	5460.00	24.72	14.56	39.28	54.00	14.72	AV	Horizontal	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC20 5500MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

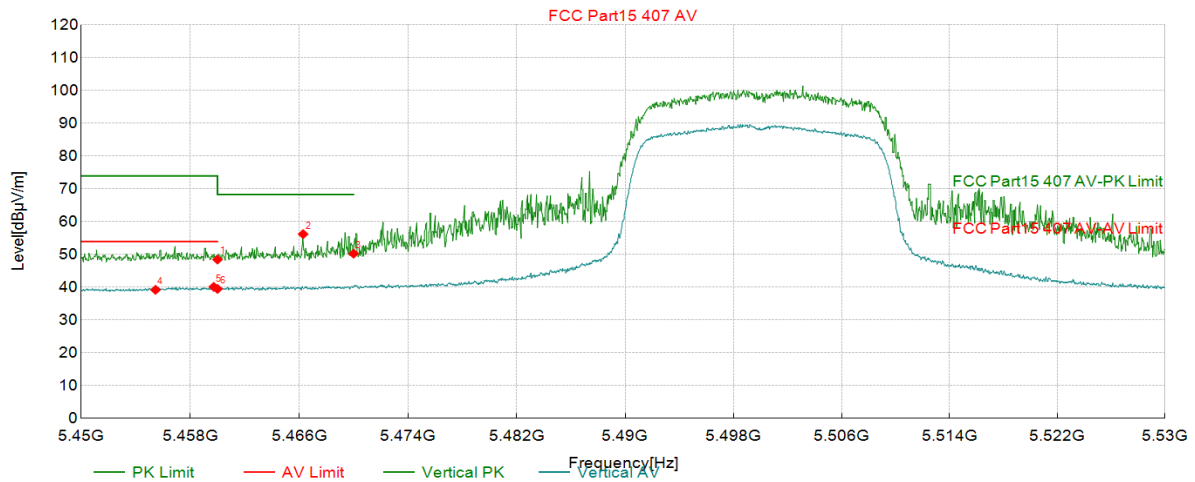

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5460.00	33.92	14.56	48.48	68.30	19.82	PK	Vertical	PASS
2	5466.29	41.70	14.53	56.23	68.30	12.07	PK	Vertical	PASS
3	5470.00	35.76	14.51	50.27	68.30	18.03	PK	Vertical	PASS
4	5455.45	24.64	14.59	39.23	54.00	14.77	AV	Vertical	PASS
5	5459.72	25.57	14.56	40.13	54.00	13.87	AV	Vertical	PASS
6	5460.00	24.96	14.56	39.52	54.00	14.48	AV	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N40 5510MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

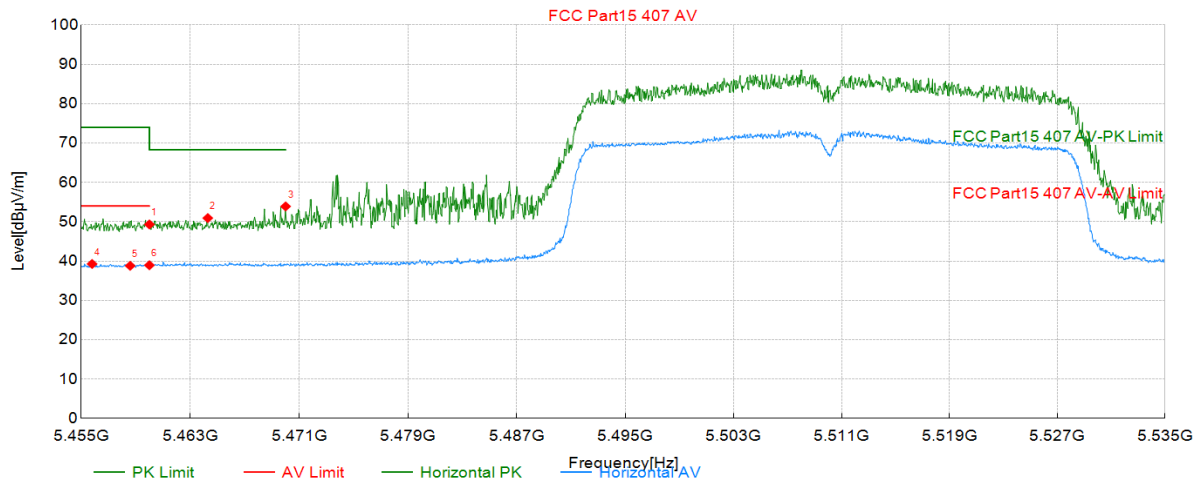

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5460.00	34.76	14.56	49.32	68.30	18.98	PK	Horizont	PASS
2	5464.28	36.40	14.54	50.94	68.30	17.36	PK	Horizont	PASS
3	5470.00	39.39	14.51	53.90	68.30	14.40	PK	Horizont	PASS
4	5455.80	24.69	14.59	39.28	54.00	14.72	AV	Horizont	PASS
5	5458.59	24.24	14.57	38.81	54.00	15.19	AV	Horizont	PASS
6	5460.00	24.39	14.56	38.95	54.00	15.05	AV	Horizont	PASS


Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)
2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11N40 5510MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

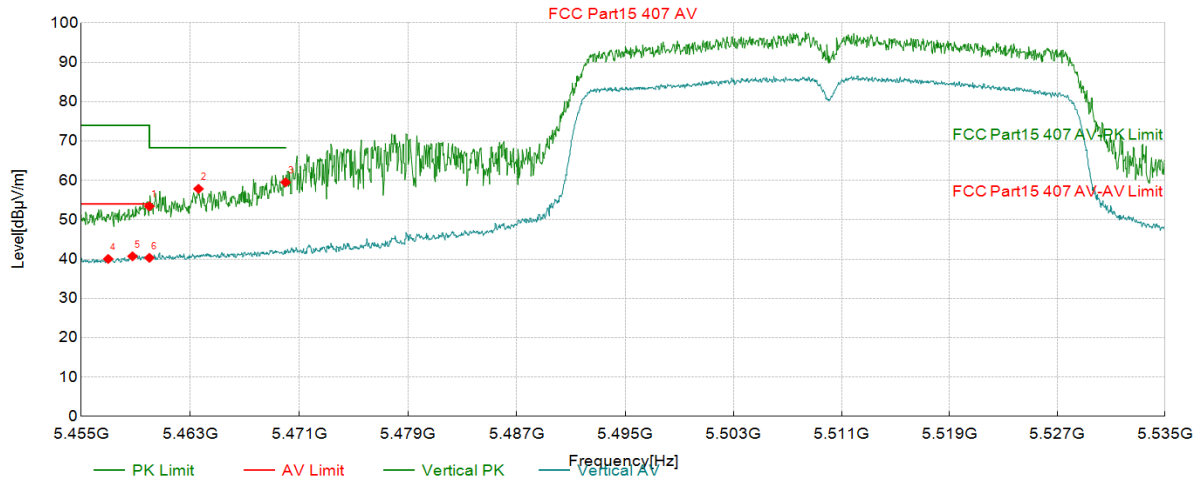

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5460.00	38.86	14.56	53.42	68.30	14.88	PK	Vertical	PASS
2	5463.60	43.31	14.55	57.86	68.30	10.44	PK	Vertical	PASS
3	5470.00	45.01	14.51	59.52	68.30	8.78	PK	Vertical	PASS
4	5456.98	25.46	14.58	40.04	54.00	13.96	AV	Vertical	PASS
5	5458.76	26.14	14.57	40.71	54.00	13.29	AV	Vertical	PASS
6	5460.00	25.76	14.56	40.32	54.00	13.68	AV	Vertical	PASS


Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)
2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11AC40 5510MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

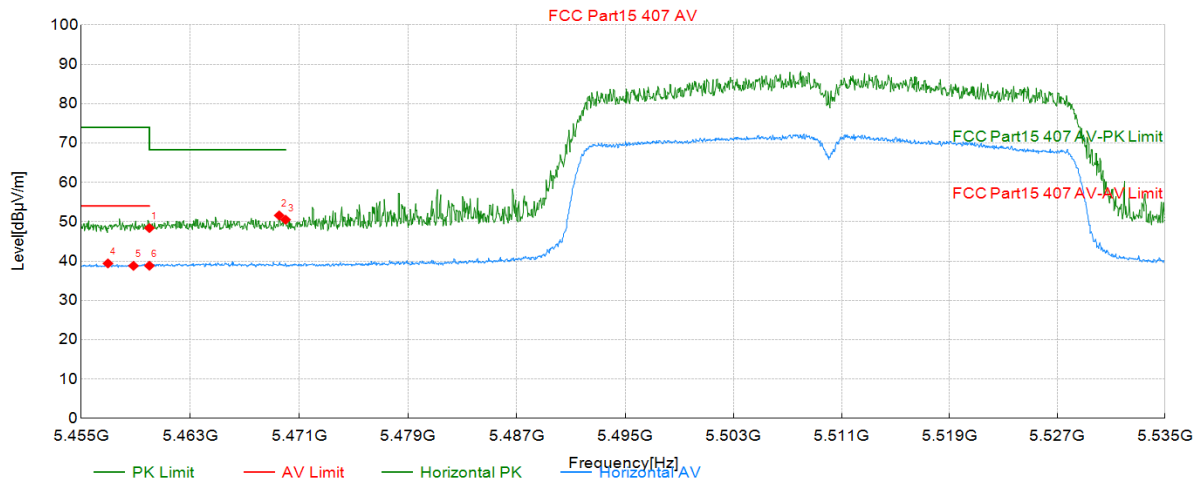

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5460.00	33.84	14.56	48.40	68.30	19.90	PK	Horizontal	PASS
2	5469.53	37.10	14.51	51.61	68.30	16.69	PK	Horizontal	PASS
3	5470.00	36.01	14.51	50.52	68.30	17.78	PK	Horizontal	PASS
4	5456.96	24.83	14.58	39.41	54.00	14.59	AV	Horizontal	PASS
5	5458.83	24.23	14.57	38.80	54.00	15.20	AV	Horizontal	PASS
6	5460.00	24.26	14.56	38.82	54.00	15.18	AV	Horizontal	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40 5510MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

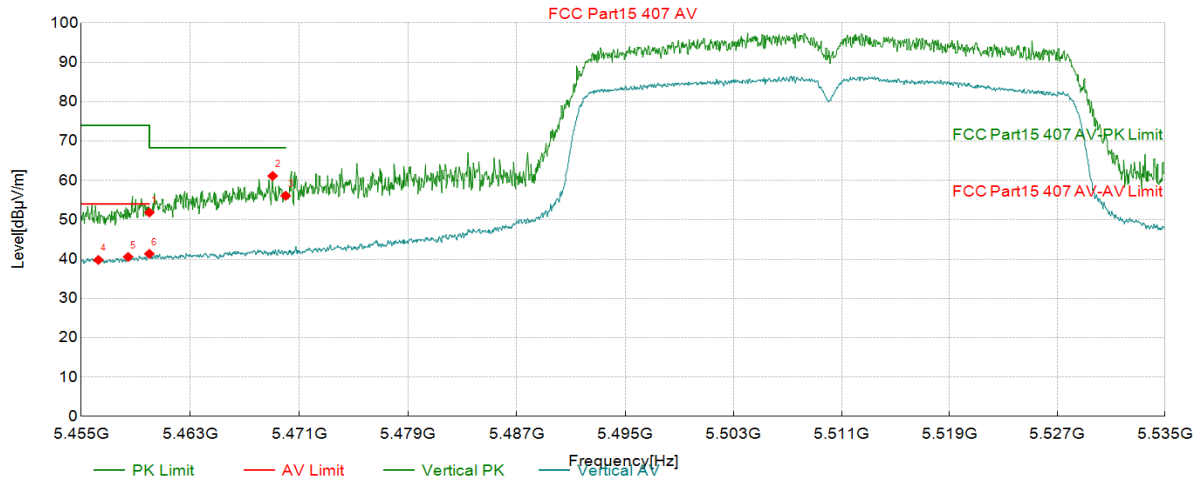

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5460.00	37.28	14.56	51.84	68.30	16.46	PK	Vertical	PASS
2	5469.05	46.61	14.52	61.13	68.30	7.17	PK	Vertical	PASS
3	5470.00	41.59	14.51	56.10	68.30	12.20	PK	Vertical	PASS
4	5456.26	25.20	14.58	39.78	54.00	14.22	AV	Vertical	PASS
5	5458.44	25.98	14.57	40.55	54.00	13.45	AV	Vertical	PASS
6	5460.00	26.78	14.56	41.34	54.00	12.66	AV	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC80 5530MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

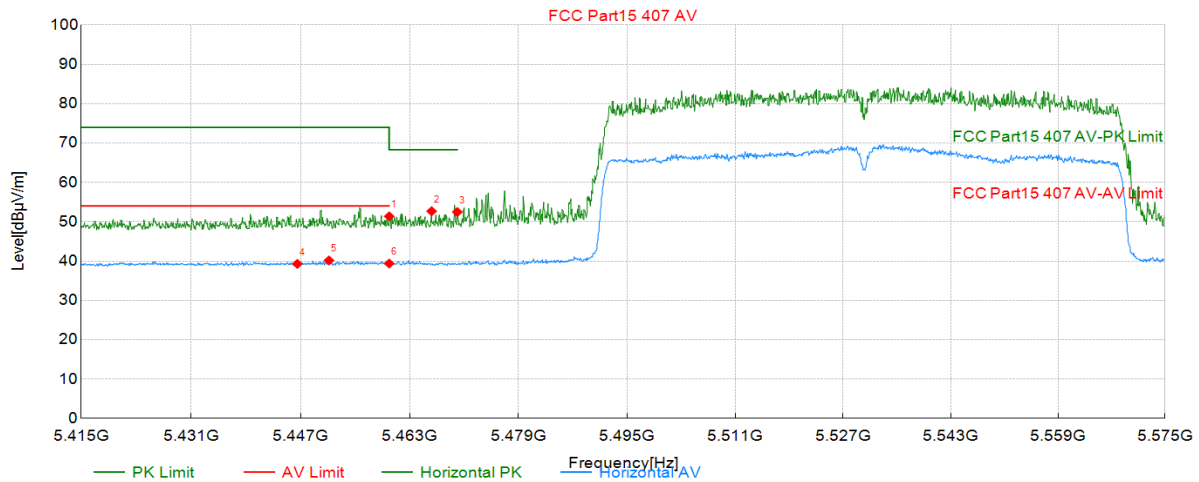

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5460.00	36.82	14.56	51.38	68.30	16.92	PK	Horizontal	PASS
2	5466.23	38.15	14.53	52.68	68.30	15.62	PK	Horizontal	PASS
3	5470.00	37.97	14.51	52.48	68.30	15.82	PK	Horizontal	PASS
4	5446.54	24.70	14.60	39.30	54.00	14.70	AV	Horizontal	PASS
5	5451.18	25.56	14.60	40.16	54.00	13.84	AV	Horizontal	PASS
6	5460.00	24.82	14.56	39.38	54.00	14.62	AV	Horizontal	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC80 5530MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

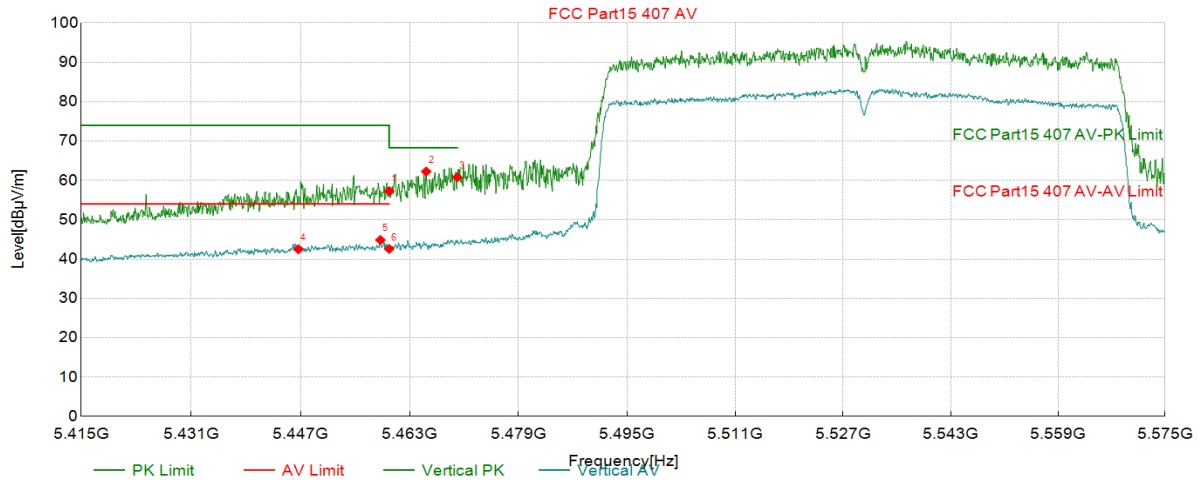

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5460.00	42.72	14.56	57.28	68.30	11.02	PK	Vertical	PASS
2	5465.43	47.72	14.54	62.26	68.30	6.04	PK	Vertical	PASS
3	5470.00	46.29	14.51	60.80	68.30	7.50	PK	Vertical	PASS
4	5446.70	27.91	14.60	42.51	54.00	11.49	AV	Vertical	PASS
5	5458.70	30.29	14.57	44.86	54.00	9.14	AV	Vertical	PASS
6	5460.00	28.03	14.56	42.59	54.00	11.41	AV	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11A 5745MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

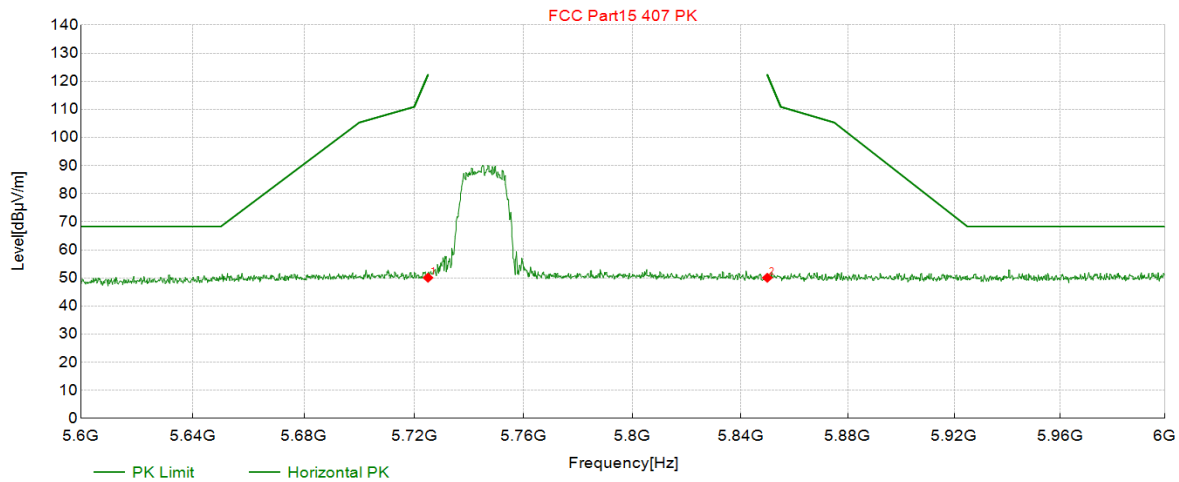

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	34.20	15.88	50.08	122.30	72.22	PK	Horizont	PASS
2	5850.00	33.97	16.10	50.07	122.30	72.23	PK	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11A 5745MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

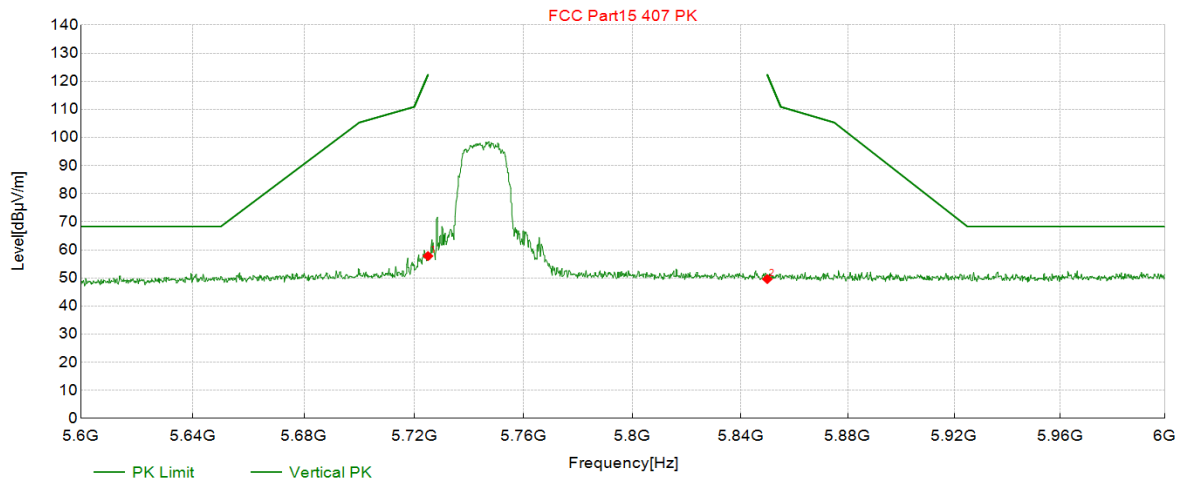

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	41.93	15.88	57.81	122.30	64.49	PK	Vertical	PASS
2	5850.00	33.50	16.10	49.60	122.30	72.70	PK	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N20 5745MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

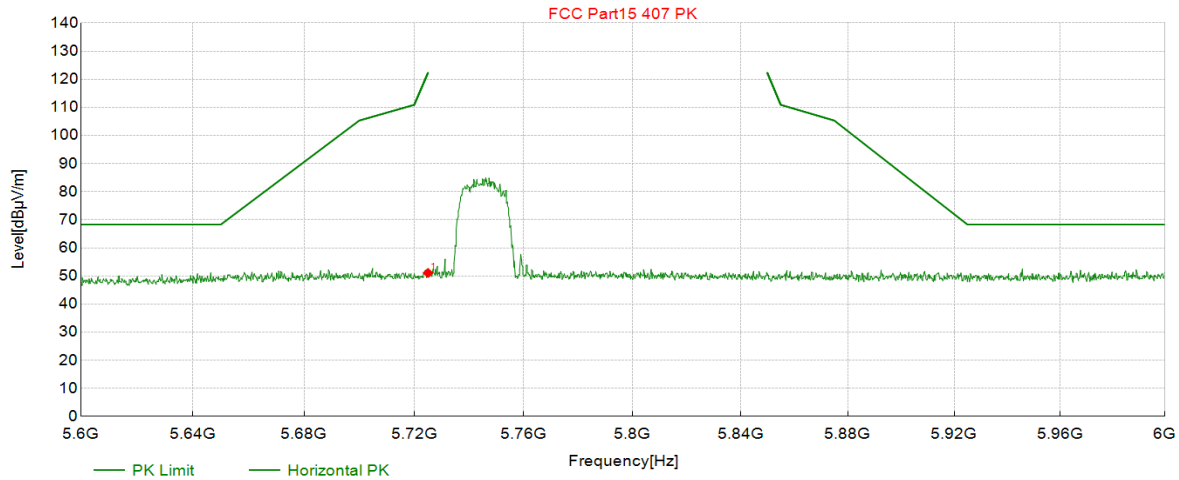

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	35.20	15.88	51.08	122.30	71.22	PK	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N20 5745MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

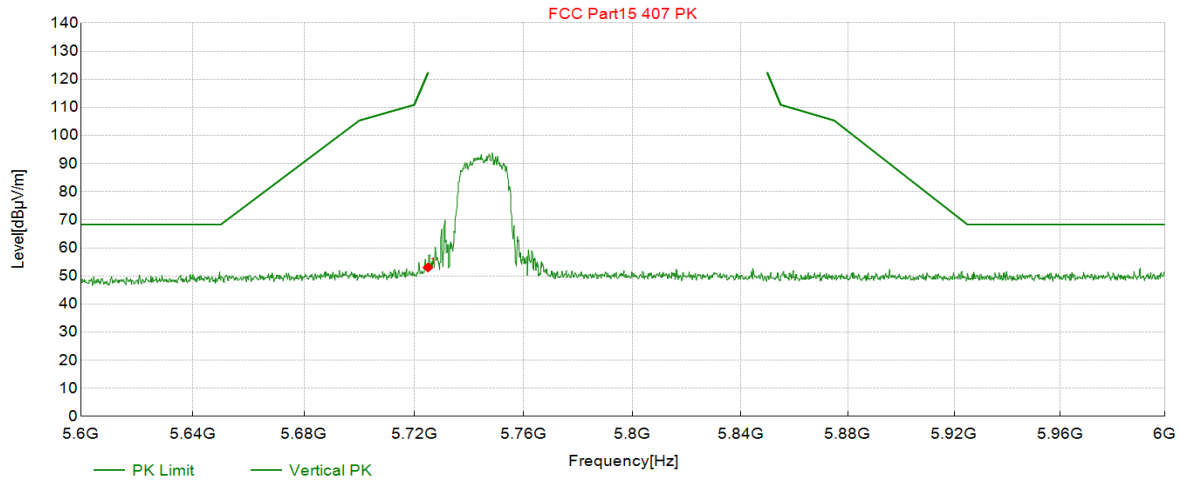

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	37.14	15.88	53.02	122.30	69.28	PK	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC20 5745MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

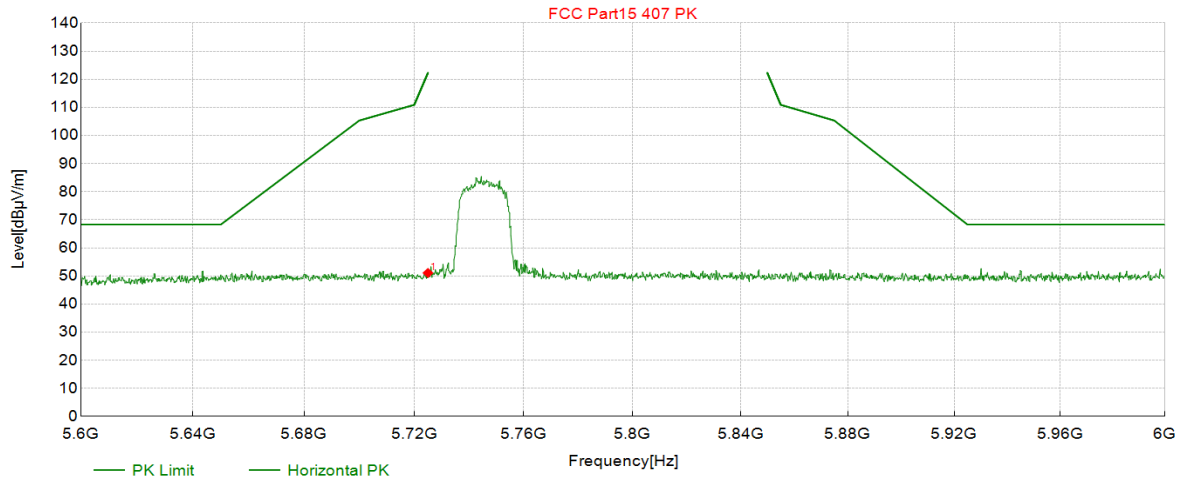

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	35.19	15.88	51.07	122.30	71.23	PK	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC20 5745MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

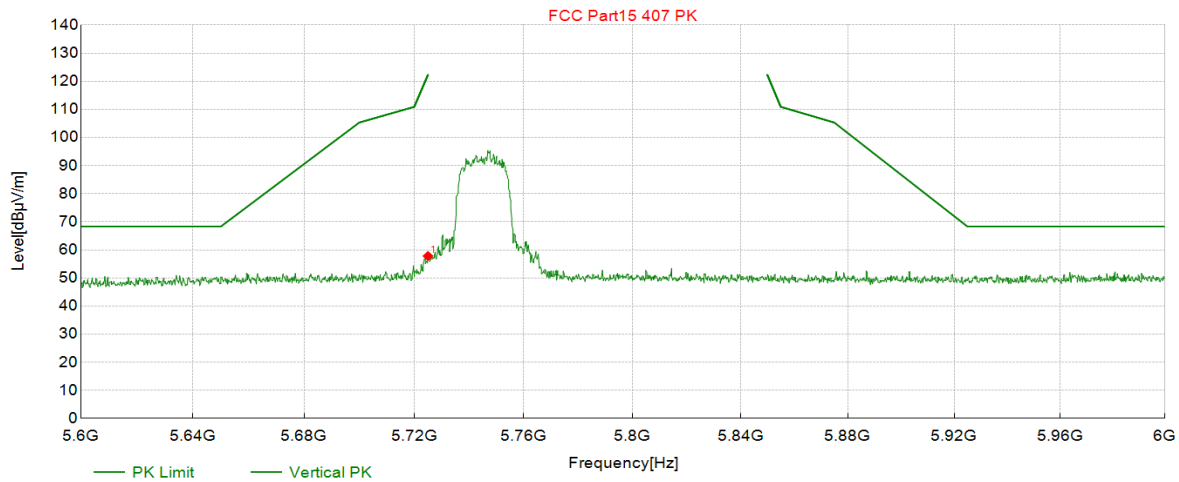

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	41.94	15.88	57.82	122.30	64.48	PK	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N40 5755MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

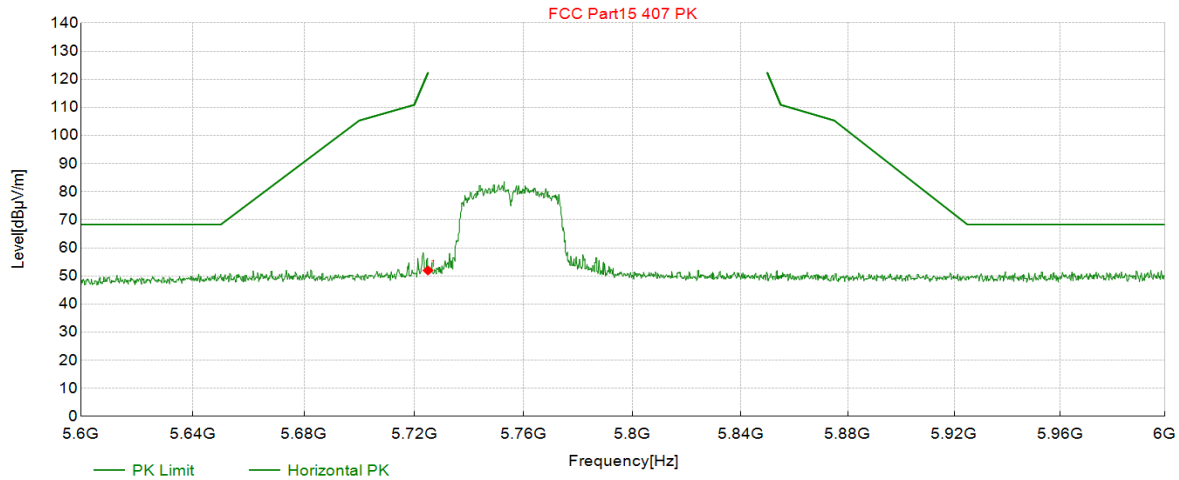

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	36.08	15.88	51.96	122.30	70.34	PK	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N40 5755MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

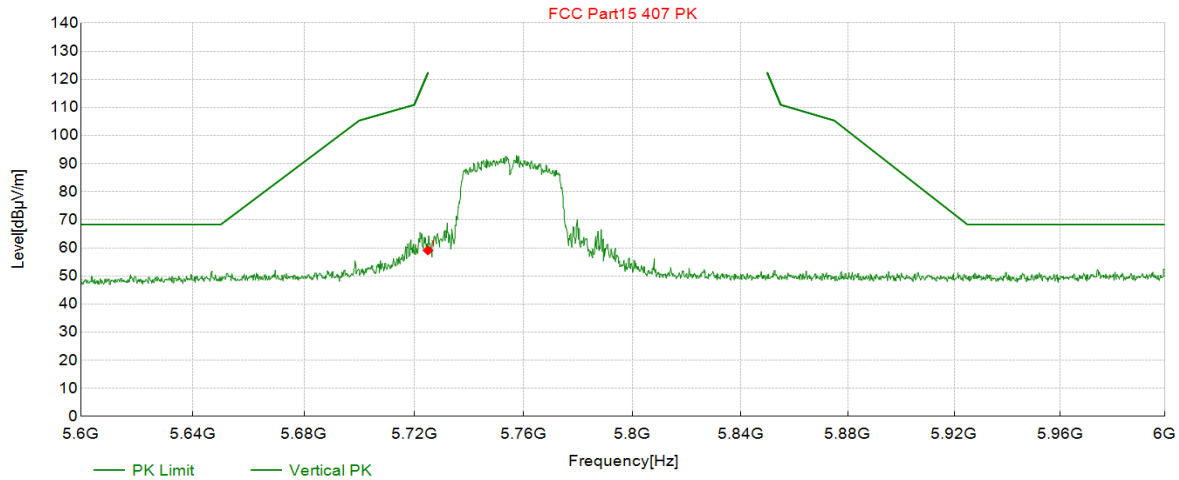

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	43.22	15.88	59.10	122.30	63.20	PK	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40 5755MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

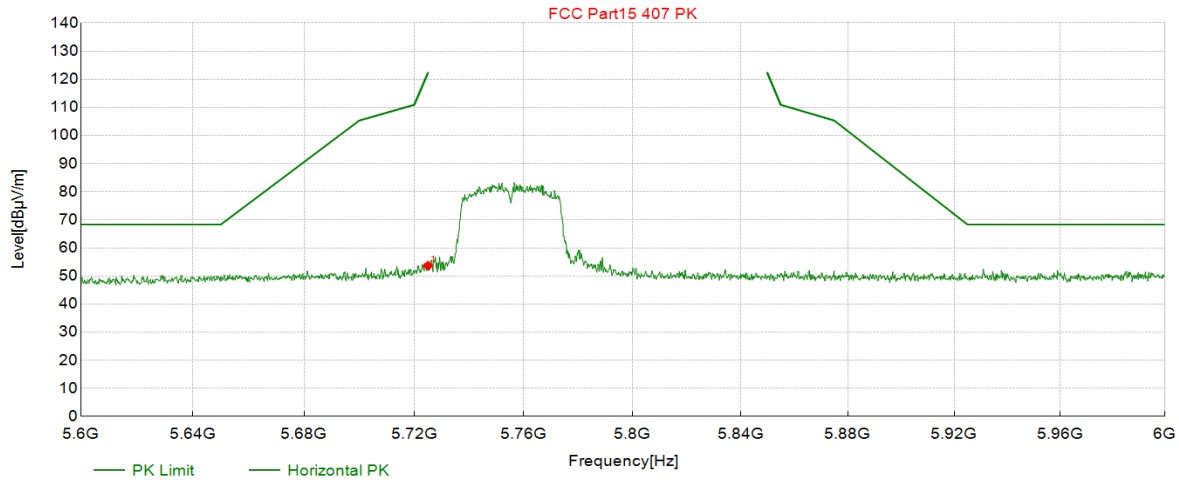

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	37.77	15.88	53.65	122.30	68.65	PK	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40 5755MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

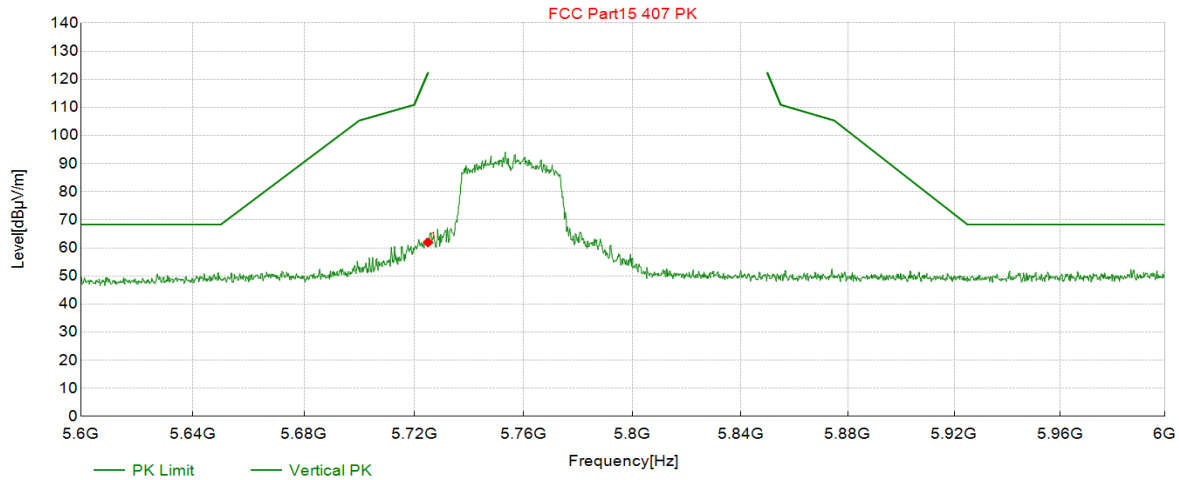

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	46.06	15.88	61.94	122.30	60.36	PK	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11A 5825MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

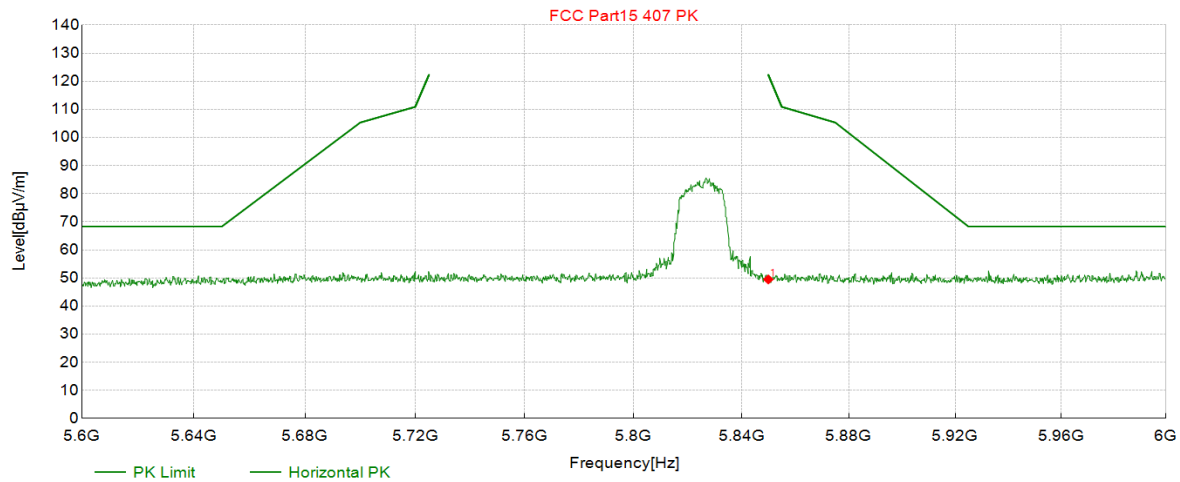

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5850.00	33.39	16.10	49.49	122.30	72.81	PK	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11A 5825MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

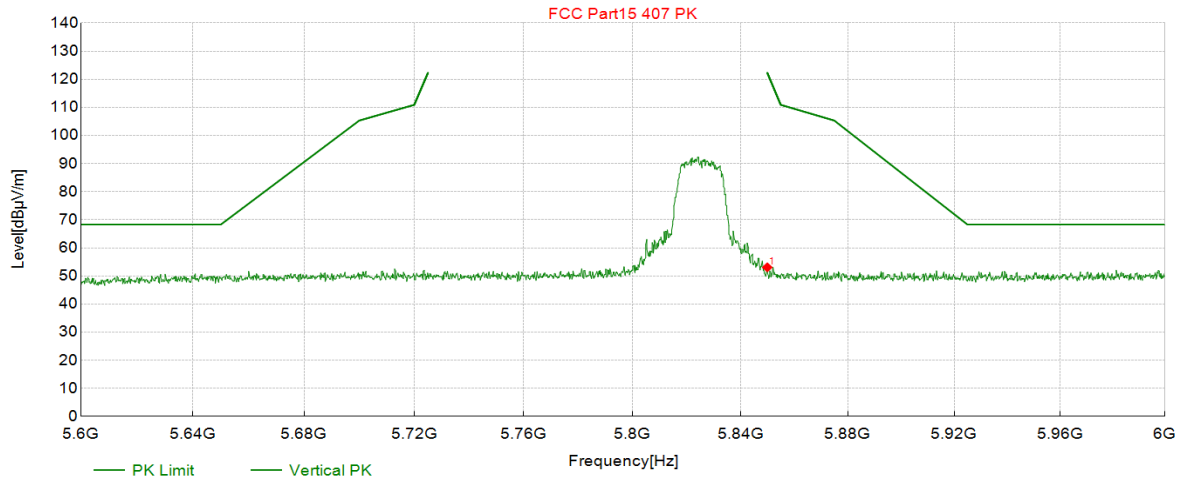

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5850.00	36.98	16.10	53.08	122.30	69.22	PK	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N20 5825MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

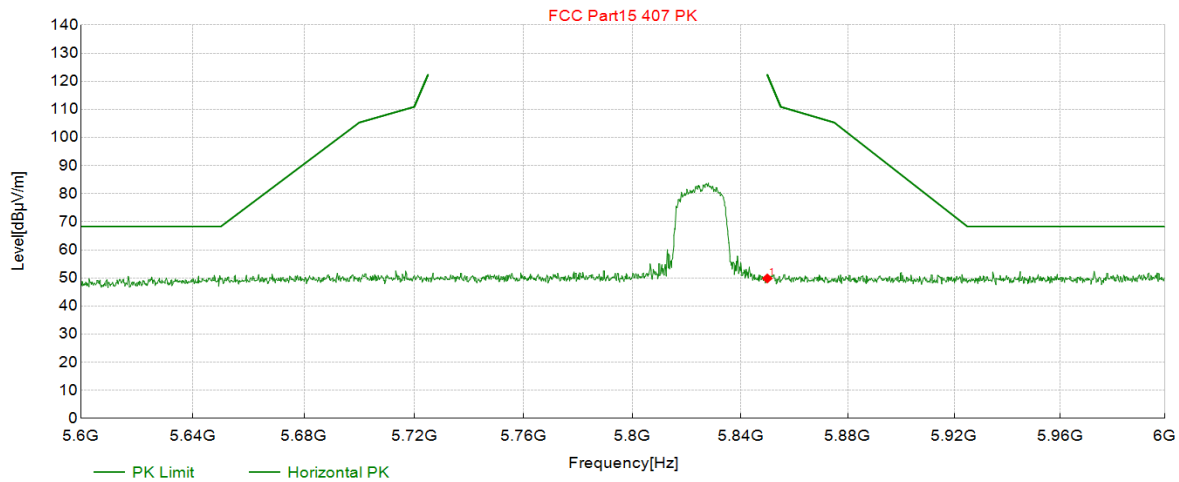

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5850.00	33.73	16.10	49.83	122.30	72.47	PK	Horizont	PASS


Remark:

- Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)
- Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)



Test Mode:	802.11N20 5825MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

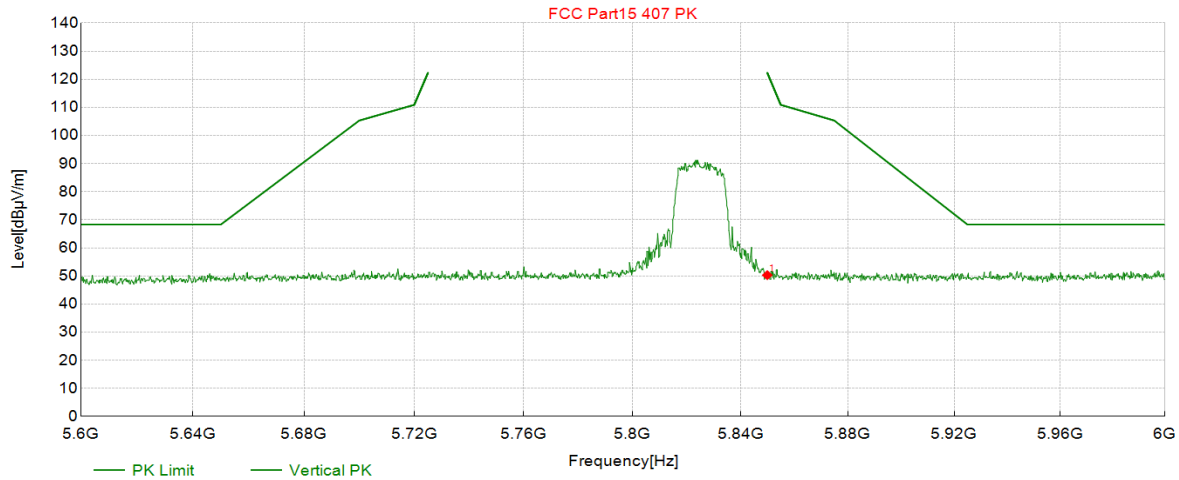

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5850.00	34.20	16.10	50.30	122.30	72.00	PK	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC20 5825MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

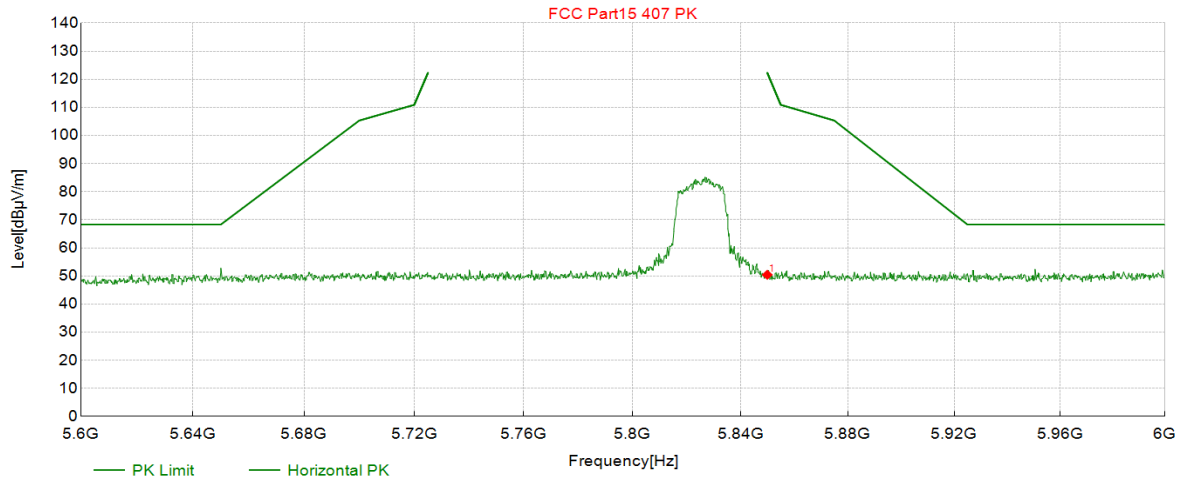

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5850.00	34.32	16.10	50.42	122.30	71.88	PK	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC20 5825MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

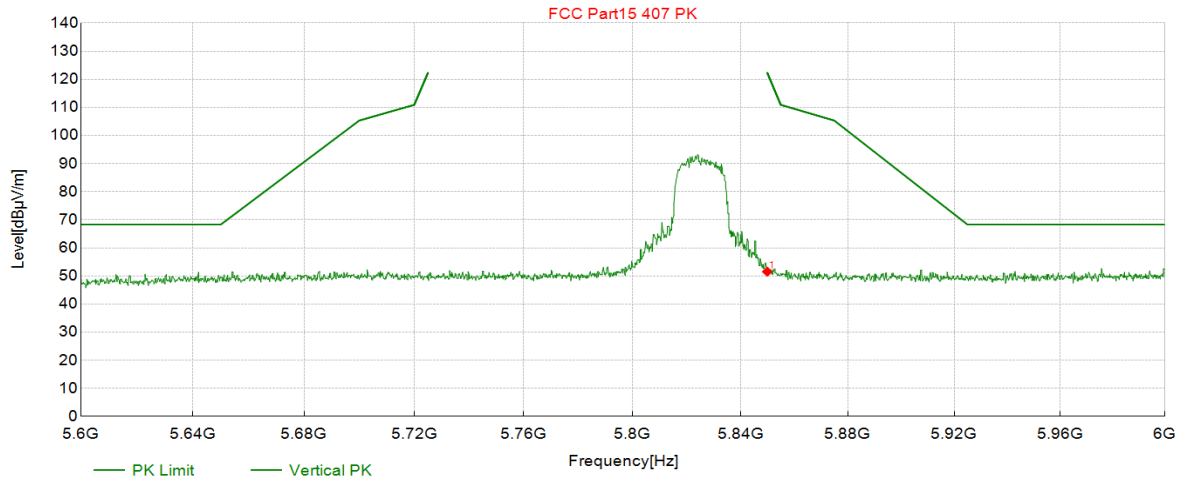

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5850.00	35.43	16.10	51.53	122.30	70.77	PK	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N40 5795MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

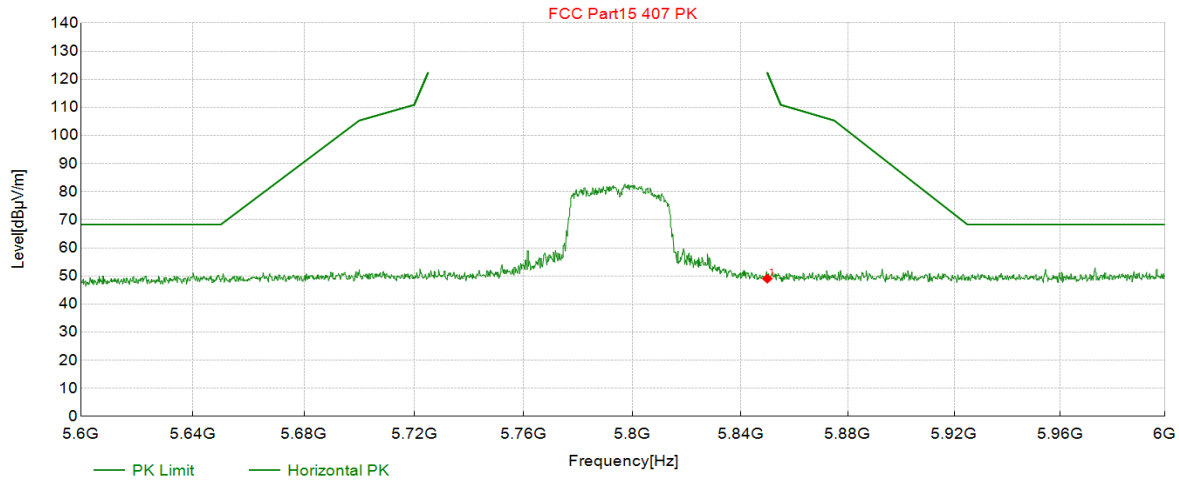

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5850.00	32.95	16.10	49.05	122.30	73.25	PK	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11N40 5795MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

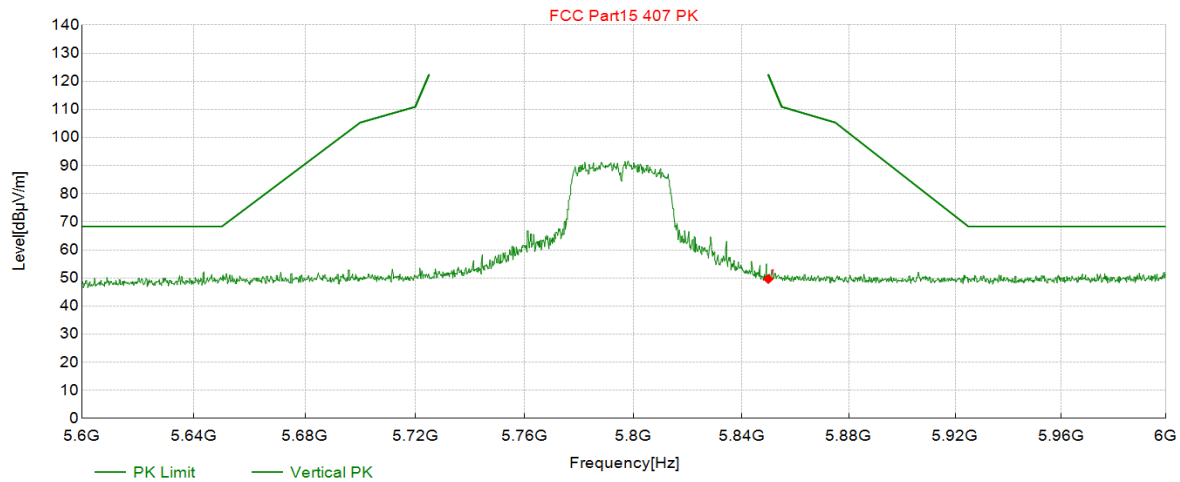

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5850.00	33.53	16.10	49.63	122.30	72.67	PK	Vertical	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40 5795MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

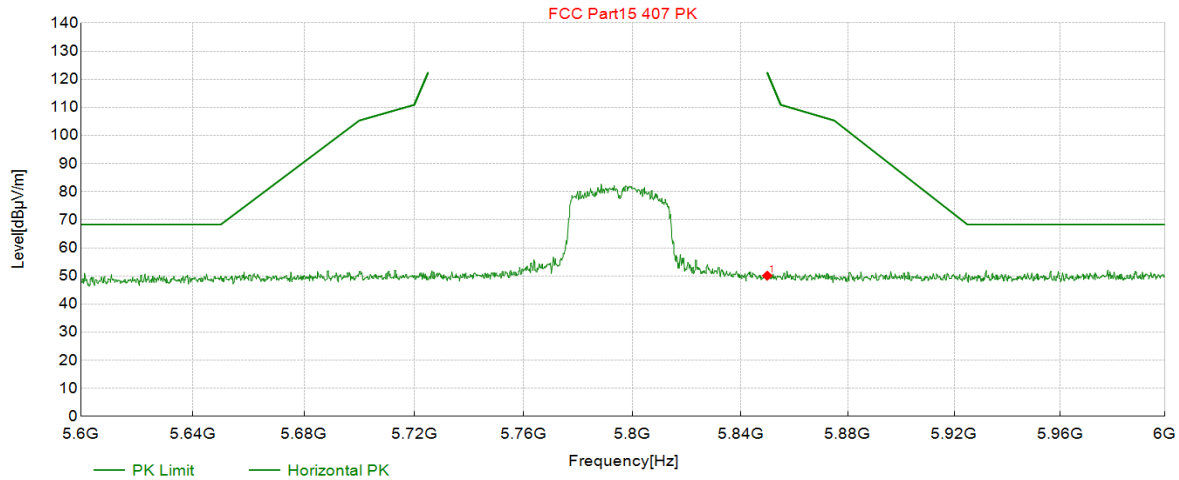

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5850.00	34.01	16.10	50.11	122.30	72.19	PK	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC40 5795MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

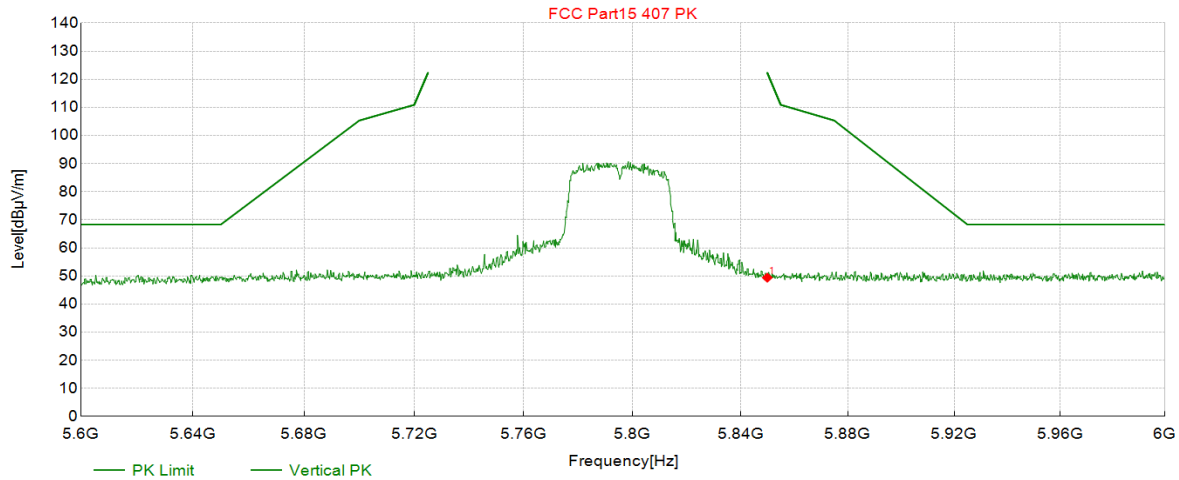

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5850.00	33.30	16.10	49.40	122.30	72.90	PK	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)

