


Test Mode:	802.11AC80 5775MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

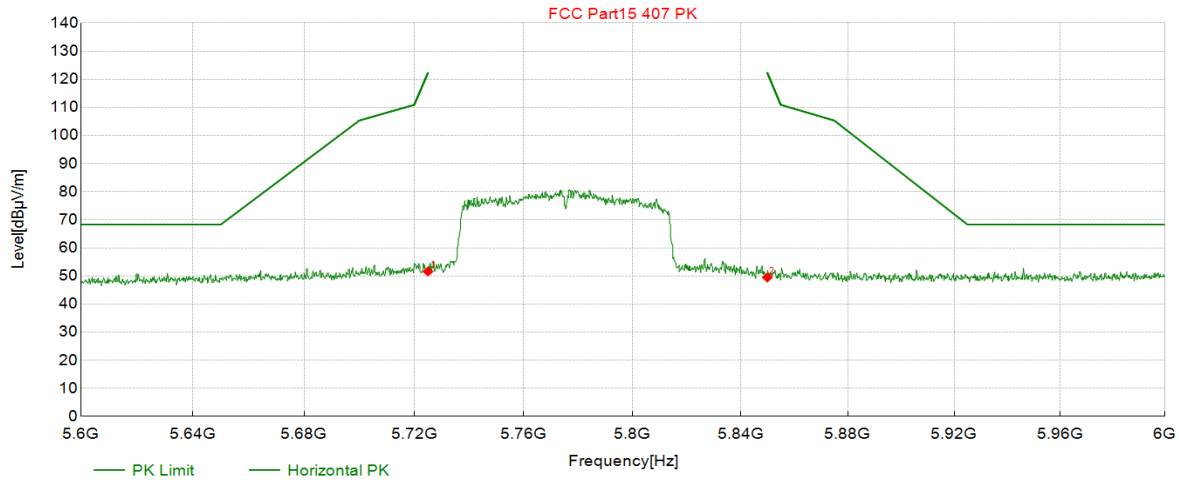

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	35.71	15.88	51.59	122.30	70.71	PK	Horizont	PASS
2	5850.00	33.35	16.10	49.45	122.30	72.85	PK	Horizont	PASS


Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)



Test Mode:	802.11AC80 5775MHz Tx Mode	Test Voltage:	DC 3.85V
Temperature: (°C):	23.8	Humidity (%):	48
Atm. press. (Mpa):	102.0		
Remark:	Only show the worst data.		

Test Graph

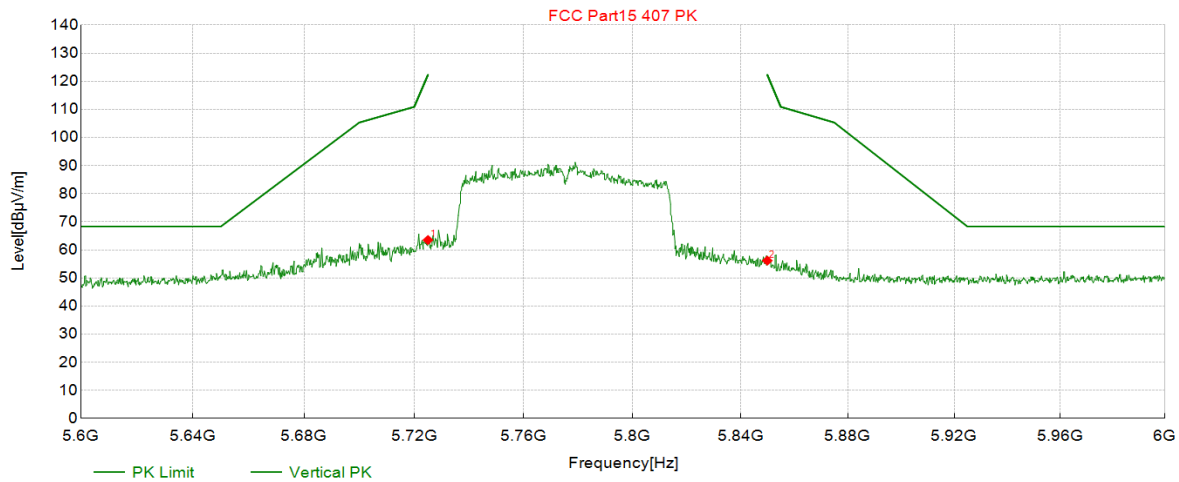

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5725.00	47.63	15.88	63.51	122.30	58.79	PK	Vertical	PASS
2	5850.00	40.07	16.10	56.17	122.30	66.13	PK	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)
2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)

-----END OF THE REPORT-----

