



REPORT No. : SZ17120157E01

TEST REPORT

APPLICANT : MiMOMax Wireless Limited

PRODUCT NAME : 700MHz Upper A Block Pyxis Transceiver

MODEL NAME : MWL-PYXIS-*H A/B/C*

BRAND NAME : MiMOMax Wireless

STANDARD(S) : 47 CFR Part 15 Subpart A and B

TEST DATE : 2017-12-25 to 2018-01-11

ISSUE DATE : 2018-01-15

Tested by:

Wen Zhichao

Wen Zhichao(Test Engineer)

Approved by:

Andy Yeh

Andy Yeh(Technical Director)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
2. Test Results	4
2.1. Applied Reference Documents	4
2.2. EUT Setup and Operating Conditions	5
3. 47 CFR Part 15B Requirements	6
3.1. Radiated Emission	6
3.2. Antenna Terminal Disturbance	16
Annex A Photographs of Test Setup	17
Annex B Test Uncertainty	20
Annex C Testing Laboratory Information	21

Change History		
Issue	Date	Reason for change
1.0	2018-01-09	First edition
1.1	2018-01-11	Addclause 15.111
1.2	2018-01-13	Add test pictures



1. Technical Information

Note: Provide by applicant

1.1. Applicant and Manufacturer Information

Applicant:	MiMOMax Wireless Limited
ApplicantAddress:	540 Wairakei Road, Christchurch, 8053 New Zealand
Manufacturer:	MiMOMax Wireless Limited
ManufacturerAddress:	540 Wairakei Road, Christchurch, 8053 New Zealand

1.2. Equipment Under Test (EUT) Description

EUT Type:	700MHz Upper A Block Pyxis Transceiver
Serial No:	23002476
Hardware Version:	MWL-PYXIS-BHCA-IP010/Digital-IP002/RF-IP006
Software Version:	02.00.52
Tx Frequency:	757 MHz-758MHz;787 MHz -788MHz
Rx Frequency:	757 MHz -758MHz;787 MHz -788MHz
Operating Voltage:	10.5-60Vdc(Isolated)

Note: For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.



2. Test Results

2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart A and B:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are listed as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.101	Equipment authorization requirement	Receiver contained within a FCC Part 27 transceiver that has been certified. The receiver has therefore been verified.		
2	15.103	Exempted devices	Device is not exempt as it is a receiver that contains a digital device		
3	15.107	Conducted Emission	Not applicable		
4	15.109	Radiated Emissions	2018.01.06	Wen Zhichao	PASS
5	15.111	Antenna Terminal Disturbance	2018.01.11	Wen Zhichao	PASS

NOTE: The MiMOMax MWL-PYXIS-*H A/B/C* 700MHz Upper A Block Pyxis complies with FCC Part 15 Subparts A and B as a Class B Unintentional Radiator. Tests were performed according to the method of measurements prescribed in ANSI C63.4-2014.



2.2. EUT Setup and Operating Conditions

Test Item	
Radiated Emission	
Mode 1	: EUT + USB-SerialLine + POE Net Port + PC
Mode 2	: EUT + Ethernet Line + DC Power + PC

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 - 106

Receiver Test Frequencies:

Transmit Frequency (MHz)	Receiver Frequency (MHz)	Channel Bandwidth (KHz)	Modes of operation
757.050	787.950	12.5, 25.0, 50.0	2GFSK, 4GFSK
787.950	757.050	12.5, 25.0, 50.0	2GFSK, 4GFSK

3. 47 CFR Part 15B Requirements

3.1. Radiated Emission

3.1.1. Requirement

According to FCC section 15.109 (a), the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength Limitation at 3m Measurement Distance	
	($\mu\text{V/m}$)	(dB $\mu\text{V/m}$)
30.0 - 88.0	100	20log 100
88.0 - 216.0	150	20log 150
216.0 - 960.0	200	20log 200
Above 960.0	500	20log 500

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dB $\mu\text{V/m}$ is calculated by $20\log \text{Emission Level}(\mu\text{V/m})$.




3.1.2. Frequency range of measurement

According to 15.33(b)(1), the frequency range of radiated measurement for the EUT is listed in the following table:


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705 – 108	1000.
108 – 500	2000.
500 – 1000	5000.
Above 1000	5 th harmonic of the highest frequency or 40GHz, whichever is lower

3.1.3. Test Setup

- 1) For radiated emissions from 30MHz to 1GHz

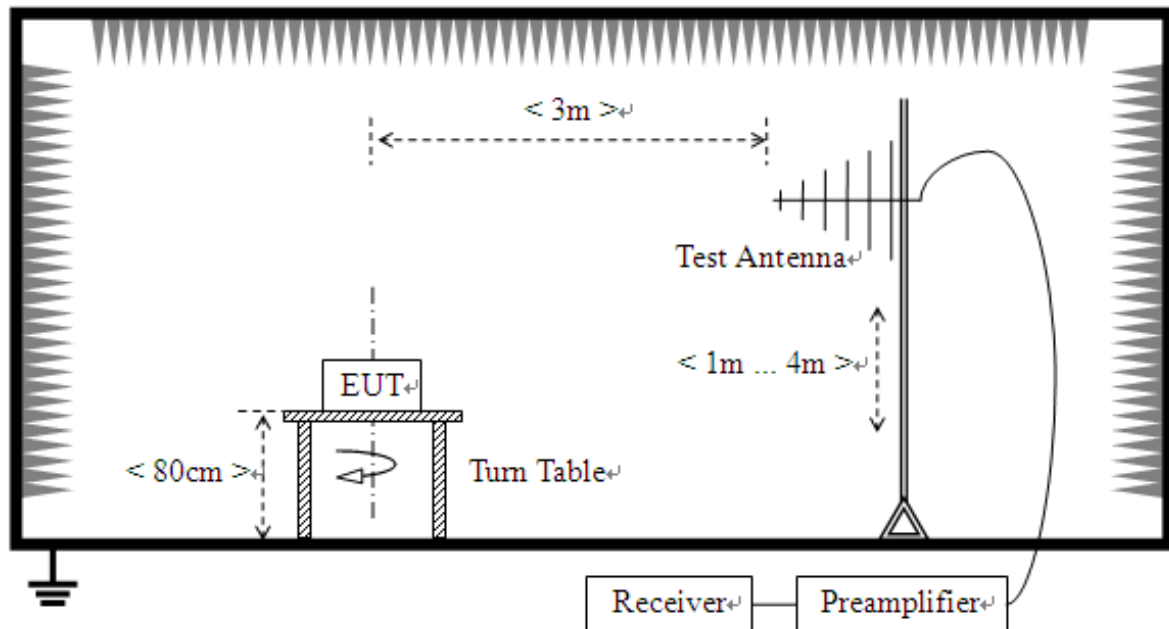

- 2) For radiated emissions above 1GHz

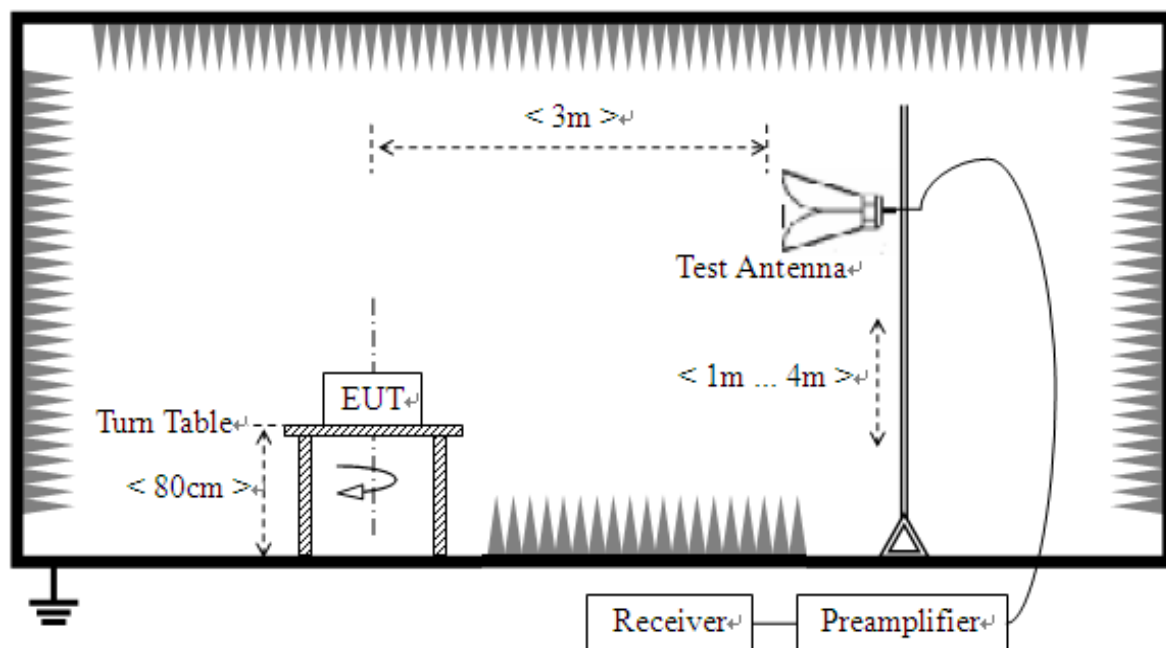



REPORT No. : SZ17120157E01

The test is performed in a 3m Semi-Anechoic Chamber, the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.




3.1.4. Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.


The amplitude of emissions (6GHz-12.5GHz) which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

Mode 1

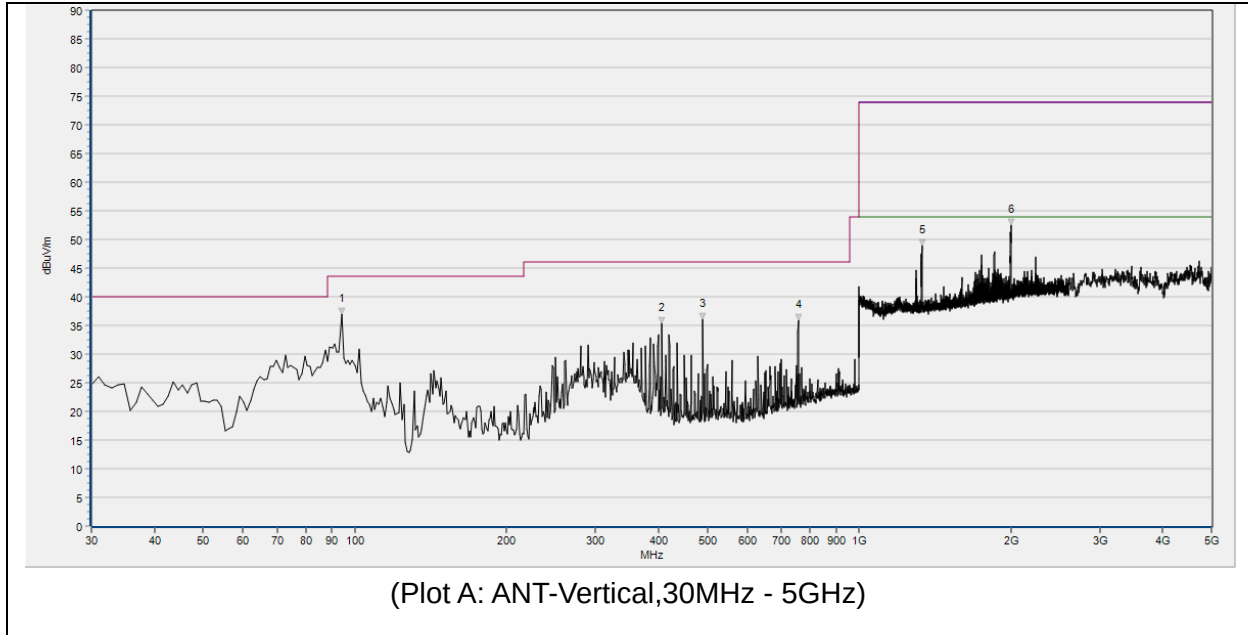


No.	Fre. MHz	Pk dBμV/m	QP dBμV/m	AV dBμV/m	Limit-PK dBμV/m	Limit-QP dBμV/m	Limit-AV dBμV/m	ANT	Verdict
1	94.020	N.A.	36.93	N.A.	N.A.	43.50	N.A.	V	PASS
2	406.360	N.A.	35.43	N.A.	N.A.	46.00	N.A.	V	PASS
3	489.780	N.A.	36.08	N.A.	N.A.	46.00	N.A.	V	PASS
4	757.500	N.A.	35.86	N.A.	N.A.	46.00	N.A.	V	PASS
5	1331.733	48.88	N.A.	41.36	74.00	N.A.	54.00	V	PASS
6	1996.700	51.78	N.A.	44.13	74.00	N.A.	54.00	V	PASS

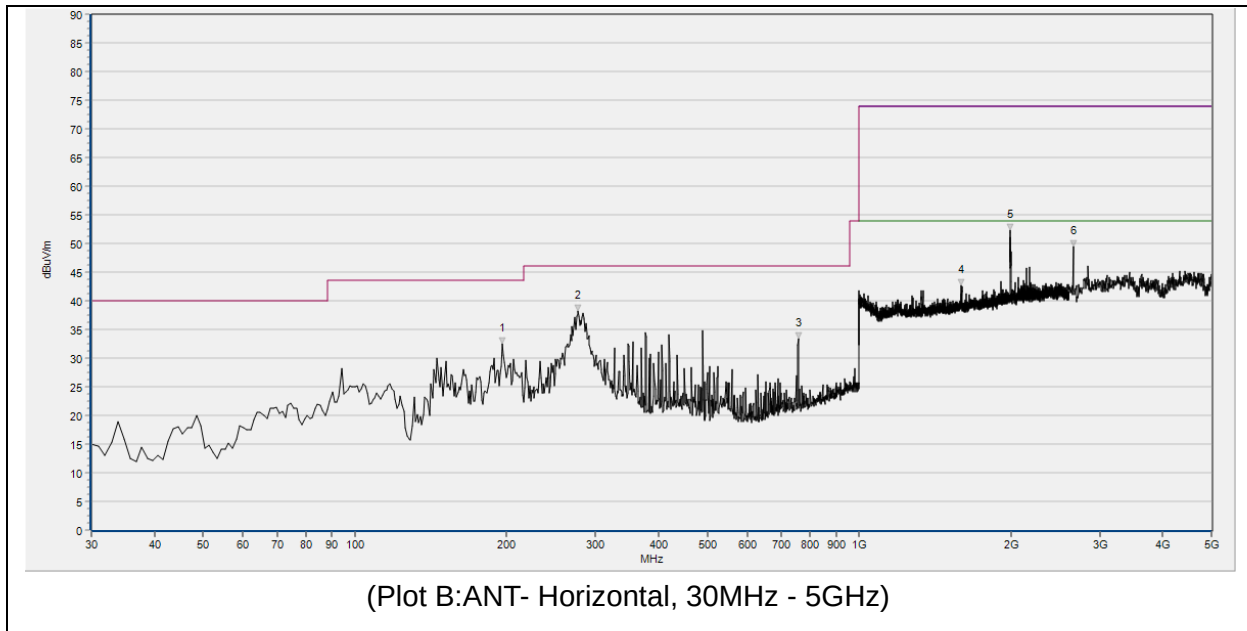


No.	Fre. MHz	Pk dBμV/m	QP dBμV/m	AV dBμV/m	Limit-PK dBμV/m	Limit-QP dBμV/m	Limit-AV dBμV/m	ANT	Verdict
1	195.870	N.A.	32.58	N.A.	N.A.	43.50	N.A.	H	PASS
2	277.350	N.A.	38.18	N.A.	N.A.	46.00	N.A.	H	PASS
3	757.500	N.A.	33.36	N.A.	N.A.	46.00	N.A.	H	PASS
4	1593.067	42.66	N.A.	35.06	74.00	N.A.	54.00	H	PASS
5	1997.600	51.06	N.A.	44.32	74.00	N.A.	54.00	H	PASS
6	2658.240	49.48	N.A.	42.19	74.00	N.A.	54.00	H	PASS



Mode 2

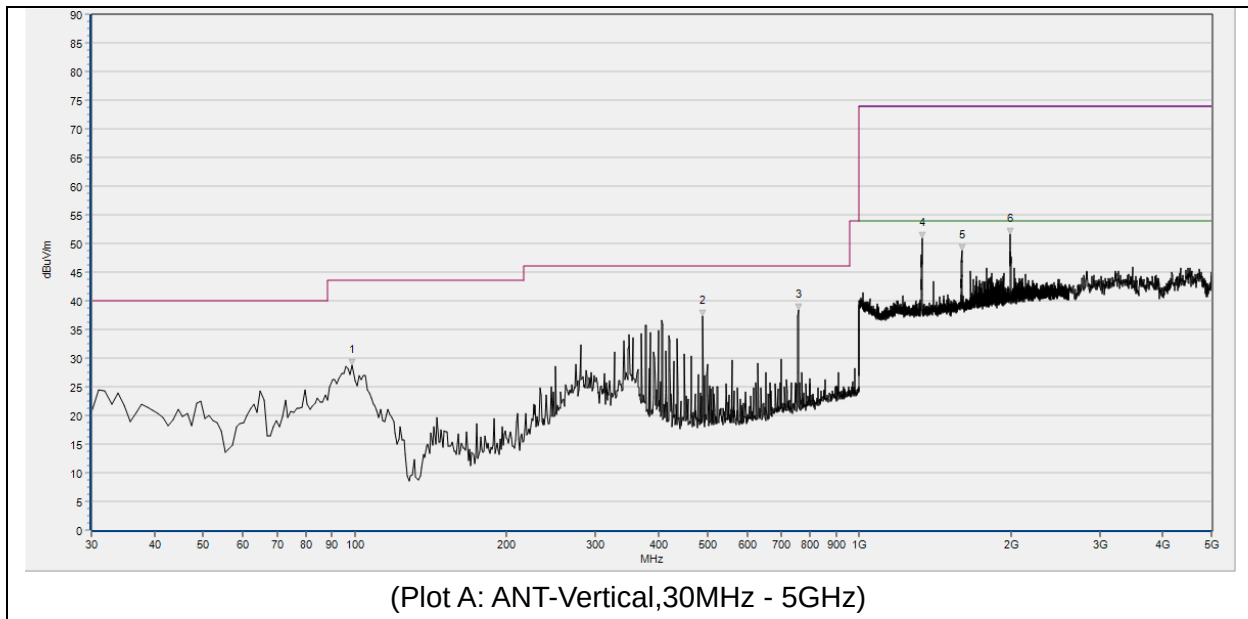

No.	Fre. MHz	Pk dBμV/m	QP dBμV/m	AV dBμV/m	Limit-PK dBμV/m	Limit-QP dBμV/m	Limit-AV dBμV/m	ANT	Verdict
1	98.870	N.A.	28.80	N.A.	N.A.	43.50	N.A.	V	PASS
2	489.780	N.A.	37.36	N.A.	N.A.	46.00	N.A.	V	PASS
3	757.500	N.A.	38.47	N.A.	N.A.	46.00	N.A.	V	PASS
4	1332.800	50.97	N.A.	43.18	74.00	N.A.	54.00	V	PASS
5	1597.333	48.70	N.A.	41.24	74.00	N.A.	54.00	V	PASS
6	1991.900	51.26	N.A.	44.31	74.00	N.A.	54.00	V	PASS

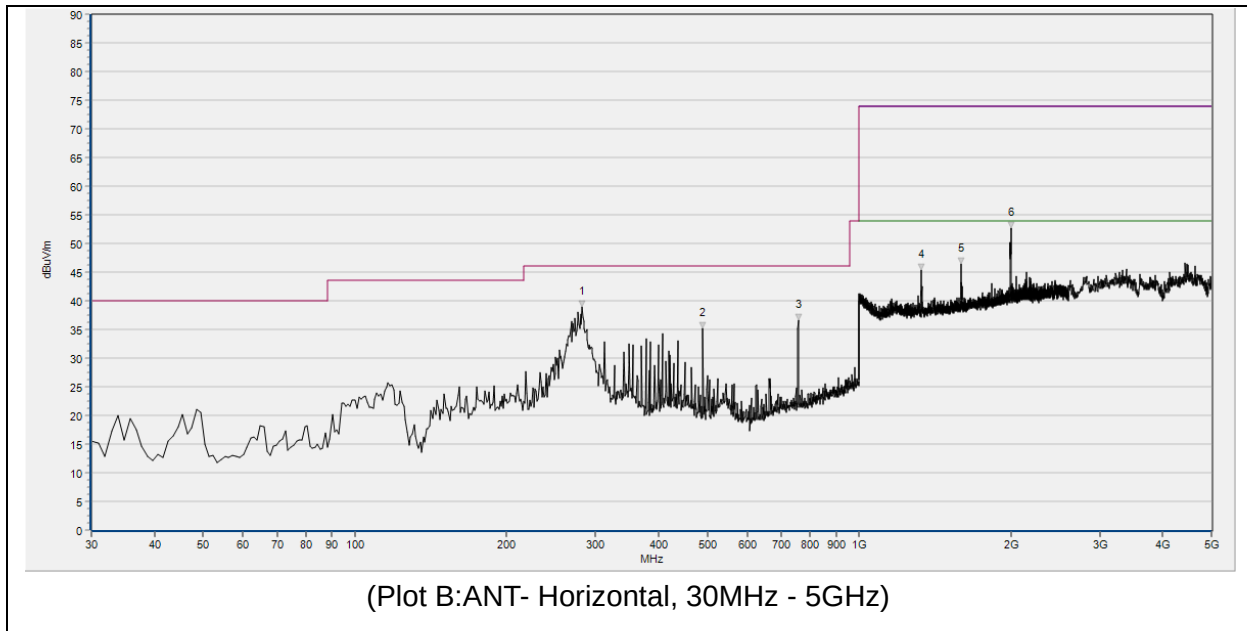

No.	Fre. MHz	Pk dBμV/m	QP dBμV/m	AV dBμV/m	Limit-PK dBμV/m	Limit-QP dBμV/m	Limit-AV dBμV/m	ANT	Verdict
1	282.200	N.A.	38.94	N.A.	N.A.	46.00	N.A.	H	PASS
2	489.780	N.A.	35.13	N.A.	N.A.	46.00	N.A.	H	PASS
3	757.500	N.A.	36.63	N.A.	N.A.	46.00	N.A.	H	PASS
4	1330.133	45.28	N.A.	38.13	74.00	N.A.	54.00	H	PASS
5	1594.133	46.34	N.A.	39.09	74.00	N.A.	54.00	H	PASS
6	1999.200	53.02	N.A.	46.01	74.00	N.A.	54.00	H	PASS

**The test result for CB receiver RSE (25-30MHz) .**

Test mode	Fre. MHz	QP dBμV/m	Limit-QP dBμV/m	ANT	Verdict
Mode 1	25.210	22.45	32.04	V	PASS
	26.341	23.14			PASS
	27.414	21.15			PASS
	28.524	19.85			PASS
	29.510	22.54			PASS
	29.961	21.34			PASS
	25.104	20.18	32.04	H	PASS
	25.945	19.95			PASS
	26.347	20.51			PASS
	27.146	22.05			PASS
	28.541	21.75			PASS
	29.463	23.11			PASS
Mode 2	25.224	21.51	32.04	V	PASS
	26.256	20.88			PASS
	27.425	22.64			PASS
	28.325	20.41			PASS
	29.136	21.81			PASS
	29.867	22.14			PASS
	25.314	21.87	32.04	H	PASS
	25.120	22.01			PASS
	26.267	21.05			PASS
	27.354	23.11			PASS
	28.123	22.42			PASS
	29.775	21.05			PASS



3.2. Antenna Terminal Disturbance

3.2.1. Requirement


In addition to the radiated emission limits, receivers that operate (tune) in the frequency range 30 to 960 MHz and CB receivers that provide terminals for the connection of an external receiving antenna may be tested to demonstrate compliance with the provisions of §15.109 with the antenna terminals shielded and terminated with a resistive termination equal to the impedance specified for the antenna, provided these receivers also comply with the following: With the receiver antenna terminal connected to a resistive termination equal to the impedance specified or employed for the antenna, the power at the antenna terminal at any frequency within the range of measurements specified in §15.33 shall not exceed 2.0 nanowatts(-57dBm).

Measurements were attempted over the range of 30 - 5000 MHz

3.2.2. Test Result


Receive Frequency (MHz)	Emission Power Level(dBm)	Limit(dBm)	Result
757.05	-73.2	-57.0	PASS
787.95	-74.1	-57.0	PASS

attach spectrum pictures for this test here:

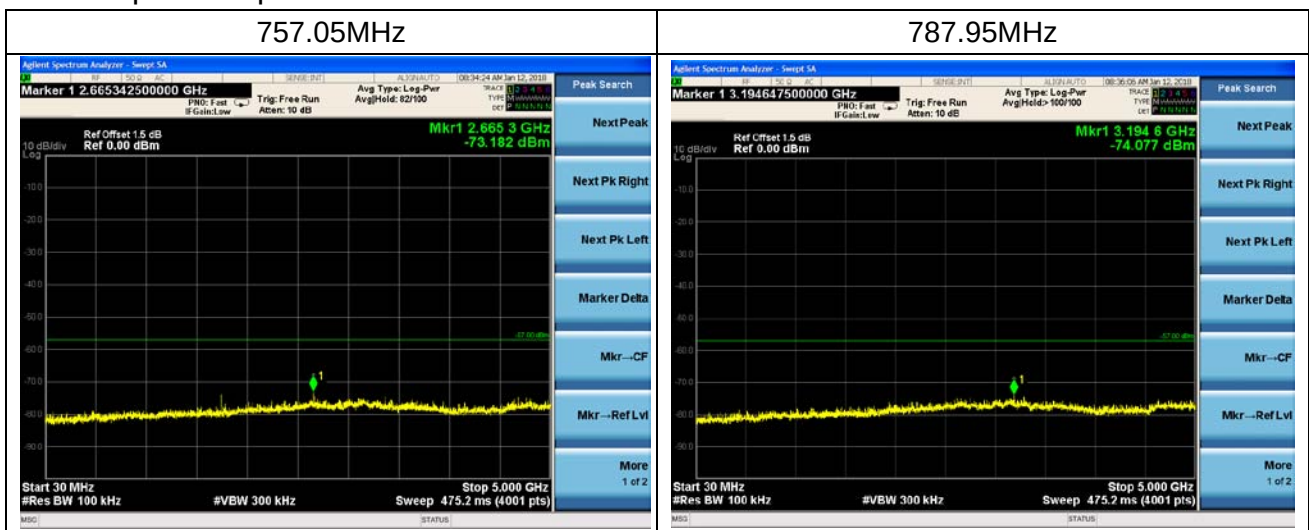

Annex A Photographs of Test Setup

1. Radiated Field Strength Measurement (30MHz – 1GHz)

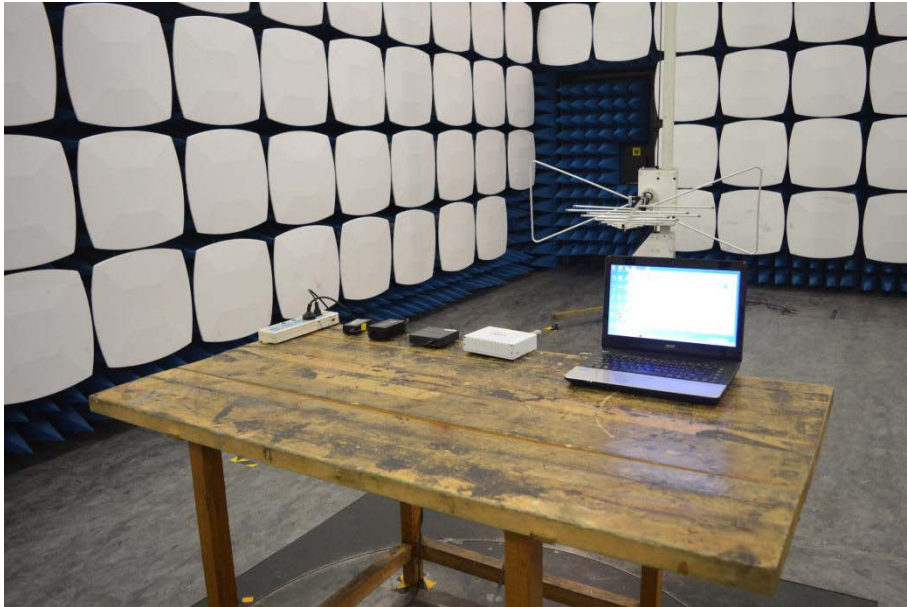

Mode 1



Mode 2

2. Radiated Field Strength Measurement (above 1GHz)



Mode 1



Mode 2

3. Antenna Terminal Disturbance





Annex B Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	30MHz-200MHz	±0.8dB
	200MHz-1000MHz	±1.1dB
	1GHz-6GHz	±1.4dB
	6GHz-18GHz	±1.9dB

Uncertainty of Radiated Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	30MHz-200MHz	±5.06dB
	200MHz-1000MHz	±5.24dB
	1GHz-6GHz	±5.18dB
	6GHz-18GHz	±5.48dB



Annex C Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.	
Department:	Morlab Laboratory	
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China	
Responsible Test Lab Manager:	Mr. Su Feng	
Telephone:	+86 755 36698555	
Facsimile:	+86 755 36698525	

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

3. Accreditation Certificate

Accredited Testing Laboratory:	The FCC designation number is CN1192. (Shenzhen Morlab Communications Technology Co., Ltd.)
---------------------------------------	--

4. Test Software Utilized

Model	Version Number	Producer
MORLAB EMCR V1.2	Version 1.0	MORLAB
TS+ -[JS32-CE]	Version2.5.0.0	Tonscend

**5. Test Equipments Utilized**

Description	Manufacturer	Model	Serial No.	Cal. Date	Due. Date
MXE EMI Receiver	Agilent	N9038A	MY54130016	2017.05.17	2018.05.16
Receiver	KEYSIGHT	N9038A	MY56400093	2017.07.13	2018.07.12
LISN	Schwarzbeck	NSLK 8127	812744	2017.05.17	2018.05.16
Pulse Limiter (20dB)	VTSD	9561D	9537	2017.05.17	2018.05.16
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-519	2017.05.14	2018.05.13
Test Antenna - Horn	Schwarzbeck	BBHA 9120D	1774	2017.09.13	2018.09.12
Semi-Anechoic Chamber	CRT	9m*6m*6m	N/A	2017.11.19	2020.11.18
PC	Lenovo	ThinkPad T430i	0B68192JS	N/A	N/A

_____ END OF REPORT _____