REPORT No. : SZ21010246W01

TEST REPORT

APPLICANT	:	MiMOMax Wireless Limited
PRODUCT NAME	:	700MHz Upper A Block Tornado Transceiver
MODEL NAME	:	MWL-TORNADO-*H A/B/C *
BRAND NAME	:	MiMOMax Wireless
FCC ID	:	XMK-MMXTRNB006
STANDARD(S)	:	47 CFR Part 2 47 CFR Part 27
RECEIPT DATE	:	2021-02-23
TEST DATE	:	2021-03-02 to 2021-03-15
ISSUE DATE	:	2021-05-06

Tested by: Ling Keye(Rapporteur)

Approved by: Peng Huarui(Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen ,GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn

DIRECTORY

1. Technical Information ····· 4
1.1. Applicant and Manufacturer Information ····· 4
1.2. Equipment Under Test (EUT) Description ····· 4
1.3. Test Standards and Results ····· 5
1.4. Environmental Conditions ····· 6
2. 47 CFR Part 2 and Part 27 Requirements ····· 7
2.1. Radio Frequency Power Output and E.R.P. ····· 7
2.2. Occupied Bandwidth ····· 11
2.3. Spurious Emissions At Antenna Terminals ····· 22
2.4. Radiated Spurious Emissions ····· 63
2.5. Frequency Stability ····· 69
Annex A Test Uncertainty ····· 73
Annex B Testing Laboratory Information ····· 74

Change History		
Issue	**Date**	**Reason for change**
1.0	2021-05-06	First edition

1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	MiMOMax Wireless Limited
Applicant Address:	540 Wairakei Road, Christchurch, 8053 New Zealand
Manufacturer:	MiMOMax Wireless Limited
Manufacturer Address:	540 Wairakei Road, Christchurch, 8053 New Zealand

1.2. Equipment Under Test (EUT) Description

Product Name:	700MHz Upper A Block Tornado Transceiver
Hardware Version:	P001
Software Version:	TRN-04.06.02
Operating Frequency Range:	757-758 MHz & 787-788 MHz, 2Tx/2Rx
Channel Bandwidth:	12.5kHz; 25kHz; 50kHz
Modulation Type:	QPSK; 16QAM; 64QAM; 256QAM
Operating Voltage:	10.5-60Vdc
Antenna Type:	Omni Antenna
Antenna Gain:	4.0 dBi
Emission Designator:	12.5kHz:10K3W1W 25.0kHz:21K1W1W 50.0kHz:42K0W1W

1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2 and Part 27 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 27	Miscellaneous Wireless Communications Services

Test detailed items/section required by FCC rules and results are listed as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	27.50 2.1046	Power and antenna height limits Radio frequency power output	Mar 3, 2021	Ling Keye	Complies
2	2.1049	Occupied bandwidth	Mar 5, 2021	Ling Keye	PASS
3	2.1051 27.53 27.53(c) 27.53(c)(1) 27.53(c)(2) 27.53(c)(3) 27.53(c)(5) 27.53(c)(6)	Conducted spurious emissions at antenna terminals with DUT Operations in the 746 - 758 MHz band 776 - 788 MHz band emissions in763 - 775 MHz and 793 - 805MHz band	Mar5, 2021	Ling Keye	PASS
4	2.1053 27.53 27.53(c) 27.53(c)(1) 27.53(c)(2) 27.53(c)(3) 27.53(c)(5) 27.53(c)(6)	Field strength of radiated spurious emissions with DUT Operations in the 746 - 758 MHz band 776 - 788 MHz band Emissions in 763 - 775 MHz and 793 - 805MHz band	Mar 4, 2021	Gao Jianrou	PASS
5	27.53(f)	Additional emission requirement in 1559 - 1610 MHz band	Mar 15, 2021	Gao Jianrou	PASS

6	27.54 2.1055	Frequency stability	Mar 7, 2021	Ling Keye	PASS

Note 1: The TORNADO TRANSCEIVER complies with FCC 47 CFR Part 2 and Part 27 when tested in accordance with the test methods described in 47 CFR Part 2 and Part 27.
Note 2: The TORNADO TRANSCEIVER supports 2 Tx antenna ports, which was defined as Channel H & Channel V separately.
Note 3: The path loss during the conducted RF test is calibrated to correct the results by the Ext Gain setting. The Ext Gain contains two parts that cable loss 0.8dB and Attenuator 29.0dB.

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 -106

2. 47 CFR Part 2 and Part 27 Requirements

2.1. Radio Frequency Power Output and E.R.P.

2.1.1. Test result

Nominal Frequency: 757.050 MHz Tx Port: Channel H

Channel Bandwidth (kHz)	Modulation Type	Voltage (Vdc)	Measured Power (dBm)	Rated Power (Watt)	E.R.P.	
					dBm	Watt
12.5	QPSK	24	24.04	0.25	25.89	0.388
12.5	16QAM	24	24.02	0.25	25.87	0.386
12.5	64QAM	24	24.08	0.25	25.93	0.392
12.5	256QAM	24	24.09	0.25	25.94	0.393
25.0	QPSK	24	24.04	0.25	25.89	0.388
25.0	16QAM	24	24.05	0.25	25.90	0.389
25.0	64QAM	24	24.07	0.25	25.92	0.391
25.0	256QAM	24	24.09	0.25	25.94	0.393
50.0	QPSK	24	23.99	0.25	25.84	0.384
50.0	16QAM	24	24.01	0.25	25.86	0.385
50.0	64QAM	24	24.08	0.25	25.93	0.392
50.0	256QAM	24	24.08	0.25	25.93	0.392

Nominal Frequency: 757.050 MHz Tx Port: Channel V

Channel Bandwidth (kHz)	Modulation Type	Voltage (Vdc)	Measured Power (dBm)	Rated Power (Watt)	E.R.P.	
					dBm	Watt
12.5	QPSK	24	23.97	0.25	25.82	0.382
12.5	16QAM	24	23.94	0.25	25.79	0.379
12.5	64QAM	24	24.01	0.25	25.86	0.385
12.5	256QAM	24	24.08	0.25	25.93	0.392
25.0	QPSK	24	23.96	0.25	25.81	0.381

25.0	16QAM	24	24.01	0.25	25.86	0.385
25.0	64QAM	24	24.08	0.25	25.93	0.392
25.0	256QAM	24	24.07	0.25	25.92	0.391
50.0	QPSK	24	24.00	0.25	25.85	0.385
50.0	16QAM	24	23.95	0.25	25.80	0.380
50.0	64QAM	24	23.98	0.25	25.83	0.383
50.0	256QAM	24	24.04	0.25	25.89	0.388

Nominal Frequency: 787.950 MHz Tx Port: Channel H

Channel Bandwidth (kHz)	Modulation Type	Voltage (Vdc)	Measured Power (dBm)	Rated Power (Watt)	E.R.P.	
					dBm	Watt
12.5	QPSK	24	23.96	0.25	25.81	0.381
12.5	16QAM	24	23.93	0.25	25.78	0.378
12.5	64QAM	24	24.02	0.25	25.87	0.386
12.5	256QAM	24	24.03	0.25	25.88	0.387
25.0	QPSK	24	23.97	0.25	25.82	0.382
25.0	16QAM	24	23.93	0.25	25.78	0.378
25.0	64QAM	24	23.97	0.25	25.82	0.382
25.0	256QAM	24	24.04	0.25	25.89	0.388
50.0	QPSK	24	24.06	0.25	25.91	0.390
50.0	16QAM	24	24.01	0.25	25.86	0.385
50.0	64QAM	24	24.05	0.25	25.90	0.389
50.0	256QAM	24	24.08	0.25	25.93	0.392

Nominal Frequency: 787.950 MHz Tx Port: Channel V

Channel Bandwidth (kHz)	Modulation Type	Voltage (Vdc)	Measured Power (dBm)	Rated Power (Watt)	E.R.P.	
					dBm	Watt
12.5	QPSK	24	23.94	0.25	25.79	0.379
12.5	16QAM	24	23.95	0.25	25.80	0.380
12.5	64QAM	24	23.93	0.25	25.78	0.378

12.5	256QAM	24	24.02	0.25	25.87	0.386
25.0	QPSK	24	24.01	0.25	25.86	0.385
25.0	16QAM	24	23.91	0.25	25.76	0.377
25.0	64QAM	24	23.98	0.25	25.83	0.383
25.0	256QAM	24	23.94	0.25	25.79	0.379
50.0	QPSK	24	23.97	0.25	25.82	0.382
50.0	16QAM	24	23.96	0.25	25.81	0.381
50.0	64QAM	24	23.98	0.25	25.83	0.383
50.0	256QAM	24	24.05	0.25	25.90	0.389

MIMO Transmit Output Power and E.R.P.

Channel Bandwidth (kHz)	Modulation Type	757.050 MHz		787.950 MHz	
		MIMO Power(dBm)	MIMO E.R.P. (Watt)	MIMO Power(dBm)	MIMO E.R.P. (Watt)
12.5	QPSK	27.02	0.771	26.96	0.760
12.5	16QAM	26.99	0.766	26.95	0.759
12.5	64QAM	27.06	0.778	26.99	0.766
12.5	256QAM	27.10	0.785	27.04	0.774
25.0	QPSK	27.01	0.769	27.00	0.767
25.0	16QAM	27.04	0.774	26.93	0.755
25.0	64QAM	27.09	0.783	26.99	0.766
25.0	256QAM	27.09	0.783	27.00	0.767
50.0	QPSK	27.01	0.769	27.03	0.773
50.0	16QAM	26.99	0.766	27.00	0.767
50.0	64QAM	27.04	0.774	27.03	0.773
50.0	256QAM	27.07	0.780	27.08	0.782

Note 1: Measurements were carried out at the RF output terminals of the transmitter using spectrum analyzer. The path loss during the conducted RF test is calibrated to correct the results by the Ext Gain setting. The Ext Gain contains two parts that cable loss 0.8dB and Attenuator 29.0dB.

Note 2: The transmitter has a rated output power of 0.25 watt(24dBm). The measured power has been shown to be within +/- 1 dB of the rated power.

Note 3: E.I.R.P. (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi); E.R.P. (dBm) = E.I.R.P. (dBm) - 2.15.

Note 4: Part 27 does not specify the transmitter output power.
Subpart C Section 27.50 (b)(1) states that fixed and base station transmitters in the 757-758 MHz band must not exceed 1000 watts ERP.
Subpart C Section 27.50 (b)(9) states that for control stations and mobile stations transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands and fixed stations transmitting in the 787-788 MHz and 805-806 MHz bands are limited to 30 watts ERP.
Note 5: The product's antenna is a special MIMO antenna with cross-polarization which is able to transmit and receive on both the vertical and horizontal polarizations at the same time, the MIMO antennas are essentially two antennas in one.
Note 6: According to KDB 662911, the MIMO directional gain is the gain of an individual antenna.
Note 7: According to KDB 662911, the measured MIMO power or MIMO E.R.P. is equal to the sum of the individual conducted output power or E.R.P., which also shall complies with the regulations.
Note 8: The product based on the interactive calculation of E.R.P limit value and conducted power, allows the use of an antenna with a maximum gain of 35.07dBi for 757-758MHz and 19.82dBi for 787-788MHz respectively, or an antenna of higher gain with the transmitter power tuned down so can meet the E.R.P requirement.

2.2. Occupied Bandwidth

2.2.1. Definition

The client has declared the following occupied bandwidths for each channel bandwidth:

Frequency(MHz)	Channel Bandwidth(kHz)	Occupied Bandwidth(kHz)
757.050	12.5, 25.0, 50.0	10.3, 21.1, 42.0
787.950	12.5, 25.0, 50.0	10.3, 21.1, 42.0

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.
Occupied bandwidth is also known as the 99% emission bandwidth.

2.2.2. Test Description

Measurements have been made to verify these declared bandwidths using the generic frequencies that are listed in the table above.
The occupied bandwidth has been measured and compared against the occupied bandwidth declared by the client.
Measurements have been made of each modulation type using a spectrum analyzer operating in occupied bandwidth mode.

2.2.3. Test Result

Nominal Frequency: 757.050 MHz

Tx Port	Channel Bandwidth(kHz)	Emission Type	Occupied Bandwidth(kHz)
Channel H	12.5	QPSK	10.294
		16QAM	10.299
		64QAM	10.292
		256QAM	10.293
	25.0	QPSK	20.680
		16QAM	20.700
		64QAM	20.892
		256QAM	20.807
	50.0	QPSK	41.153
		16QAM	41.435
		64QAM	41.126
		256QAM	41.327
Channel V	12.5	QPSK	10.297
		16QAM	10.293
		64QAM	10.288
		256QAM	10.278
	25.0	QPSK	20.608
		16QAM	20.624
		64QAM	20.765
		256QAM	20.630
	50.0	QPSK	41.331
		16QAM	41.344
		64QAM	41.194
		256QAM	41.192

757.050MHz/Channel H/12.5kHz/QPSK

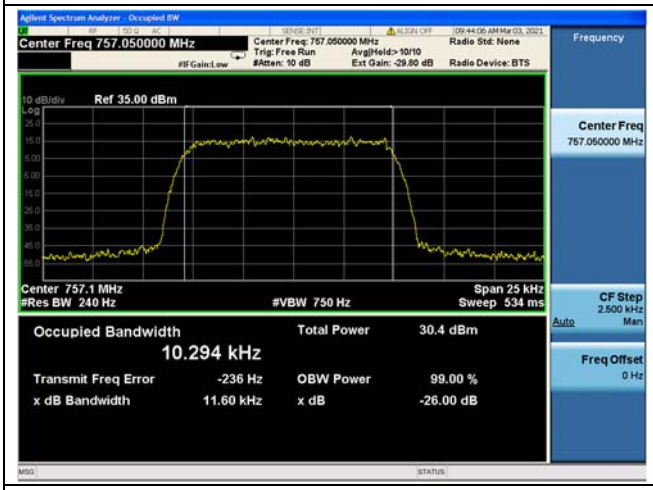

757.050MHz/Channel H/12.5kHz/16QAM

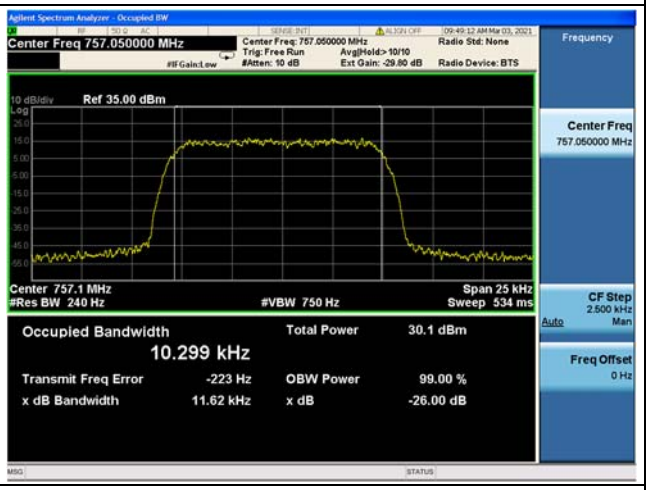

757.050MHz/Channel H/12.5kHz/64QAM

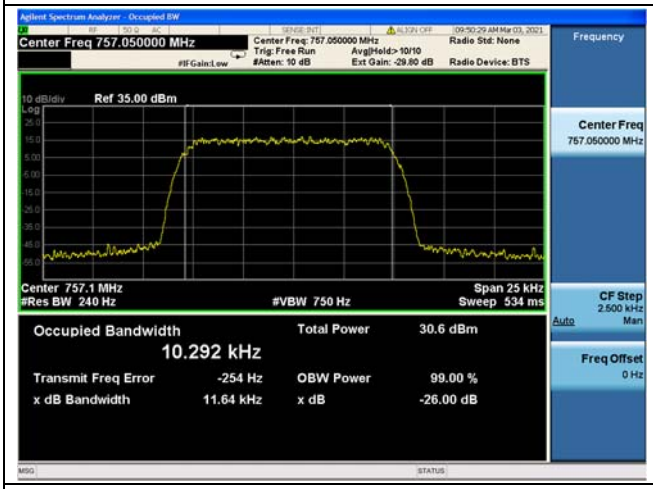

757.050MHz/Channel H/12.5 kHz/256QAM

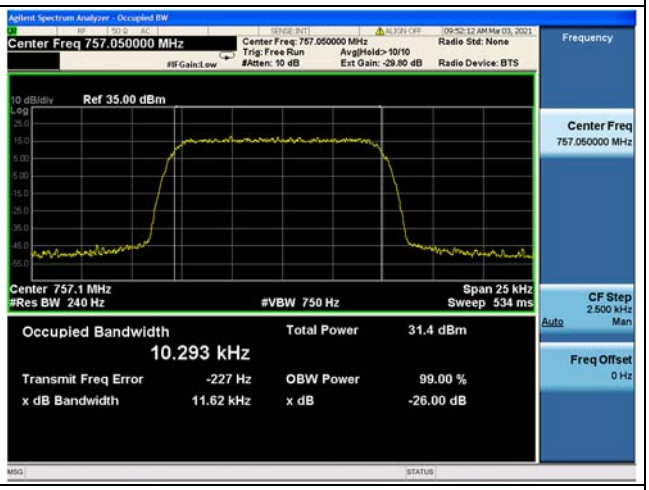

757.050MHz/Channel H/25.0 kHz/QPSK

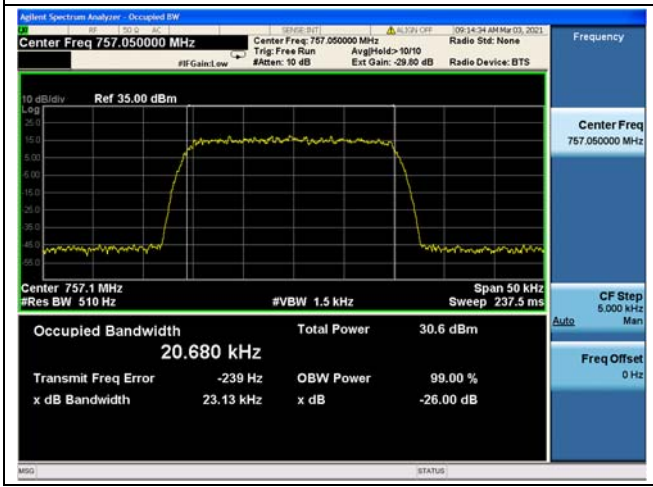

757.050MHz/Channel H/25.0 kHz/16QAM

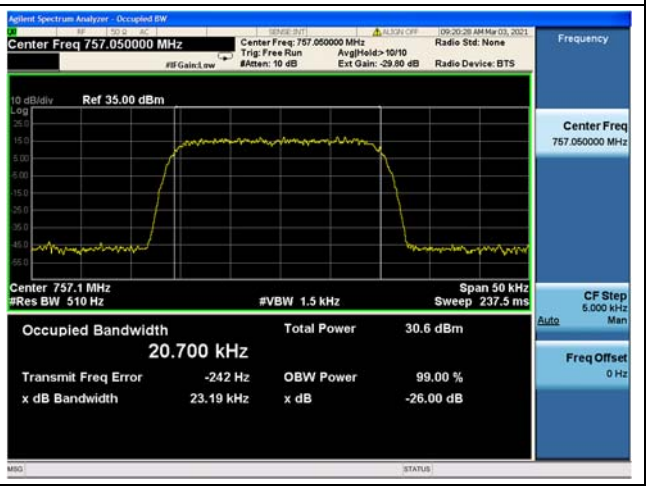

757.050MHz/Channel H/25.0 kHz/64QAM

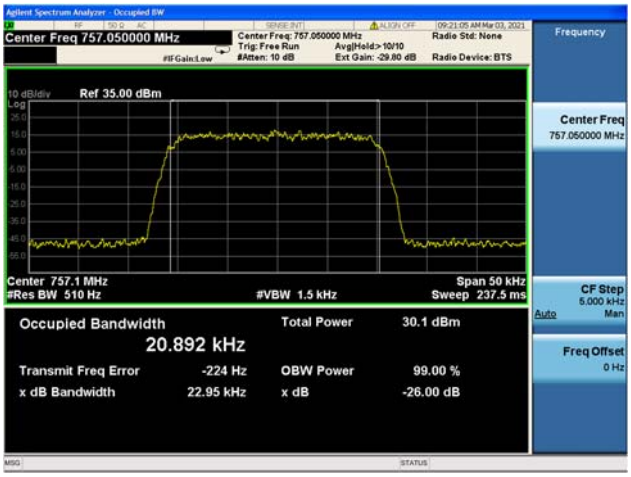

757.050MHz/Channel H/25.0 kHz/256QAM

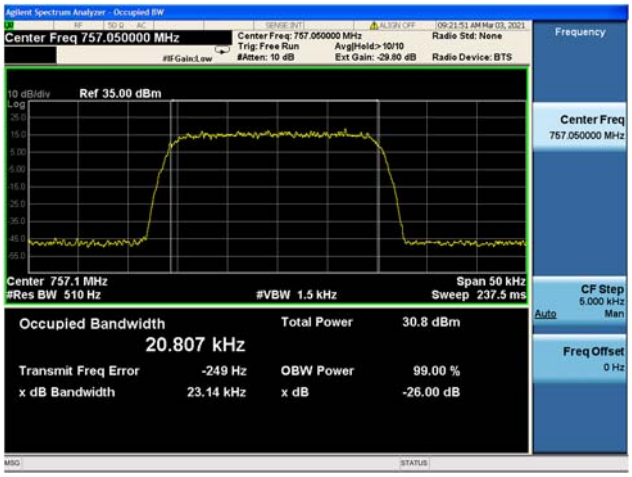

757.050MHz/Channel H/50.0 kHz/QPSK

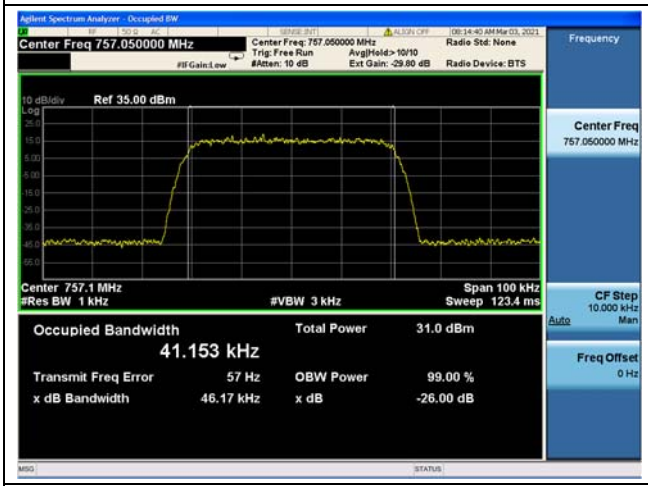

757.050MHz/Channel H/50.0 kHz/16QAM

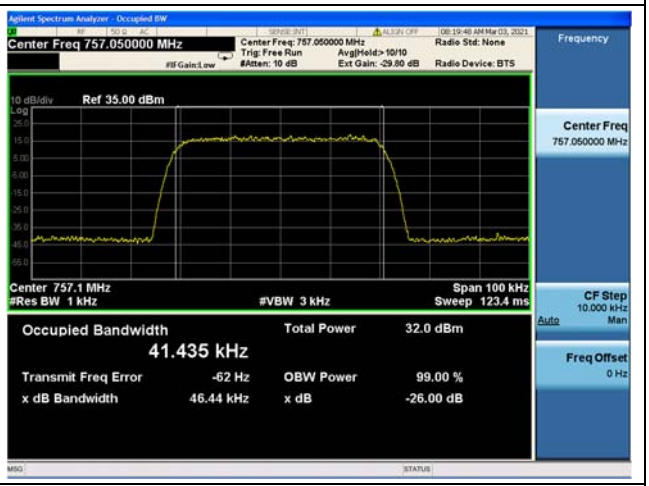

757.050MHz/Channel H/50.0 kHz/64QAM

757.050MHz/Channel H/50.0 kHz/256QAM

757.050MHz/Channel V/12.5kHz/QPSK

757.050MHz/Channel V/12.5kHz/16QAM

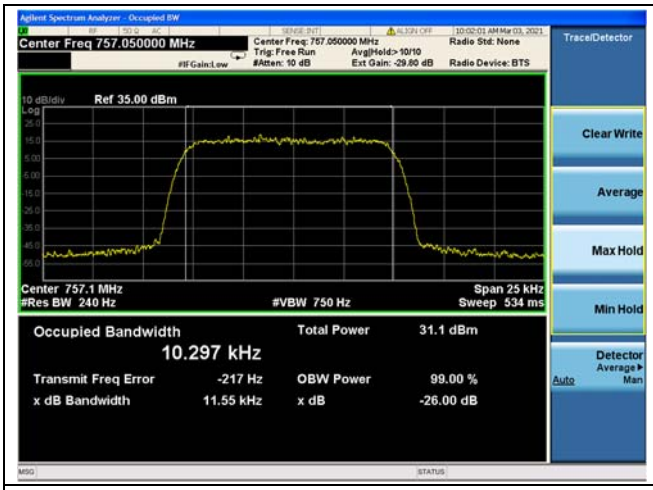

757.050MHz/Channel V/12.5kHz/64QAM

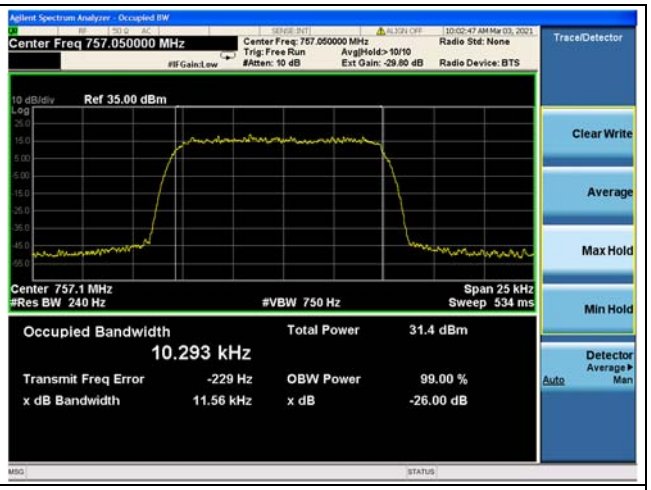

757.050MHz/Channel V/12.5 kHz/256QAM

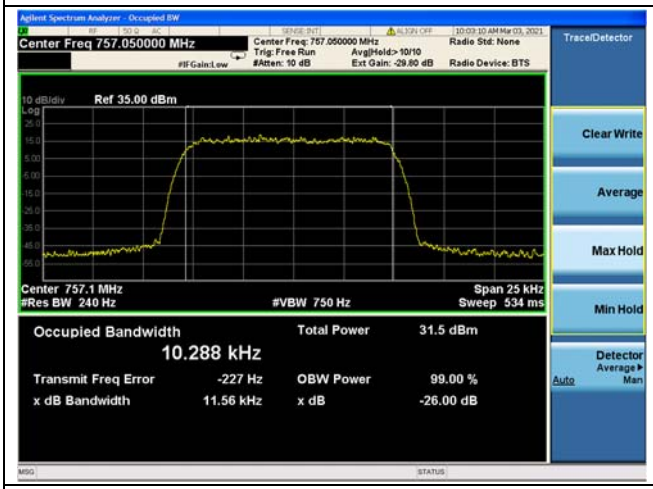

757.050MHz/Channel V/25.0 kHz/QPSK

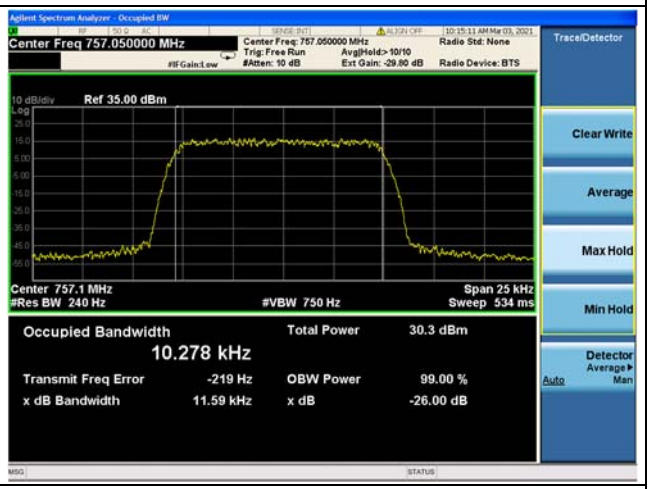

757.050MHz/Channel V/25.0 kHz/16QAM

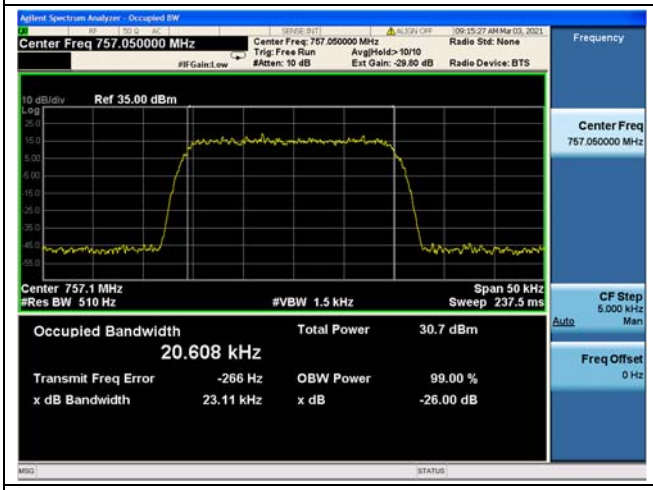

757.050MHz/Channel V/25.0 kHz/64QAM

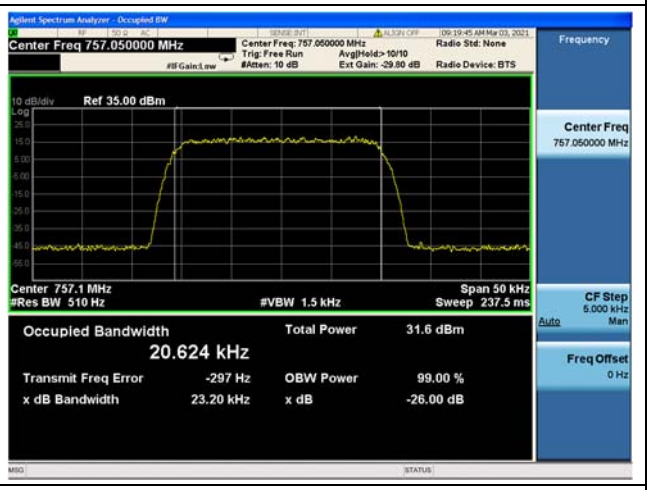

757.050MHz/Channel V/25.0 kHz/256QAM

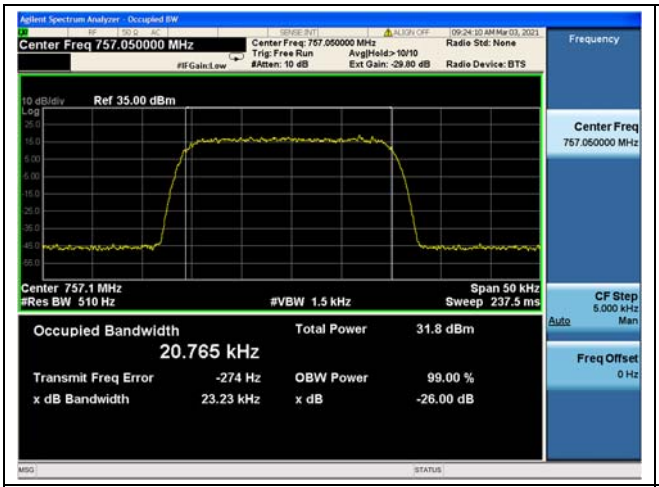

757.050MHz/Channel V/50.0 kHz/QPSK

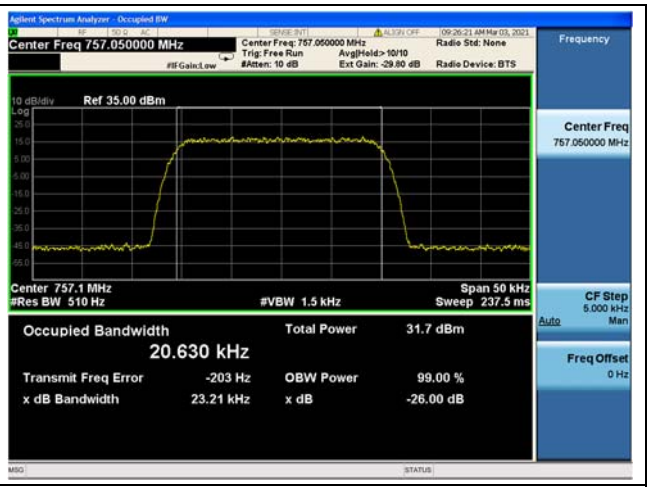

757.050MHz/Channel V/50.0 kHz/16QAM

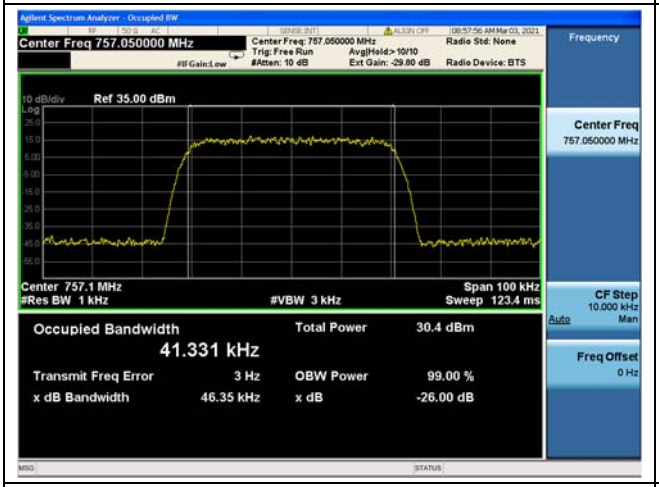

757.050MHz/Channel V/50.0 kHz/64QAM

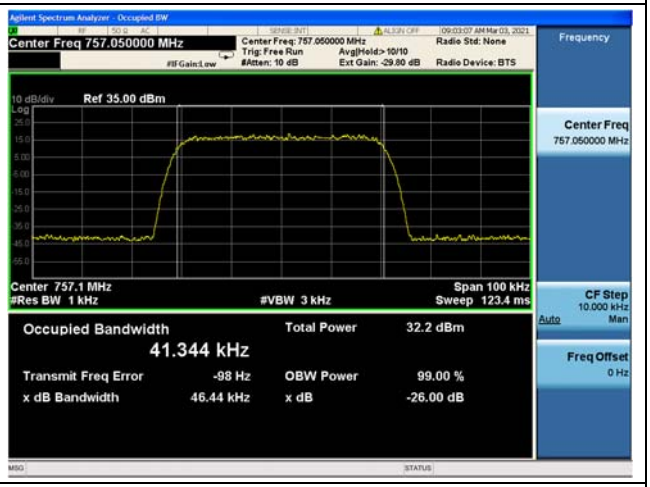

757.050MHz/Channel V/50.0 kHz/256QAM

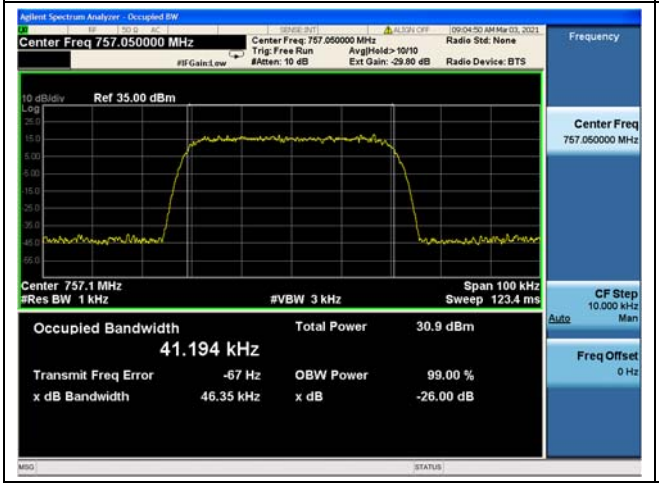

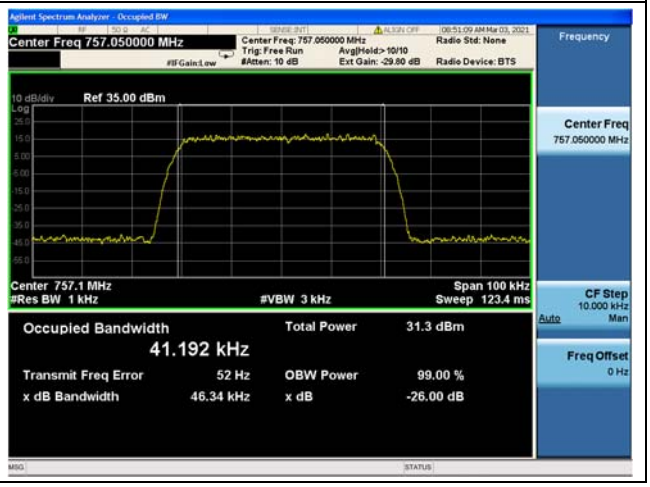

Nominal Frequency: 787.950 MHz

Tx Port	Channel Bandwidth(kHz)	Emission Type	Occupied Bandwidth(kHz)
Channel H	12.5	QPSK	10.288
		16QAM	10.285
		64QAM	10.294
		256QAM	10.299
	25.0	QPSK	20.763
		16QAM	20.519
		64QAM	20.669
		256QAM	20.733
	50.0	QPSK	41.208
		16QAM	41.427
		64QAM	41.173
		256QAM	41.312
Channel V	12.5	QPSK	10.308
		16QAM	10.306
		64QAM	10.292
		256QAM	10.300
	25.0	QPSK	20.672
		16QAM	20.559
		64QAM	20.631
		256QAM	20.686
	50.0	QPSK	41.255
		16QAM	41.598
		64QAM	41.143
		256QAM	41.268

787.950MHz/Channel H/12.5kHz/QPSK

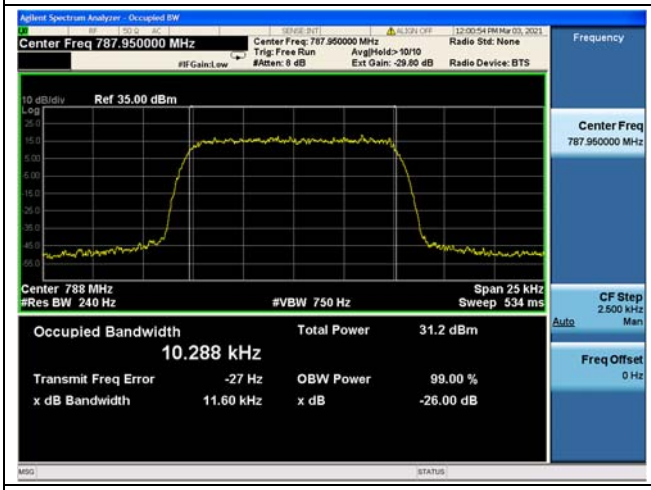

787.950MHz/Channel H/12.5kHz/16QAM

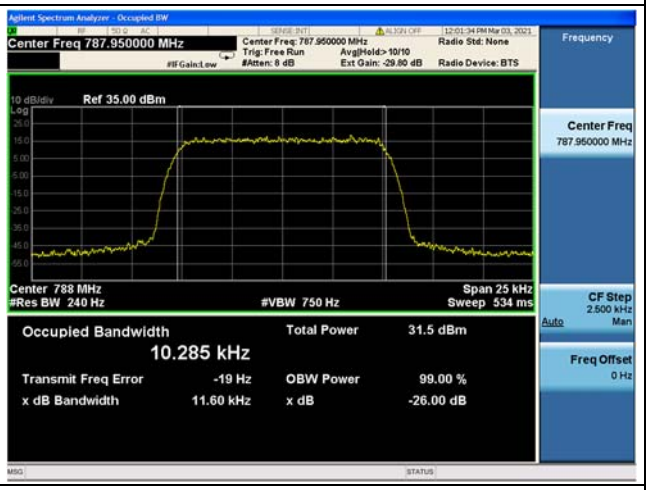

787.950MHz/Channel H/12.5kHz/64QAM

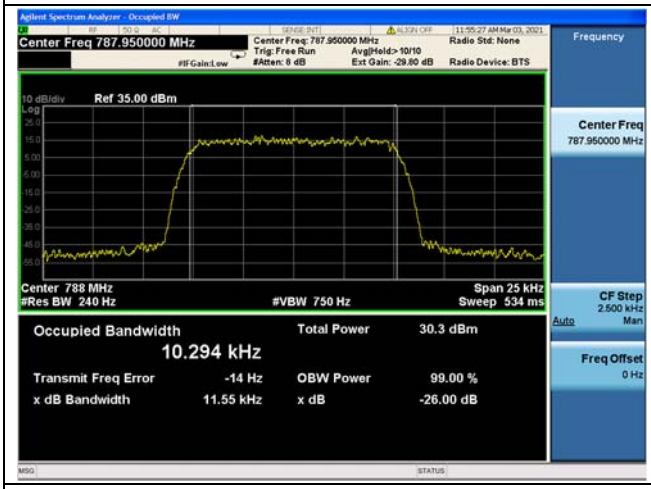

787.950MHz/Channel H/12.5 kHz/256QAM

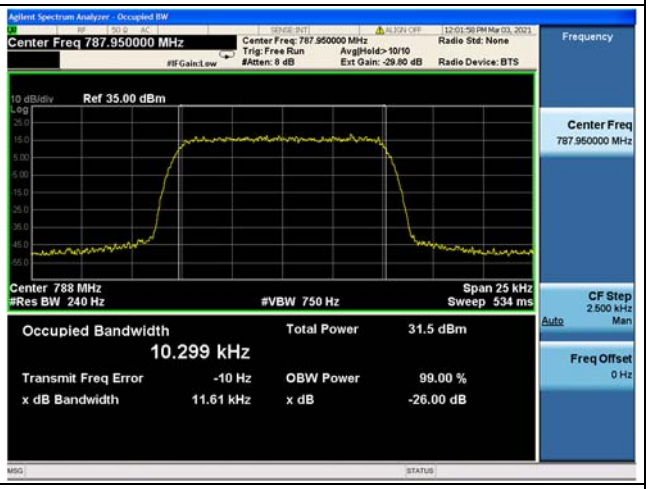

787.950MHz/Channel H/25.0 kHz/QPSK

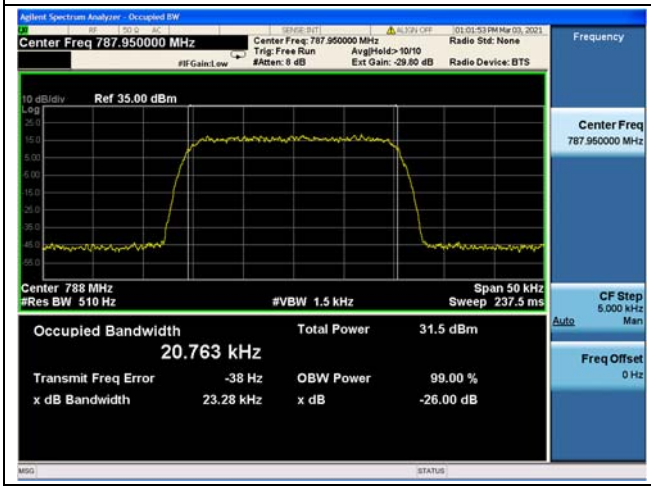

787.950MHz/Channel H/25.0 kHz/16QAM

787.950MHz/Channel H/25.0 kHz/64QAM

787.950MHz/Channel H/25.0 kHz/256QAM

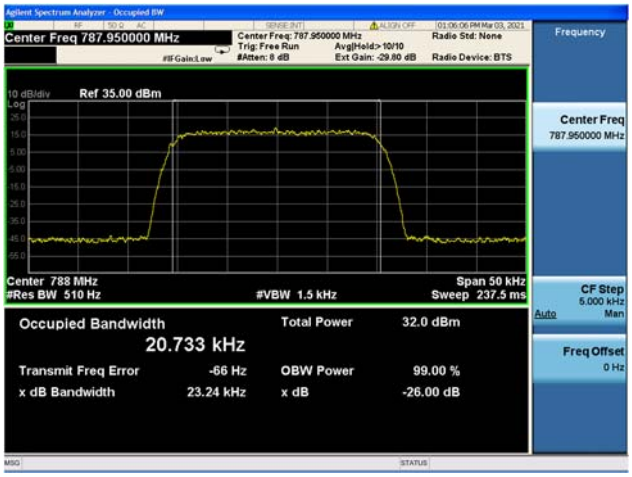

787.950MHz/Channel H/50.0 kHz/QPSK

787.950MHz/Channel H/50.0 kHz/16QAM

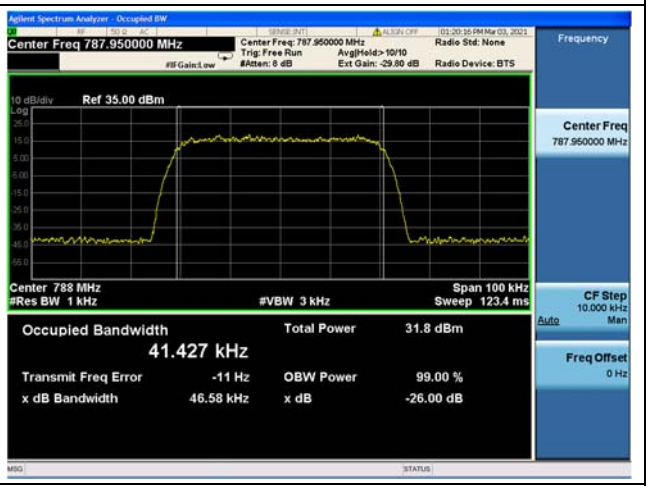

787.950MHz/Channel H/50.0 kHz/64QAM

787.950MHz/Channel H/50.0 kHz/256QAM

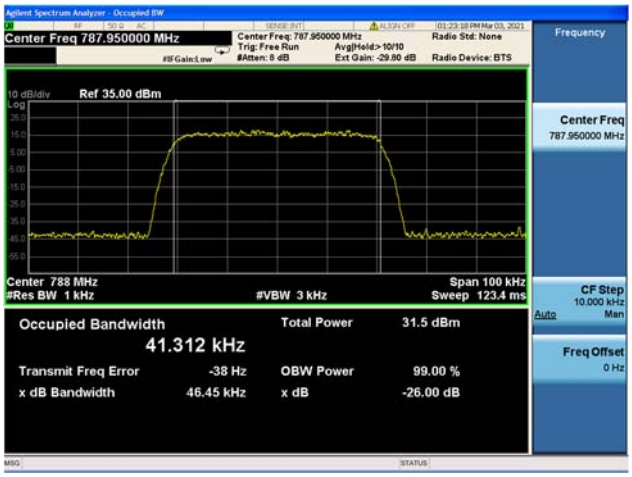

787.950MHz/Channel V/12.5kHz/QPSK

787.950MHz/Channel V/12.5kHz/16QAM

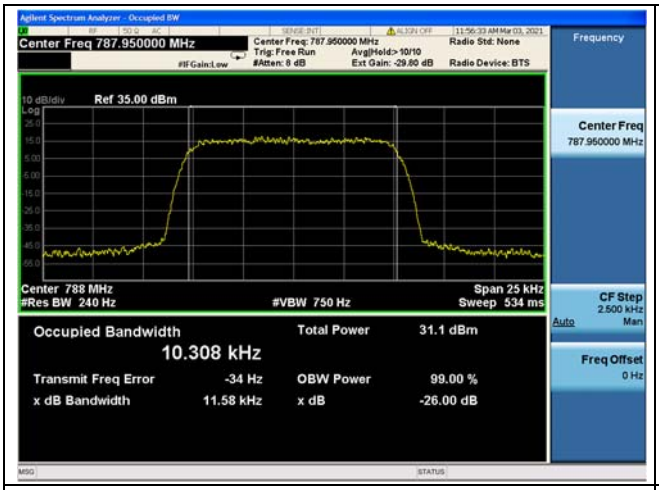

787.950MHz/Channel V/12.5kHz/64QAM

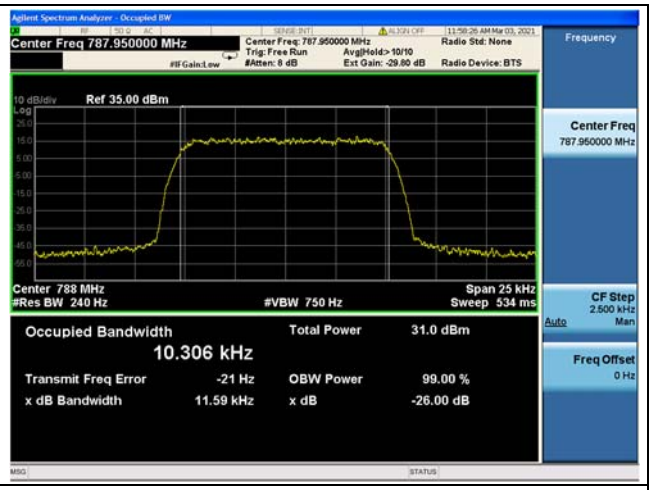

787.950MHz/Channel V/12.5 kHz/256QAM

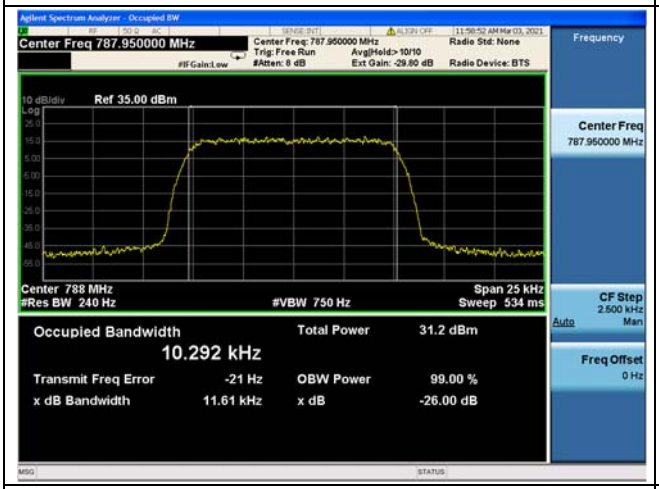

787.950MHz/Channel V/25.0 kHz/QPSK

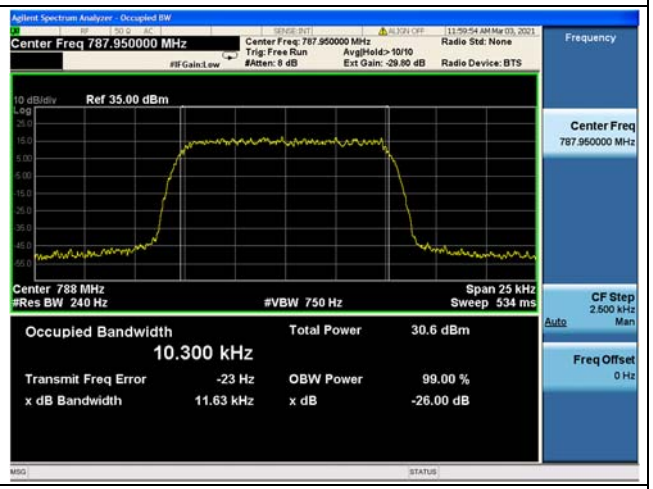

787.950MHz/Channel V/25.0 kHz/16QAM

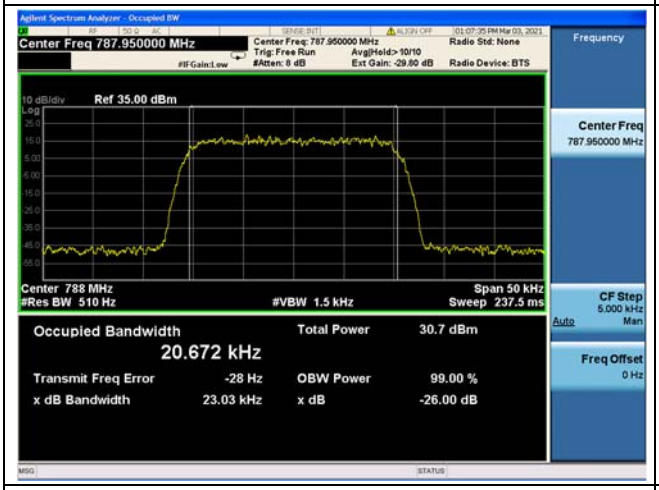

787.950MHz/Channel V/25.0 kHz/64QAM

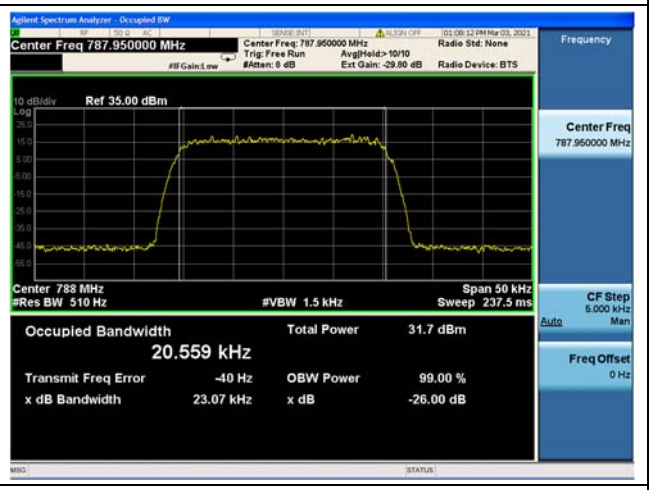

787.950MHz/Channel V/25.0 kHz/256QAM

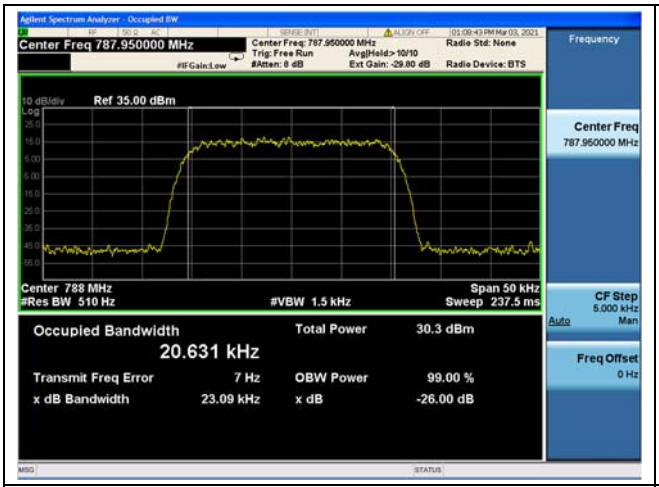

787.950MHz/Channel V/50.0 kHz/QPSK

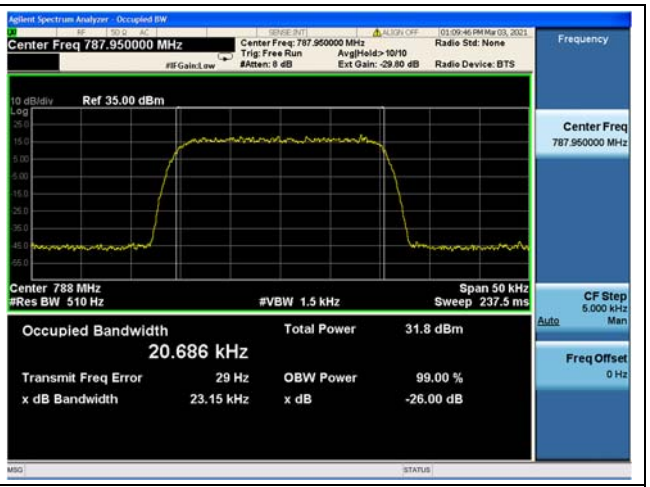

787.950MHz/Channel V/50.0 kHz/16QAM

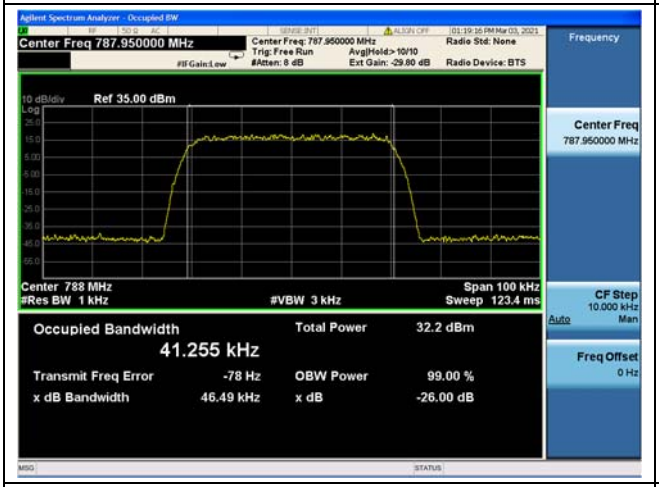

787.950MHz/Channel V/50.0 kHz/64QAM

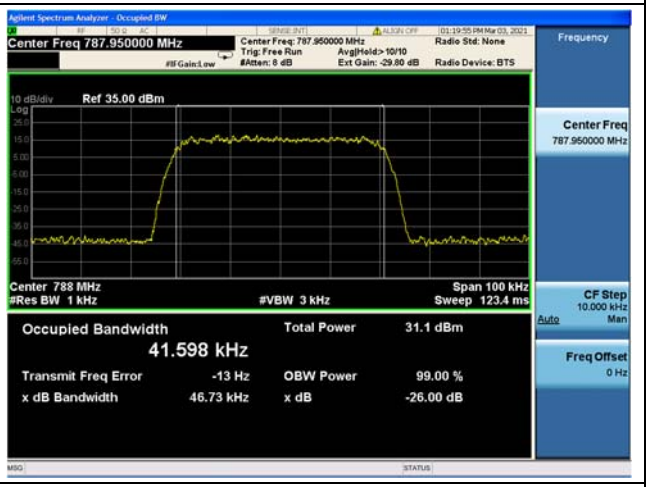

787.950MHz/Channel V/50.0 kHz/256QAM

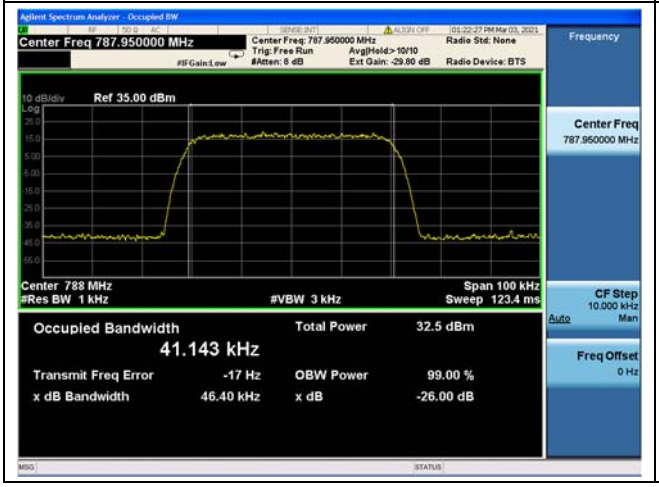

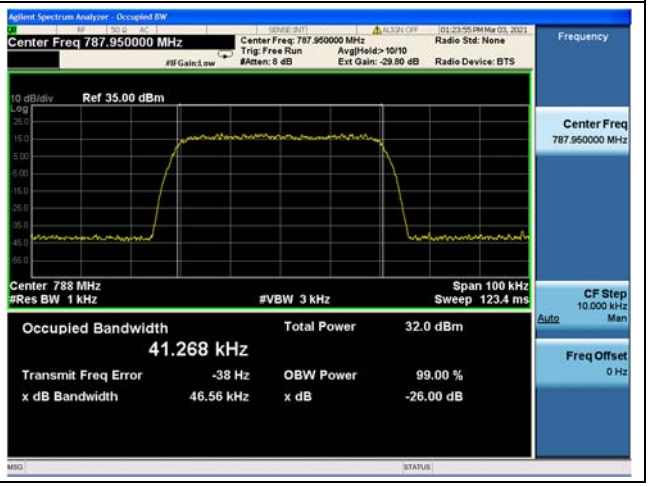

2.3. Spurious Emissions At Antenna Terminals

2.3.1. Test Requirement

According to FCC section 2.1051 and section 27.53(c). For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band segment, for base and fixed stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

2.3.2. Test Result

Frequency (MHz)	Tx Port	Measurement Bandwidth	Spurious Span (MHz)	Limit (dBm)	Verdict
757.050	Channel H	1MHz	30 - 8000	-13	Pass
	Channel V	6.25kHz	763-775 & 793-805	-46	Pass
	Channel H	30kHz	Adjacent 100kHz Lower edge	-13	Pass
	Channel V	30kHz	Adjacent 100kHz Lower edge	-13	Pass
	Channel H	30kHz	Adjacent 100kHz Upper edge	-13	Pass
	Channel V	30kHz	Adjacent 100kHz Upper edge	-13	Pass
787.950	Channel H	1MHz	30 - 8000	-13	Pass
	Channel V	6.25kHz	763-775 & 793-805	-46	Pass
	Channel H	30kHz	Adjacent 100kHz Lower edge	-13	Pass
	Channel V	30kHz	Adjacent 100kHz Lower edge	-13	Pass
	Channel H	30kHz	Adjacent 100kHz Upper edge	-13	Pass
	Channel V	30kHz	Adjacent 100kHz Upper edge	-13	Pass

Nominal Frequency: 757.050 MHz Tx Port: Channel H

12.5kHz/QPSK

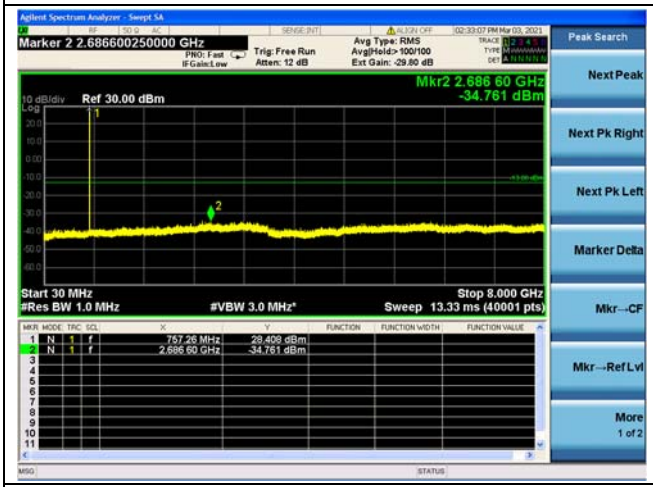

12.5kHz/QPSK 763-775MHz

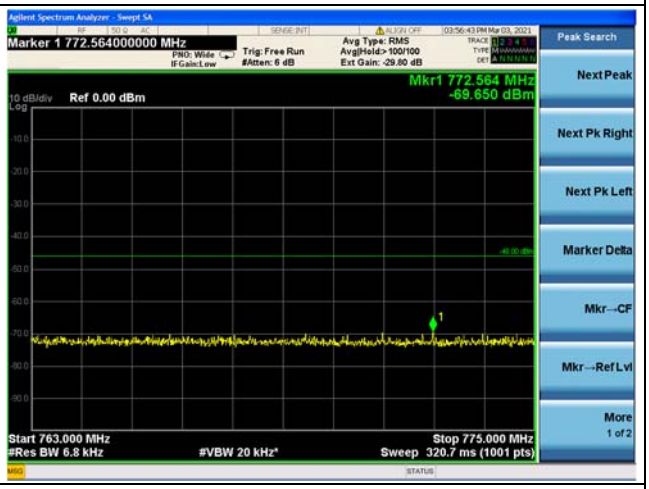

12.5kHz/QPSK 793-805MHz

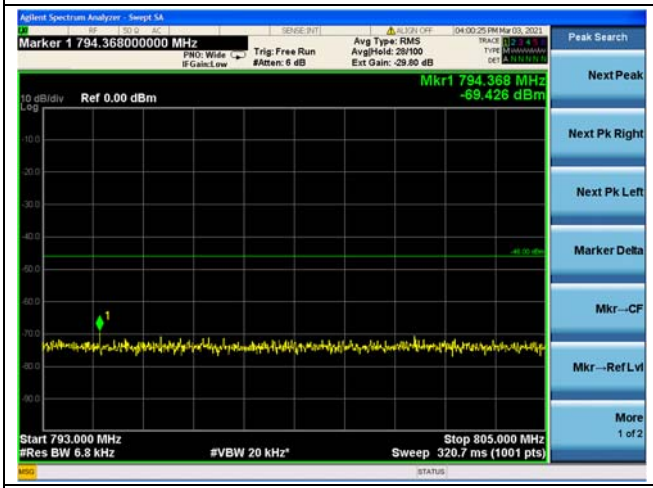

12.5kHz/16QAM

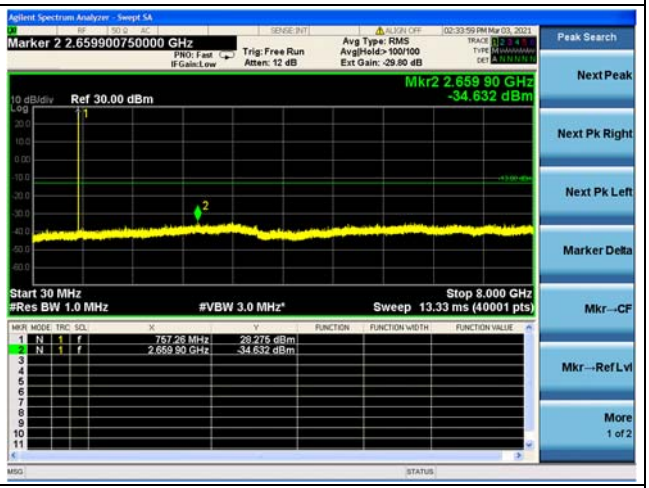

12.5kHz/16QAM 763-775MHz

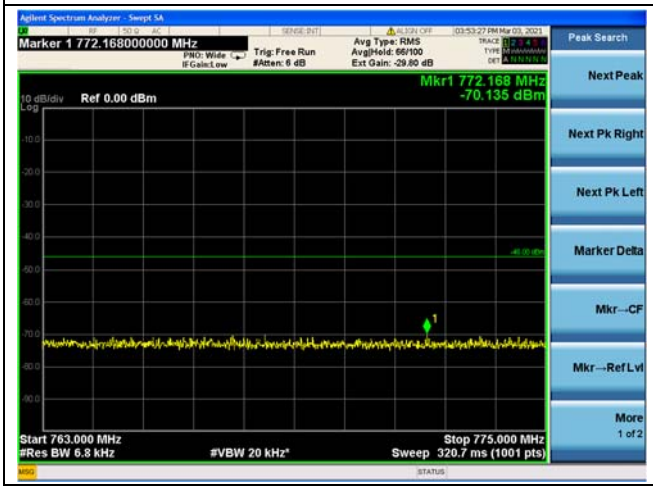

12.5kHz/16QAM 793-805MHz

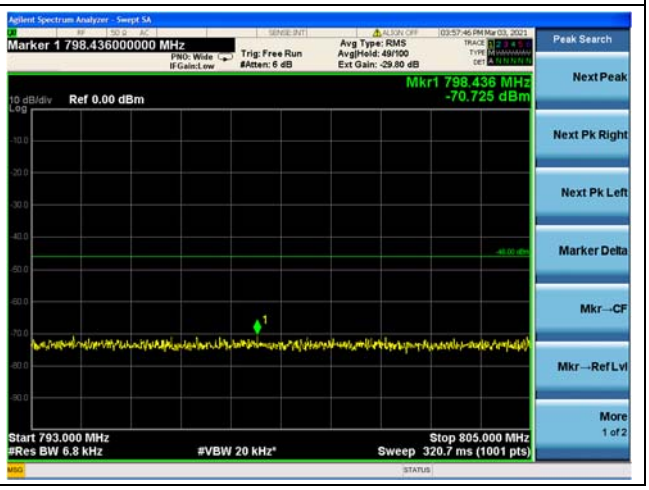

12.5kHz/64QAM

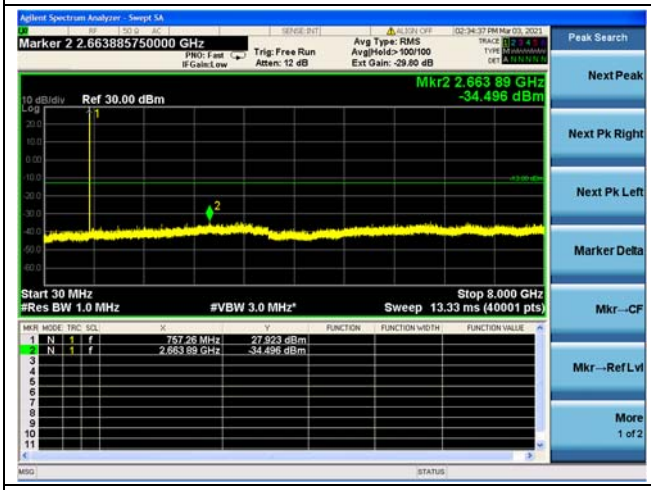

12.5kHz/64QAM 763-775MHz

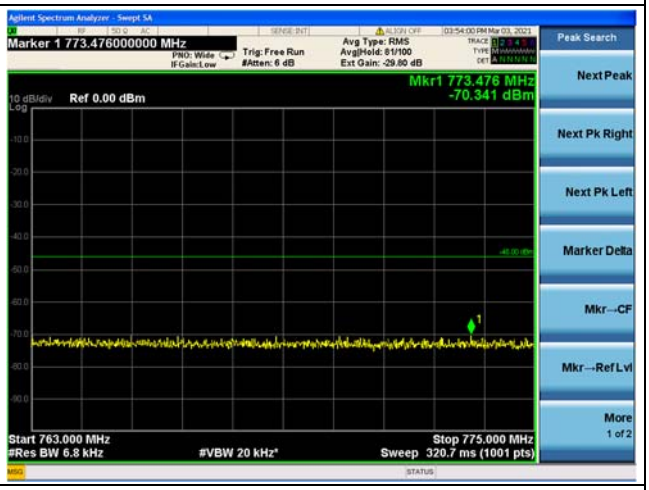

12.5kHz/64QAM 793-805MHz

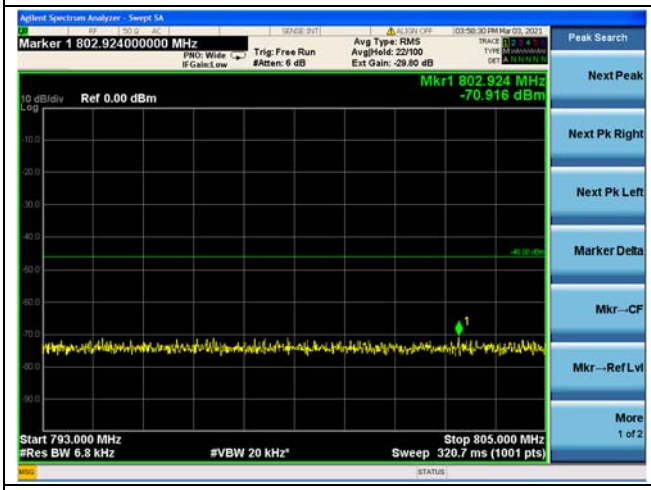

12.5kHz/256QAM

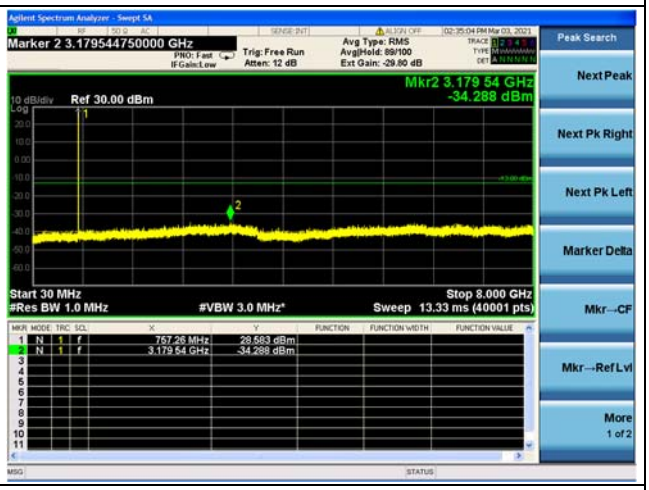

12.5kHz/256QAM 763-775MHz

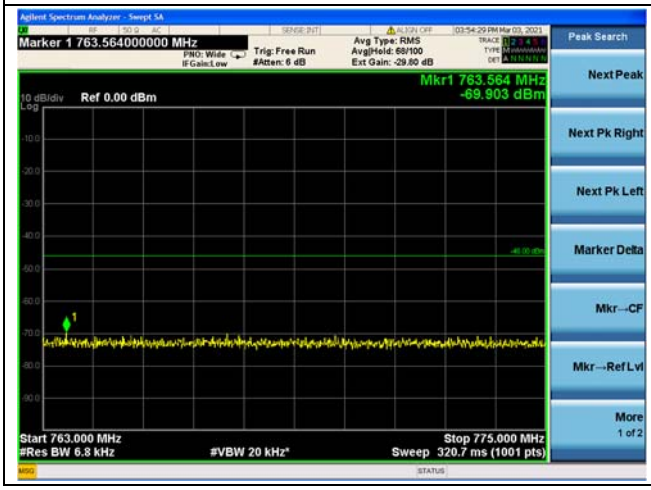

12.5kHz/256QAM 793-805MHz

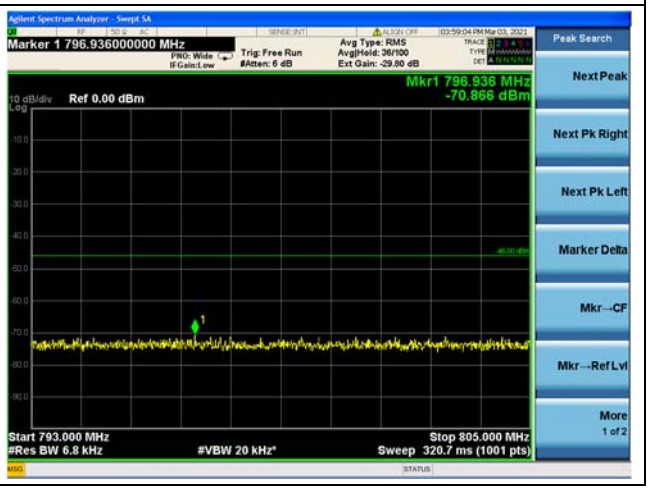

25kHz/QPSK

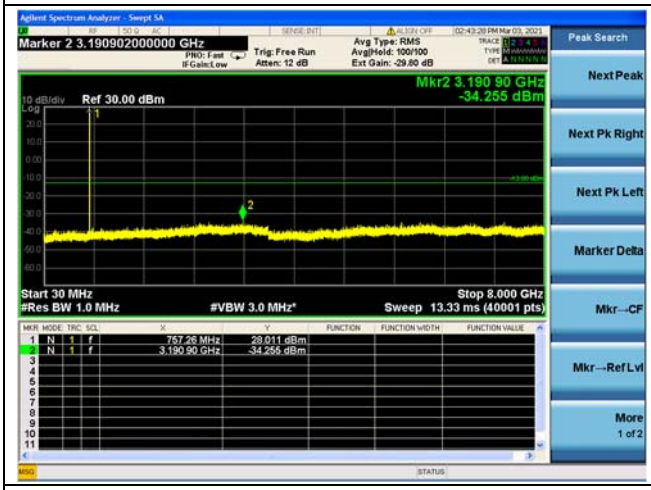

25kHz/QPSK 763-775MHz

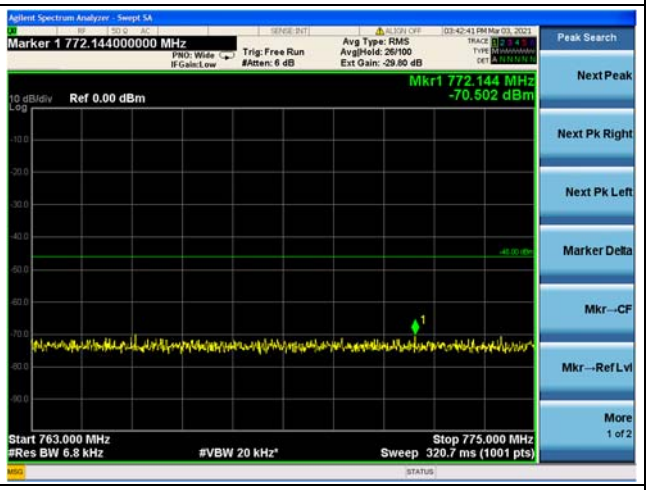

25kHz/QPSK 793-805MHz

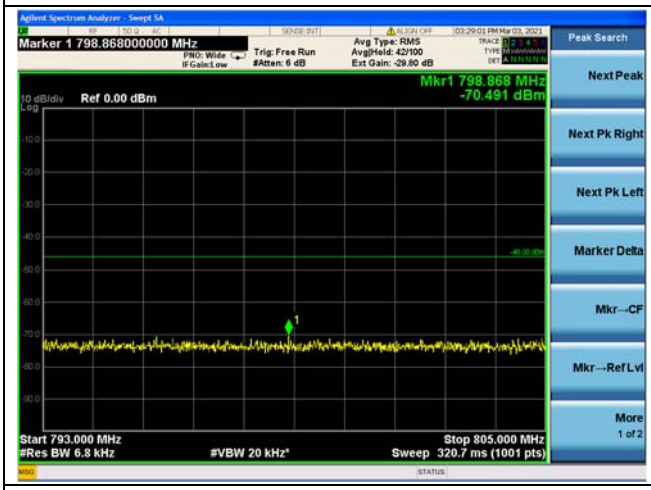

25kHz/16QAM

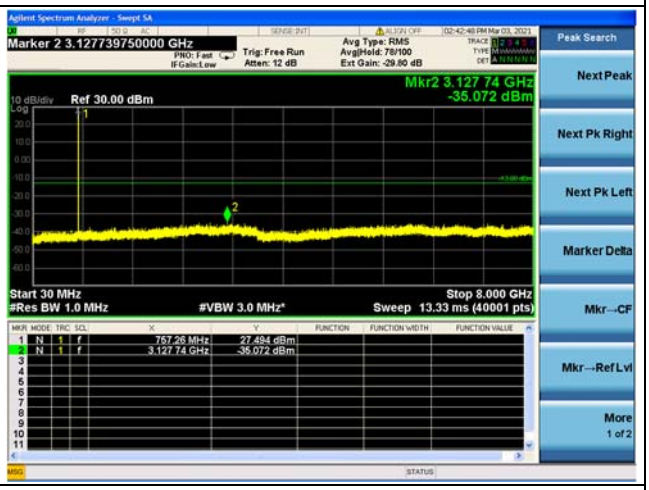

25kHz/16QAM 763-775MHz

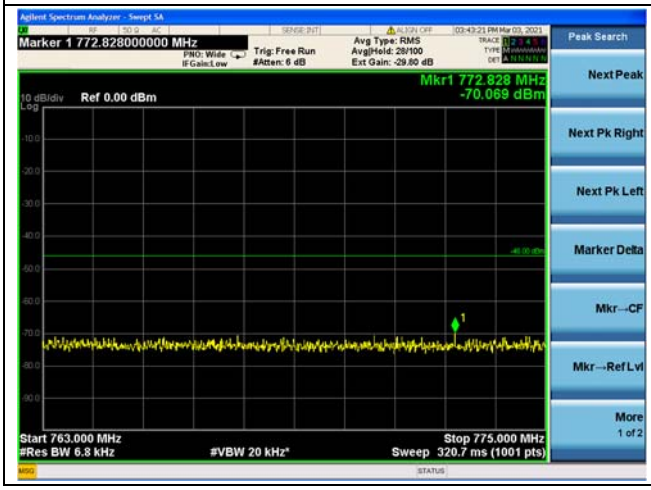

25kHz/16QAM 793-805MHz

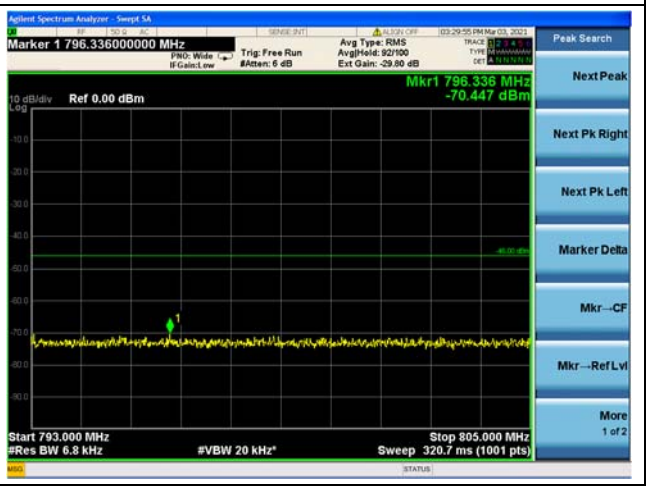

25kHz/64QAM

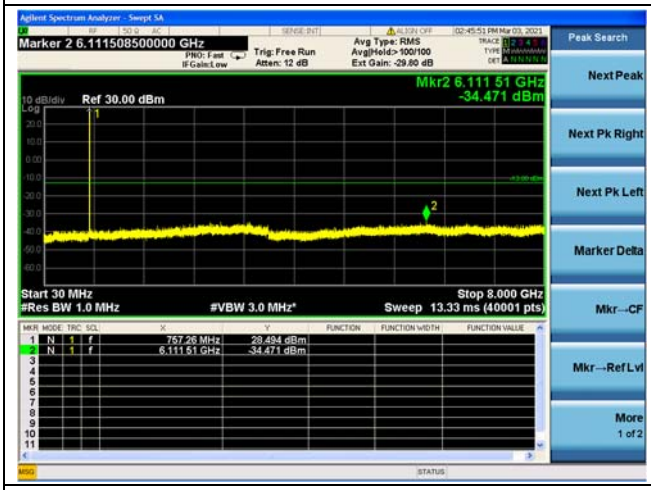

25kHz/64QAM 763-775MHz

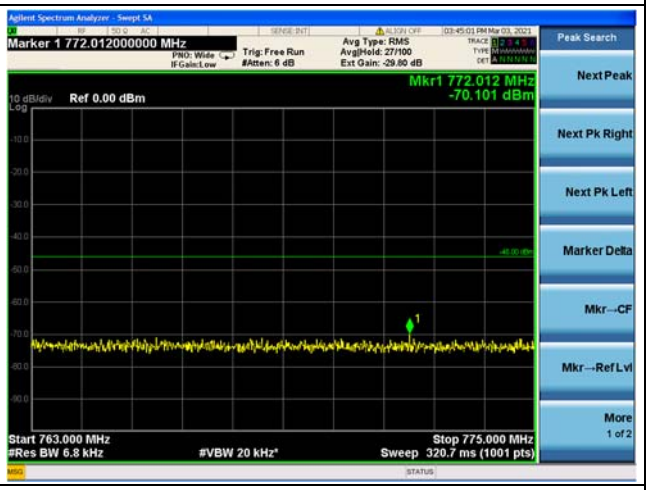

25kHz/64QAM 793-805MHz

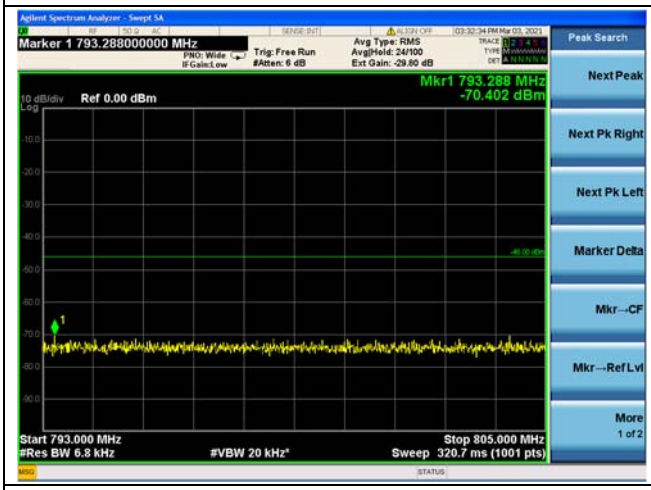

25kHz/256QAM

25kHz/256QAM 763-775MHz

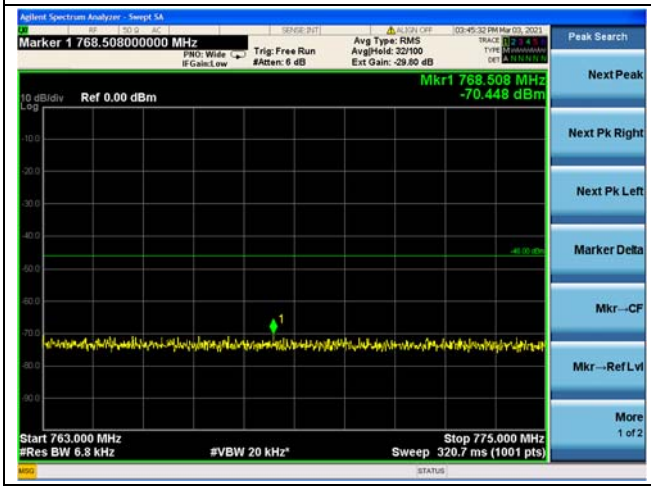

25kHz/256QAM 793-805MHz

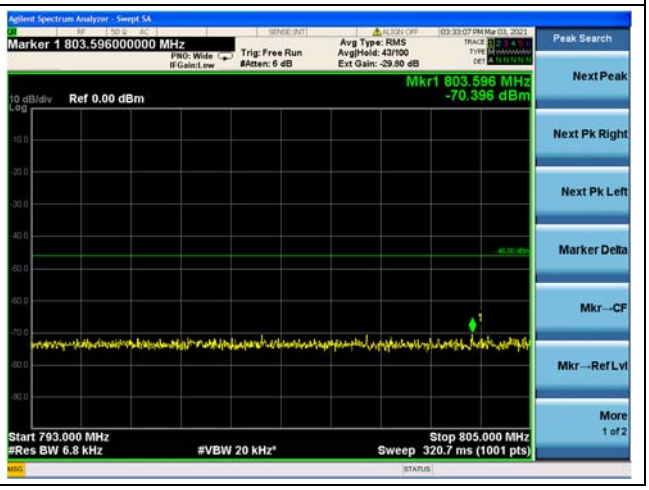

50kHz/QPSK

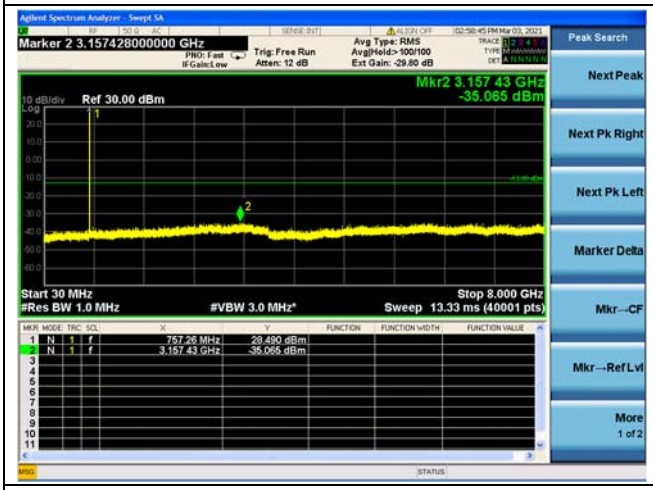

50kHz/QPSK 763-775MHz

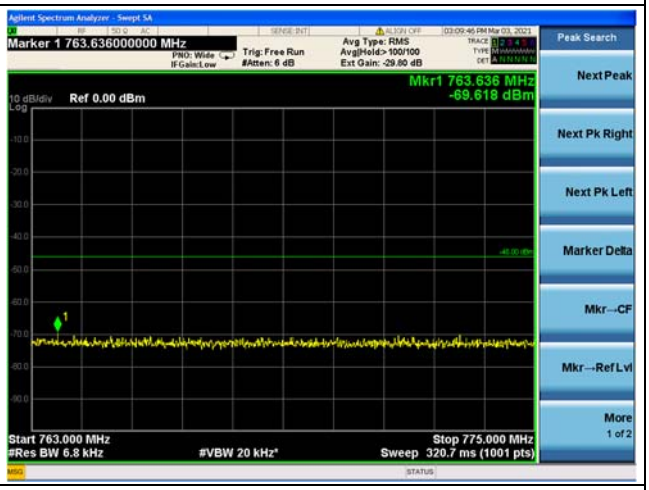

50kHz/QPSK 793-805MHz

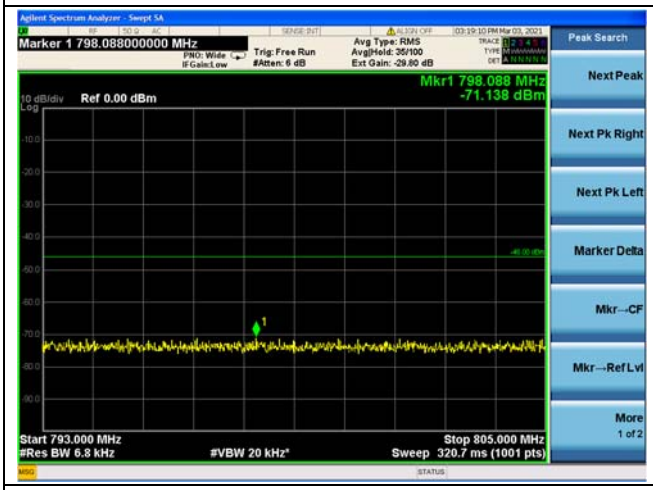

50kHz/16QAM

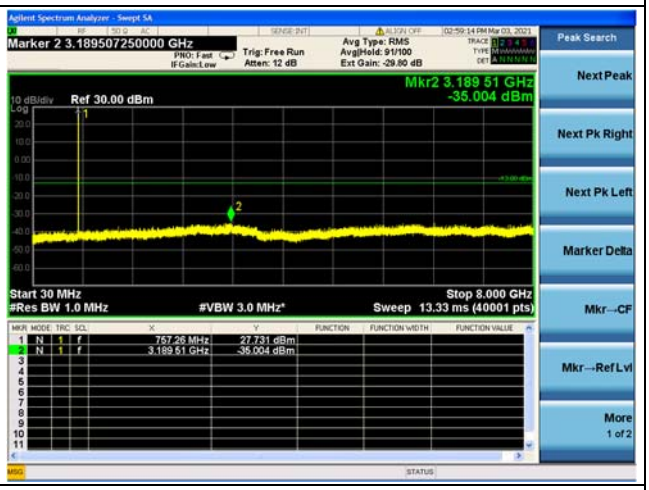

50kHz/16QAM 763-775MHz

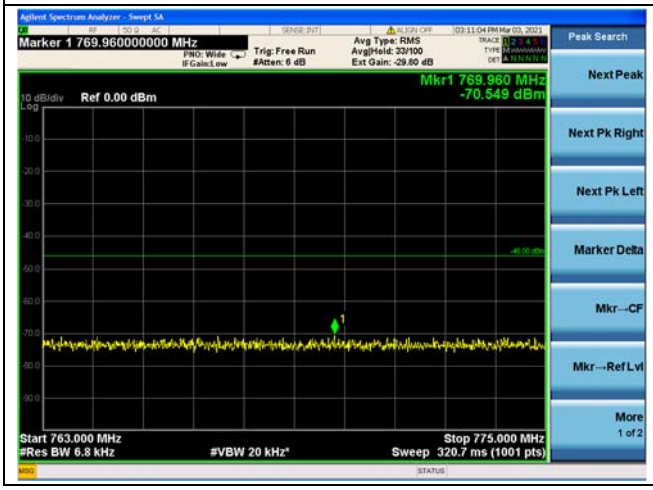

50kHz/16QAM 793-805MHz

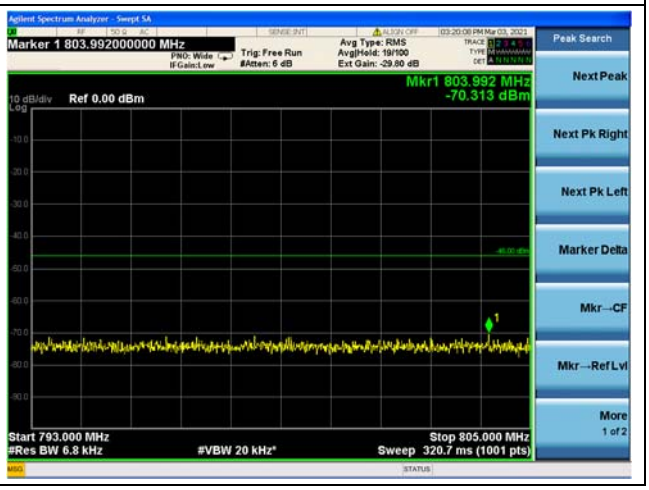

50kHz/64QAM

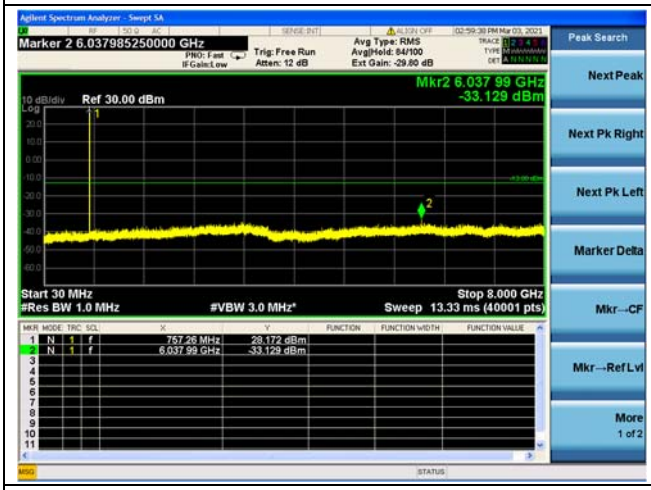

50kHz/64QAM 763-775MHz

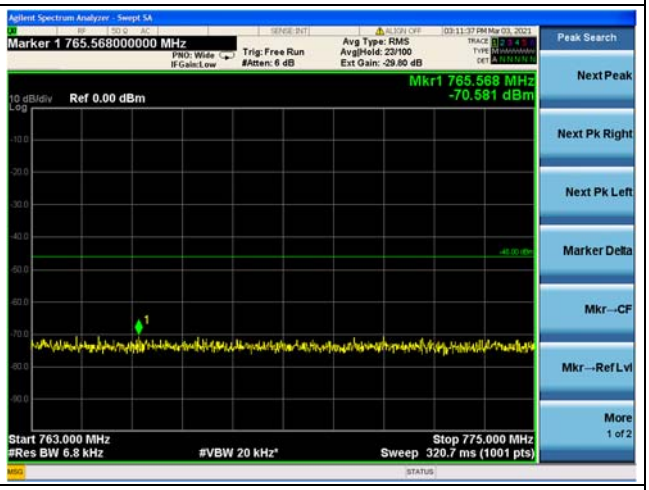

50kHz/64QAM 793-805MHz

50kHz/256QAM

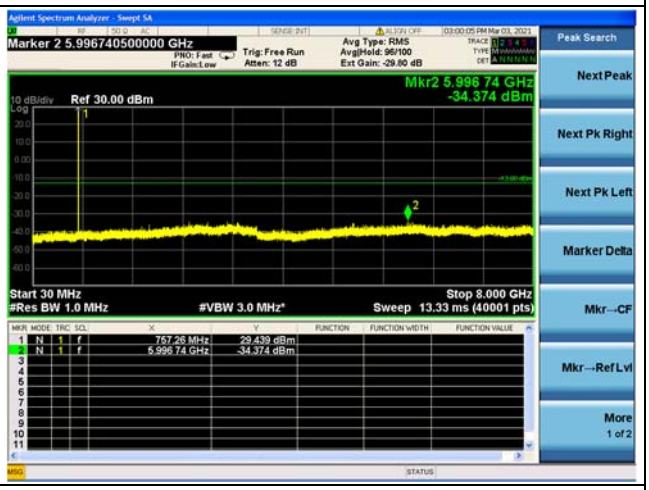

50kHz/256QAM 763-775MHz

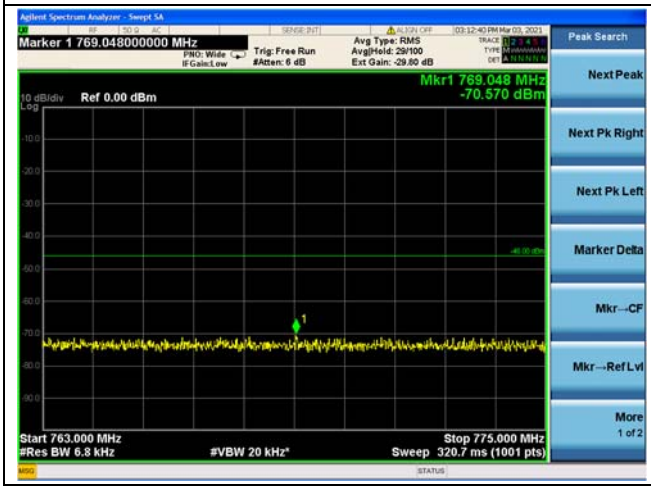

50kHz/256QAM 793-805MHz

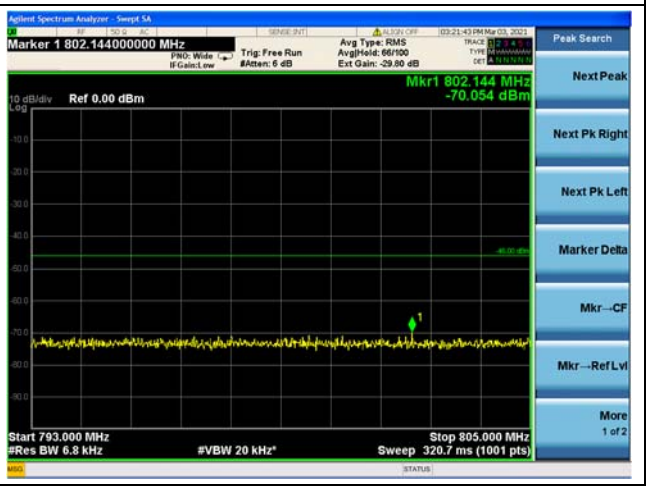

Nominal Frequency: 757.050 MHz Tx Port: Channel V

12.5kHz/QPSK	12.5kHz/QPSK 763-775MHz
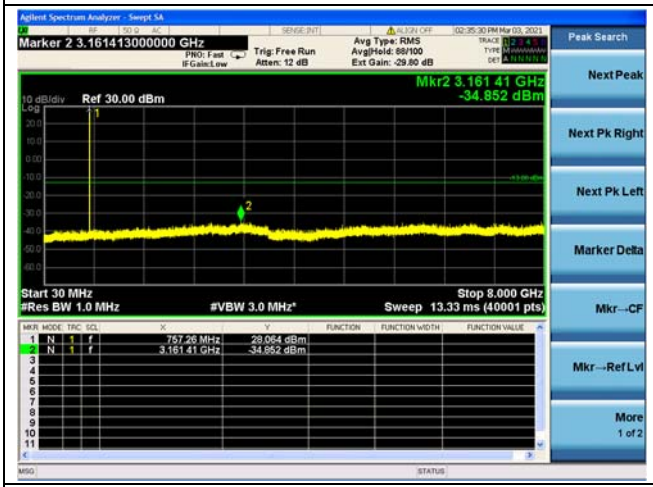	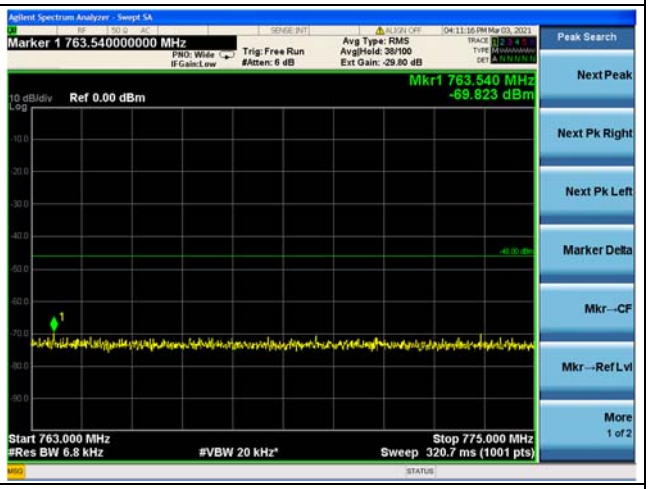
12.5kHz/QPSK 793-805MHz	**12.5kHz/16QAM**
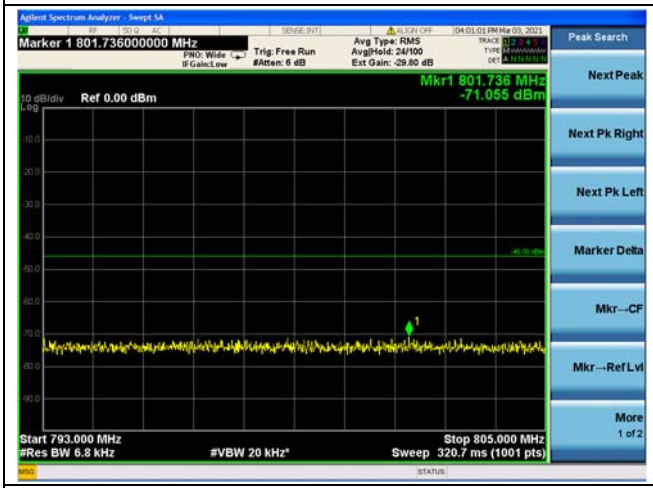	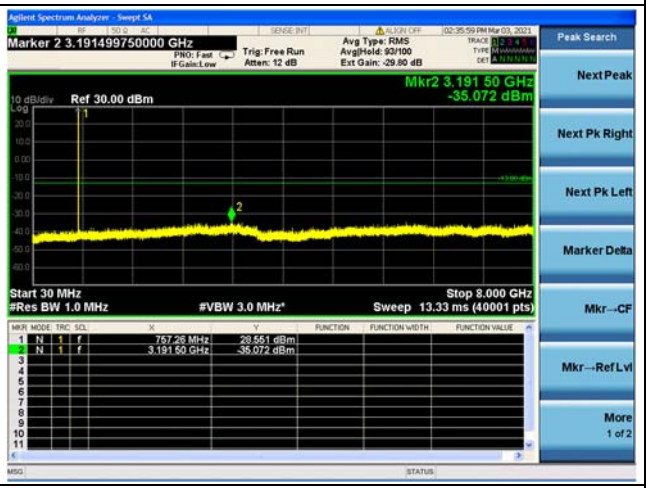
12.5kHz/16QAM 763-775MHz	**12.5kHz/16QAM 793-805MHz**
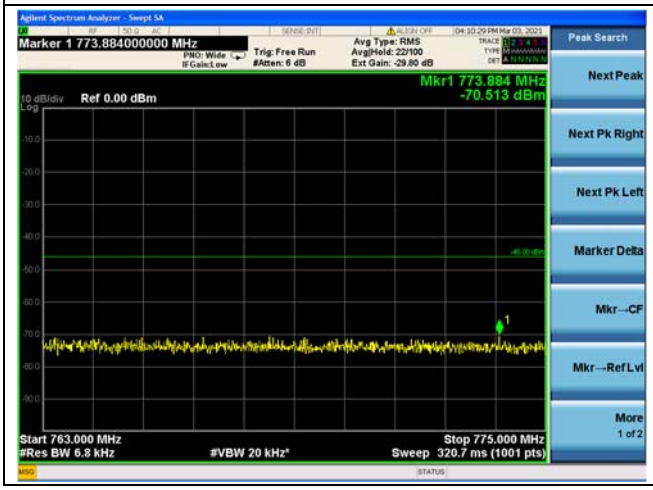	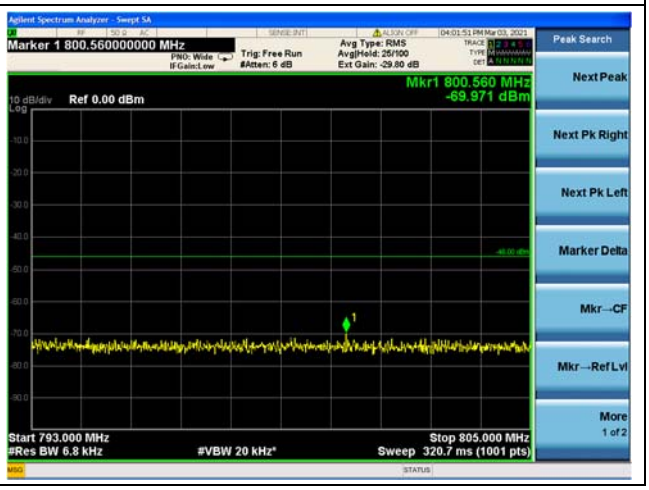

12.5kHz/64QAM

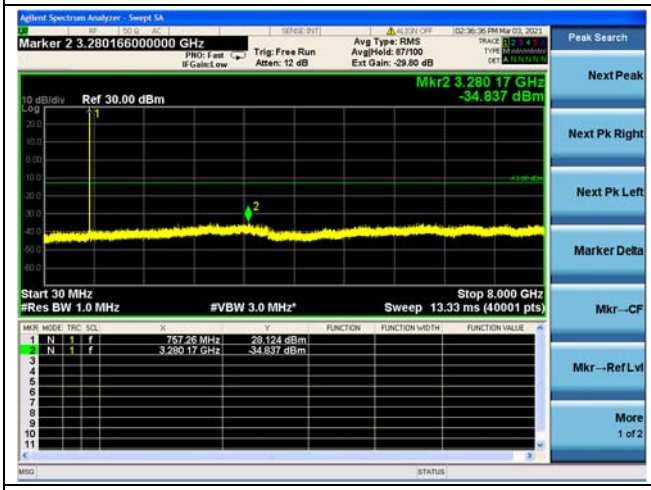

12.5kHz/64QAM 763-775MHz

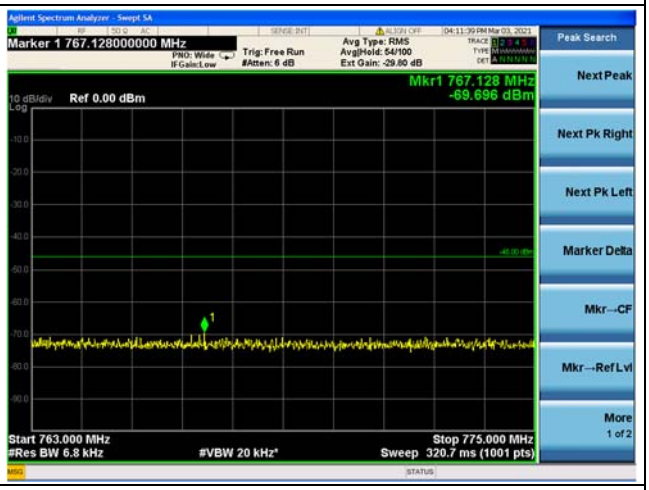

12.5kHz/64QAM 793-805MHz

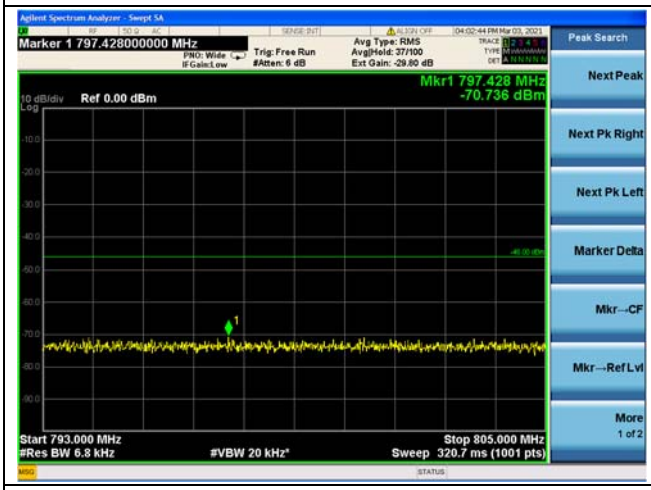

12.5kHz/256QAM

12.5kHz/256QAM 763-775MHz

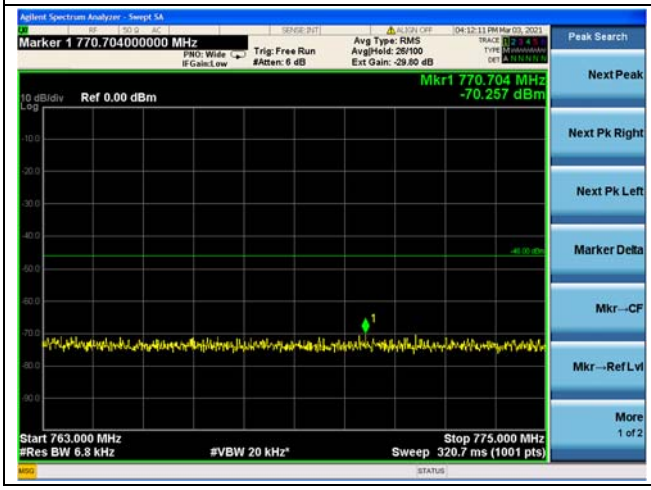

12.5kHz/256QAM 793-805MHz

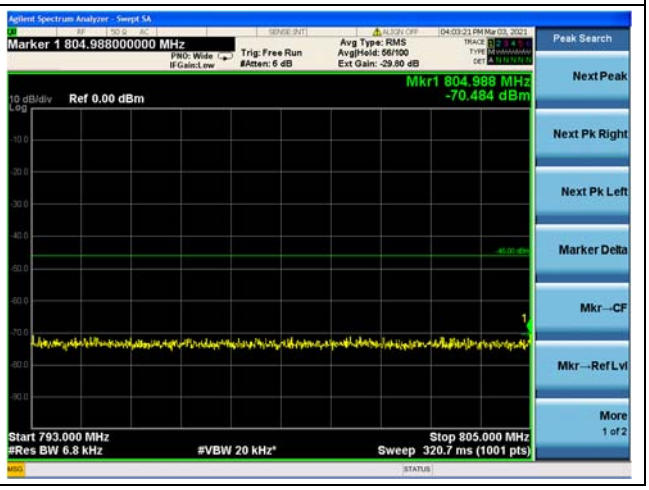

25kHz/QPSK

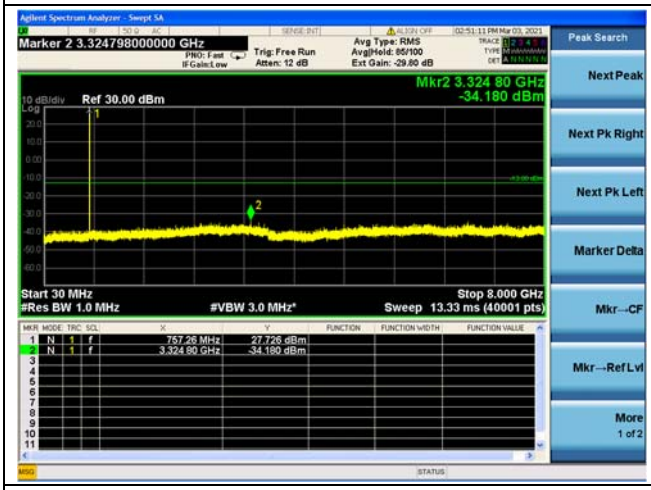

25kHz/QPSK 763-775MHz

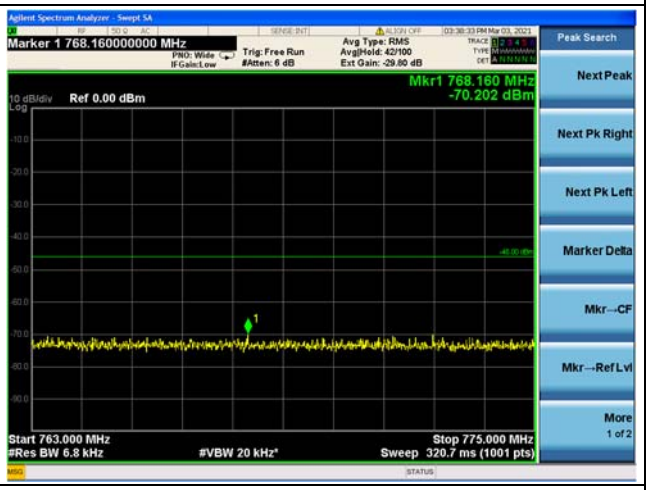

25kHz/QPSK 793-805MHz

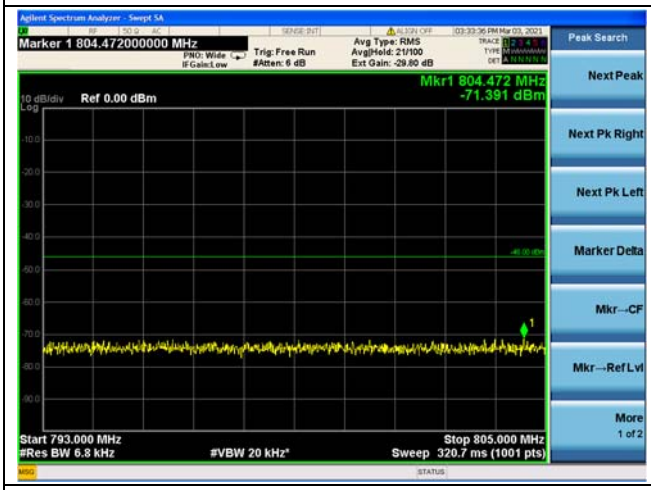

25kHz/16QAM

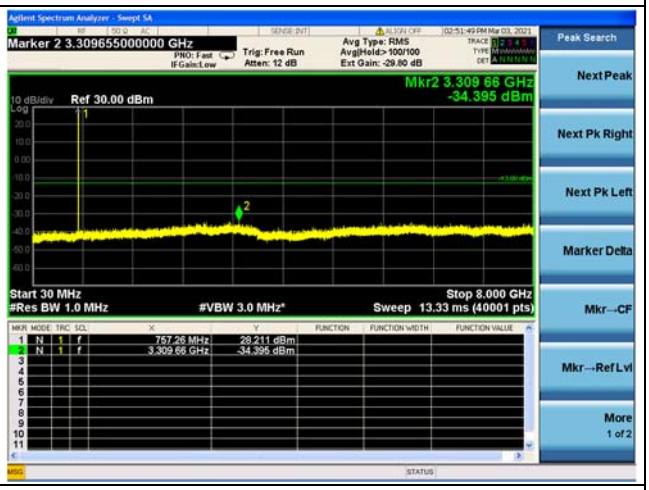

25kHz/16QAM 763-775MHz

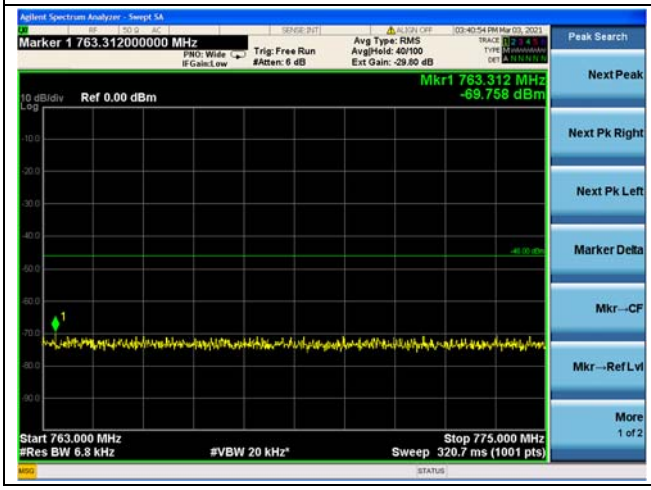

25kHz/16QAM 793-805MHz

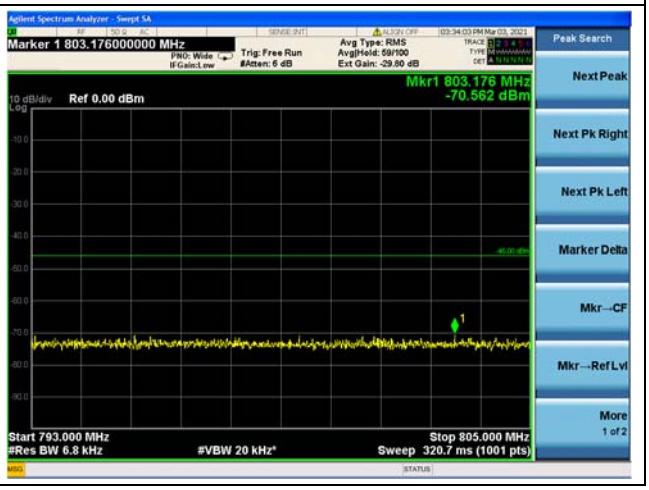

25kHz/64QAM

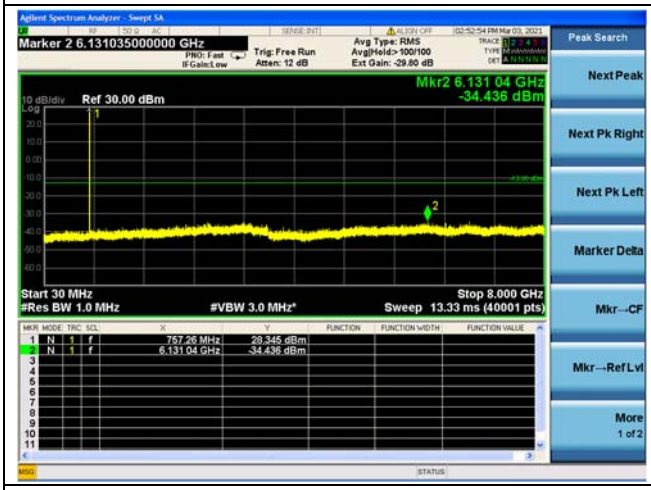

25kHz/64QAM 763-775MHz

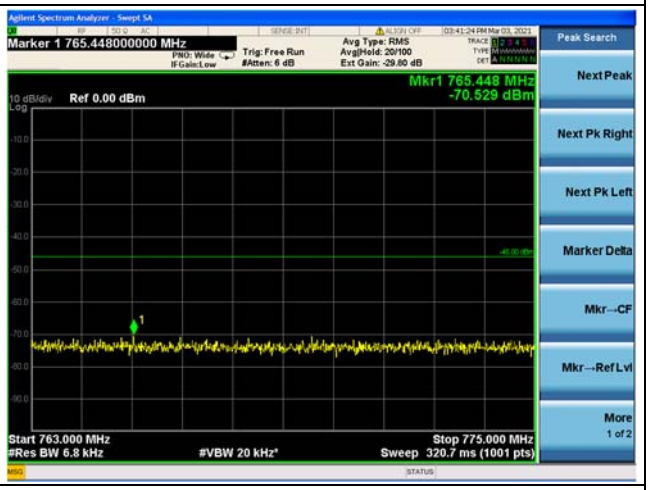

25kHz/64QAM 793-805MHz

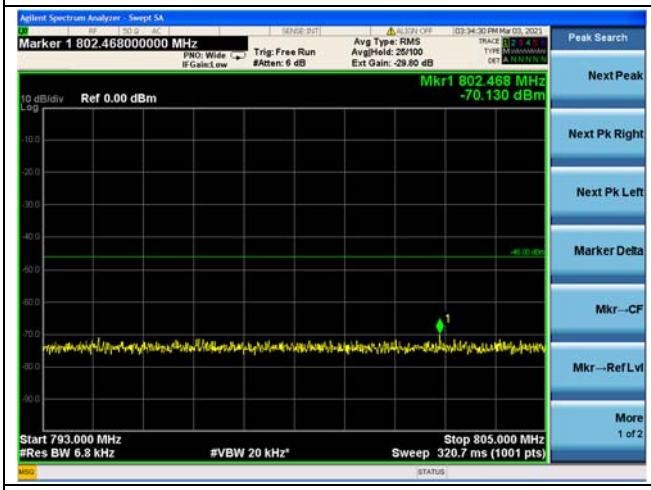

25kHz/256QAM

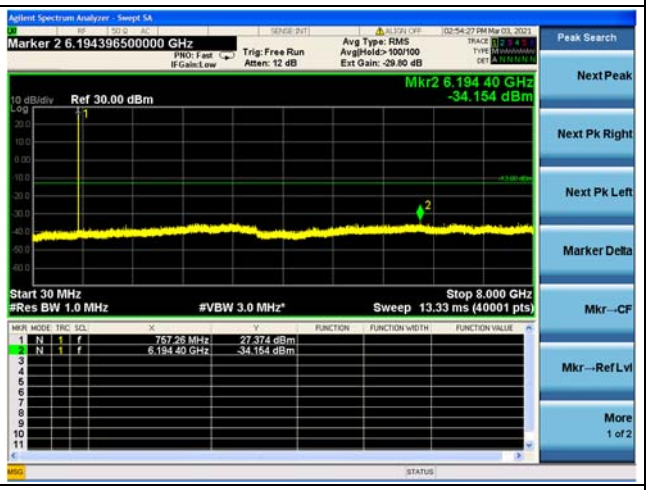

25kHz/256QAM 763-775MHz

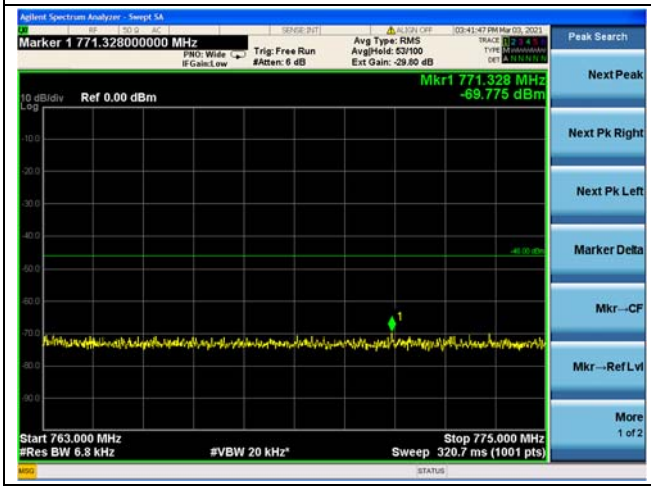

25kHz/256QAM 793-805MHz

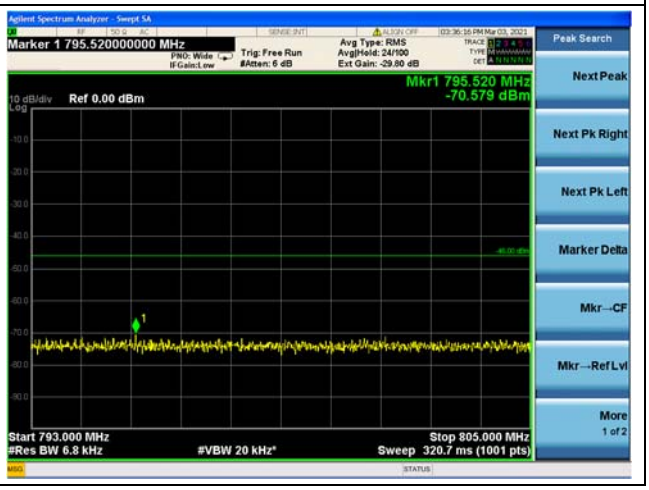

50kHz/QPSK

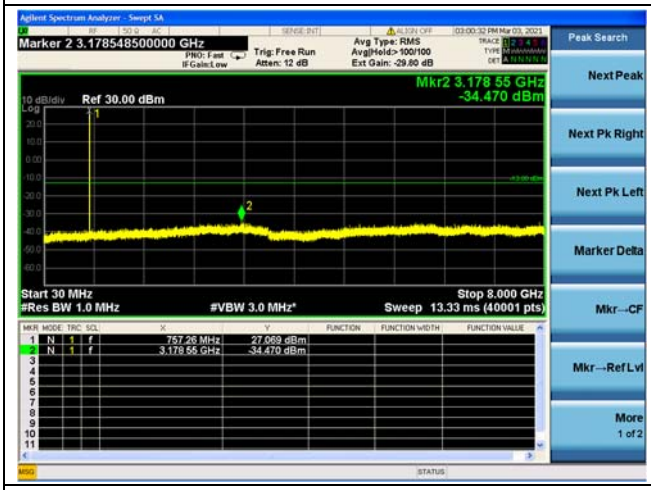

50kHz/QPSK 763-775MHz

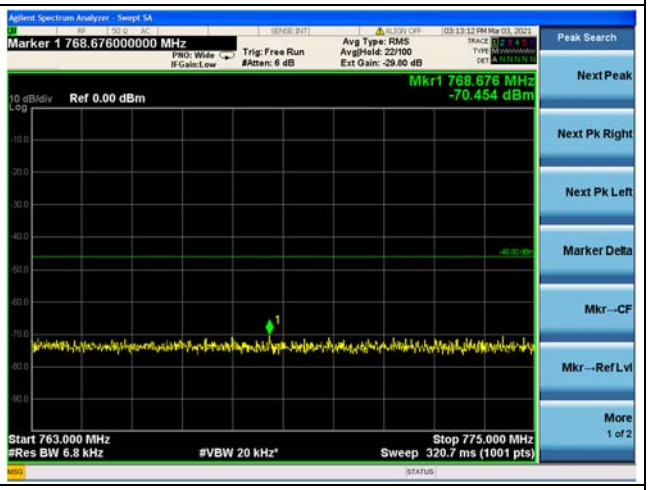

50kHz/QPSK 793-805MHz

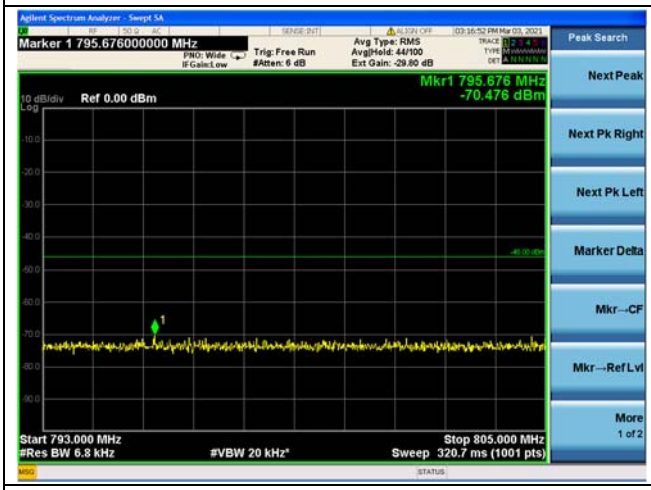

50kHz/16QAM

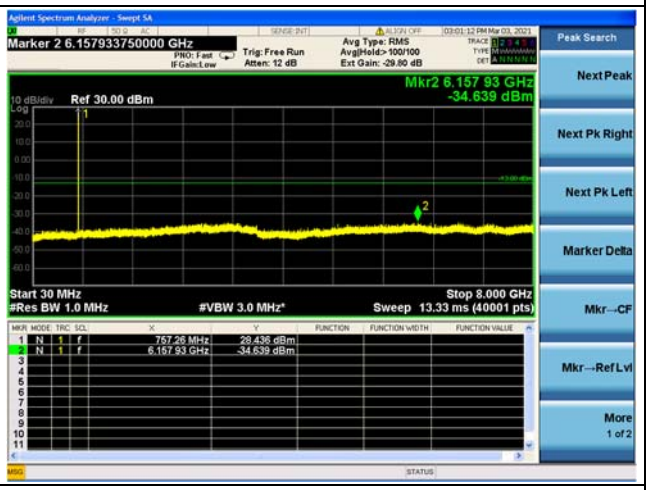

50kHz/16QAM 763-775MHz

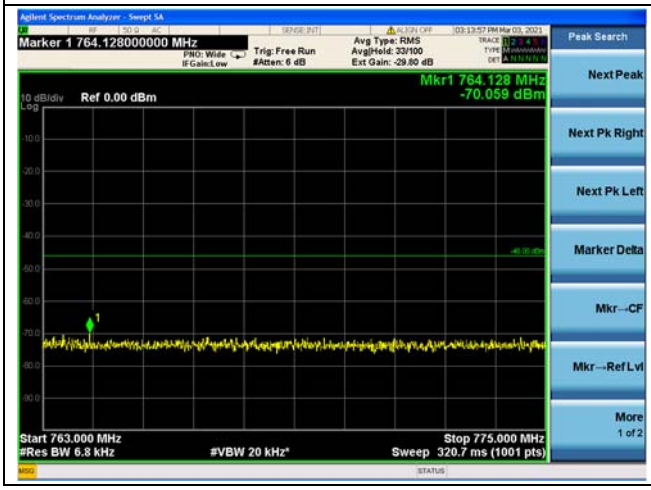

50kHz/16QAM 793-805MHz

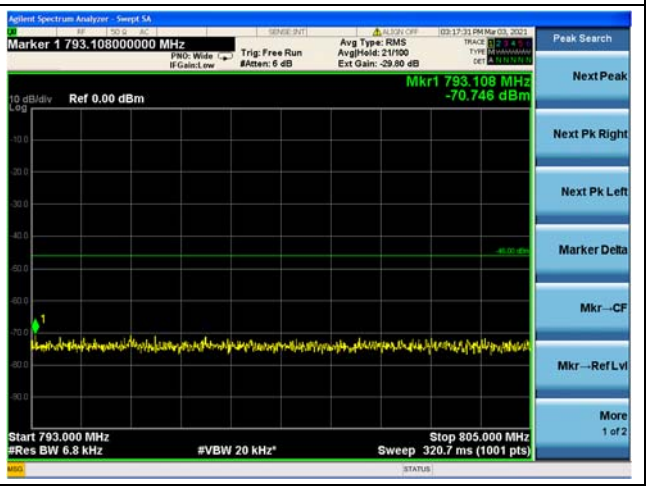

50kHz/64QAM

50kHz/64QAM 763-775MHz

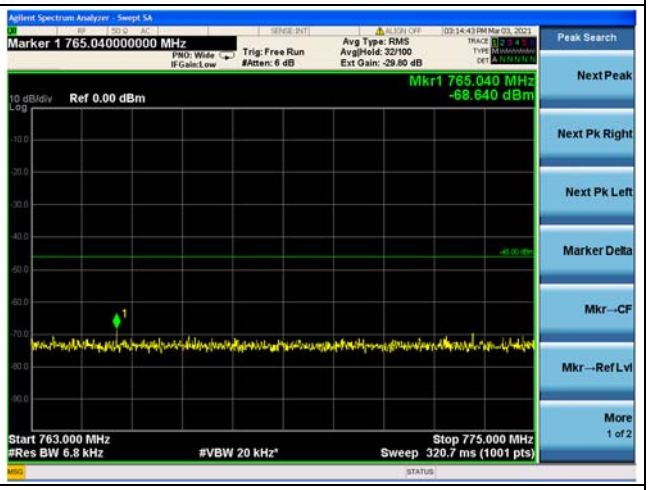

50kHz/64QAM 793-805MHz

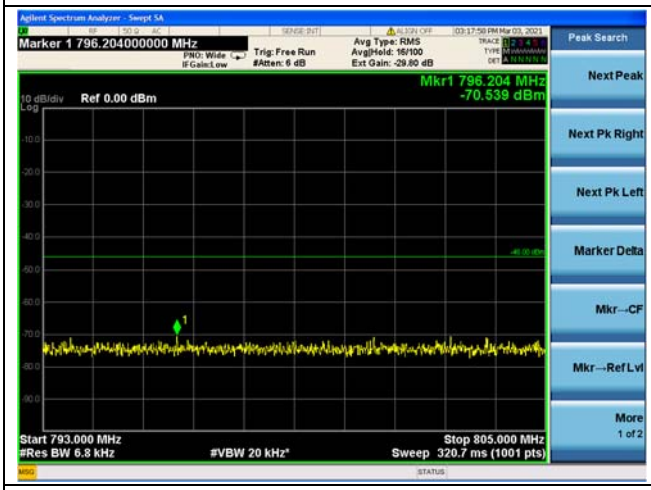

50kHz/256QAM

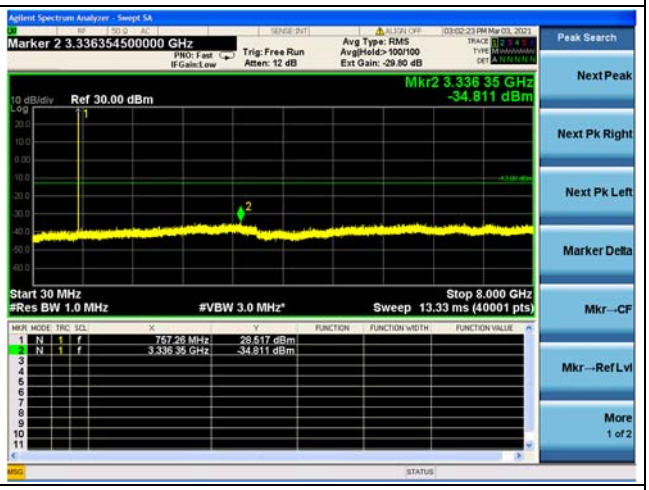

50kHz/256QAM 763-775MHz

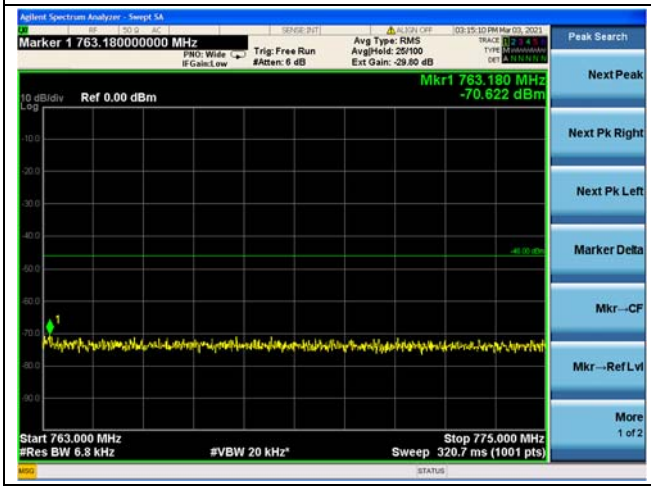
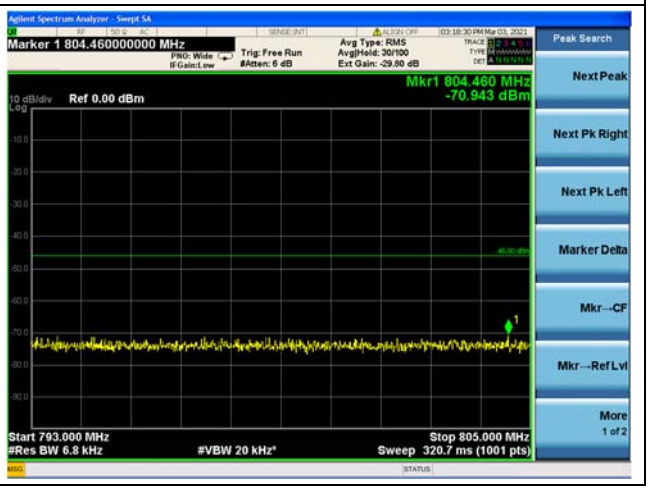
50kHz/256QAM 793-805MHz