

TEST REPORT

Application No.: SUCR2510001034AT
FCC ID: XMR2022SC668SNA
Applicant: Quectel Wireless Solutions Co., Ltd.
Address of Applicant: No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China
Manufacturer: Quectel Wireless Solutions Co., Ltd.
Address of Manufacturer: No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China
Equipment Under Test (EUT):
EUT Name: SBC(Single-Board Computers)
Model No.: QSM668SR-NA
Trade Mark: QUECTEL
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2025-10-23
Date of Test: 2025-11-19 to 2025-11-20
Date of Issue: 2025-11-27

Test Result:
Pass*

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Revision Record			
Version	Description	Date	Remark
01	Original	2025-11-27	/

Authorized for issue by:			
Tested By		Nature Shen	
		Nature Shen/Project Engineer	
Approved By		Cedar cheng	
		Cedar Cheng /Reviewer	

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Customer Declaration

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207	Reference report FR311713A-R01
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Conducted Peak Output Power		ANSI C63.10 (2020) Section 11.9.2	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10 (2020) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density		ANSI C63.10 (2020) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Reference report FR311713A-R01
Conducted Band Edges Measurement		ANSI C63.10 (2020) Section 6.10.4	47 CFR Part 15, Subpart C 15.247(d)	
Conducted Spurious Emissions		ANSI C63.10 (2020) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	

Remark:

The Smart Module (Model: SC668S-NA) has been certified, and the report number is FR311713A-R01 issued by Sporton International Inc.(Kunshan). So, we only evaluate the Radiated Emissions which fall in the restricted bands, Radiated Spurious Emissions Below 1GHz, Radiated Spurious Emissions Above 1GHz, Conducted Peak Output Power and Minimum 6dB Bandwidth test of this sample, other test data please refer to module test report.

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Environment Parameter	5
4.3 Description of Support Units	5
4.4 Measurement Uncertainty & Decision Rule	6
4.5 Test Location	7
4.6 Test Facility	7
4.7 Deviation from Standards.....	7
4.8 Abnormalities from Standard Conditions.....	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement.....	10
6.1 Antenna Requirement	10
7 Radio Spectrum Matter Test Results	11
7.1 Radiated Emissions which fall in the restricted bands	11
7.2 Radiated Spurious Emissions Below 1GHz	18
7.3 Radiated Spurious Emissions Above 1GHz.....	24
7.4 Conducted Peak Output Power.....	30
7.5 Minimum 6dB Bandwidth.....	32
8 Test Setup Photo	33
9 EUT Constructional Details (EUT Photos).....	33
10 Appendix.....	34

4 General Information

4.1 Details of E.U.T.

Power supply:	12V
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz;802.11n(HT40): 2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS (DBPSK, DQPSK, CCK); 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
Number of Channels:	802.11b/g/n(HT20):11;802.11n(HT40):7
Channel Spacing:	5MHz
Antenna Type:	Dipole Antenna
Antenna Gain:	0.3 dBi (Provided by the manufacturer)
Antenna Number:	1

4.2 Environment Parameter

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	25	12
Note: NV:Normal Voltage NT:Normal Temperature		

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Computer	Lenovo	T14	2YK6GR
Mouse	Lenovo	3D optical Mouse	N/A

4.4 Measurement Uncertainty & Decision Rule

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	Conduction emission	$\pm 3.0\text{dB}$ (150kHz to 30MHz)
5	RF conducted power	$\pm 0.75\text{dB}$
6	RF power density	$\pm 2.84\text{dB}$
7	Conducted Spurious emissions	$\pm 0.75\text{dB}$
8	RF Radiated power	$\pm 3.3\text{dB}$ (9KHz-30MHz)
		$\pm 2.6\text{dB}$ (30MHz-1GHz)
		$\pm 2.7\text{dB}$ (1GHz-18GHz)
		$\pm 4.8\text{dB}$ (Above 18GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1\%$
12	Time	$\pm 3\%$
Remark: The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.		

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)
Pilot Free Trade Zone

No tests were sub-contracted.

Note:

- 1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
- 2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 6336.01.

- **FCC**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized as an accredited testing laboratory. Designation Number: CN1312.

- **ISED**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 27594

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
RF Conducted Test						
1	Shielding Room	Brilliant-emc	N/A	SUWI-04-08-01	11/9/2025	11/8/2028
2	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/20/2025	1/19/2026
3	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-15	11/21/2024	11/20/2025
4	MXG Vector signal genitor	KEYSIGHT	N5182B	SUWI-01-38-01	1/16/2025	1/15/2026
5	Signal Generator	ROHDE&SCHWARZ	SMW200A	SUWI-01-07-08	3/27/2025	3/26/2026
6	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-8-01	1/16/2025	1/15/2026
7	MXG Vector Signal Generator	ROHDE&SCHWARZ	SMR20	SUWI-01-33-01	3/17/2025	3/16/2026
8	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-13	5/8/2025	5/7/2026
9	Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	8/25/2025	8/24/2026
10	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	8/25/2025	8/24/2026
11	Power meter	Anritsu	ML2495A	SUWI-01-31-01	8/25/2025	8/24/2026
12	Pulse power sensor	Anritsu	MA2411B	SUWI-01-32-01	8/25/2025	8/24/2026
13	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/15/2025	1/14/2026
14	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2/13/2025	2/12/2026
15	Temperature Chamber	GIANT FORCE	ICT-017-40-SP-SD	SUWI-01-13-02	5/7/2025	5/6/2026
16	Measurement Software	TST	TST 272 V2.0	SUWI-03-55-03	NCR	NCR
RF Radiated Test						
1	Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/3/2023	6/2/2026
2	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/20/2025	1/19/2026
3	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-09	11/21/2024	11/20/2025
4	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-18-01	1/16/2025	1/15/2026
6	Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9168	SUWI-01-11-04	9/10/2025	9/9/2027
7	Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/7/2025	5/6/2027
8	Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/7/2025	5/6/2027
9	Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/7/2025	5/6/2027

10	Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	1/16/2025	1/15/2026
11	Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	1/16/2025	1/15/2026
12	Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	1/20/2025	1/19/2026
13	Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	8/25/2025	8/24/2026
14	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	8/25/2025	8/24/2026
15	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	8/26/2025	8/25/2026
16	Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-02	11/19/2024 11/19/2025	11/18/2025 11/18/2026
17	Signal Generator	ROHDE&SCHWARZ	SMB100A	SUWI-01-08-01	1/16/2025	1/15/2026
18	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/15/2025	1/14/2026
19	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/13/2025	2/12/2026
20	Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-06	NCR	NCR

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The module uses a dedicated RF connector not intended for user replacement, meeting §15.203. The best case gain of the antenna is 0.3dBi.

7 Radio Spectrum Matter Test Results

7.1 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 43 % RH

Atmospheric Pressure: 1024 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode(WIFI 2.4G)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

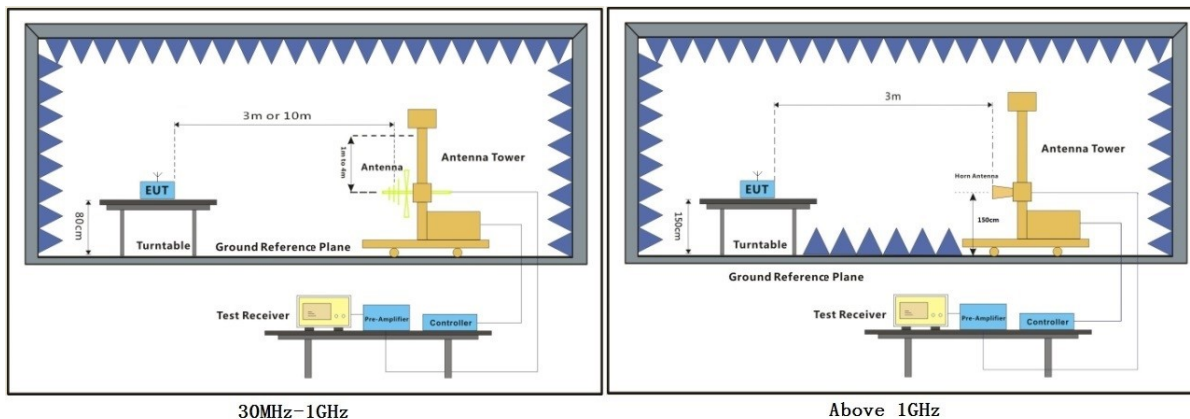

7.1.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.


Remark 4: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

000_11n(HT40)_TX_CH_03_Horizontal_Peak

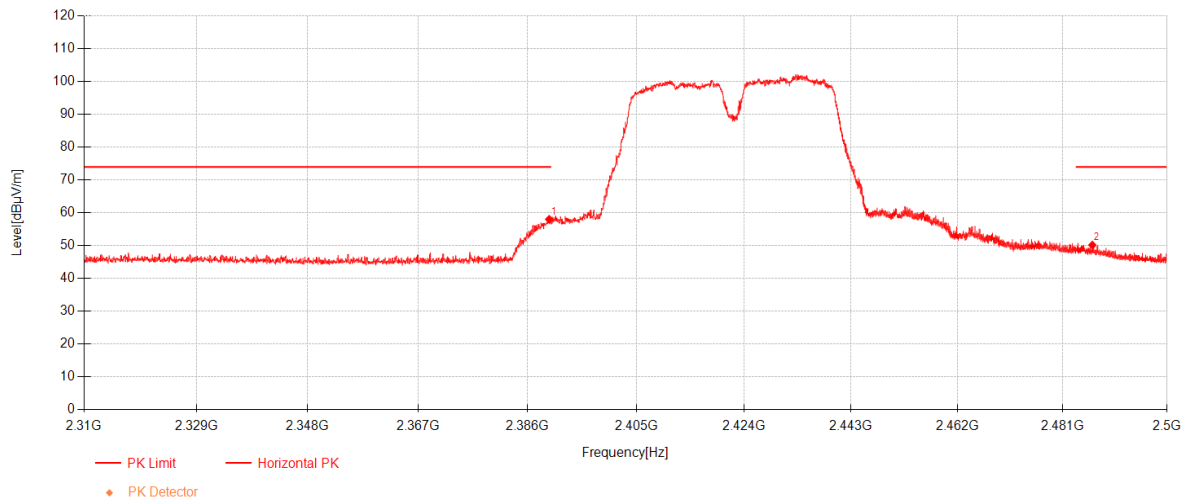


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.755	54.54	27.00	-23.52	58.02	74.00	15.98	Horizontal
2	2486.395	46.14	27.18	-23.17	50.15	74.00	23.85	Horizontal

001_11n(HT40)_TX_CH_03_Horizontal_Average

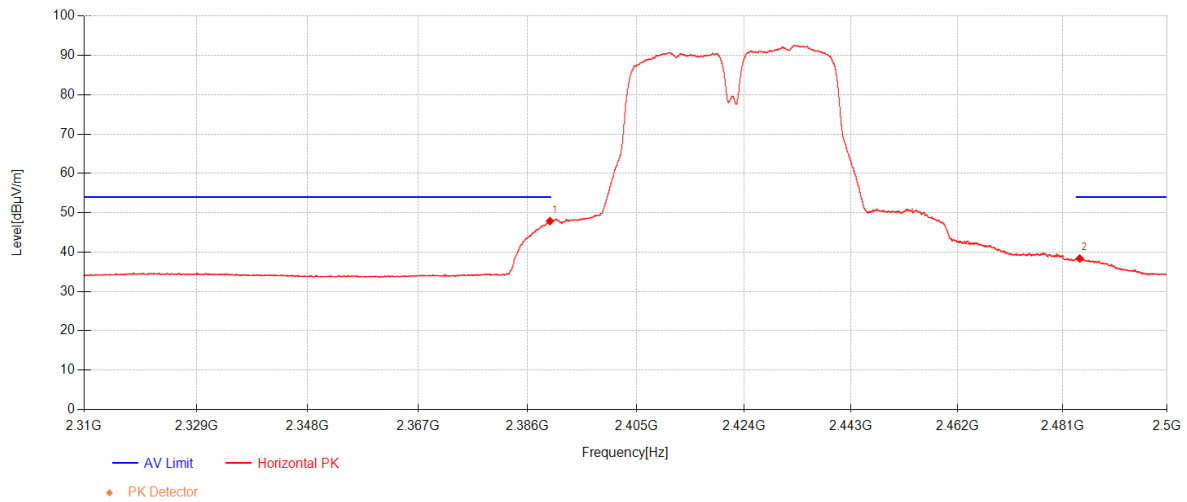


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.885	44.39	27.00	-23.52	47.87	54.00	6.13	Horizontal
2	2484.115	34.37	27.17	-23.18	38.36	54.00	15.64	Horizontal

002_11n(HT40)_TX_CH_03_Vertical_Peak

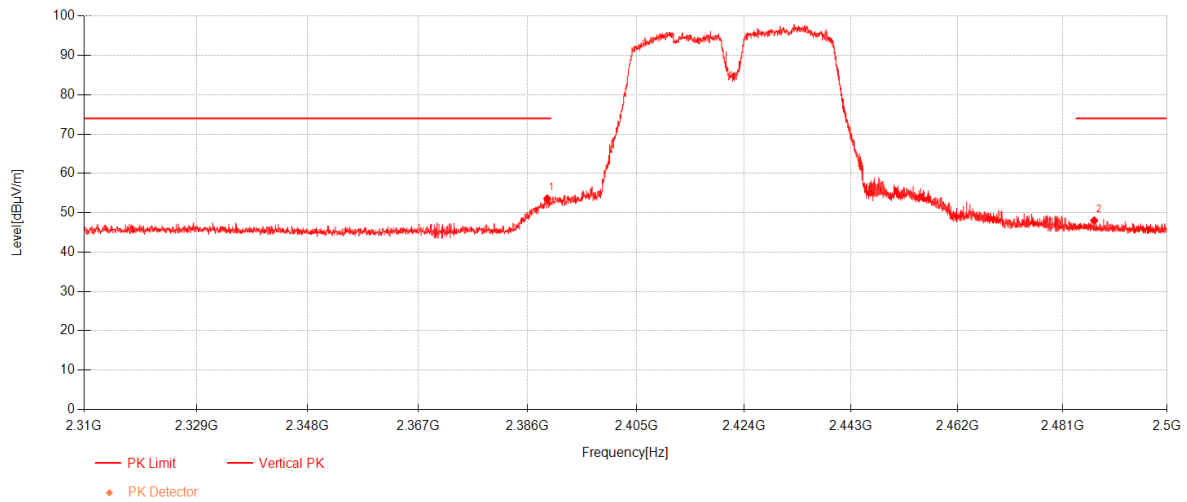

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.43	50.13	27.00	-23.52	53.61	74.00	20.39	Vertical
2	2486.74	44.02	27.18	-23.17	48.03	74.00	25.97	Vertical

003_11n(HT40)_TX_CH_03_Vertical_Average

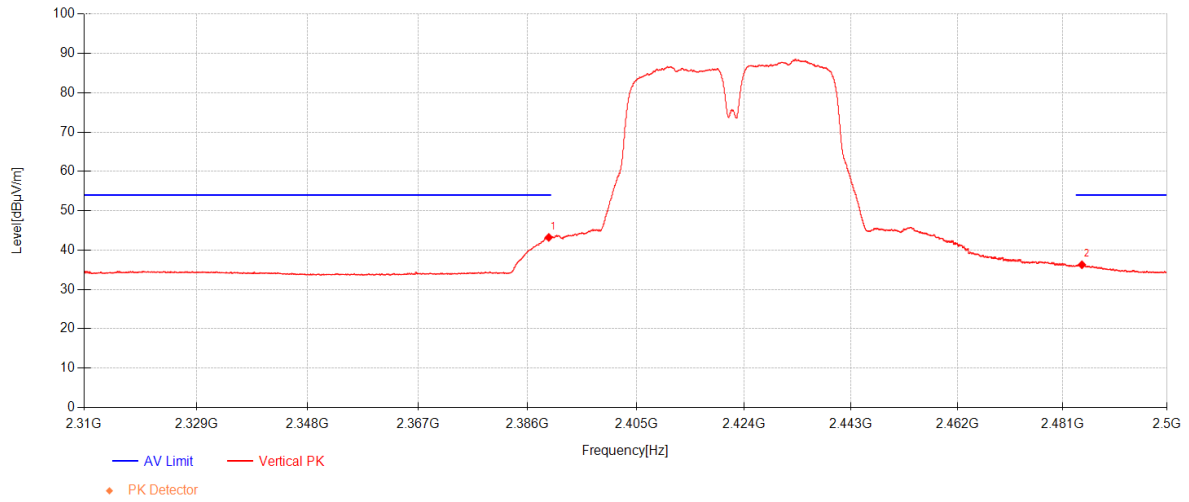

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.69	39.75	27.00	-23.52	43.23	54.00	10.77	Vertical
2	2484.505	32.27	27.17	-23.18	36.27	54.00	17.73	Vertical

7.2 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 44 % RH

Atmospheric Pressure: 1024 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode(WIFI 2.4G)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the reporting.

7.2.3 Test Setup Diagram

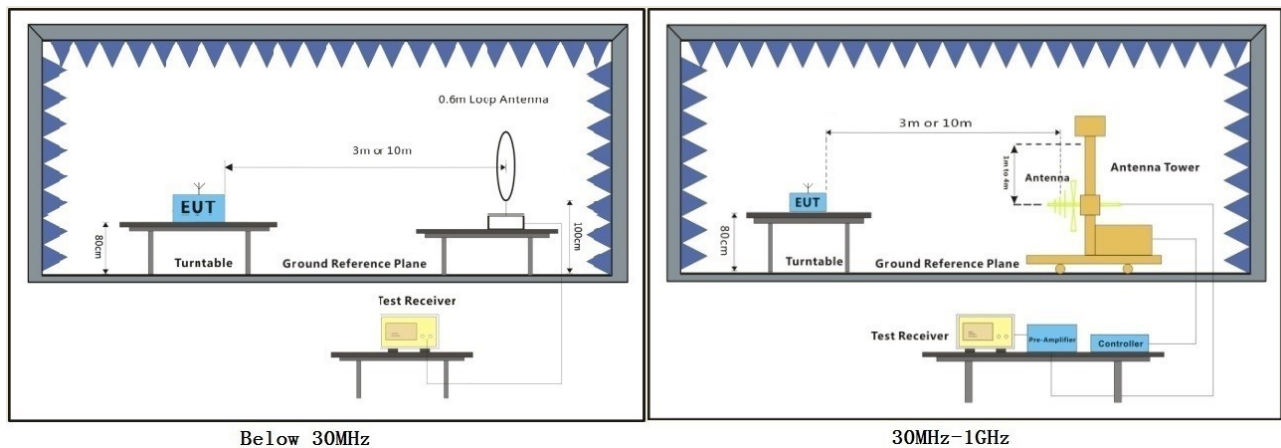

Below 30MHz

30MHz-1GHz


7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


11n(HT40)_TX_CH_03_Coaxial

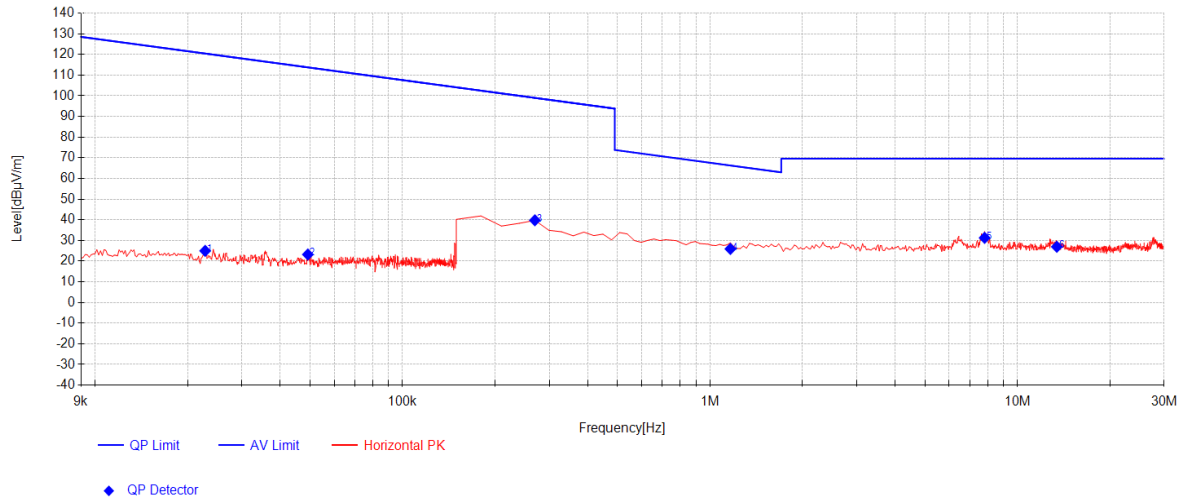

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
4	1.1649	5.37	20.08	0.45	25.91	66.28	40.37	100	50	Coaxial
5	7.8214	10.48	20.22	0.58	31.28	69.54	38.26	100	210	Coaxial
6	13.4332	6.22	20.06	0.69	26.96	69.54	42.58	100	30	Coaxial
NO.	Frequency [MHz]	AV Reading [dBμV]	AF [dB/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	0.0228	4.83	19.70	0.43	24.96	120.44	95.48	100	220	Coaxial
2	0.0492	2.99	19.80	0.43	23.22	113.76	90.54	100	200	Coaxial
3	0.2694	19.39	19.93	0.43	39.76	98.99	59.23	100	50	Coaxial


11n(HT40)_TX_CH_03_Coplanar

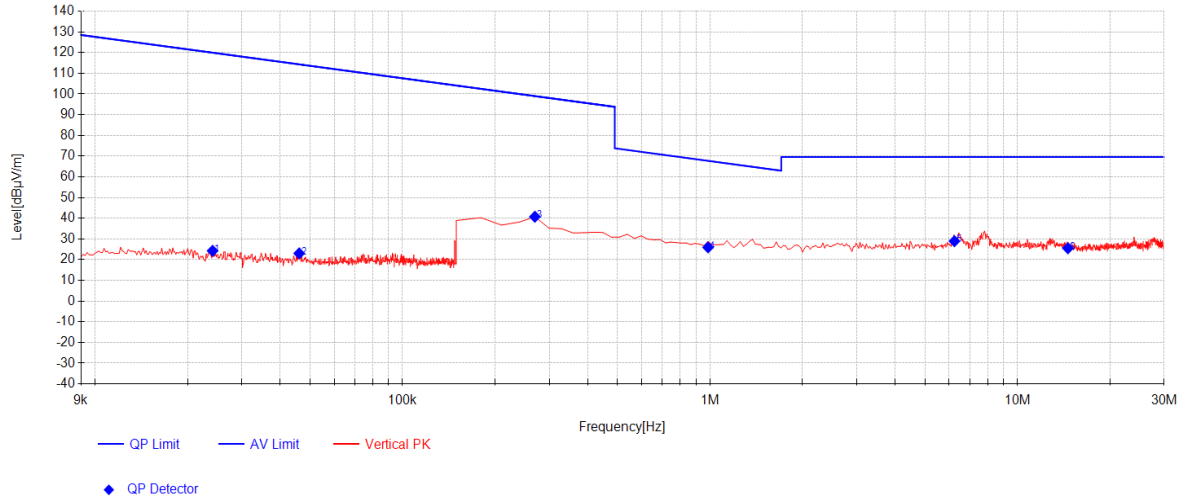

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
4	0.9858	5.38	20.10	0.45	25.93	67.73	41.80	100	90	Coplanar
5	6.2394	8.11	20.26	0.55	28.92	69.54	40.62	100	210	Coplanar
6	14.5974	4.88	19.94	0.71	25.53	69.54	44.01	100	130	Coplanar
NO.	Frequency [MHz]	AV Reading [dBμV]	AF [dB/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	0.0241	4.13	19.70	0.43	24.26	119.96	95.70	100	210	Coplanar
2	0.0461	2.81	19.78	0.43	23.02	114.32	91.30	100	220	Coplanar
3	0.2694	20.35	19.93	0.43	40.72	98.99	58.27	100	350	Coplanar


11n(HT40)_TX_CH_03_Horizontal

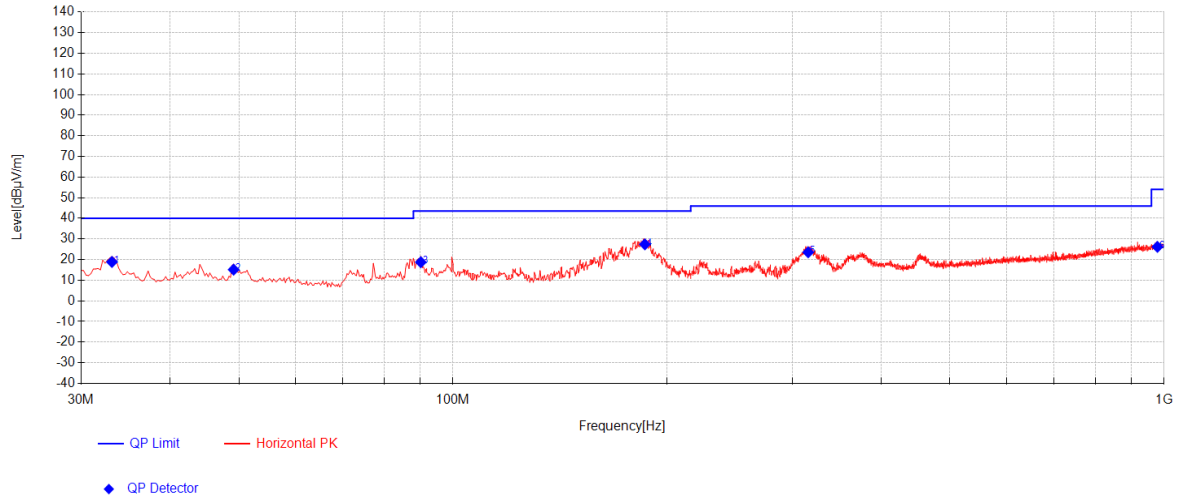

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.1525	40.15	12.69	-33.98	18.86	40.00	21.14	138	72	Horizontal
2	49.1575	35.37	13.47	-33.70	15.14	40.00	24.86	176	83	Horizontal
3	90.14	43.09	8.90	-33.26	18.74	43.50	24.76	165	237	Horizontal
4	186.17	49.31	10.42	-32.35	27.39	43.50	16.11	182	256	Horizontal
5	315.9075	41.83	13.28	-31.54	23.56	46.00	22.44	143	81	Horizontal
6	978.66	29.83	24.33	-27.98	26.18	54.00	27.82	189	62	Horizontal

001_11n(HT40)_TX_CH_03_Veritical

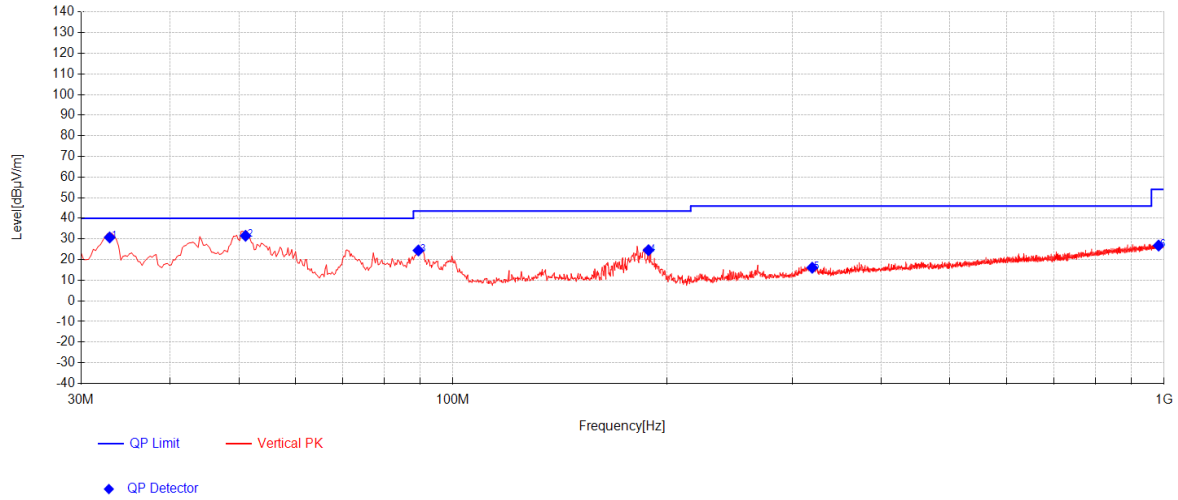

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.91	52.05	12.67	-33.98	30.74	40.00	9.26	163	341	Vertical
2	51.0975	51.85	13.37	-33.68	31.54	40.00	8.46	152	113	Vertical
3	89.4125	48.77	8.92	-33.26	24.43	43.50	19.07	178	166	Vertical
4	188.3525	46.58	10.32	-32.34	24.57	43.50	18.93	143	328	Vertical
5	320.03	34.19	13.40	-31.53	16.06	46.00	29.94	111	328	Vertical
6	982.2975	30.42	24.36	-27.96	26.82	54.00	27.18	143	347	Vertical

7.3 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 44 % RH

Atmospheric Pressure: 1024 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode(WIFI 2.4G)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

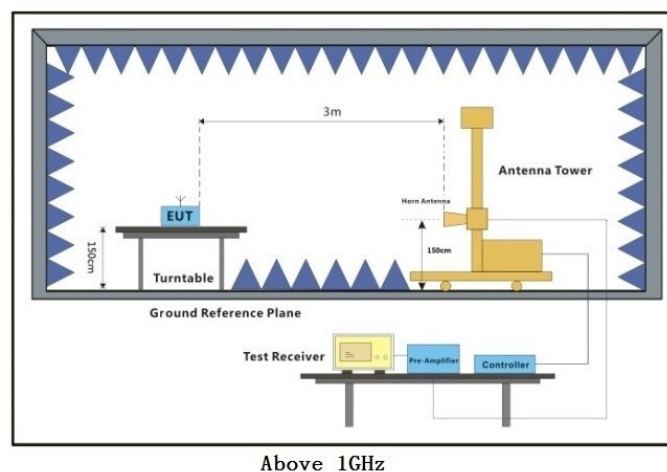


7.3.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
- 4:For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle<98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

11n(HT40)_TX_CH_03_Horizontal

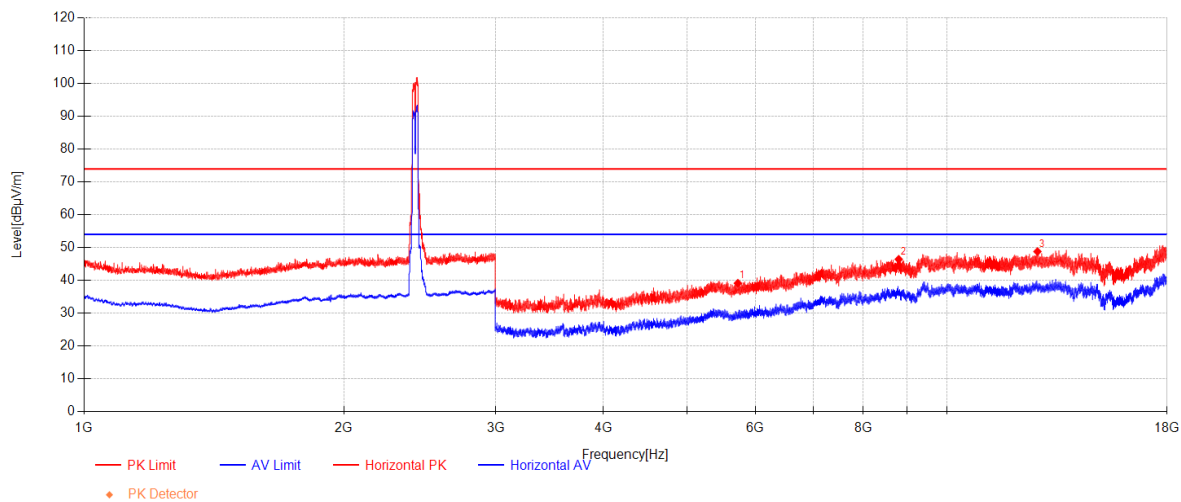


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5724.75	53.96	32.69	-47.53	39.12	74.00	34.88	Horizontal
2	8794.5	53.23	37.17	-44.00	46.41	74.00	27.59	Horizontal
3	12735.375	49.10	38.96	-39.28	48.78	74.00	25.22	Horizontal

11n(HT40)_TX_CH_03_Vertical

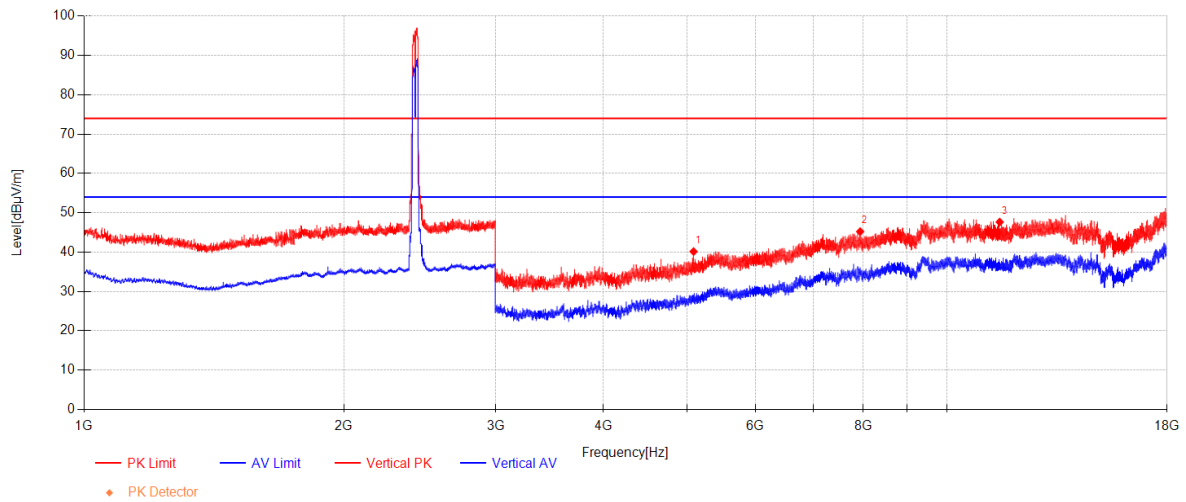


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5087.25	56.54	31.44	-47.84	40.14	74.00	33.86	Vertical
2	7934.625	53.95	36.31	-45.05	45.21	74.00	28.79	Vertical
3	11514.375	48.22	39.45	-40.02	47.65	74.00	26.35	Vertical

11n(HT40)_TX_CH_03_Horizontal

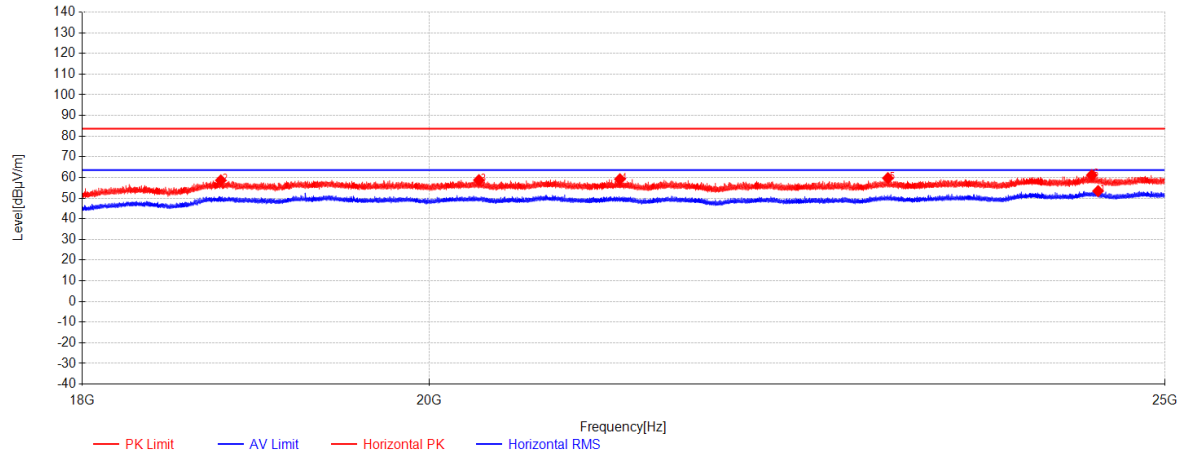

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	24496.875	38.37	39.40	-24.33	53.44	63.54	7.10	Horizontal
2	18773.675	48.82	38.12	-28.33	58.61	83.54	21.93	Horizontal
3	20302.65	47.46	38.55	-27.30	58.71	83.54	21.83	Horizontal
4	21189.55	47.33	38.07	-26.24	59.16	83.54	21.38	Horizontal
5	22984	46.54	38.09	-24.95	59.68	83.54	20.86	Horizontal
6	24450.325	45.83	39.39	-24.12	61.10	83.54	19.44	Horizontal

11n(HT40)_TX_CH_03_ Vertical

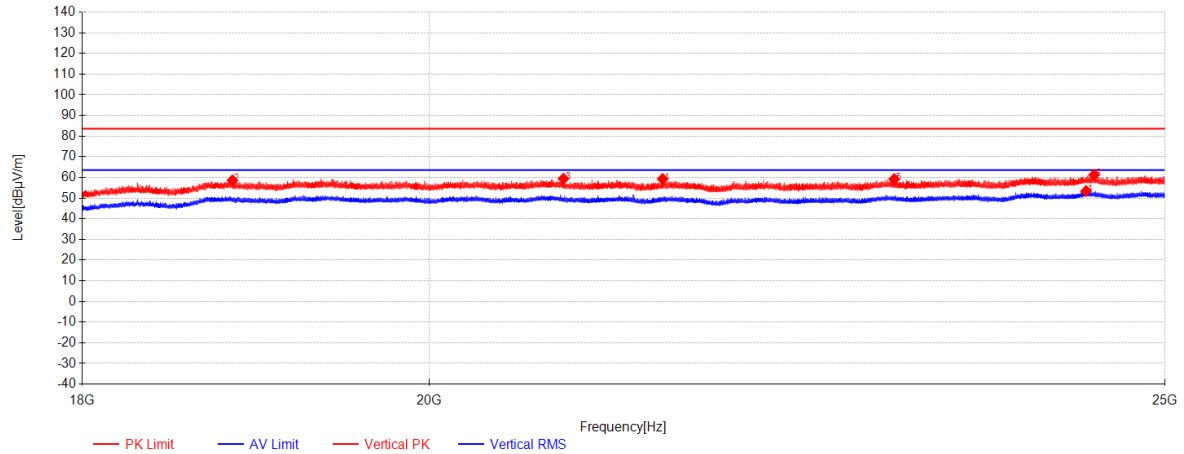

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	24408.325	38.03	39.38	-23.93	53.48	63.54	7.06	Vertical
2	18839.825	48.92	38.26	-28.58	58.60	83.54	21.94	Vertical
3	20829.75	47.70	38.29	-26.61	59.38	83.54	21.16	Vertical
4	21465.7	47.44	37.87	-26.04	59.27	83.54	21.27	Vertical
5	23027.75	46.19	38.13	-25.12	59.20	83.54	21.34	Vertical
6	24466.6	46.06	39.39	-24.19	61.26	83.54	19.28	Vertical

7.4 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2020) Section 11.9.2

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 44 % RH

Atmospheric Pressure: 1024 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode(WIFI 2.4G)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

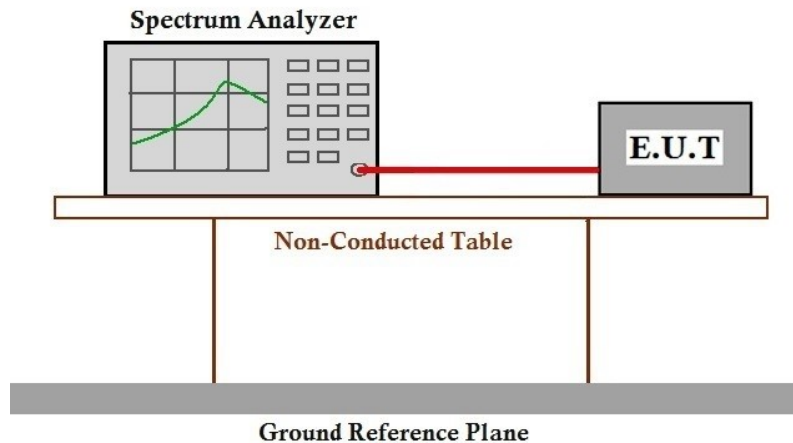

7.4.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.5 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2020) Section 11.8.1

Limit:

≥500 kHz

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 44 % RH

Atmospheric Pressure: 1024 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode(WIFI 2.4G)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

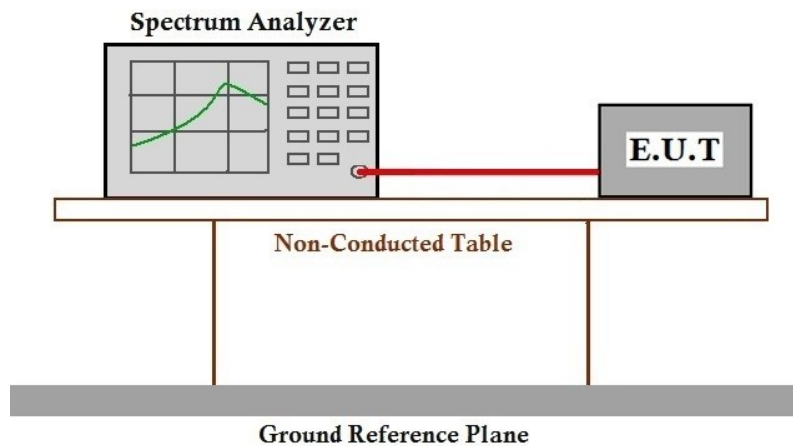

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SUCR2510001034AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix_Photographs of EUT Constructional Details for SUCR2510001034AT

10 Appendix

1. Maximum Conducted Output Power

1.1 Test Result

1.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
802.11b	SISO	2412	18.23	≤ 30	Pass
		2437	18.66	≤ 30	Pass
		2462	18.6	≤ 30	Pass
802.11g	SISO	2412	19.22	≤ 30	Pass
		2437	19.92	≤ 30	Pass
		2462	19.63	≤ 30	Pass
802.11n (HT20)	SISO	2412	18.2	≤ 30	Pass
		2437	18.03	≤ 30	Pass
		2462	18.24	≤ 30	Pass
802.11n (HT40)	SISO	2422	19.12	≤ 30	Pass
		2437	19.44	≤ 30	Pass
		2452	19.54	≤ 30	Pass

Note1: Antenna Gain: Ant1: 0.30dBi;

1. Bandwidth

1.1 Test Result

1.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
802.11b	SISO	2412	1	13.796	/	Pass
		2437	1	13.812	/	Pass
		2462	1	13.690	/	Pass
802.11g	SISO	2412	1	17.323	/	Pass
		2437	1	17.257	/	Pass
		2462	1	17.202	/	Pass
802.11n (HT20)	SISO	2412	1	18.499	/	Pass
		2437	1	18.410	/	Pass
		2462	1	18.374	/	Pass
802.11n (HT40)	SISO	2422	1	36.571	/	Pass
		2437	1	36.547	/	Pass
		2452	1	36.621	/	Pass


1.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11b	SISO	2412	1	8.737	≥ 0.5	Pass
		2437	1	9.143	≥ 0.5	Pass
		2462	1	9.089	≥ 0.5	Pass
802.11g	SISO	2412	1	16.497	≥ 0.5	Pass
		2437	1	16.469	≥ 0.5	Pass
		2462	1	16.444	≥ 0.5	Pass
802.11n (HT20)	SISO	2412	1	17.583	≥ 0.5	Pass
		2437	1	17.588	≥ 0.5	Pass
		2462	1	17.471	≥ 0.5	Pass
802.11n (HT40)	SISO	2422	1	35.977	≥ 0.5	Pass
		2437	1	36.093	≥ 0.5	Pass
		2452	1	36.158	≥ 0.5	Pass


1.2 Test Graph

1.2.1 OBW

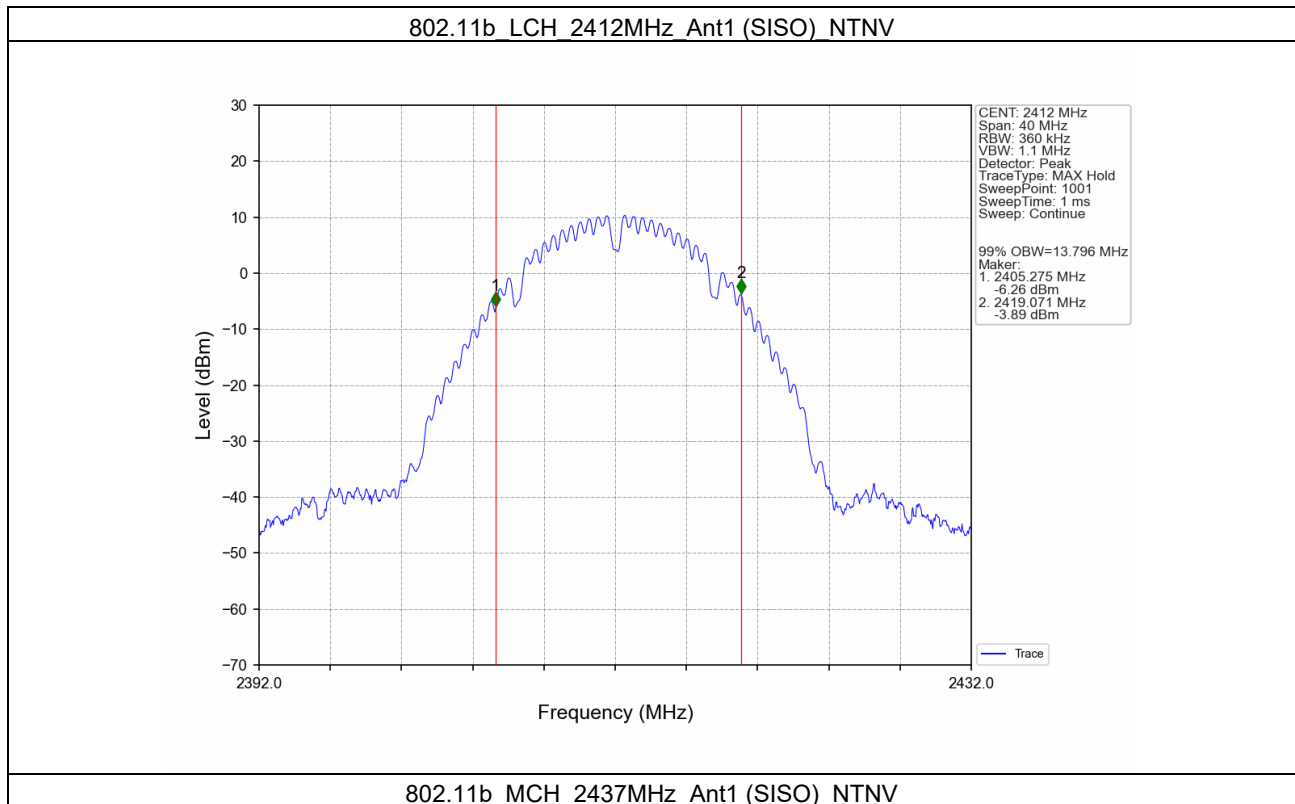


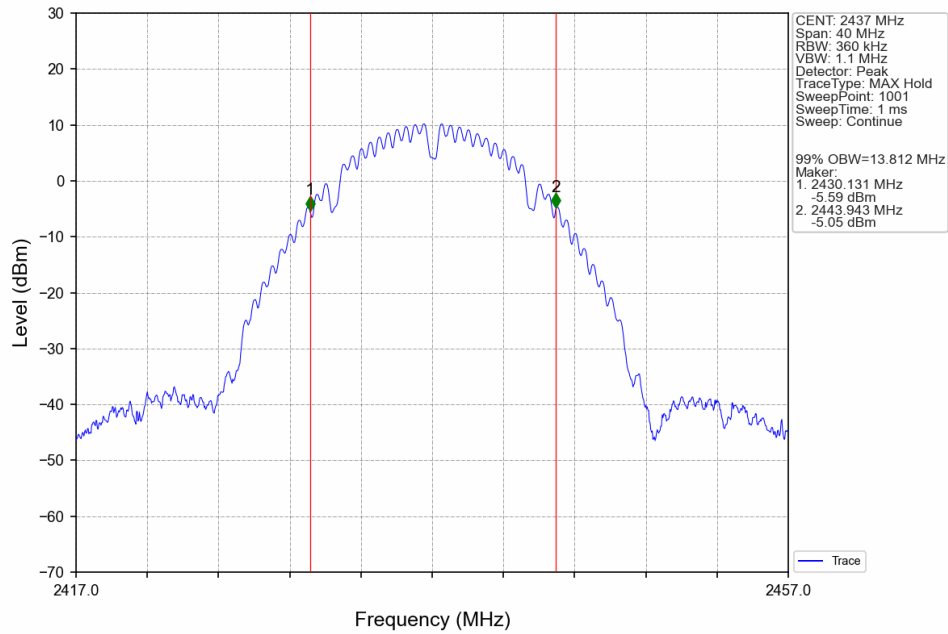


802.11b HCH 2462MHz_Ant1 (SISO)_NTNV

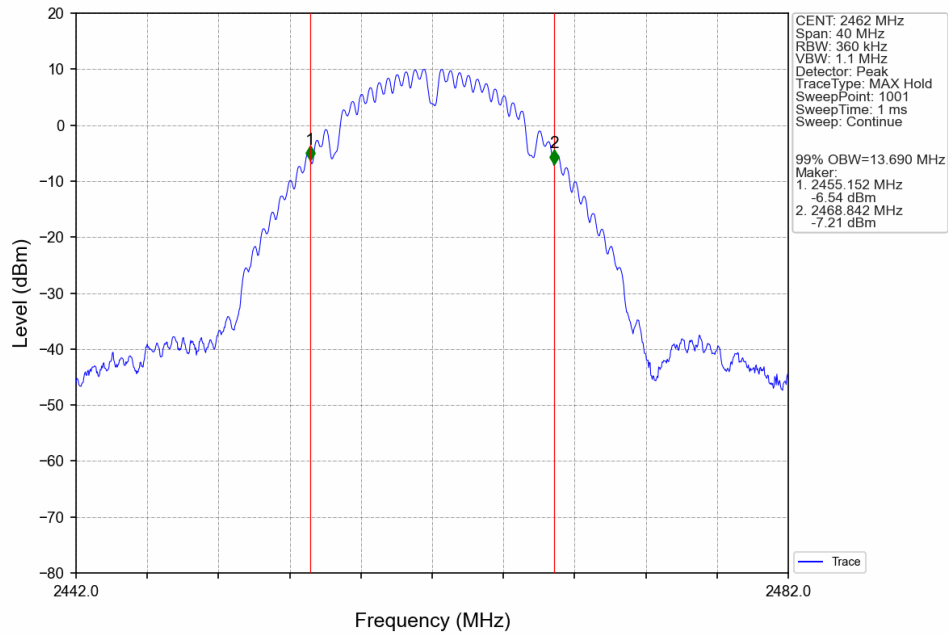


802.11g LCH 2412MHz_Ant1 (SISO)_NTNV

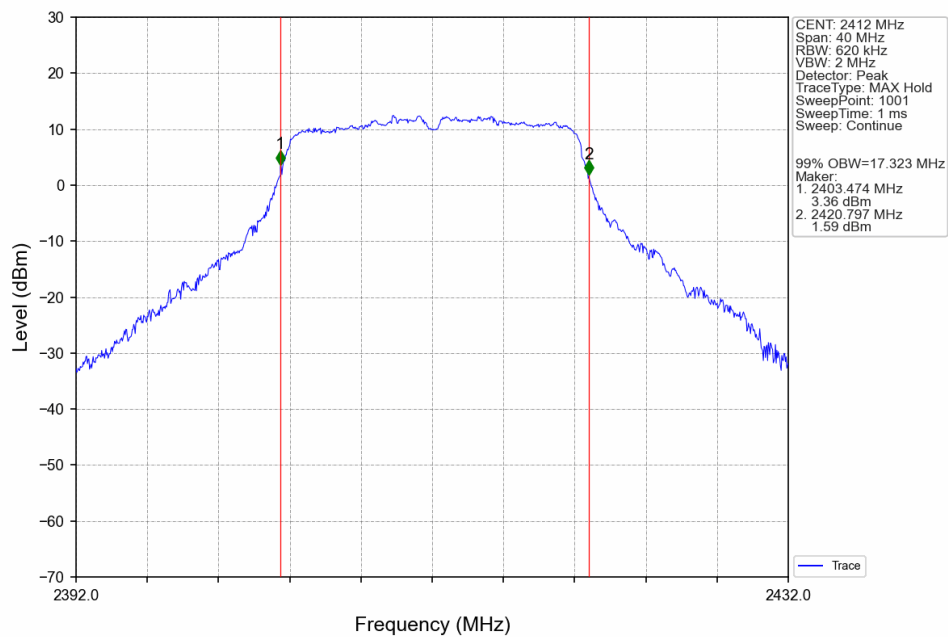


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

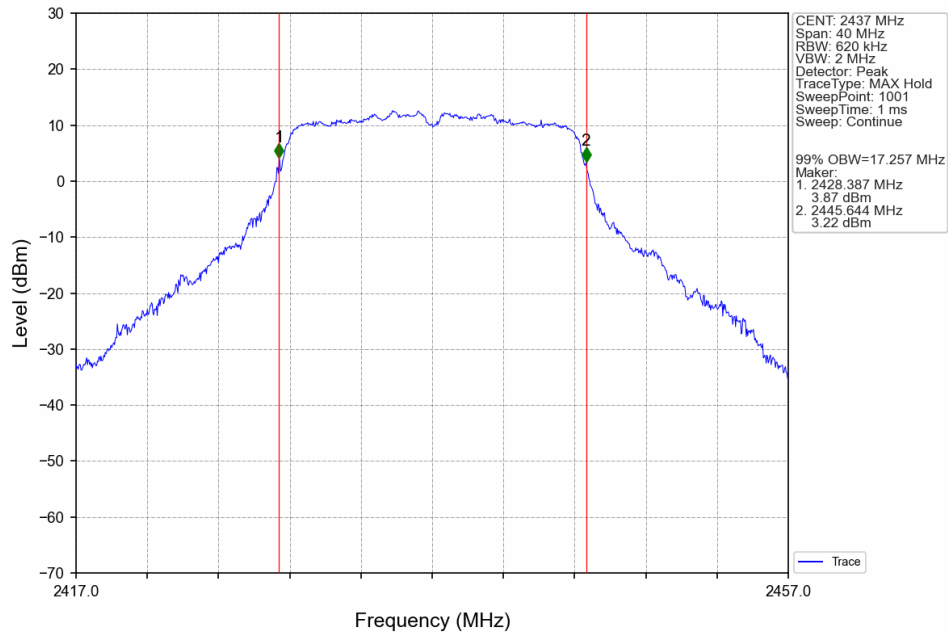


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

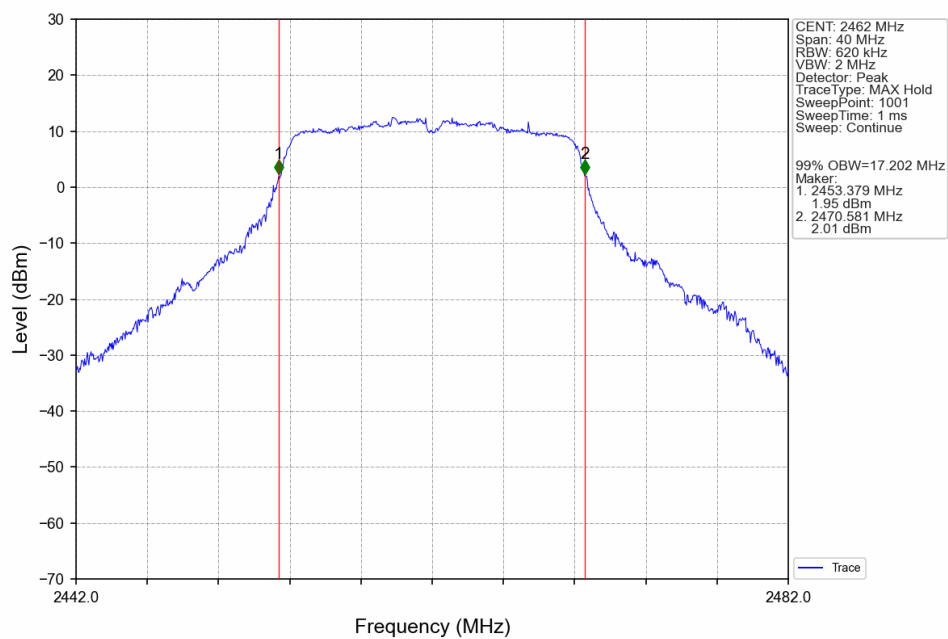


802.11n(HT20) LCH_2412MHz_Ant1 (SISO) NTN

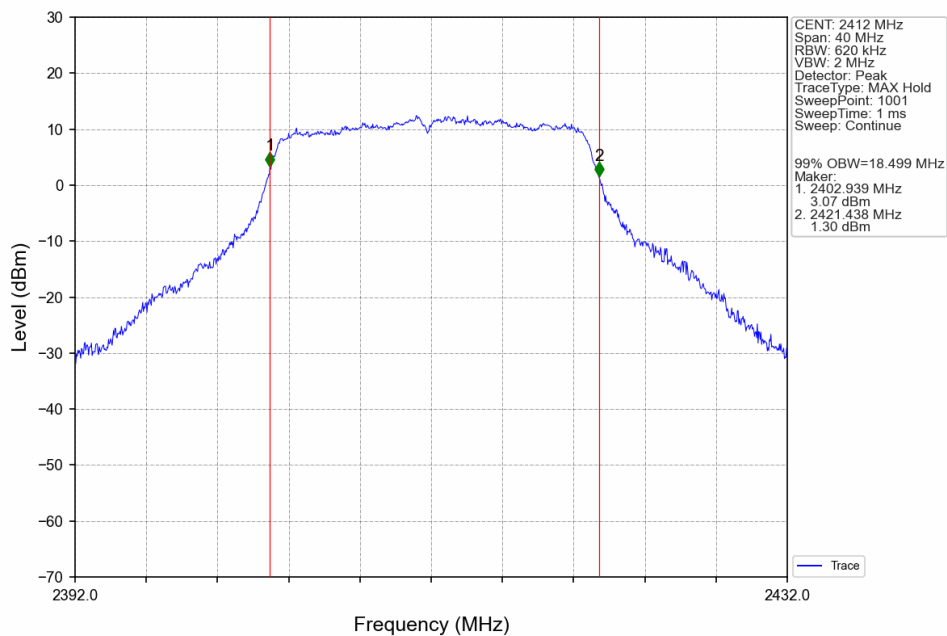


802.11n(HT20) MCH_2437MHz_Ant1 (SISO) NTN

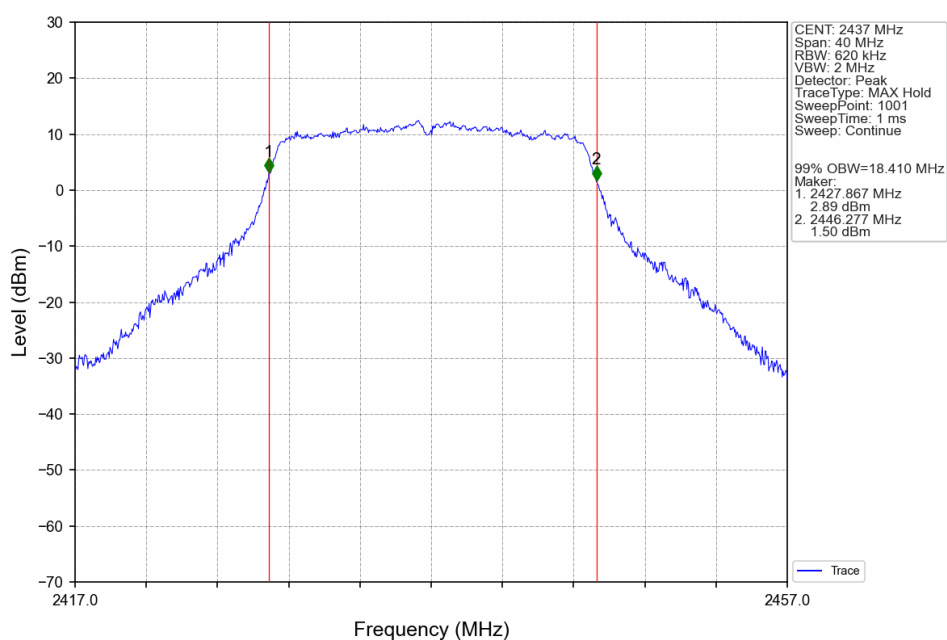


802.11n(HT20) HCH 2462MHz Ant1 (SISO) NTN

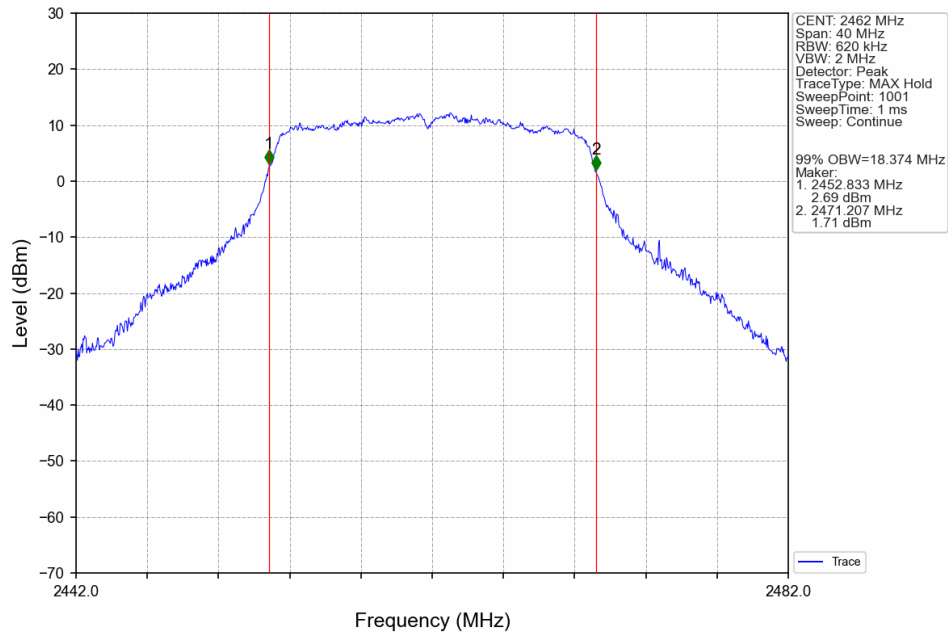


802.11n(HT40) LCH 2422MHz Ant1 (SISO) NTN

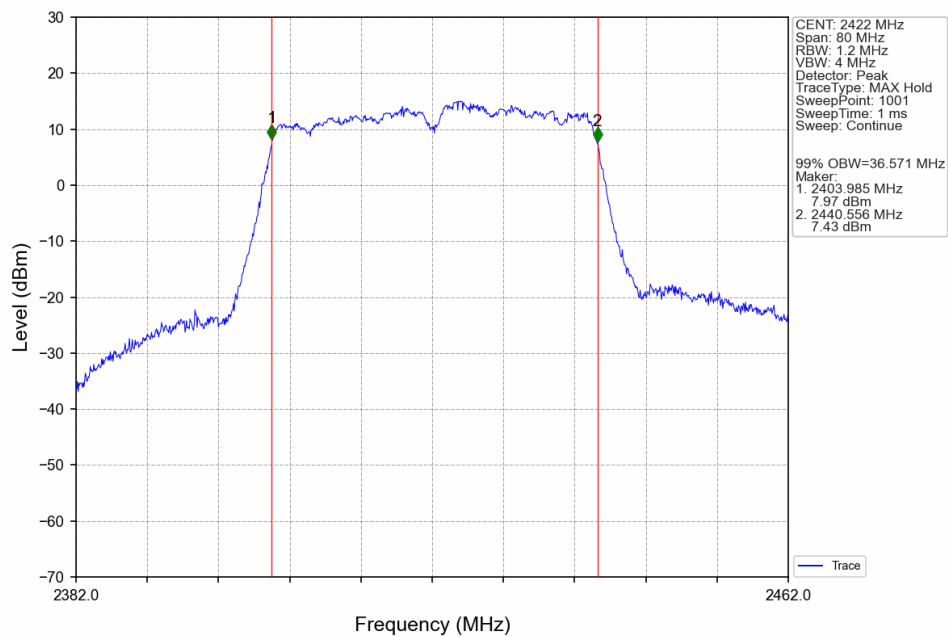

802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

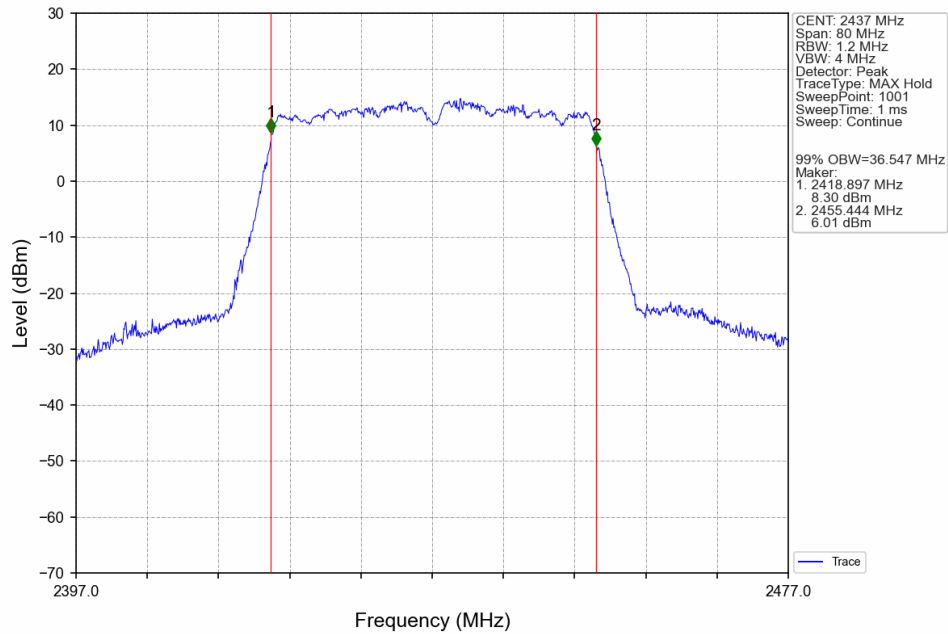


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

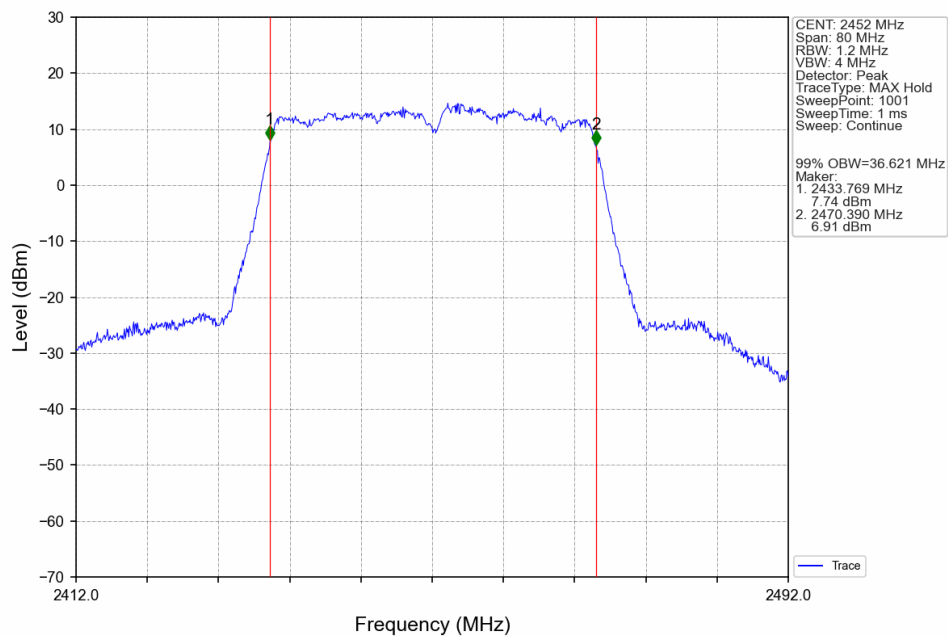


1.2.2 6dB BW


802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

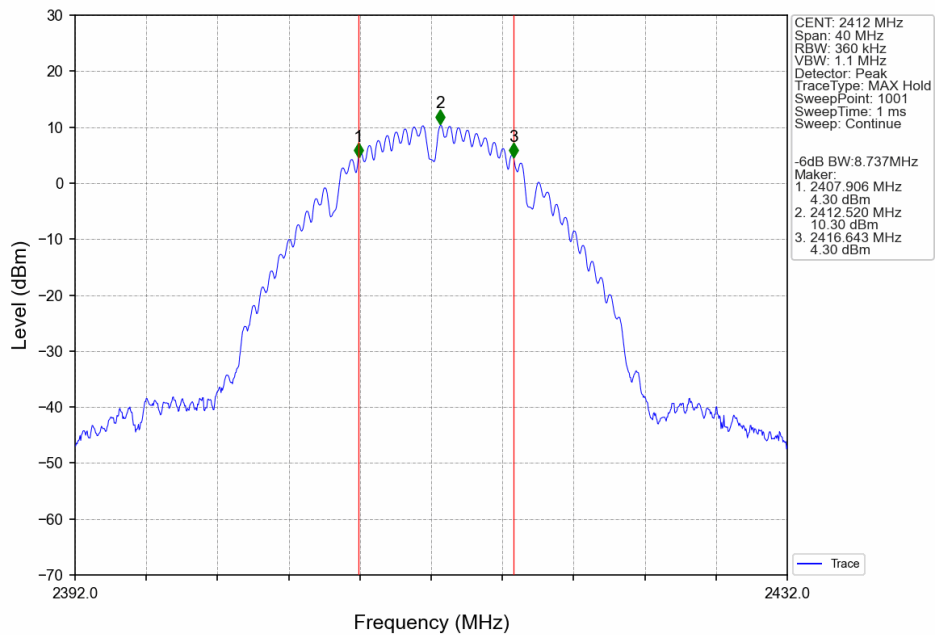


802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

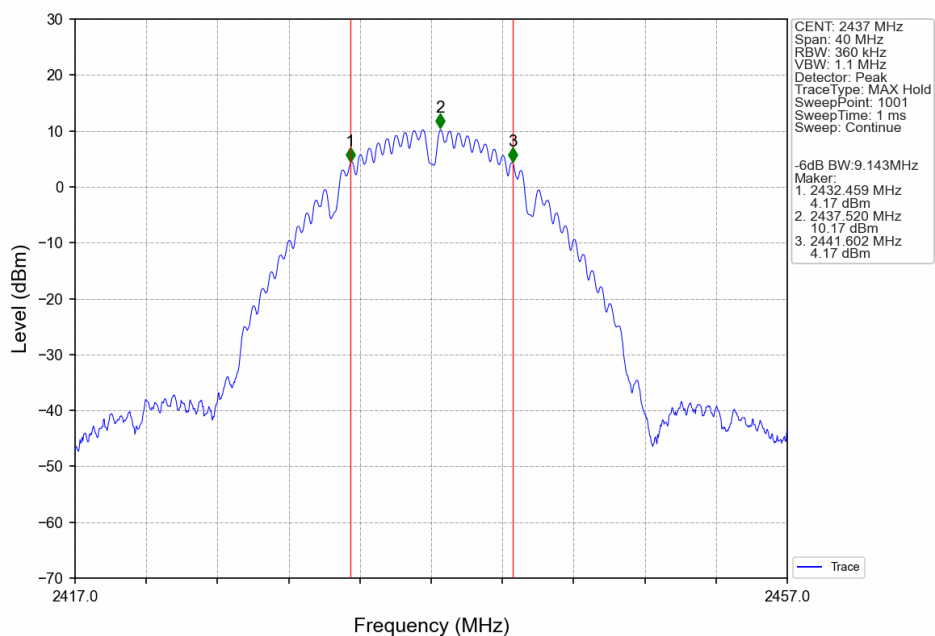


802.11b HCH 2462MHz Ant1 (SISO) NTN

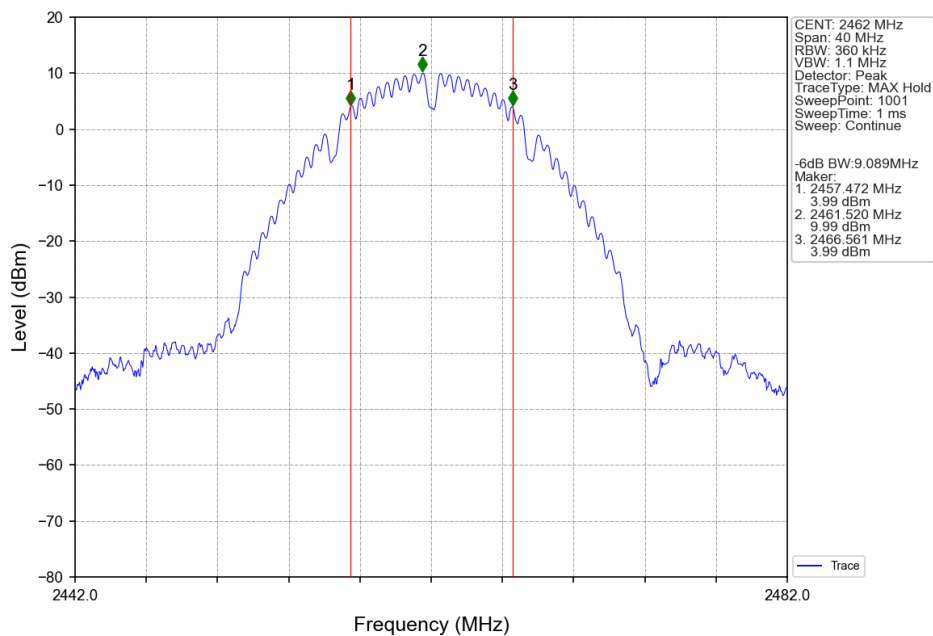


802.11g LCH 2412MHz Ant1 (SISO) NTN

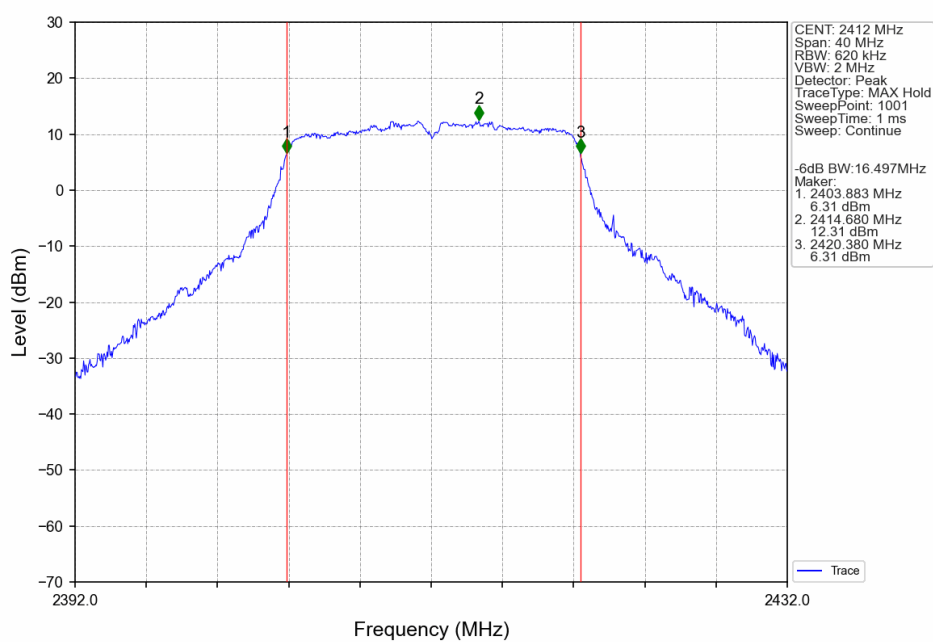


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

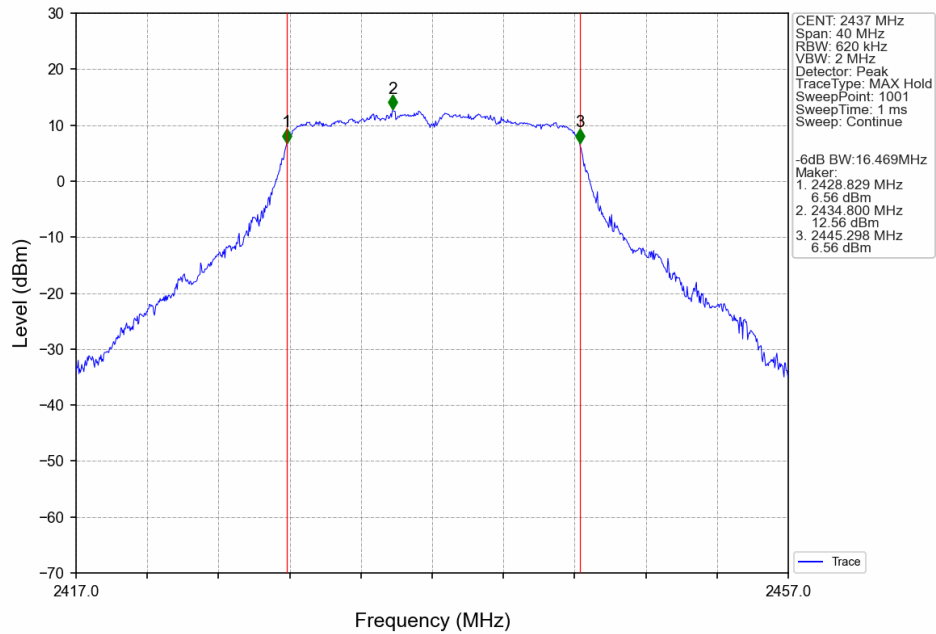


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

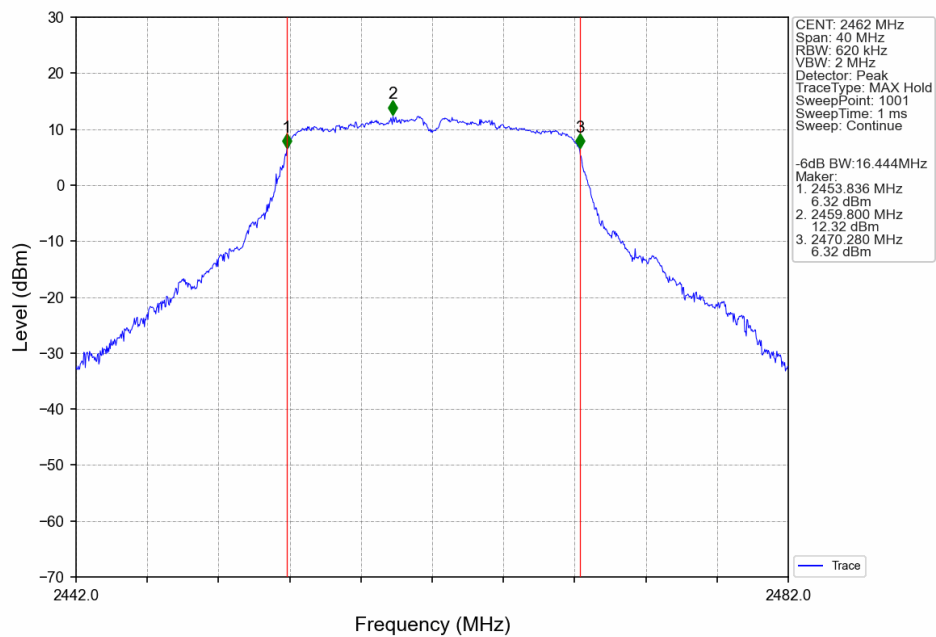


802.11n(HT20) LCH_2412MHz_Ant1 (SISO) NTN

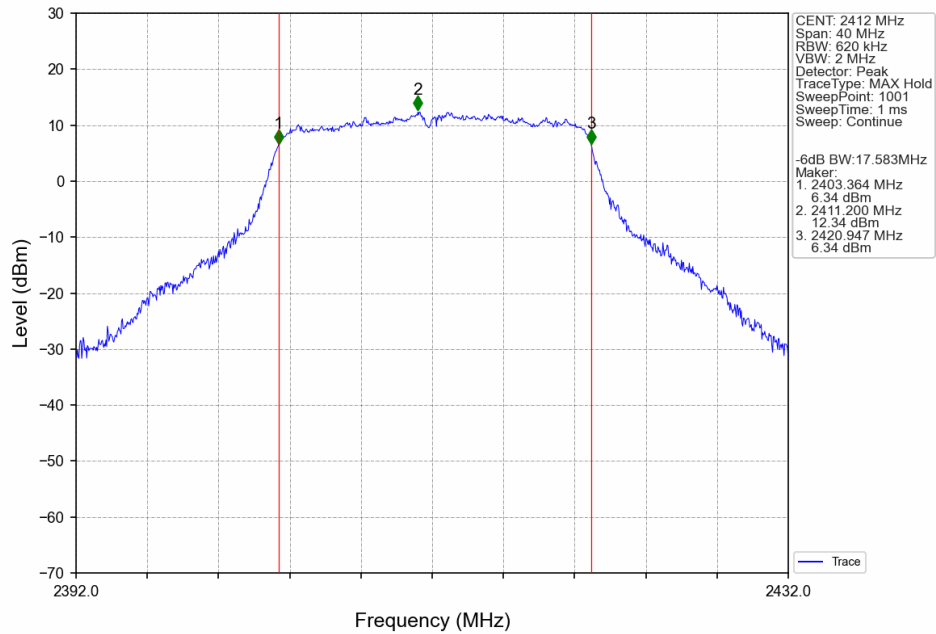


802.11n(HT20) MCH_2437MHz_Ant1 (SISO) NTN

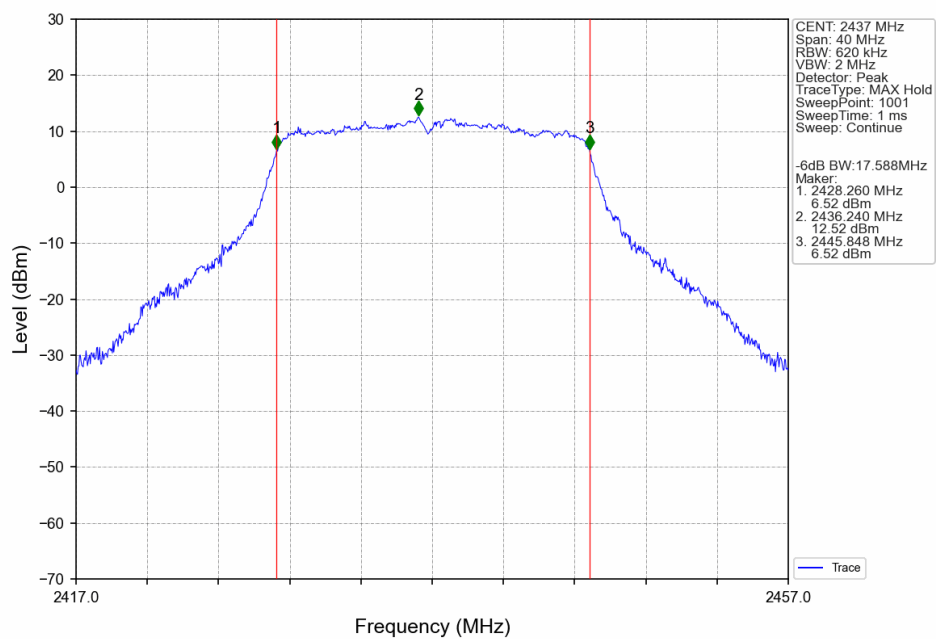


802.11n(HT20) HCH 2462MHz Ant1 (SISO) NTN

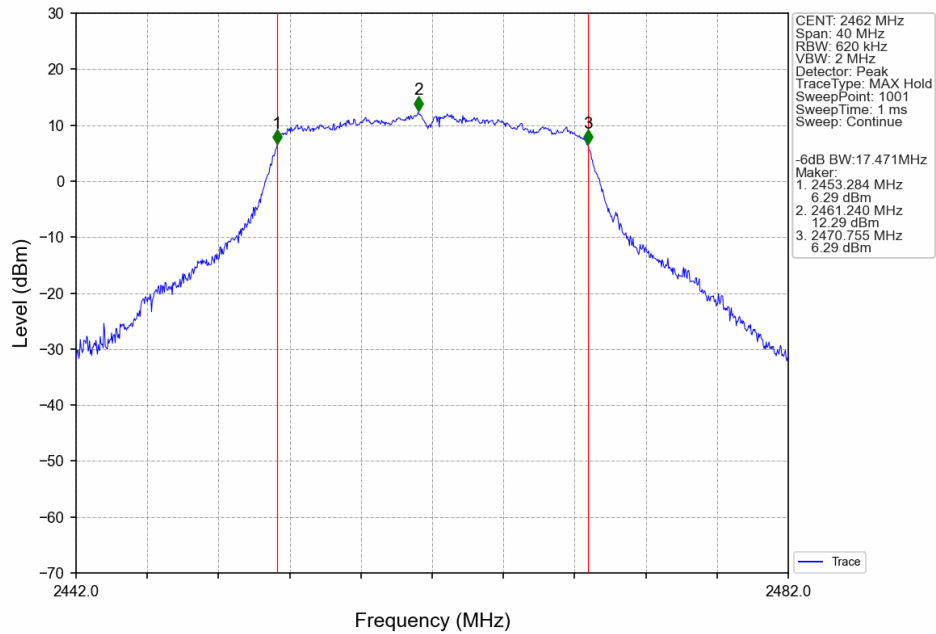


802.11n(HT40) LCH 2422MHz Ant1 (SISO) NTN

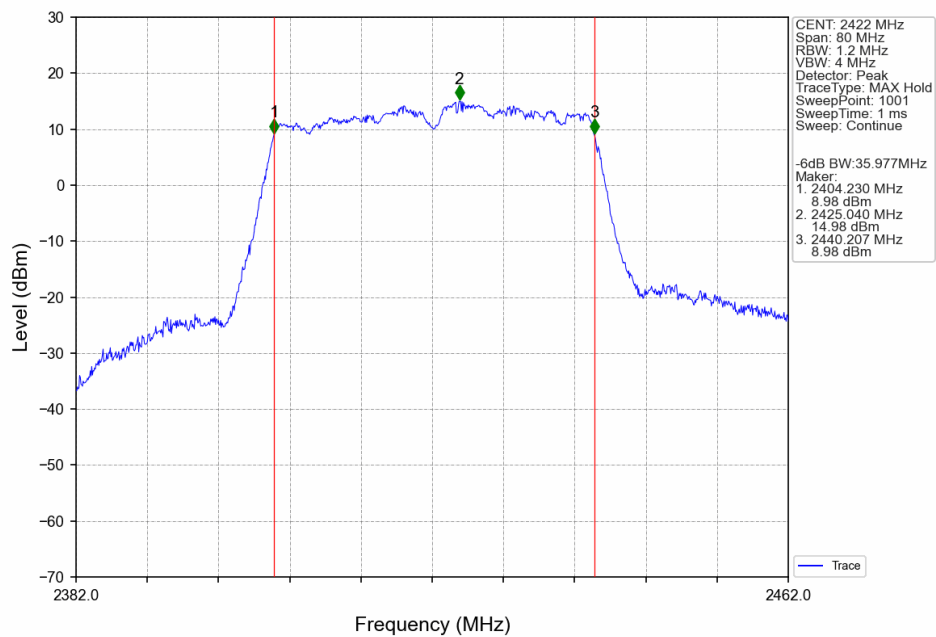

802.11n(HT40) MCH_2437MHz_Ant1 (SISO) NTN

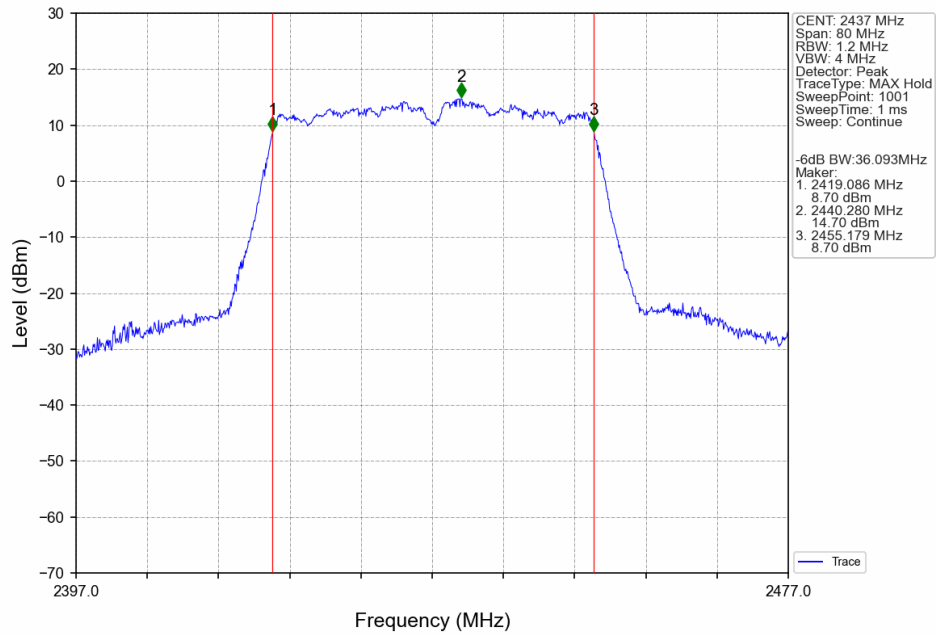

802.11n(HT40) HCH_2452MHz_Ant1 (SISO) NTN

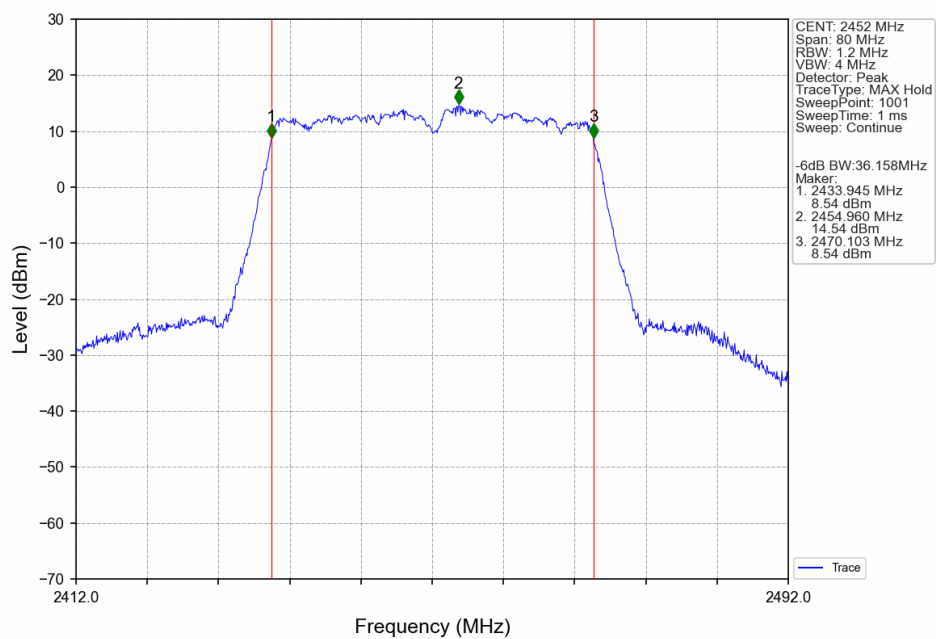

- End of the Report -