


Test Mode	NSA 7A n71A	Test Date	2026/1/21
Test Channel	CH136100	Polarization	Vertical
Temp	23°C	Hum.	67%

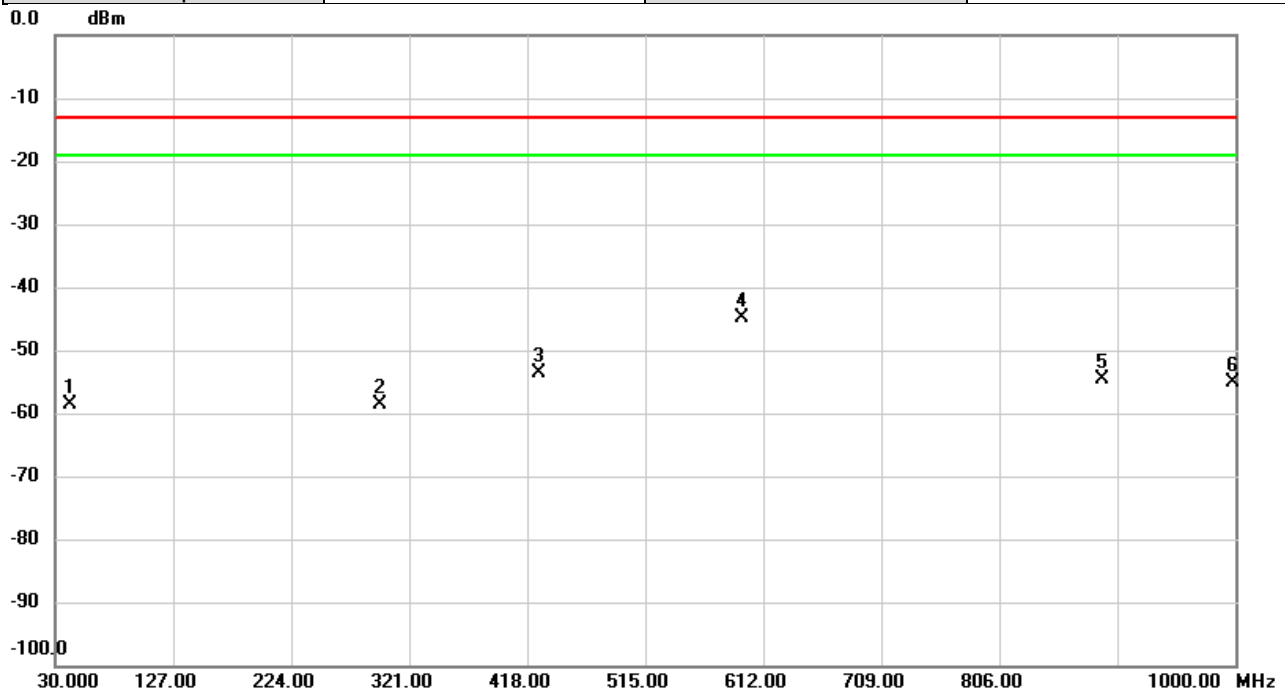


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		41.9957	-51.23	-7.34	-58.57	-13.00	-45.57	peak	
2		297.0087	-55.18	-3.35	-58.53	-13.00	-45.53	peak	
3		427.7000	-51.81	-1.74	-53.55	-13.00	-40.55	peak	
4	*	593.9903	-48.17	3.22	-44.95	-13.00	-31.95	peak	
5		891.0367	-61.05	6.39	-54.66	-13.00	-41.66	peak	
6		997.8013	-62.44	7.39	-55.05	-13.00	-42.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 7A n71A	Test Date	2026/1/21
Test Channel	CH136100	Polarization	Horizontal
Temp	23°C	Hum.	67%

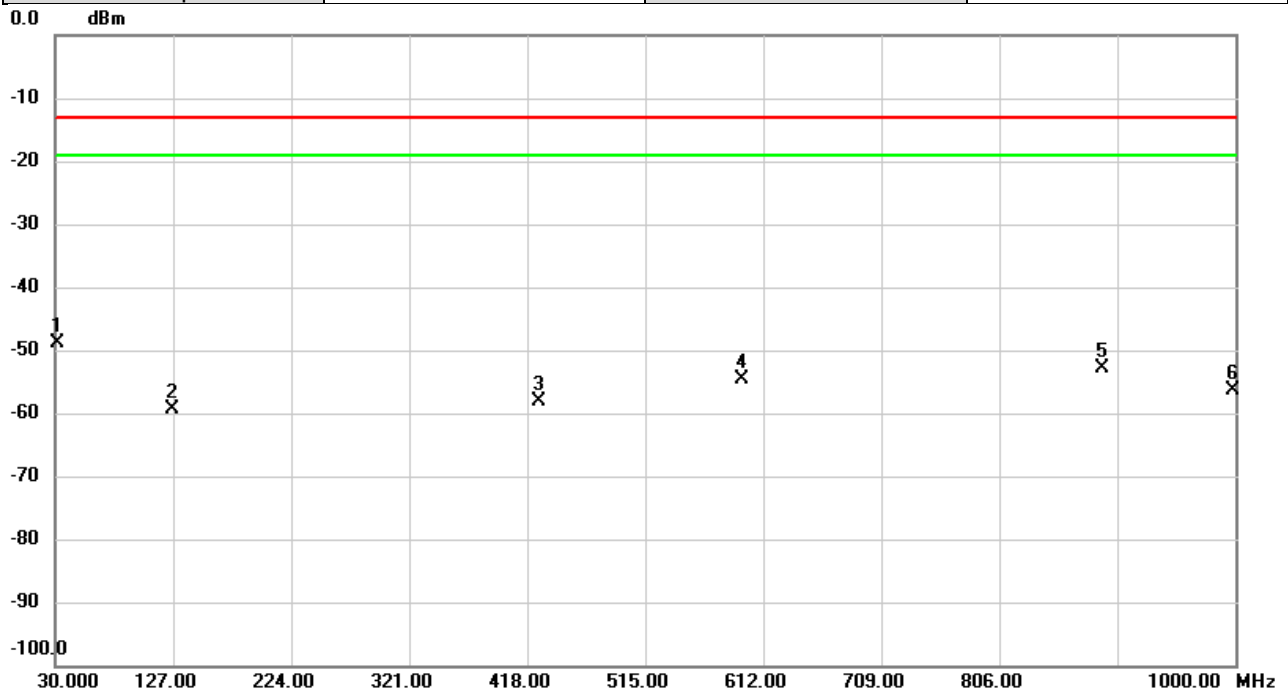


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	32.1340	-51.63	2.74	-48.89	-13.00	-35.89	peak	
2		126.0946	-52.36	-6.91	-59.27	-13.00	-46.27	peak	
3		427.5383	-55.84	-2.17	-58.01	-13.00	-45.01	peak	
4		593.9903	-54.72	0.12	-54.60	-13.00	-41.60	peak	
5		891.0043	-57.63	4.74	-52.89	-13.00	-39.89	peak	
6		997.5103	-62.48	6.15	-56.33	-13.00	-43.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 7A_n71A	Test Date	2026/1/20
Test Channel	CH134600	Polarization	Vertical
Temp	25°C	Hum.	64%

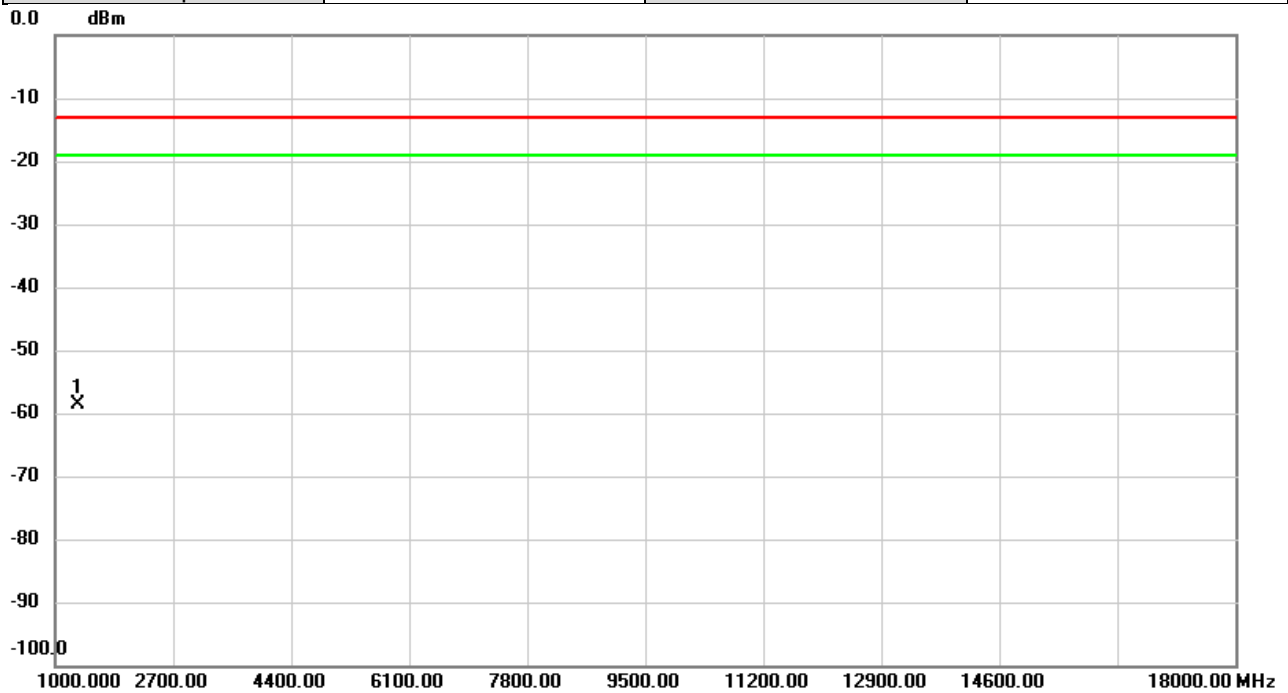


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1328.000	-63.46	4.93	-58.53	-13.00	-45.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 7A_n71A	Test Date	2026/1/20
Test Channel	CH134600	Polarization	Horizontal
Temp	25°C	Hum.	64%

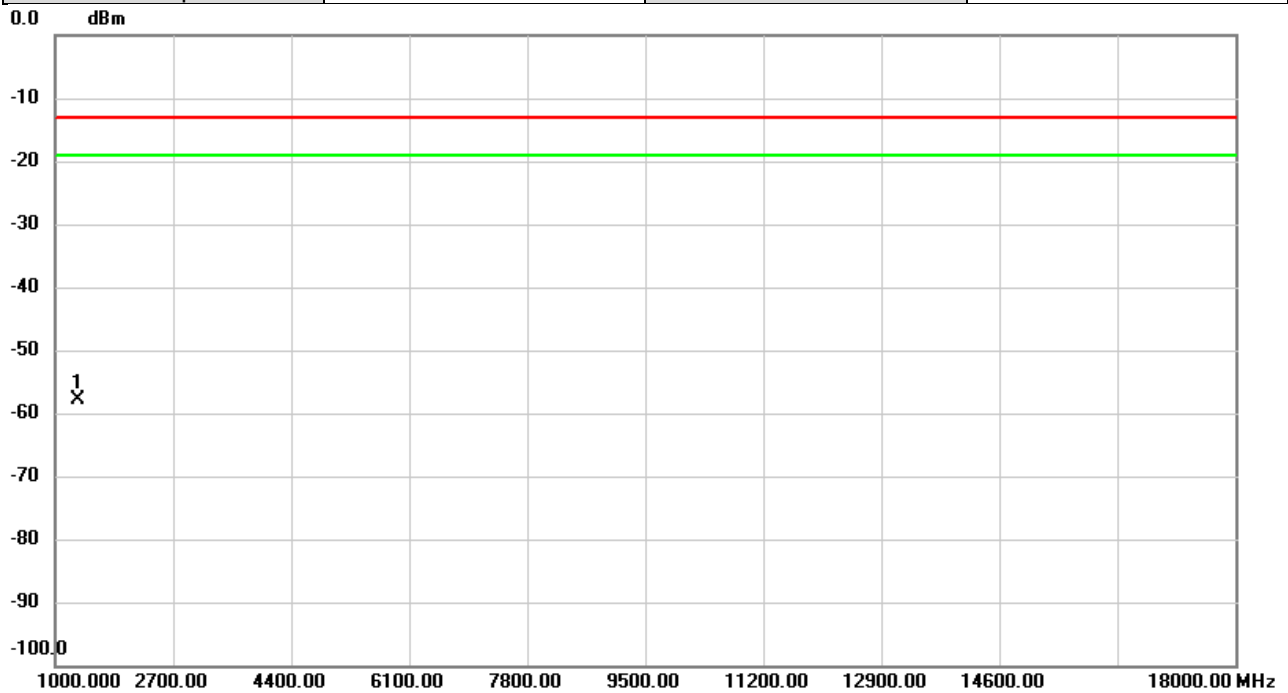


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1328.000	-62.74	4.87	-57.87	-13.00	-44.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 7A n71A	Test Date	2026/1/20
Test Channel	CH136100	Polarization	Vertical
Temp	25°C	Hum.	64%

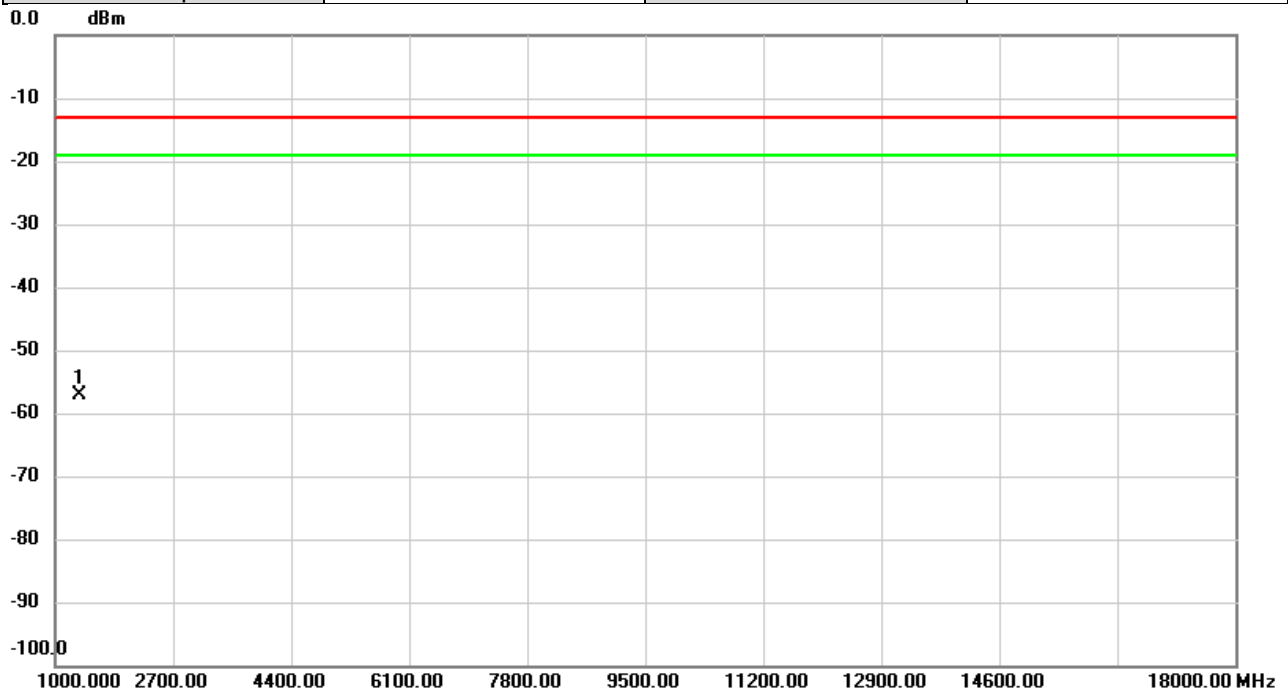


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1342.000	-61.95	4.77	-57.18	-13.00	-44.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 7A n71A	Test Date	2026/1/20
Test Channel	CH136100	Polarization	Horizontal
Temp	25°C	Hum.	64%

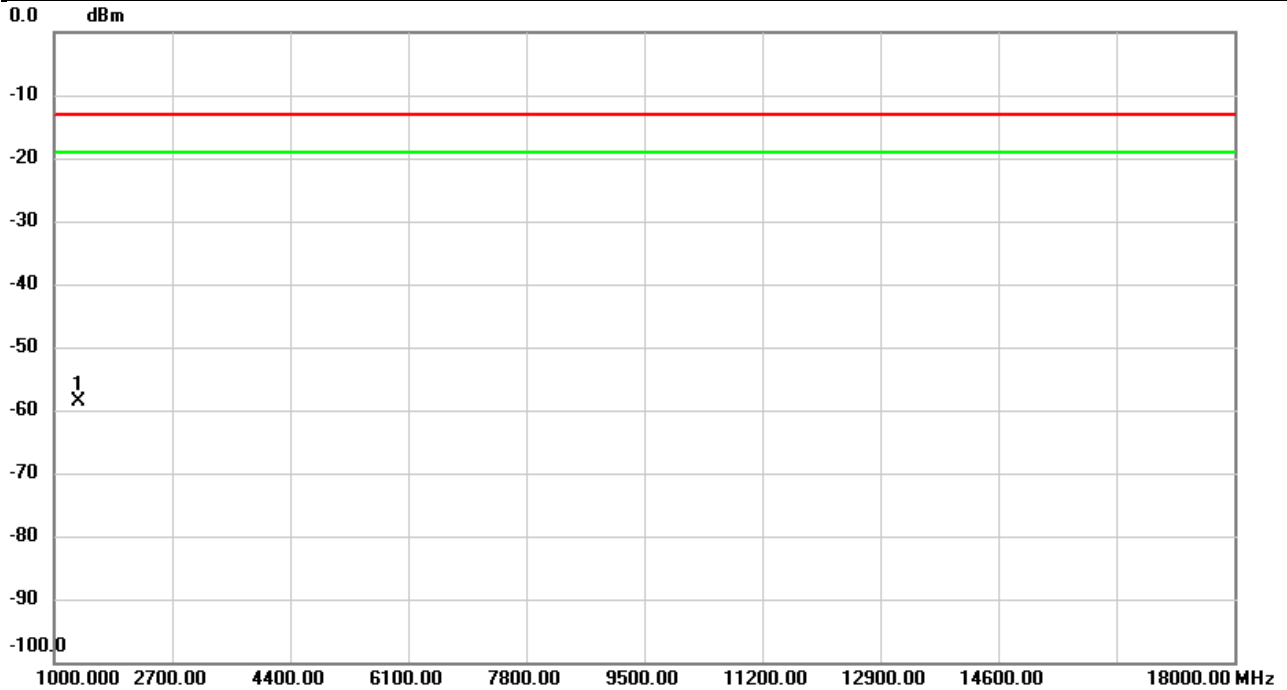


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1342.000	-63.27	4.76	-58.51	-13.00	-45.51	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 7A_n71A	Test Date	2026/1/20
Test Channel	CH137600	Polarization	Vertical
Temp	25°C	Hum.	64%

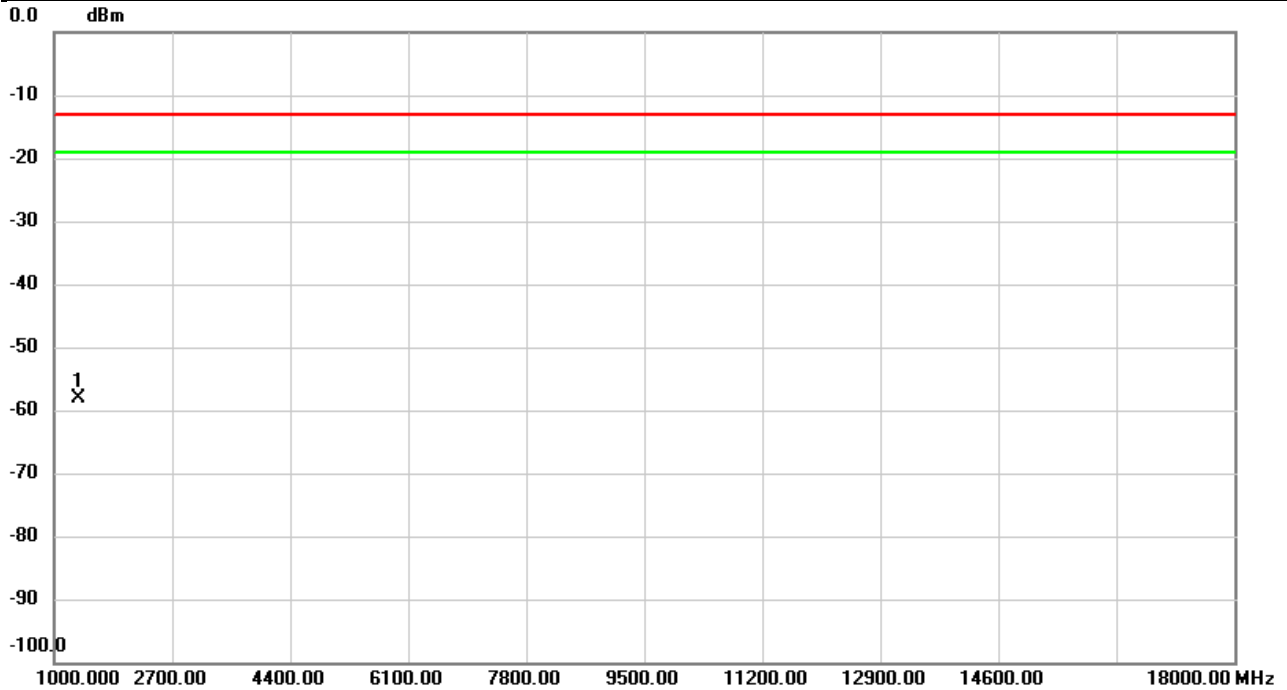


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1358.000	-62.93	4.72	-58.21	-13.00	-45.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 7A_n71A	Test Date	2026/1/20
Test Channel	CH137600	Polarization	Horizontal
Temp	25°C	Hum.	64%

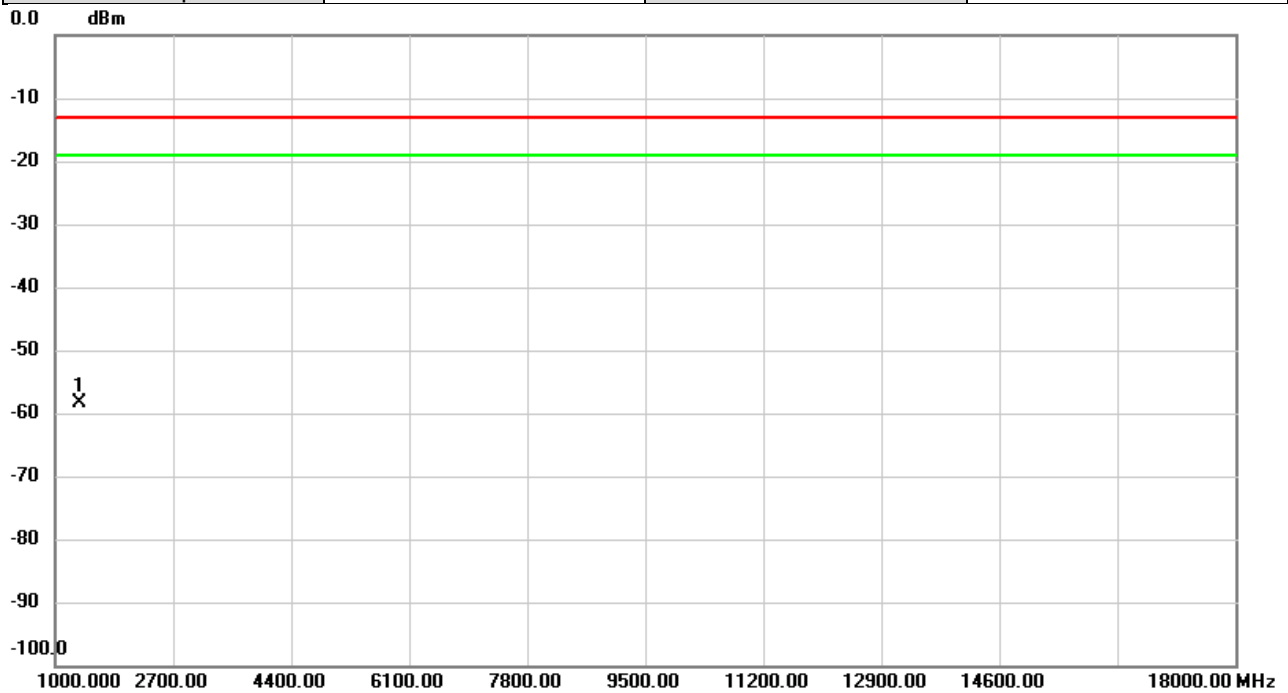


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1358.000	-63.06	4.66	-58.40	-13.00	-45.40	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 2A n77A	Test Date	2026/1/21
Test Channel	CH650000	Polarization	Vertical
Temp	23°C	Hum.	67%

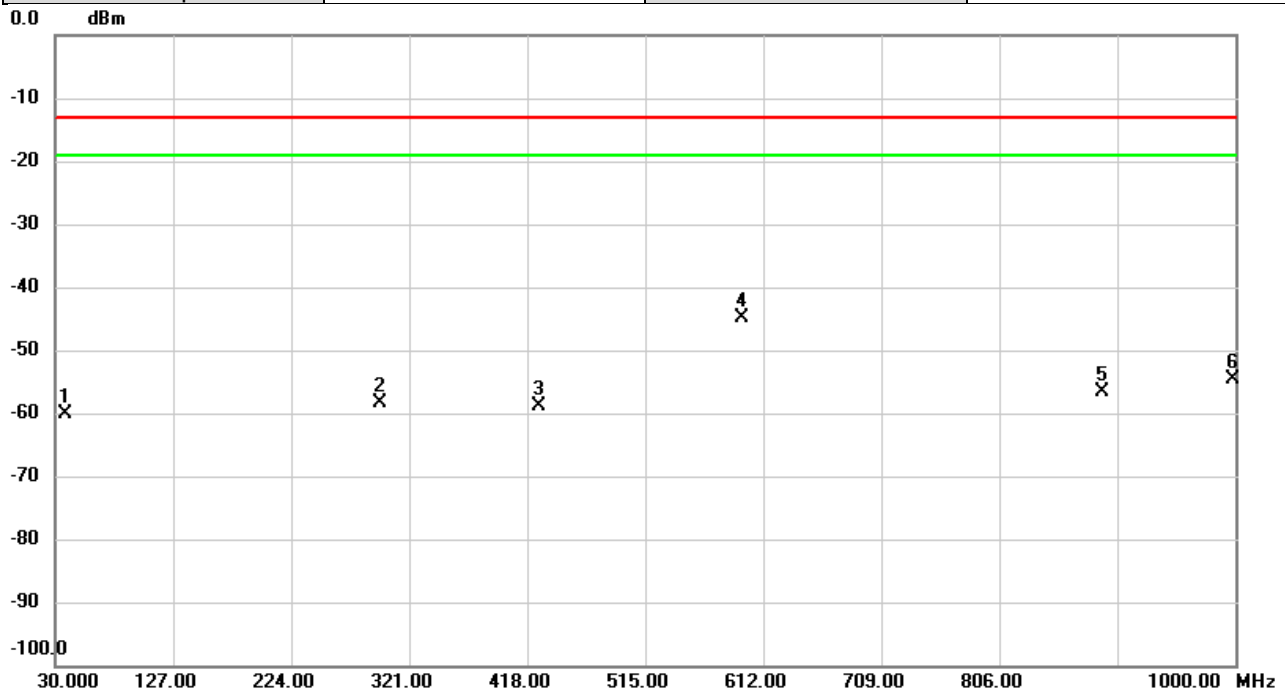


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		38.6653	-51.45	-8.75	-60.20	-13.00	-47.20	peak	
2		297.0087	-55.08	-3.35	-58.43	-13.00	-45.43	peak	
3		427.3767	-57.11	-1.75	-58.86	-13.00	-45.86	peak	
4	*	593.9903	-47.98	3.22	-44.76	-13.00	-31.76	peak	
5		891.0043	-63.13	6.39	-56.74	-13.00	-43.74	peak	
6		997.5103	-61.95	7.38	-54.57	-13.00	-41.57	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 2A n77A	Test Date	2026/1/21
Test Channel	CH650000	Polarization	Horizontal
Temp	23°C	Hum.	67%

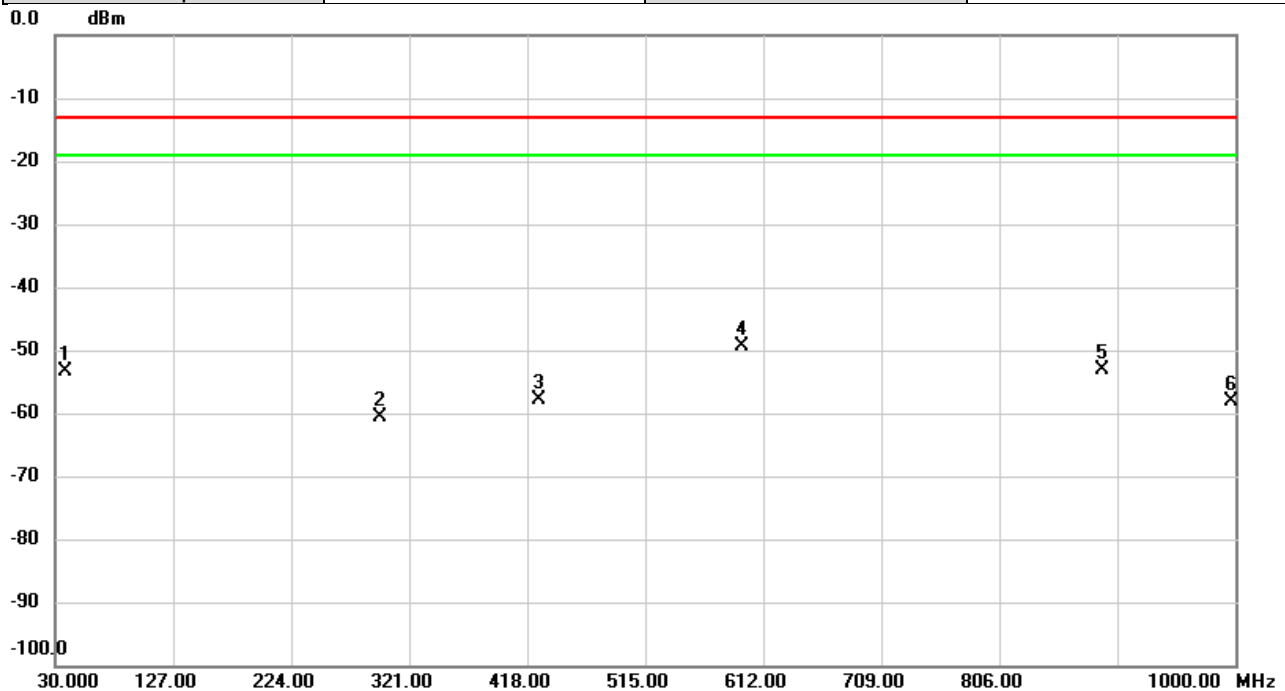


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		37.8893	-55.41	2.13	-53.28	-13.00	-40.28	peak	
2		297.0086	-54.40	-6.31	-60.71	-13.00	-47.71	peak	
3		427.2796	-55.60	-2.18	-57.78	-13.00	-44.78	peak	
4	*	594.0226	-49.52	0.12	-49.40	-13.00	-36.40	peak	
5		891.0043	-57.76	4.74	-53.02	-13.00	-40.02	peak	
6		997.1870	-64.39	6.15	-58.24	-13.00	-45.24	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 2A n77A	Test Date	2026/1/20
Test Channel	CH623334	Polarization	Vertical
Temp	25°C	Hum.	64%

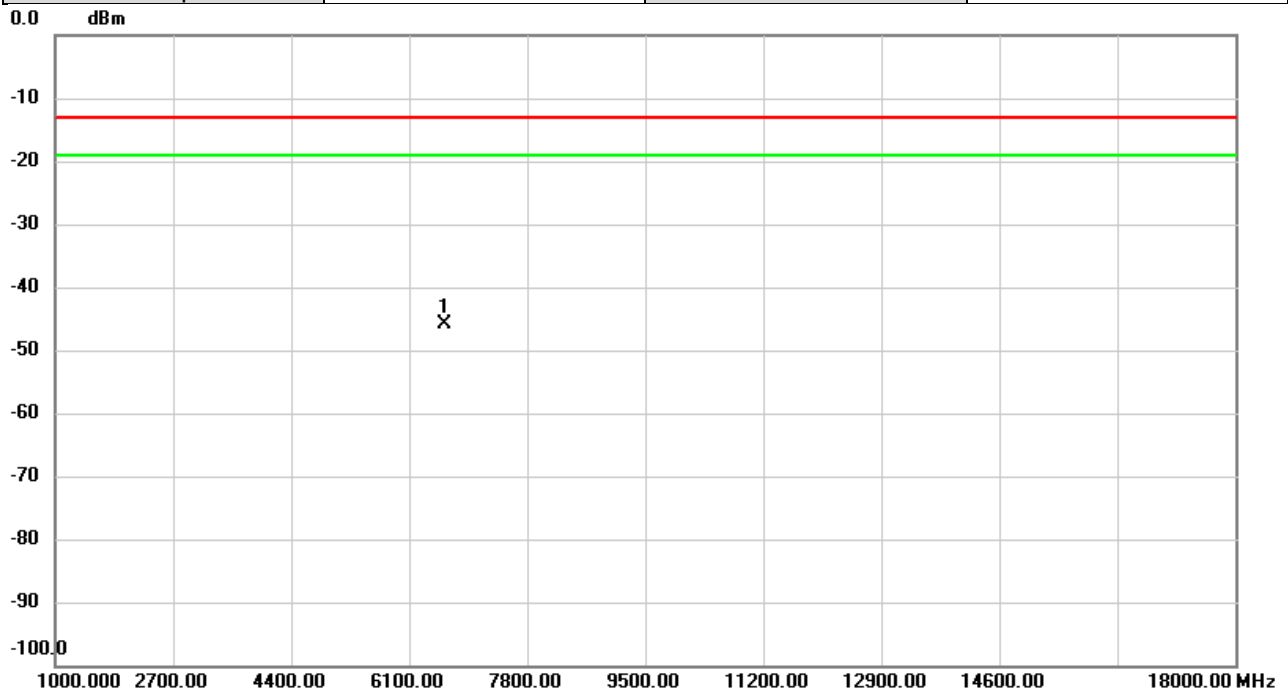


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6600.020	-63.65	17.78	-45.87	-13.00	-32.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 2A n77A	Test Date	2026/1/20
Test Channel	CH623334	Polarization	Horizontal
Temp	25°C	Hum.	64%

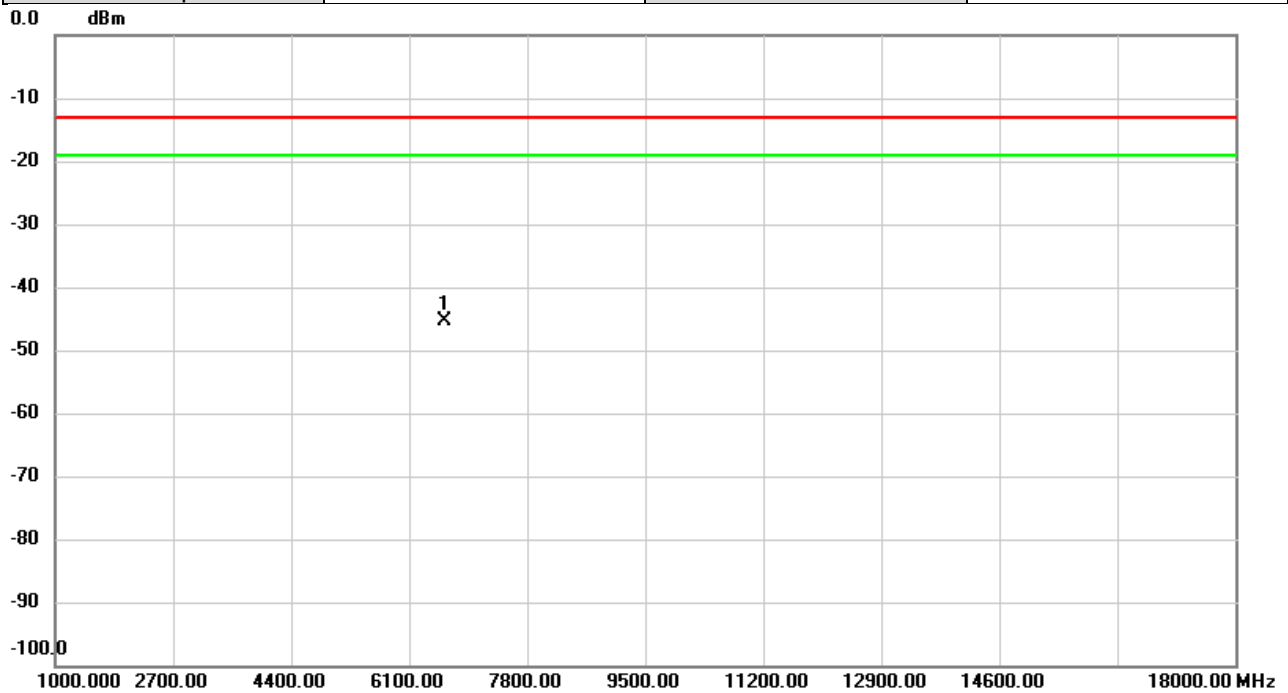


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6600.020	-62.98	17.51	-45.47	-13.00	-32.47	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 2A n77A	Test Date	2026/1/20
Test Channel	CH650000	Polarization	Vertical
Temp	25°C	Hum.	64%

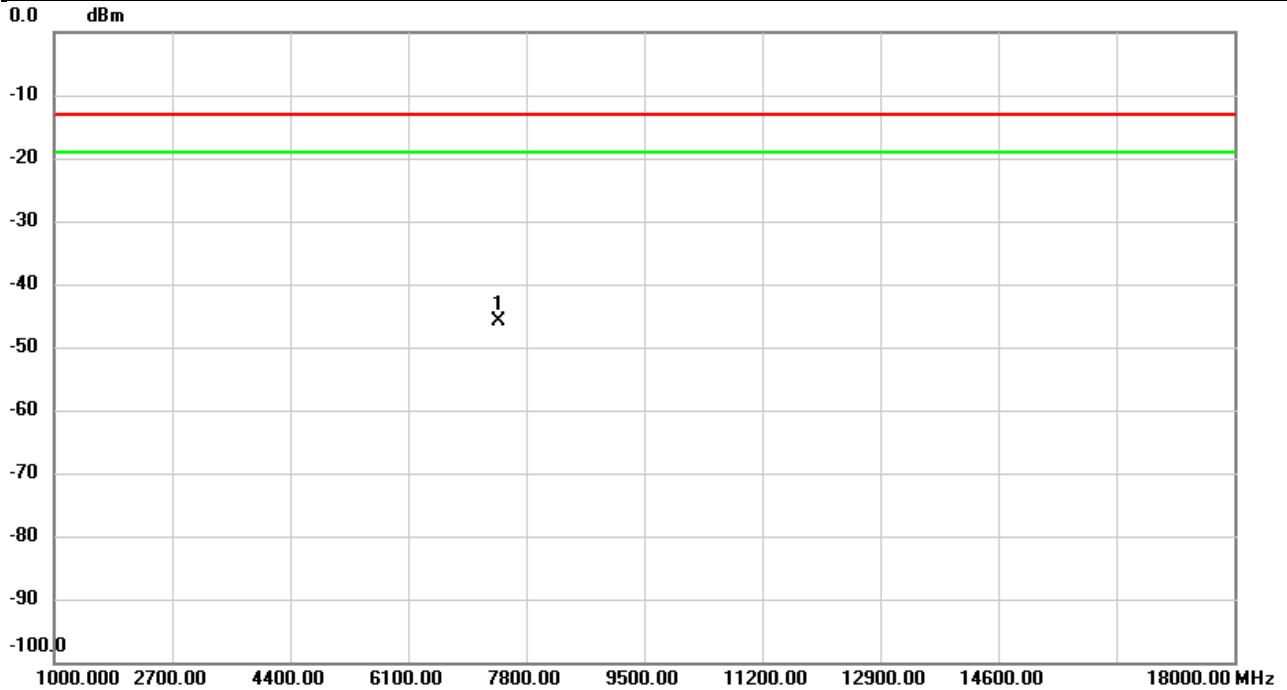


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7400.000	-63.82	18.07	-45.75	-13.00	-32.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 2A n77A	Test Date	2026/1/20
Test Channel	CH650000	Polarization	Horizontal
Temp	25°C	Hum.	64%

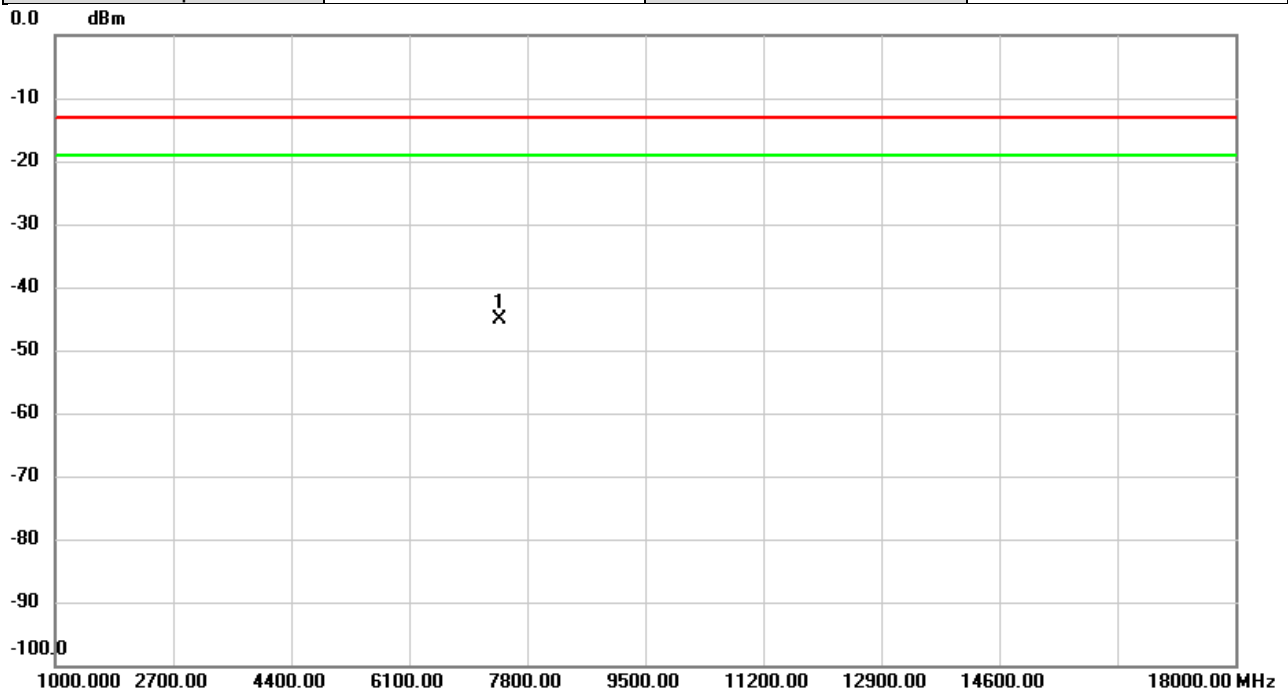


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7400.000	-63.35	18.12	-45.23	-13.00	-32.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 2A n77A	Test Date	2026/1/20
Test Channel	CH676666	Polarization	Vertical
Temp	25°C	Hum.	64%

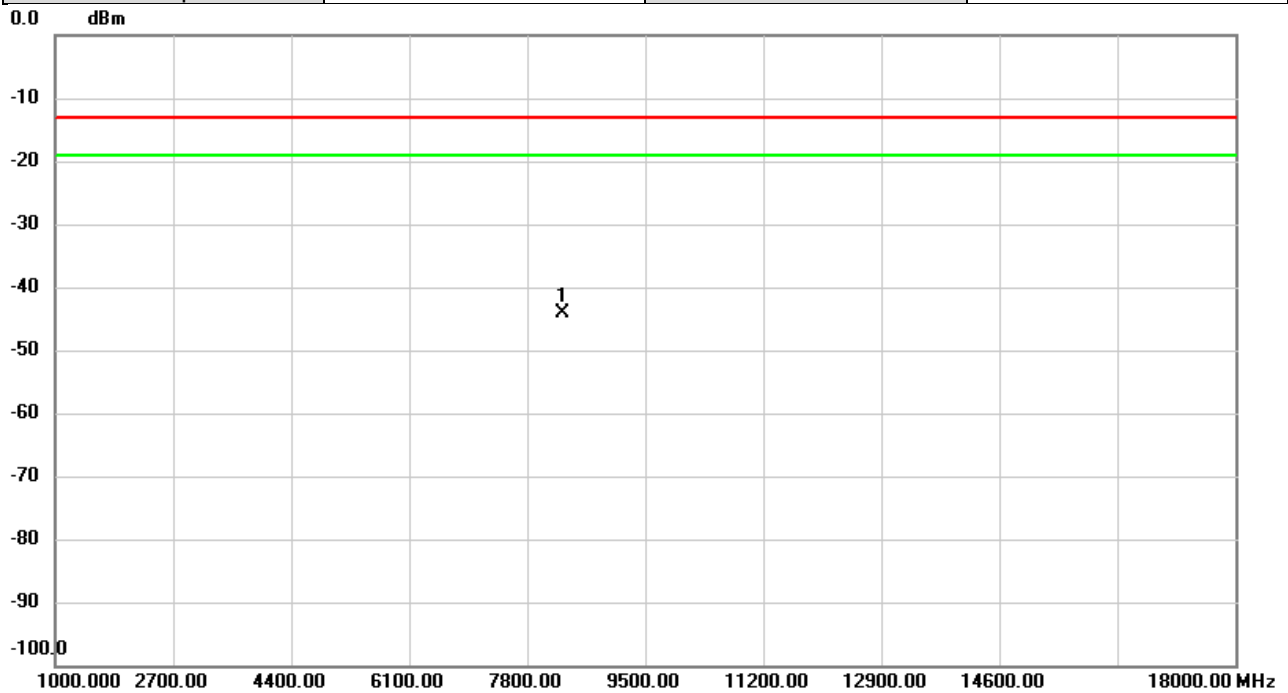


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	8299.980	-61.76	17.58	-44.18	-13.00	-31.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 2A n77A	Test Date	2026/1/20
Test Channel	CH676666	Polarization	Horizontal
Temp	25°C	Hum.	64%

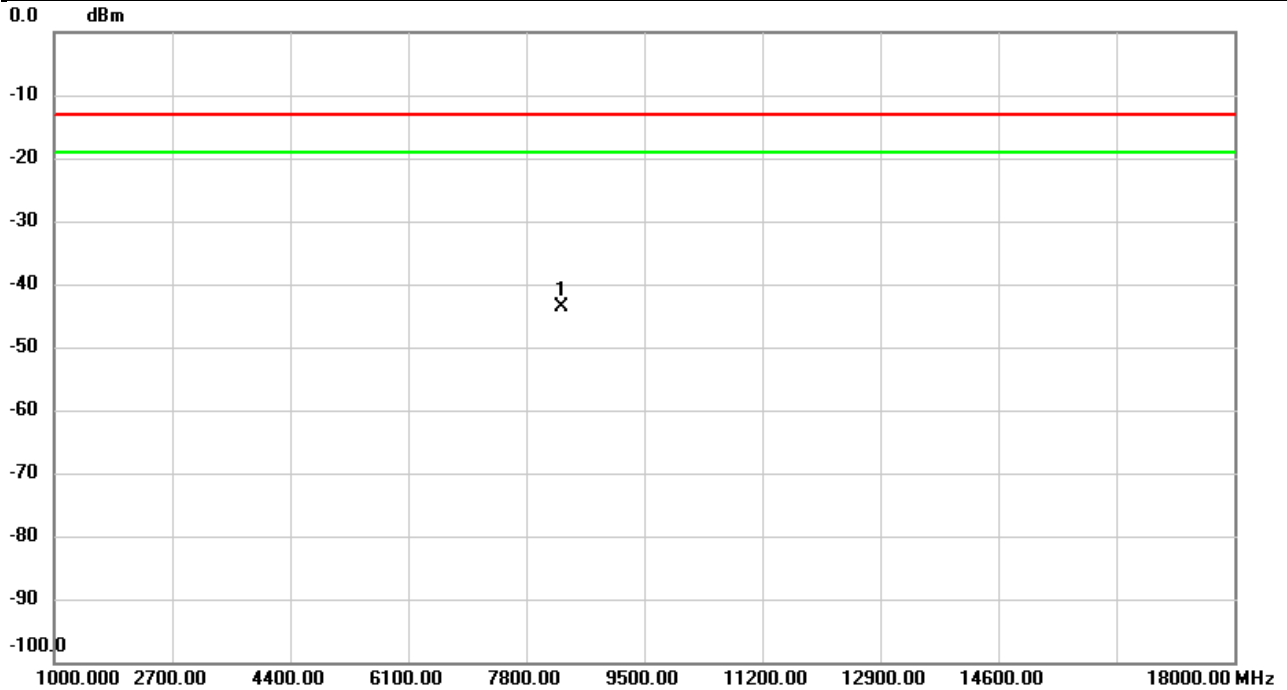


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	8299.980	-61.71	18.12	-43.59	-13.00	-30.59	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 2A n77A	Test Date	2026/1/22
Test Channel	CH650000	Polarization	Vertical
Temp	22°C	Hum.	66%

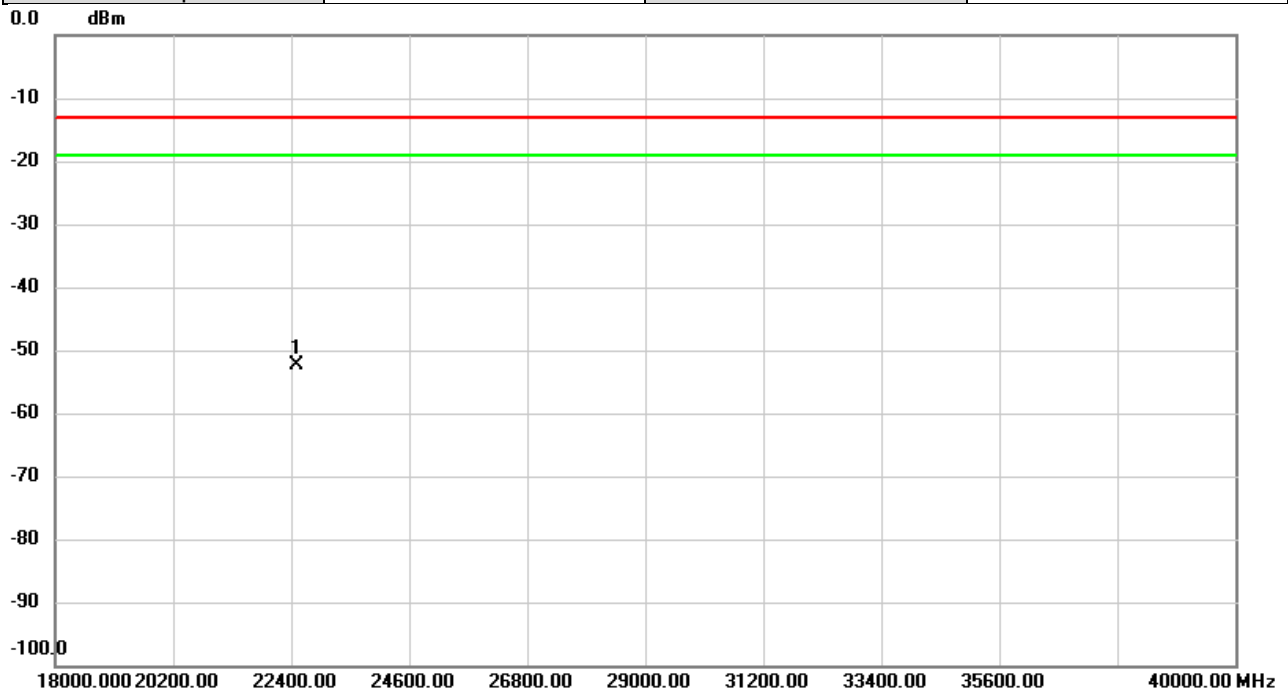


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	22500.00	-56.32	3.96	-52.36	-13.00	-39.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 2A n77A	Test Date	2026/1/22
Test Channel	CH650000	Polarization	Horizontal
Temp	22°C	Hum.	66%

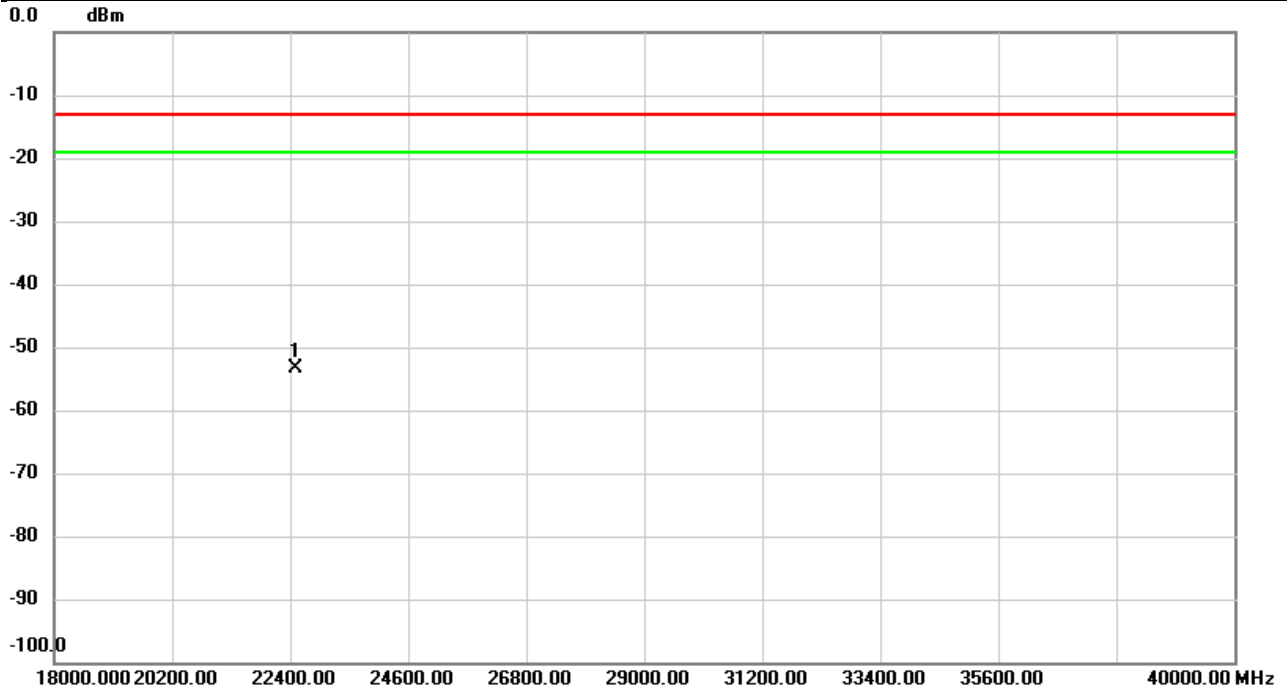


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	22500.00	-56.07	2.63	-53.44	-13.00	-40.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 4A n78A	Test Date	2026/1/21
Test Channel	CH650000	Polarization	Vertical
Temp	23°C	Hum.	67%

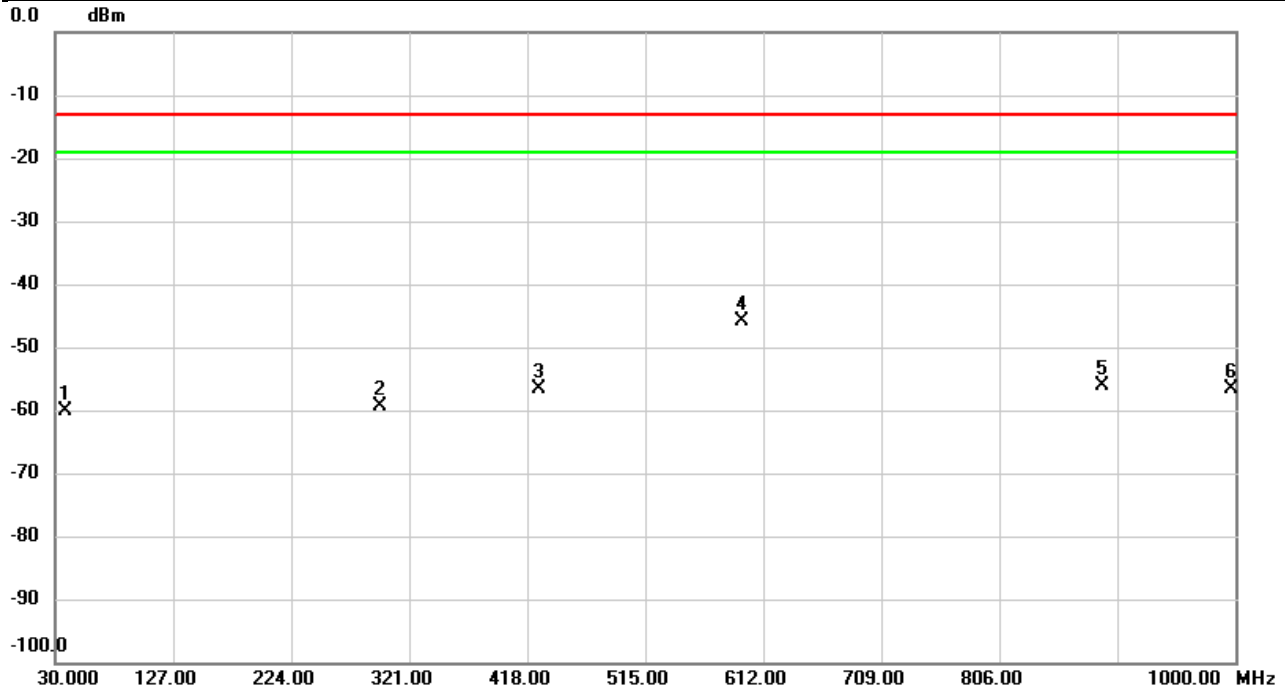


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		38.2450	-51.23	-8.83	-60.06	-13.00	-47.06	peak	
2		297.0087	-55.93	-3.35	-59.28	-13.00	-46.28	peak	
3		427.4737	-54.94	-1.75	-56.69	-13.00	-43.69	peak	
4	*	593.9903	-48.97	3.22	-45.75	-13.00	-32.75	peak	
5		891.0043	-62.54	6.39	-56.15	-13.00	-43.15	peak	
6		996.9607	-64.09	7.38	-56.71	-13.00	-43.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 4A n78A	Test Date	2026/1/21
Test Channel	CH650000	Polarization	Horizontal
Temp	23°C	Hum.	67%

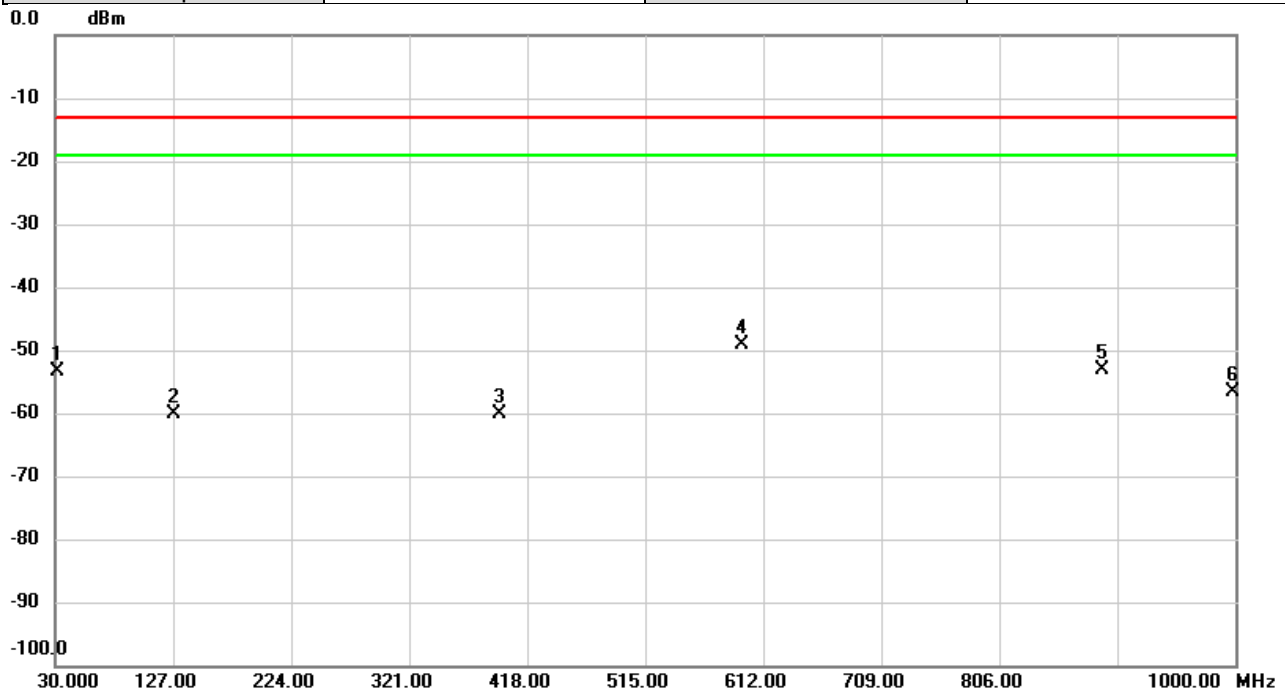


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		32.1986	-56.01	2.73	-53.28	-13.00	-40.28	peak	
2		128.0993	-53.45	-6.74	-60.19	-13.00	-47.19	peak	
3		396.0133	-57.58	-2.50	-60.08	-13.00	-47.08	peak	
4	*	593.9903	-49.30	0.12	-49.18	-13.00	-36.18	peak	
5		891.0043	-57.83	4.74	-53.09	-13.00	-40.09	peak	
6		997.6396	-62.79	6.15	-56.64	-13.00	-43.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 4A n78A	Test Date	2026/1/20
Test Channel	CH623334	Polarization	Vertical
Temp	25°C	Hum.	64%

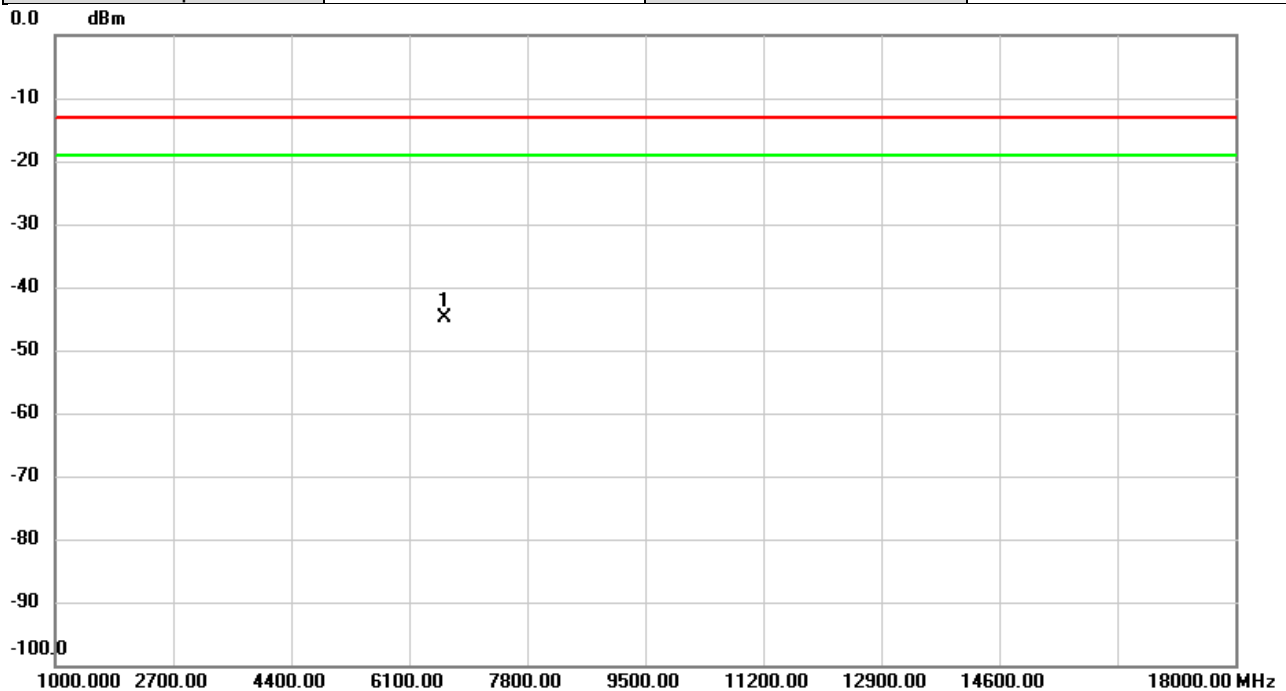


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6600.000	-62.66	17.78	-44.88	-13.00	-31.88	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 4A n78A	Test Date	2026/1/20
Test Channel	CH623334	Polarization	Horizontal
Temp	25°C	Hum.	64%

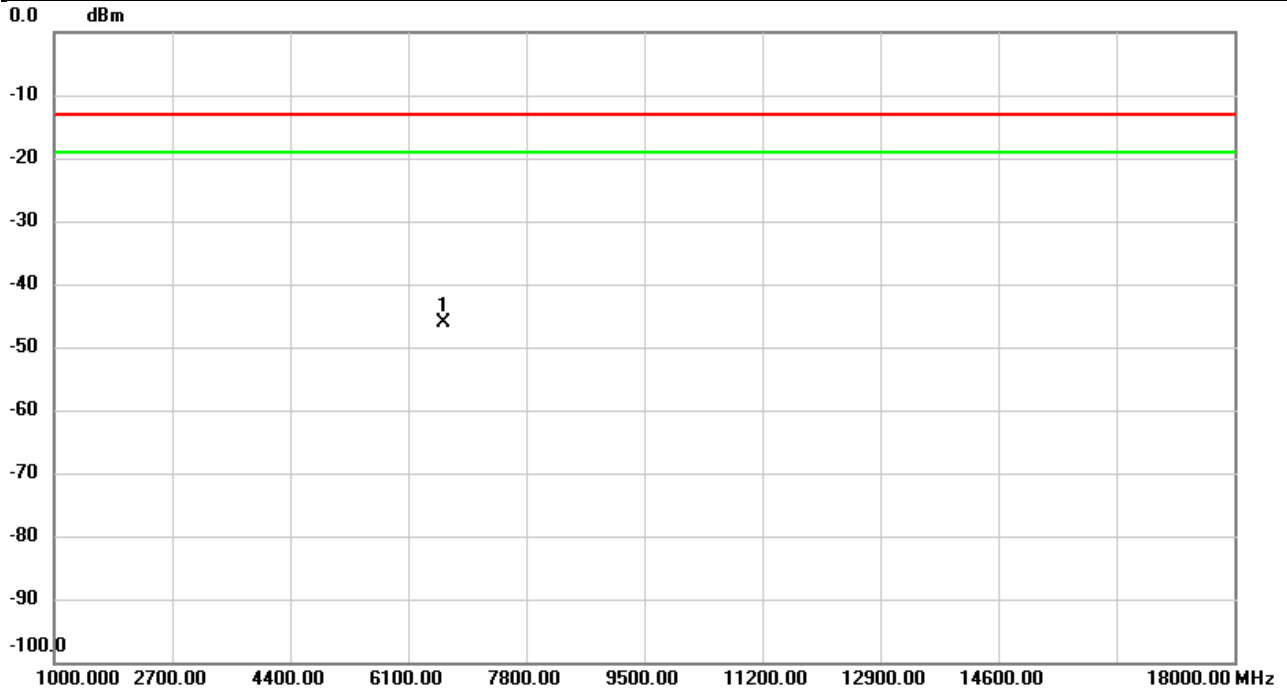


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6600.000	-63.64	17.51	-46.13	-13.00	-33.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 4A n78A	Test Date	2026/1/20
Test Channel	CH636666	Polarization	Vertical
Temp	25°C	Hum.	64%

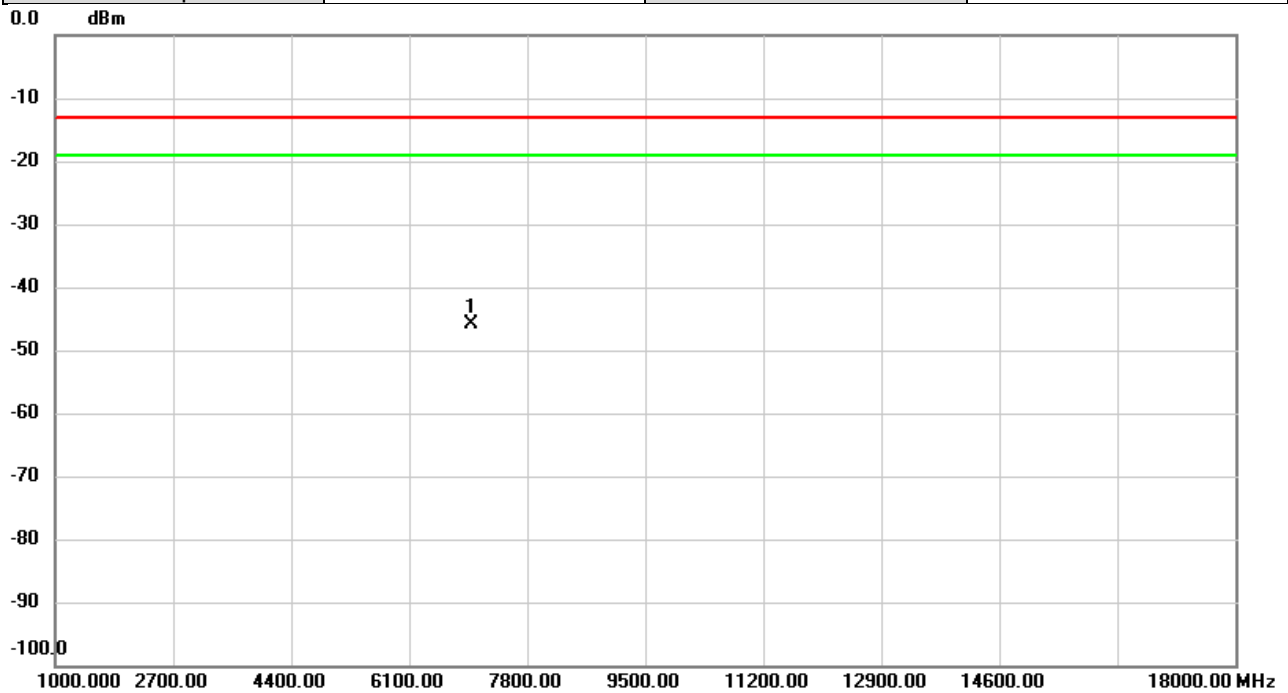


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6999.980	-63.69	17.88	-45.81	-13.00	-32.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 4A n78A	Test Date	2026/1/20
Test Channel	CH636666	Polarization	Horizontal
Temp	25°C	Hum.	64%

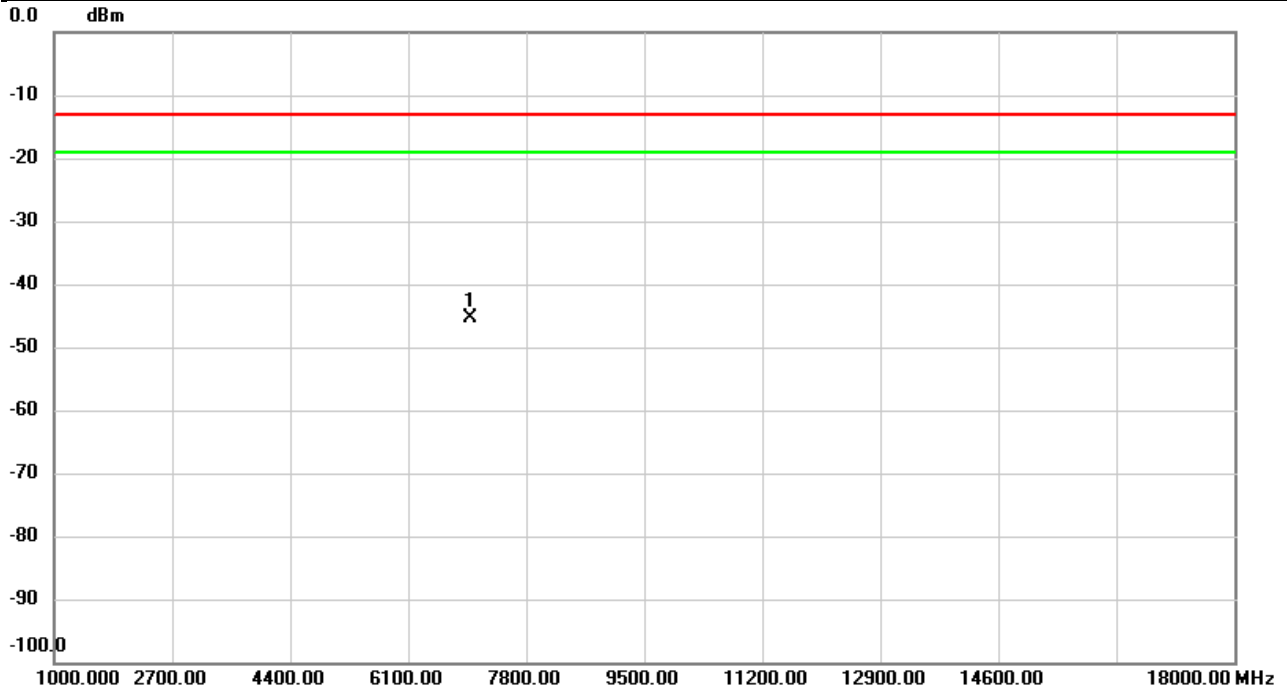


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6999.980	-63.10	17.74	-45.36	-13.00	-32.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 4A n78A	Test Date	2026/1/20
Test Channel	CH650000	Polarization	Vertical
Temp	25°C	Hum.	64%

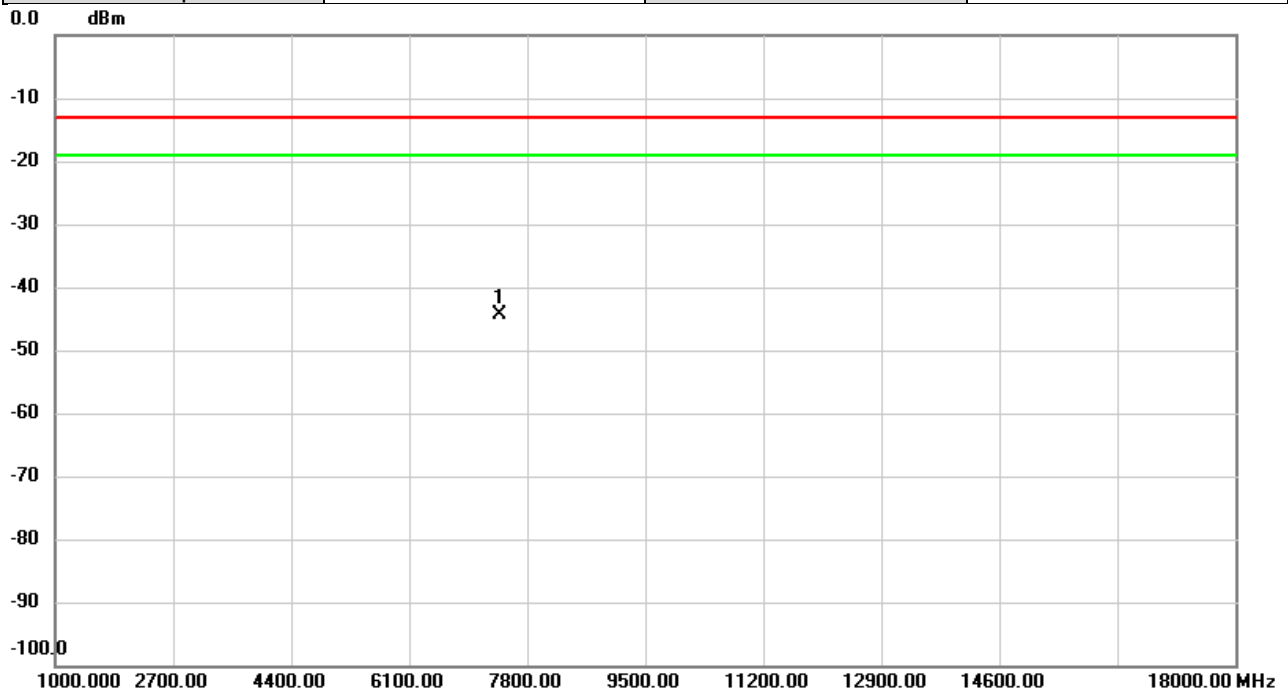


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7400.000	-62.35	18.07	-44.28	-13.00	-31.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 4A n78A	Test Date	2026/1/20
Test Channel	CH650000	Polarization	Horizontal
Temp	25°C	Hum.	64%

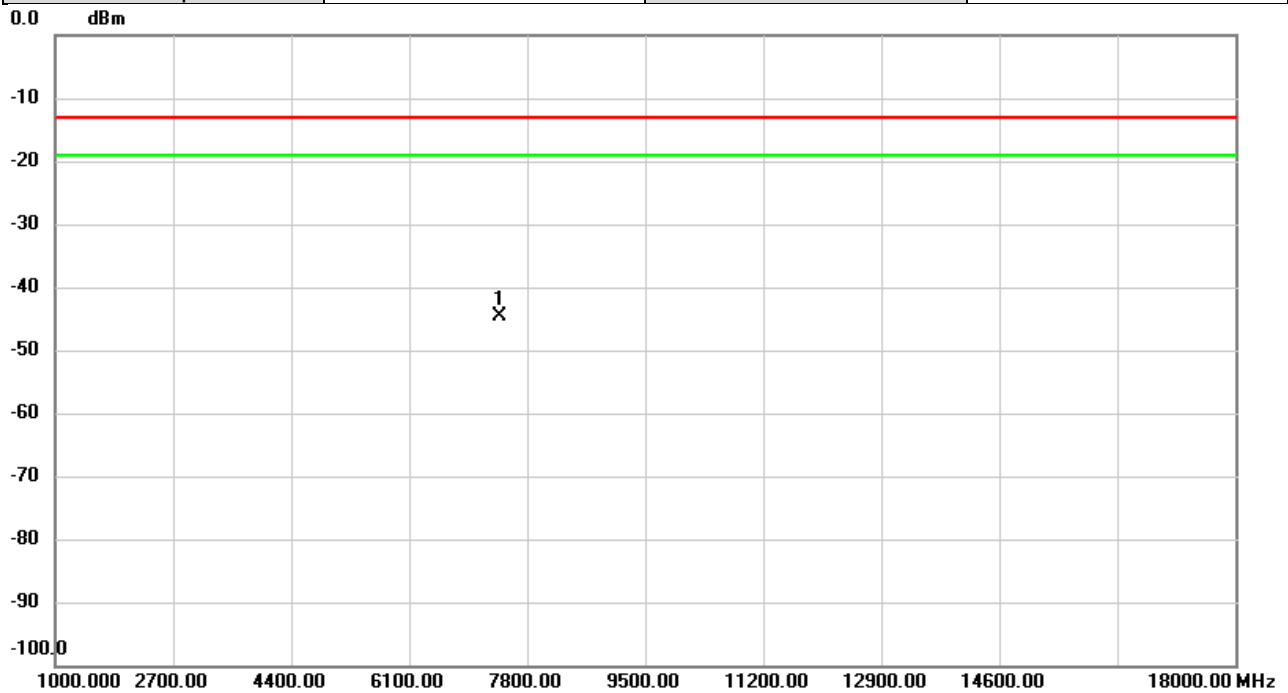


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7400.000	-62.66	18.12	-44.54	-13.00	-31.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 4A n78A	Test Date	2026/1/22
Test Channel	CH650000	Polarization	Vertical
Temp	22°C	Hum.	66%

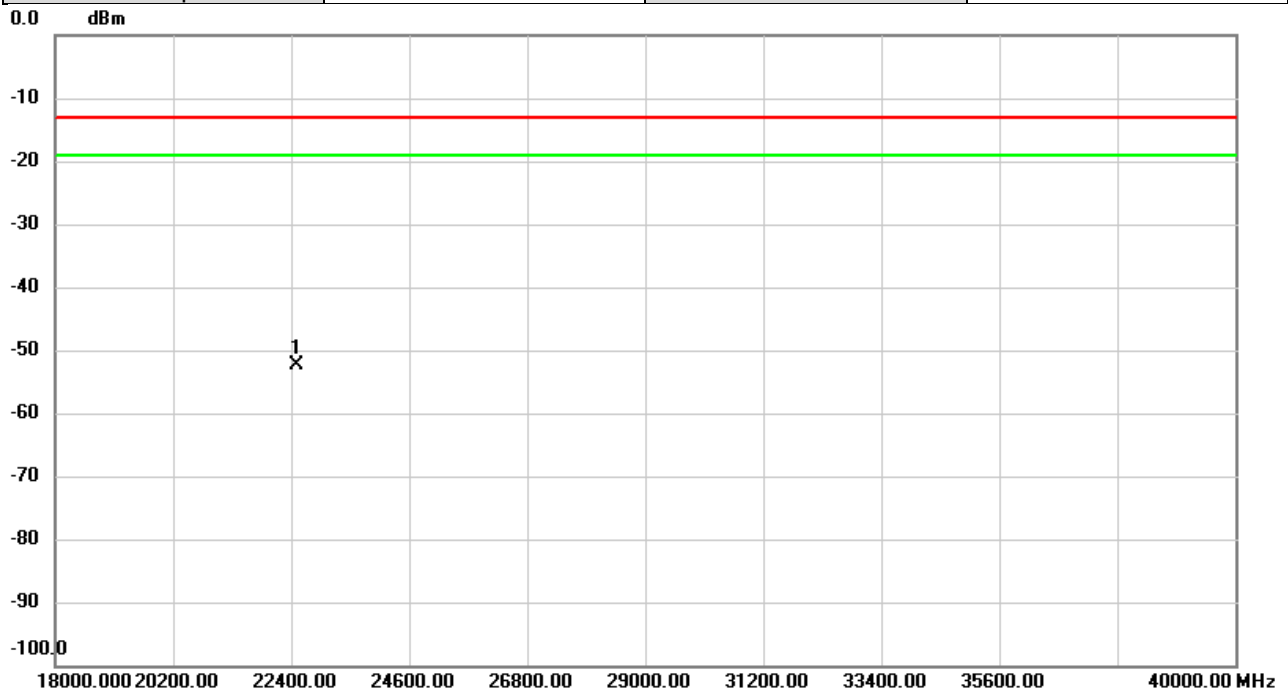


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	22500.00	-56.28	3.96	-52.32	-13.00	-39.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NSA 4A n78A	Test Date	2026/1/22
Test Channel	CH650000	Polarization	Horizontal
Temp	22°C	Hum.	66%

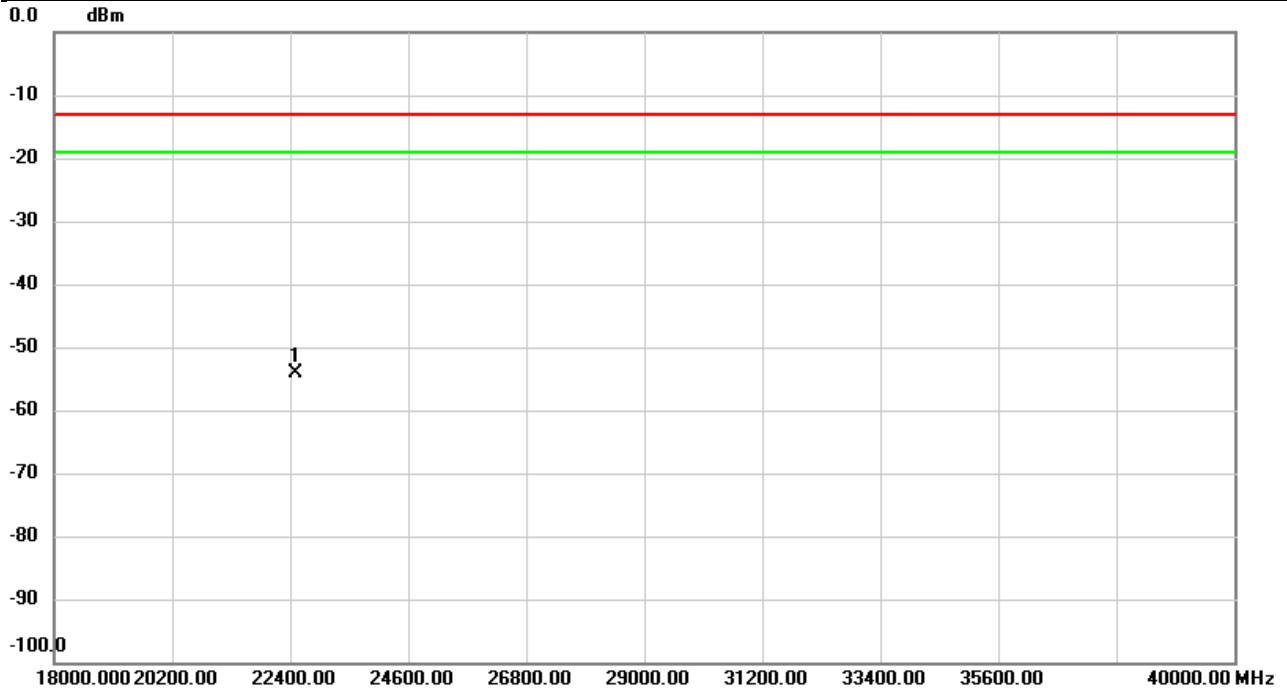


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	22500.00	-56.83	2.63	-54.20	-13.00	-41.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

For UL MIMO:

Test Mode	NR n38	Test Date	2026/1/21
Test Channel	CH519000	Polarization	Vertical
Temp	23°C	Hum.	67%

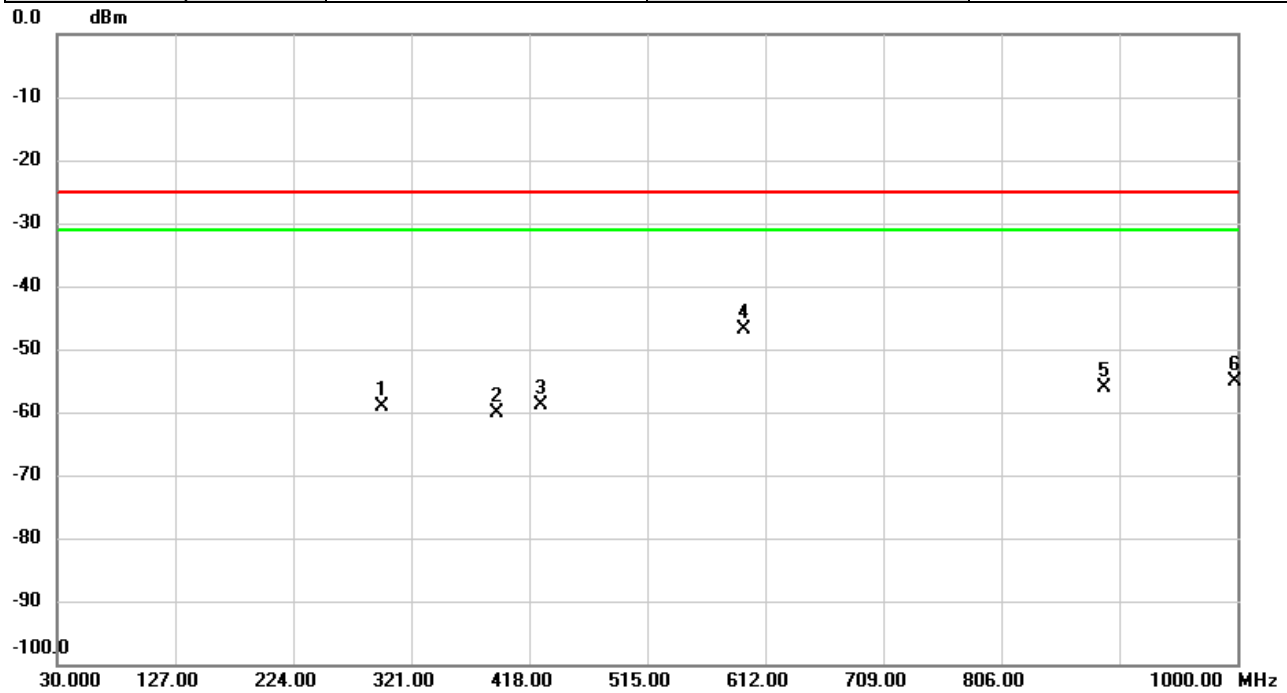


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		297.0087	-55.87	-3.35	-59.22	-25.00	-34.22	peak	
2		391.7130	-57.70	-2.41	-60.11	-25.00	-35.11	peak	
3		427.5707	-57.21	-1.75	-58.96	-25.00	-33.96	peak	
4	*	593.9580	-50.17	3.22	-46.95	-25.00	-21.95	peak	
5		891.0043	-62.51	6.39	-56.12	-25.00	-31.12	peak	
6		997.4457	-62.44	7.38	-55.06	-25.00	-30.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2026/1/21
Test Channel	CH519000	Polarization	Horizontal
Temp	23°C	Hum.	67%

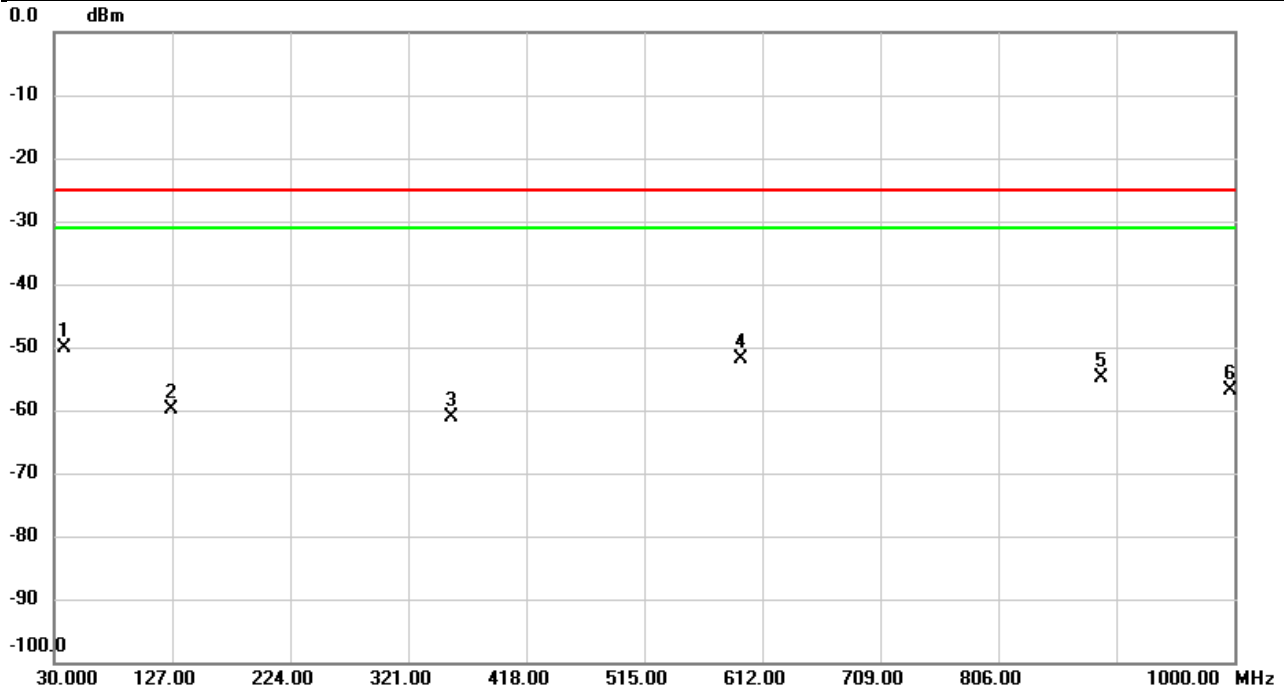


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	38.5036	-52.10	2.07	-50.03	-25.00	-25.03	peak	
2		126.1270	-53.03	-6.91	-59.94	-25.00	-34.94	peak	
3		356.2110	-58.61	-2.54	-61.15	-25.00	-36.15	peak	
4		594.0226	-51.90	0.12	-51.78	-25.00	-26.78	peak	
5		891.0043	-59.64	4.74	-54.90	-25.00	-29.90	peak	
6		997.3486	-63.00	6.15	-56.85	-25.00	-31.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2026/1/15
Test Channel	CH518000	Polarization	Vertical
Temp	23°C	Hum.	54%

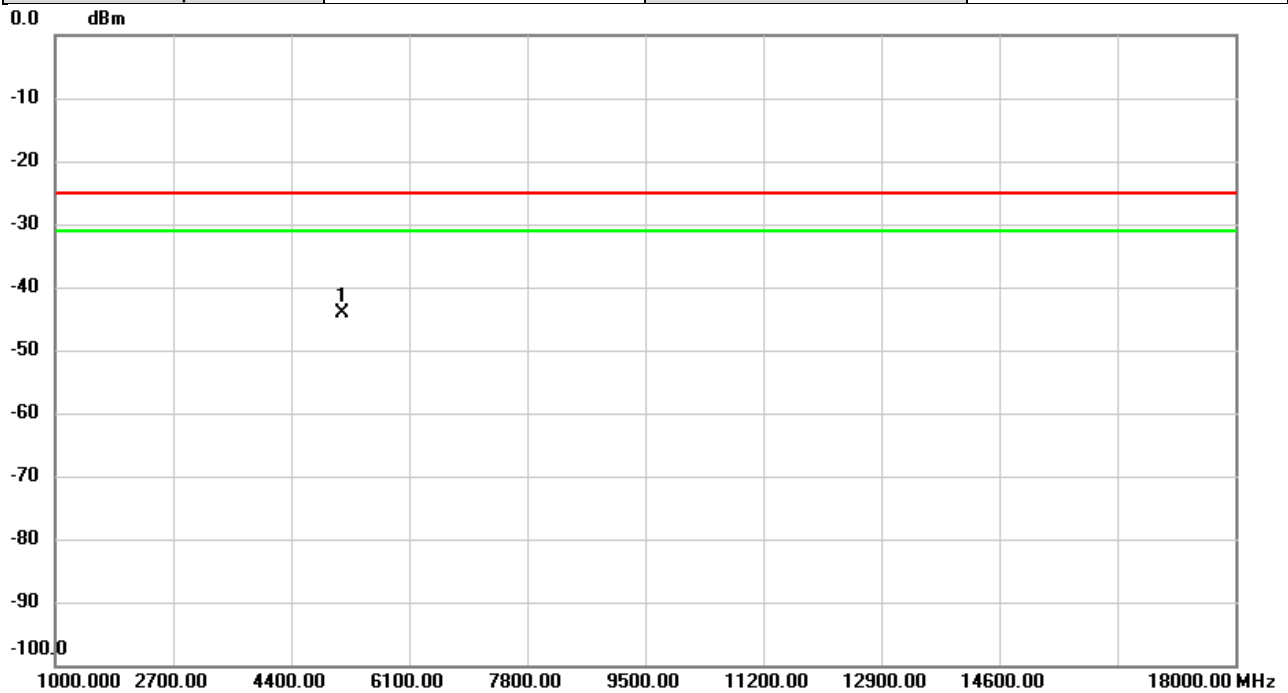


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5141.767	-58.12	13.89	-44.23	-25.00	-19.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2026/1/15
Test Channel	CH518000	Polarization	Horizontal
Temp	23°C	Hum.	54%

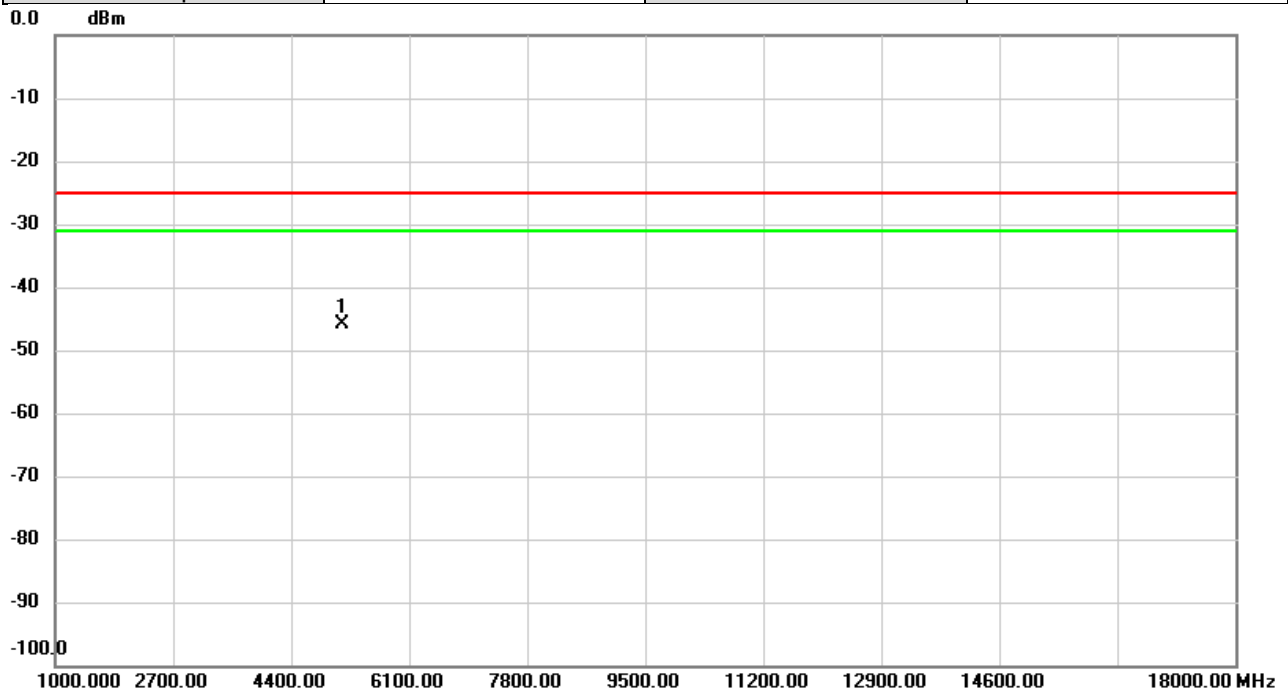


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5142.333	-59.86	13.89	-45.97	-25.00	-20.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2026/1/15
Test Channel	CH519000	Polarization	Vertical
Temp	23°C	Hum.	54%

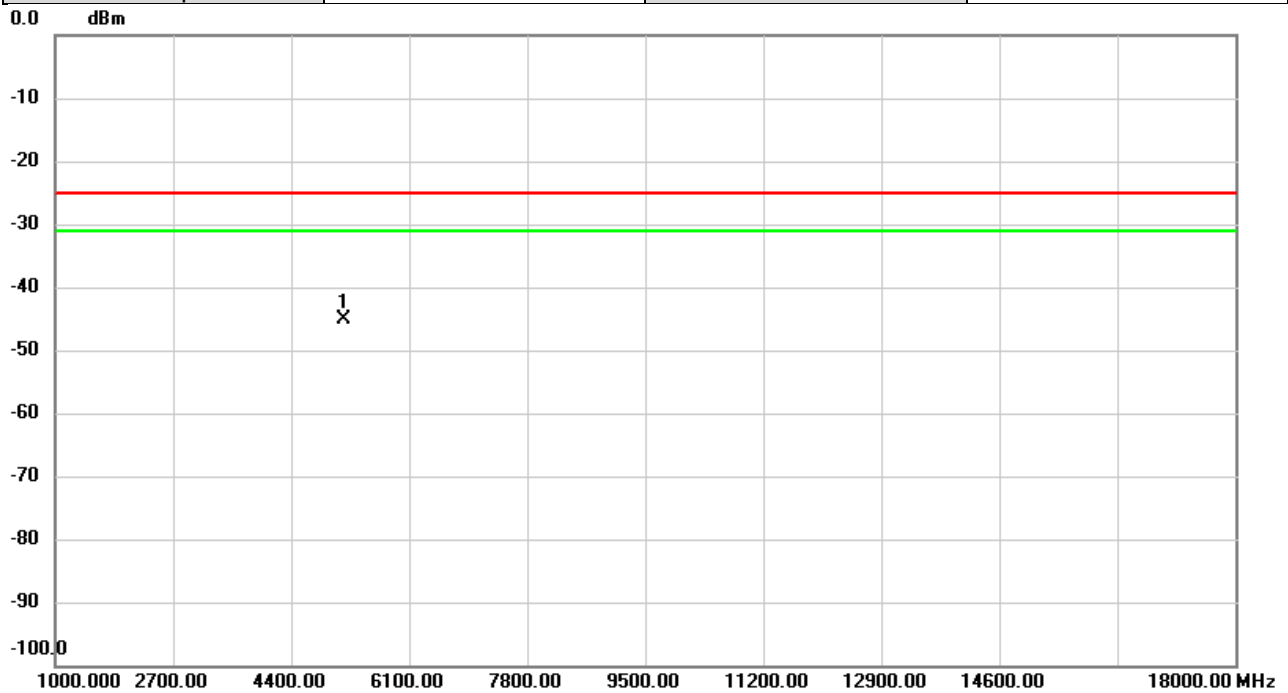


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5152.533	-59.07	13.85	-45.22	-25.00	-20.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2026/1/15
Test Channel	CH519000	Polarization	Horizontal
Temp	23°C	Hum.	54%

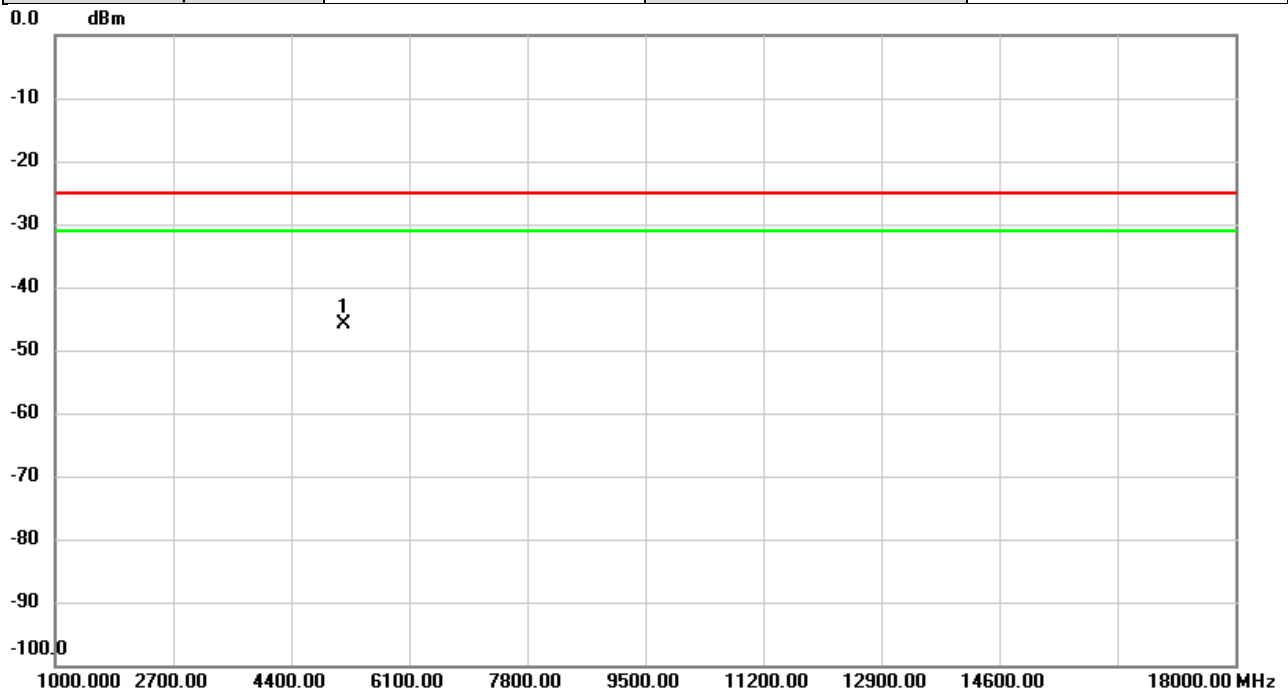


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5152.533	-59.84	13.88	-45.96	-25.00	-20.96	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2026/1/15
Test Channel	CH520000	Polarization	Vertical
Temp	23°C	Hum.	54%

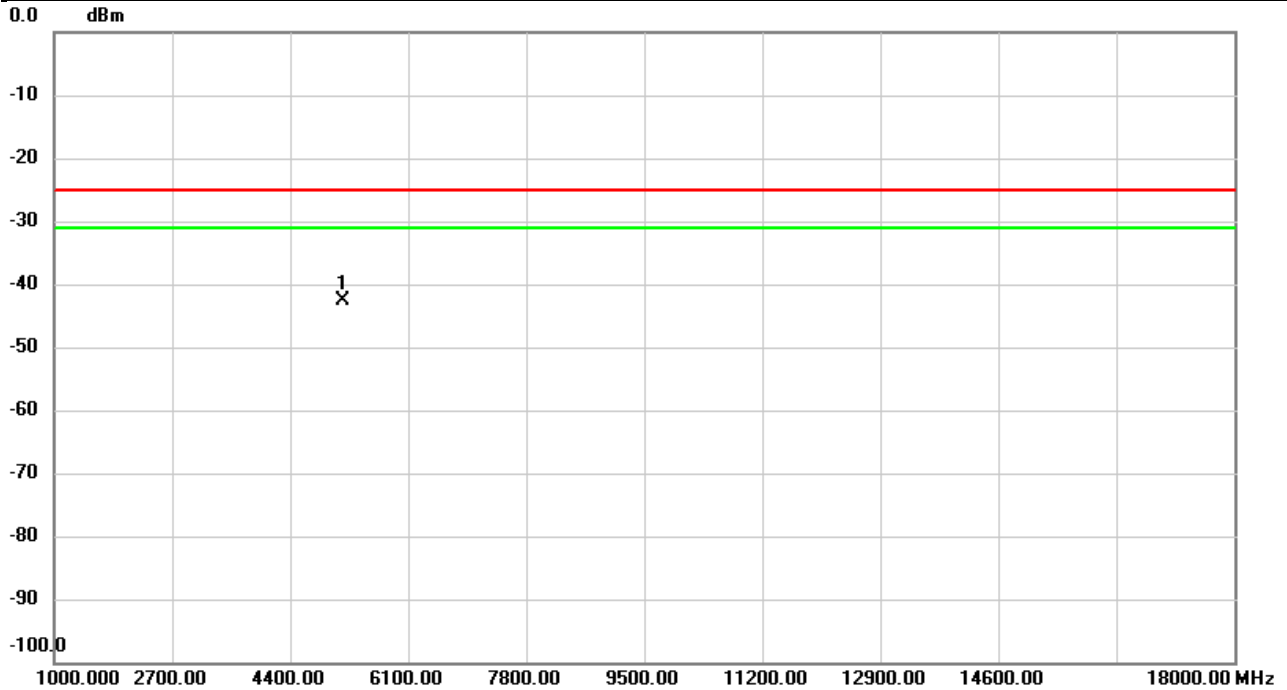


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5162.167	-56.35	13.77	-42.58	-25.00	-17.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2026/1/15
Test Channel	CH520000	Polarization	Horizontal
Temp	23°C	Hum.	54%

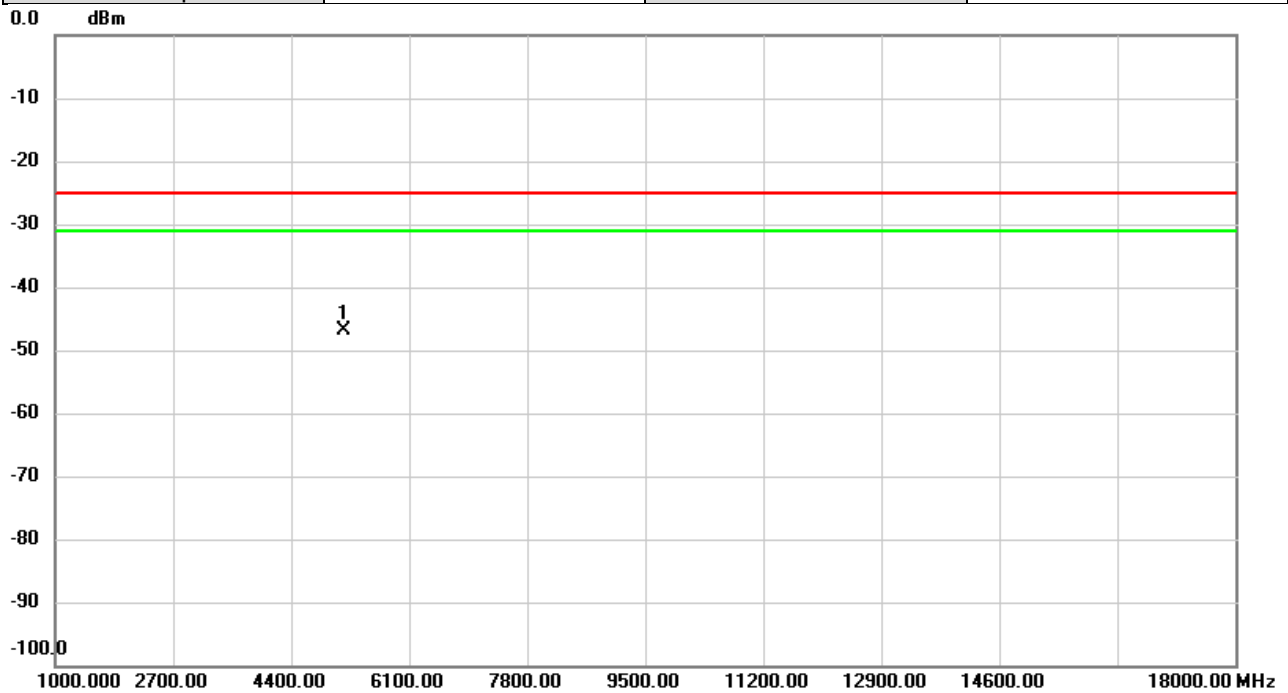


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5162.167	-60.70	13.79	-46.91	-25.00	-21.91	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2026/1/22
Test Channel	CH519000	Polarization	Vertical
Temp	22°C	Hum.	66%

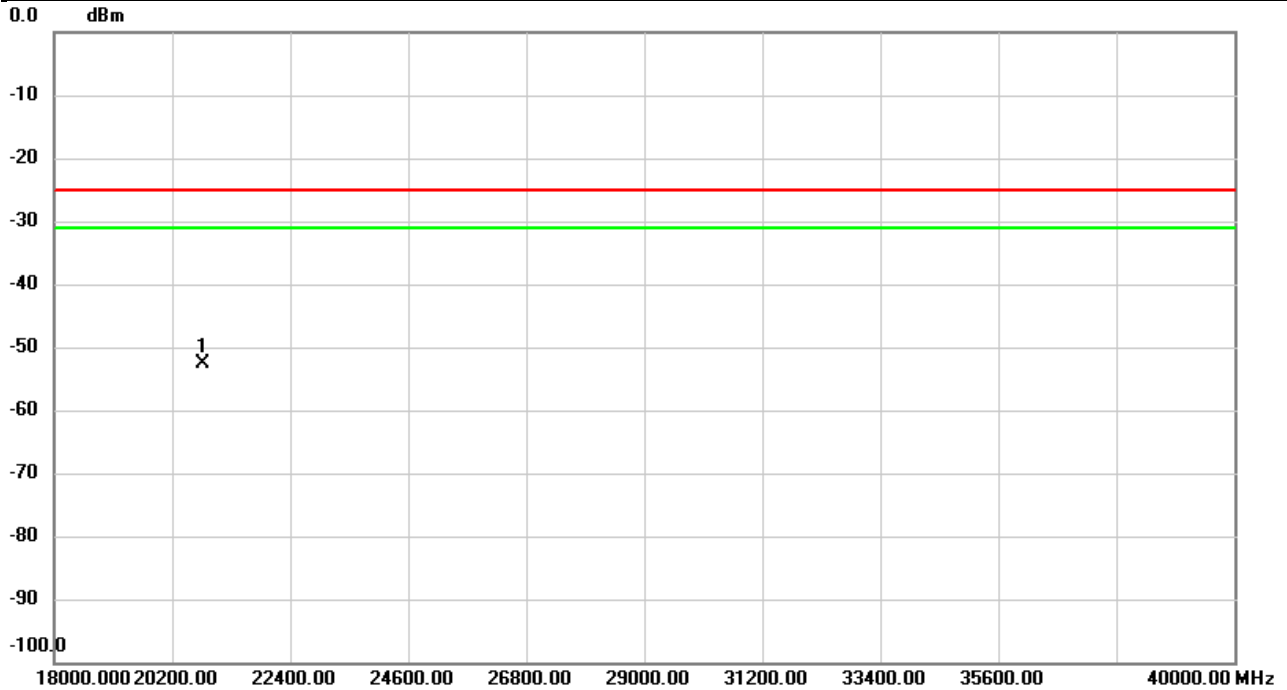


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	20760.00	-54.84	2.34	-52.50	-25.00	-27.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n38	Test Date	2026/1/22
Test Channel	CH519000	Polarization	Horizontal
Temp	22°C	Hum.	66%

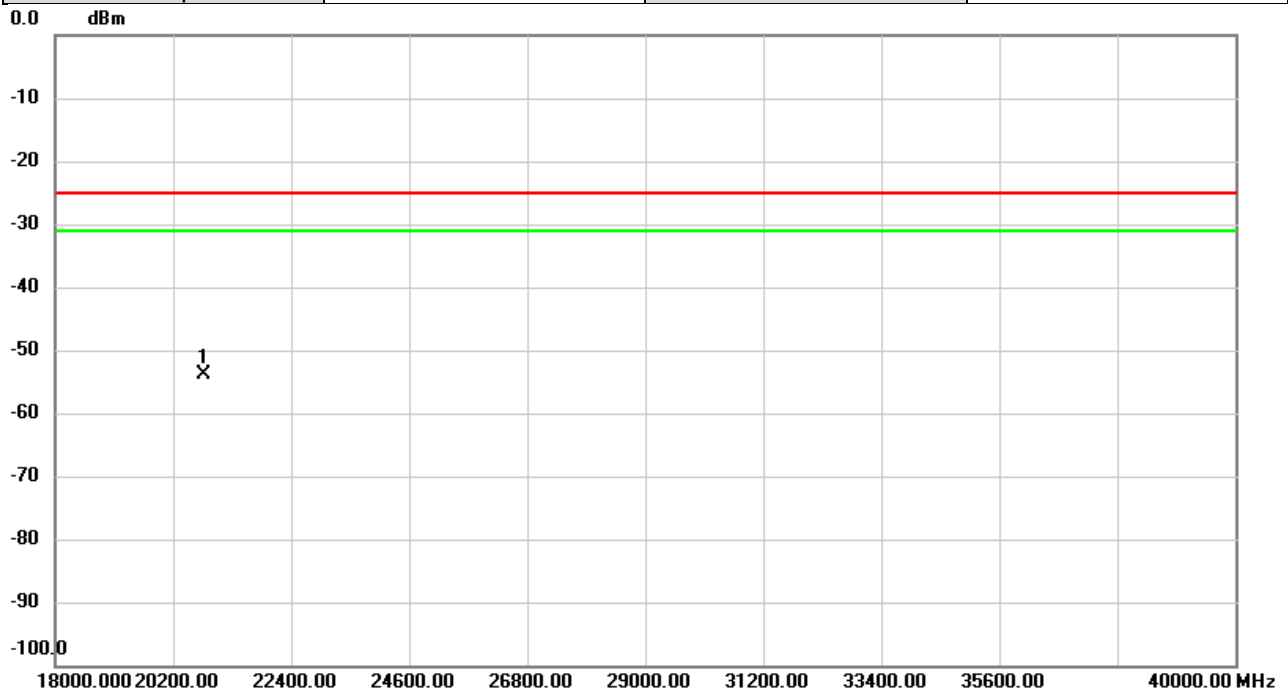


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	20760.00	-55.16	1.30	-53.86	-25.00	-28.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2026/1/21
Test Channel	CH518598	Polarization	Vertical
Temp	23°C	Hum.	67%

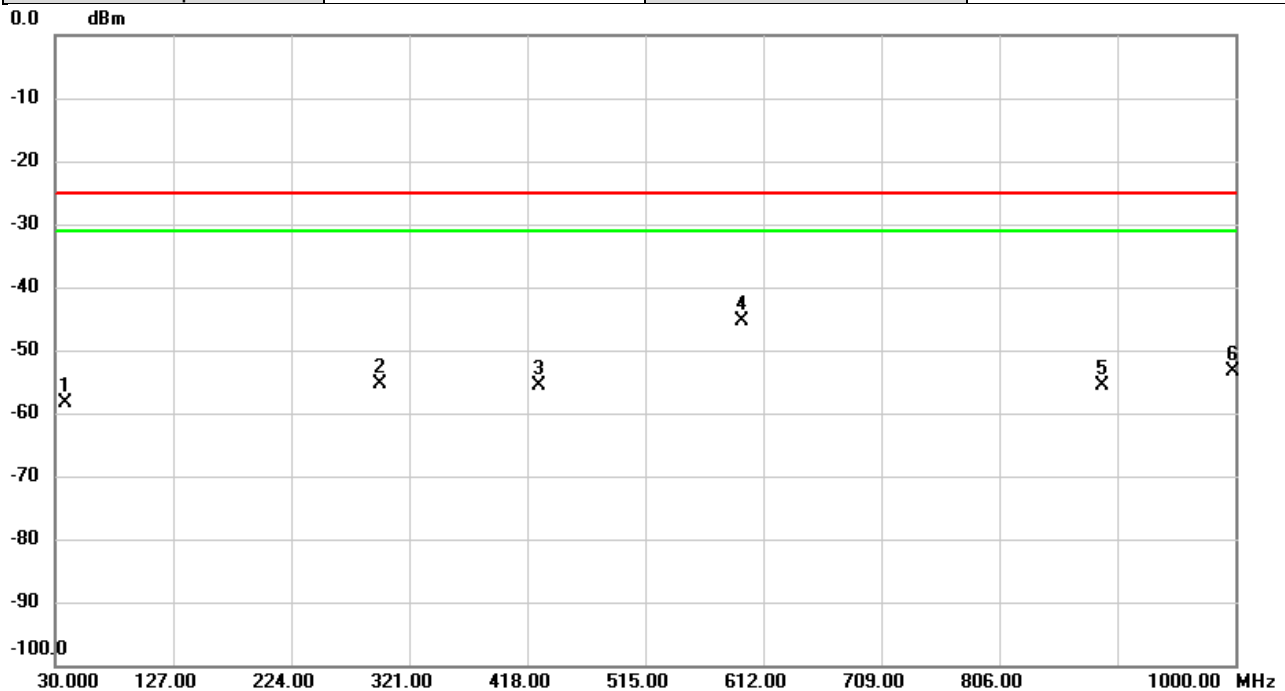

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		38.2450	-49.61	-8.83	-58.44	-25.00	-33.44	peak	
2		297.0087	-52.01	-3.35	-55.36	-25.00	-30.36	peak	
3		427.6353	-53.95	-1.75	-55.70	-25.00	-30.70	peak	
4	*	593.9580	-48.61	3.22	-45.39	-25.00	-20.39	peak	
5		891.0043	-61.94	6.39	-55.55	-25.00	-30.55	peak	
6		997.6720	-60.84	7.39	-53.45	-25.00	-28.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2026/1/21
Test Channel	CH518598	Polarization	Horizontal
Temp	23°C	Hum.	67%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		37.5660	-53.38	2.15	-51.23	-25.00	-26.23	peak	
2		127.9376	-52.88	-6.75	-59.63	-25.00	-34.63	peak	
3		392.0363	-56.35	-2.51	-58.86	-25.00	-33.86	peak	
4	*	594.0226	-50.96	0.12	-50.84	-25.00	-25.84	peak	
5		891.0043	-58.22	4.74	-53.48	-25.00	-28.48	peak	
6		997.3163	-62.61	6.15	-56.46	-25.00	-31.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2026/1/15
Test Channel	CH509202	Polarization	Vertical
Temp	23°C	Hum.	54%

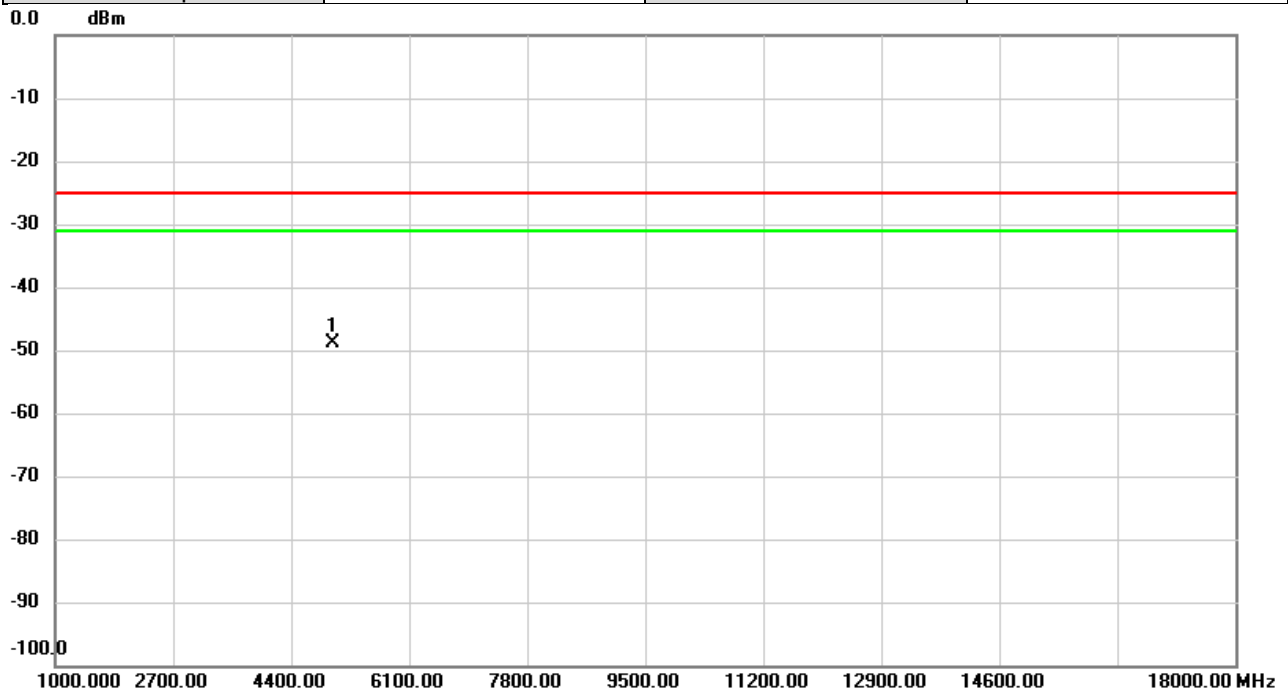


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	4994.020	-62.52	13.55	-48.97	-25.00	-23.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2026/1/15
Test Channel	CH509202	Polarization	Horizontal
Temp	23°C	Hum.	54%

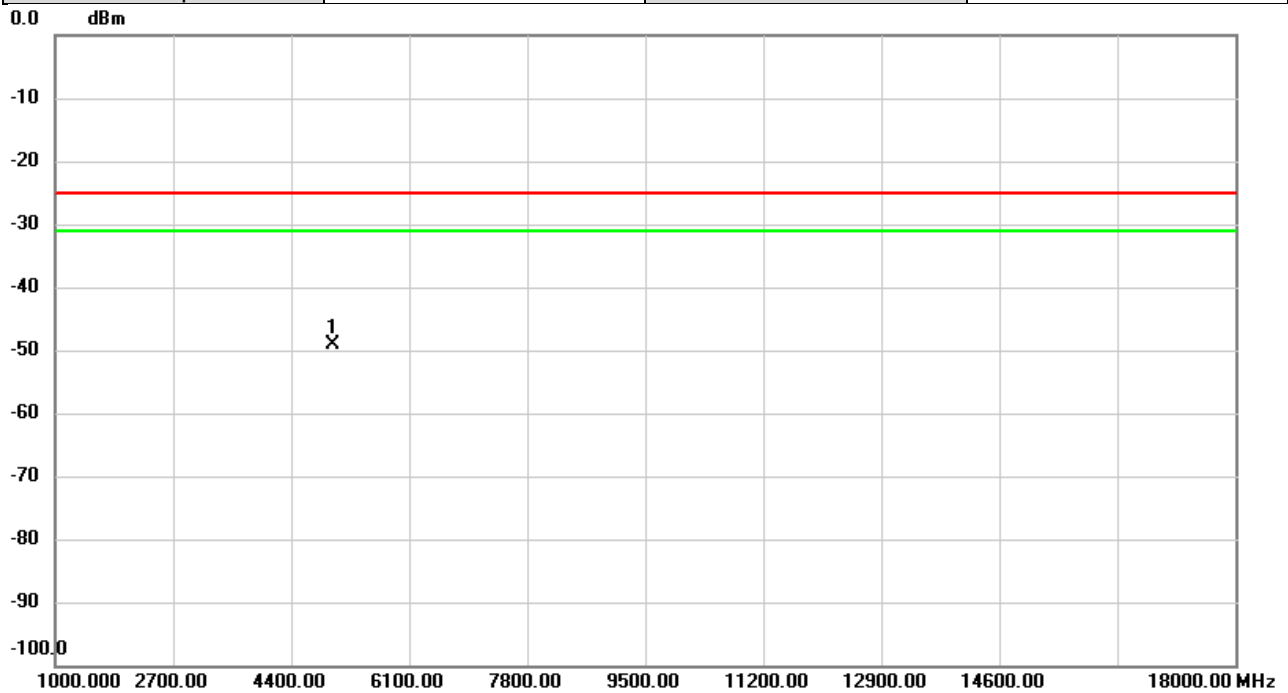


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	4994.020	-62.29	13.29	-49.00	-25.00	-24.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2026/1/15
Test Channel	CH518598	Polarization	Vertical
Temp	23°C	Hum.	54%

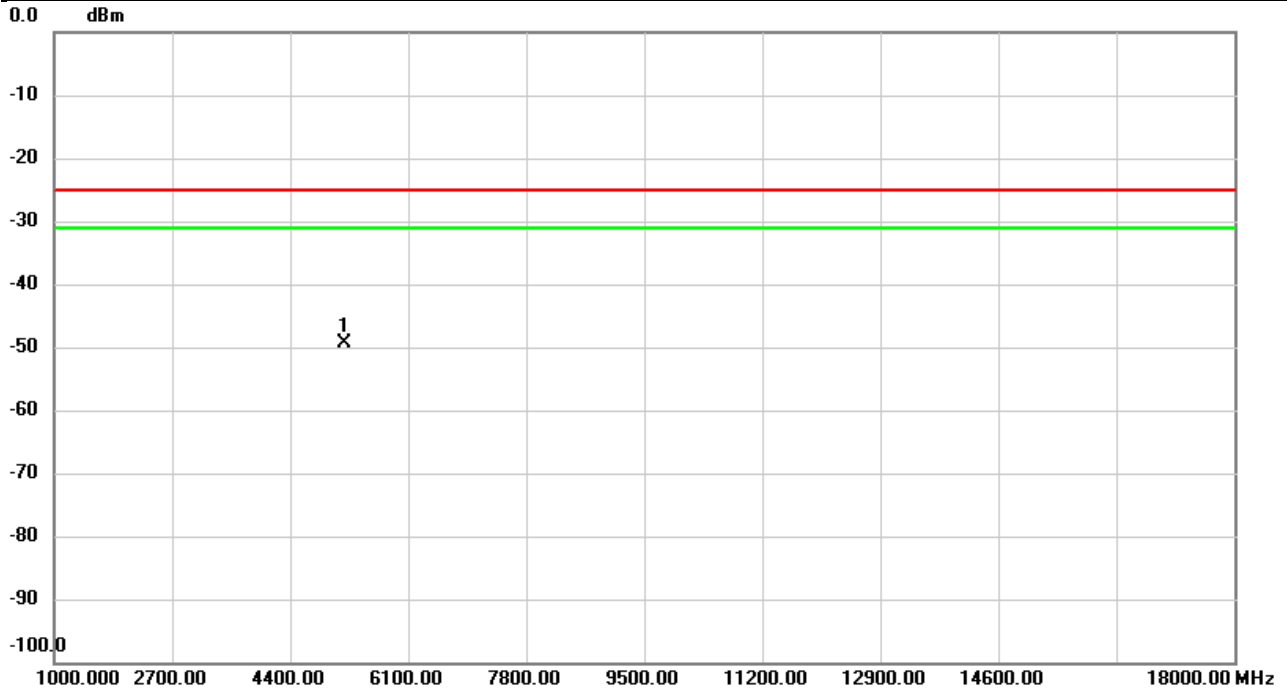


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5185.980	-63.05	13.56	-49.49	-25.00	-24.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2026/1/15
Test Channel	CH518598	Polarization	Horizontal
Temp	23°C	Hum.	54%

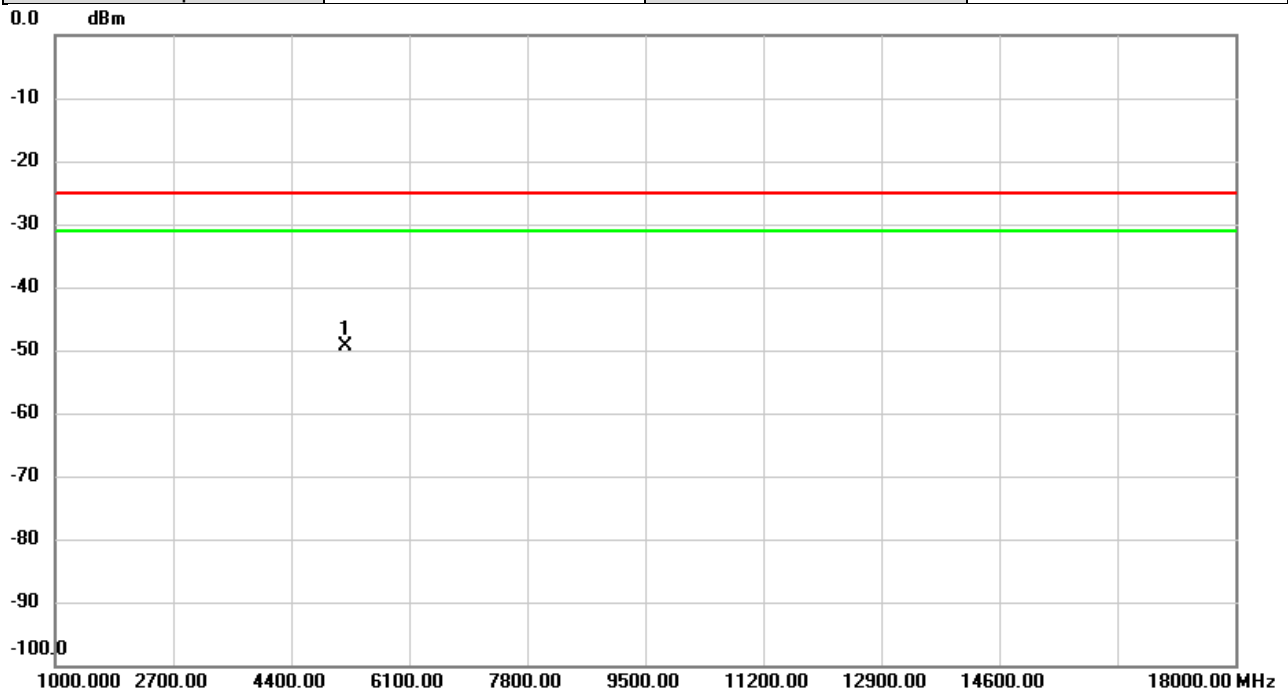


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5185.980	-62.89	13.54	-49.35	-25.00	-24.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2026/1/15
Test Channel	CH 528000	Polarization	Vertical
Temp	23°C	Hum.	54%

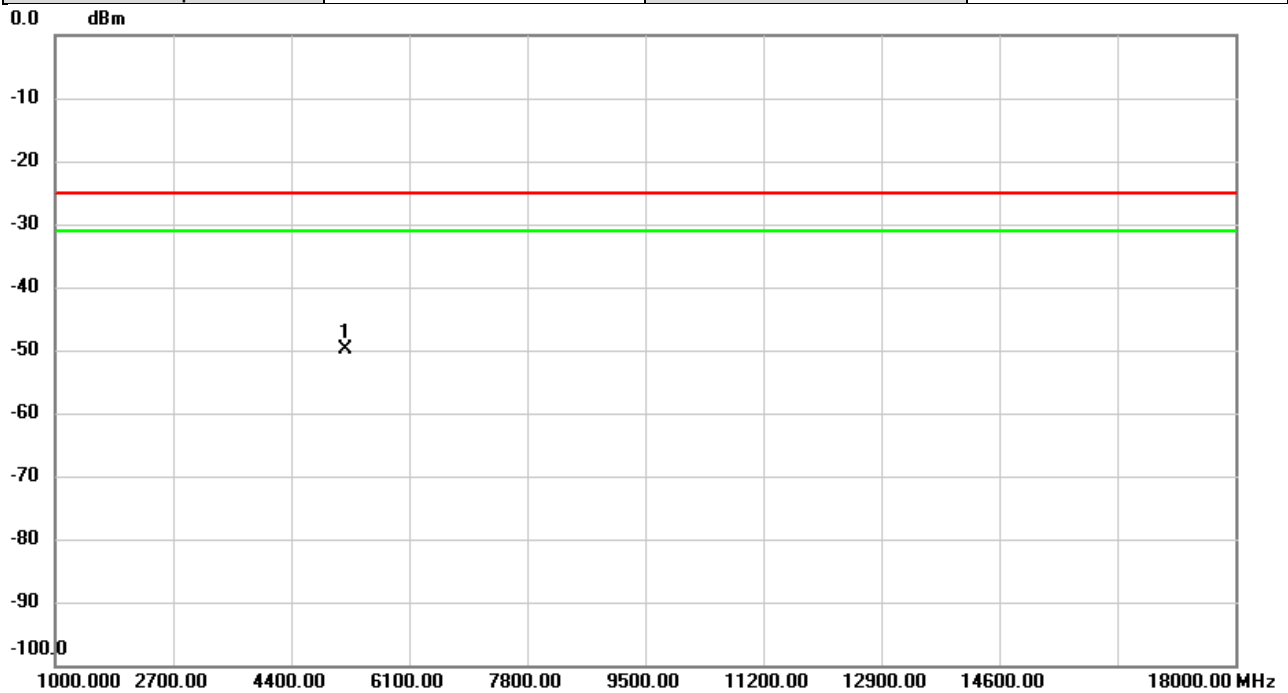


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5182.000	-63.50	13.59	-49.91	-25.00	-24.91	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2026/1/15
Test Channel	CH 528000	Polarization	Horizontal
Temp	23°C	Hum.	54%

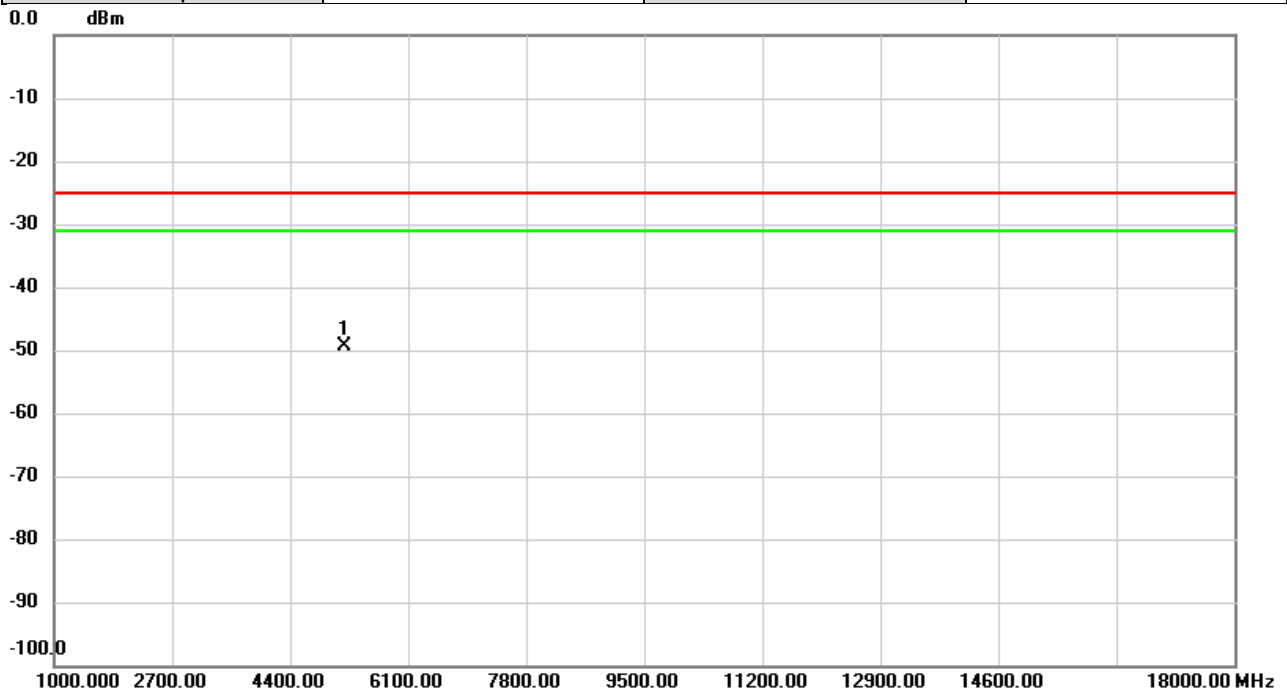


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5182.000	-63.03	13.58	-49.45	-25.00	-24.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2026/1/22
Test Channel	CH518598	Polarization	Vertical
Temp	22°C	Hum.	66%

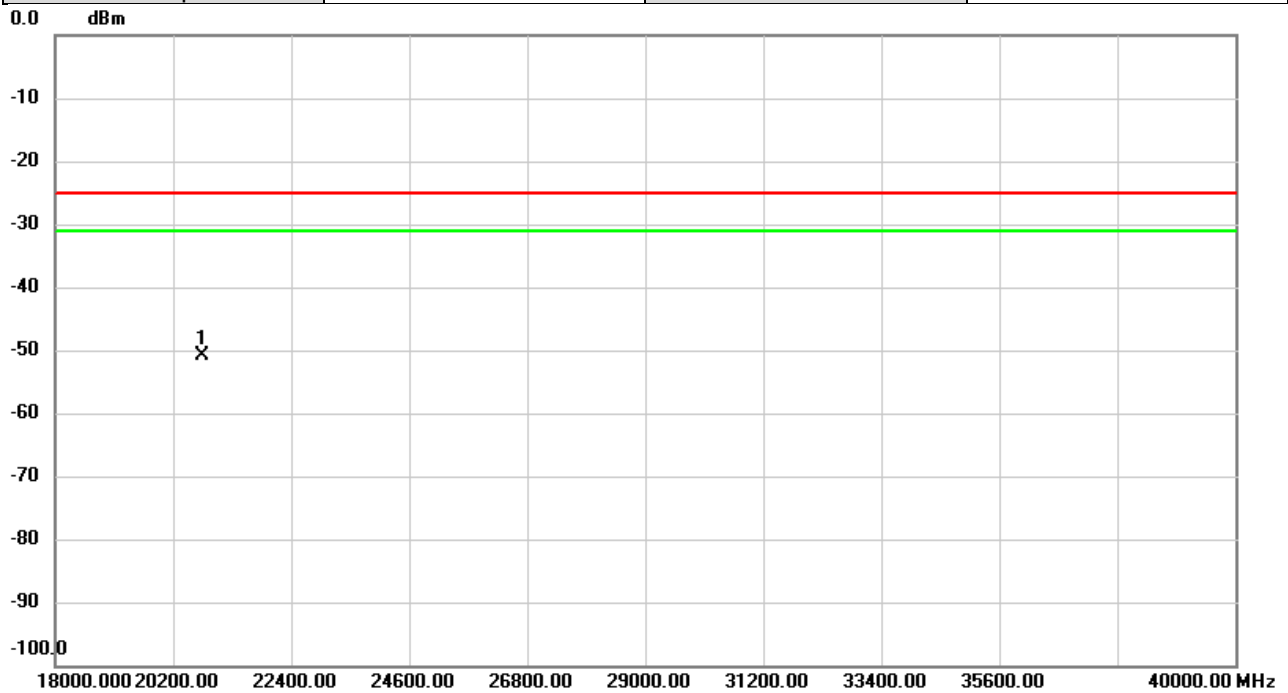


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	20743.00	-53.31	2.32	-50.99	-25.00	-25.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n41	Test Date	2026/1/22
Test Channel	CH518598	Polarization	Horizontal
Temp	22°C	Hum.	66%

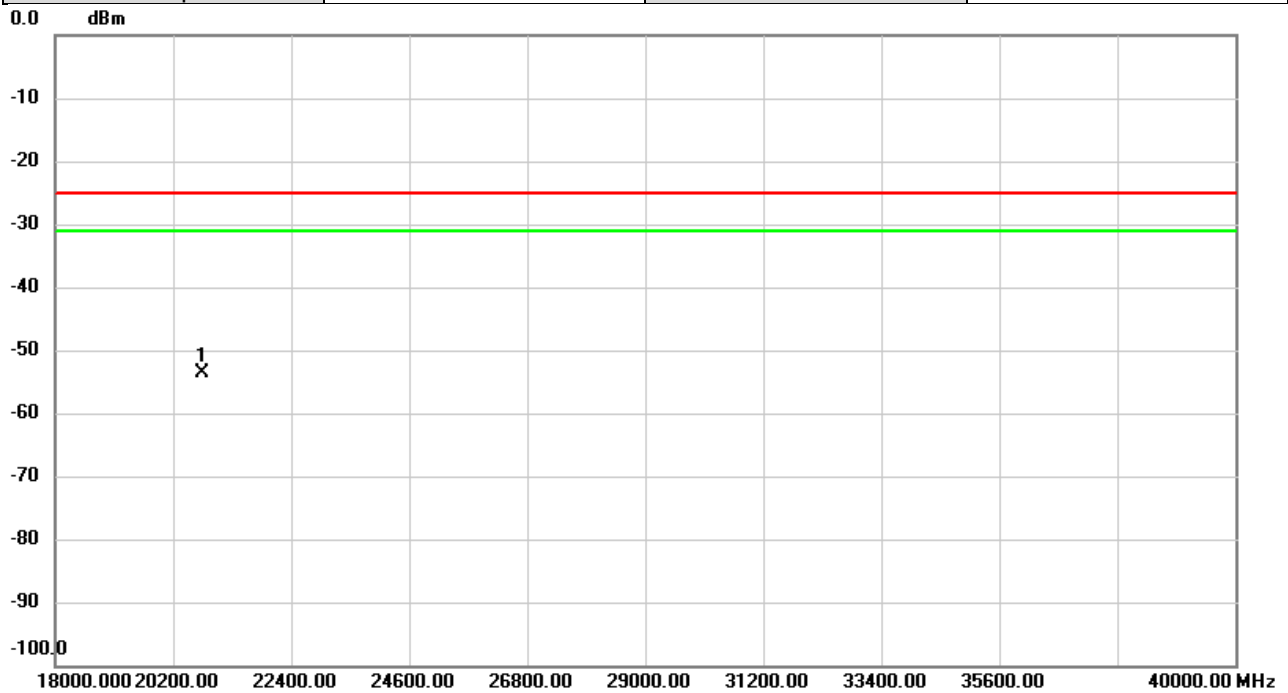


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	20743.00	-54.79	1.28	-53.51	-25.00	-28.51	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

For 3450 ~ 3550 MHz:

Test Mode	NR n77	Test Date	2026/1/21
Test Channel	CH633334	Polarization	Vertical
Temp	23°C	Hum.	67%

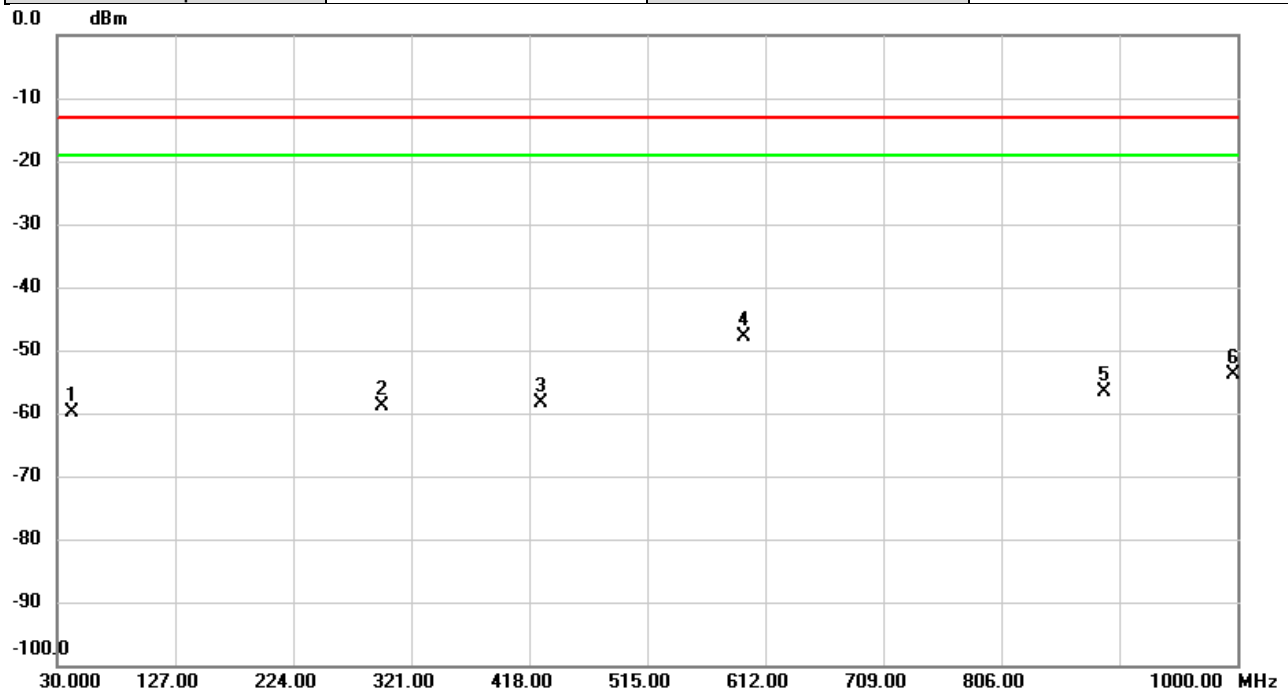


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		41.8017	-52.30	-7.45	-59.75	-13.00	-46.75	peak	
2		297.0087	-55.61	-3.35	-58.96	-13.00	-45.96	peak	
3		427.4737	-56.53	-1.75	-58.28	-13.00	-45.28	peak	
4	*	594.0227	-51.04	3.22	-47.82	-13.00	-34.82	peak	
5		890.9720	-63.11	6.38	-56.73	-13.00	-43.73	peak	
6		997.2193	-61.33	7.38	-53.95	-13.00	-40.95	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2026/1/21
Test Channel	CH633334	Polarization	Horizontal
Temp	23°C	Hum.	67%

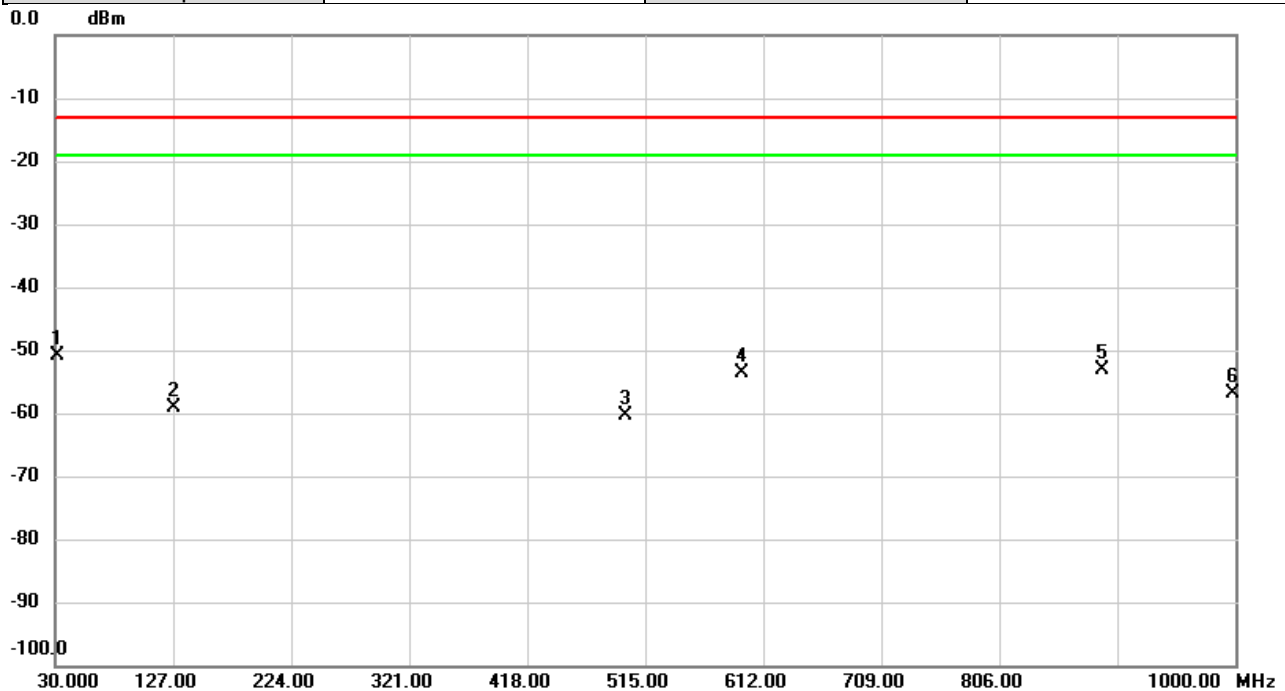


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	32.5543	-53.66	2.69	-50.97	-13.00	-37.97	peak	
2		127.7113	-52.36	-6.77	-59.13	-13.00	-46.13	peak	
3		498.7363	-58.81	-1.49	-60.30	-13.00	-47.30	peak	
4		593.9903	-53.63	0.12	-53.51	-13.00	-40.51	peak	
5		891.0043	-57.86	4.74	-53.12	-13.00	-40.12	peak	
6		997.8013	-63.11	6.16	-56.95	-13.00	-43.95	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2026/1/15
Test Channel	CH633334	Polarization	Vertical
Temp	23°C	Hum.	54%

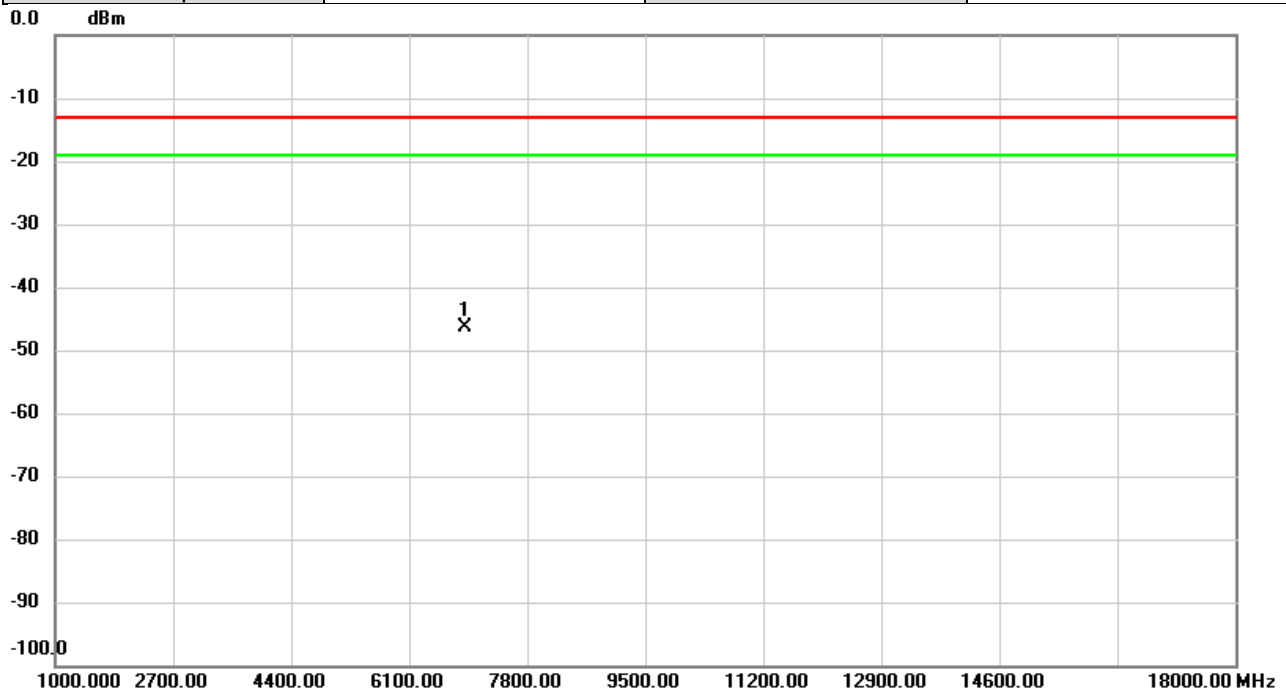


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6902.020	-64.24	17.99	-46.25	-13.00	-33.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2026/1/15
Test Channel	CH633334	Polarization	Horizontal
Temp	23°C	Hum.	54%

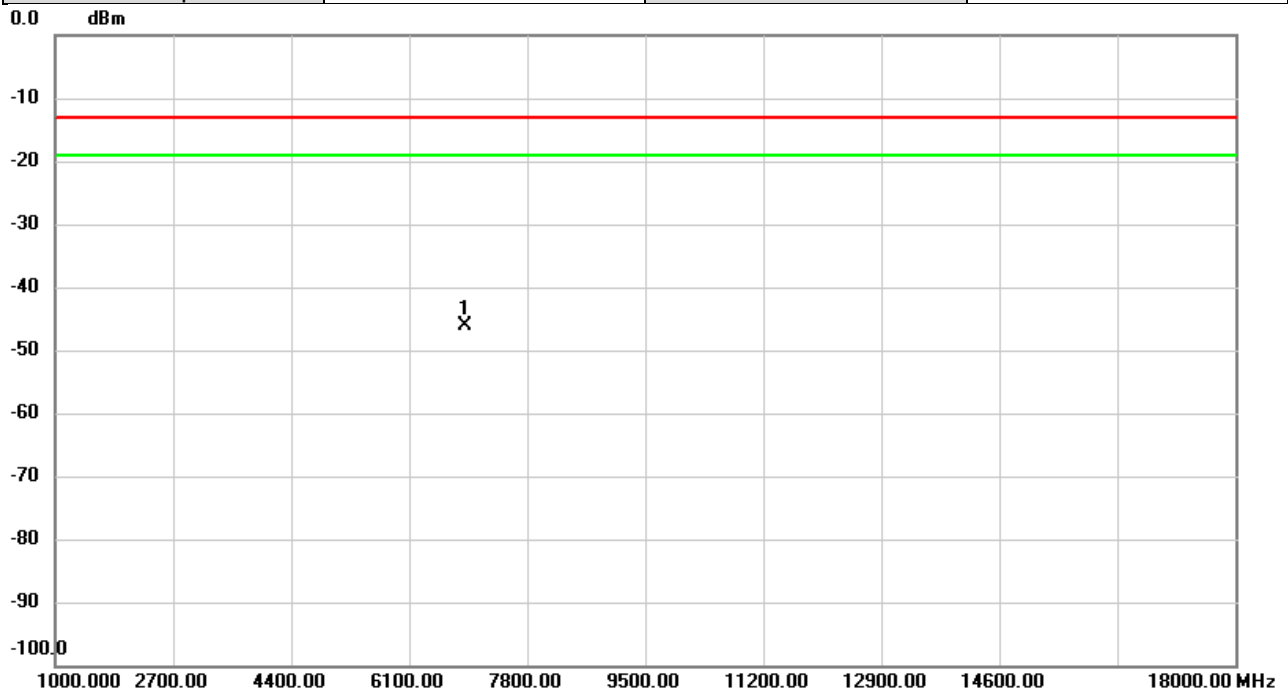


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6902.020	-63.94	17.82	-46.12	-13.00	-33.12	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2026/1/22
Test Channel	CH633334	Polarization	Vertical
Temp	22°C	Hum.	66%

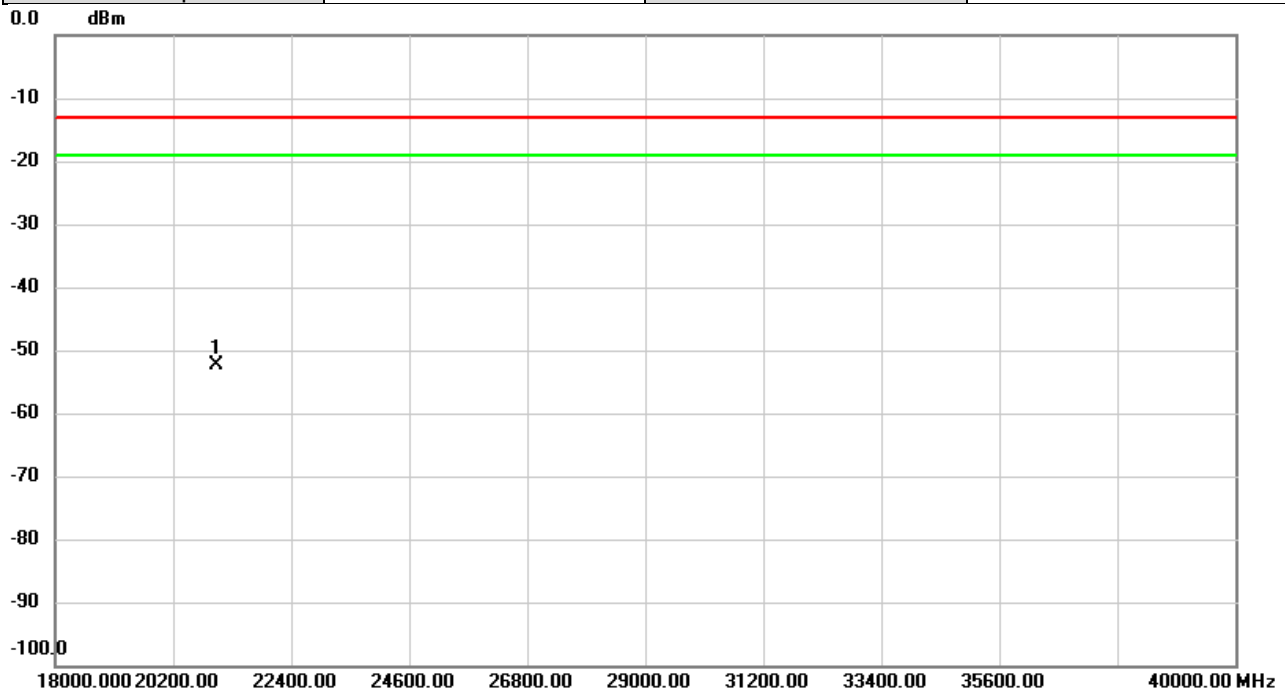


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	21000.00	-54.97	2.67	-52.30	-13.00	-39.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2026/1/22
Test Channel	CH633334	Polarization	Horizontal
Temp	22°C	Hum.	66%

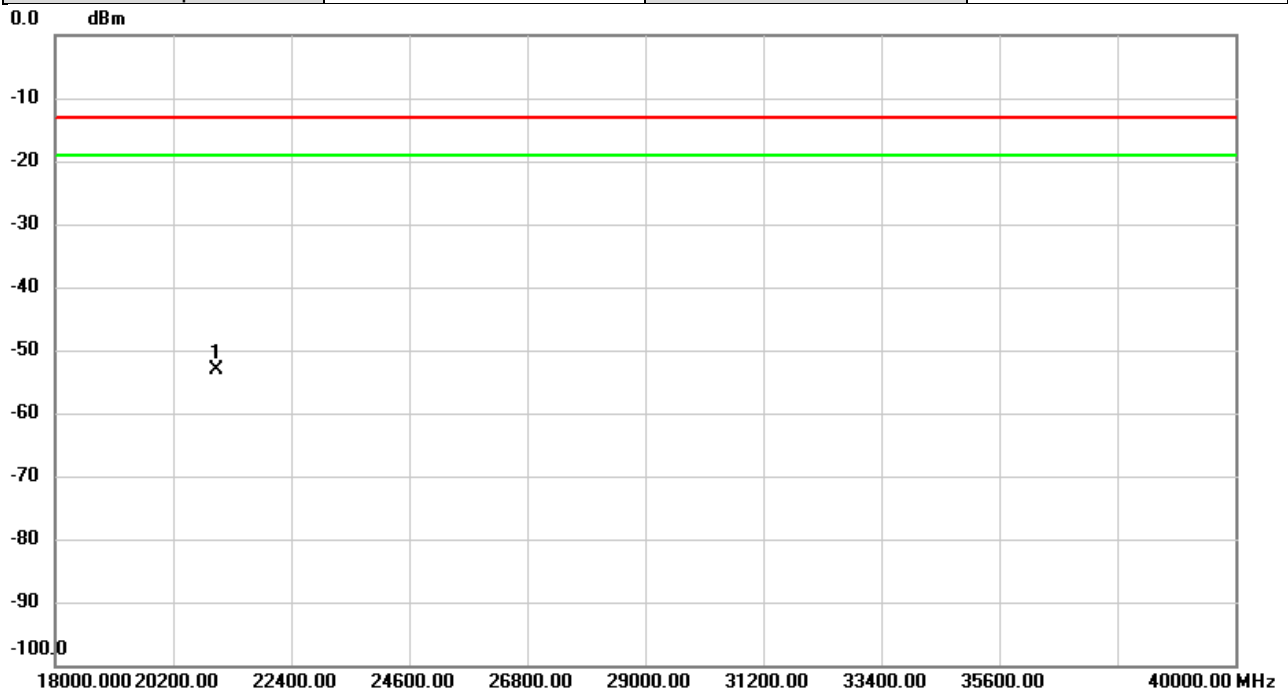


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	21000.00	-54.76	1.63	-53.13	-13.00	-40.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

For 3700 ~ 3980 MHz:

Test Mode	NR n77	Test Date	2026/1/21
Test Channel	CH656000	Polarization	Vertical
Temp	23°C	Hum.	67%

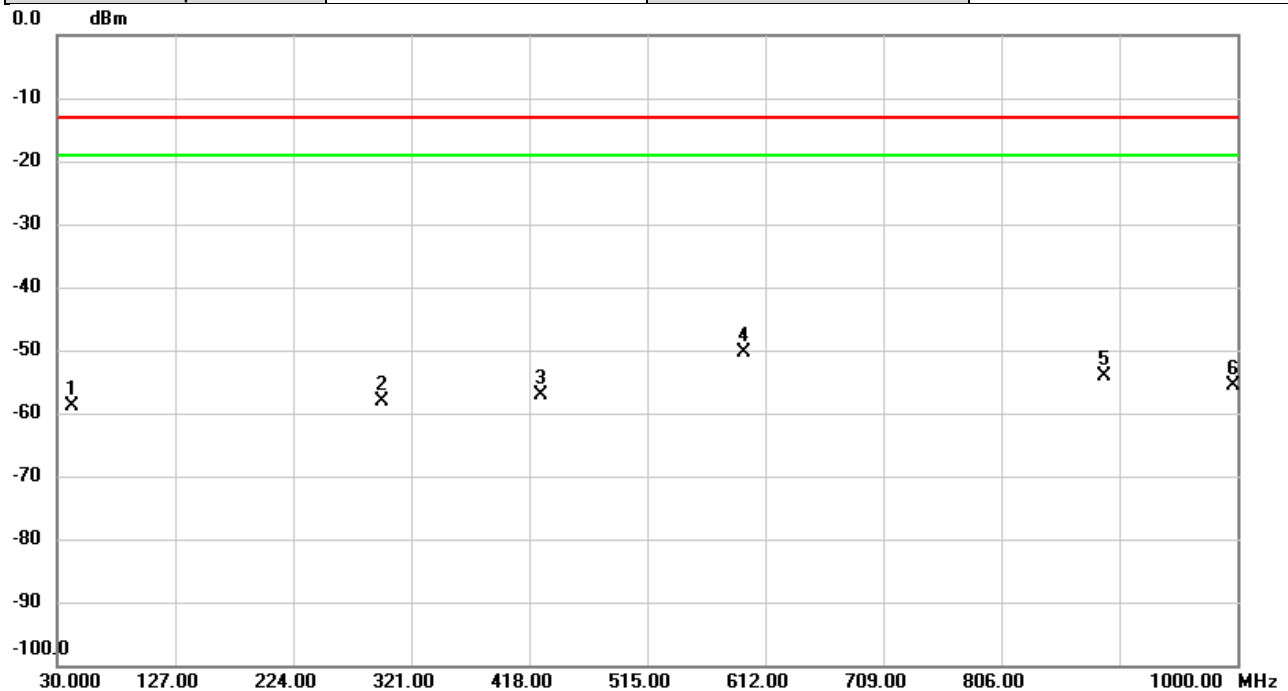


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		41.8017	-51.35	-7.45	-58.80	-13.00	-45.80	peak	
2		297.0087	-54.73	-3.35	-58.08	-13.00	-45.08	peak	
3		427.7323	-55.40	-1.74	-57.14	-13.00	-44.14	peak	
4	*	593.9580	-53.51	3.22	-50.29	-13.00	-37.29	peak	
5		891.0043	-60.45	6.39	-54.06	-13.00	-41.06	peak	
6		996.8960	-62.98	7.38	-55.60	-13.00	-42.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2026/1/21
Test Channel	CH656000	Polarization	Horizontal
Temp	23°C	Hum.	67%

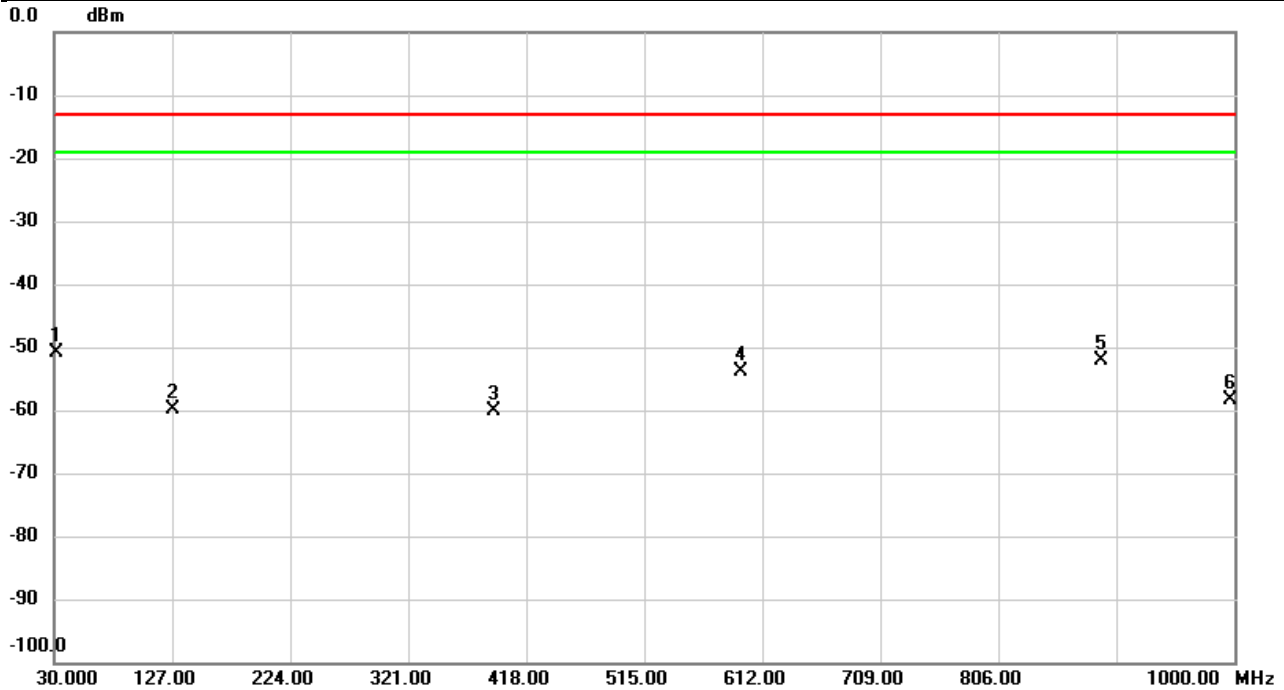


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	32.5866	-53.43	2.68	-50.75	-13.00	-37.75	peak	
2		128.0346	-53.18	-6.74	-59.92	-13.00	-46.92	peak	
3		391.6482	-57.67	-2.51	-60.18	-13.00	-47.18	peak	
4		593.9903	-54.02	0.12	-53.90	-13.00	-40.90	peak	
5		890.9720	-56.88	4.73	-52.15	-13.00	-39.15	peak	
6		996.4110	-64.60	6.14	-58.46	-13.00	-45.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2026/1/15
Test Channel	CH650000	Polarization	Vertical
Temp	23°C	Hum.	54%

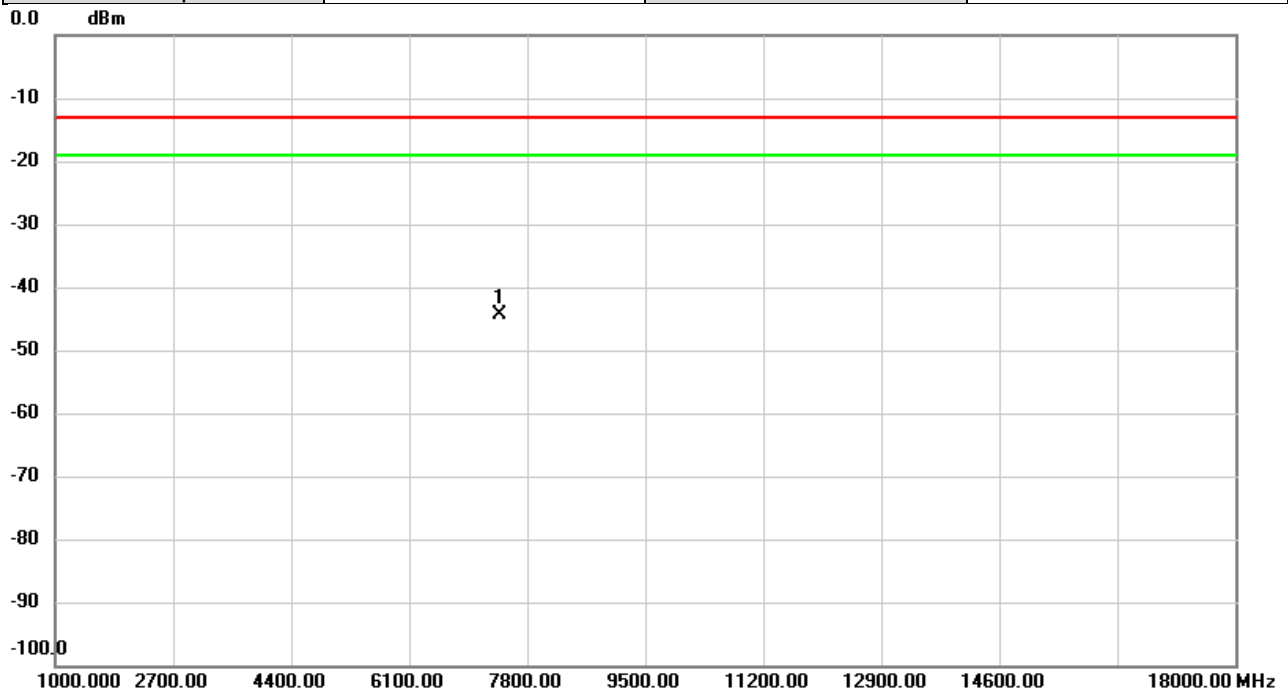


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7400.000	-62.42	18.07	-44.35	-13.00	-31.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2026/1/15
Test Channel	CH650000	Polarization	Horizontal
Temp	23°C	Hum.	54%

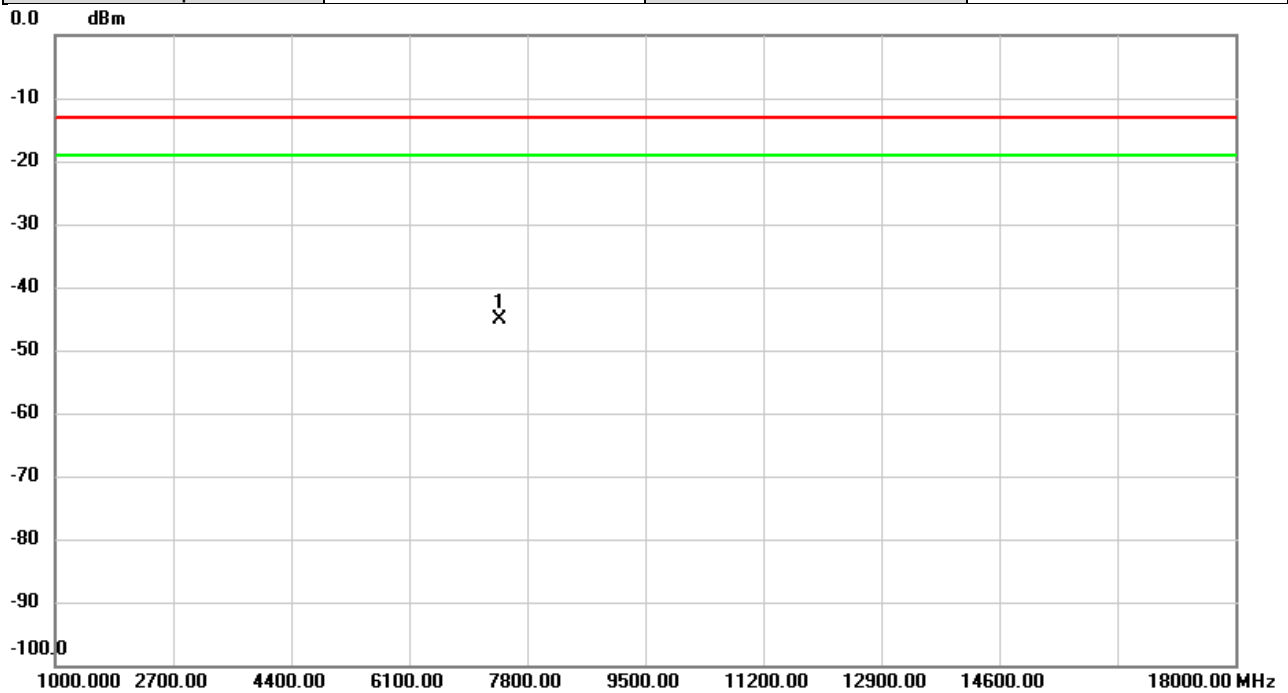


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7400.000	-63.36	18.12	-45.24	-13.00	-32.24	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2026/1/27
Test Channel	CH656000	Polarization	Vertical
Temp	24°C	Hum.	52%

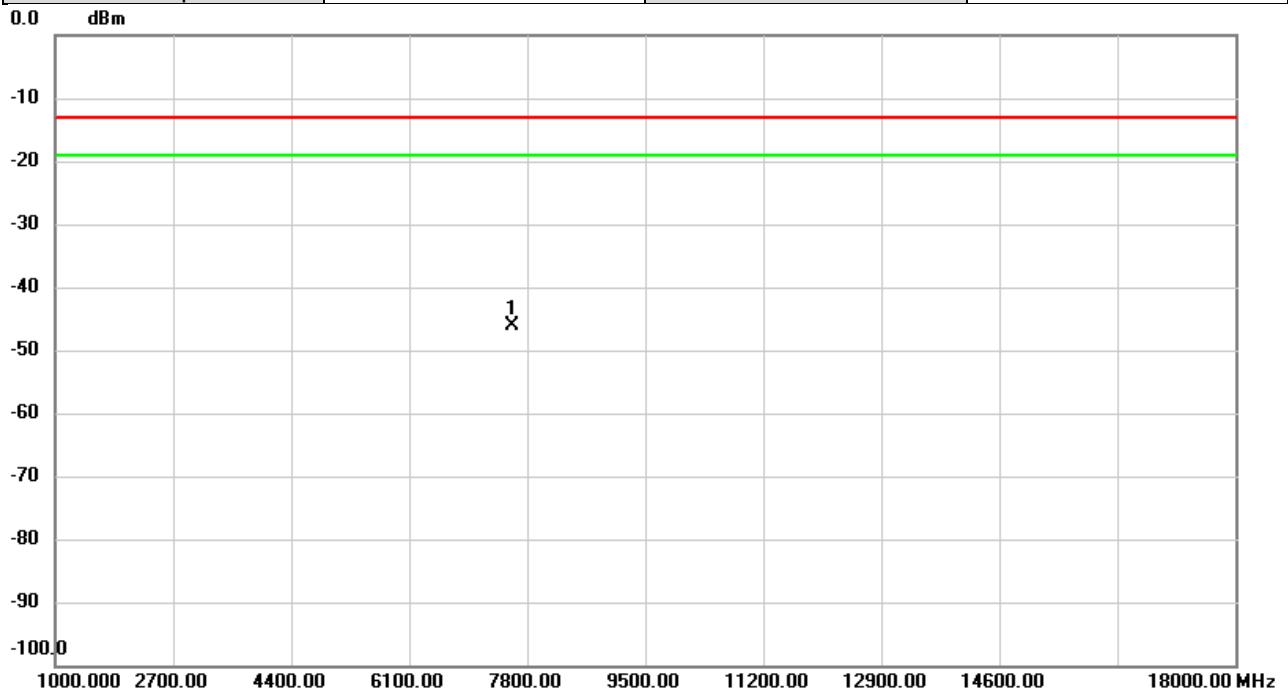


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7580.000	-63.39	17.24	-46.15	-13.00	-33.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2026/1/27
Test Channel	CH656000	Polarization	Horizontal
Temp	24°C	Hum.	52%

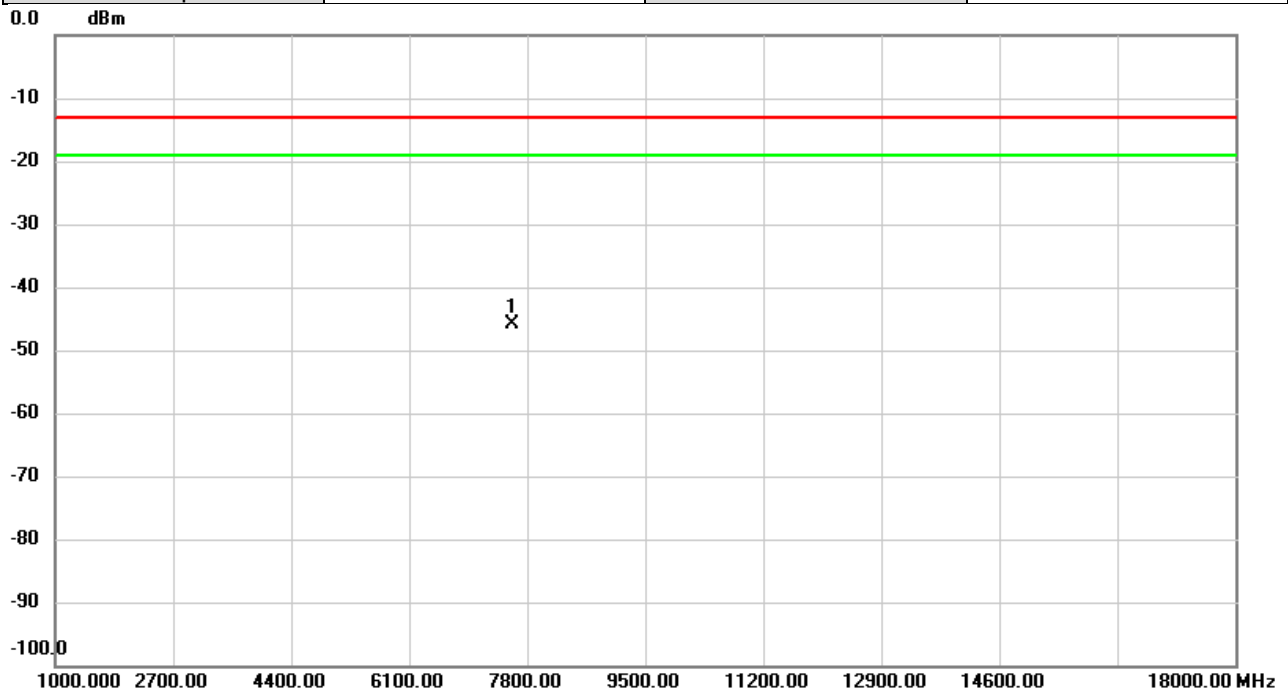


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7580.000	-63.18	17.27	-45.91	-13.00	-32.91	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2026/1/27
Test Channel	CH662000	Polarization	Vertical
Temp	24°C	Hum.	52%

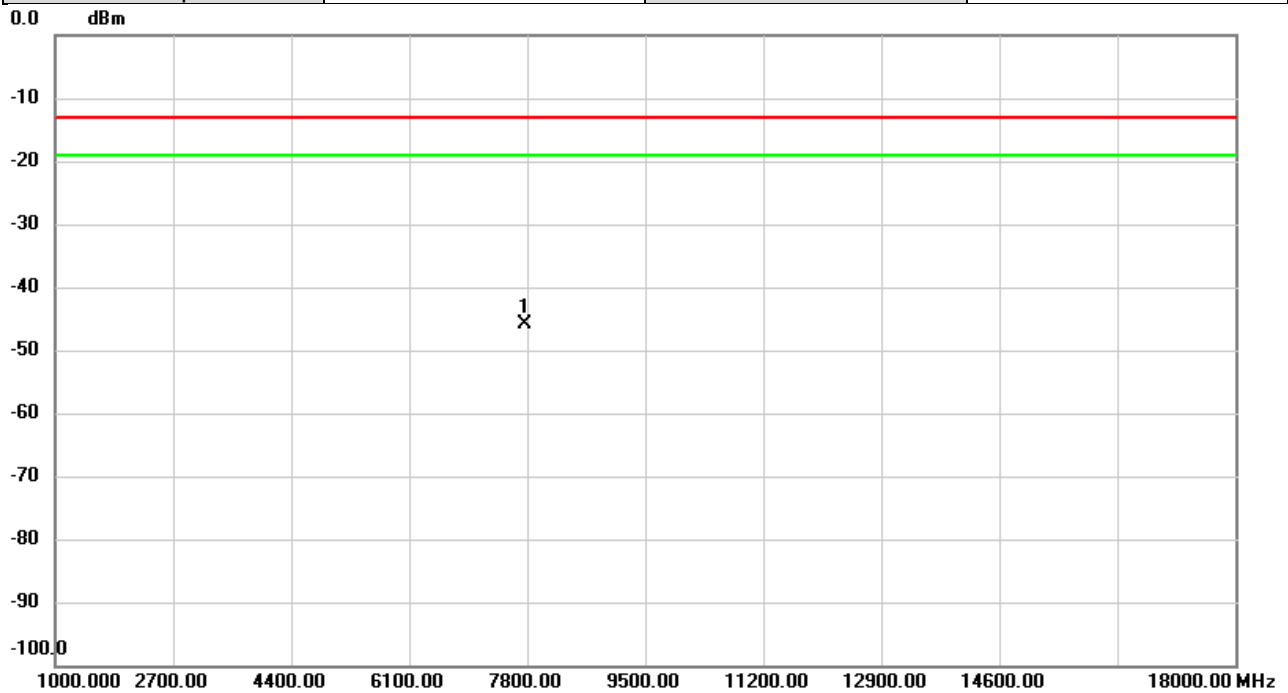


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7760.000	-63.11	17.36	-45.75	-13.00	-32.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2026/1/27
Test Channel	CH662000	Polarization	Horizontal
Temp	24°C	Hum.	52%

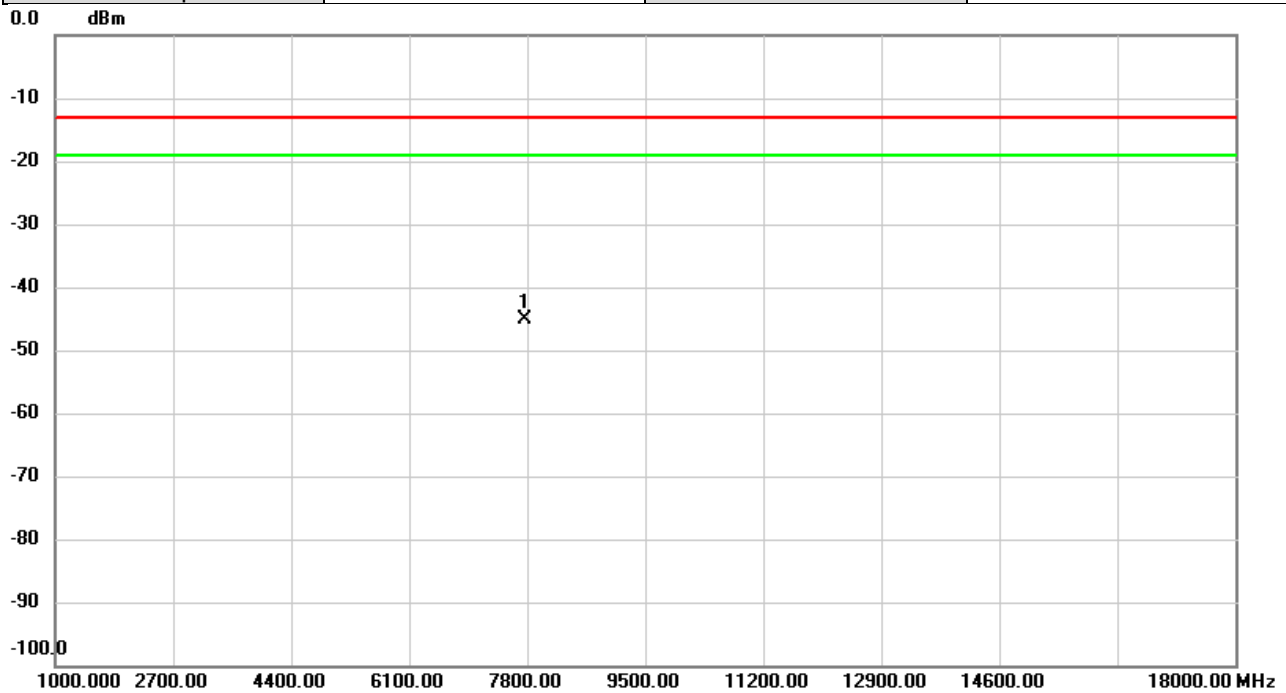


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7760.000	-62.62	17.42	-45.20	-13.00	-32.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2026/1/22
Test Channel	CH656000	Polarization	Vertical
Temp	22°C	Hum.	66%

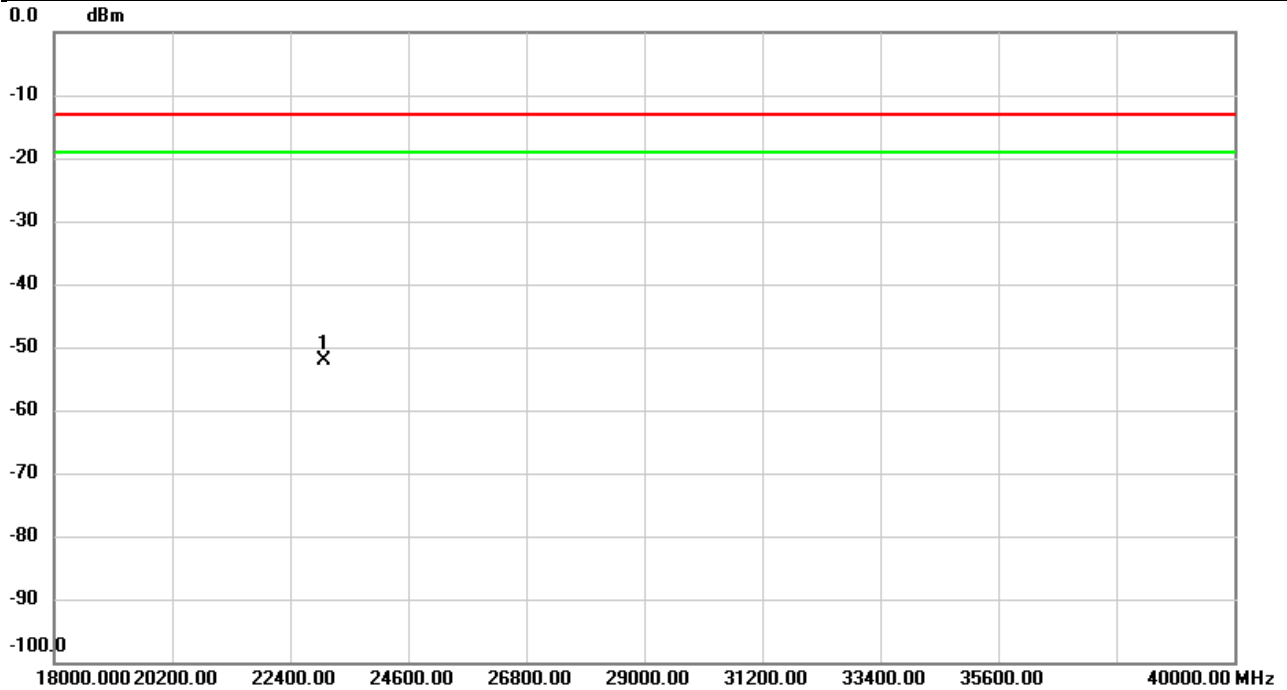


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	23040.00	-56.24	4.04	-52.20	-13.00	-39.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n77	Test Date	2026/1/22
Test Channel	CH656000	Polarization	Horizontal
Temp	22°C	Hum.	66%

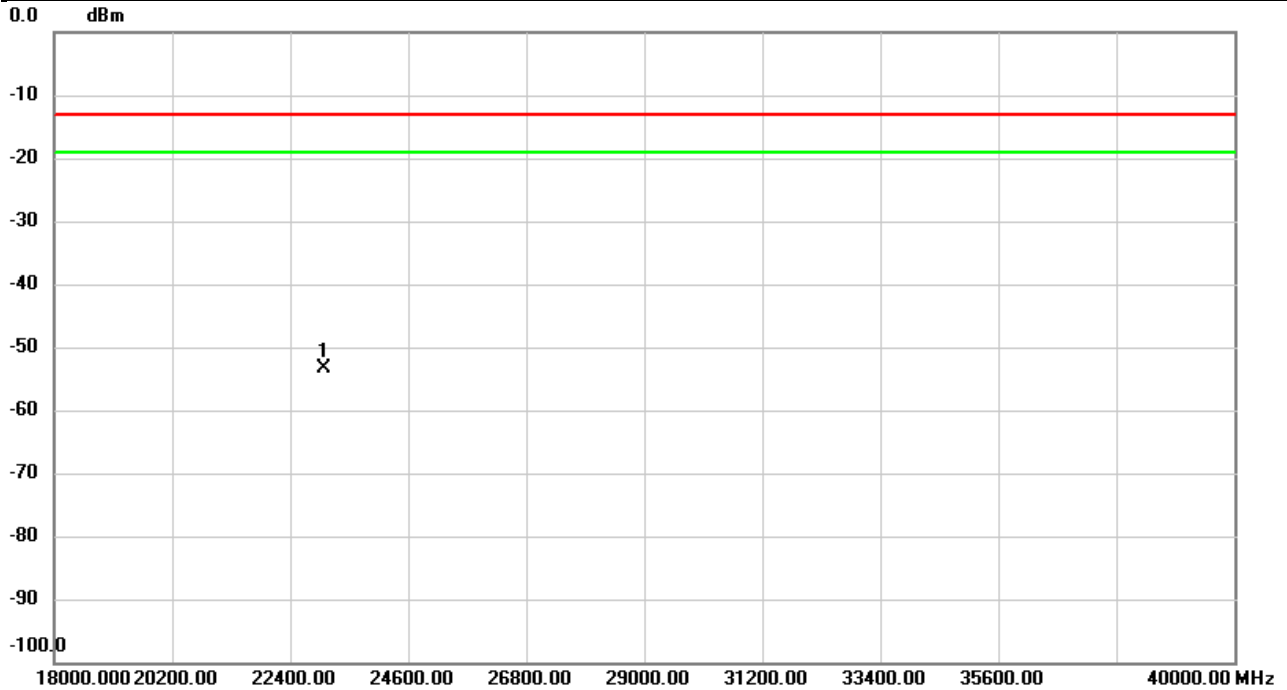


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	23040.00	-56.35	2.99	-53.36	-13.00	-40.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

For 3450 ~ 3550 MHz:

Test Mode	NR n78	Test Date	2026/1/21
Test Channel	CH633334	Polarization	Vertical
Temp	23°C	Hum.	67%

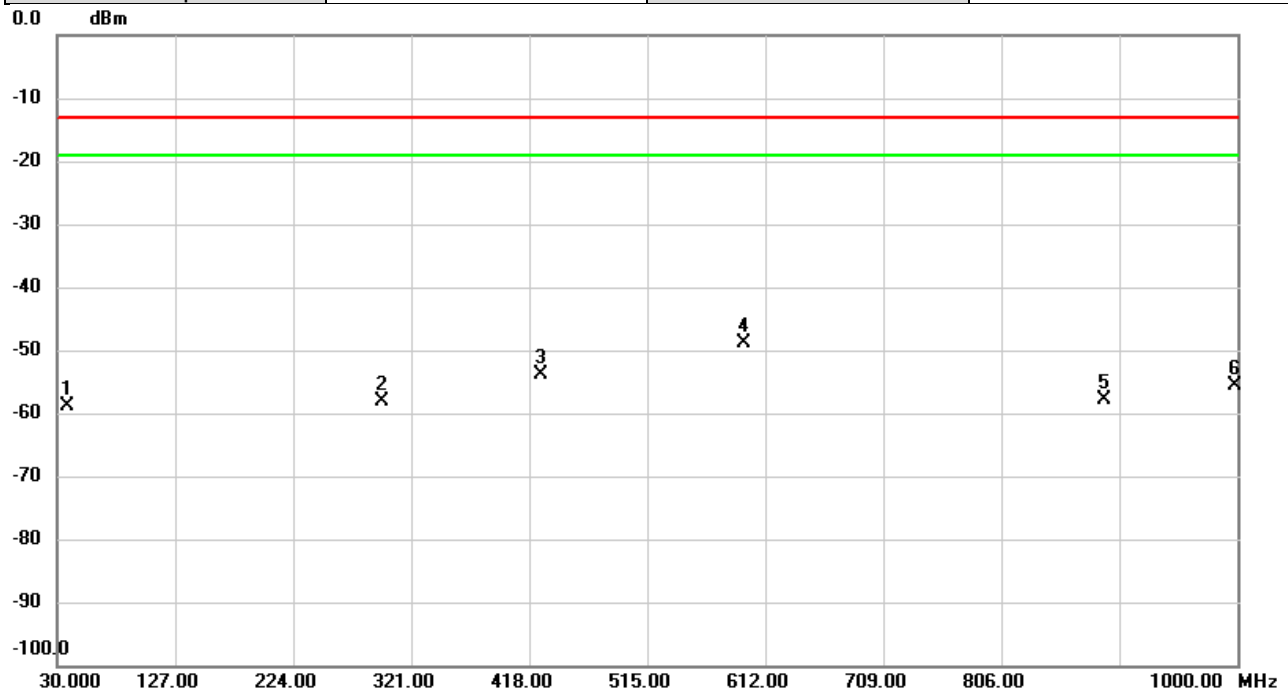


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		38.6653	-50.14	-8.75	-58.89	-13.00	-45.89	peak	
2		297.0087	-54.68	-3.35	-58.03	-13.00	-45.03	peak	
3		427.6353	-52.23	-1.75	-53.98	-13.00	-40.98	peak	
4	*	594.0227	-51.98	3.22	-48.76	-13.00	-35.76	peak	
5		891.0043	-64.15	6.39	-57.76	-13.00	-44.76	peak	
6		997.8660	-63.02	7.39	-55.63	-13.00	-42.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2026/1/21
Test Channel	CH633334	Polarization	Horizontal
Temp	23°C	Hum.	67%

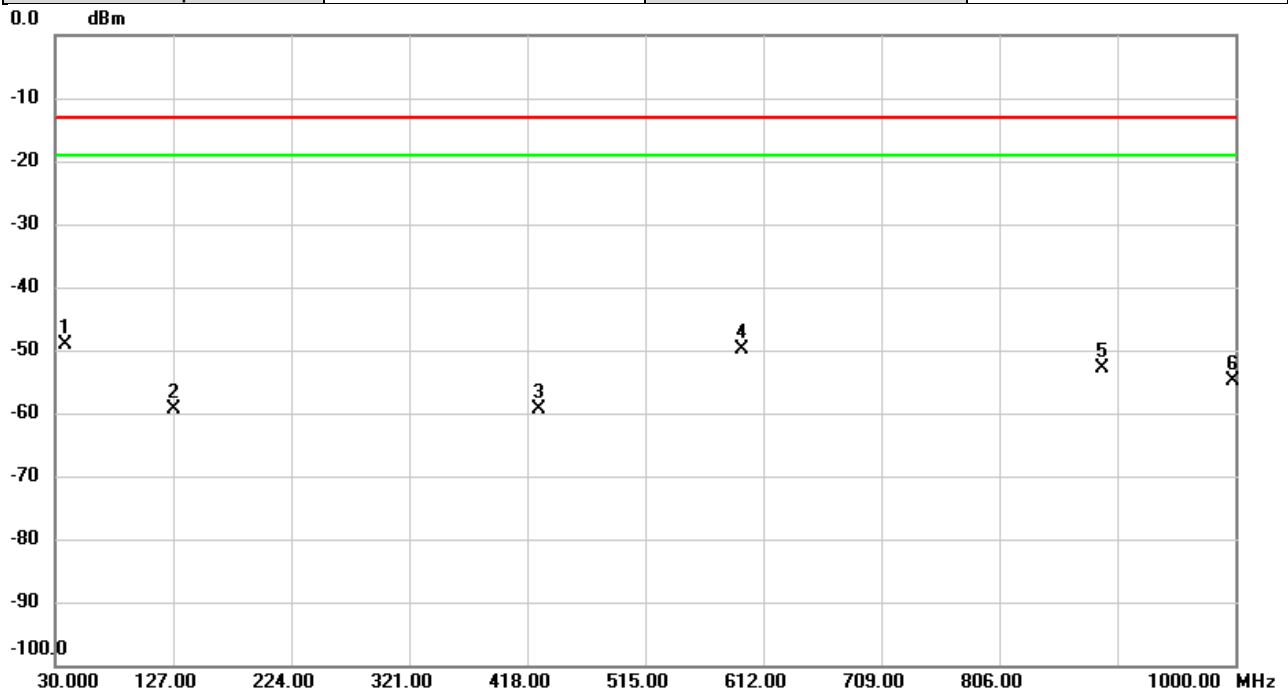


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	38.2450	-51.32	2.09	-49.23	-13.00	-36.23	peak	
2		127.6790	-52.63	-6.77	-59.40	-13.00	-46.40	peak	
3		427.5706	-57.15	-2.17	-59.32	-13.00	-46.32	peak	
4		593.9903	-50.00	0.12	-49.88	-13.00	-36.88	peak	
5		891.0043	-57.62	4.74	-52.88	-13.00	-39.88	peak	
6		997.5426	-61.09	6.15	-54.94	-13.00	-41.94	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2026/1/15
Test Channel	CH633334	Polarization	Vertical
Temp	23°C	Hum.	54%

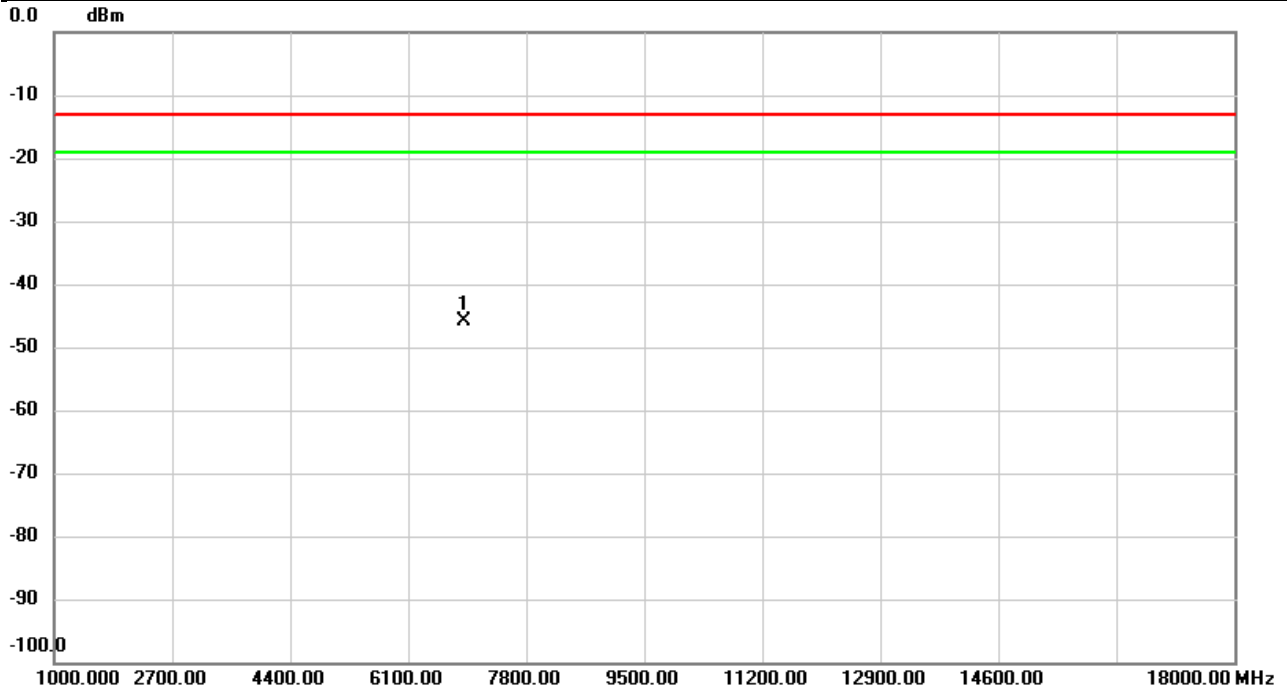


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6902.020	-63.88	17.99	-45.89	-13.00	-32.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2026/1/15
Test Channel	CH633334	Polarization	Horizontal
Temp	23°C	Hum.	54%

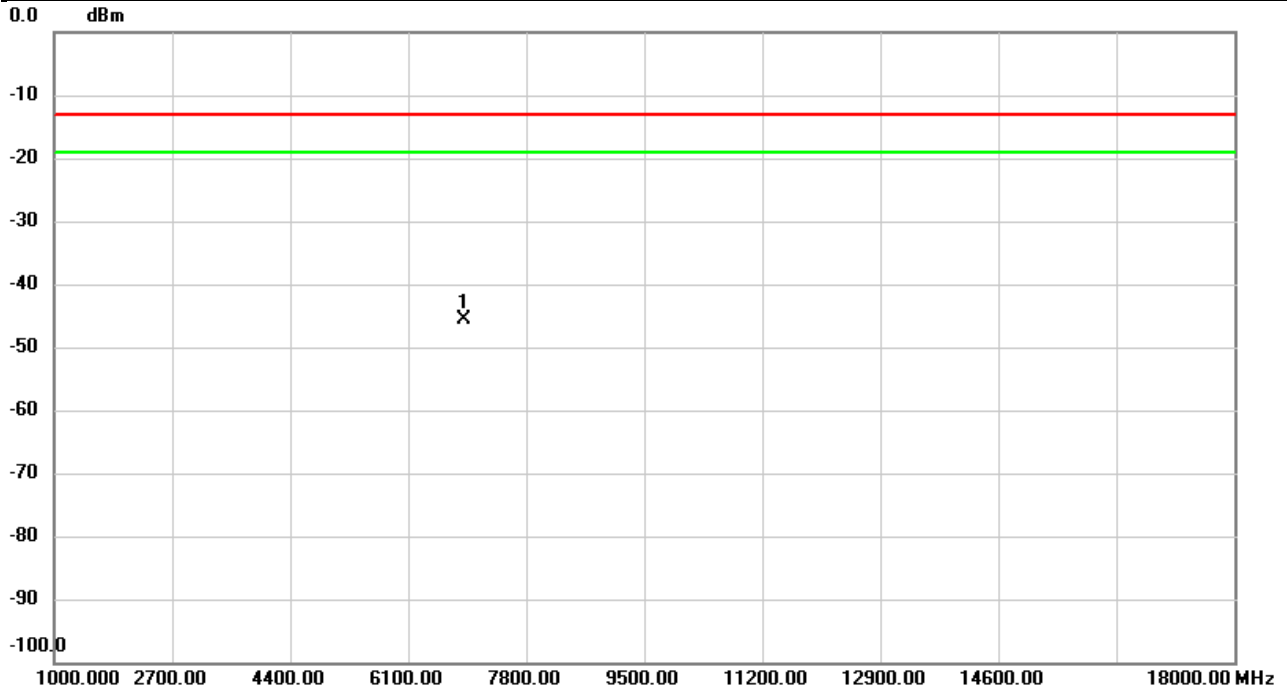


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6902.020	-63.42	17.82	-45.60	-13.00	-32.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2026/1/22
Test Channel	CH633334	Polarization	Vertical
Temp	22°C	Hum.	66%

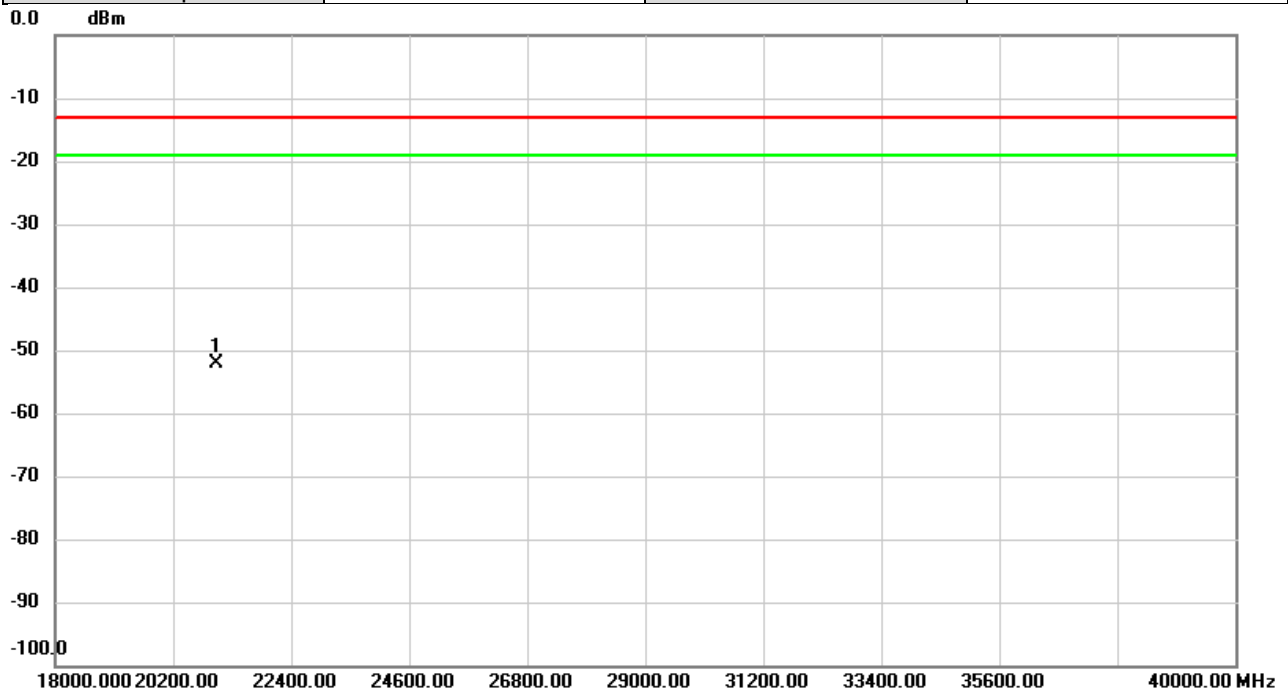


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	21000.00	-54.90	2.67	-52.23	-13.00	-39.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2026/1/22
Test Channel	CH633334	Polarization	Horizontal
Temp	22°C	Hum.	66%

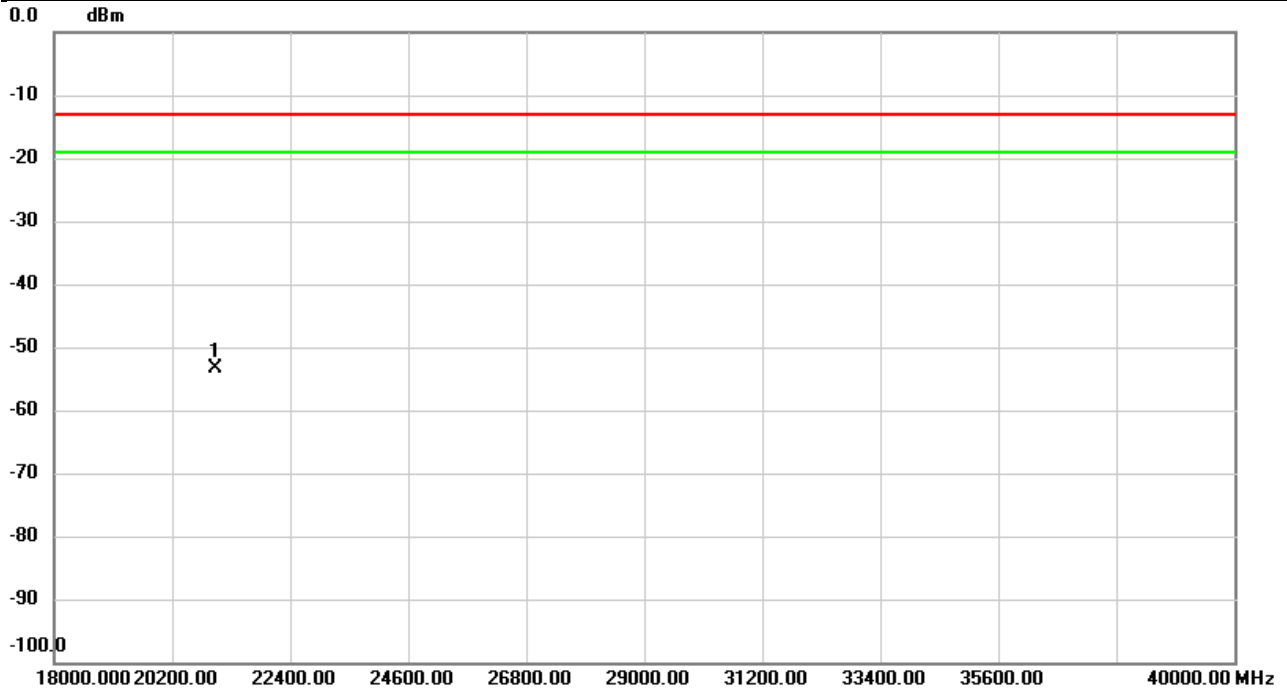


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	21000.00	-55.11	1.63	-53.48	-13.00	-40.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

For 3700 ~ 3800 MHz:

Test Mode	NR n78	Test Date	2026/1/21
Test Channel	CH650000	Polarization	Vertical
Temp	23°C	Hum.	67%

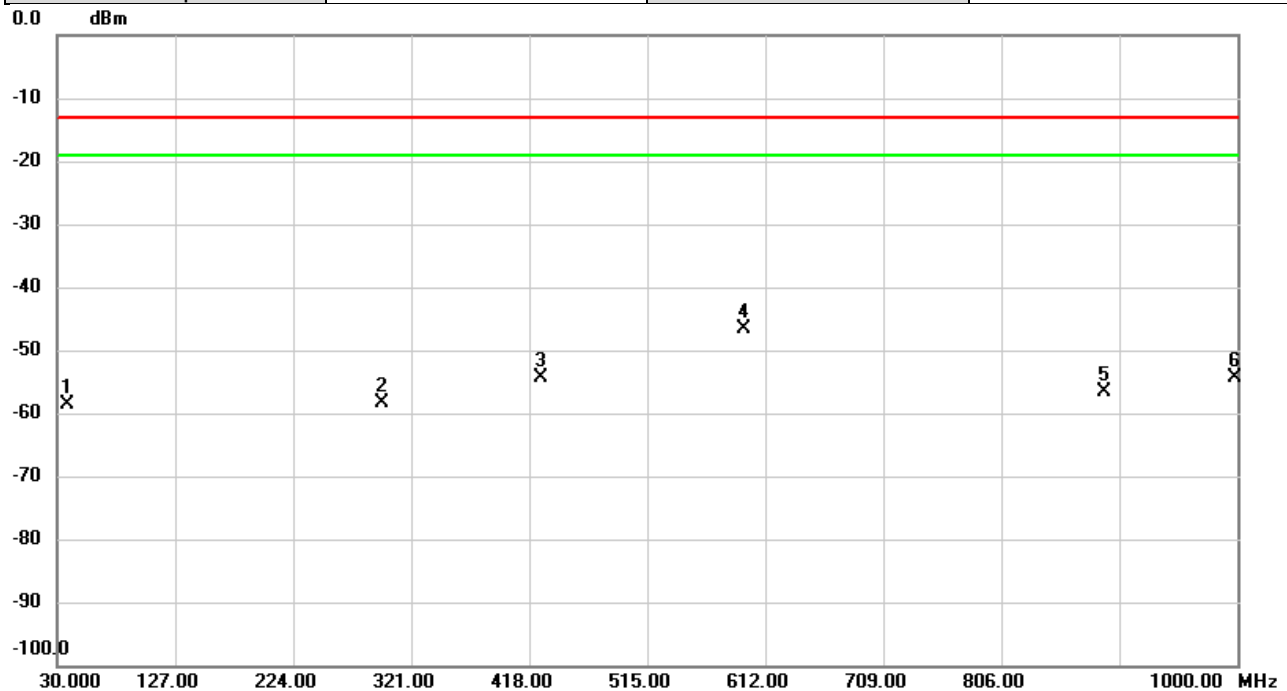


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		38.2127	-49.89	-8.83	-58.72	-13.00	-45.72	peak	
2		297.0087	-54.98	-3.35	-58.33	-13.00	-45.33	peak	
3		427.5707	-52.53	-1.75	-54.28	-13.00	-41.28	peak	
4	*	594.0227	-49.74	3.22	-46.52	-13.00	-33.52	peak	
5		891.0043	-63.02	6.39	-56.63	-13.00	-43.63	peak	
6		997.4457	-61.81	7.38	-54.43	-13.00	-41.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2026/1/21
Test Channel	CH650000	Polarization	Horizontal
Temp	23°C	Hum.	67%

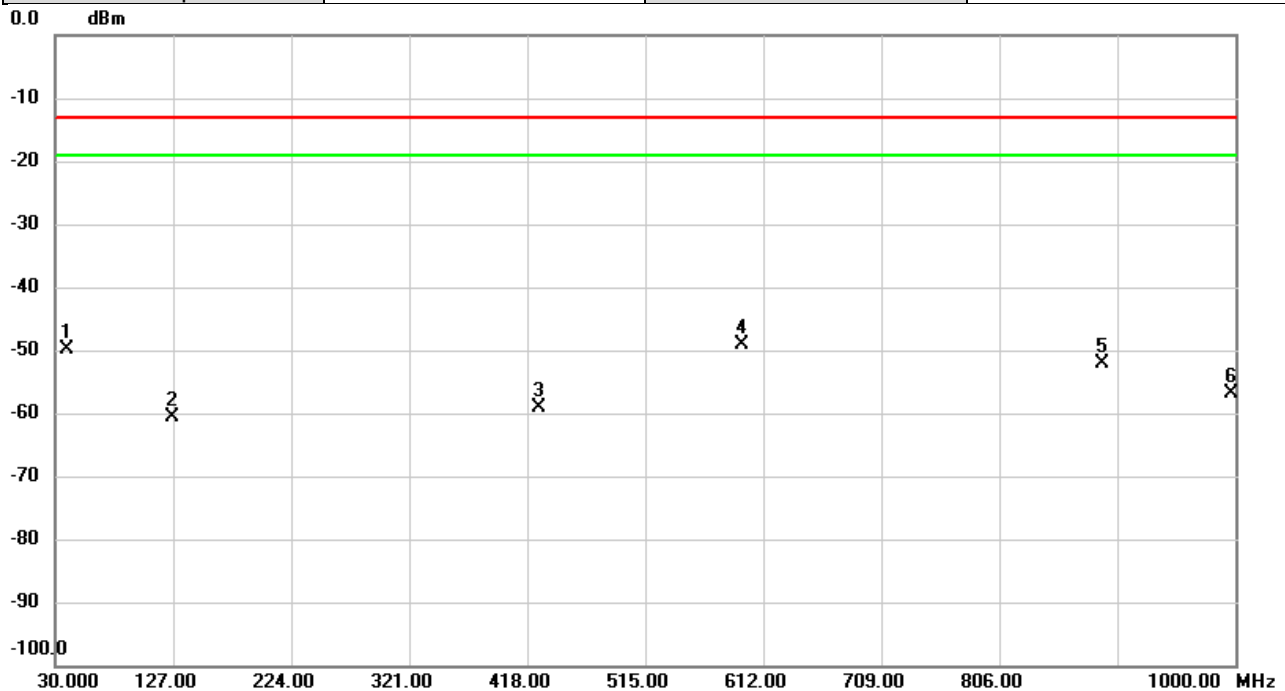


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		39.2150	-51.99	2.01	-49.98	-13.00	-36.98	peak	
2		126.0300	-53.70	-6.92	-60.62	-13.00	-47.62	peak	
3		427.4090	-57.01	-2.18	-59.19	-13.00	-46.19	peak	
4	*	594.0226	-49.34	0.12	-49.22	-13.00	-36.22	peak	
5		891.0043	-56.86	4.74	-52.12	-13.00	-39.12	peak	
6		997.4133	-63.10	6.15	-56.95	-13.00	-43.95	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2026/1/15
Test Channel	CH650000	Polarization	Vertical
Temp	23°C	Hum.	54%

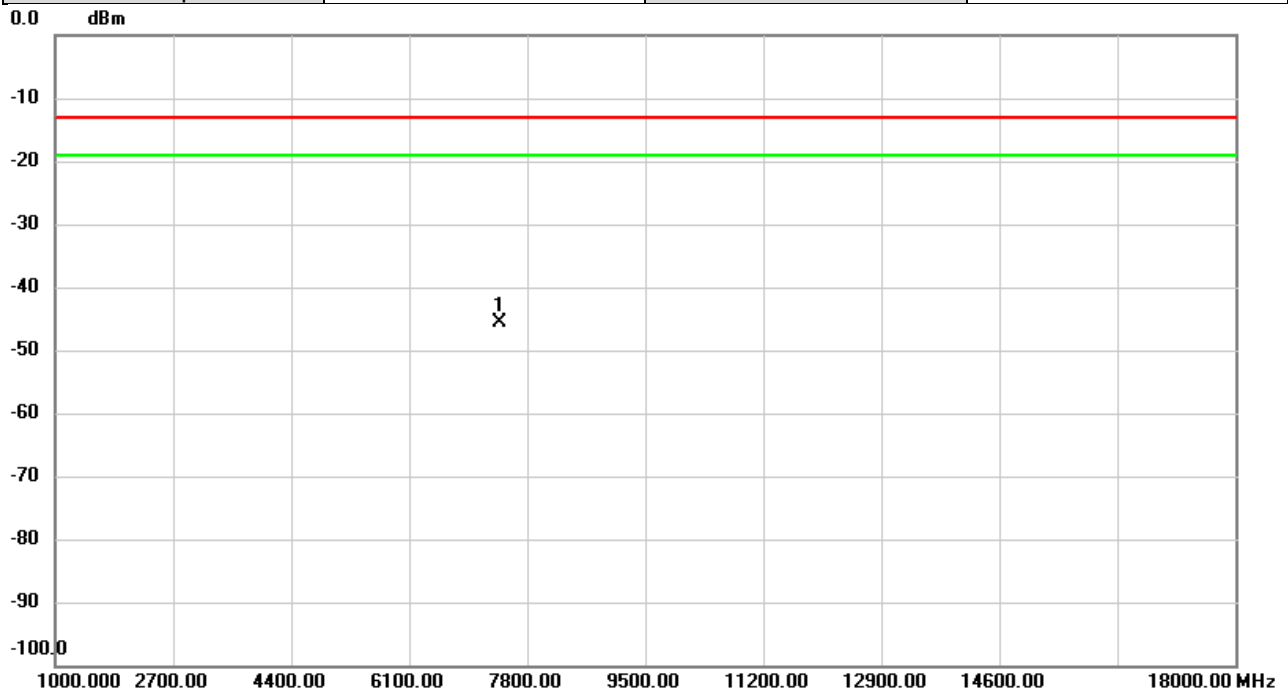


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7402.000	-63.67	18.06	-45.61	-13.00	-32.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2026/1/15
Test Channel	CH650000	Polarization	Horizontal
Temp	23°C	Hum.	54%

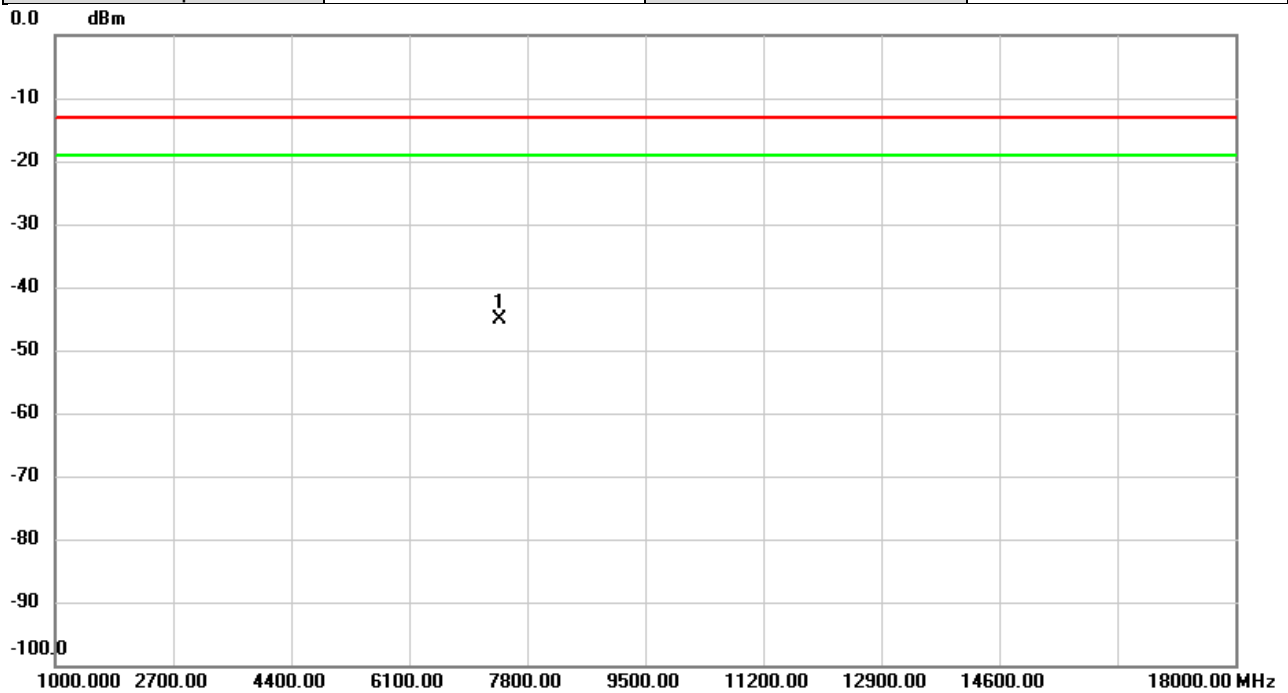


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7402.000	-63.31	18.11	-45.20	-13.00	-32.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2026/1/22
Test Channel	CH650000	Polarization	Vertical
Temp	22°C	Hum.	66%

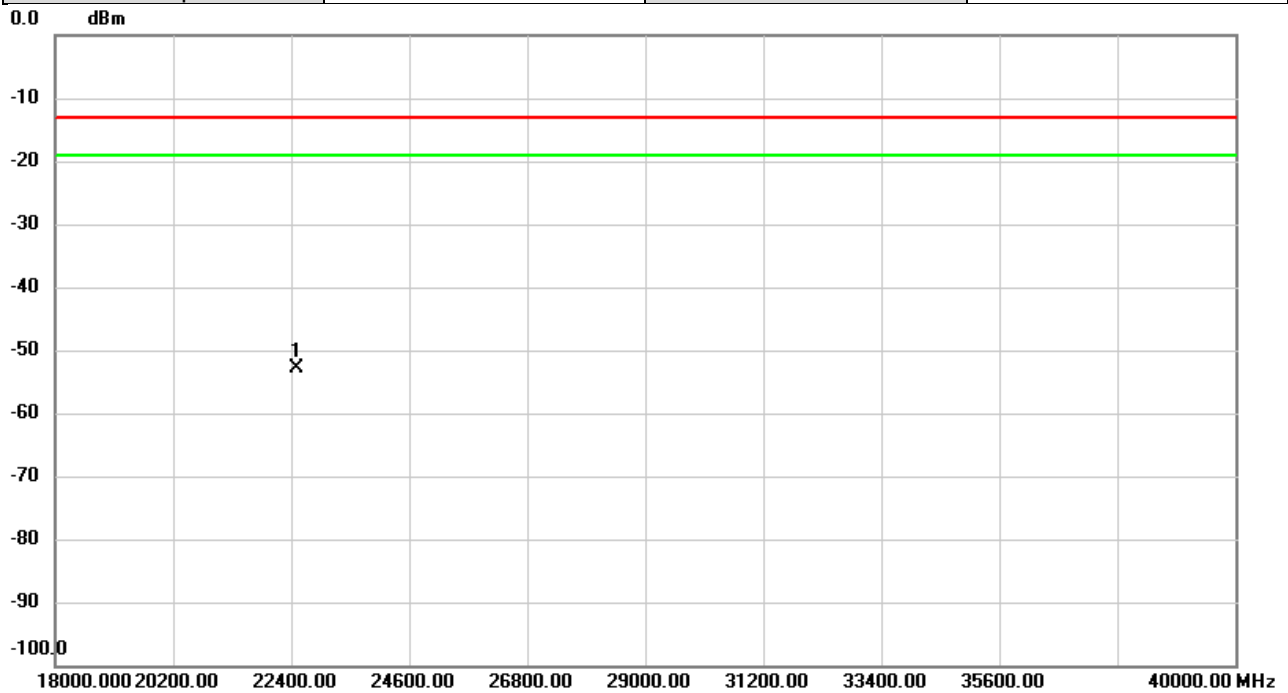


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	22500.00	-56.71	3.96	-52.75	-13.00	-39.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n78	Test Date	2026/1/22
Test Channel	CH650000	Polarization	Horizontal
Temp	22°C	Hum.	66%

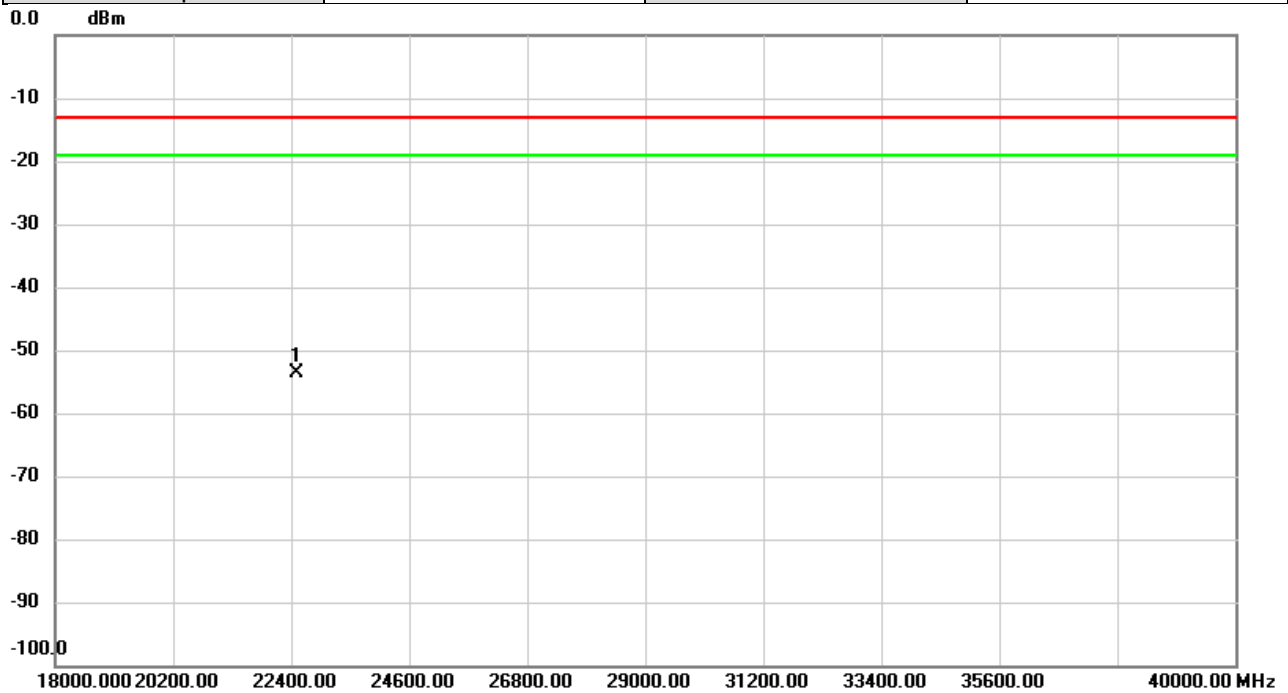


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	22500.00	-56.13	2.63	-53.50	-13.00	-40.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

For SRS:

Test Mode	SRS n38	Test Date	2026/1/21
Test Channel	CH519000	Polarization	Vertical
Temp	23°C	Hum.	67%

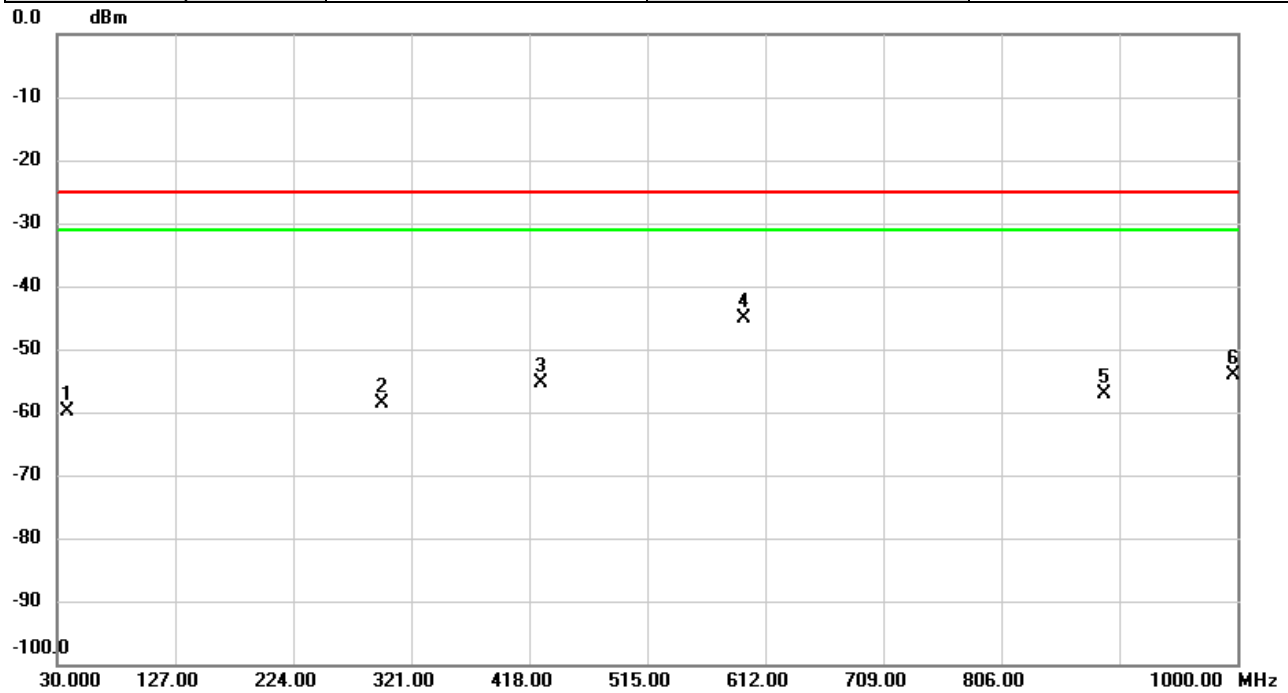


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		38.2450	-51.09	-8.83	-59.92	-25.00	-34.92	peak	
2		297.0086	-55.24	-3.35	-58.59	-25.00	-33.59	peak	
3		427.4413	-53.70	-1.75	-55.45	-25.00	-30.45	peak	
4	*	593.9903	-48.39	3.22	-45.17	-25.00	-20.17	peak	
5		891.0043	-63.53	6.39	-57.14	-25.00	-32.14	peak	
6		997.3486	-61.54	7.38	-54.16	-25.00	-29.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2026/1/21
Test Channel	CH519000	Polarization	Horizontal
Temp	23°C	Hum.	67%

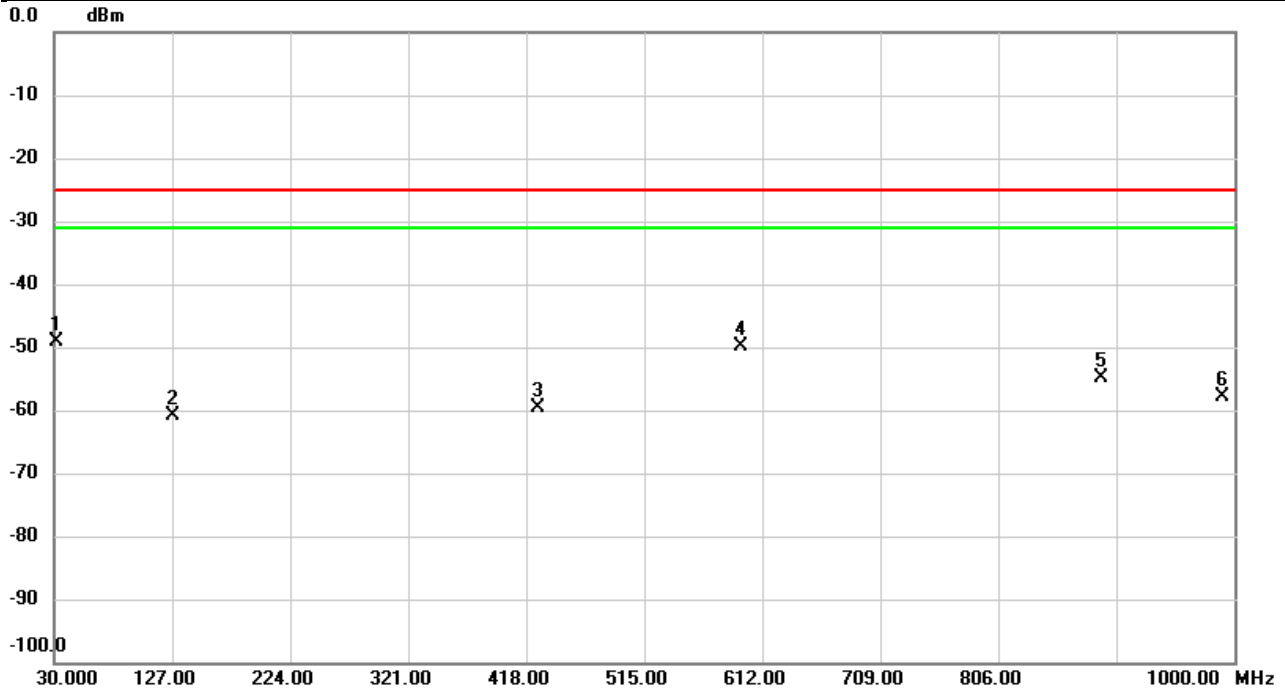


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	32.2310	-51.87	2.73	-49.14	-25.00	-24.14	peak	
2		127.5173	-54.20	-6.79	-60.99	-25.00	-35.99	peak	
3		427.4413	-57.42	-2.18	-59.60	-25.00	-34.60	peak	
4		593.9903	-49.91	0.12	-49.79	-25.00	-24.79	peak	
5		890.9720	-59.64	4.73	-54.91	-25.00	-29.91	peak	
6		989.9765	-63.88	6.04	-57.84	-25.00	-32.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2026/1/20
Test Channel	CH518000	Polarization	Vertical
Temp	25°C	Hum.	64%

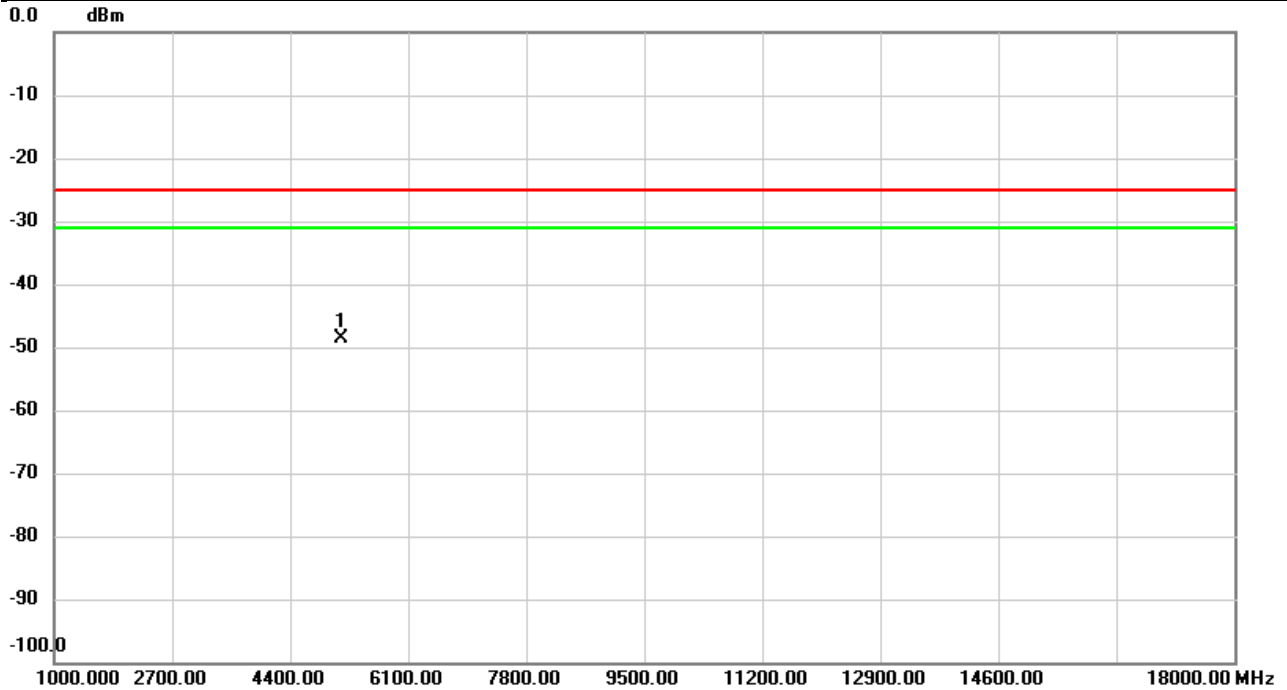


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5142.000	-62.52	13.89	-48.63	-25.00	-23.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2026/1/20
Test Channel	CH518000	Polarization	Horizontal
Temp	25°C	Hum.	64%

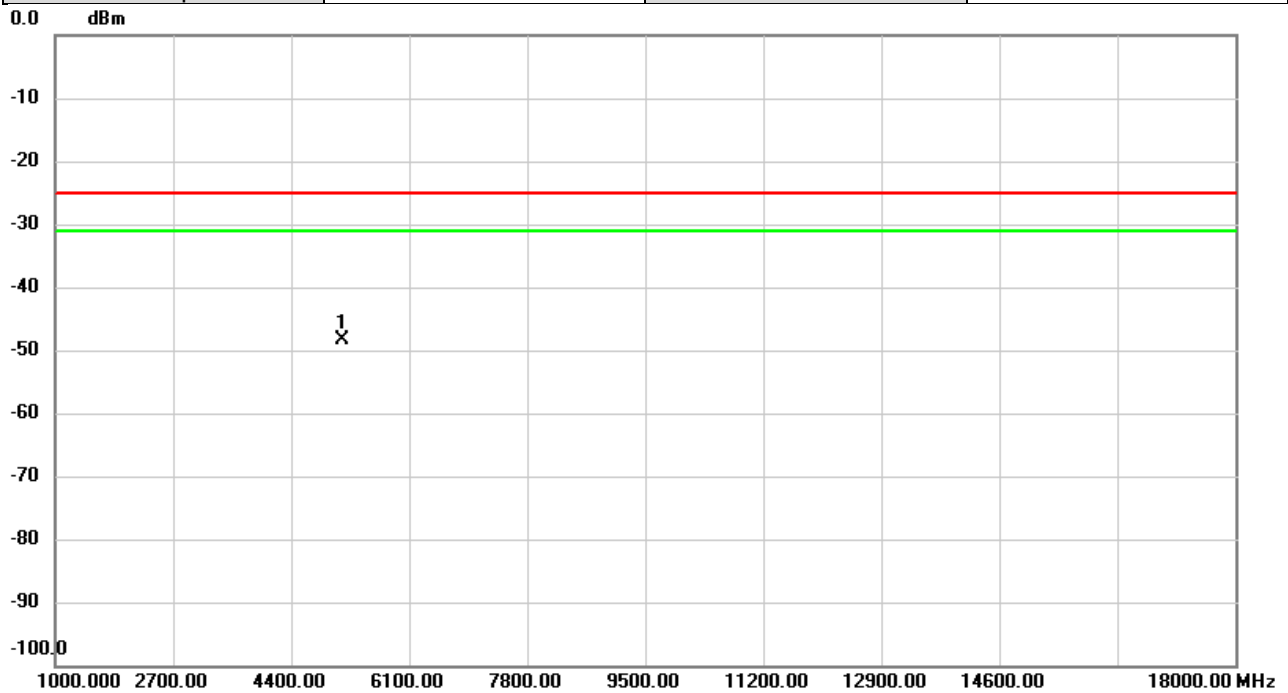


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5142.000	-62.36	13.89	-48.47	-25.00	-23.47	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2026/1/20
Test Channel	CH519000	Polarization	Vertical
Temp	25°C	Hum.	64%

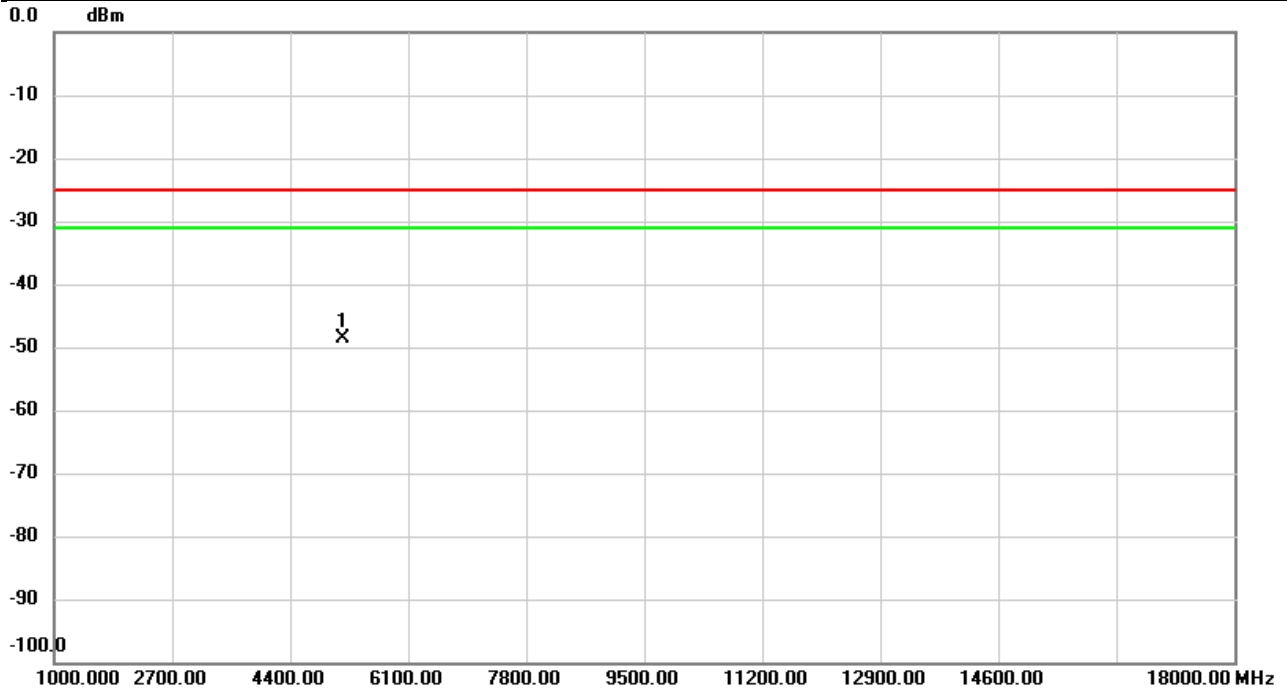


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5152.000	-62.59	13.85	-48.74	-25.00	-23.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2026/1/20
Test Channel	CH519000	Polarization	Horizontal
Temp	25°C	Hum.	64%

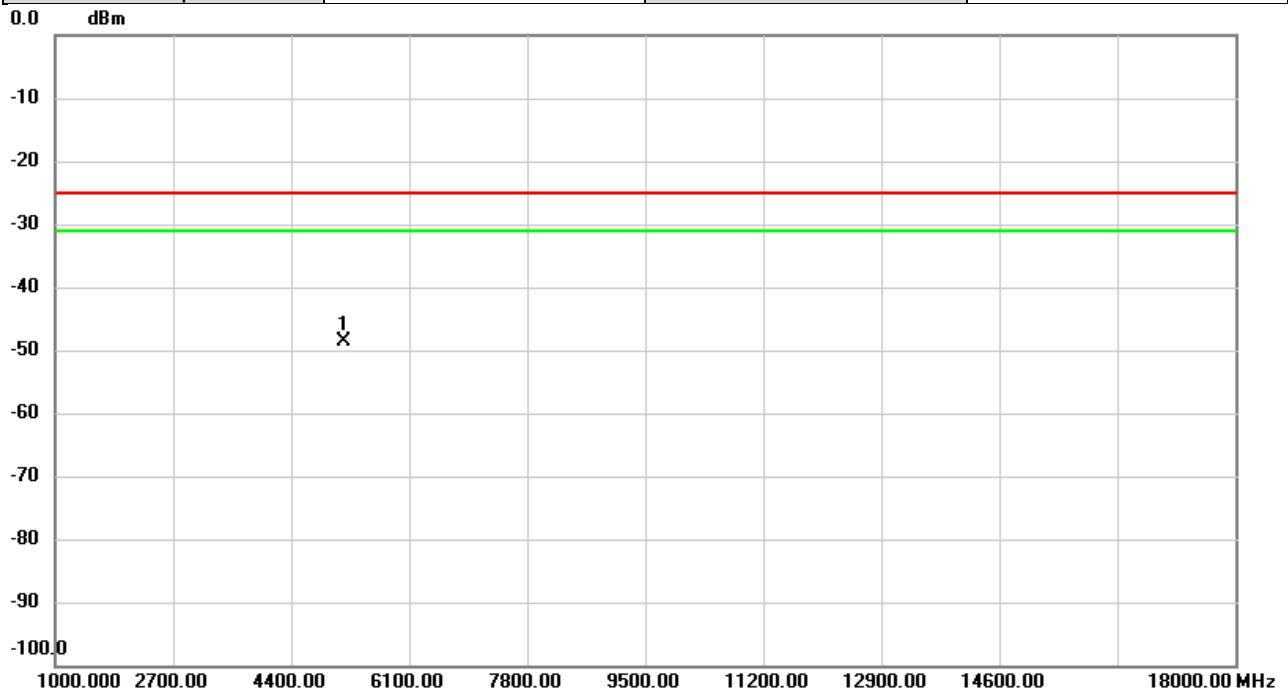


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5152.000	-62.59	13.89	-48.70	-25.00	-23.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2026/1/20
Test Channel	CH520000	Polarization	Vertical
Temp	25°C	Hum.	64%

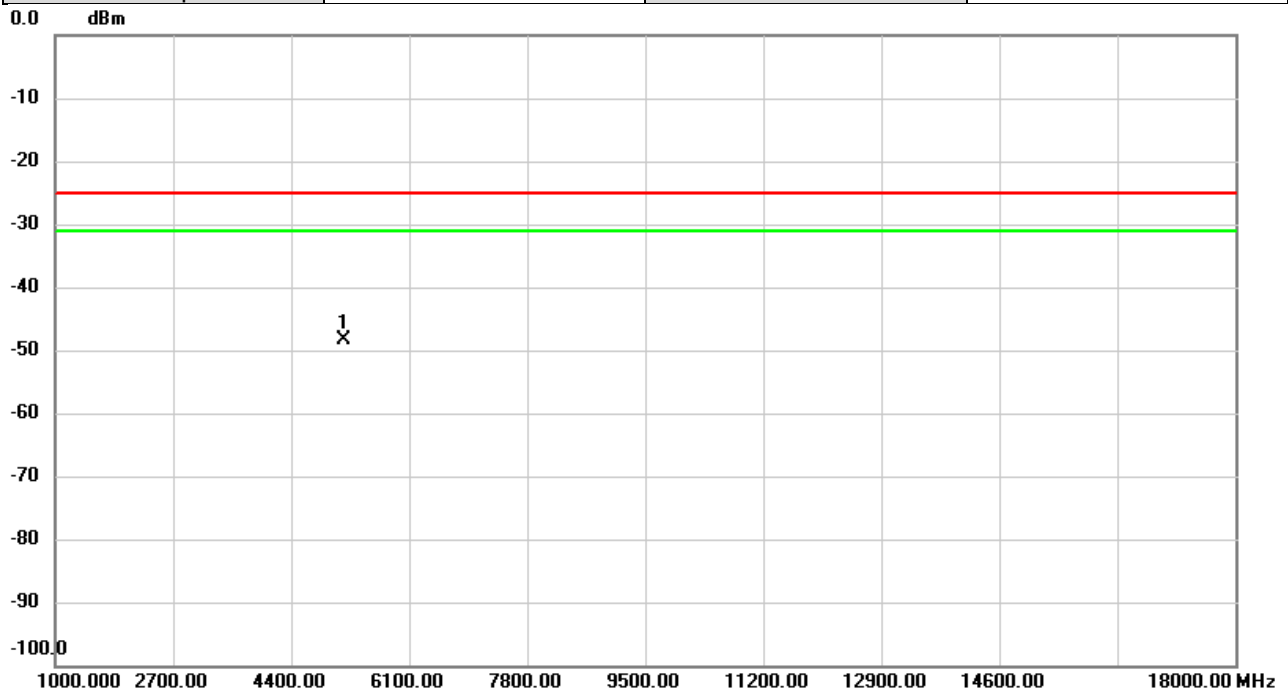


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5162.000	-62.18	13.77	-48.41	-25.00	-23.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2026/1/20
Test Channel	CH520000	Polarization	Horizontal
Temp	25°C	Hum.	64%

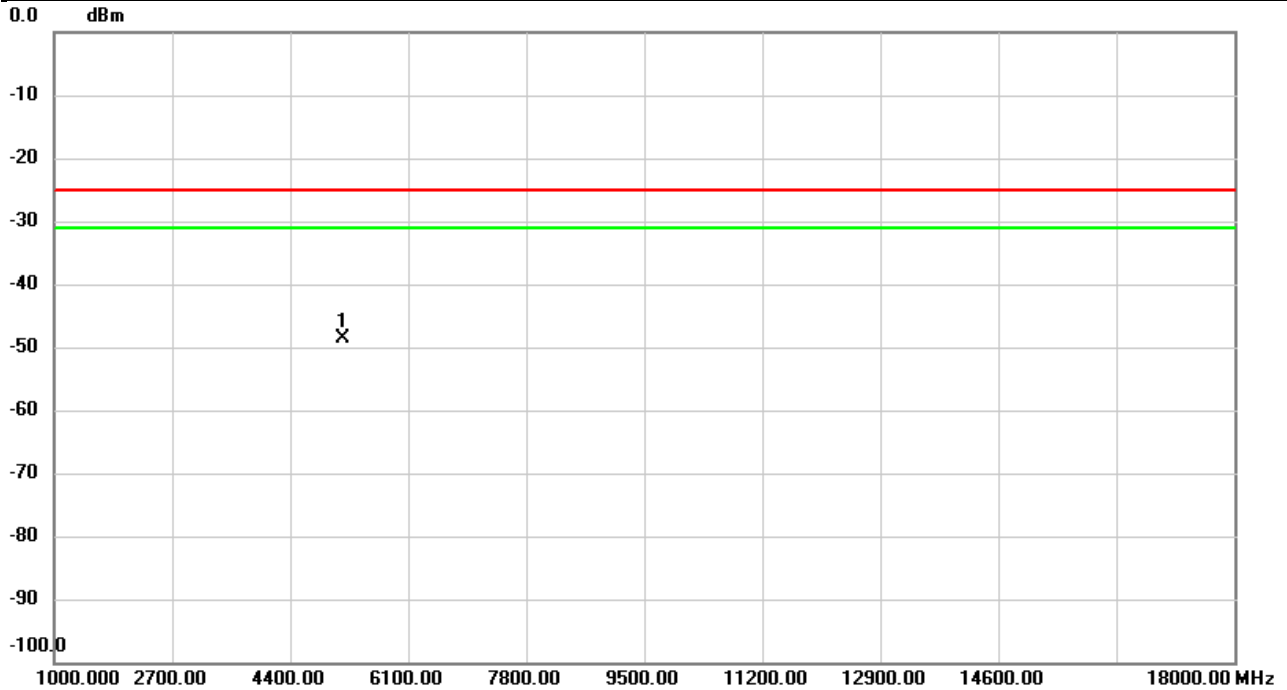


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5162.000	-62.32	13.79	-48.53	-25.00	-23.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2026/1/20
Test Channel	CH519000	Polarization	Vertical
Temp	25°C	Hum.	64%

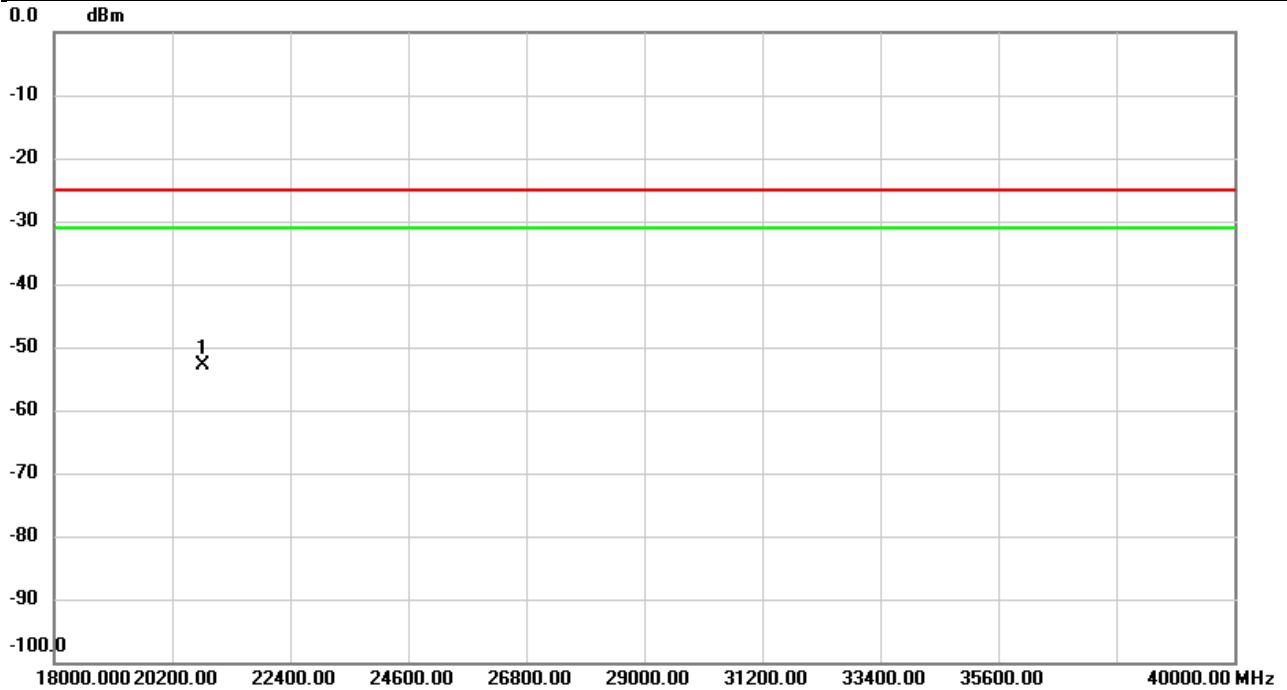


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	20760.00	-55.21	2.34	-52.87	-25.00	-27.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38	Test Date	2026/1/20
Test Channel	CH519000	Polarization	Horizontal
Temp	25°C	Hum.	64%

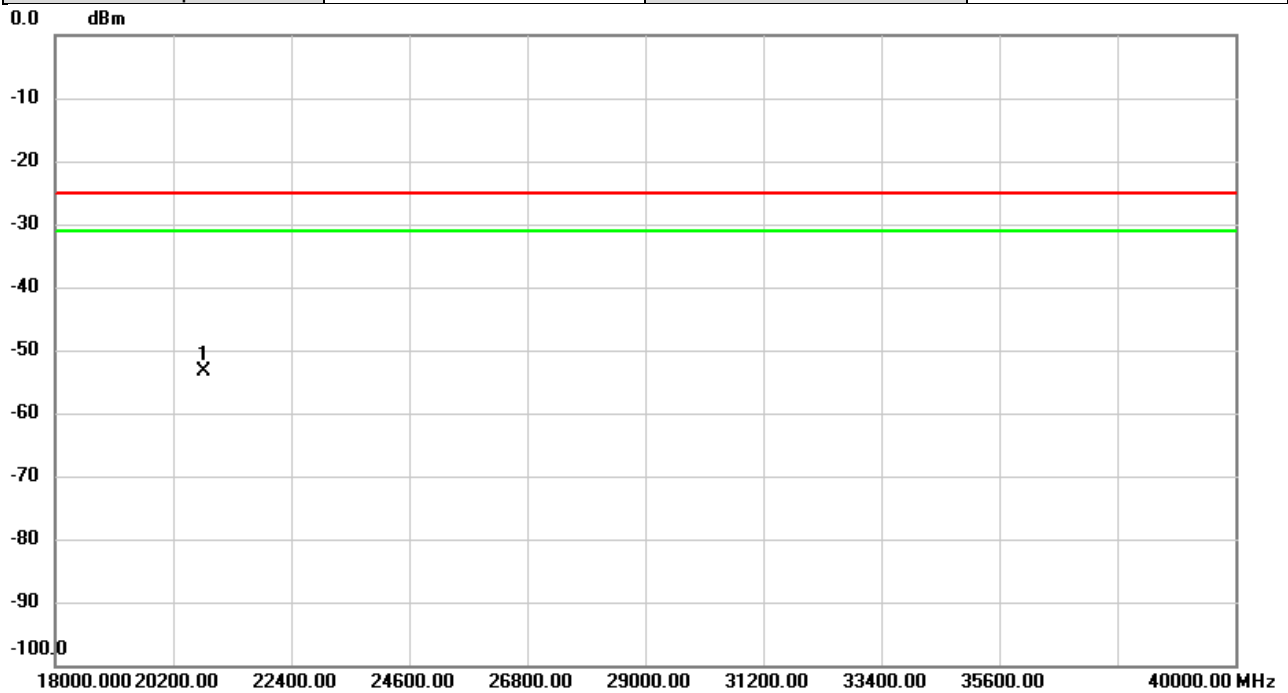


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	20760.00	-54.69	1.30	-53.39	-25.00	-28.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2026/1/21
Test Channel	CH518598	Polarization	Vertical
Temp	23°C	Hum.	67%

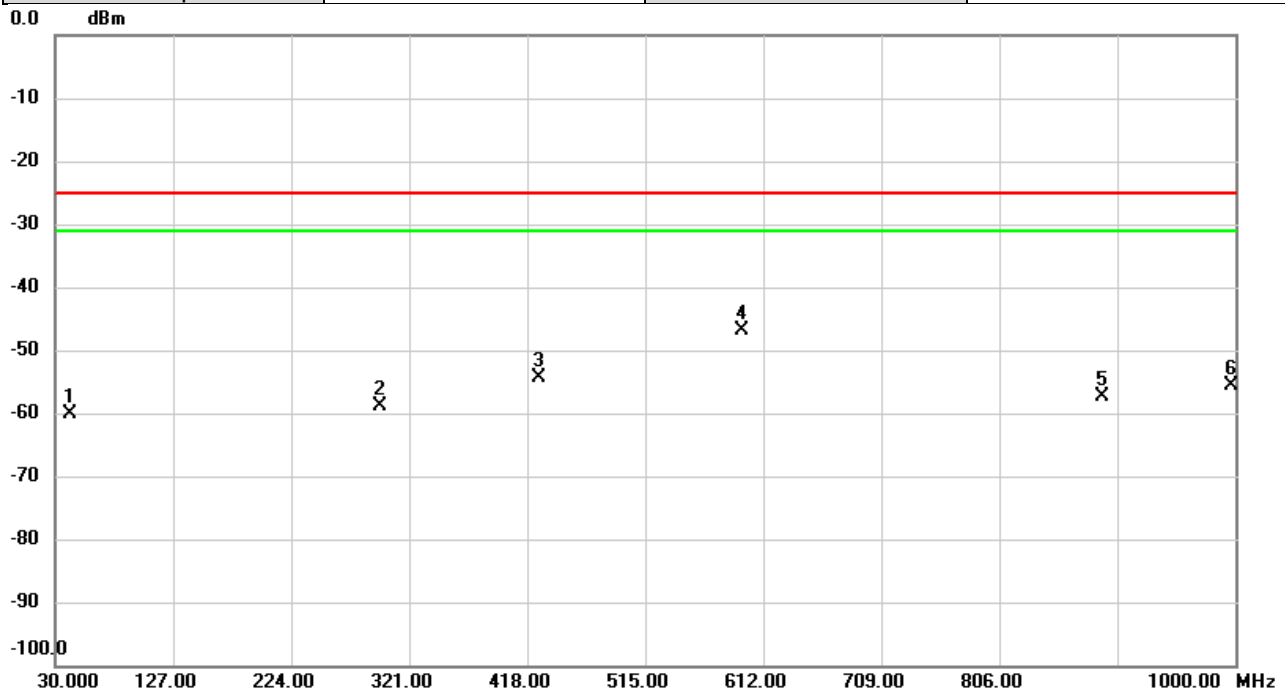


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		42.0280	-52.76	-7.32	-60.08	-25.00	-35.08	peak	
2		296.9763	-55.40	-3.35	-58.75	-25.00	-33.75	peak	
3		427.4737	-52.71	-1.75	-54.46	-25.00	-29.46	peak	
4	*	593.9903	-50.13	3.22	-46.91	-25.00	-21.91	peak	
5		890.9720	-63.67	6.38	-57.29	-25.00	-32.29	peak	
6		997.3163	-62.90	7.38	-55.52	-25.00	-30.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2026/1/21
Test Channel	CH518598	Polarization	Horizontal
Temp	23°C	Hum.	67%

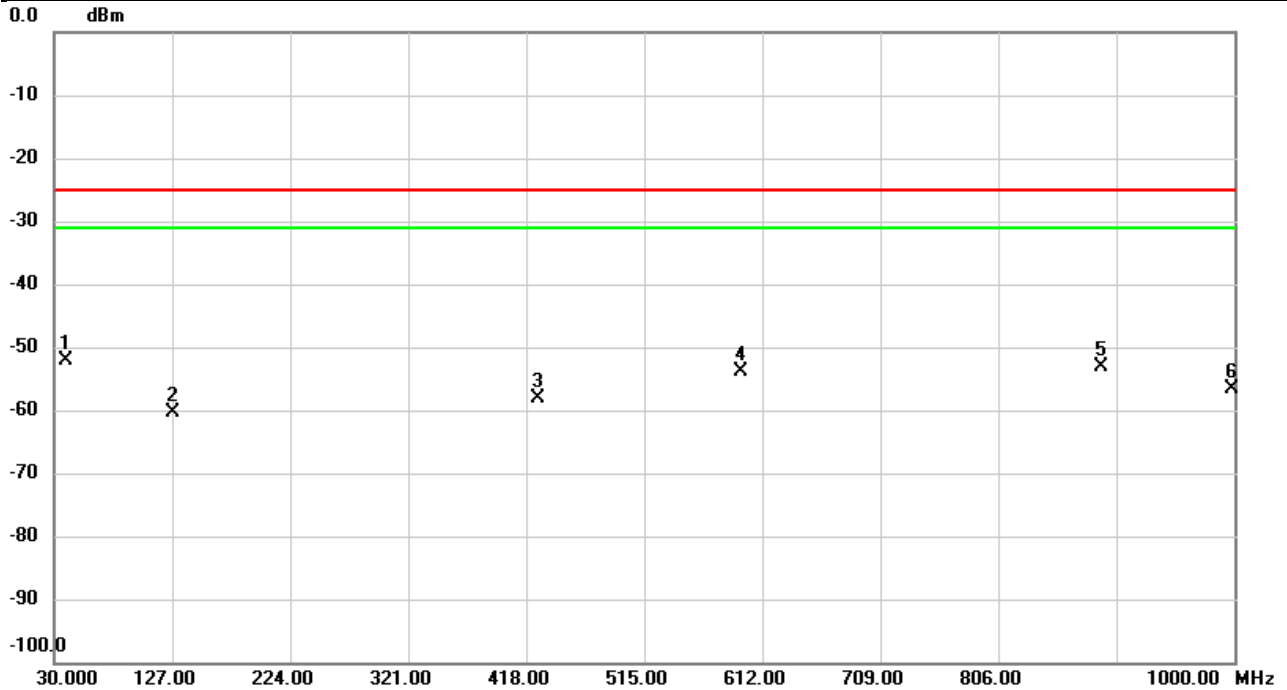


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	39.3120	-54.10	2.00	-52.10	-25.00	-27.10	peak	
2		127.1940	-53.48	-6.81	-60.29	-25.00	-35.29	peak	
3		427.3766	-56.06	-2.18	-58.24	-25.00	-33.24	peak	
4		594.0226	-53.97	0.12	-53.85	-25.00	-28.85	peak	
5		891.0043	-57.82	4.74	-53.08	-25.00	-28.08	peak	
6		997.8336	-62.70	6.16	-56.54	-25.00	-31.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2026/1/20
Test Channel	CH509202	Polarization	Vertical
Temp	25°C	Hum.	64%

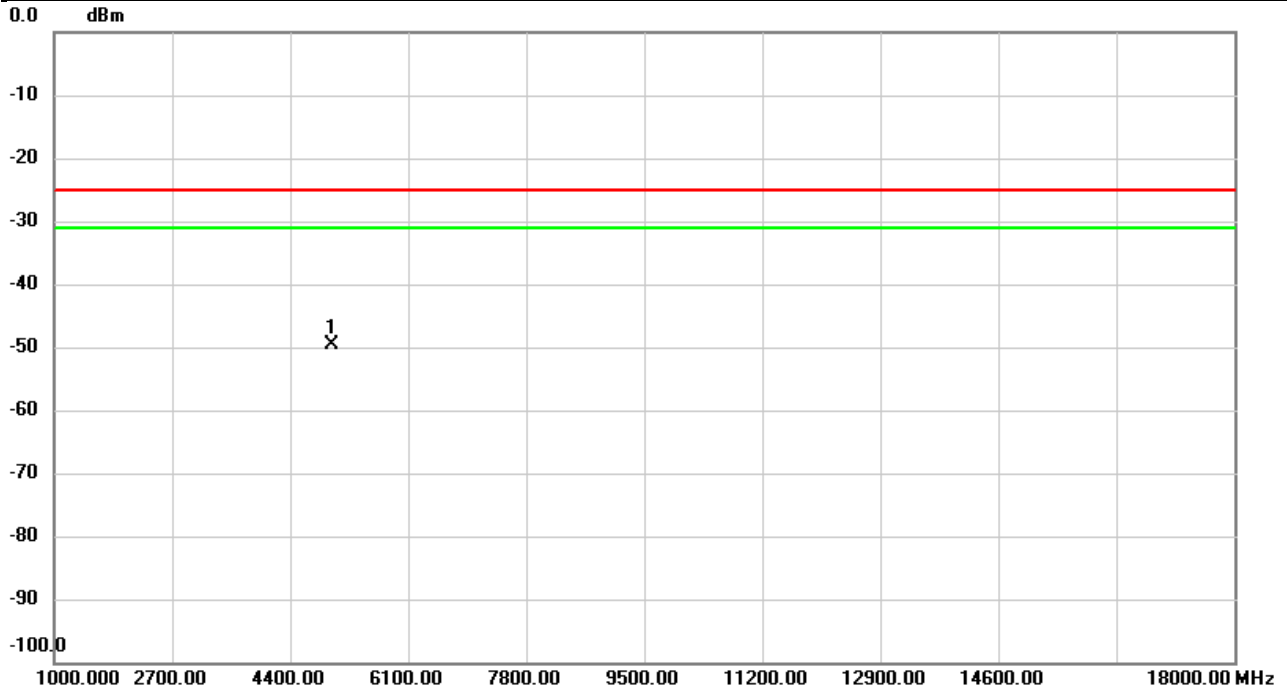


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	4994.020	-63.08	13.55	-49.53	-25.00	-24.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2026/1/20
Test Channel	CH509202	Polarization	Horizontal
Temp	25°C	Hum.	64%

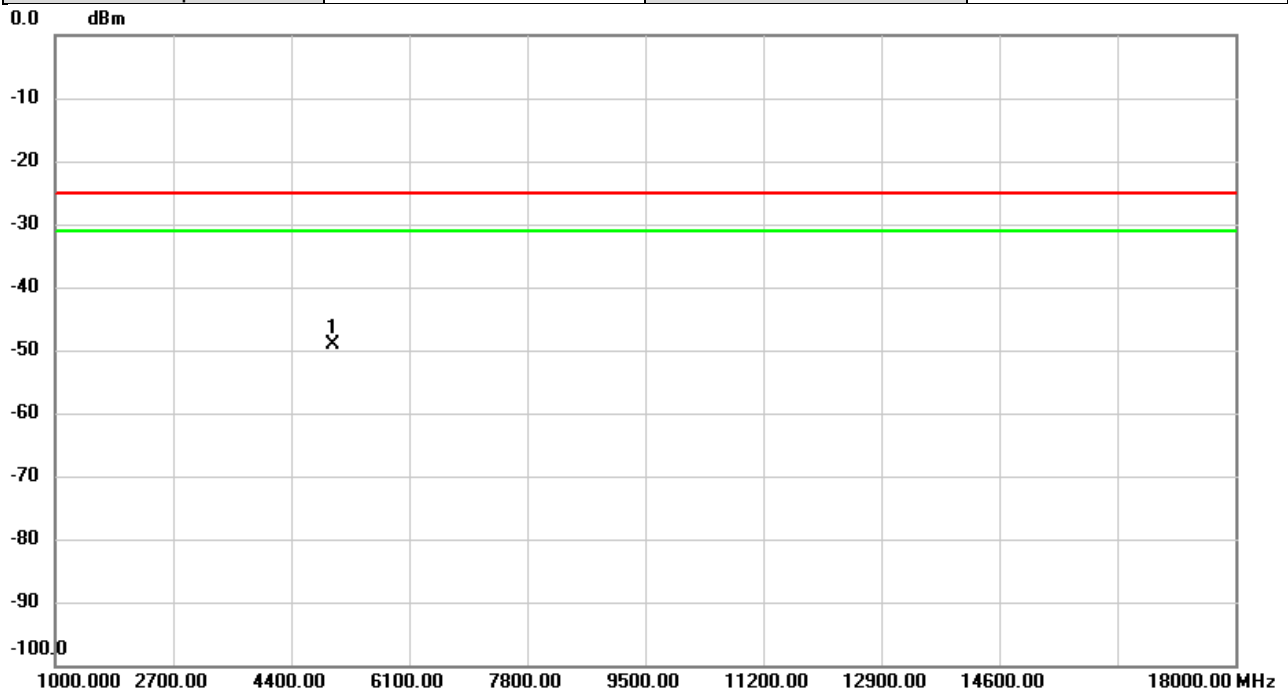


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	4994.020	-62.50	13.29	-49.21	-25.00	-24.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2026/1/20
Test Channel	CH518598	Polarization	Vertical
Temp	25°C	Hum.	64%

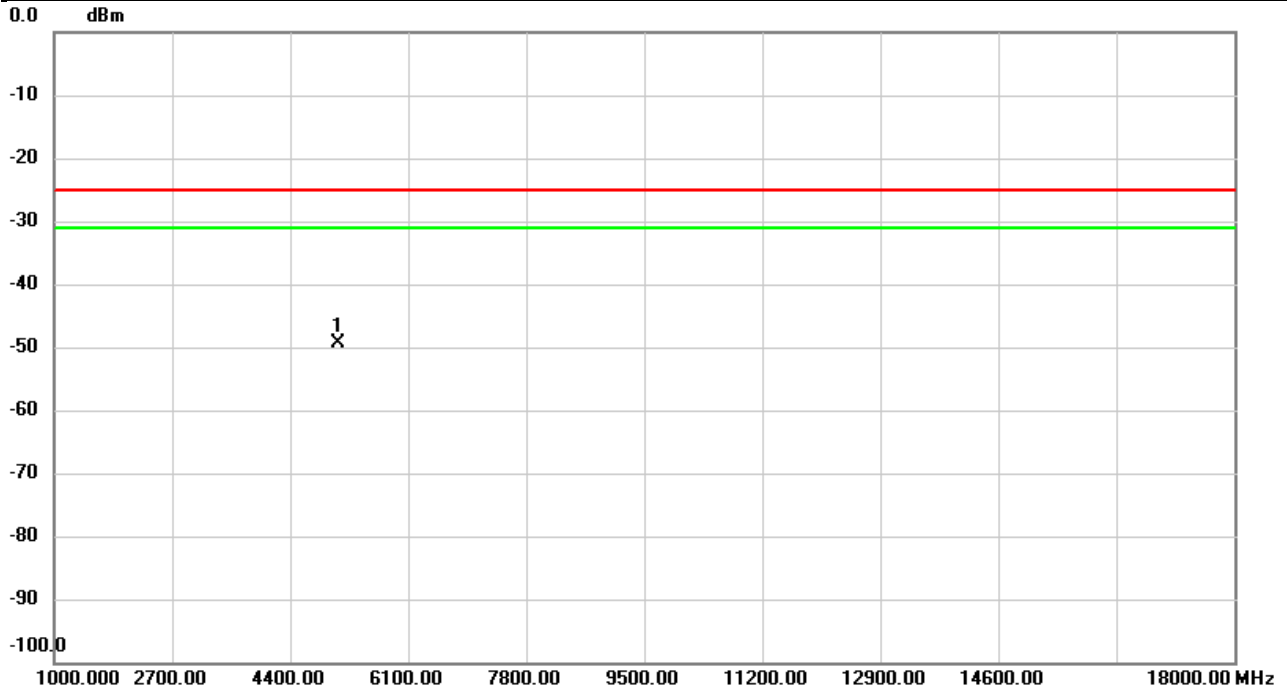


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5087.980	-63.51	14.04	-49.47	-25.00	-24.47	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2026/1/20
Test Channel	CH518598	Polarization	Horizontal
Temp	25°C	Hum.	64%

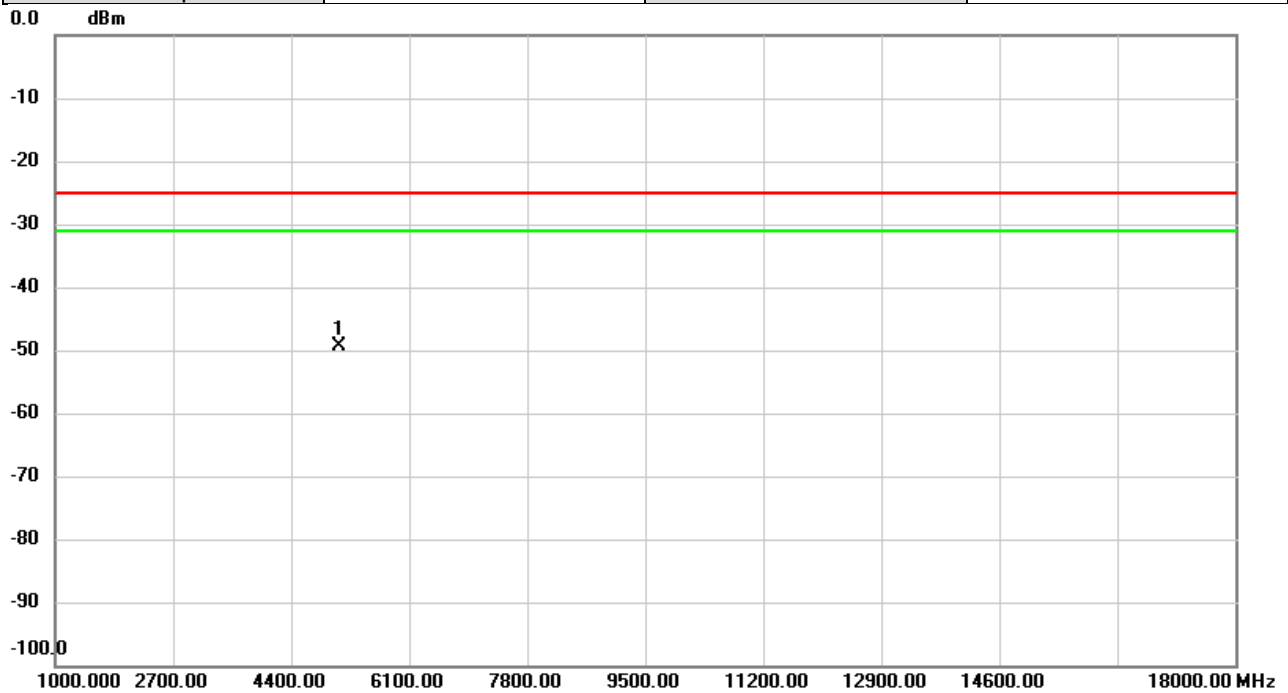


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5087.980	-63.30	13.85	-49.45	-25.00	-24.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2026/1/20
Test Channel	CH528000	Polarization	Vertical
Temp	25°C	Hum.	64%

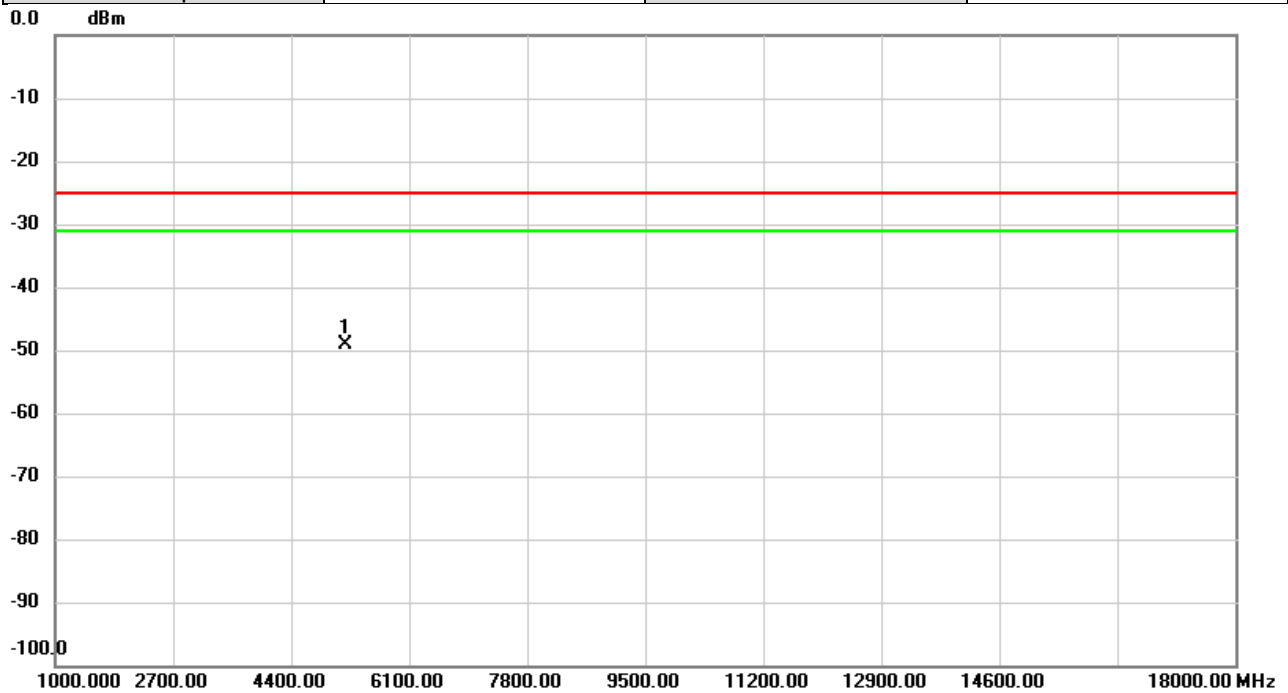


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5182.000	-62.65	13.59	-49.06	-25.00	-24.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2026/1/20
Test Channel	CH528000	Polarization	Horizontal
Temp	25°C	Hum.	64%

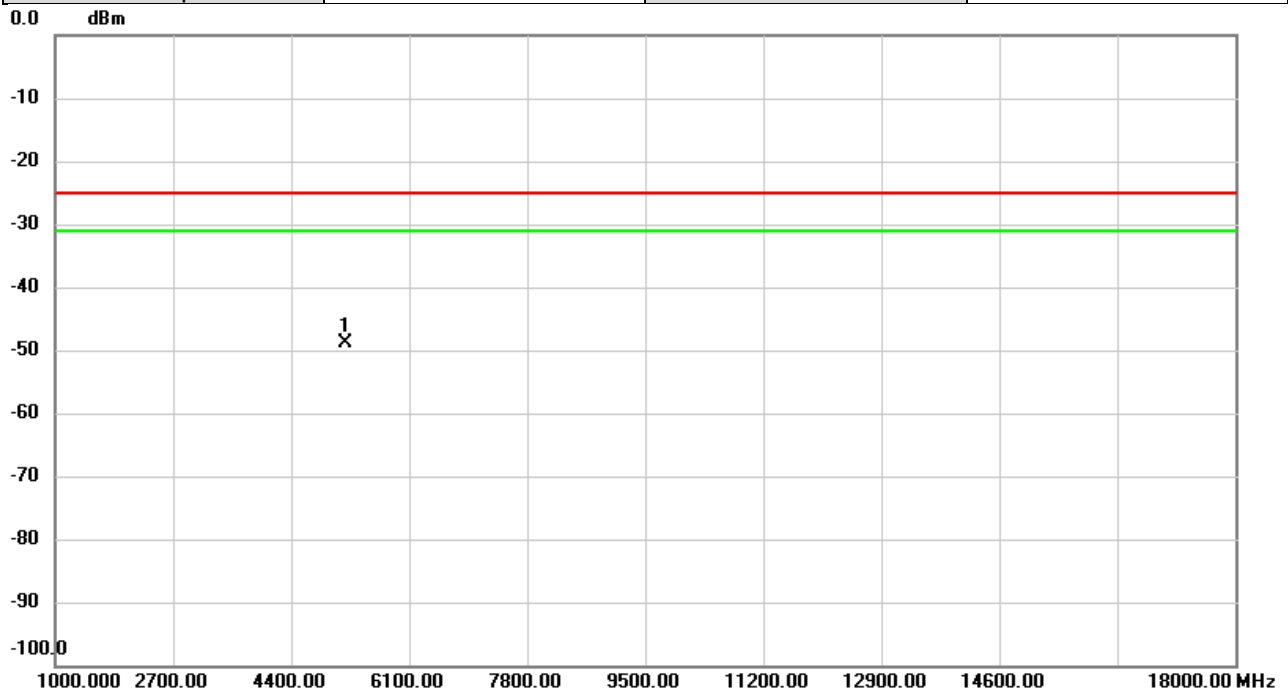


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5182.000	-62.34	13.58	-48.76	-25.00	-23.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2026/1/20
Test Channel	CH518598	Polarization	Vertical
Temp	25°C	Hum.	64%

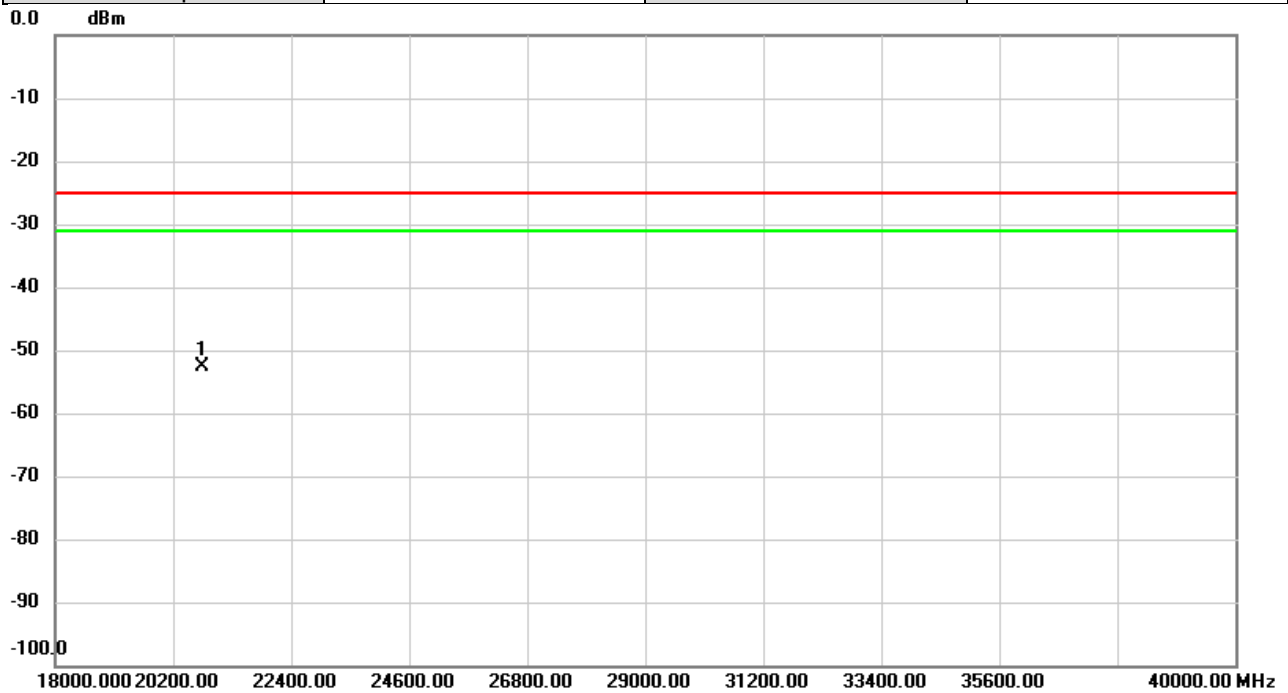


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	20743.00	-54.99	2.32	-52.67	-25.00	-27.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41	Test Date	2026/1/20
Test Channel	CH518598	Polarization	Horizontal
Temp	25°C	Hum.	64%

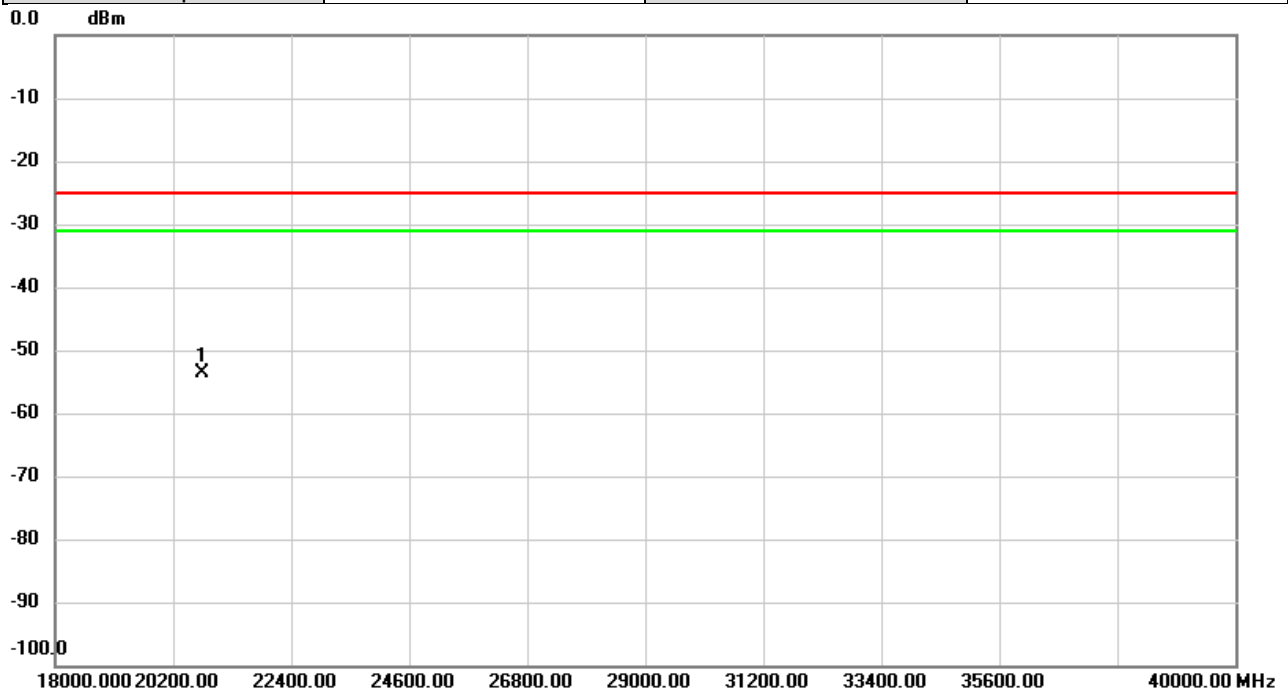


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	20743.00	-54.92	1.28	-53.64	-25.00	-28.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n70	Test Date	2026/1/28
Test Channel	CH340500	Polarization	Vertical
Temp	25°C	Hum.	63%

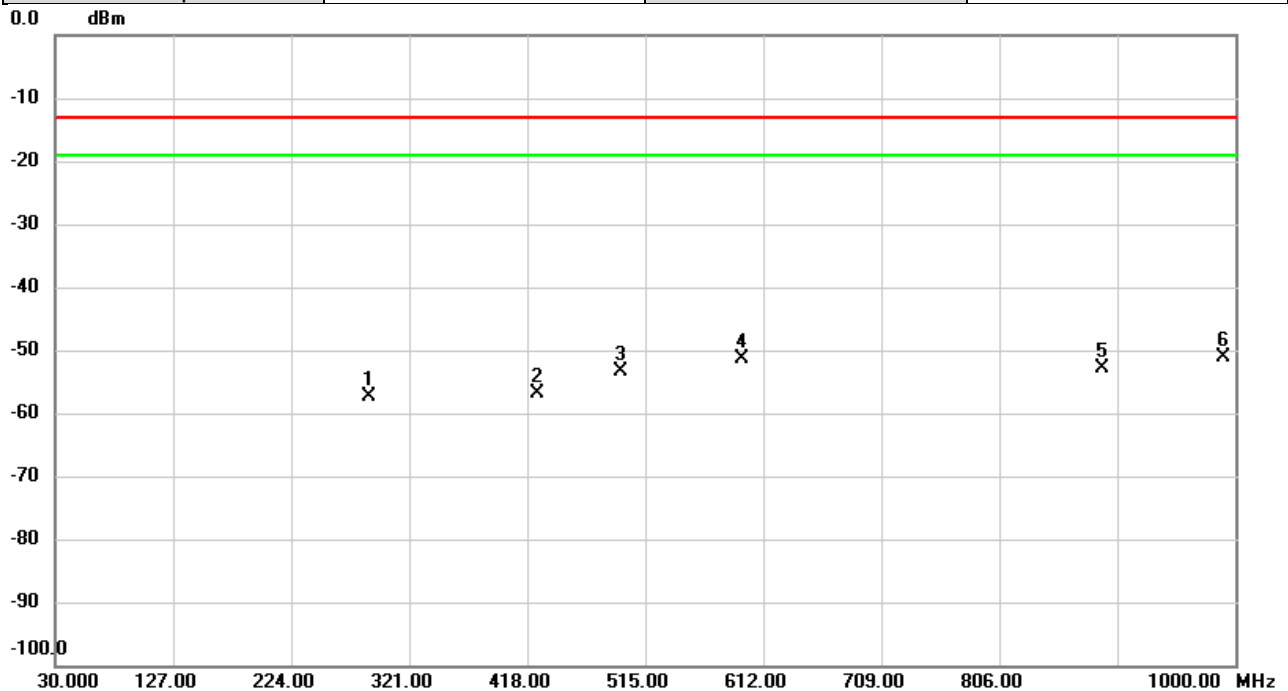


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		287.7613	-54.12	-3.27	-57.39	-13.00	-44.39	peak	
2		426.7947	-55.18	-1.76	-56.94	-13.00	-43.94	peak	
3		495.0503	-53.40	-0.06	-53.46	-13.00	-40.46	peak	
4		594.0227	-54.67	3.22	-51.45	-13.00	-38.45	peak	
5		891.0043	-59.28	6.39	-52.89	-13.00	-39.89	peak	
6	*	990.0090	-58.36	7.31	-51.05	-13.00	-38.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n70	Test Date	2026/1/28
Test Channel	CH340500	Polarization	Horizontal
Temp	25°C	Hum.	63%

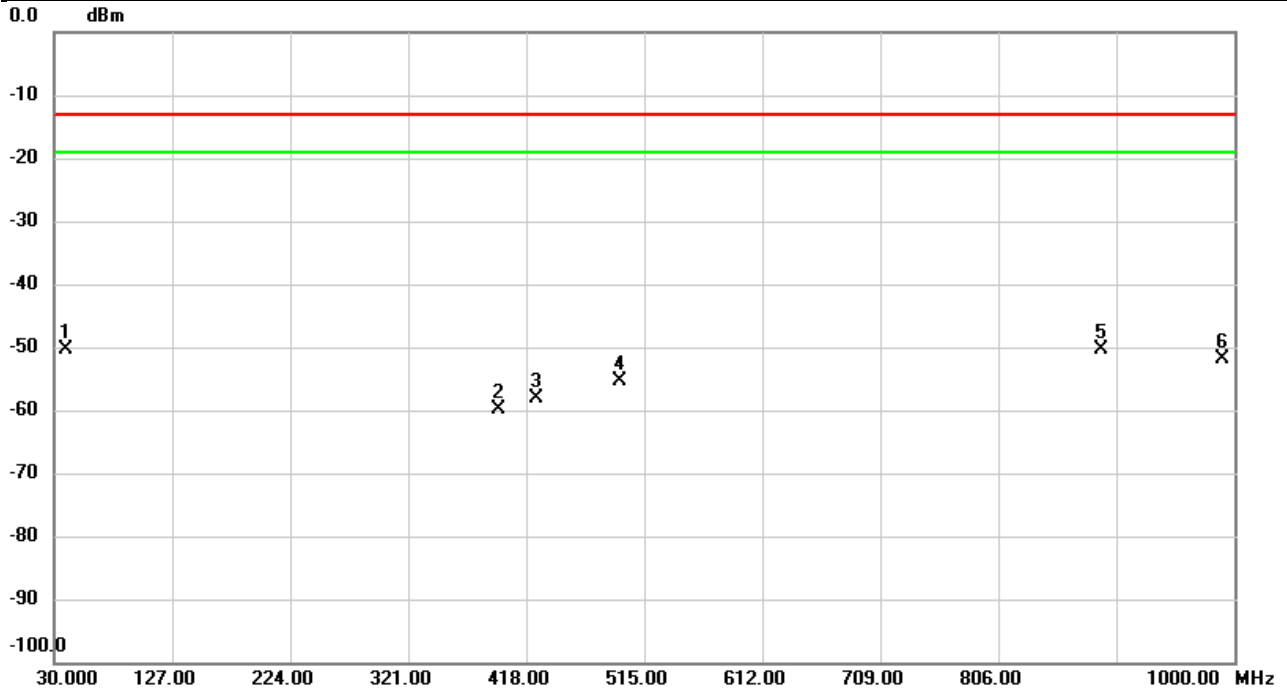


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		39.5383	-52.39	1.98	-50.41	-13.00	-37.41	peak	
2		395.9810	-57.45	-2.50	-59.95	-13.00	-46.95	peak	
3		426.6976	-55.87	-2.18	-58.05	-13.00	-45.05	peak	
4		495.0180	-53.89	-1.52	-55.41	-13.00	-42.41	peak	
5	*	891.0043	-55.14	4.74	-50.40	-13.00	-37.40	peak	
6		990.0090	-57.95	6.04	-51.91	-13.00	-38.91	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n70	Test Date	2026/1/28
Test Channel	CH340500	Polarization	Vertical
Temp	25°C	Hum.	63%

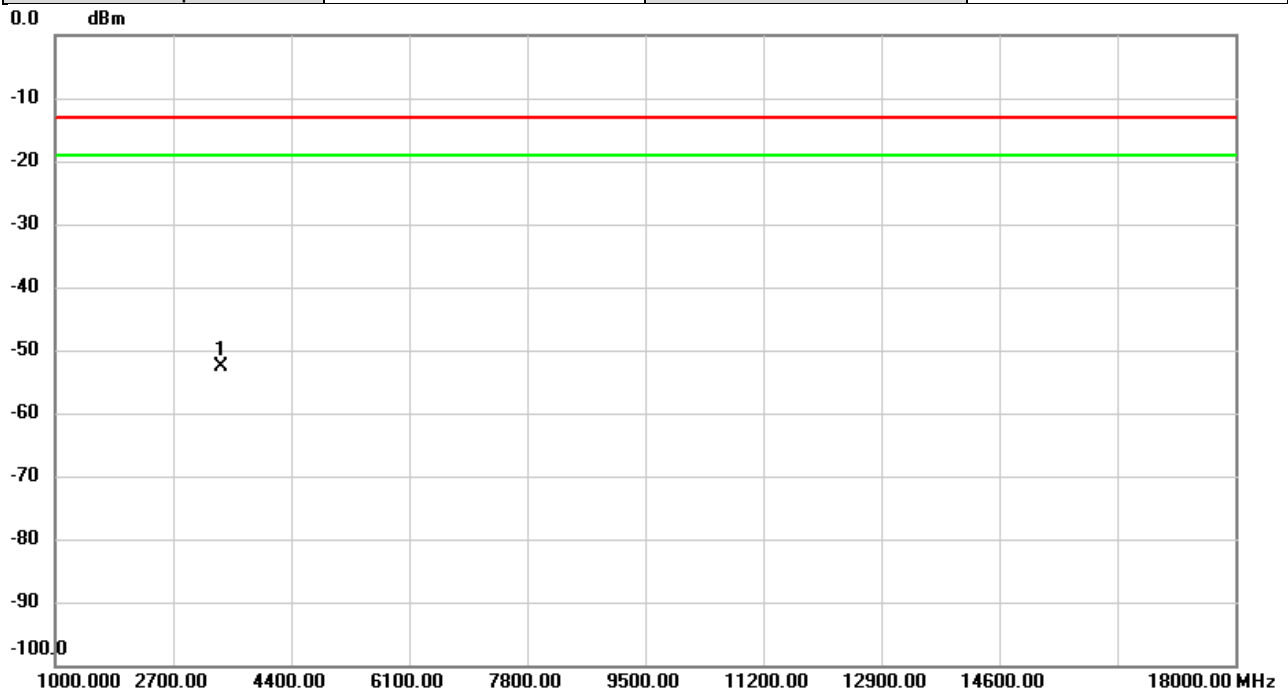


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3390.000	-62.38	9.81	-52.57	-13.00	-39.57	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n70	Test Date	2026/1/28
Test Channel	CH340500	Polarization	Horizontal
Temp	25°C	Hum.	63%

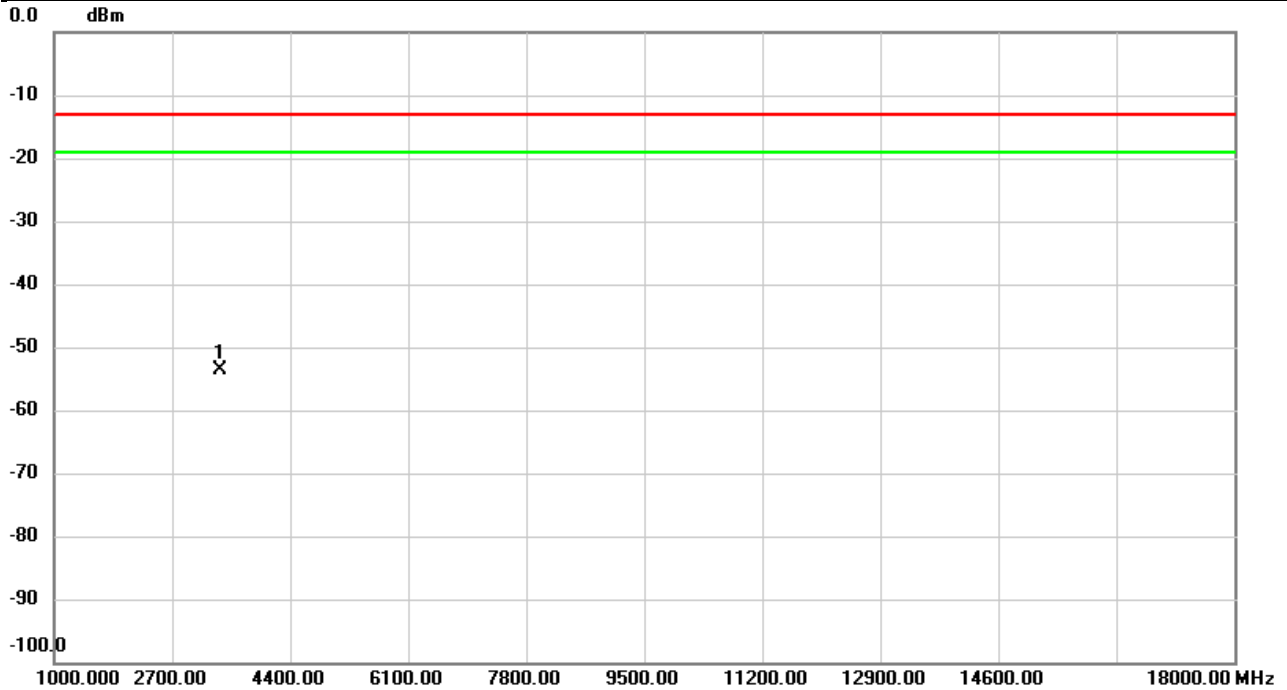


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3390.000	-63.02	9.44	-53.58	-13.00	-40.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

For 3450 ~ 3550 MHz:

Test Mode	SRS n77	Test Date	2026/1/21
Test Channel	CH633334	Polarization	Vertical
Temp	23°C	Hum.	67%

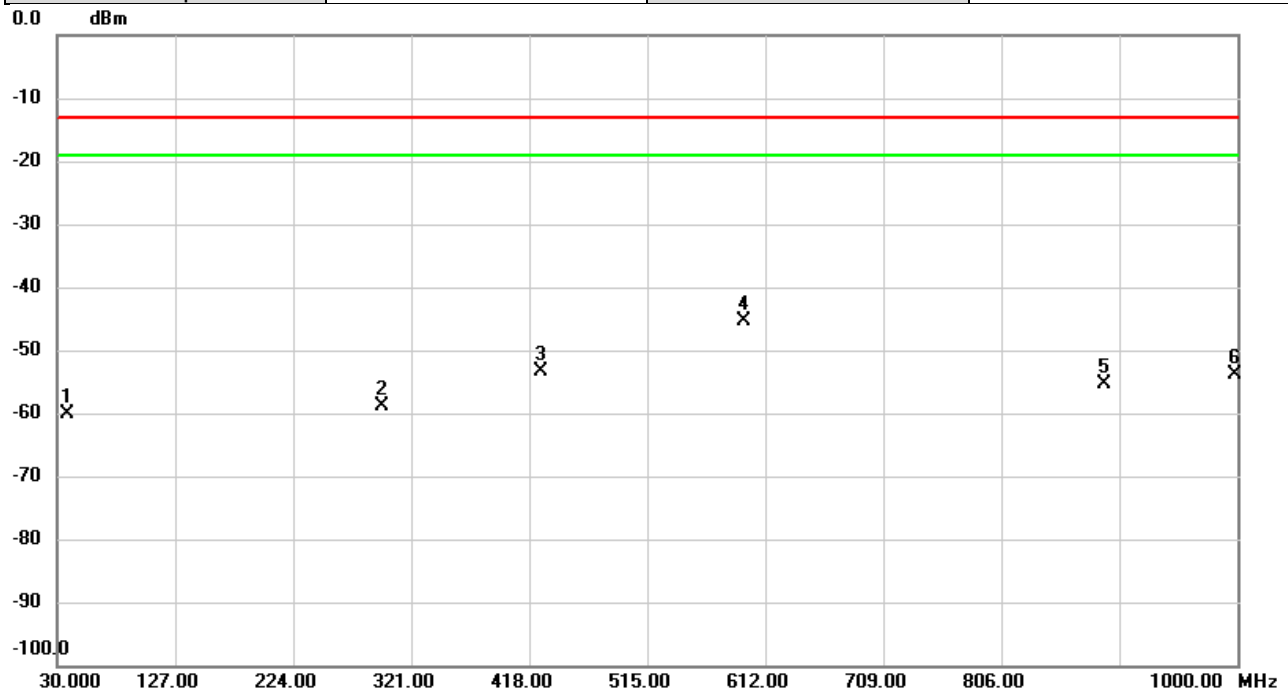


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		38.2450	-51.40	-8.83	-60.23	-13.00	-47.23	peak	
2		297.0087	-55.44	-3.35	-58.79	-13.00	-45.79	peak	
3		427.4737	-51.65	-1.75	-53.40	-13.00	-40.40	peak	
4	*	594.0227	-48.56	3.22	-45.34	-13.00	-32.34	peak	
5		891.0043	-61.68	6.39	-55.29	-13.00	-42.29	peak	
6		997.6397	-61.25	7.39	-53.86	-13.00	-40.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2026/1/21
Test Channel	CH633334	Polarization	Horizontal
Temp	23°C	Hum.	67%

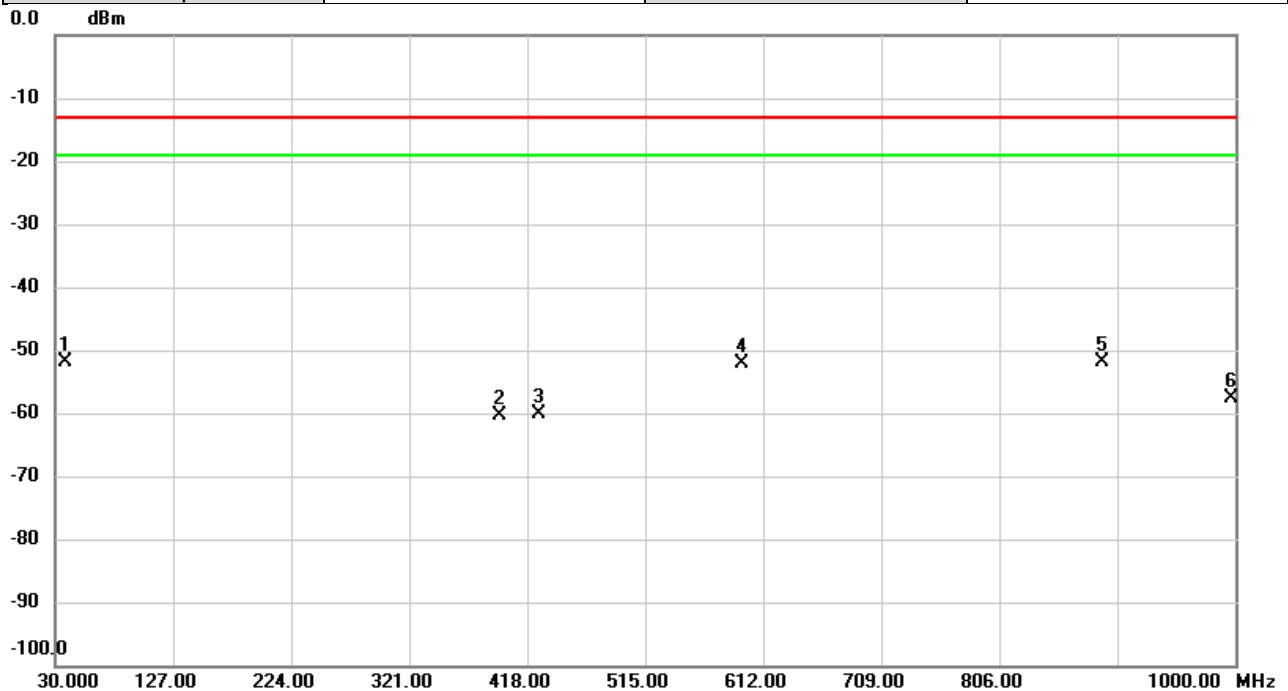


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	38.2450	-54.00	2.09	-51.91	-13.00	-38.91	peak	
2		396.0133	-57.94	-2.50	-60.44	-13.00	-47.44	peak	
3		427.2473	-57.91	-2.18	-60.09	-13.00	-47.09	peak	
4		593.9256	-52.29	0.12	-52.17	-13.00	-39.17	peak	
5		891.0043	-56.72	4.74	-51.98	-13.00	-38.98	peak	
6		997.1546	-63.76	6.15	-57.61	-13.00	-44.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2026/1/20
Test Channel	CH633334	Polarization	Vertical
Temp	25°C	Hum.	64%

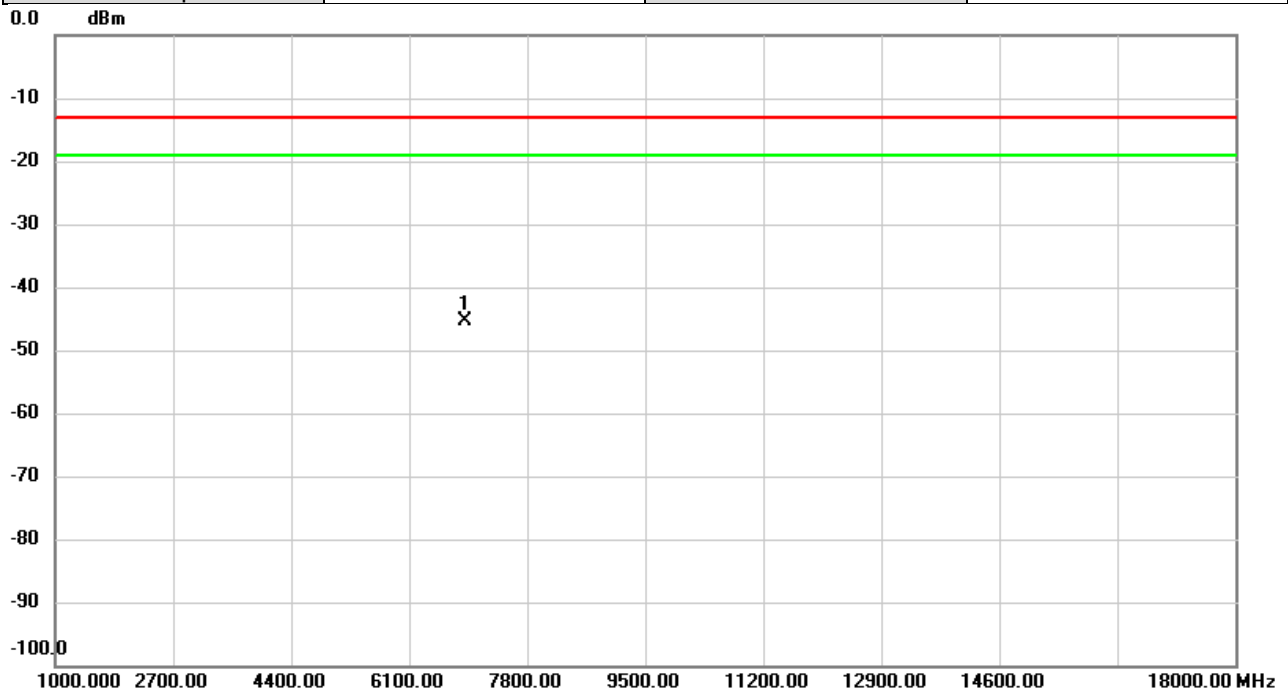


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6902.020	-63.26	17.99	-45.27	-13.00	-32.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2026/1/20
Test Channel	CH633334	Polarization	Horizontal
Temp	25°C	Hum.	64%

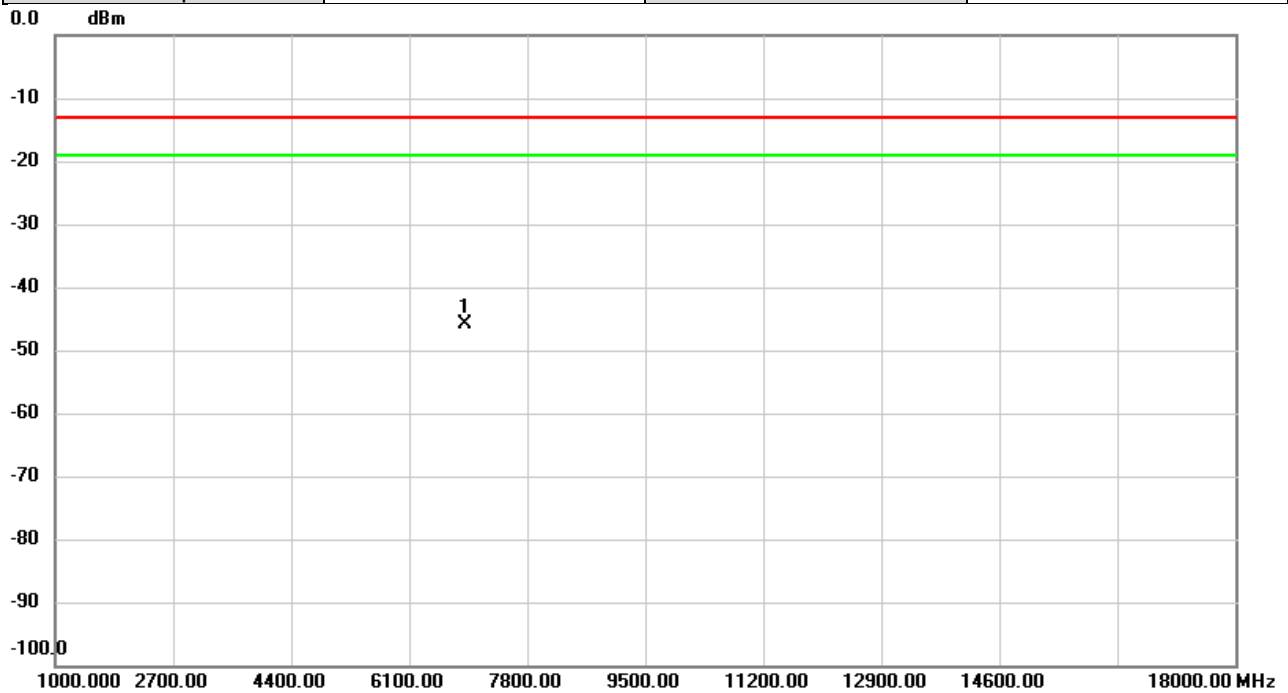


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6902.020	-63.77	17.82	-45.95	-13.00	-32.95	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2026/1/20
Test Channel	CH633334	Polarization	Vertical
Temp	25°C	Hum.	64%

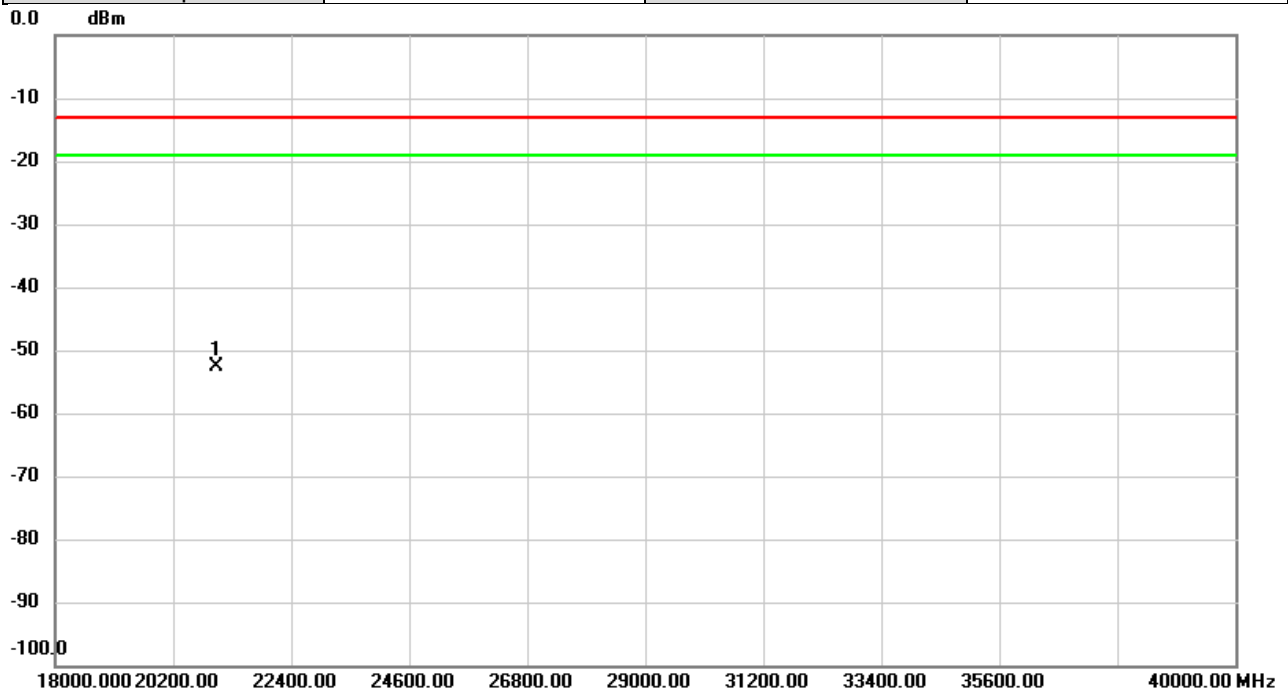


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	21000.00	-55.20	2.67	-52.53	-13.00	-39.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2026/1/20
Test Channel	CH633334	Polarization	Horizontal
Temp	25°C	Hum.	64%

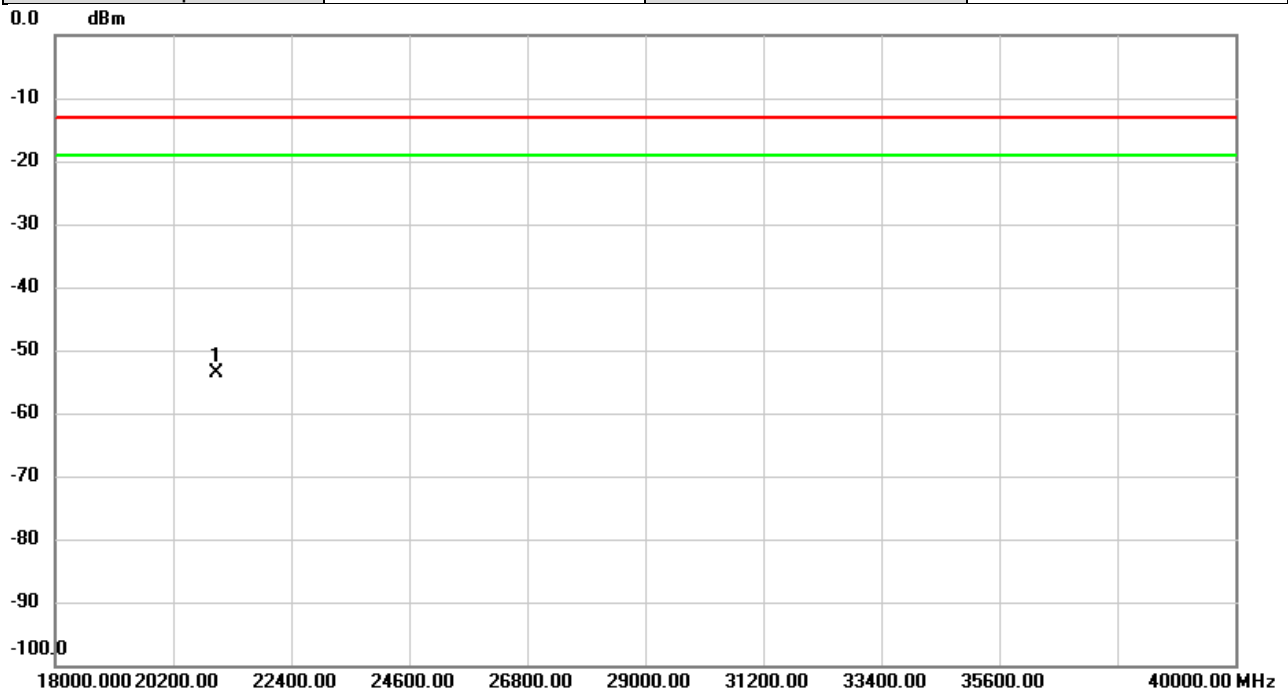


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	21000.00	-55.29	1.63	-53.66	-13.00	-40.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

For 3700 ~ 3980 MHz:

Test Mode	SRS n77	Test Date	2026/1/21
Test Channel	CH656000	Polarization	Vertical
Temp	23°C	Hum.	67%

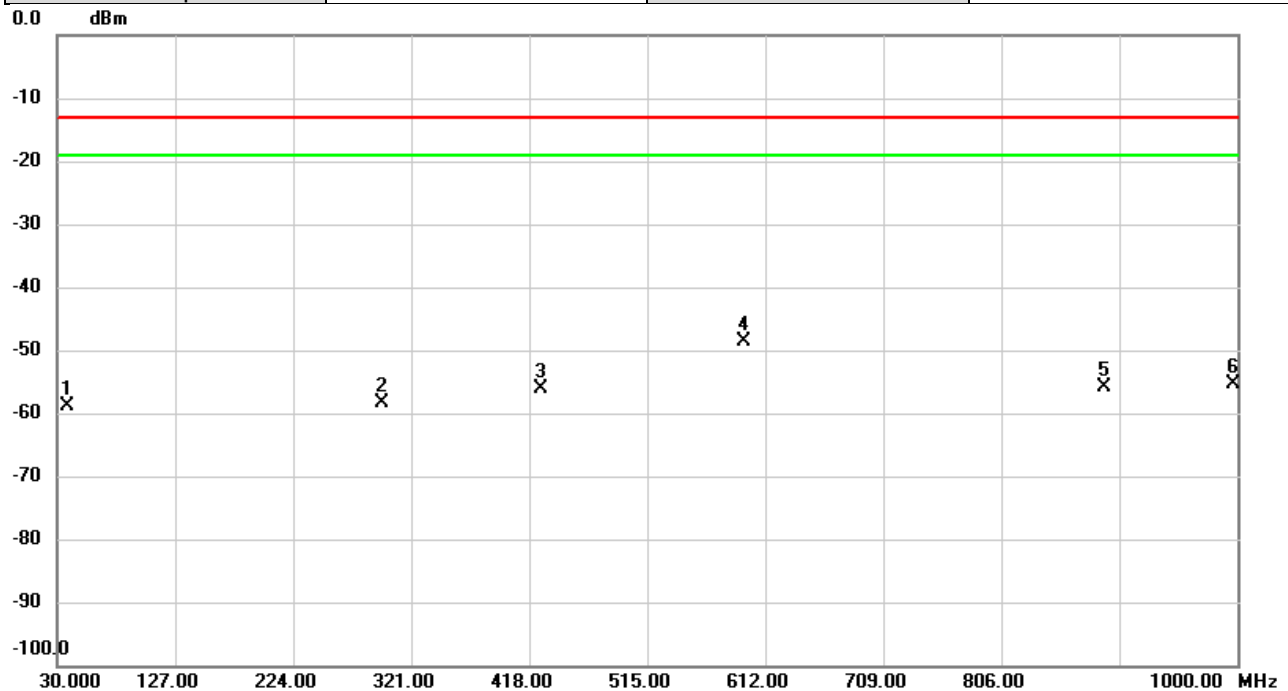


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		38.2450	-49.94	-8.83	-58.77	-13.00	-45.77	peak	
2		297.0087	-55.08	-3.35	-58.43	-13.00	-45.43	peak	
3		427.6353	-54.37	-1.75	-56.12	-13.00	-43.12	peak	
4	*	594.0227	-51.91	3.22	-48.69	-13.00	-35.69	peak	
5		891.0367	-62.35	6.39	-55.96	-13.00	-42.96	peak	
6		997.0900	-62.74	7.38	-55.36	-13.00	-42.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2026/1/21
Test Channel	CH656000	Polarization	Horizontal
Temp	23°C	Hum.	67%

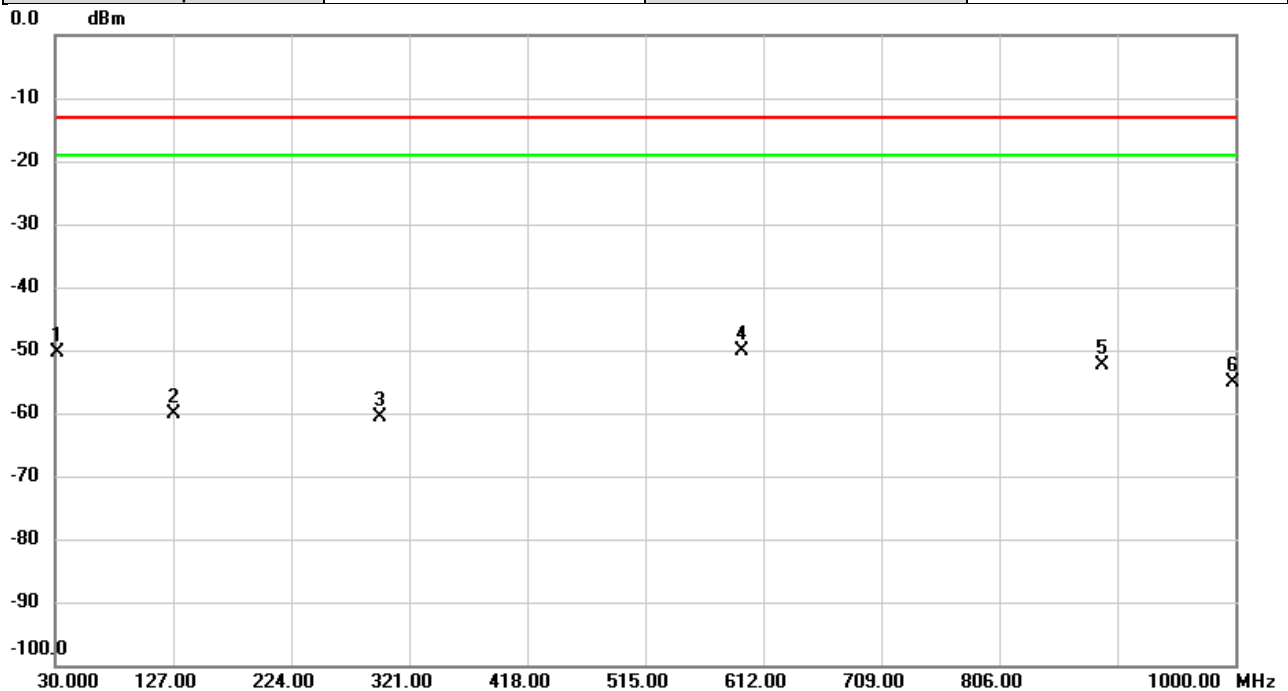


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		32.1016	-53.08	2.75	-50.33	-13.00	-37.33	peak	
2		128.0670	-53.35	-6.74	-60.09	-13.00	-47.09	peak	
3		297.0086	-54.21	-6.31	-60.52	-13.00	-47.52	peak	
4	*	593.9903	-50.34	0.12	-50.22	-13.00	-37.22	peak	
5		891.0043	-57.06	4.74	-52.32	-13.00	-39.32	peak	
6		997.7043	-61.19	6.16	-55.03	-13.00	-42.03	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2026/1/20
Test Channel	CH650000	Polarization	Vertical
Temp	25°C	Hum.	64%

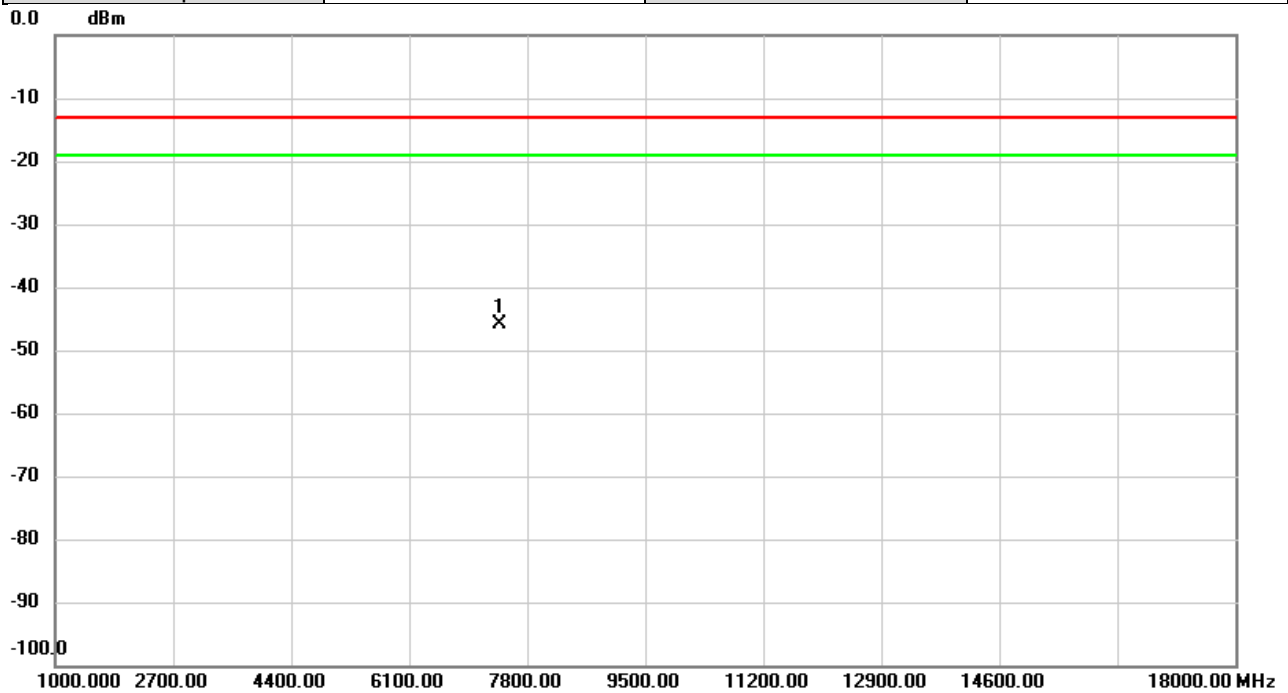


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7402.000	-63.92	18.06	-45.86	-13.00	-32.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2026/1/20
Test Channel	CH650000	Polarization	Horizontal
Temp	25°C	Hum.	64%

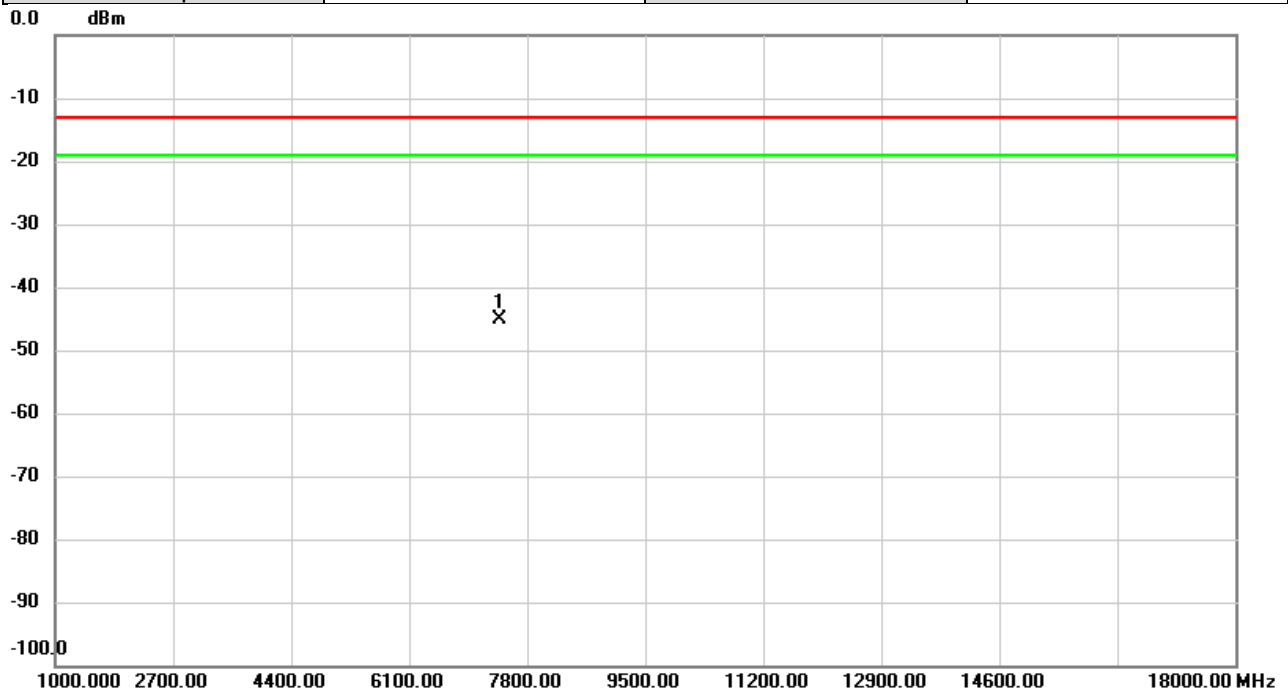


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7402.000	-63.32	18.11	-45.21	-13.00	-32.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2026/1/20
Test Channel	CH656000	Polarization	Vertical
Temp	25°C	Hum.	64%

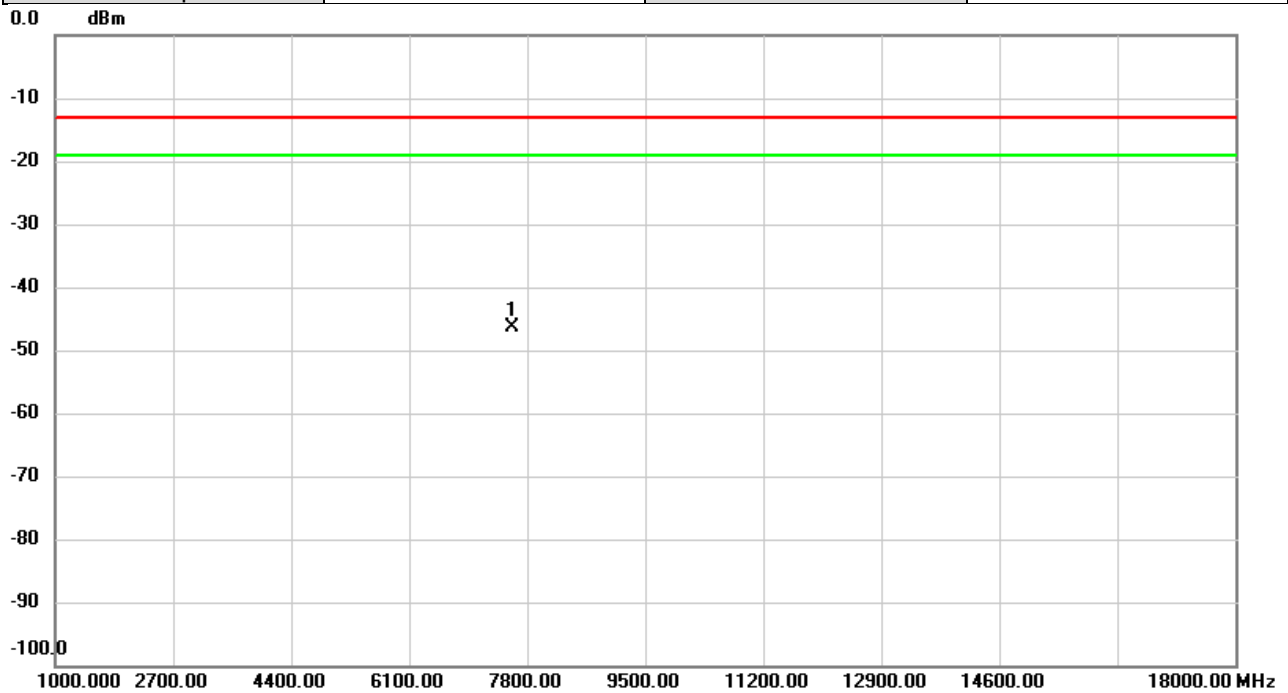


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7582.000	-63.59	17.24	-46.35	-13.00	-33.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2026/1/20
Test Channel	CH656000	Polarization	Horizontal
Temp	25°C	Hum.	64%

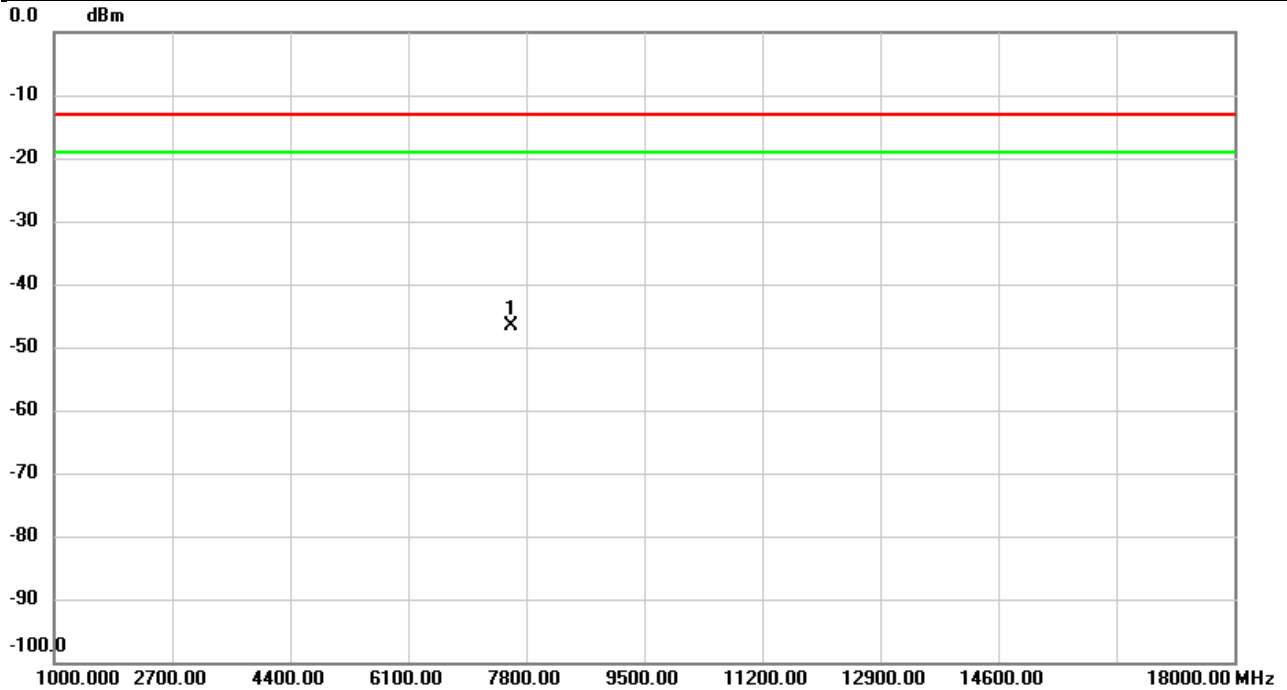


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7582.000	-63.86	17.28	-46.58	-13.00	-33.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2026/1/20
Test Channel	CH662000	Polarization	Vertical
Temp	25°C	Hum.	64%

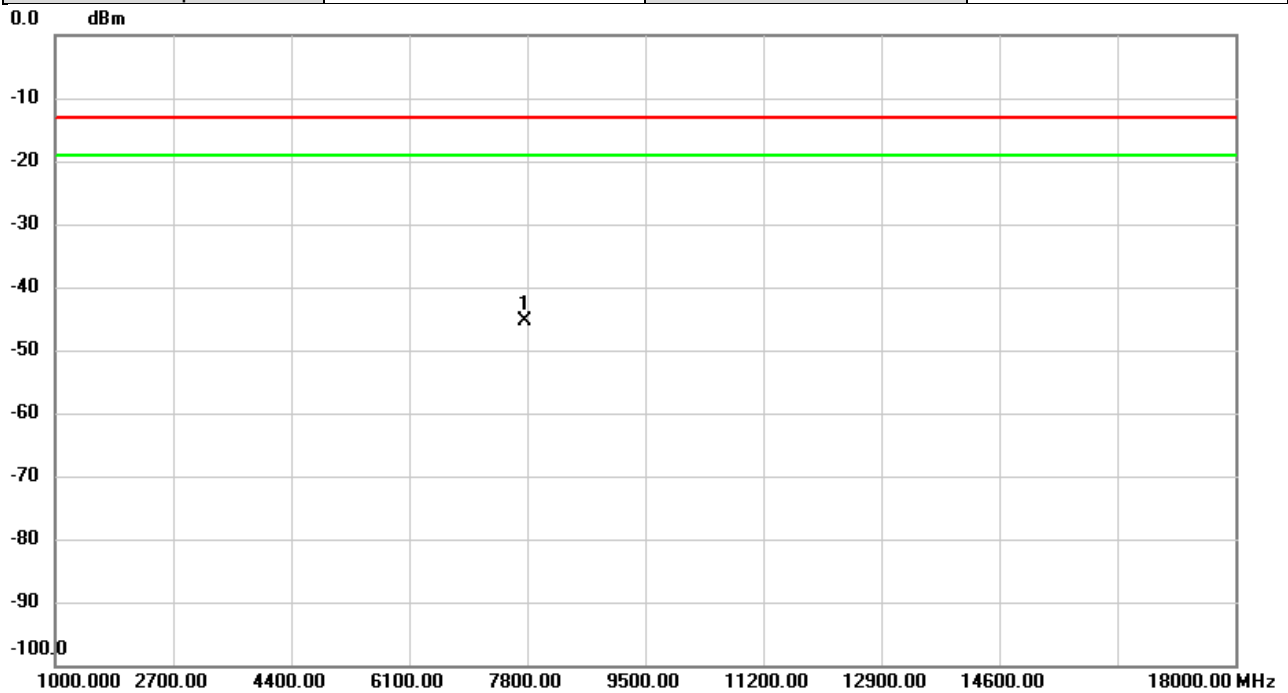


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7762.000	-62.80	17.37	-45.43	-13.00	-32.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2026/1/20
Test Channel	CH662000	Polarization	Horizontal
Temp	25°C	Hum.	64%

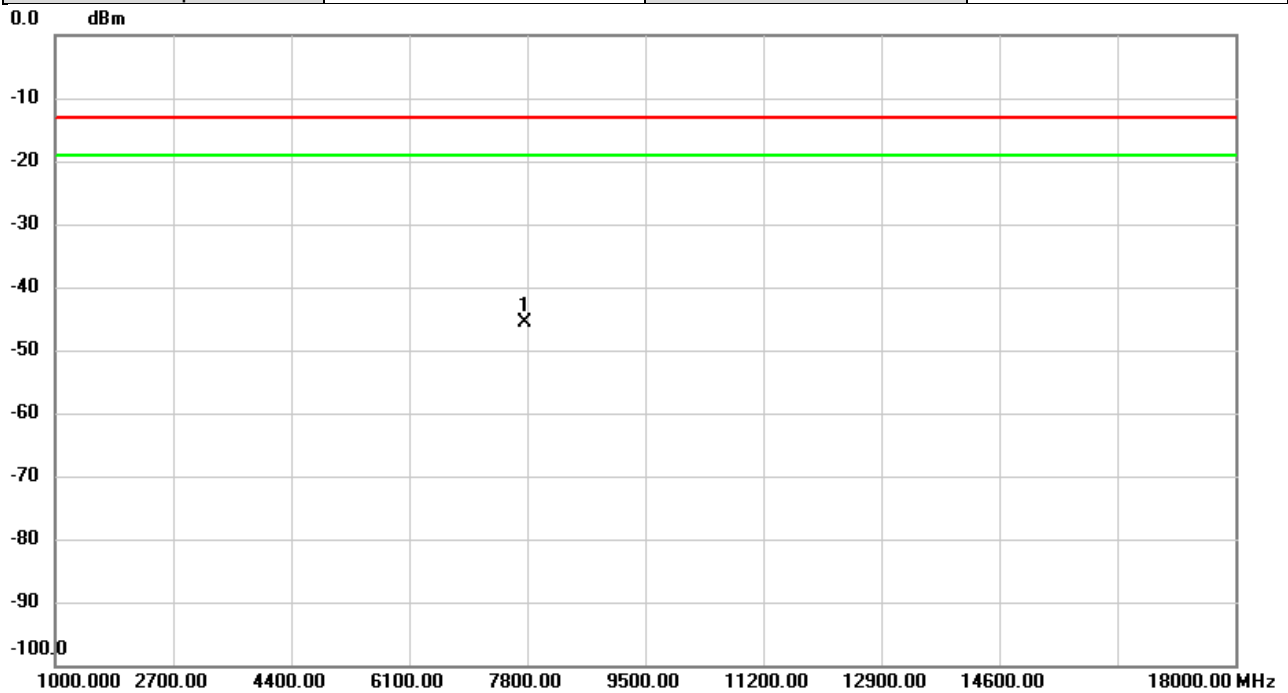


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7762.000	-63.10	17.43	-45.67	-13.00	-32.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2026/1/20
Test Channel	CH656000	Polarization	Vertical
Temp	25°C	Hum.	64%

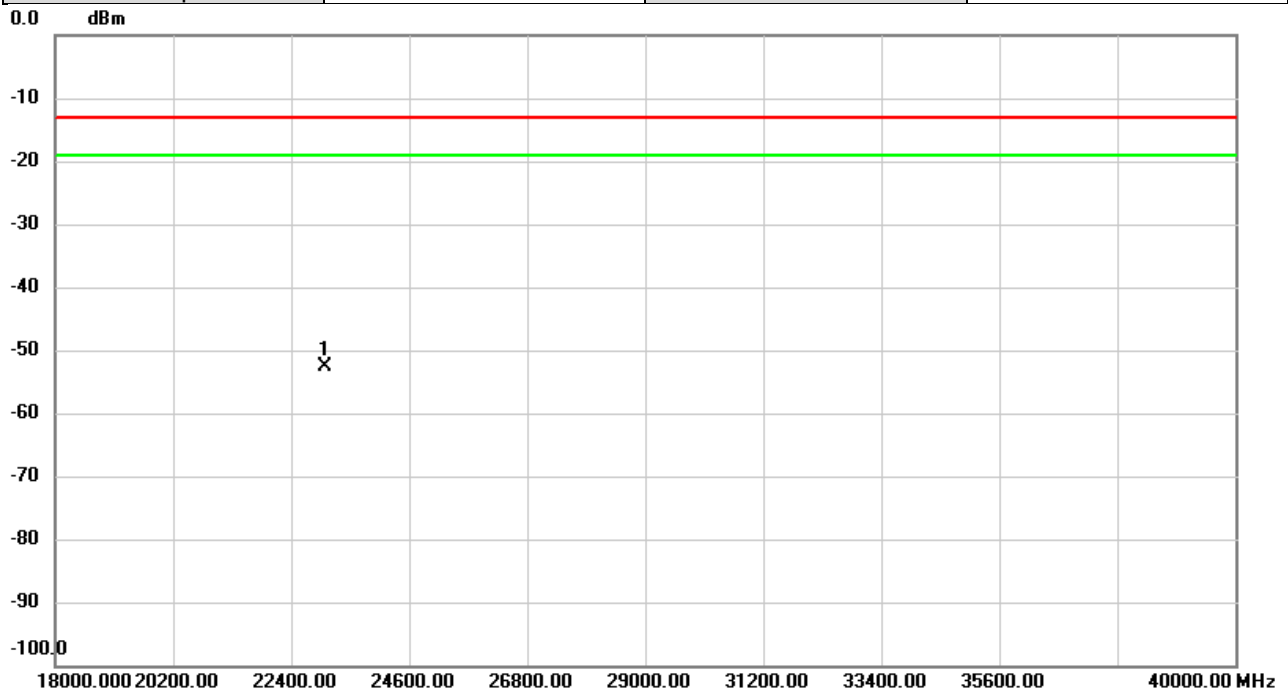


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	23040.00	-56.77	4.04	-52.73	-13.00	-39.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77	Test Date	2026/1/20
Test Channel	CH656000	Polarization	Horizontal
Temp	25°C	Hum.	64%

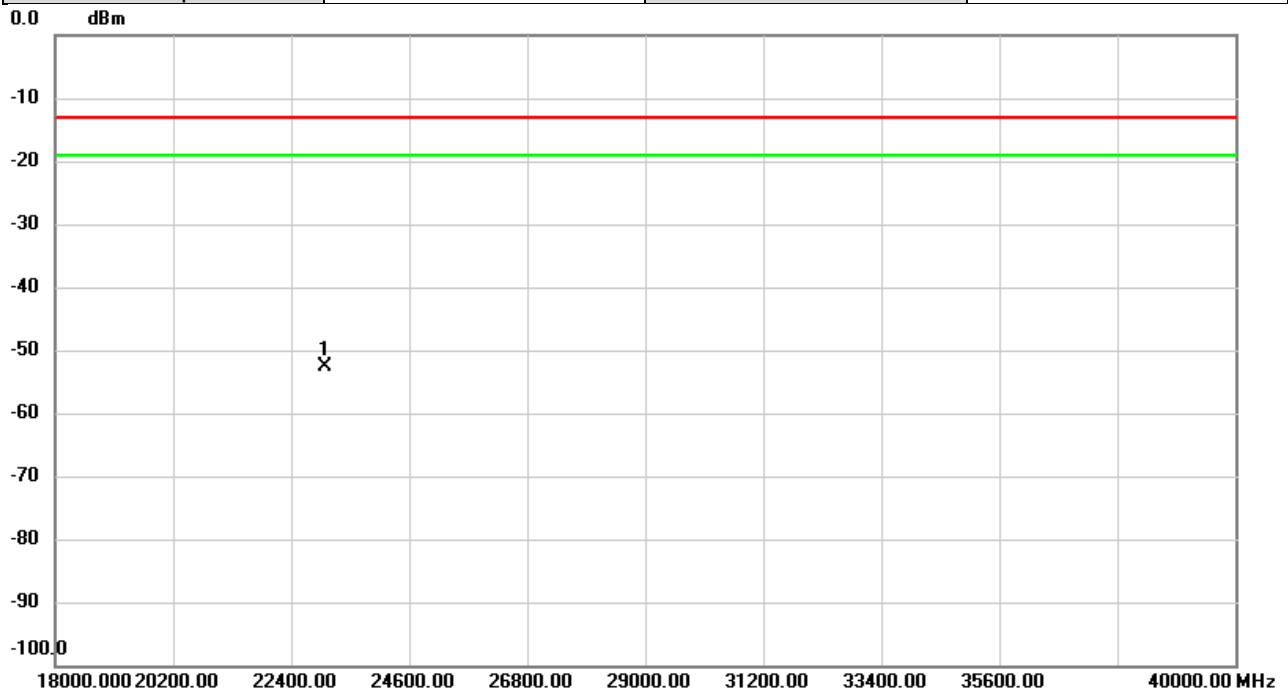


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	23040.00	-55.69	2.99	-52.70	-13.00	-39.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

For 3450 ~ 3550 MHz:

Test Mode	SRS n78	Test Date	2026/1/21
Test Channel	CH633334	Polarization	Vertical
Temp	23°C	Hum.	67%

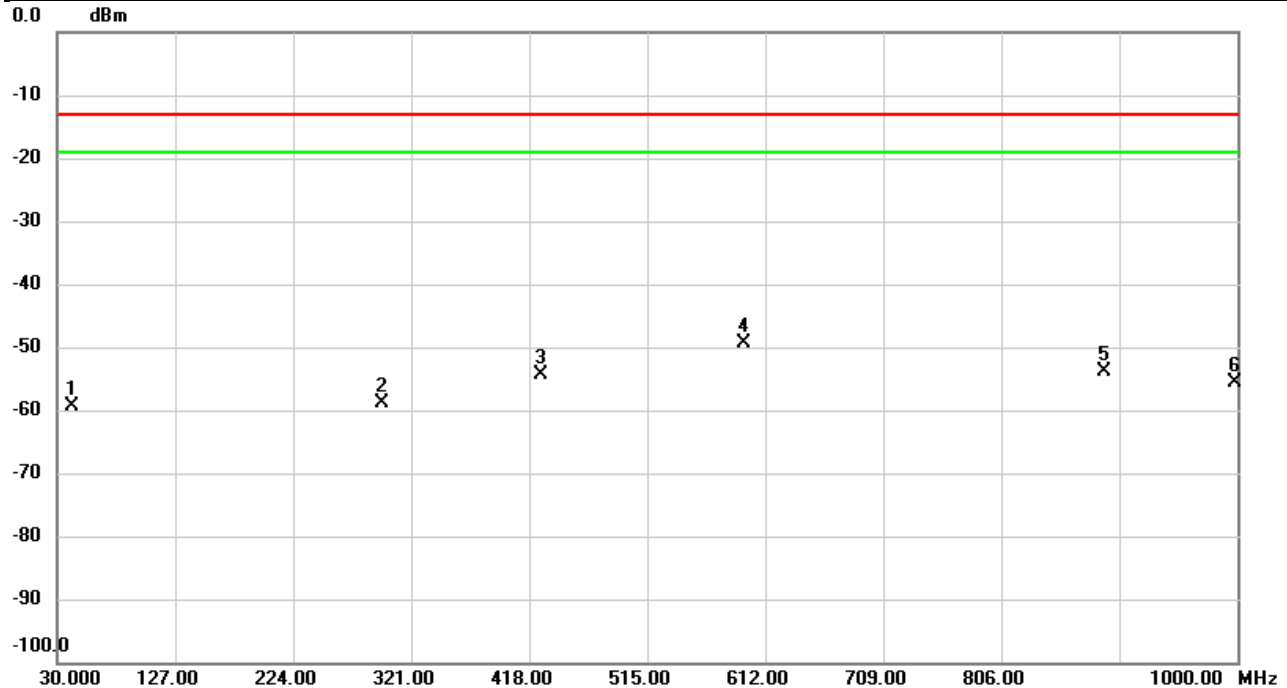


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		41.8017	-51.98	-7.45	-59.43	-13.00	-46.43	peak	
2		297.0087	-55.57	-3.35	-58.92	-13.00	-45.92	peak	
3		427.4737	-52.59	-1.75	-54.34	-13.00	-41.34	peak	
4	*	594.0227	-52.67	3.22	-49.45	-13.00	-36.45	peak	
5		891.0367	-60.31	6.39	-53.92	-13.00	-40.92	peak	
6		997.9307	-63.00	7.39	-55.61	-13.00	-42.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2026/1/21
Test Channel	CH633334	Polarization	Horizontal
Temp	23°C	Hum.	67%

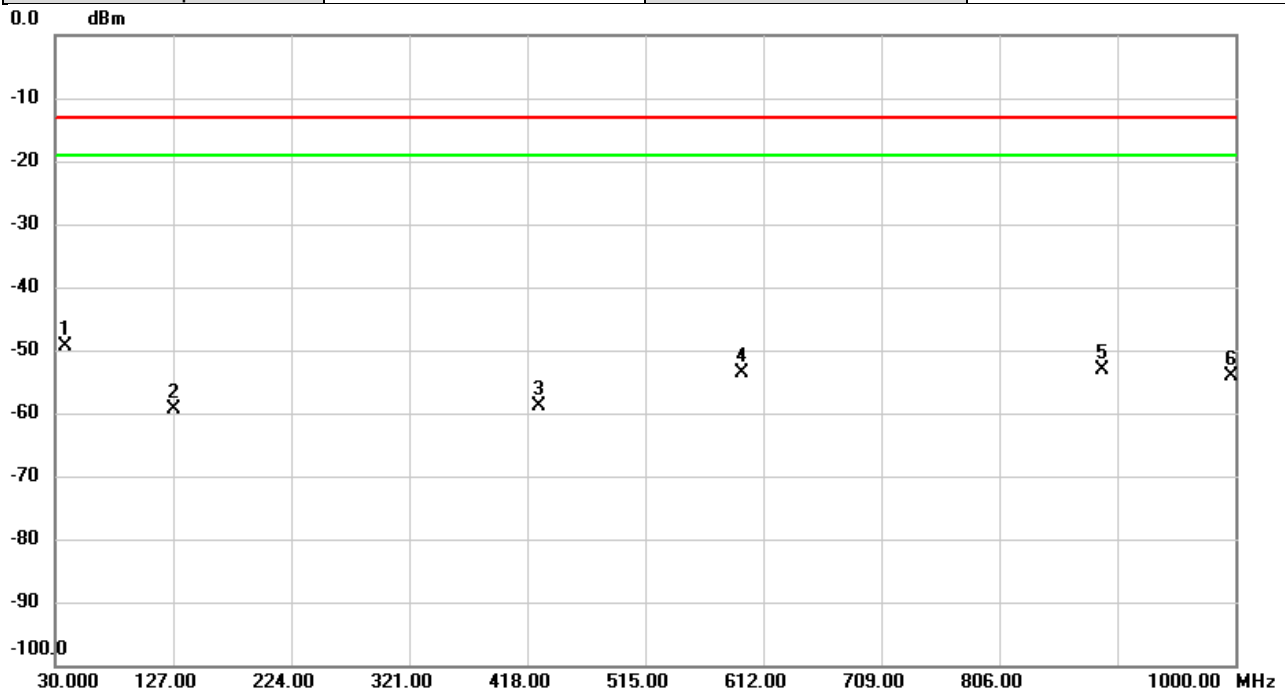


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	38.2450	-51.38	2.09	-49.29	-13.00	-36.29	peak	
2		127.3233	-52.45	-6.80	-59.25	-13.00	-46.25	peak	
3		427.3443	-56.65	-2.18	-58.83	-13.00	-45.83	peak	
4		593.9580	-53.66	0.12	-53.54	-13.00	-40.54	peak	
5		891.0043	-57.88	4.74	-53.14	-13.00	-40.14	peak	
6		996.5726	-60.19	6.14	-54.05	-13.00	-41.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2026/1/20
Test Channel	CH633334	Polarization	Vertical
Temp	25°C	Hum.	64%

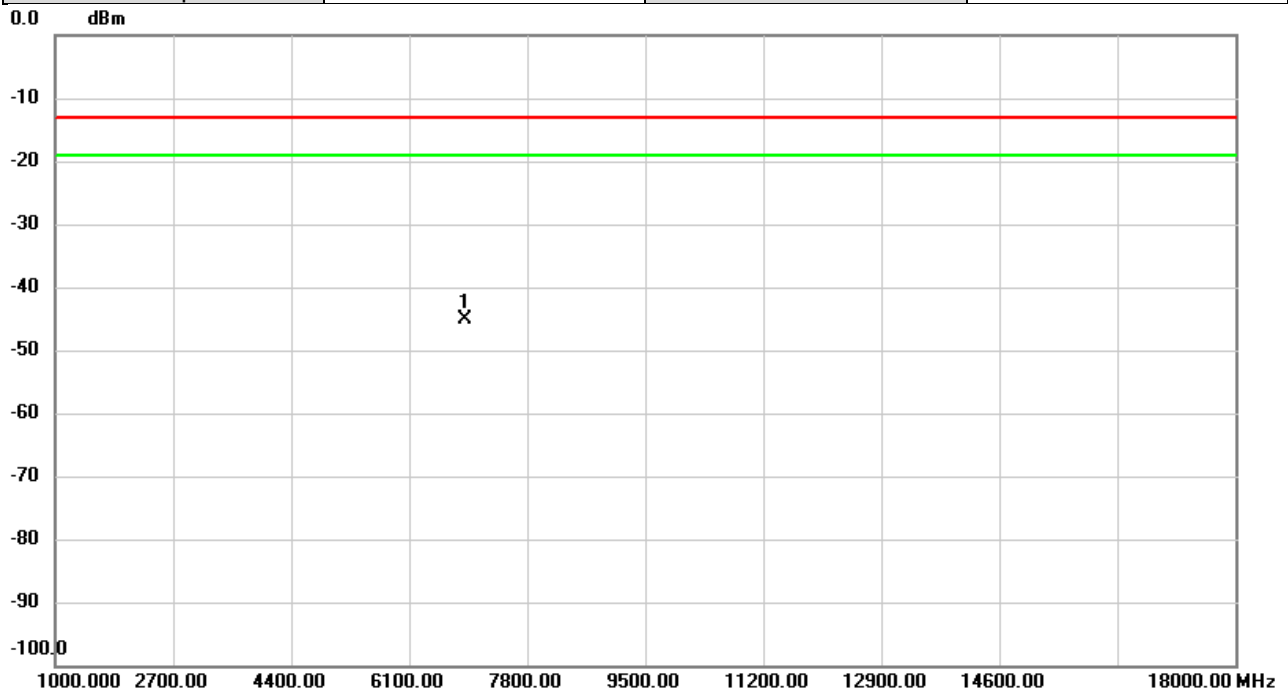


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6902.020	-63.22	17.99	-45.23	-13.00	-32.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2026/1/20
Test Channel	CH633334	Polarization	Horizontal
Temp	25°C	Hum.	64%

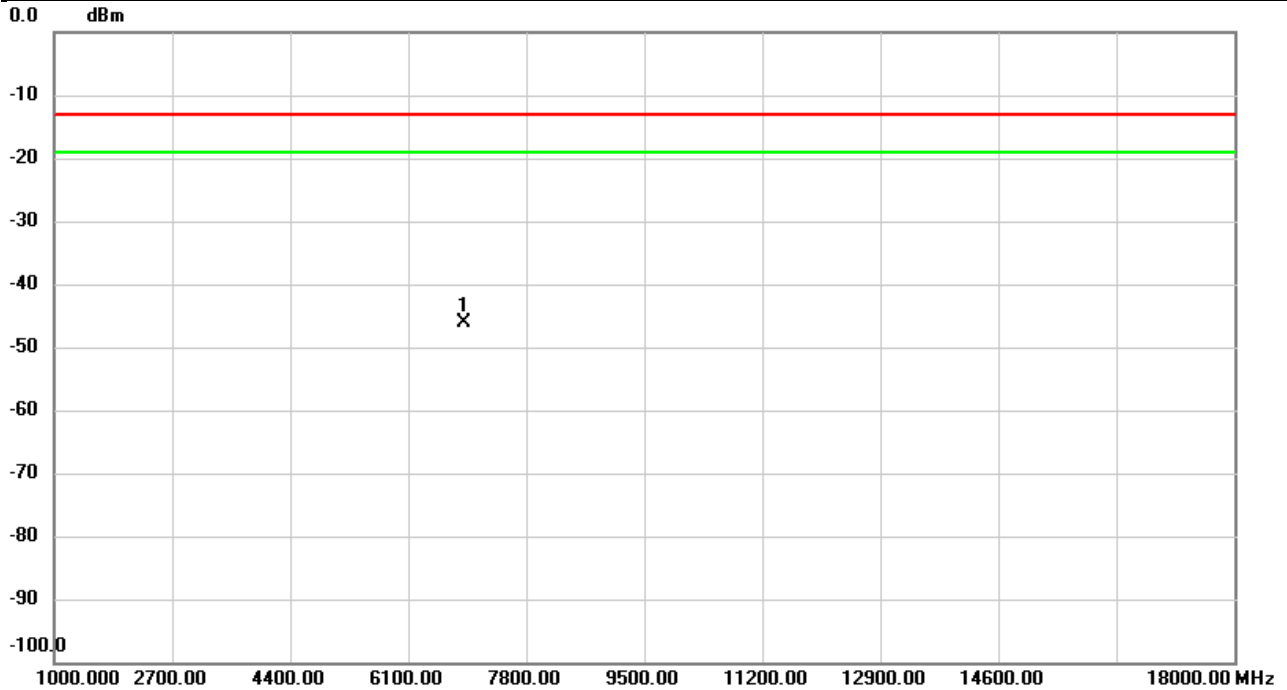


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6902.020	-63.93	17.82	-46.11	-13.00	-33.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2026/1/22
Test Channel	CH633334	Polarization	Vertical
Temp	22°C	Hum.	66%

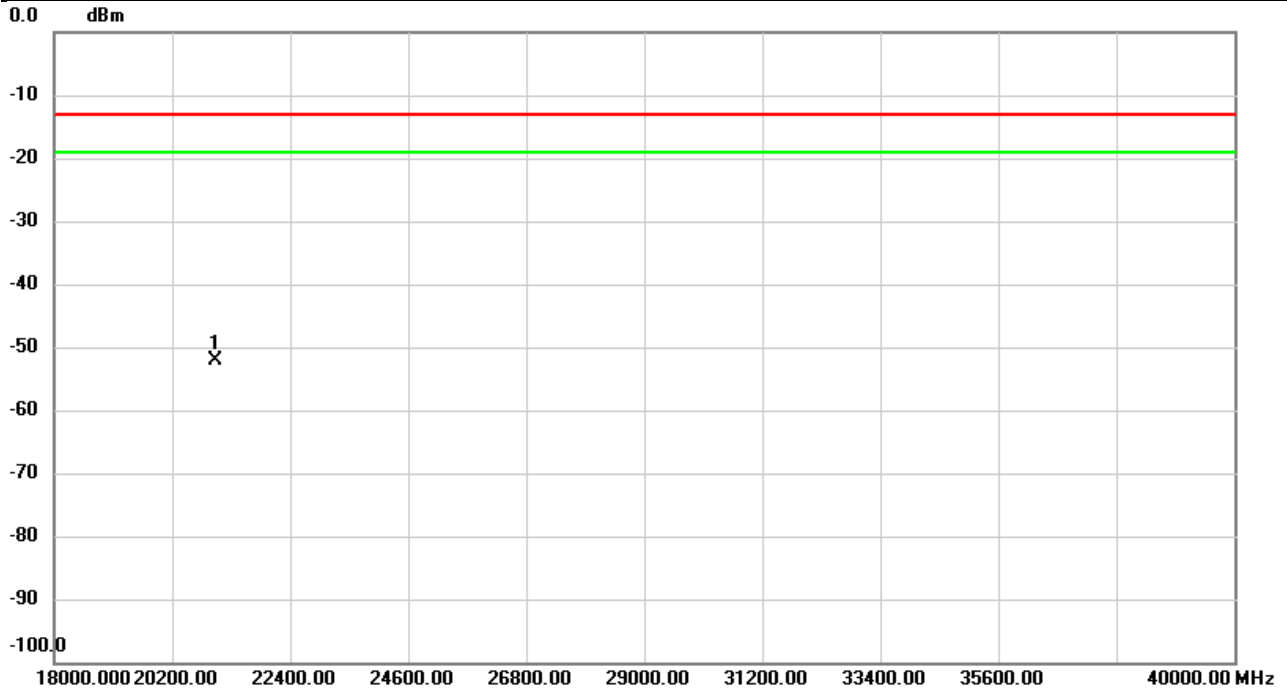


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	21000.00	-54.72	2.67	-52.05	-13.00	-39.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2026/1/22
Test Channel	CH633334	Polarization	Horizontal
Temp	22°C	Hum.	66%

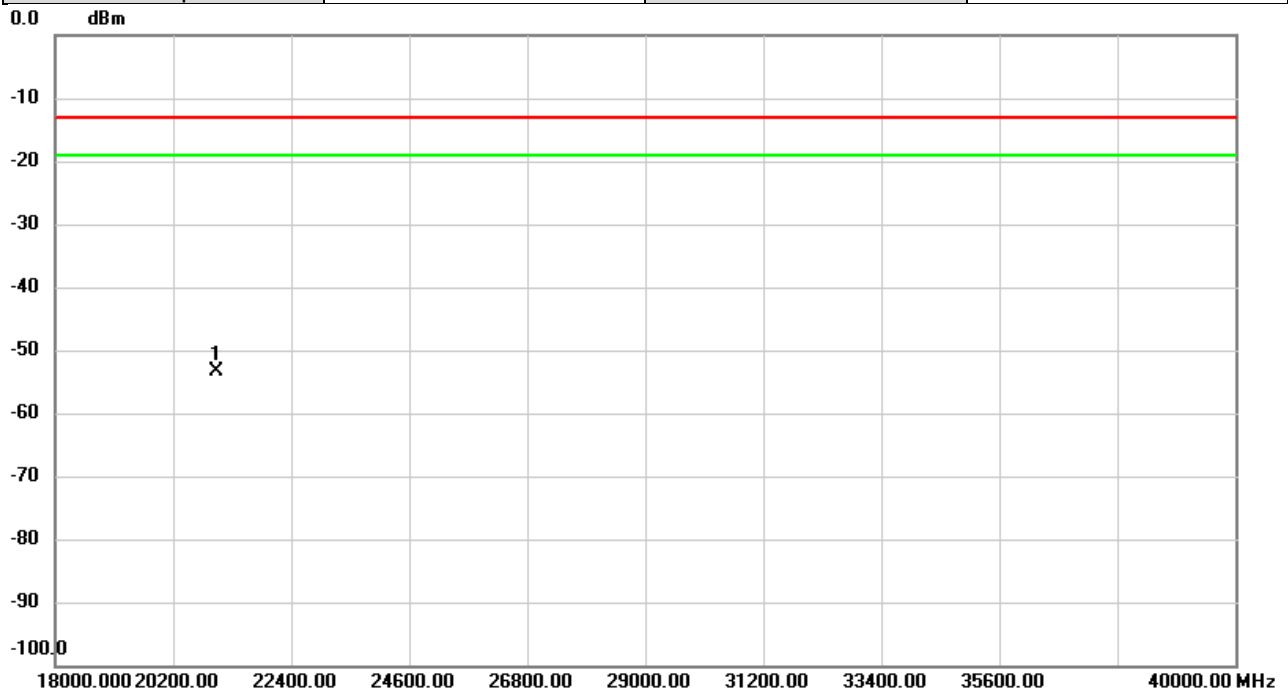


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	21000.00	-55.07	1.63	-53.44	-13.00	-40.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

For 3700 ~ 3800 MHz:

Test Mode	SRS n78	Test Date	2026/1/21
Test Channel	CH650000	Polarization	Vertical
Temp	23°C	Hum.	67%

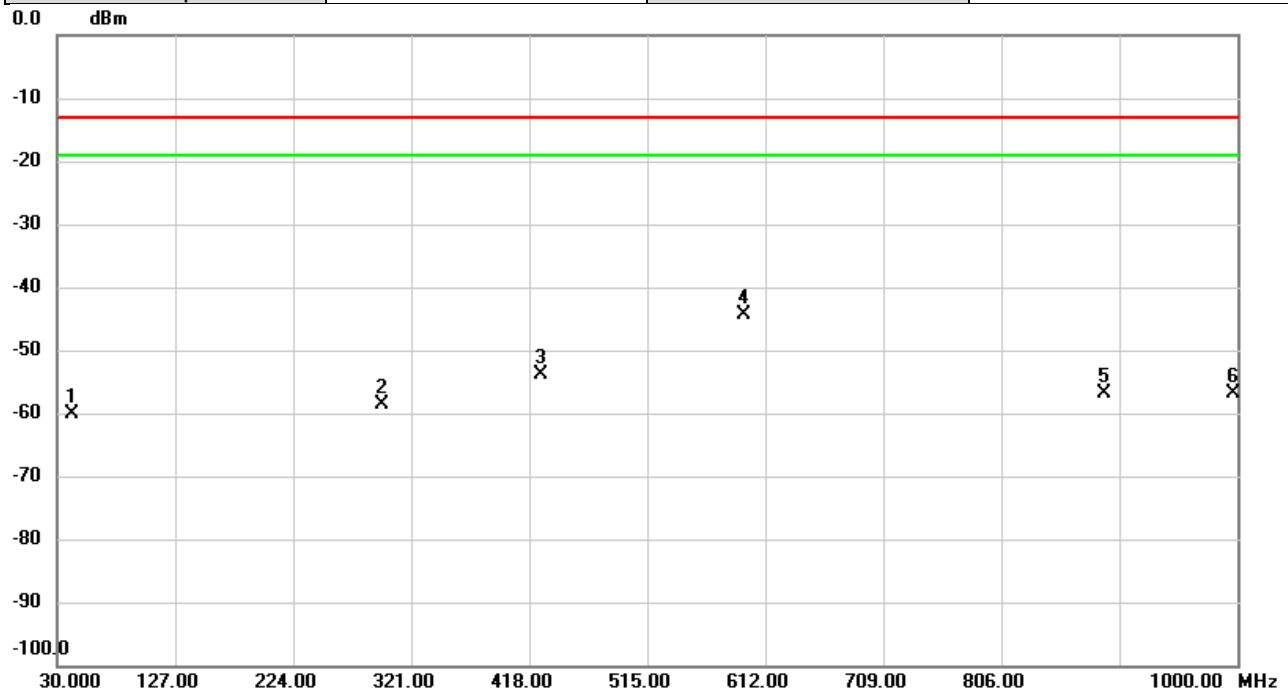


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		41.8017	-52.63	-7.45	-60.08	-13.00	-47.08	peak	
2		297.0087	-55.37	-3.35	-58.72	-13.00	-45.72	peak	
3		427.4090	-52.19	-1.75	-53.94	-13.00	-40.94	peak	
4	*	593.9903	-47.70	3.22	-44.48	-13.00	-31.48	peak	
5		890.9720	-63.30	6.38	-56.92	-13.00	-43.92	peak	
6		997.1223	-64.25	7.38	-56.87	-13.00	-43.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2026/1/21
Test Channel	CH650000	Polarization	Horizontal
Temp	23°C	Hum.	67%

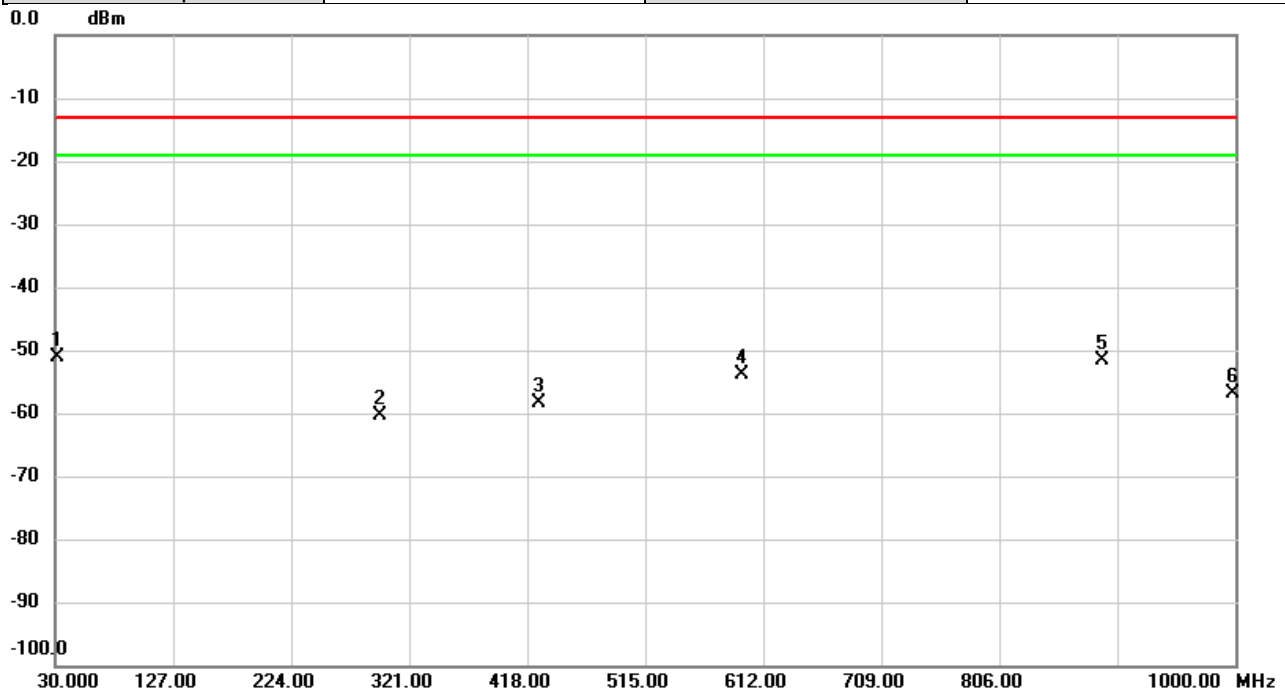


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	32.1340	-53.87	2.74	-51.13	-13.00	-38.13	peak	
2		297.0086	-54.02	-6.31	-60.33	-13.00	-47.33	peak	
3		427.4090	-56.11	-2.18	-58.29	-13.00	-45.29	peak	
4		594.0226	-53.97	0.12	-53.85	-13.00	-40.85	peak	
5		891.0043	-56.38	4.74	-51.64	-13.00	-38.64	peak	
6		997.7366	-63.00	6.16	-56.84	-13.00	-43.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2026/1/20
Test Channel	CH650000	Polarization	Vertical
Temp	25°C	Hum.	64%

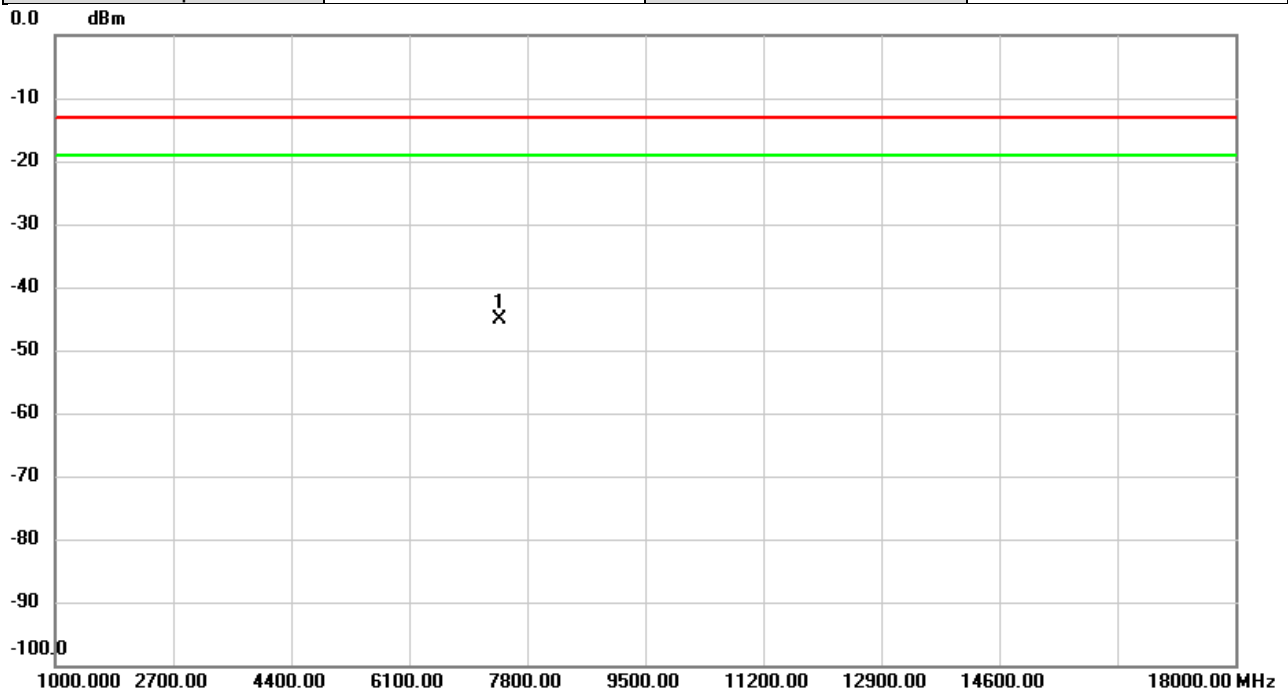


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7402.000	-63.12	18.06	-45.06	-13.00	-32.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2026/1/20
Test Channel	CH650000	Polarization	Horizontal
Temp	25°C	Hum.	64%

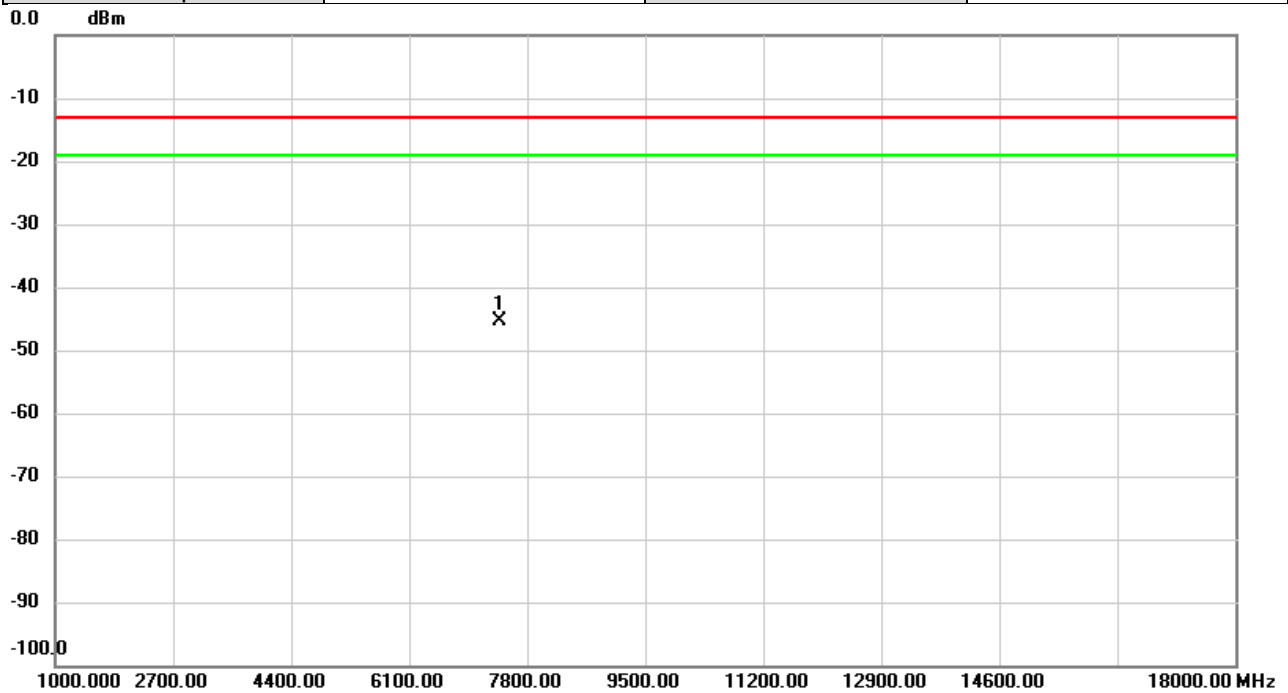


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7402.000	-63.38	18.11	-45.27	-13.00	-32.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2026/1/22
Test Channel	CH650000	Polarization	Vertical
Temp	22°C	Hum.	66%

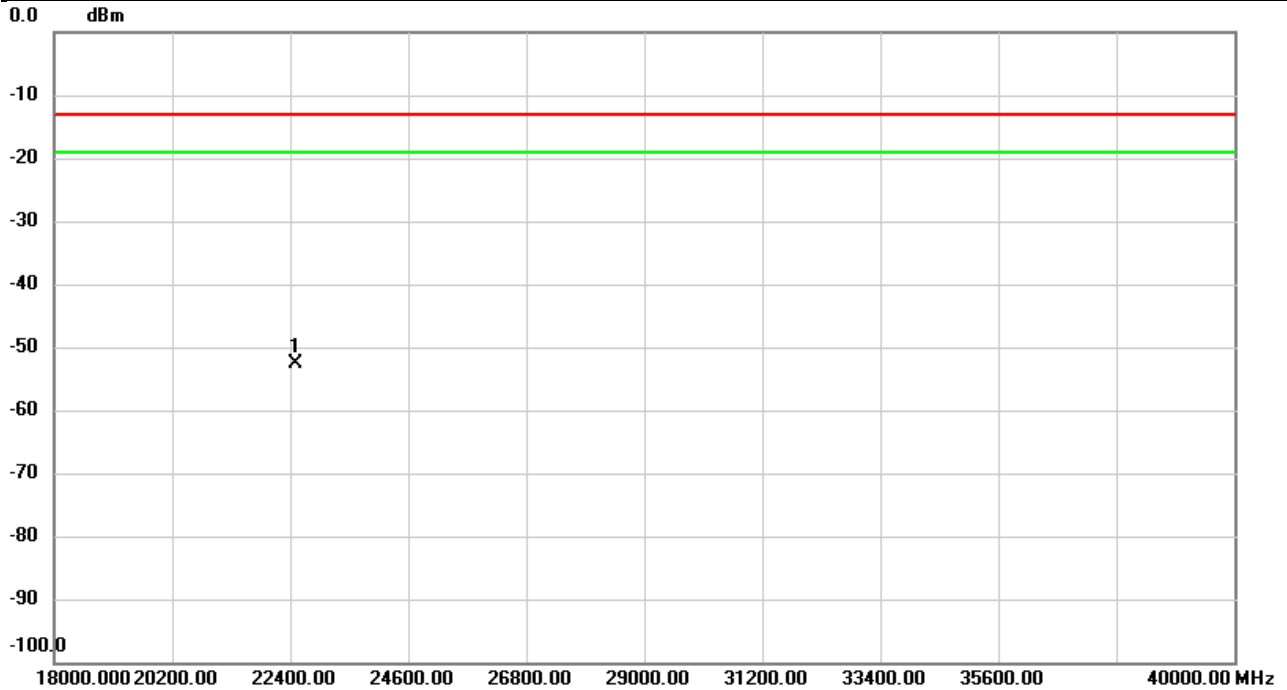


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	22500.00	-56.63	3.96	-52.67	-13.00	-39.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78	Test Date	2026/1/22
Test Channel	CH650000	Polarization	Horizontal
Temp	22°C	Hum.	66%

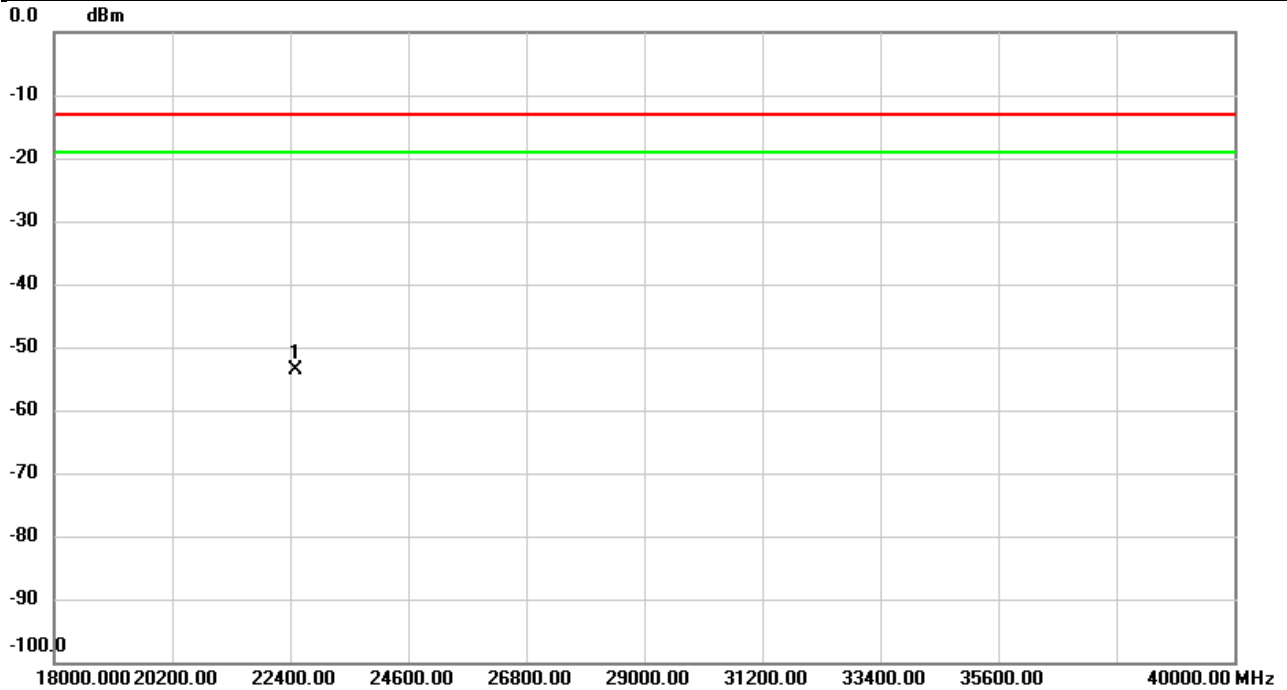


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	22500.00	-56.22	2.63	-53.59	-13.00	-40.59	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2026/1/21
Test Channel	CH519000	Polarization	Vertical
Temp	23°C	Hum.	67%

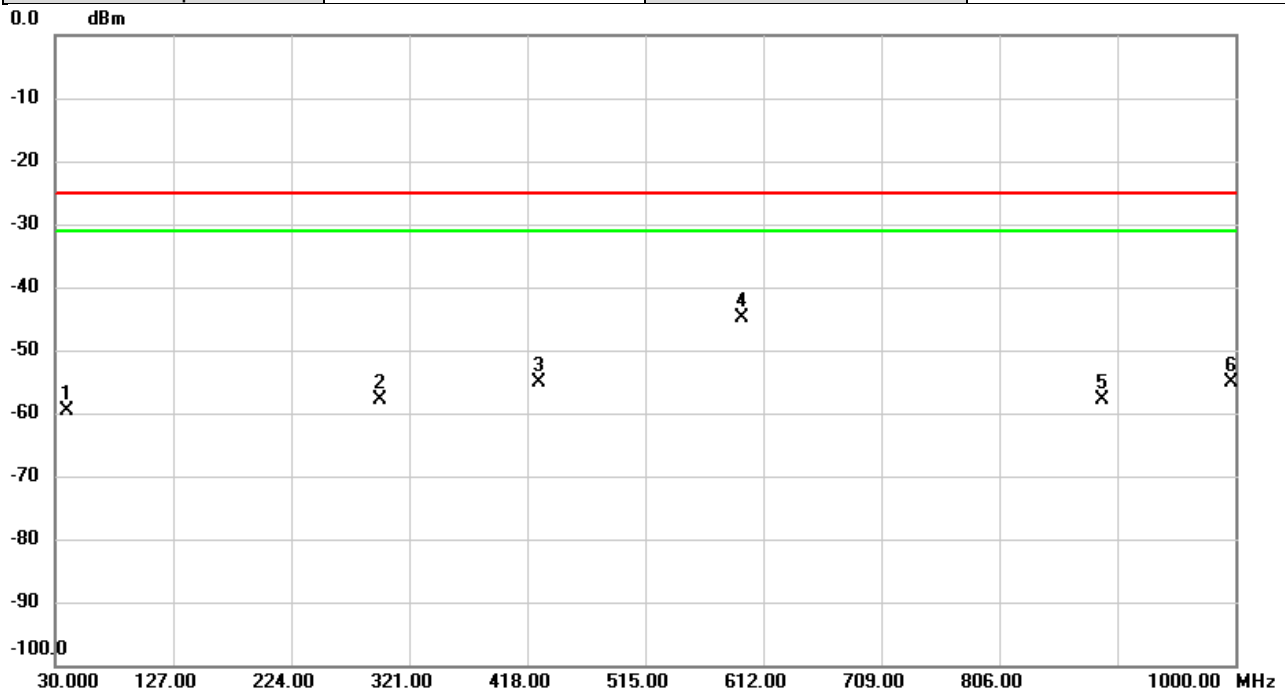


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		39.2473	-51.04	-8.64	-59.68	-25.00	-34.68	peak	
2		297.0086	-54.50	-3.35	-57.85	-25.00	-32.85	peak	
3		427.3443	-53.45	-1.75	-55.20	-25.00	-30.20	peak	
4	*	594.0226	-48.20	3.22	-44.98	-25.00	-19.98	peak	
5		891.0043	-64.31	6.39	-57.92	-25.00	-32.92	peak	
6		997.1870	-62.60	7.38	-55.22	-25.00	-30.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2026/1/21
Test Channel	CH519000	Polarization	Horizontal
Temp	23°C	Hum.	67%

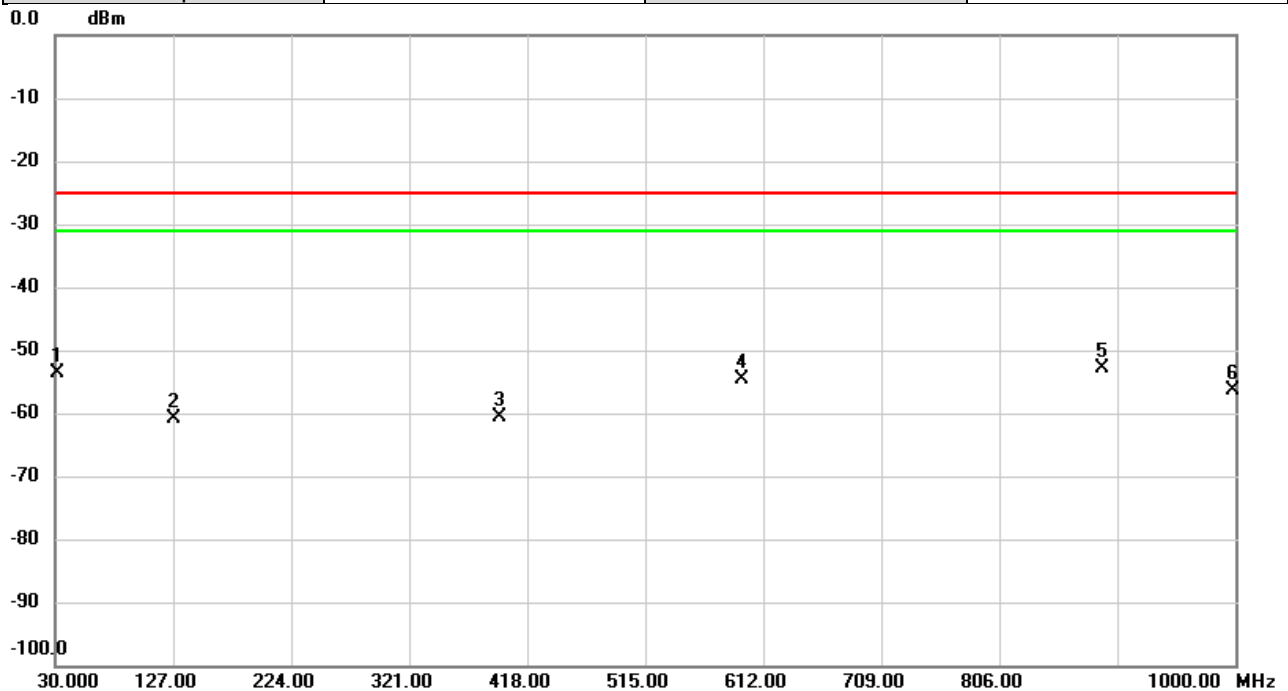


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		32.1662	-56.26	2.74	-53.52	-25.00	-28.52	peak	
2		127.2910	-54.04	-6.81	-60.85	-25.00	-35.85	peak	
3		396.0133	-58.02	-2.50	-60.52	-25.00	-35.52	peak	
4		594.0226	-54.64	0.12	-54.52	-25.00	-29.52	peak	
5	*	891.0042	-57.60	4.74	-52.86	-25.00	-27.86	peak	
6		997.8336	-62.62	6.16	-56.46	-25.00	-31.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2026/1/20
Test Channel	CH518000	Polarization	Vertical
Temp	25°C	Hum.	64%

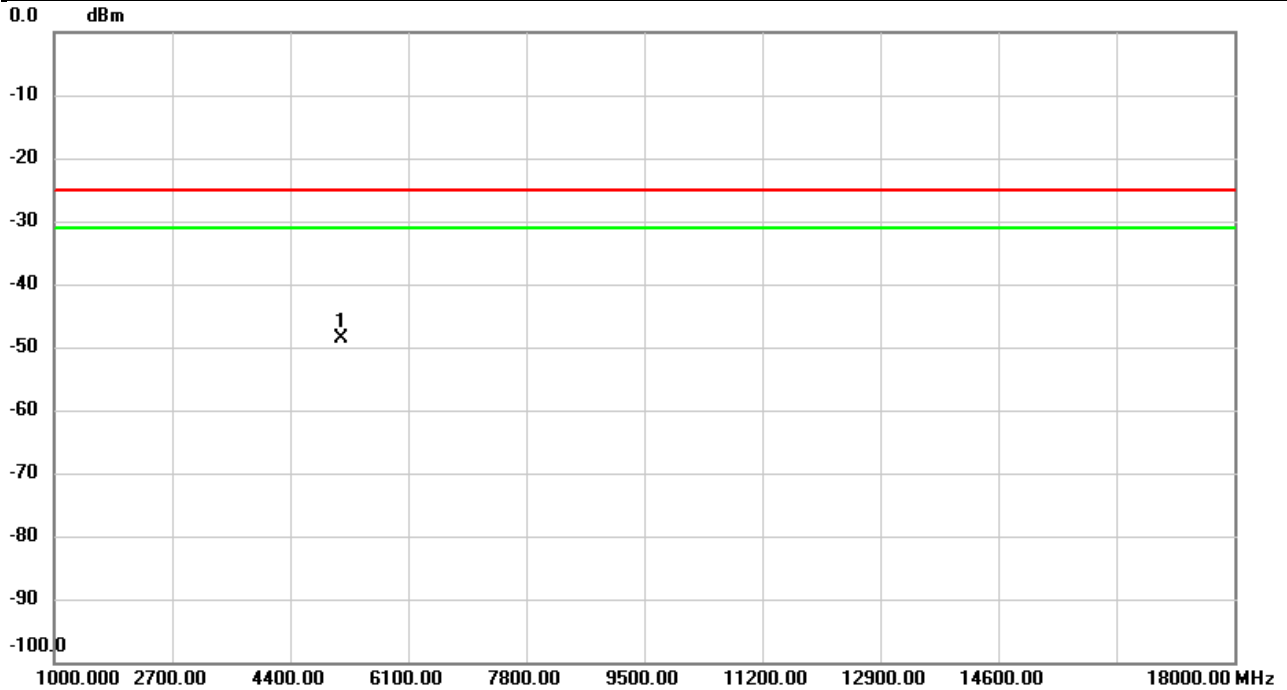


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5142.000	-62.59	13.89	-48.70	-25.00	-23.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2026/1/20
Test Channel	CH518000	Polarization	Horizontal
Temp	25°C	Hum.	64%

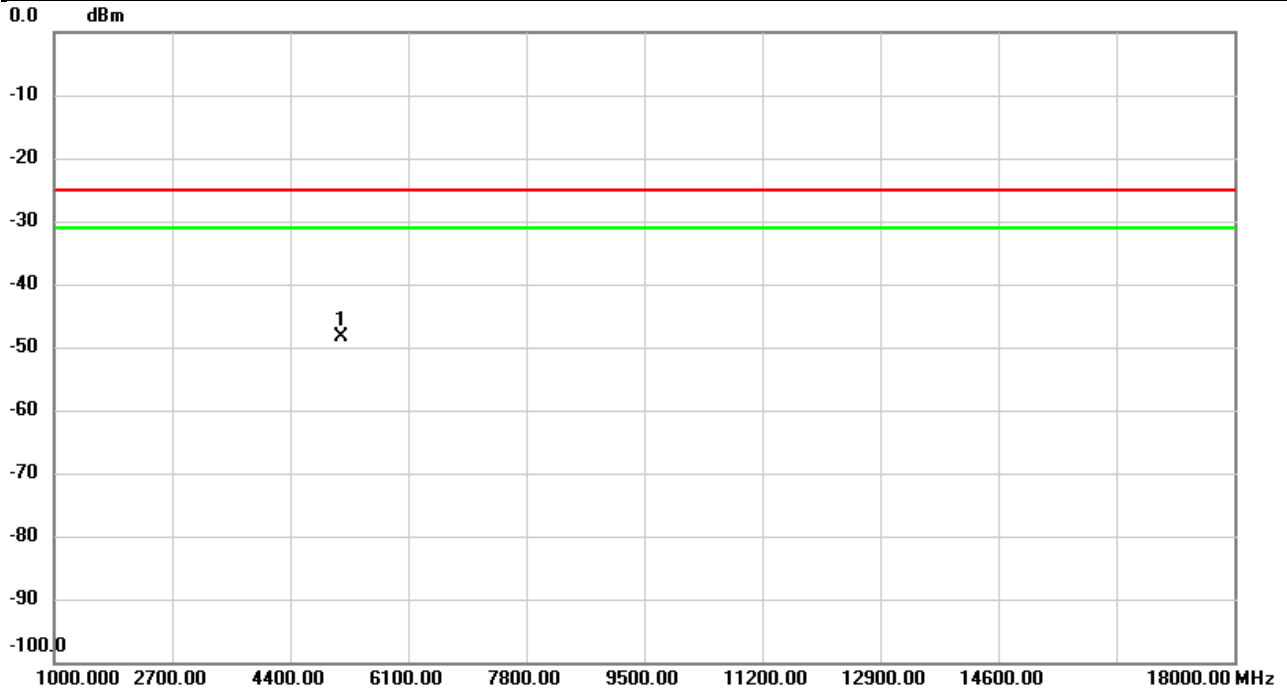


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5142.000	-62.21	13.89	-48.32	-25.00	-23.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2026/1/20
Test Channel	CH519000	Polarization	Vertical
Temp	25°C	Hum.	64%

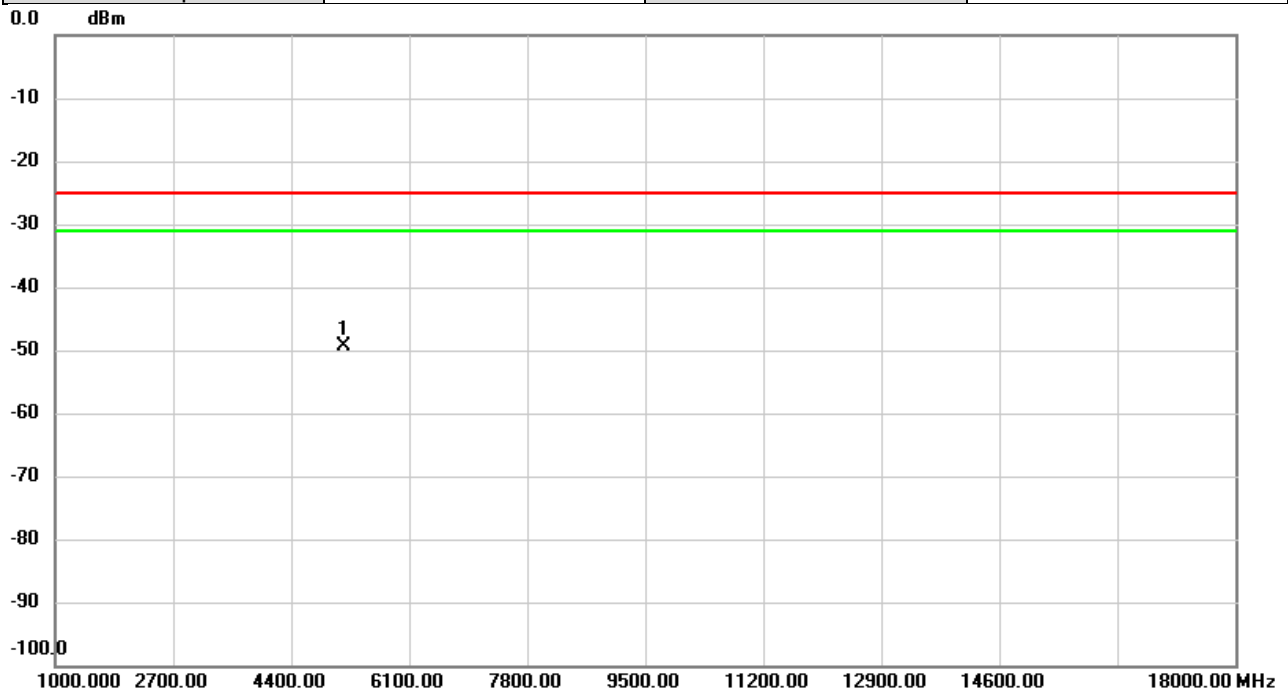


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5152.000	-63.21	13.85	-49.36	-25.00	-24.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2026/1/20
Test Channel	CH519000	Polarization	Horizontal
Temp	25°C	Hum.	64%

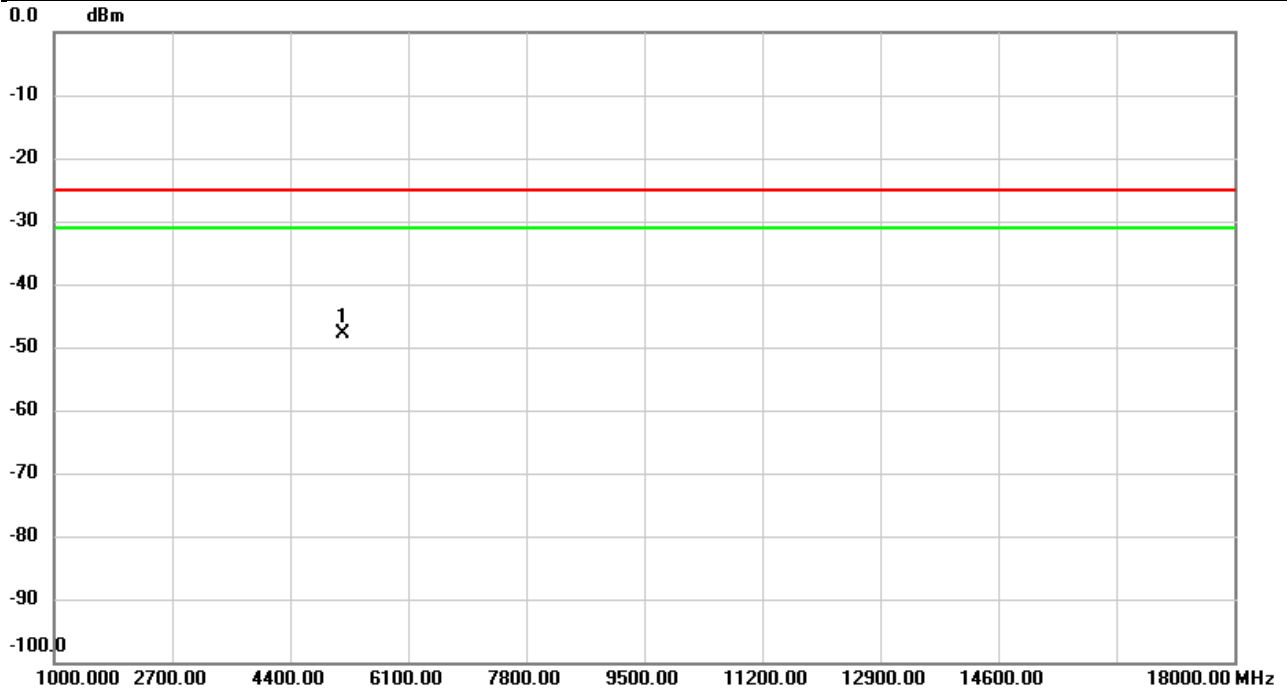


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5152.000	-61.76	13.89	-47.87	-25.00	-22.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2026/1/20
Test Channel	CH520000	Polarization	Vertical
Temp	25°C	Hum.	64%

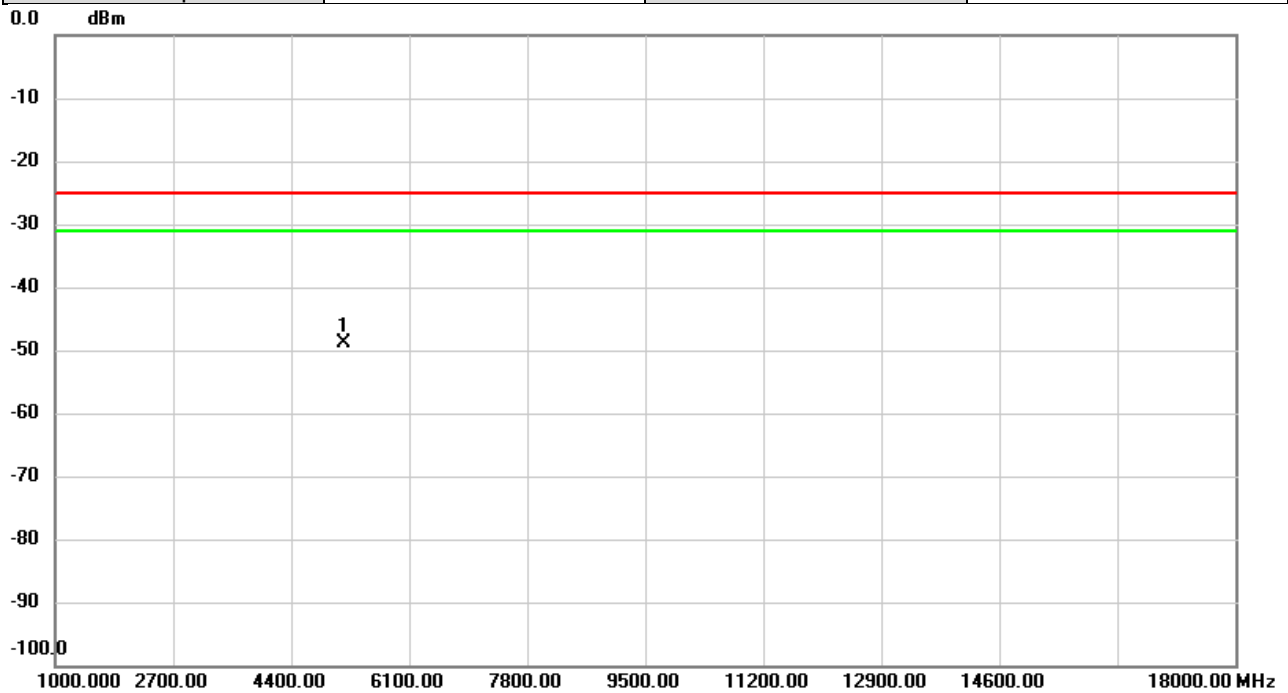


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5162.000	-62.54	13.77	-48.77	-25.00	-23.77	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2026/1/20
Test Channel	CH520000	Polarization	Horizontal
Temp	25°C	Hum.	64%

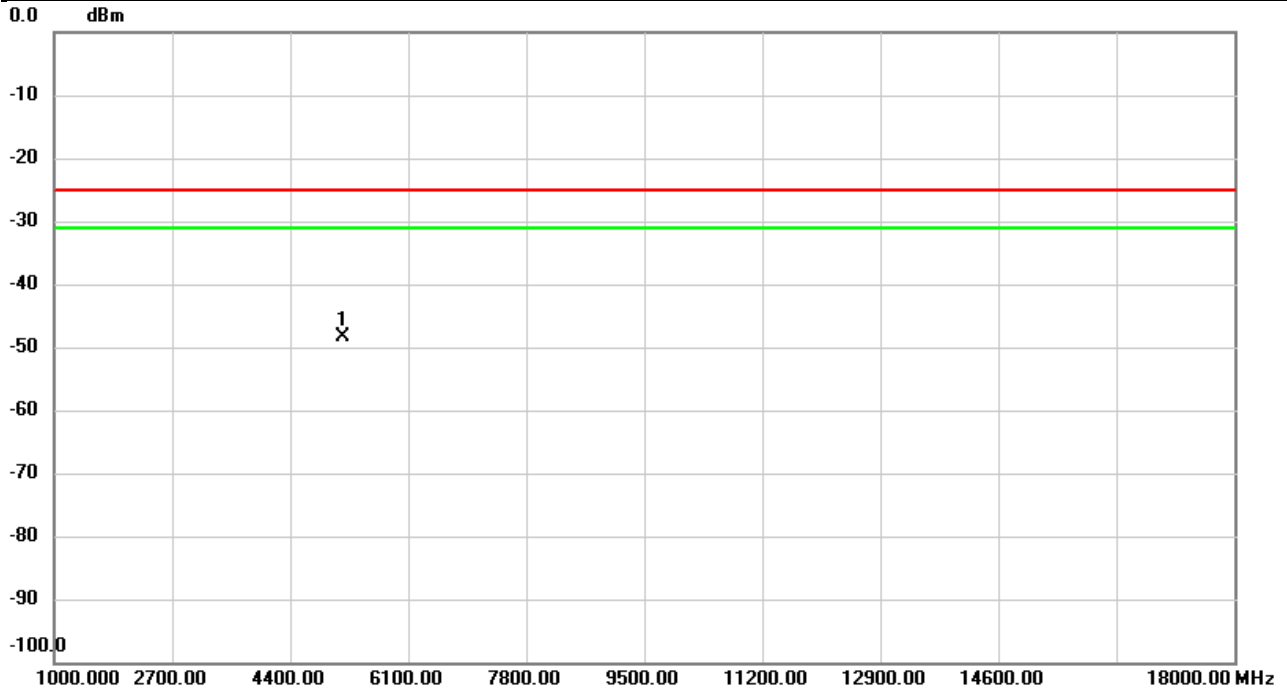


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5162.000	-62.24	13.79	-48.45	-25.00	-23.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2026/1/20
Test Channel	CH519000	Polarization	Vertical
Temp	25°C	Hum.	64%

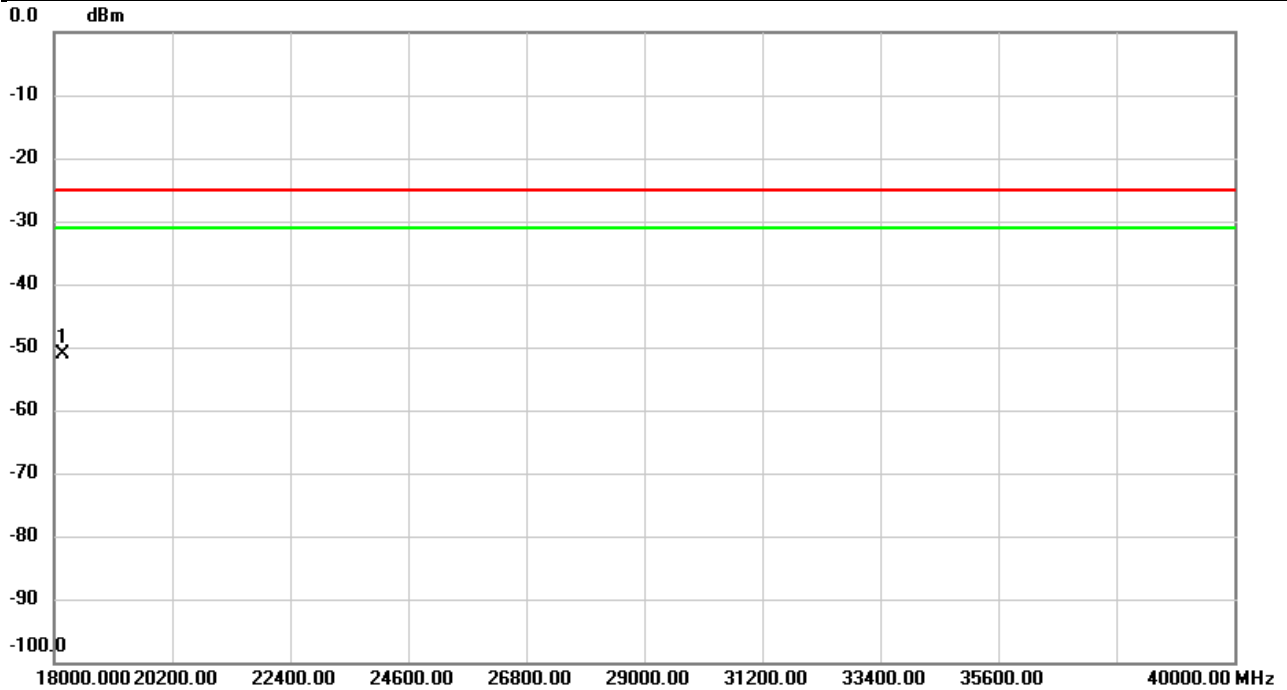


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18165.00	-53.99	2.75	-51.24	-25.00	-26.24	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n38 HPUE	Test Date	2026/1/20
Test Channel	CH519000	Polarization	Horizontal
Temp	25°C	Hum.	64%

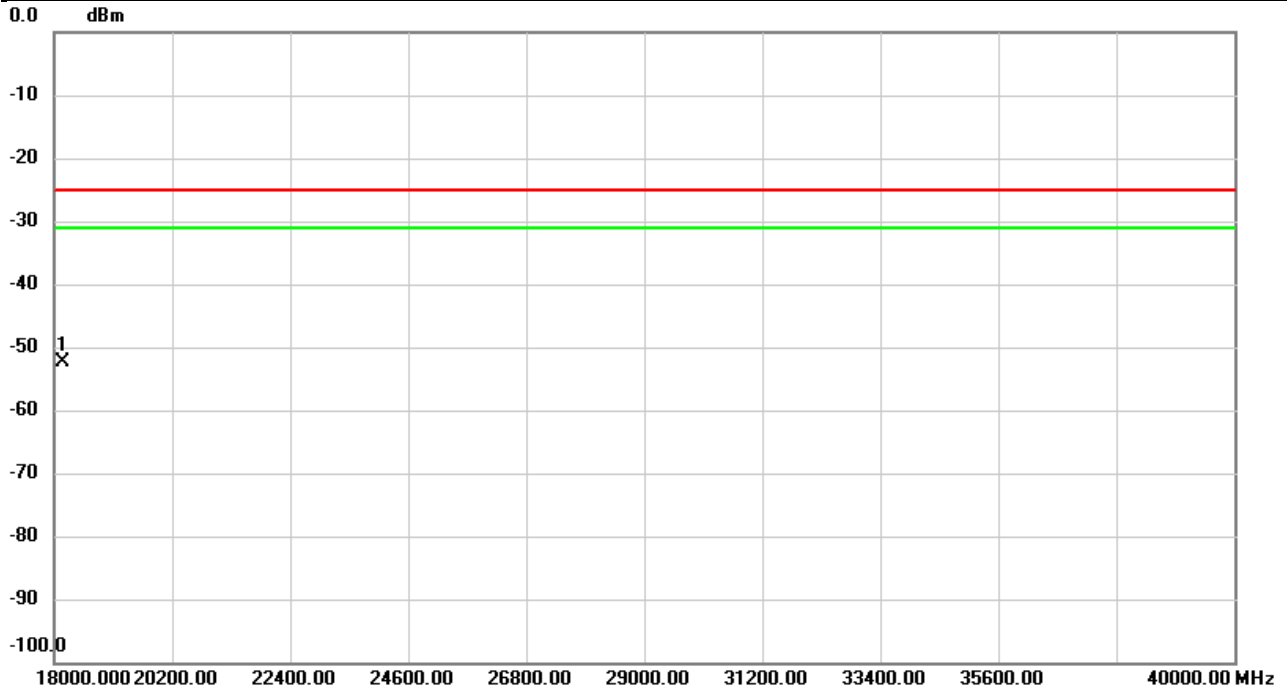


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	18165.00	-54.24	1.90	-52.34	-25.00	-27.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2026/1/21
Test Channel	CH518598	Polarization	Vertical
Temp	23°C	Hum.	67%

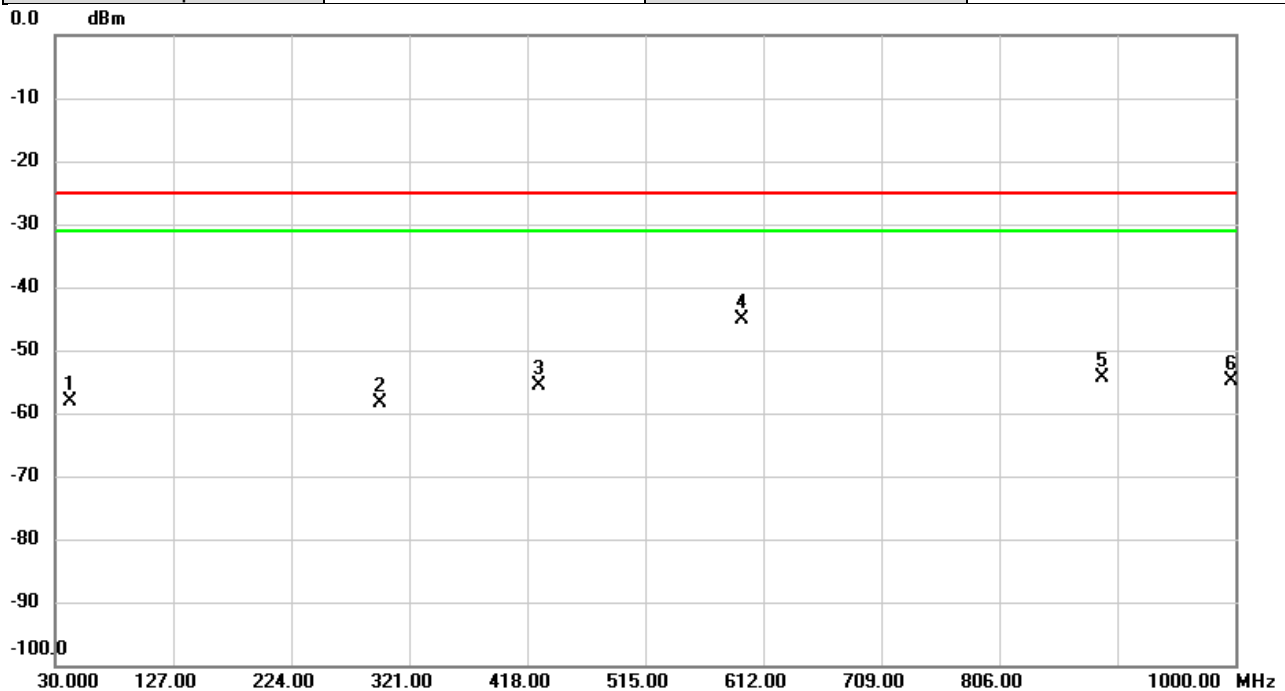


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		41.8017	-50.70	-7.45	-58.15	-25.00	-33.15	peak	
2		297.0087	-55.09	-3.35	-58.44	-25.00	-33.44	peak	
3		427.1180	-53.85	-1.76	-55.61	-25.00	-30.61	peak	
4	*	594.0227	-48.35	3.22	-45.13	-25.00	-20.13	peak	
5		891.0043	-60.68	6.39	-54.29	-25.00	-29.29	peak	
6		996.9930	-62.25	7.38	-54.87	-25.00	-29.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2026/1/21
Test Channel	CH518598	Polarization	Horizontal
Temp	23°C	Hum.	67%

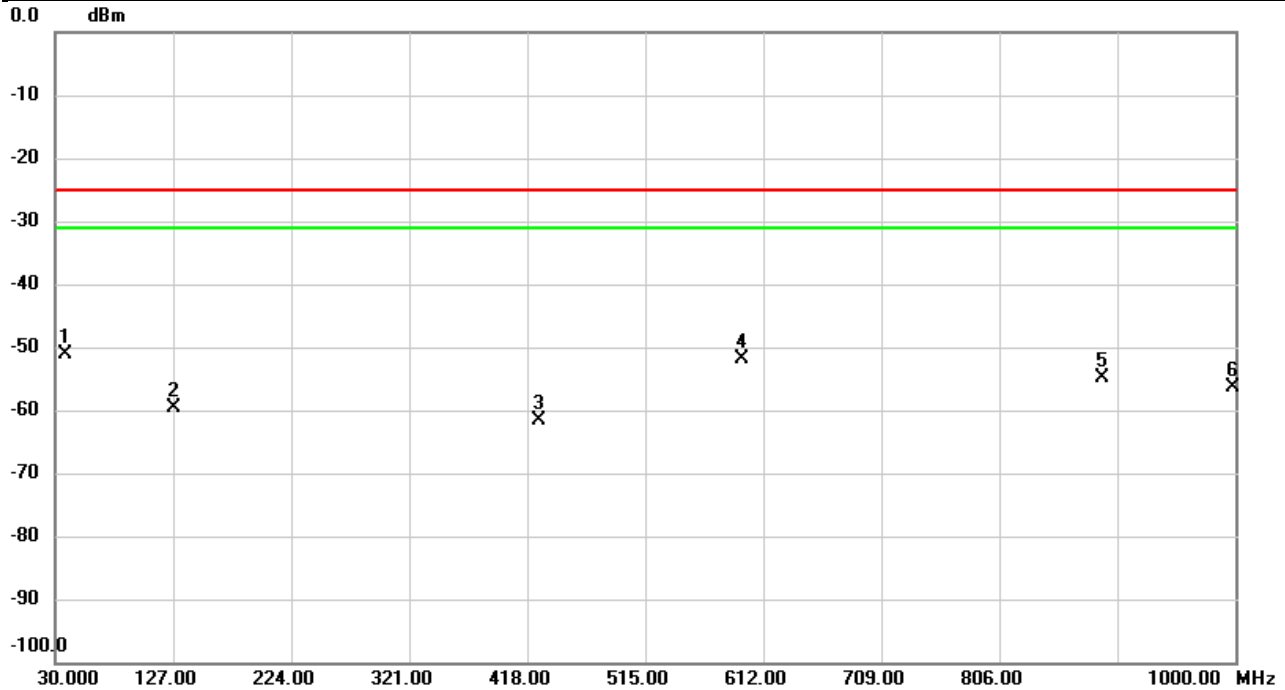


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	37.8246	-53.29	2.13	-51.16	-25.00	-26.16	peak	
2		128.0670	-52.79	-6.74	-59.53	-25.00	-34.53	peak	
3		427.5060	-59.40	-2.18	-61.58	-25.00	-36.58	peak	
4		594.0226	-52.06	0.12	-51.94	-25.00	-26.94	peak	
5		891.0043	-59.68	4.74	-54.94	-25.00	-29.94	peak	
6		997.6720	-62.56	6.15	-56.41	-25.00	-31.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2026/1/20
Test Channel	CH509202	Polarization	Vertical
Temp	25°C	Hum.	64%

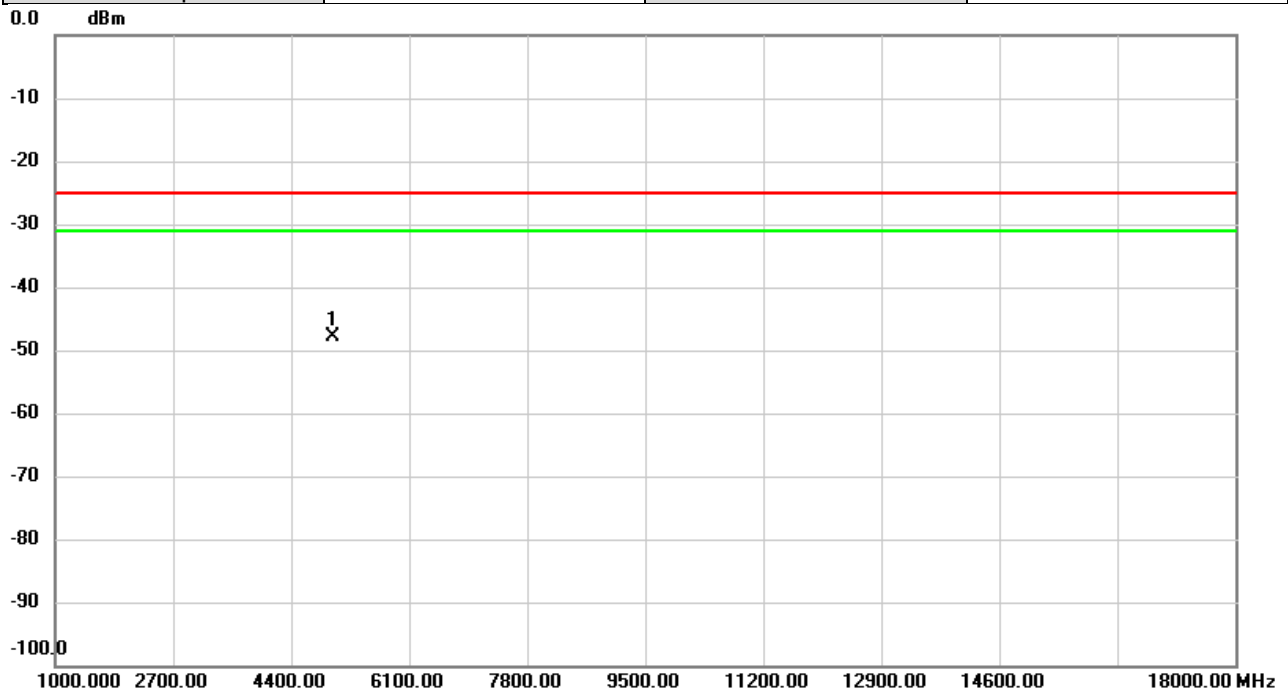


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	4994.020	-61.41	13.55	-47.86	-25.00	-22.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2026/1/20
Test Channel	CH509202	Polarization	Horizontal
Temp	25°C	Hum.	64%

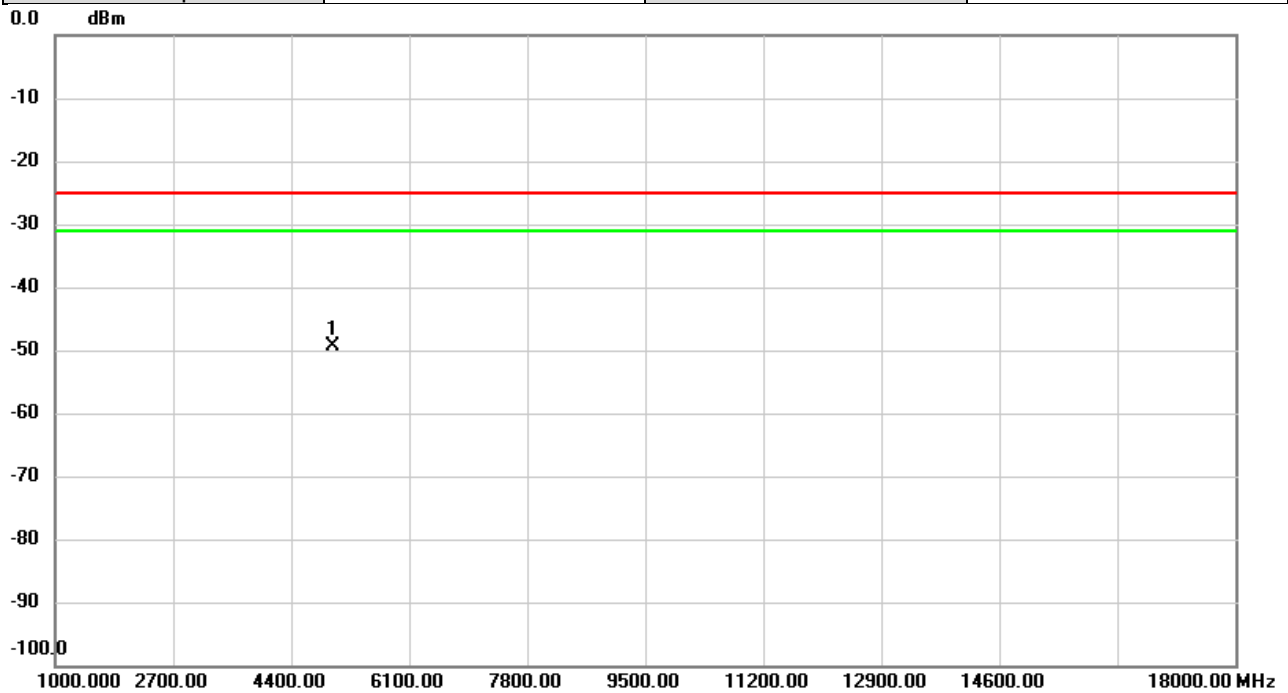


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	4994.020	-62.66	13.29	-49.37	-25.00	-24.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2026/1/20
Test Channel	CH518598	Polarization	Vertical
Temp	25°C	Hum.	64%

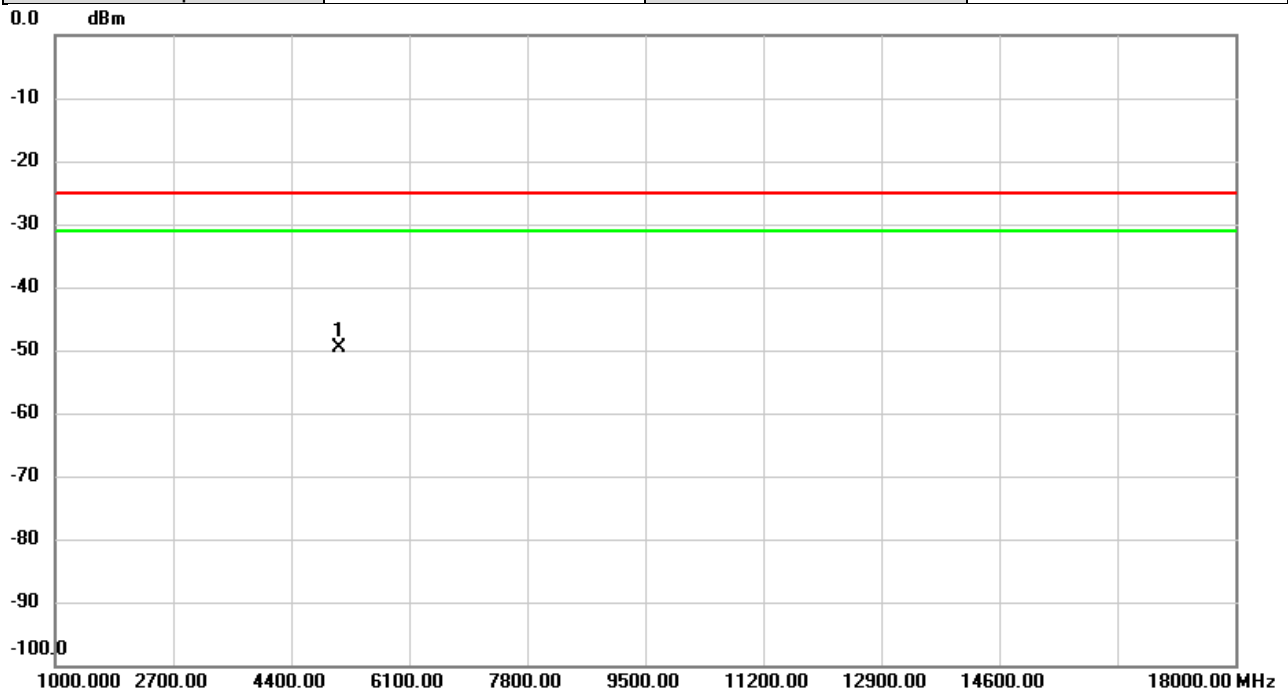


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5087.980	-63.59	14.04	-49.55	-25.00	-24.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2026/1/20
Test Channel	CH518598	Polarization	Horizontal
Temp	25°C	Hum.	64%

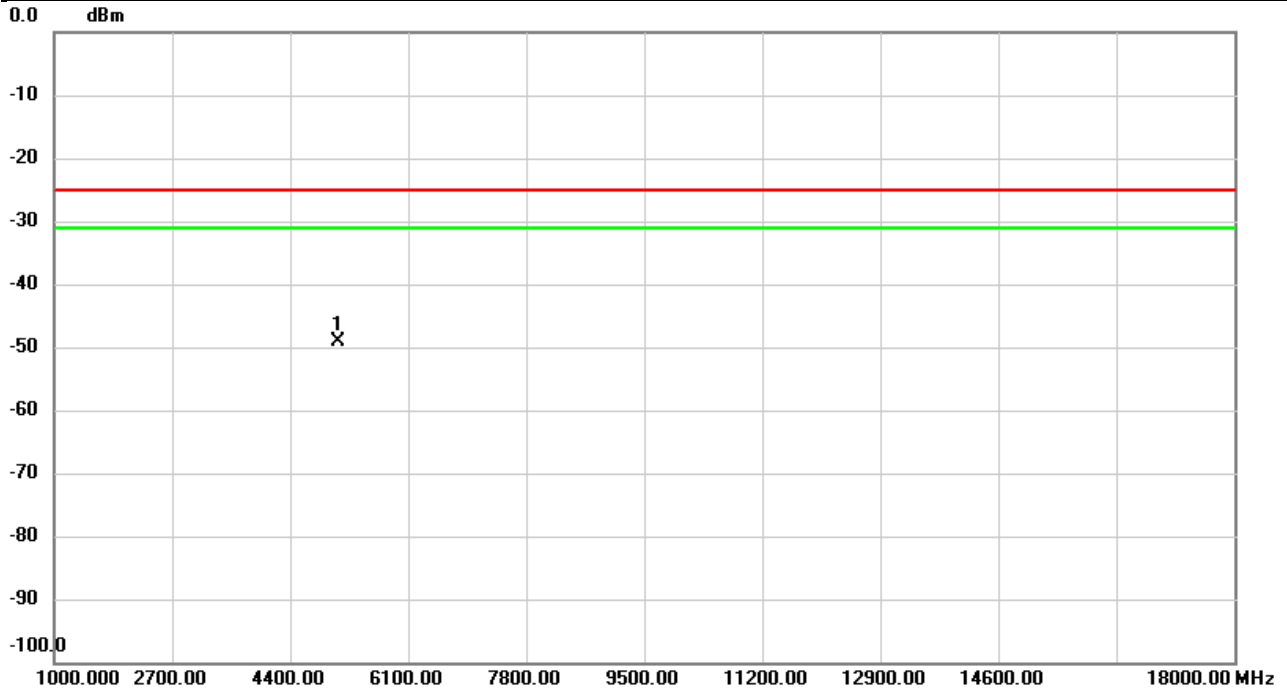


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5087.980	-62.94	13.85	-49.09	-25.00	-24.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2026/1/20
Test Channel	CH528000	Polarization	Vertical
Temp	25°C	Hum.	64%

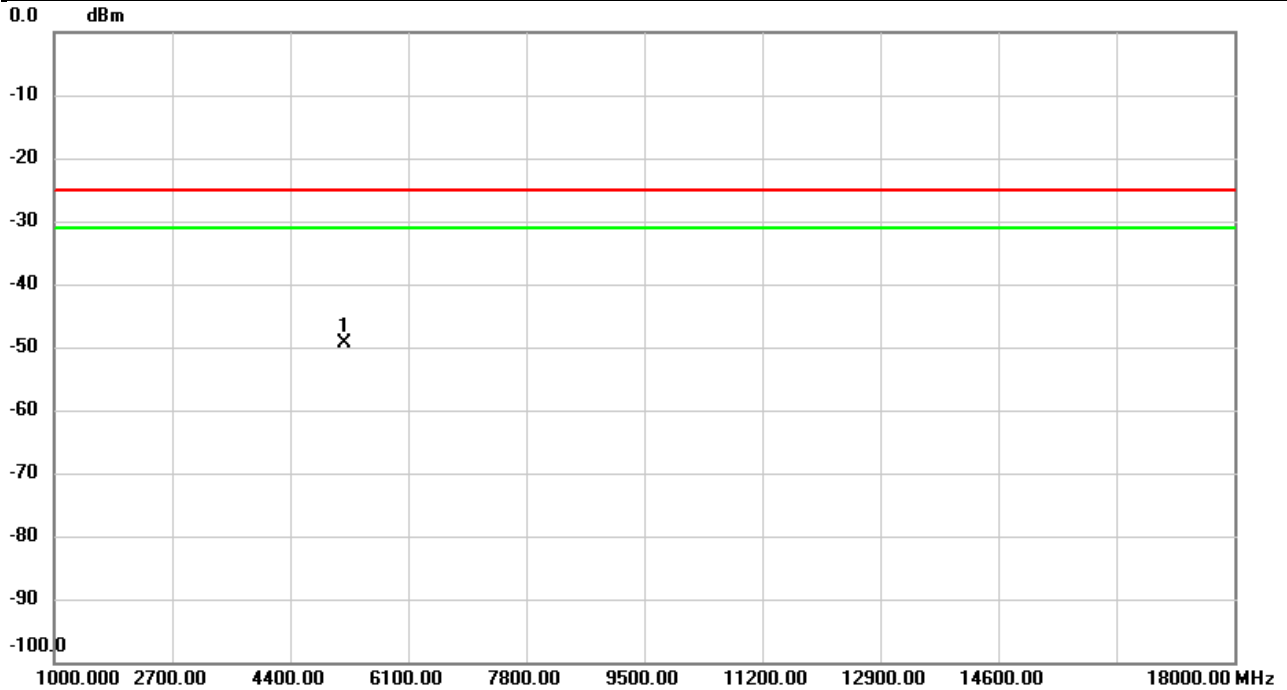


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5182.000	-63.08	13.59	-49.49	-25.00	-24.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2026/1/20
Test Channel	CH528000	Polarization	Horizontal
Temp	25°C	Hum.	64%

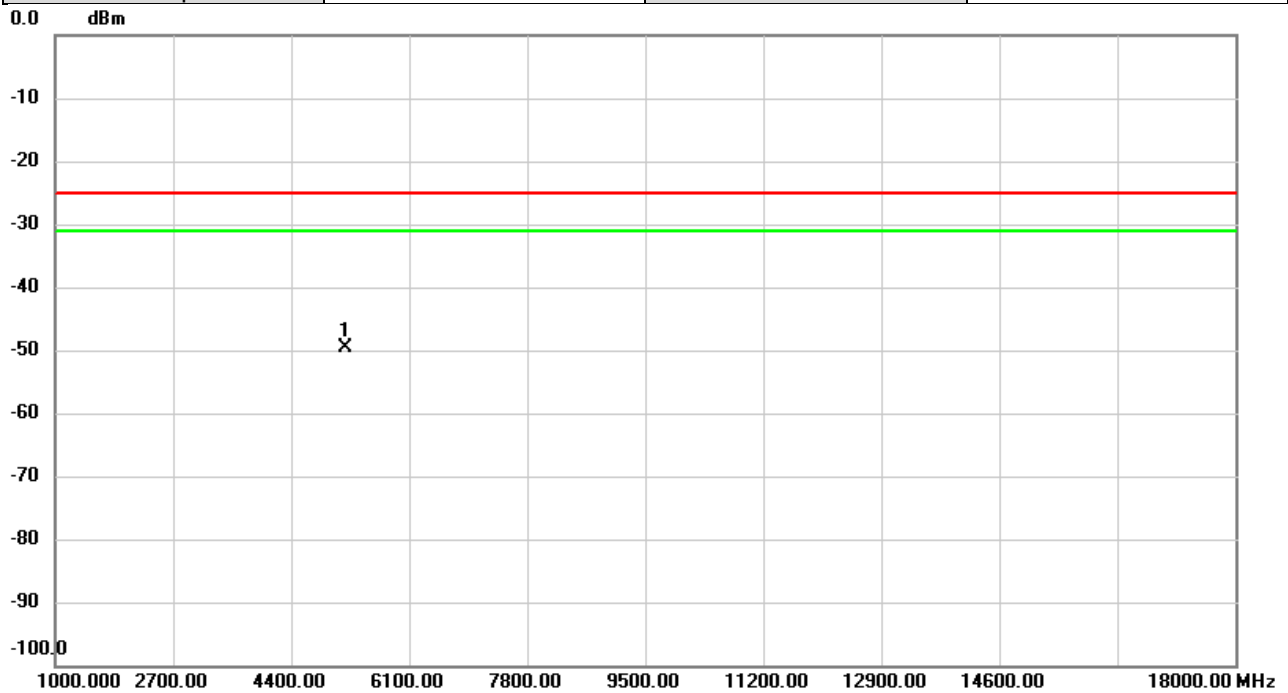


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5182.000	-63.19	13.58	-49.61	-25.00	-24.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2026/1/20
Test Channel	CH518598	Polarization	Vertical
Temp	25°C	Hum.	64%

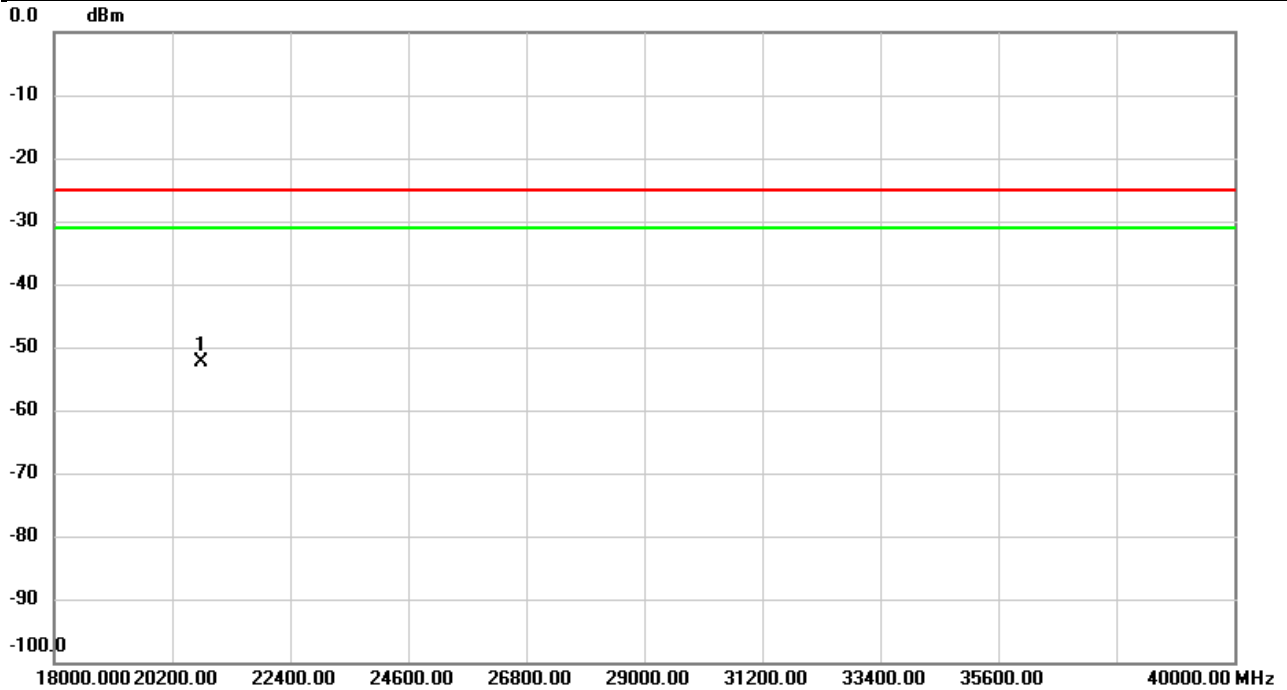


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	20743.00	-54.59	2.32	-52.27	-25.00	-27.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n41 HPUE	Test Date	2026/1/20
Test Channel	CH518598	Polarization	Horizontal
Temp	25°C	Hum.	64%

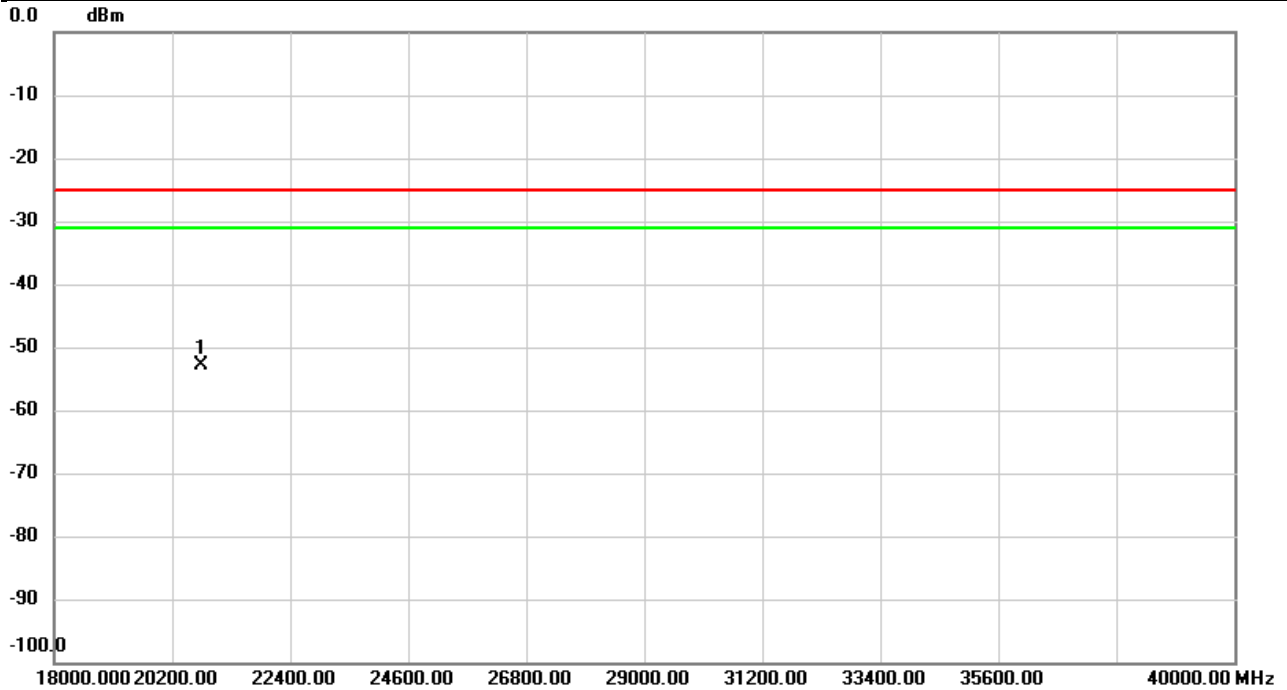


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	20743.00	-54.04	1.28	-52.76	-25.00	-27.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2026/1/21
Test Channel	CH633334	Polarization	Vertical
Temp	23°C	Hum.	67%

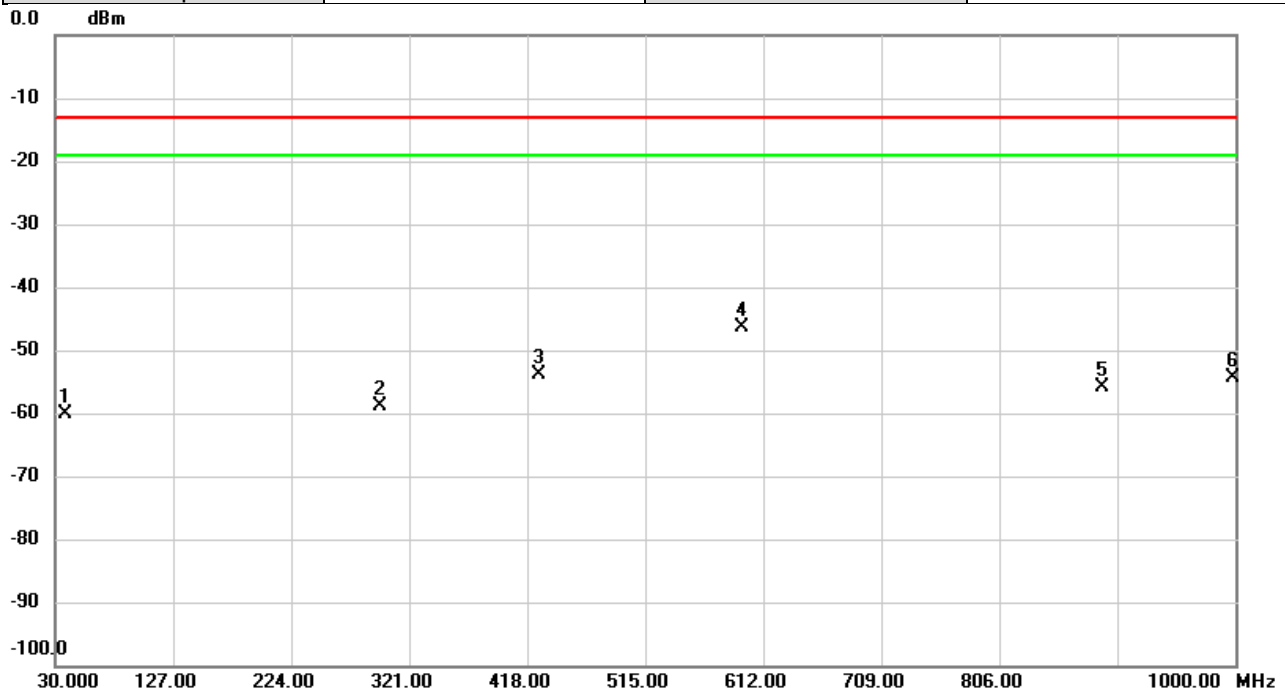


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		38.2450	-51.40	-8.83	-60.23	-13.00	-47.23	peak	
2		297.0086	-55.44	-3.35	-58.79	-13.00	-45.79	peak	
3		427.4736	-52.15	-1.75	-53.90	-13.00	-40.90	peak	
4	*	594.0226	-49.56	3.22	-46.34	-13.00	-33.34	peak	
5		891.0043	-62.18	6.39	-55.79	-13.00	-42.79	peak	
6		997.6396	-61.75	7.39	-54.36	-13.00	-41.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2026/1/21
Test Channel	CH633334	Polarization	Horizontal
Temp	23°C	Hum.	67%

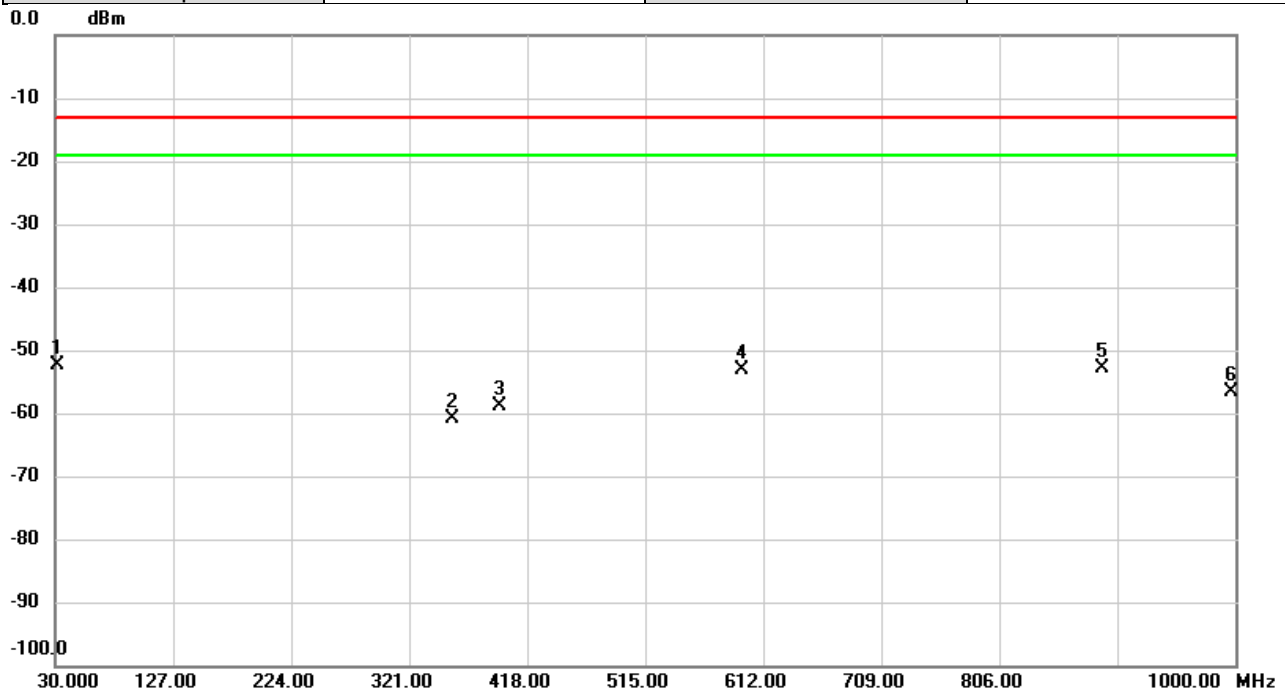


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	32.3926	-55.03	2.71	-52.32	-13.00	-39.32	peak	
2		356.1140	-58.34	-2.54	-60.88	-13.00	-47.88	peak	
3		396.0133	-56.44	-2.50	-58.94	-13.00	-45.94	peak	
4		593.9256	-53.29	0.12	-53.17	-13.00	-40.17	peak	
5		891.0042	-57.72	4.74	-52.98	-13.00	-39.98	peak	
6		997.1545	-62.76	6.15	-56.61	-13.00	-43.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2026/1/20
Test Channel	CH633334	Polarization	Vertical
Temp	25°C	Hum.	64%

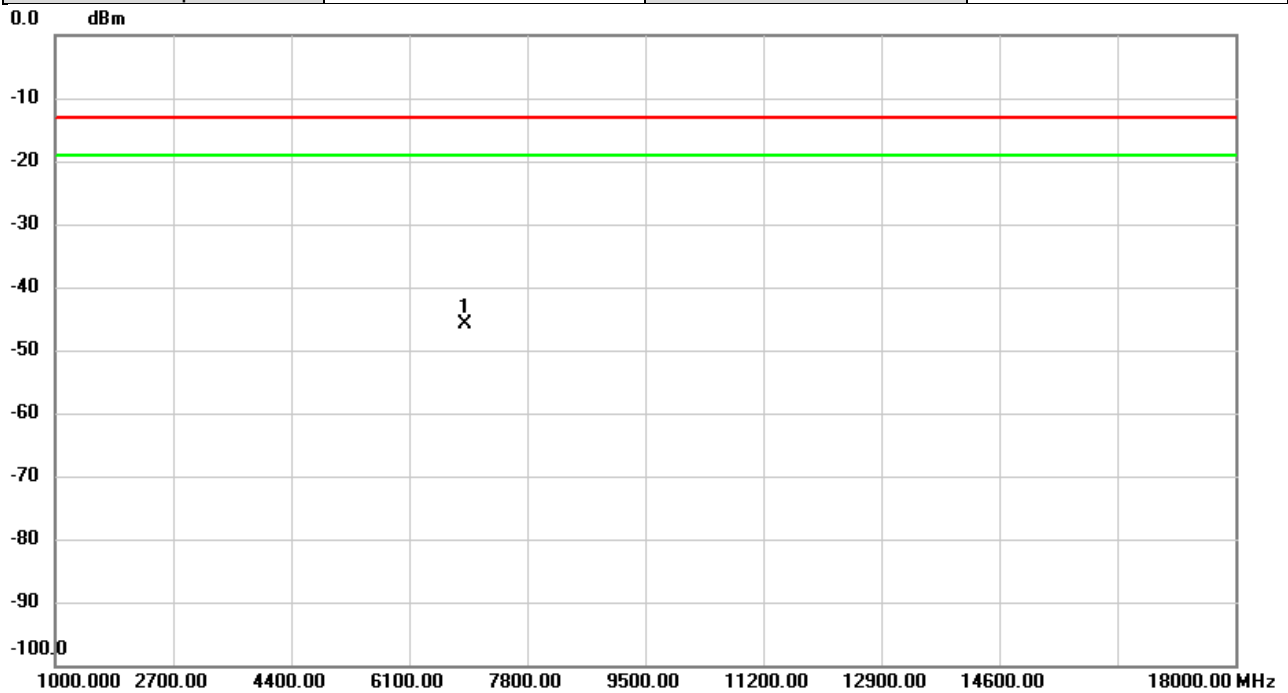


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6902.020	-63.86	17.99	-45.87	-13.00	-32.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2026/1/20
Test Channel	CH633334	Polarization	Horizontal
Temp	25°C	Hum.	64%

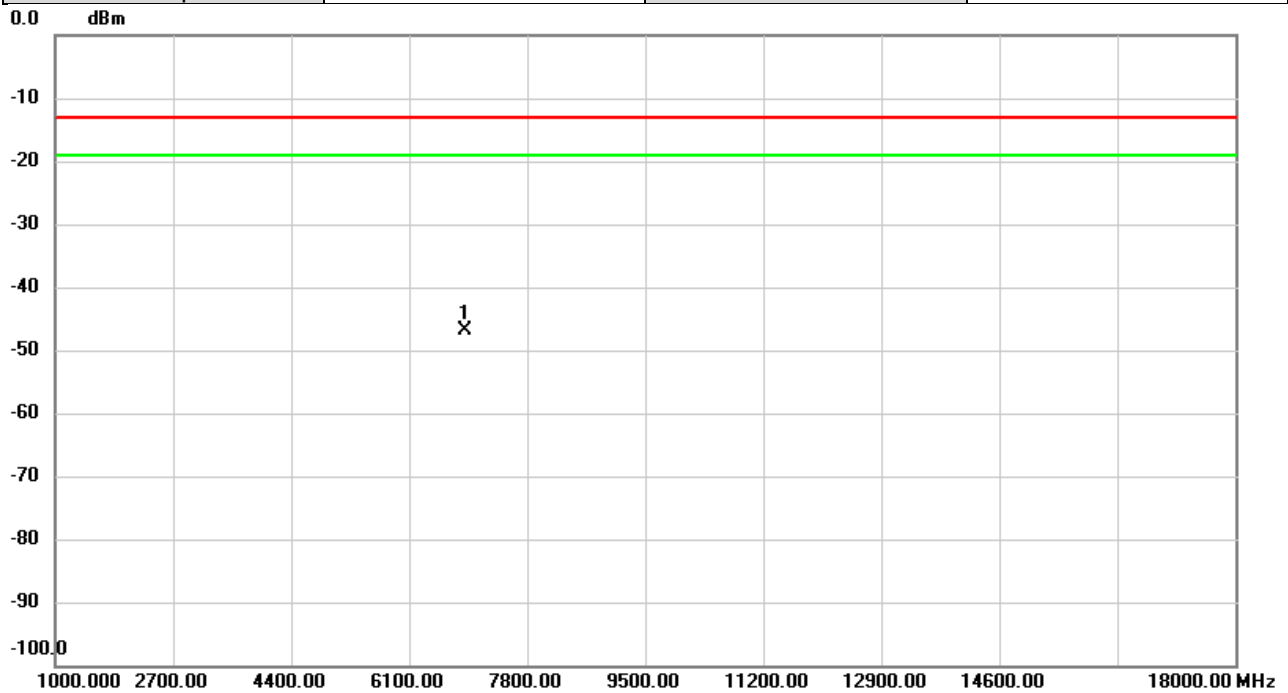


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6902.020	-64.67	17.82	-46.85	-13.00	-33.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2026/1/20
Test Channel	CH633334	Polarization	Vertical
Temp	25°C	Hum.	64%

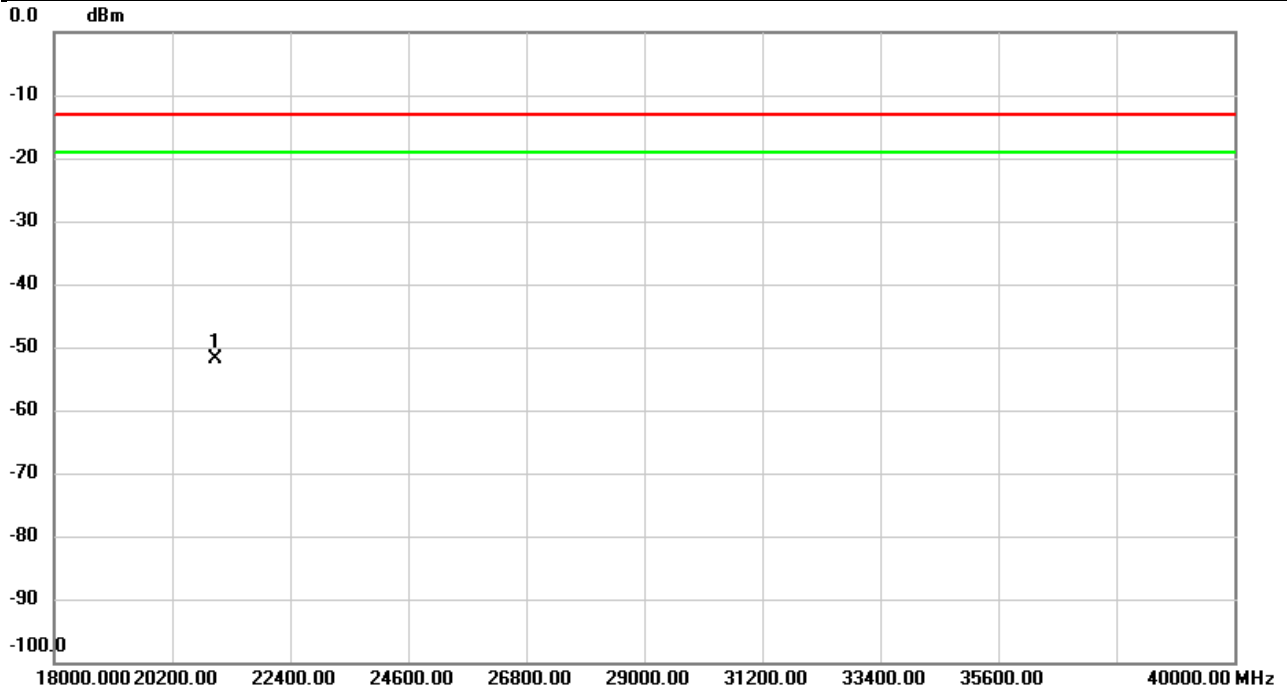


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	21000.00	-54.51	2.67	-51.84	-13.00	-38.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2026/1/20
Test Channel	CH633334	Polarization	Horizontal
Temp	25°C	Hum.	64%

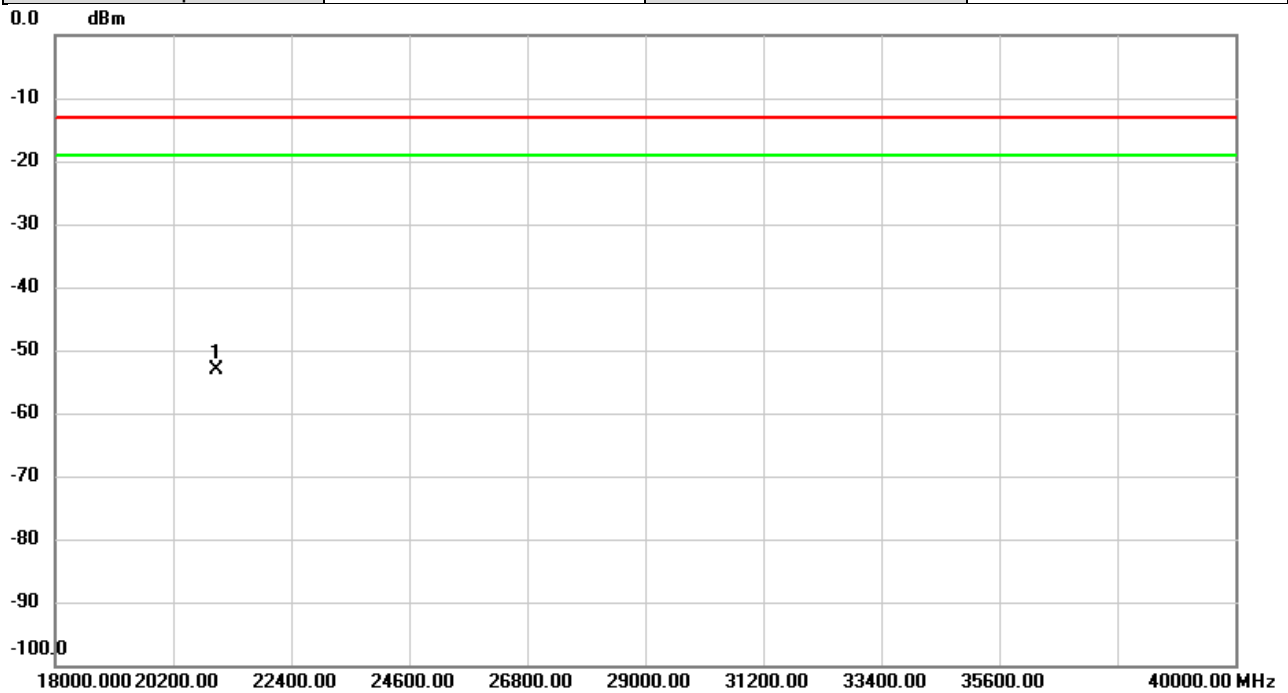


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	21000.00	-54.80	1.63	-53.17	-13.00	-40.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2026/1/21
Test Channel	CH656000	Polarization	Vertical
Temp	23°C	Hum.	67%

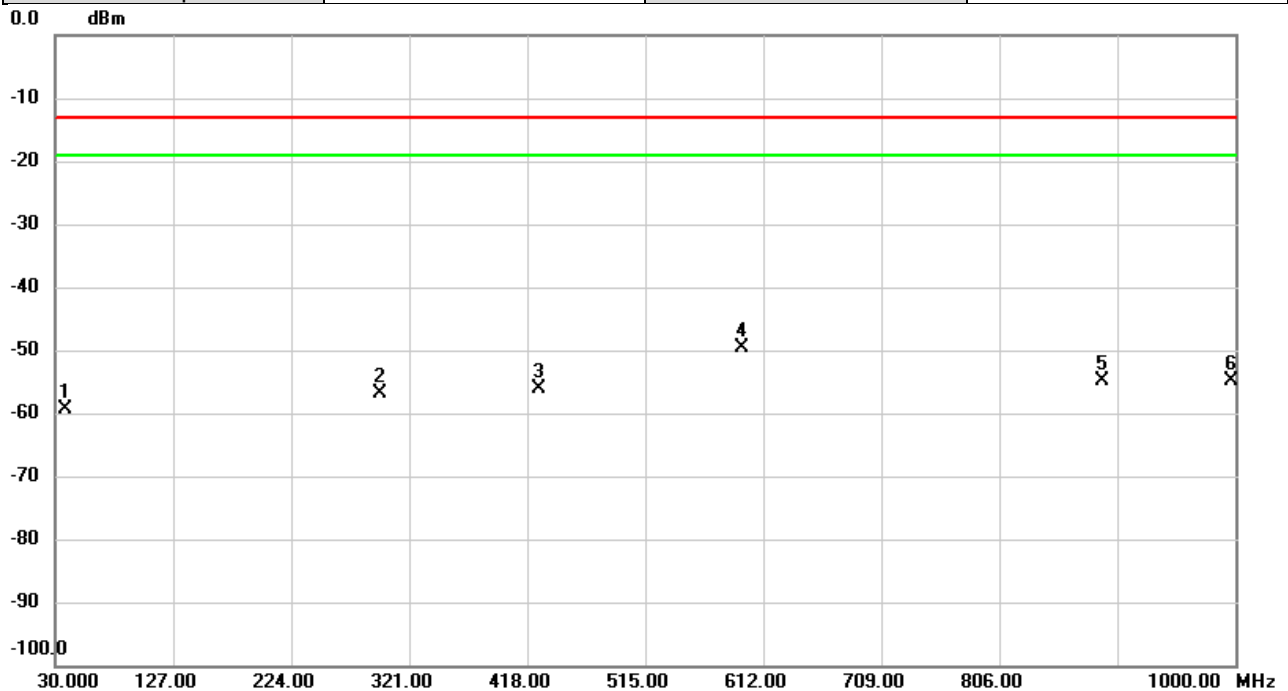


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		38.2450	-50.44	-8.83	-59.27	-13.00	-46.27	peak	
2		297.0086	-53.58	-3.35	-56.93	-13.00	-43.93	peak	
3		427.6352	-54.37	-1.75	-56.12	-13.00	-43.12	peak	
4	*	594.0226	-52.91	3.22	-49.69	-13.00	-36.69	peak	
5		891.0366	-61.35	6.39	-54.96	-13.00	-41.96	peak	
6		997.0575	-62.30	7.38	-54.92	-13.00	-41.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2026/1/21
Test Channel	CH656000	Polarization	Horizontal
Temp	23°C	Hum.	67%

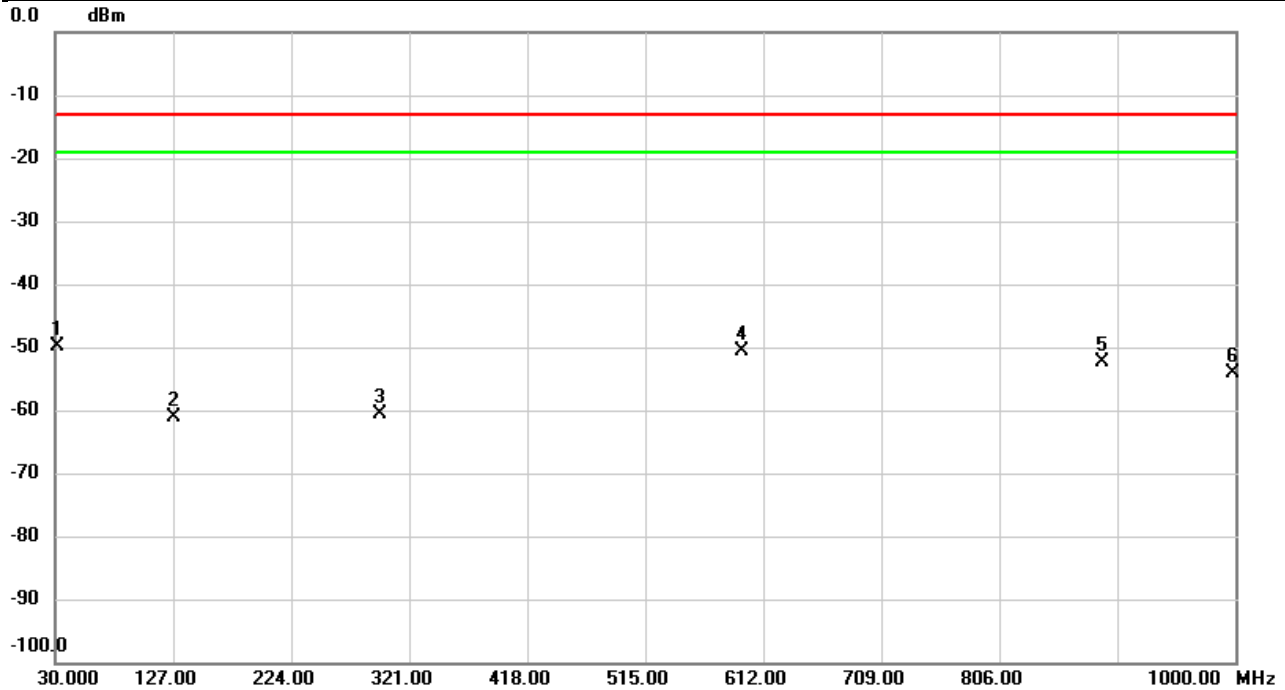


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	32.1015	-52.58	2.75	-49.83	-13.00	-36.83	peak	
2		128.0670	-54.35	-6.74	-61.09	-13.00	-48.09	peak	
3		297.0086	-54.21	-6.31	-60.52	-13.00	-47.52	peak	
4		593.9903	-50.84	0.12	-50.72	-13.00	-37.72	peak	
5		891.0041	-57.06	4.74	-52.32	-13.00	-39.32	peak	
6		997.7042	-60.19	6.16	-54.03	-13.00	-41.03	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2026/1/20
Test Channel	CH650000	Polarization	Vertical
Temp	25°C	Hum.	64%

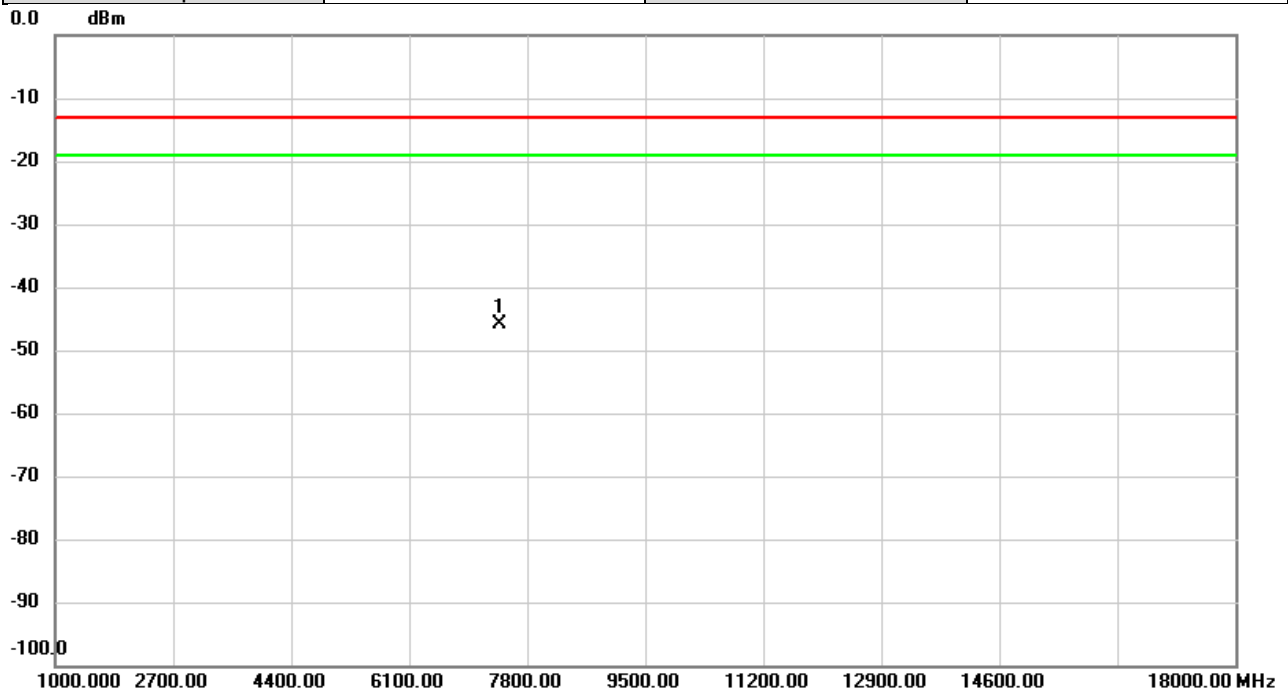


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7402.000	-63.96	18.06	-45.90	-13.00	-32.90	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2026/1/20
Test Channel	CH650000	Polarization	Horizontal
Temp	25°C	Hum.	64%

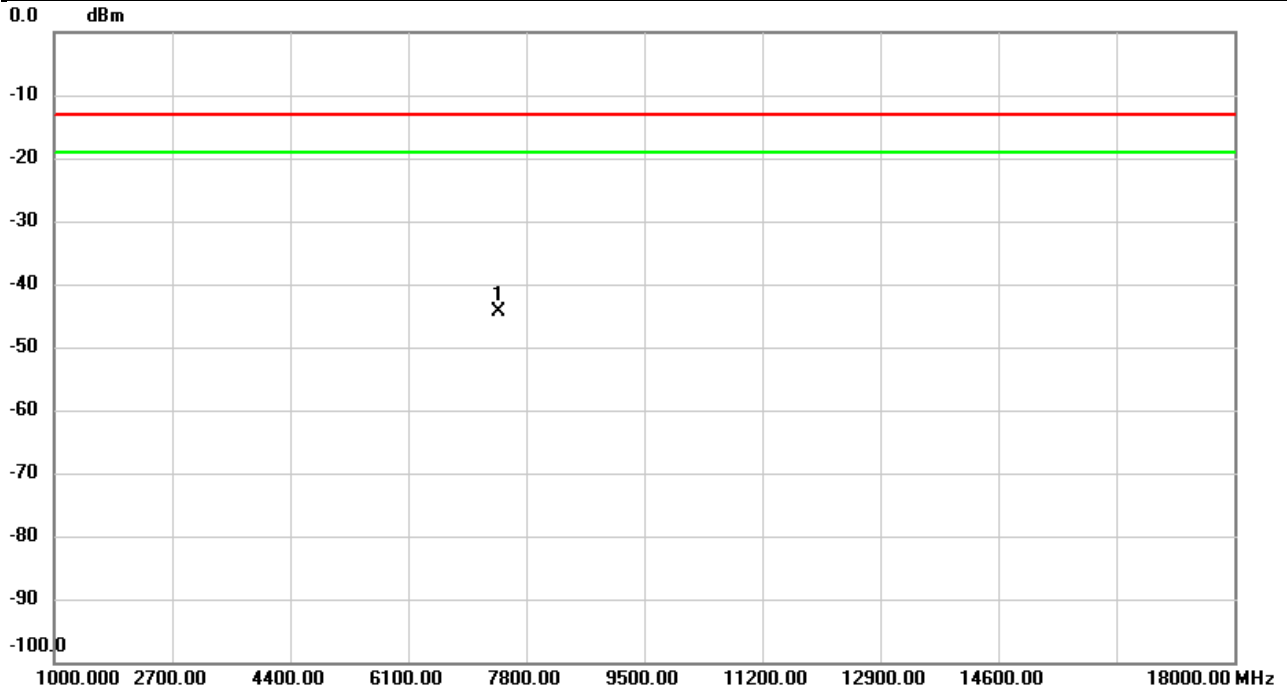


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7402.000	-62.56	18.11	-44.45	-13.00	-31.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2026/1/20
Test Channel	CH656000	Polarization	Vertical
Temp	25°C	Hum.	64%

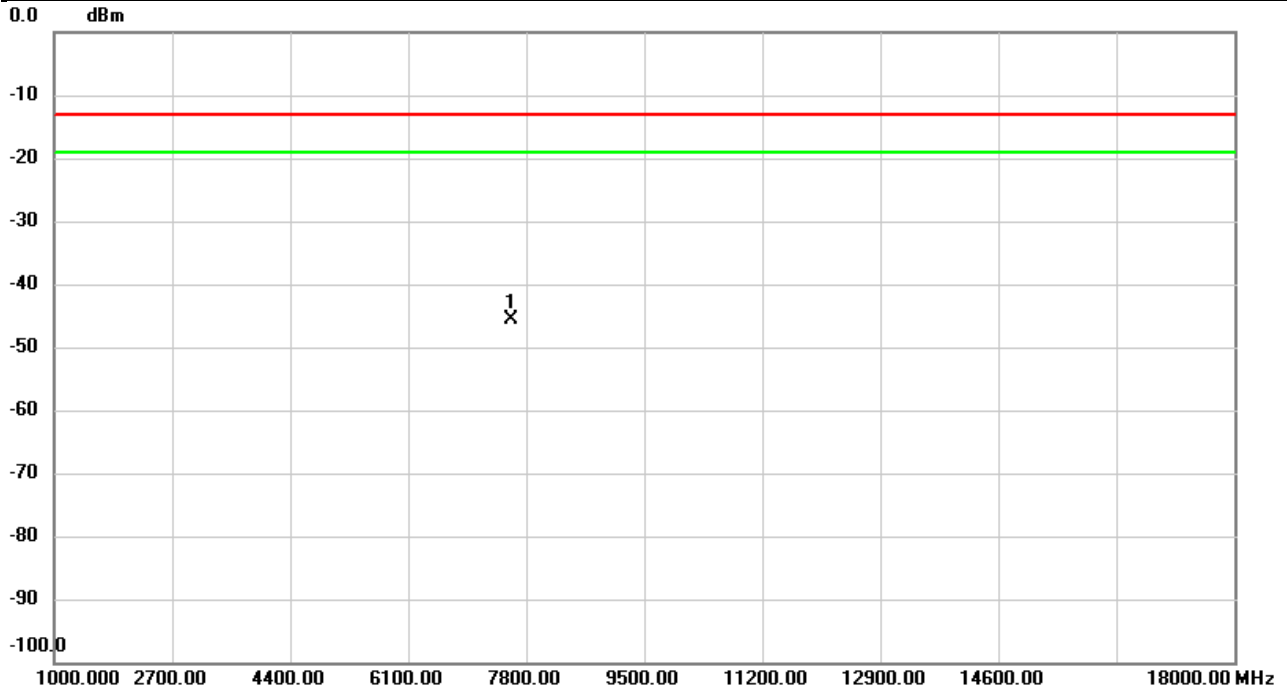


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7582.000	-62.98	17.24	-45.74	-13.00	-32.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2026/1/20
Test Channel	CH656000	Polarization	Horizontal
Temp	25°C	Hum.	64%

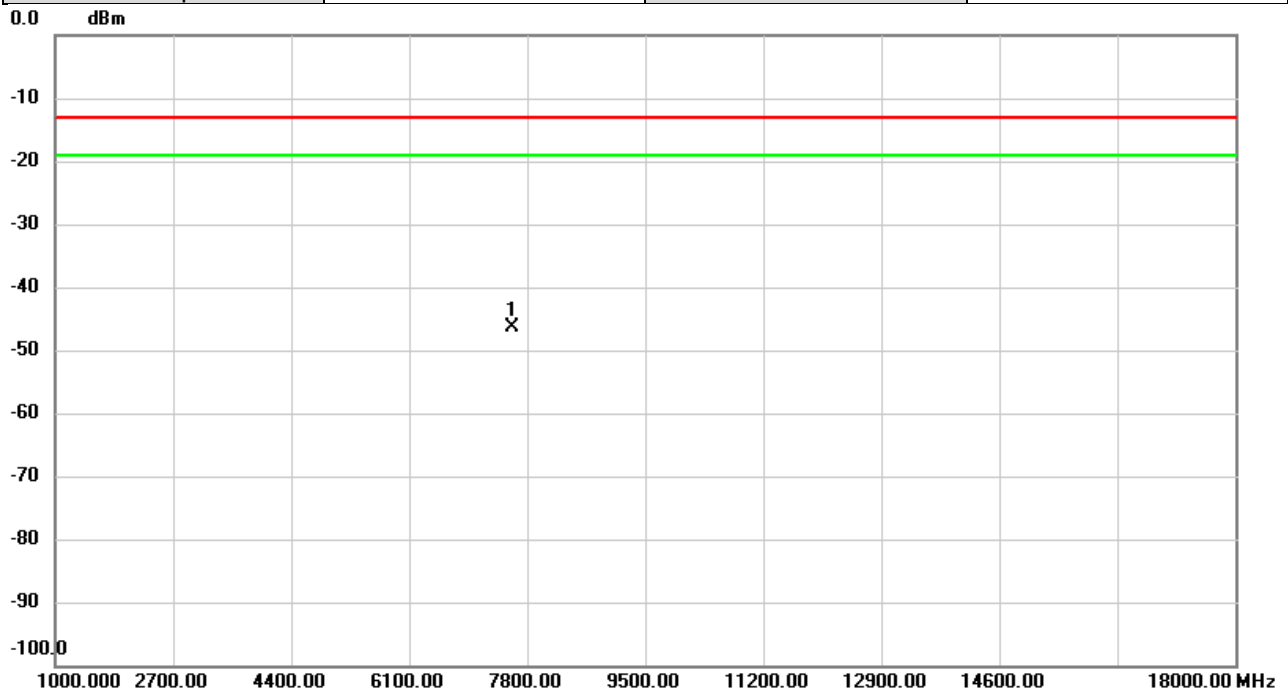


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7582.000	-63.56	17.28	-46.28	-13.00	-33.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2026/1/20
Test Channel	CH662000	Polarization	Vertical
Temp	25°C	Hum.	64%

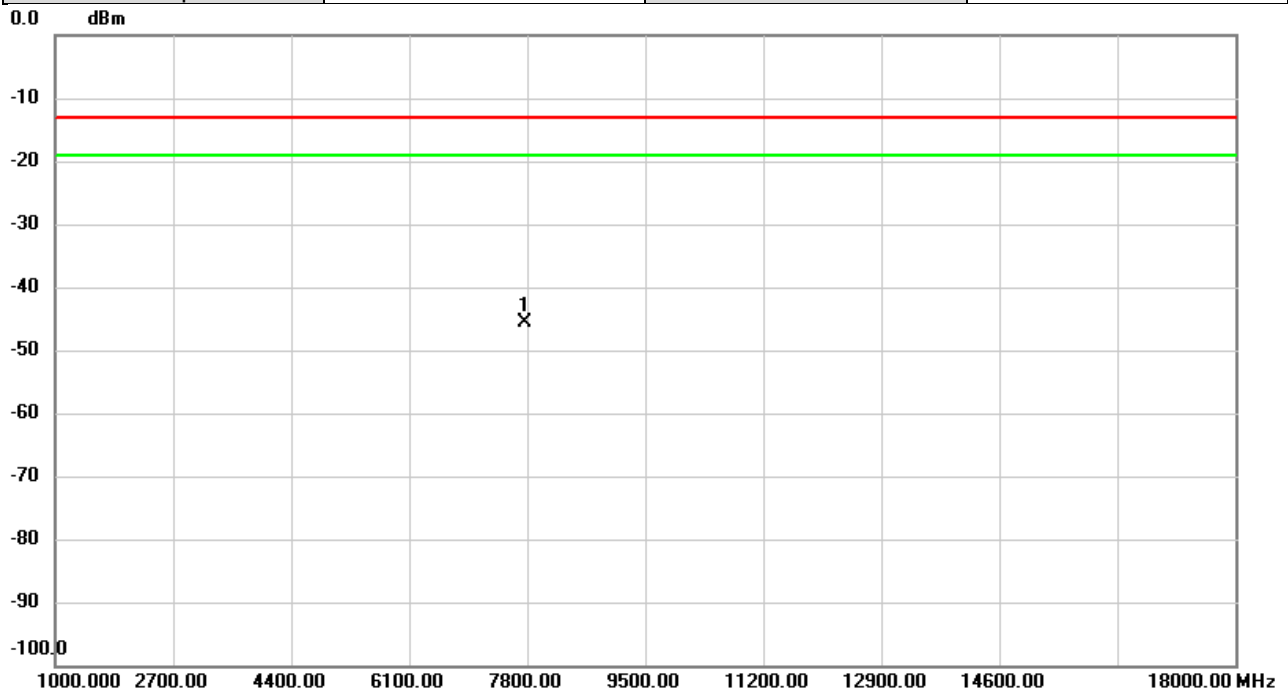


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7762.000	-62.99	17.37	-45.62	-13.00	-32.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2026/1/20
Test Channel	CH662000	Polarization	Horizontal
Temp	25°C	Hum.	64%

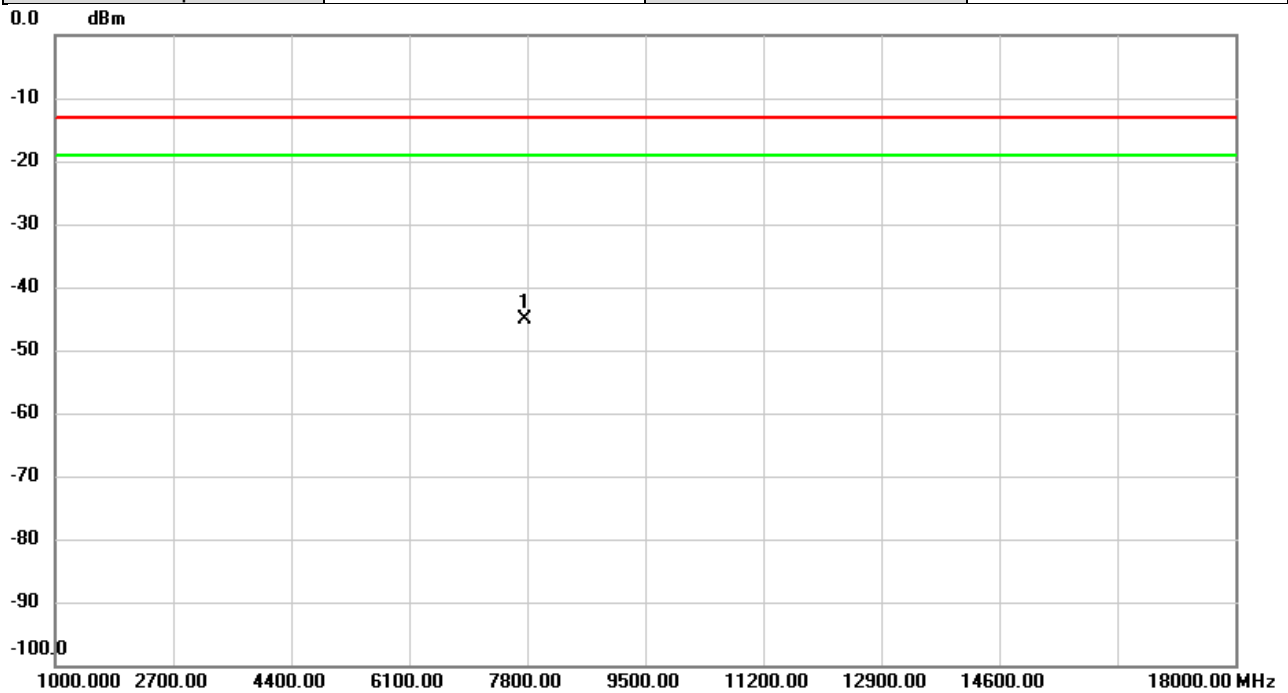


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7762.000	-62.60	17.43	-45.17	-13.00	-32.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2026/1/20
Test Channel	CH656000	Polarization	Vertical
Temp	25°C	Hum.	64%

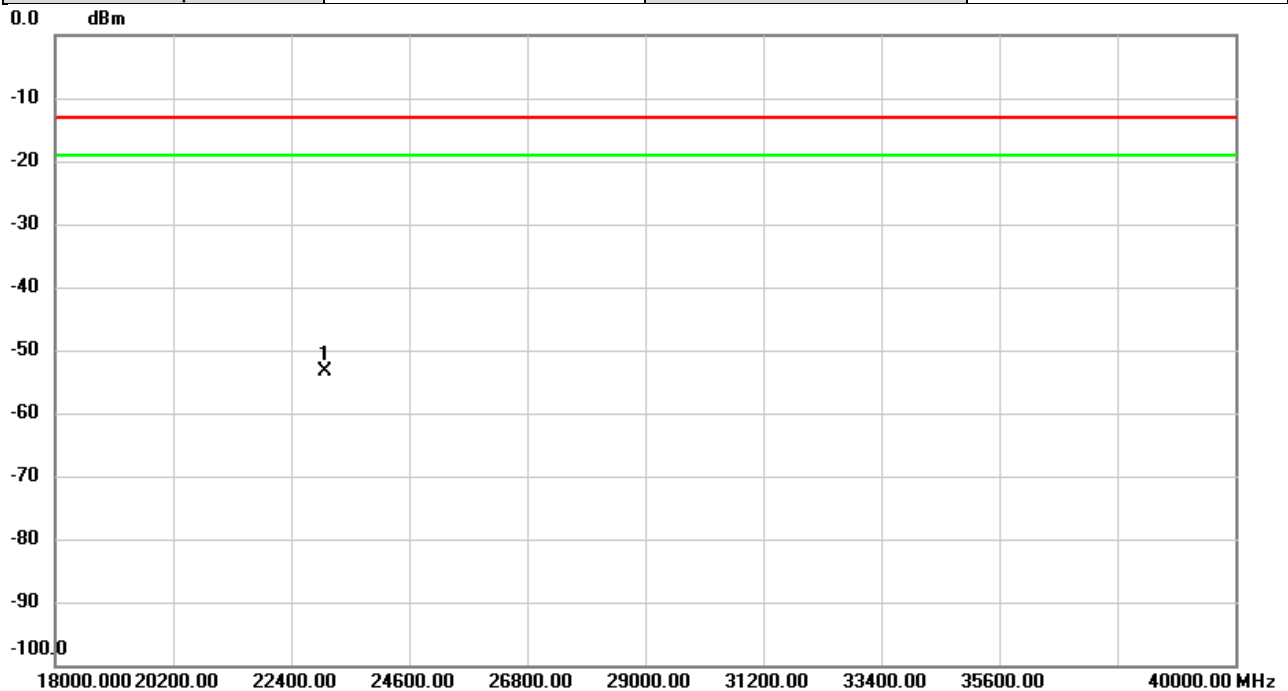


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	23040.00	-57.40	4.04	-53.36	-13.00	-40.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n77 HPUE	Test Date	2026/1/20
Test Channel	CH656000	Polarization	Horizontal
Temp	25°C	Hum.	64%

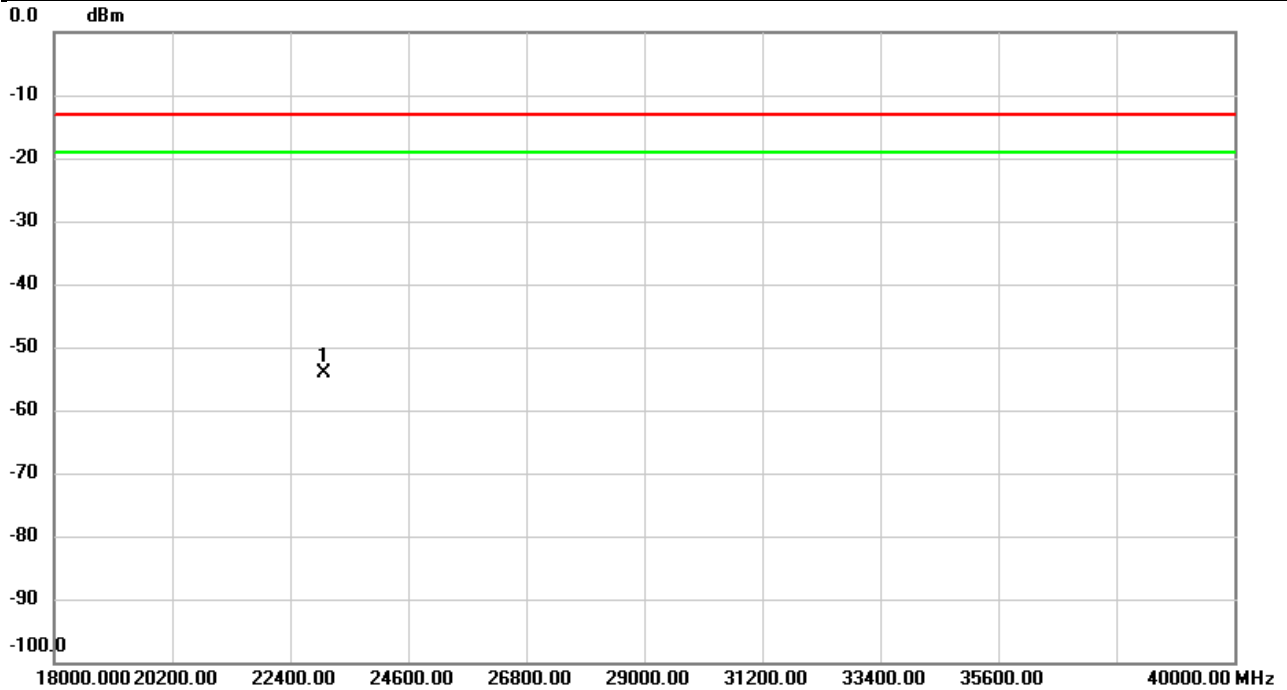


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	23040.00	-57.10	2.99	-54.11	-13.00	-41.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2026/1/21
Test Channel	CH633334	Polarization	Vertical
Temp	23°C	Hum.	67%

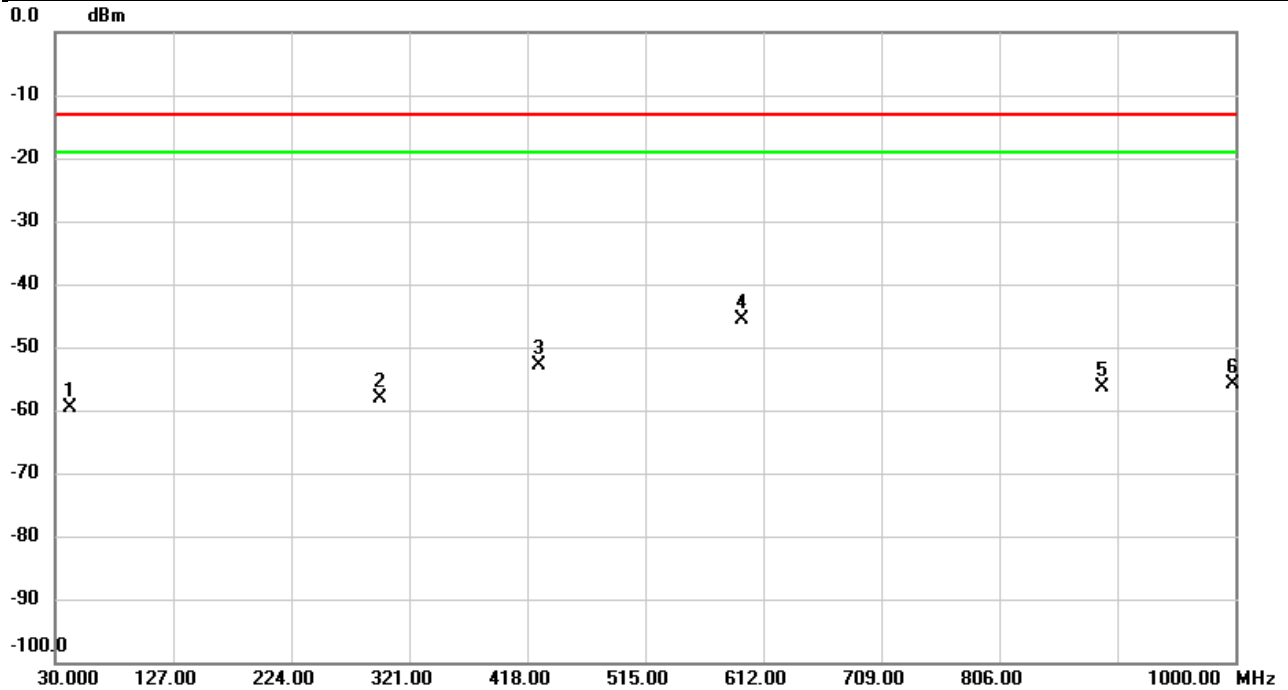


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		41.8340	-52.16	-7.44	-59.60	-13.00	-46.60	peak	
2		297.0087	-54.75	-3.35	-58.10	-13.00	-45.10	peak	
3		427.5383	-51.04	-1.75	-52.79	-13.00	-39.79	peak	
4	*	594.0227	-48.77	3.22	-45.55	-13.00	-32.55	peak	
5		890.9720	-62.80	6.38	-56.42	-13.00	-43.42	peak	
6		997.7043	-63.24	7.39	-55.85	-13.00	-42.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2026/1/21
Test Channel	CH633334	Polarization	Horizontal
Temp	23°C	Hum.	67%

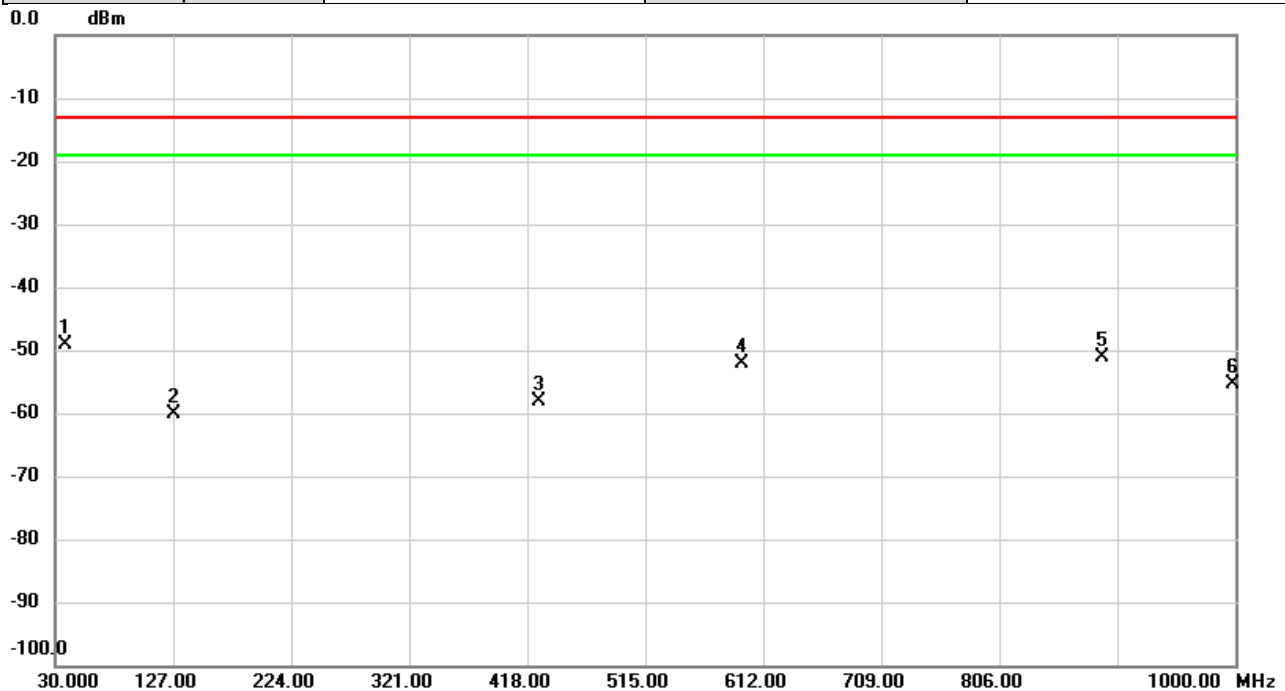


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	37.8570	-51.30	2.13	-49.17	-13.00	-36.17	peak	
2		127.4850	-53.38	-6.79	-60.17	-13.00	-47.17	peak	
3		427.5060	-56.02	-2.18	-58.20	-13.00	-45.20	peak	
4		593.9903	-52.21	0.12	-52.09	-13.00	-39.09	peak	
5		891.0043	-55.85	4.74	-51.11	-13.00	-38.11	peak	
6		997.8336	-61.53	6.16	-55.37	-13.00	-42.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2026/1/20
Test Channel	CH633334	Polarization	Vertical
Temp	25°C	Hum.	64%

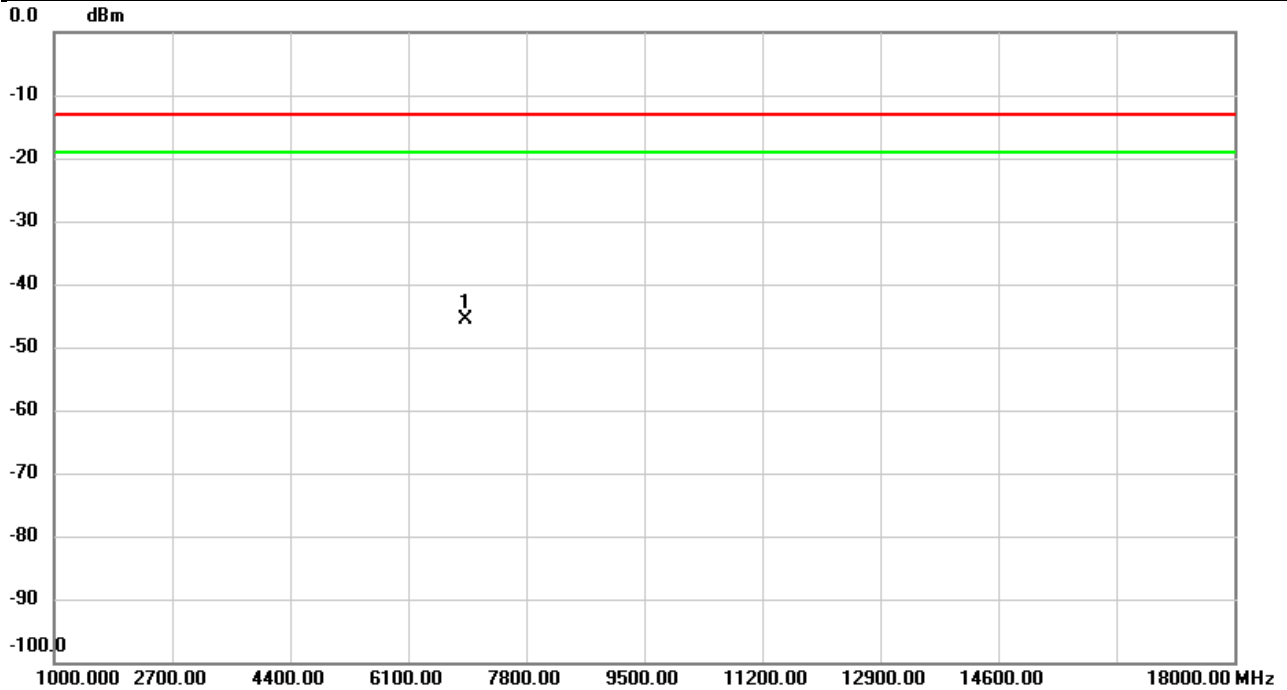


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6920.020	-64.00	18.30	-45.70	-13.00	-32.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2026/1/20
Test Channel	CH633334	Polarization	Horizontal
Temp	25°C	Hum.	64%

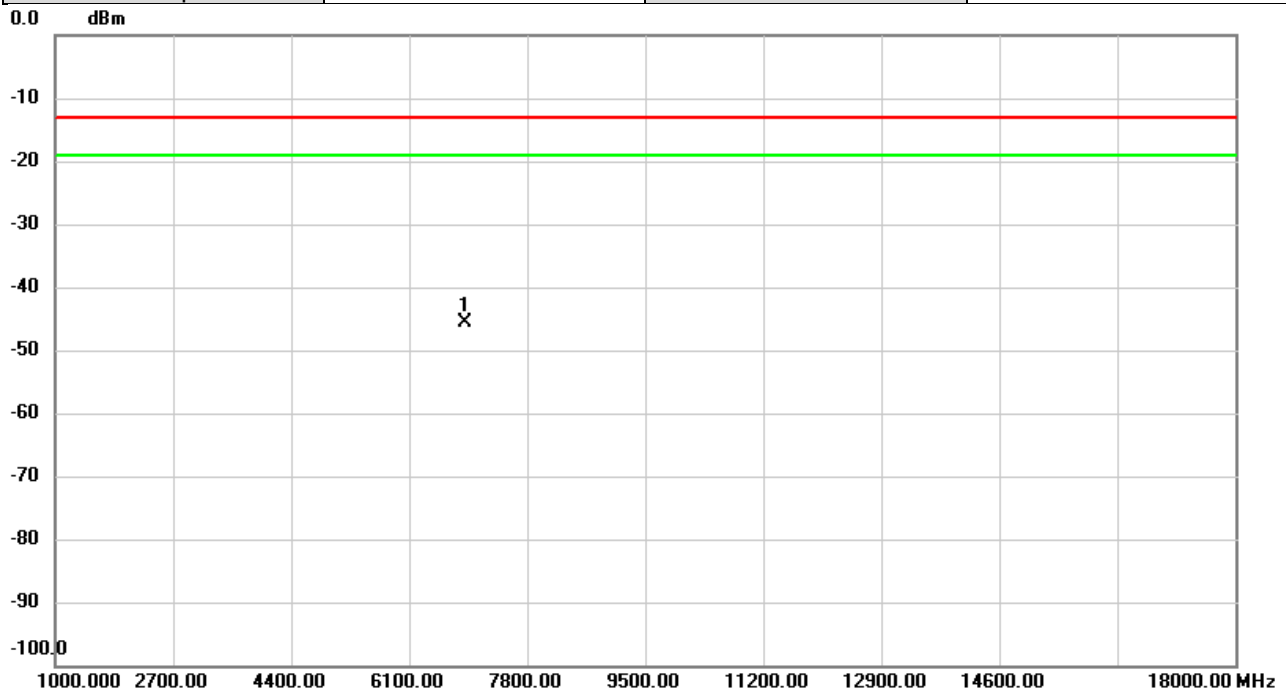


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6902.020	-63.42	17.82	-45.60	-13.00	-32.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2026/1/22
Test Channel	CH633334	Polarization	Vertical
Temp	22°C	Hum.	66%

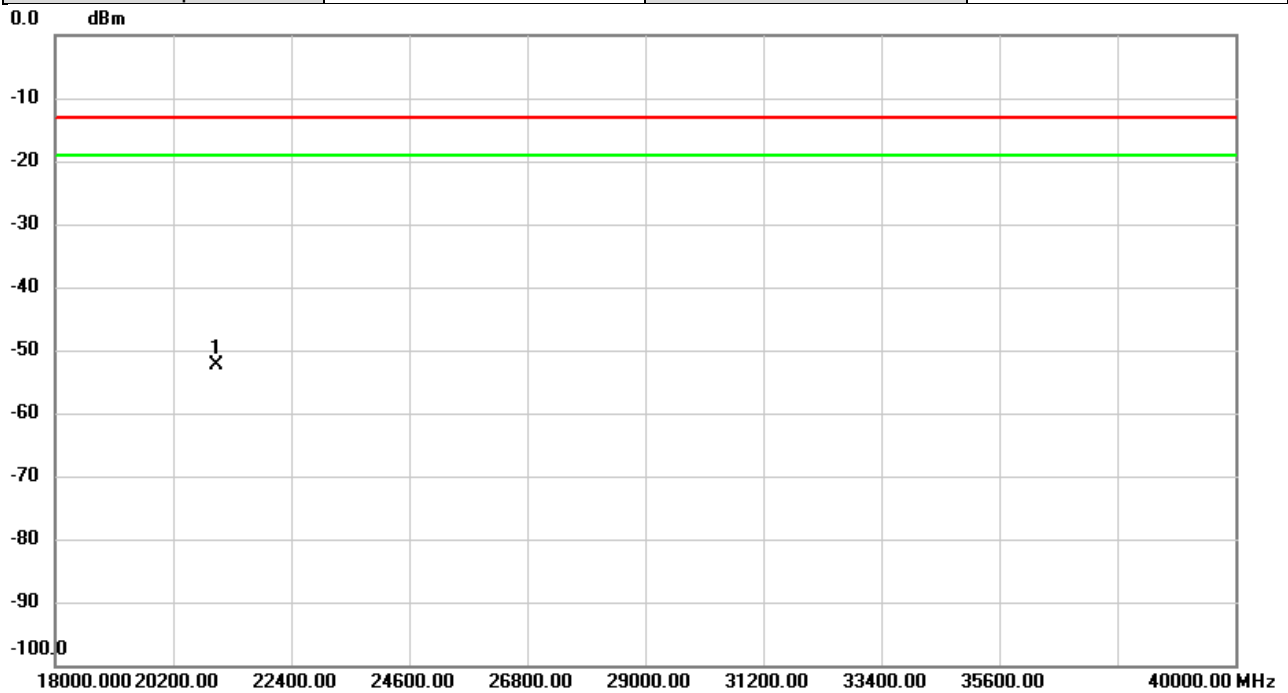


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	21000.00	-55.08	2.67	-52.41	-13.00	-39.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2026/1/22
Test Channel	CH633334	Polarization	Horizontal
Temp	22°C	Hum.	66%

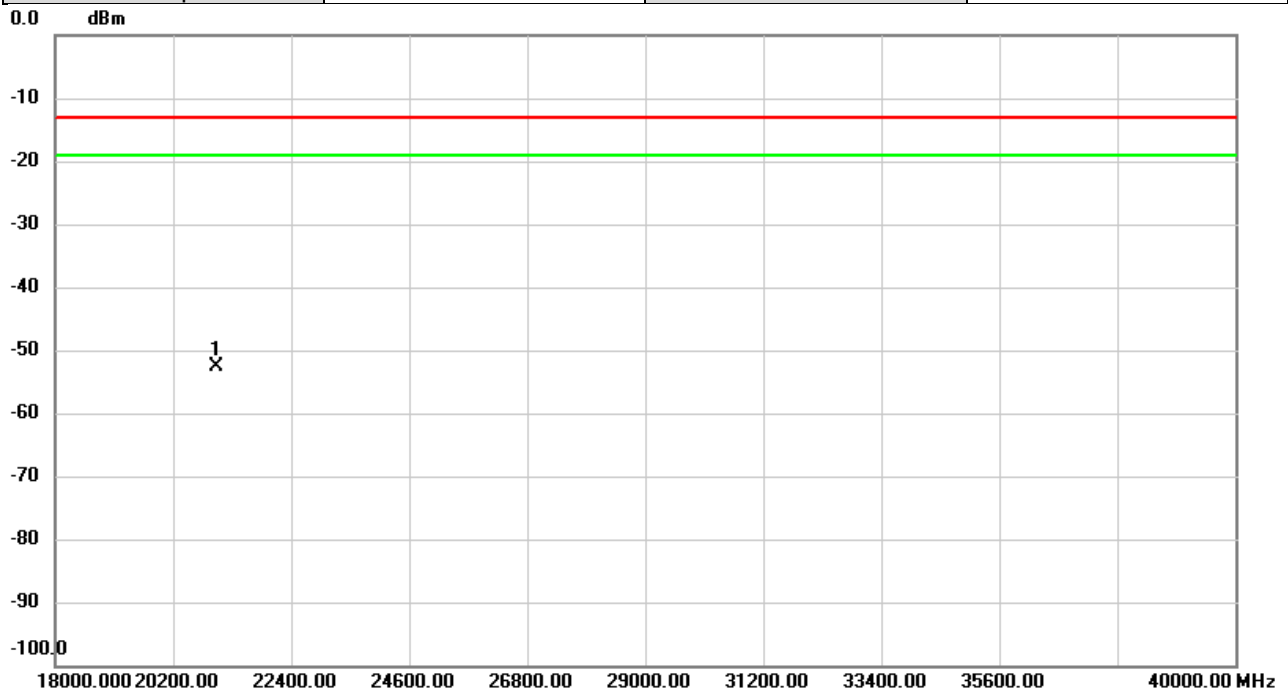


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	21000.00	-54.14	1.63	-52.51	-13.00	-39.51	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2026/1/21
Test Channel	CH650000	Polarization	Vertical
Temp	23°C	Hum.	67%

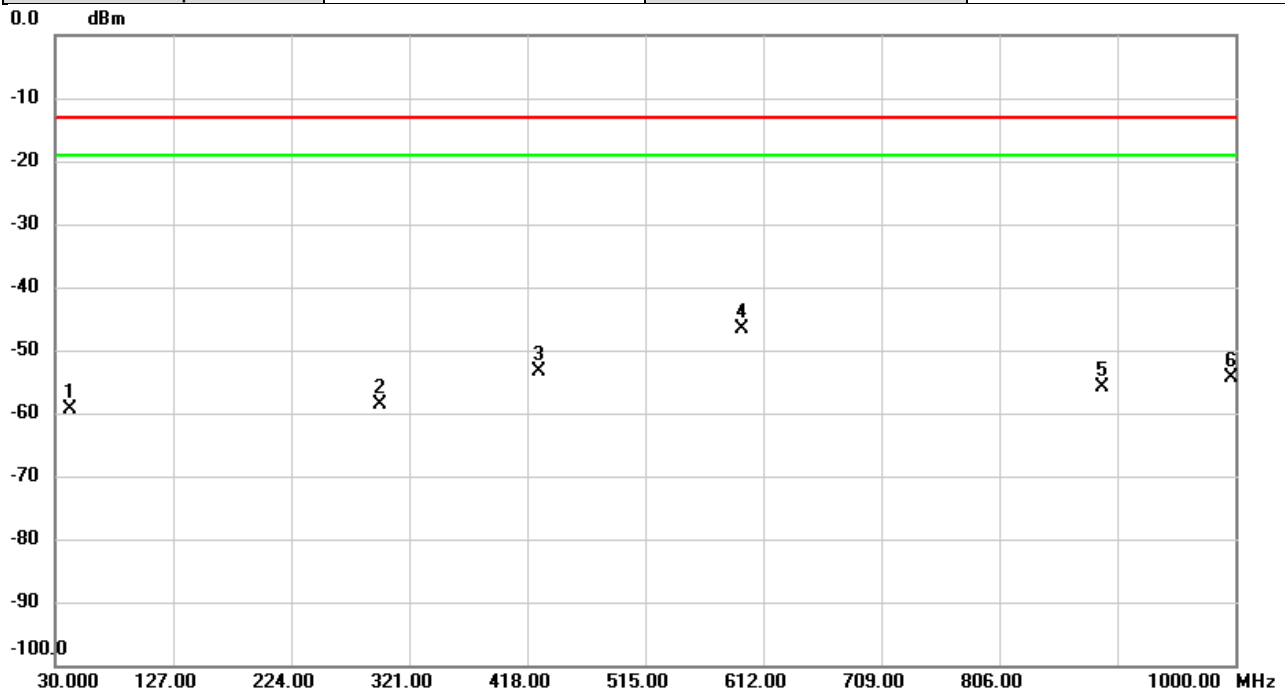


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		41.8017	-51.98	-7.45	-59.43	-13.00	-46.43	peak	
2		297.0087	-55.30	-3.35	-58.65	-13.00	-45.65	peak	
3		427.0857	-51.64	-1.76	-53.40	-13.00	-40.40	peak	
4	*	594.0227	-49.78	3.22	-46.56	-13.00	-33.56	peak	
5		891.0043	-62.14	6.39	-55.75	-13.00	-42.75	peak	
6		997.0253	-61.80	7.38	-54.42	-13.00	-41.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2026/1/21
Test Channel	CH650000	Polarization	Horizontal
Temp	23°C	Hum.	67%

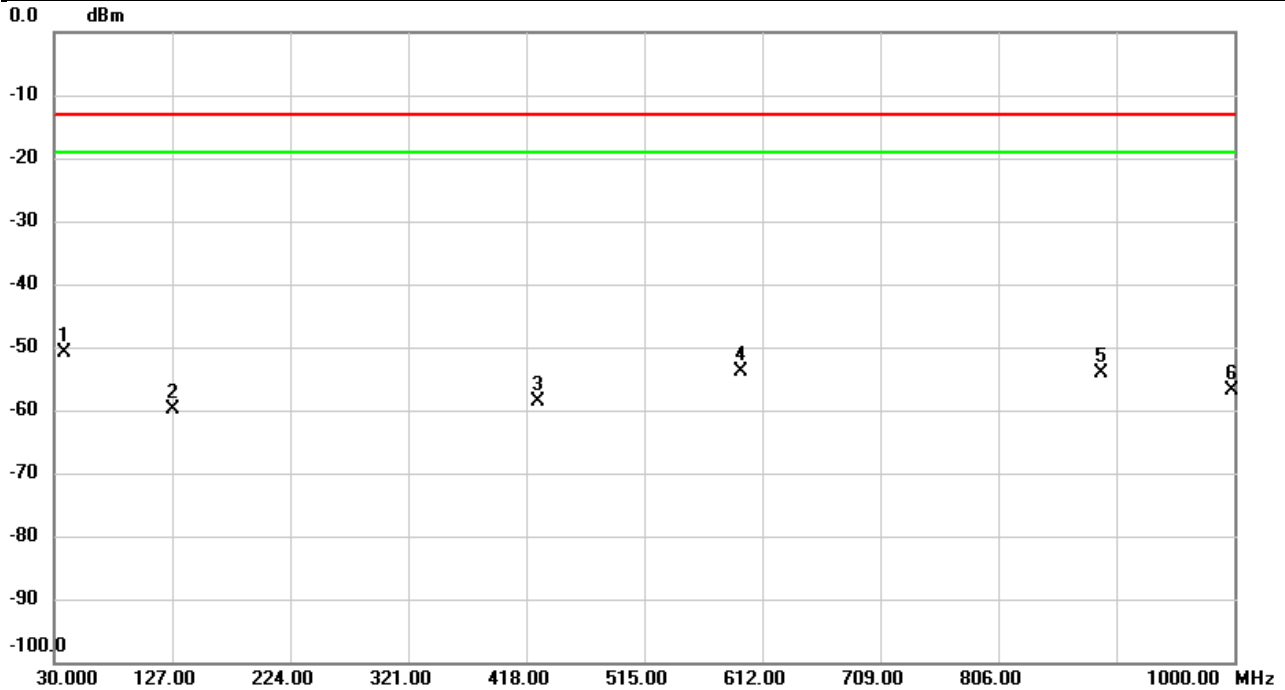


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	38.2773	-52.91	2.09	-50.82	-13.00	-37.82	peak	
2		128.1963	-53.07	-6.73	-59.80	-13.00	-46.80	peak	
3		427.1503	-56.42	-2.18	-58.60	-13.00	-45.60	peak	
4		593.9903	-53.89	0.12	-53.77	-13.00	-40.77	peak	
5		891.0366	-58.95	4.74	-54.21	-13.00	-41.21	peak	
6		997.8660	-63.13	6.16	-56.97	-13.00	-43.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2026/1/20
Test Channel	CH650000	Polarization	Vertical
Temp	25°C	Hum.	64%

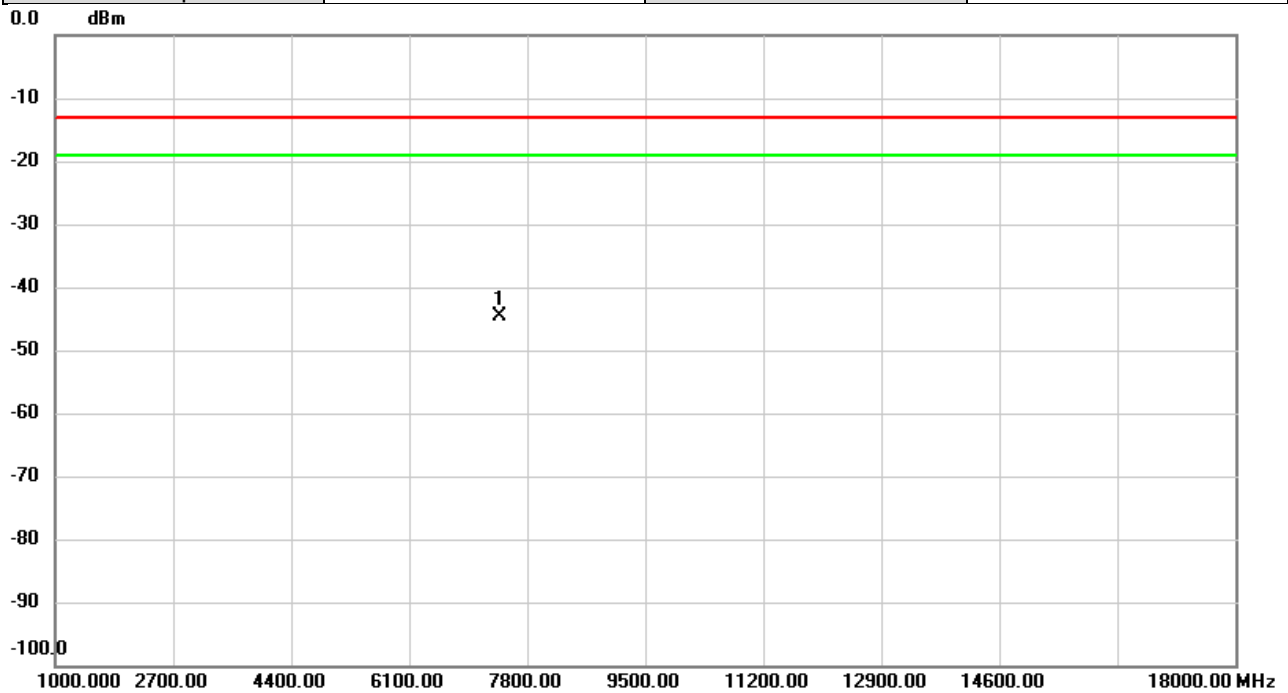


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7402.000	-62.69	18.06	-44.63	-13.00	-31.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2026/1/20
Test Channel	CH650000	Polarization	Horizontal
Temp	25°C	Hum.	64%

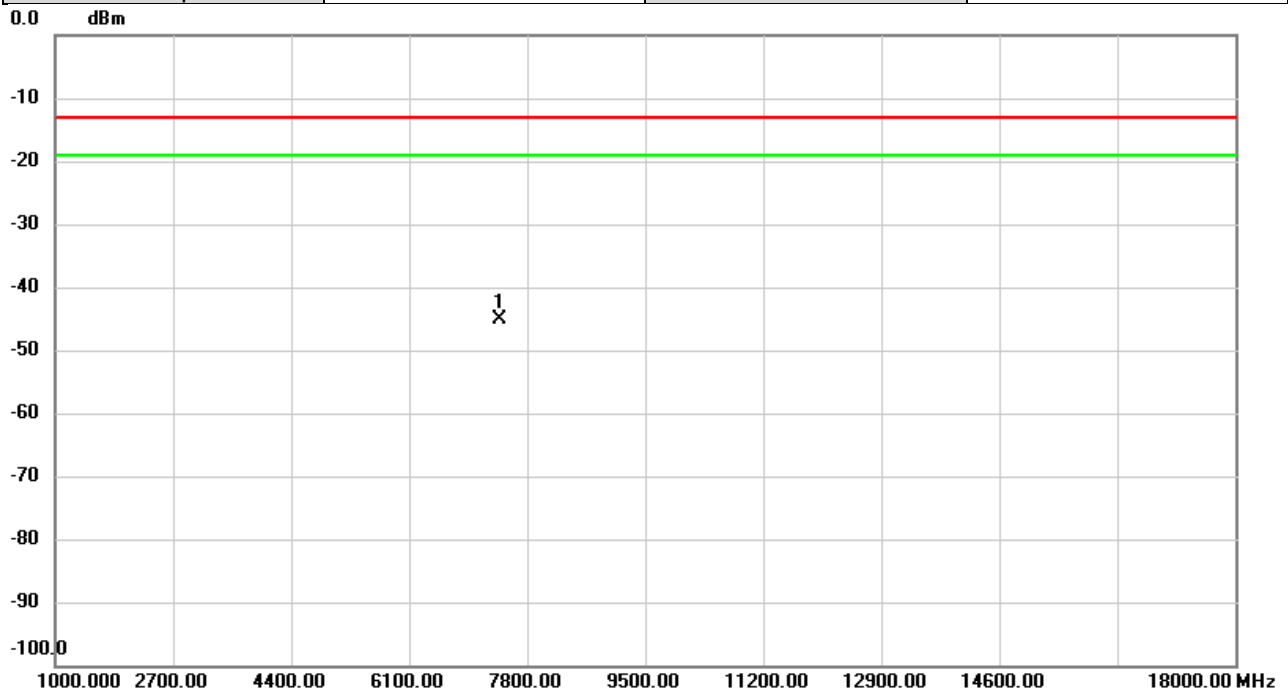


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	7402.000	-63.24	18.11	-45.13	-13.00	-32.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2026/1/22
Test Channel	CH650000	Polarization	Vertical
Temp	22°C	Hum.	66%

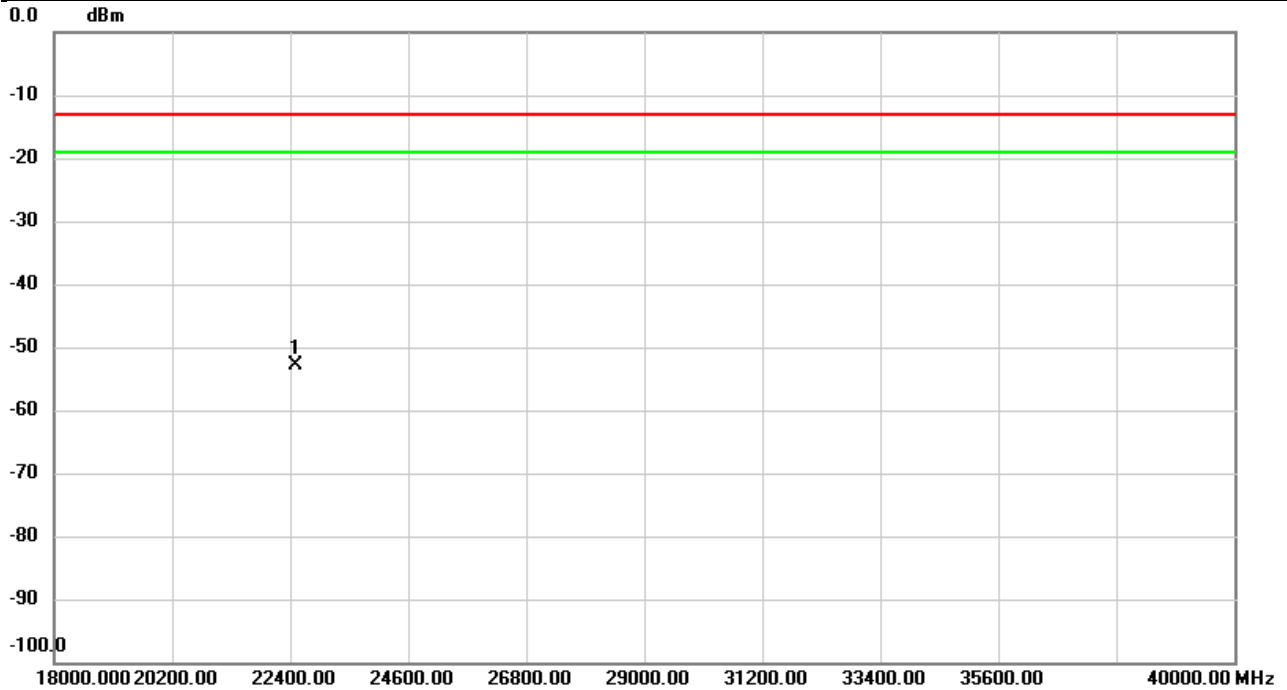


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	22500.00	-56.74	3.96	-52.78	-13.00	-39.78	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	SRS n78 HPUE	Test Date	2026/1/22
Test Channel	CH650000	Polarization	Horizontal
Temp	22°C	Hum.	66%

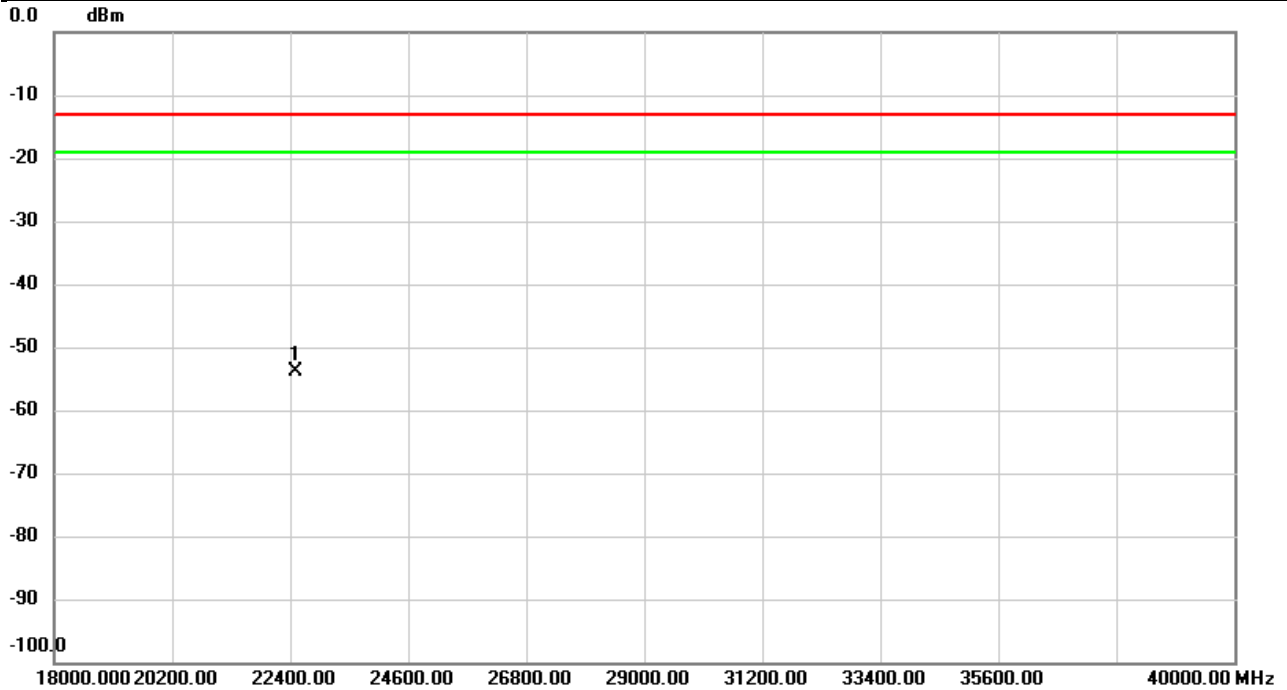

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	22500.00	-56.47	2.63	-53.84	-13.00	-40.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

End of Test Report