# TEST REPORT

| | |
|---|---|
| **Applicant:** | Quectel Wireless Solutions Co., Ltd. |
| **EUT Description:** | LTE Module with Wi-Fi & Bluetooth |
| **Model:** | SC200V-NA |
| **Brand:** | QUECTEL |
| **FCC ID:** | XMR2025SC200VNA |
| **Standards:** | FCC 47 CFR Part 15 Subpart E |
| **Date of Receipt:** | 2025/01/13 |
| **Date of Test:** | 2025/01/13 to 2025/03/03 |
| **Date of Issue:** | 2025/04/22 |

TOWE. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

the results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of the model are manufactured with identical electrical and mechanical components. All sample tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. without written approval of TOWE, the test report shall not be reproduced except in full.

ACCREDITED
CERTIFICATE #7088.01

**Huang Kun**
**Approved By:**

**Chen Chengfu**
**Reviewed By:**


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

# Revision History

| Rev. | Issue Date | Description | Revised by |
|---|---|---|---|
| 01 | 2025/03/06 | Original | Chen Chengfu |
| 02 | 2025/04/22 | Updated the model and serial number of the development board | Chen Chengfu |


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

# Summary of Test Results

| Clause | Test Items | Test Standard | Result |
|---|---|---|---|
| 4.3.1 | U-NII Detection Bandwidth | KDB 905462 Clause7.8.1 | N/A |
| 4.3.3 | Initial Channel Availability Check Time | KDB 905462 Clause7.8.2.1 | N/A |
| 4.3.4 | Radar Burst at the Beginning of the Channel Availability Check Time | KDB 905462 Clause7.8.2.2 | N/A |
| 4.3.5 | Radar Burst at the End of the Channel Availability Check Time | KDB 905462 Clause7.8.2.3 | N/A |
| 4.3.6 | In-Service Monitoring for Channel Move Time | KDB 905462 Clause7.8.3 | PASS |
| 4.3.6 | In-Service Monitoring for Channel Closing Transmission Time | KDB 905462 Clause7.8.3 | PASS |
| 4.3.6 | In-Service Monitoring for Non-Occupancy Period | KDB 905462 Clause7.8.3 | PASS |
| 4.3.7 | Statistical Performance Check | KDB 905462 Clause7.8.4 | N/A |
| 4.2.4 | User Access Restrictions | KDB 905462 Clause8.1 | N/A |

Test Method:
ANSI C63.10:2020,
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
Remark: Pass is EUT meets standard requirements; N/A does not support.


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

# Table of Contents

**1 General Description ..... 5**
**1.1 Lab Information ..... 5**
1.1.1 Testing Location ..... 5
1.1.2 Test Facility / Accreditations ..... 5
**1.2 Client Information ..... 5**
1.2.1 Applicant ..... 5
1.2.2 Manufacturer ..... 5
**1.3 Product Information ..... 6**
**2 Test Configuration ..... 7**
**2.1 Test Channel ..... 7**
**2.2 Worst-case configuration and Mode ..... 9**
**2.3 Support Unit used in test ..... 9**
**2.4 Test Environment ..... 9**
**2.5 Test RF Cable ..... 9**
**2.6 Modifications ..... 9**
**2.7 Test Setup Diagram ..... 10**
**3 Equipment and Measurement Uncertainty ..... 11**
**3.1 Test Equipment List ..... 11**
**3.2 Measurement Uncertainty ..... 11**
**4 Test Results ..... 12**
**4.1 DFS Parameters ..... 12**
**4.2 DFS Measurement Configuration ..... 17**
**4.3 Test Procedures ..... 18**
**5 Test Setup Photos ..... 25**
**Appendix ..... 26**


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

# 1 General Description

## 1.1 Lab Information

### 1.1.1 Testing Location

These measurements tests were conducted at the Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. facility located at F401 and F101, Building E, Hongwei Industrial Zone, Liuxian 3rd Road, Bao'an District, Shenzhen, China. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014
Tel.: +86-755-27212361
Contact Email: info@towewireless.com

### 1.1.2 Test Facility / Accreditations

**A2LA (Certificate Number: 7088.01)**
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

**FCC-Designation No.: CN1353**
Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. has been recognized as an accredited testing laboratory. Designation Number: CN1353.

**ISED-CAB identifier: CN0152**
Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. has been recognized by ISED as an accredited testing laboratory.
CAB identifier: CN0152
Company Number: 31000

## 1.2 Client Information

### 1.2.1 Applicant

| | |
|---|---|
| Applicant: | Quectel Wireless Solutions Co., Ltd. |
| Address: | Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China. |

### 1.2.2 Manufacturer

| | |
|---|---|
| Manufacturer: | Quectel Wireless Solutions Co., Ltd. |
| Address: | Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China. |


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

## 1.3 Product Information

| | | | | | |
|---|---|---|---|---|---|
| EUT Description: | LTE Module with Wi-Fi & Bluetooth | | | | |
| Model No.: | SC200V-NA | | | | |
| Brand: | QUECTEL | | | | |
| Hardware Version: | R1.0 | | | | |
| Software Version: | SC200VNANAR01A01 | | | | |
| IMEI: | 868757070001561 | | | | |
| Modulation Type: | 802.11a&n: | OFDM-BPSK, QPSK, 16QAM, 64QAM | | | |
| | 802.11ac: | OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM | | | |
| Smart System: | ☒SISO: | 802.11a/n/ac | / | | |
| | ☐MIMO: | 802.11n/ac | ( )TX( )RX | | |
| | ☐CDD: | 802.11a | ( )TX( )RX | | |
| EUT Function | ☒Client | ☐Outdoor AP | ☐Indoor AP | ☐Fixed P2P AP | |
| TPC Function: | ☒With TPC | | ☐Without TPC | | |
| DFS Function: | ☐Master<br>☐Slave with radar detection<br>☒Slave without radar detection | | | | |
| Frequency Range: | U-NII-2A: | 5250 ~ 5350MHz | | | |
| | U-NII-2C: | 5470 ~ 5725MHz | | | |
| Channel Frequency: | 20M BWch.: | U-NII-2A: | 5260 ~ 5320MHz | 4 Channels | |
| | | U-NII-2C: | 5500 ~ 5700MHz | 11 Channels | |
| | | Straddle Channel: | 5720MHz | 1 Channel | |
| | 40M BWch.: | U-NII-2A: | 5270 ~ 5310MHz | 2 Channels | |
| | | U-NII-2C: | 5510 ~ 5670MHz | 5 Channels | |
| | | Straddle Channel: | 5710MHz | 1 Channel | |
| | 80M BWch.: | U-NII-2A: | 5290MHz | 1 Channel | |
| | | U-NII-2C: | 5530 ~ 5610MHz | 2 Channels | |
| | | Straddle Channel: | 5690MHz | 1 Channel | |
| Antenna Type: | ☒ External, ☐ Integrated | | | | |
| Antenna Gain: | Frequency Range | Ant0 (dBi) | | | |
| | U-NII-2A: | -0.19 | | | |
| | U-NII-2C: | 1.28 | | | |
| Remark: The above EUT's information was declared by applicant, please refer to the specifications or user's manual for more detailed description. | | | | | |


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

# 2 Test Configuration

## 2.1 Test Channel

| Frequency Channels for U-NII-2A | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Channel** | **Frequency** | **Channel** | **Frequency** | **Channel** | **Frequency** | **Channel** | **Frequency** |
| 52 | 5260MHz | 56 | 5280MHz | 60 | 5300MHz | 64 | 5320MHz |
| 54 | 5270MHz | 58 | 5290MHz | 62 | 5310MHz | / | |

Remark:
In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Modulation Type | **Test Channel** | **Test Frequency** |
|---|---|---|
| 802.11a/n20 /ac20 | The Lowest channel (CH52) | 5260MHz |
| | The Middle channel (CH60) | 5300MHz |
| | The Highest channel (CH64) | 5320MHz |
| Modulation Type | **Test Channel** | **Test Frequency** |
| 802.11n40 /ac40 | The Lowest channel (CH54) | 5270MHz |
| | The Highest channel (CH62) | 5310MHz |
| Modulation Type | **Test Channel** | **Test Frequency** |
| 802.11ac80 | The Middle channel (CH58) | 5290MHz |

| Frequency Channels for U-NII-2C | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Channel** | **Frequency** | **Channel** | **Frequency** | **Channel** | **Frequency** | **Channel** | **Frequency** |
| 100 | 5500MHz | 110 | 5550MHz | 120 | 5600MHz | 132 | 5660MHz |
| 102 | 5510MHz | 112 | 5560MHz | 122 | 5610MHz | 134 | 5670MHz |
| 104 | 5520MHz | 114 | 5570MHz | 124 | 5620MHz | 136 | 5680MHz |
| 106 | 5530MHz | 116 | 5580MHz | 126 | 5630MHz | 140 | 5700MHz |
| 108 | 5540MHz | 118 | 5590MHz | 128 | 5640MHz | / | |

Remark:
In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Modulation Type | **Test Channel** | **Test Frequency** |
|---|---|---|
| 802.11a/n20 /ac20 | The Lowest channel (CH100) | 5500MHz |
| | The Middle channel (CH116) | 5580MHz |
| | The Highest channel (CH140) | 5700MHz |
| Modulation Type | **Test Channel** | **Test Frequency** |
| 802.11n40 /ac40 | The Lowest channel (CH102) | 5510MHz |
| | The Middle channel (CH118) | 5590MHz |
| | The Highest channel (CH134) | 5670MHz |
| Modulation Type | **Test Channel** | **Test Frequency** |
| 802.11ac80 | The Lowest channel (CH106) | 5530MHz |
| | The Highest channel (CH122) | 5610MHz |


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

| Straddle Channel | | |
|---|---|---|
| Modulation Type | **Test Channel** | **Test Frequency** |
| 802.11a/n20 /ac20 | The channel (CH144) | 5720MHz |
| Modulation Type | **Test Channel** | **Test Frequency** |
| 802.11n40/ac40 | The channel (CH142) | 5710MHz |
| Modulation Type | **Test Channel** | **Test Frequency** |
| 802.11ac80 | The channel (CH138) | 5690MHz |


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

## 2.2 Worst-case configuration and Mode

| Modulation Type | SISO - Data Rate | MIMO - Data Rate |
|---|---|---|
| 802.11a | 6 Mbps | NA |
| 802.11n20 | MCS0 (6.5 Mbps) | NA |
| 802.11n40 | MCS0 (13.5 Mbps) | NA |
| 802.11ac20 | MCS0 (6.5 Mbps) | NA |
| 802.11ac40 | MCS0 (13.5 Mbps) | NA |
| 802.11ac80 | MCS0 (29.3 Mbps) | NA |
| Transmitting mode: | Keep the EUT was programmed to be in continuously transmitting mode. | |
| Normal Link: | Keep the EUT operation to normal function. | |

## 2.3 Support Unit used in test

| Description | Manufacturer | Model | Serial Number |
|---|---|---|---|
| Adapter | JingSai | CLS-050200 | 3749567924 |
| Development Board | Quectel | SMART-EVB-G5 | MPY24F82X000339 |
| Development Board | Quectel | SC200V-NA-TE-A | E1C25AB0B000094 |
| Remark: all above the information of table are provided by client. | | | |

## 2.4 Test Environment

| | |
|---|---|
| **Temperature:** | Normal: 15℃ ~ 35℃ |
| **Humidity:** | 45-56 % RH Ambient |
| **Voltage:** | DC 3.8V (Module Input) |
| Remark: The testing environment is within the scope of the EUT user manual and meets the requirements of the standard testing environment. | |

## 2.5 Test RF Cable

**For all conducted test items**: The offset level is set spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.
The spectrum analyzer offset is derived from RF cable loss and attenuator factor.
Offset = RF cable loss + attenuator factor.

## 2.6 Modifications

No modifications were made during testing.


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

## 2.7 Test Setup Diagram

Setup 1

Setup 2

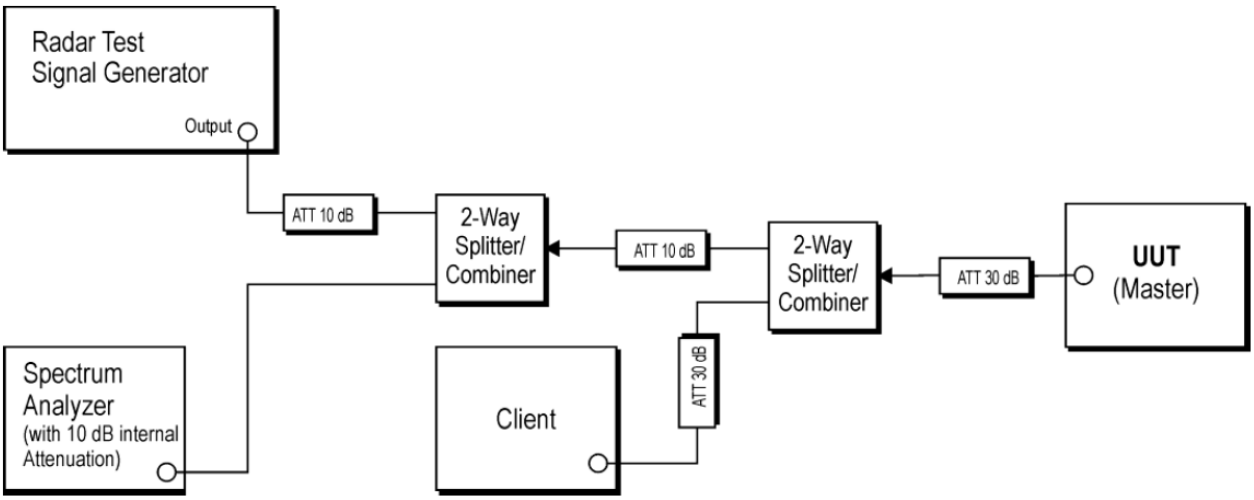



All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

# 3 Equipment and Measurement Uncertainty

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, whichever is less, and where applicable is traceable to recognized national standards.

## 3.1 Test Equipment List

| Description | Manufacturer | Model | SN | Last Due | Cal Due |
|---|---|---|---|---|---|
| Signal Analyzer | Keysight | N9020A | US46470429 | 2024/03/25 | 2025/03/24 |
| Power Sensor | Anritsu | MA24408A | 12520 | 2024/05/30 | 2025/05/29 |
| Measurement Software | Tonscend | TS1120-3 | 10659 | N/A | N/A |

## 3.2 Measurement Uncertainty

| Parameter | $U_{lab}$ |
|---|---|
| Frequency Error | 679.98Hz |
| Output Power | 0.76dB |

Uncertainty figures are valid to a confidence level of 95%


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

# 4 Test Results

## 4.1 DFS Parameters

### 4.1.1 Applicability of DFS Requirements Prior to Use of a Channel

| Requirement | DFS Operational mode | | |
|---|---|---|---|
| | Master | Client Without Radar Detection | Client With Radar Detection |
| Non-Occupancy Period | Yes | Not required | Yes |
| DFS Detection Threshold | Yes | Not required | Yes |
| Channel Availability Check Time | Yes | Not required | Not required |
| U-NII Detection Bandwidth | Yes | Not required | Yes |

### 4.1.2 Applicability of DFS Requirements During Normal Operation

| Requirement | DFS Operational mode | |
|---|---|---|
| | Master Device or Client with Radar Detection | Client Without Radar Detection |
| DFS Detection Threshold | Yes | Not required |
| Channel Availability Check Time | Yes | Yes |
| Channel Move Time | Yes | Yes |
| U-NII Detection Bandwidth | Yes | Not required |

| Additional requirements for devices with multiple bandwidth modes | Master Device or Client with Radar Detection | Client Without Radar Detection |
|---|---|---|
| U-NII Detection Bandwidth and Statistical Performance Check | All BW modes must be tested | Not required |
| Channel Move Time and Channel Closing Transmission Time | Test using widest BW mode available | Test using the widest BW mode available for the link |
| All other tests | Any single BW mode | Not required |
| Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.1 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency. | | |


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

### 4.1.3 DFS Detection Thresholds

| Maximum Transmit Power | Value (See Notes 1, 2, and 3) |
|---|---|
| EIRP ≥ 200 milliwatt | -64 dBm |
| EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz | -62 dBm |
| EIRP < 200 milliwatt that do not meet the power spectral density requirement | -64 dBm |

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.
Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.
Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

### 4.1.4 Response Requirements

| Parameter | Value |
|---|---|
| Non-occupancy period | Minimum 30 minutes |
| Channel Availability Check Time | 60 seconds |
| Channel Move Time | 10 seconds See Note 1. |
| Channel Closing Transmission Time | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2. |
| U-NII Detection Bandwidth | Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3. |

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.
Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.
Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

### 4.1.5 Short Pulse Radar Test Waveforms

| Radar Type | Pulse Width (μsec) | PRI(μsec) | Number of Pulses | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|---|---|---|---|---|---|
| 0 | 1 | 1428 | 18 | See Note 1 | See Note 1 |
| 1 | 1 | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a<br>Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A | $\text{Roundup}\left\{\left(\frac{1}{360}\right)\cdot\left(\frac{19\cdot 10^6}{\text{PRI}_{\mu sec}}\right)\right\}$ | 60% | 30 |
| 2 | 1-5 | 150-230 | 23-29 | 60% | 30 |
| 3 | 6-10 | 200-500 | 16-18 | 60% | 30 |
| 4 | 11-20 | 200-500 | 12-16 | 60% | 30 |
| Aggregate (Radar Types 1-4) | | | | 80% | 120 |
| Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. | | | | | |

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 μsec is selected, the number of pulses

would be 6 1 19 10 Roundup $\left\{\left(\frac{1}{360}\right)\cdot\left(\frac{19\cdot 10^6}{3066}\right)\right\}$ Round up {17.2} = 18.


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

**Table 5a - Pulse Repetition Intervals Values for Test A**

| Pulse Repetition Frequency Number | Pulse Repetition Frequency (Pulses Per Second) | Pulse Repetition Interval (Microseconds) |
|---|---|---|
| 1 | 1930.5 | 518 |
| 2 | 1858.7 | 538 |
| 3 | 1792.1 | 558 |
| 4 | 1730.1 | 578 |
| 5 | 1672.2 | 598 |
| 6 | 1618.1 | 618 |
| 7 | 1567.4 | 638 |
| 8 | 1519.8 | 658 |
| 9 | 1474.9 | 678 |
| 10 | 1432.7 | 698 |
| 11 | 1392.8 | 718 |
| 12 | 1355 | 738 |
| 13 | 1319.3 | 758 |
| 14 | 1285.3 | 778 |
| 15 | 1253.1 | 798 |
| 16 | 1222.5 | 818 |
| 17 | 1193.3 | 838 |
| 18 | 1165.6 | 858 |
| 19 | 1139 | 878 |
| 20 | 1113.6 | 898 |
| 21 | 1089.3 | 918 |
| 22 | 1066.1 | 938 |
| 23 | 326.2 | 3066 |

The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4. For example, the following table indicates how to compute the aggregate of percentage of successful detections.

| Radar Type | Number of Trials | Number of Successful Detections | Minimum Percentage of Successful Detection |
|---|---|---|---|
| 1 | 35 | 29 | 82.9% |
| 2 | 30 | 18 | 60% |
| 3 | 30 | 27 | 90% |
| 4 | 50 | 44 | 88% |
| Aggregate (82.9% + 60% + 90% + 88%)/4 = 80.2% | | | |


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

### 4.1.6 Long Pulse Radar Test Waveform

| Radar Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|---|---|---|---|---|---|---|---|
| 5 | 50-100 | 5-20 | 1000-2000 | 1-3 | 8-20 | 80% | 30 |

Each waveform is defined as follows:
1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst Count.
3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a transmission period will have the same chirp width. The chirp is cantered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the random time interval between the first and second pulses is chosen independently of the random time interval between the second and third pulses.
7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst Count. Each interval is of length (12,000,000 / Burst Count) microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and [(12,000,000 / Burst Count) – (Total Burst Length) + (One Random PRI Interval)] microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is

### 4.1.7 Frequency Hopping Radar Test Waveform

| Radar Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|---|---|---|---|---|---|---|---|
| 6 | 1 | 333 | 9 | 0.333 | 300 | 70% | 30 |

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm: If a segment does not contain at least 1 frequency within the U-NII Detection Bandwidth of the UUT, then that segment is not used.


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

## 4.2 DFS Measurement Configuration

### 4.2.1 Test Condition

| |
|---|
| Conducted Measurement<br>Use 50Ohms to connect cable/connector calibration and testing, Use wifi0 port for testing. Refer to Section 2.10 for test connection. |

### 4.2.2 DFS Threshold level

| | |
|---|---|
| DFS Threshold level:( -62.19; -60.72 )dBm | ☒At the antenna connector<br>☐In front of the antenna |
| The Interference **Radar Detection Threshold Level is：**<br>**(Band II-A: -62dBm + -0.19dBi + 0dB = -62.19dBm);**<br>**(Band II-C: -62dBm + 1.28dBi + 0dB = -60.72dBm)**<br>That had been taken into account the output power range and antenna gain. | |

### 4.2.3 Power-on cycle

| |
|---|
| The time required for the Master Device and/or Client Device to complete its power-on cycle(NA). |

### 4.2.4 User Access Restrictions

| |
|---|
| DFS Controls (Hardware or software) related to radar detection are NOT accessible to the user.<br>Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user. |

### 4.2.5 Channel Loading/Data Streaming

| | |
|---|---|
| ☐ | The data file(MPEG-4) has been transmitting in a streaming mode. |
| ☒ | Software to ping the client is permitted to simulate data transfer with random ping intervals. |
| ☒ | Minimum channel loading of approximately 17%. |
| ☐ | Unicast protocol has been used. |


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

## 4.3 Test Procedures

### 4.3.1 U-NII Detection Bandwidth

Adjust the equipment to produce a single *Burst* of any one of the Short Pulse Radar Types 0 – 4 in **Table 5** at the center frequency of the UUT *Operating Channel* at the specified *DFS Detection Threshold* level found in **Table 3**.
Set the UUT up as a standalone device (no associated Client or Master, as appropriate) and no traffic. Frame based systems will be set to a talk/listen ratio reflecting the worst case (maximum) that is user configurable during this test.
Generate a single radar *Burst*, and note the response of the UUT. Repeat for a minimum of 10 trials. The UUT must detect the *Radar Waveform* within the DFS band using the specified *U-NII Detection Bandwidth* criterion shown in **Table 4**. In cases where the channel bandwidth may exceed past the DFS band edge on specific channels (i.e., 802.11ac or wideband frame based systems) select a channel that has the entire emission bandwidth within the DFS band. If this is not possible, test the detection BW to the DFS band edge.
Starting at the center frequency of the UUT operating *Channel*, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the *U-NII Detection Bandwidth* criterion specified in **Table 4**. Repeat this measurement in 1MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as FH) at which detection is greater than or equal to the *U-NII Detection Bandwidth* criterion. Recording the detection rate at frequencies above FH is not required to demonstrate compliance.
Starting at the center frequency of the UUT operating *Channel*, decrease the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the *U-NII Detection Bandwidth* criterion specified in **Table 4**. Repeat this measurement in 1MHz steps at frequencies 5 MHz above where the detection rate begins to fall. Record the lowest frequency (denote as FL) at which detection is greater than or equal to the *U-NII Detection Bandwidth* criterion. Recording the detection rate at frequencies below FL is not required to demonstrate compliance.
The *U-NII Detection Bandwidth* is calculated as follows:
*U-NII Detection Bandwidth* = FH – FL
The *U-NII Detection Bandwidth* must meet the *U-NII Detection Bandwidth* criterion specified in **Table 4**. Otherwise, the UUT does not comply with DFS requirements. This is essential to ensure that the UUT is capable of detecting *Radar Waveforms* across the same frequency spectrum that contains the significant energy from the system. In the case that the *U-NII Detection Bandwidth* is greater than or equal to the 99 percent power bandwidth for the measured FH and FL, the test can be truncated and the *U-NII Detection Bandwidth* can be reported as the measured FH and FL.

### 4.3.2 Performance Requirements Check

The following tests must be performed for U-NII device certification: Initial *Channel Startup Check* with a radar *Burst* at start of *Channel Availability Check* and with a radar *Burst* at end of *Channel Availability Check*; *In-Service Monitoring*; and the 30 minute *Non-Occupancy Period*.

### 4.3.3 Initial Channel Availability Check Time

The Initial *Channel Availability Check Time* tests that the UUT does not emit beacon, control, or data signals on the test *Channel* until the power-up sequence has been completed and the U-NII device checks for *Radar Waveforms* for one minute on the test *Channel*. This test does not use any *Radar Waveforms* and only needs to be performed one time.
a) The U-NII devices will be powered on and be instructed to operate on the appropriate U-NII *Channel* that must incorporate DFS functions. At the same time the UUT is powered on, the spectrum analyzer will be set to zero span mode with a 3 MHz RBW and 3 MHz VBW on the *Channel* occupied by the radar (Chr) with a 2.5 minute sweep time. The spectrum analyzer's sweep will be started at the same time power is applied to the U-NII device.
b) The UUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.
c) Confirm that the UUT initiates transmission on the channel
This measurement can be used to determine the length of the power-on cycle if it is not supplied by the manufacturer. If the spectrum analyzer sweep is started at the same time the UUT is powered on and the UUT does not begin transmissions until it has completed the cycle, the power-on time can be determined by comparing the two times.

### 4.3.4 Radar Burst at the Beginning of the Channel Availability Check Time

The steps below define the procedure to verify successful radar detection on the test *Channel* during a period equal to the *Channel Availability Check Time* and avoidance of operation on that *Channel* when a radar *Burst*


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

with a level equal to the *DFS Detection Threshold* + 1 dB occurs at the beginning of the *Channel Availability Check Time*. This is illustrated in **Figure 15**.
a) The *Radar Waveform* generator and UUT are connected using the applicable test setup described in the sections on configuration for Conducted Tests (7.2) or Radiated Tests (7.3) and the power of the UUT is switched off.
b) The UUT is powered on at T0. T1 denotes the instant when the UUT has completed its power-up sequence (Tpower_up). The *Channel Availability Check Time* commences on Chr at instant T1 and will end no sooner than T1 + Tch_avail_check.
c) A single *Burst* of one of the Short Pulse Radar Types 0-4 will commence within a 6 second window starting at T1. An additional 1 dB is added to the radar test signal to ensure it is at or above the *DFS Detection Threshold*, accounting for equipment variations/errors.
d) Visual indication or measured results on the UUT of successful detection of the radar *Burst* will be recorded and reported. Observation of Chr for UUT emissions will continue for 2.5 minutes after the radar *Burst* has been generated.
e) Verify that during the 2.5 minute measurement window no UUT transmissions occurred on Chr. The *Channel Availability Check* results will be recorded.

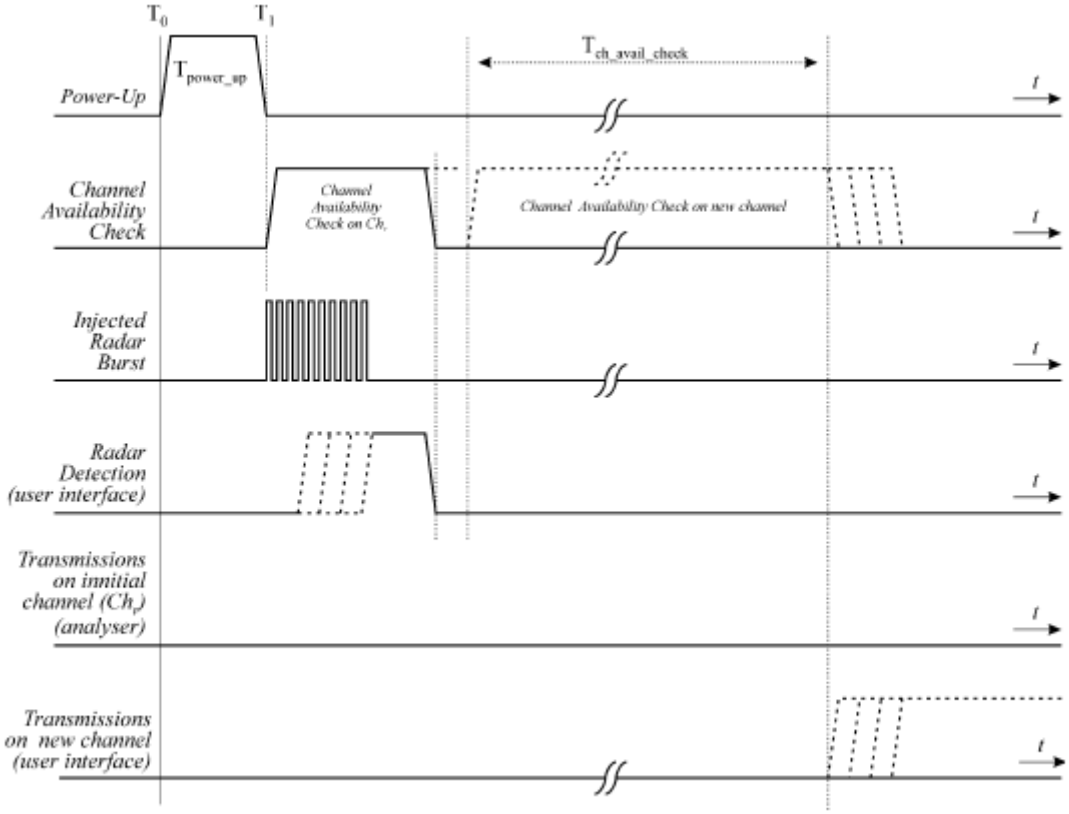


*Figure 15: Example of timing for radar testing at the beginning of the Channel Availability Check Time*

### 4.3.5 Radar Burst at the End of the Channel Availability Check Time

The steps below define the procedure to verify successful radar detection on the test *Channel* during a period equal to the *Channel Availability Check Time* and avoidance of operation on that *Channel* when a radar *Burst* with a level equal to the *DFS Detection Threshold* + 1dB occurs at the end of the *Channel Availability Check Time*. This is illustrated in **Figure 16**.
a) The *Radar Waveform* generator and UUT are connected using the applicable test setup described in the sections for Conducted Tests (7.2) or Radiated Tests (7.3) and the power of the UUT is switched off.
b) The UUT is powered on at T0. T1 denotes the instant when the UUT has completed its power-up sequence (Tpower_up). The *Channel Availability Check Time* commences on Chr at instant T1 and will end no sooner than T1 + Tch_avail_check.
c) A single *Burst* of one of the Short Pulse Radar Types 0-4 will commence within a 6 second window starting at T1 + 54 seconds. An additional 1 dB is added to the radar test signal to ensure it is at or above the *DFS Detection Threshold*, accounting for equipment variations/errors.
d) Visual indication or measured results on the UUT of successful detection of the radar *Burst* will be recorded and reported. Observation of Chr for UUT emissions will continue for 2.5 minutes after the radar *Burst* has been generated.
e) Verify that during the 2.5 minute measurement window no UUT transmissions occurred on Chr. The *Channel Availability Check* results will be recorded.


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

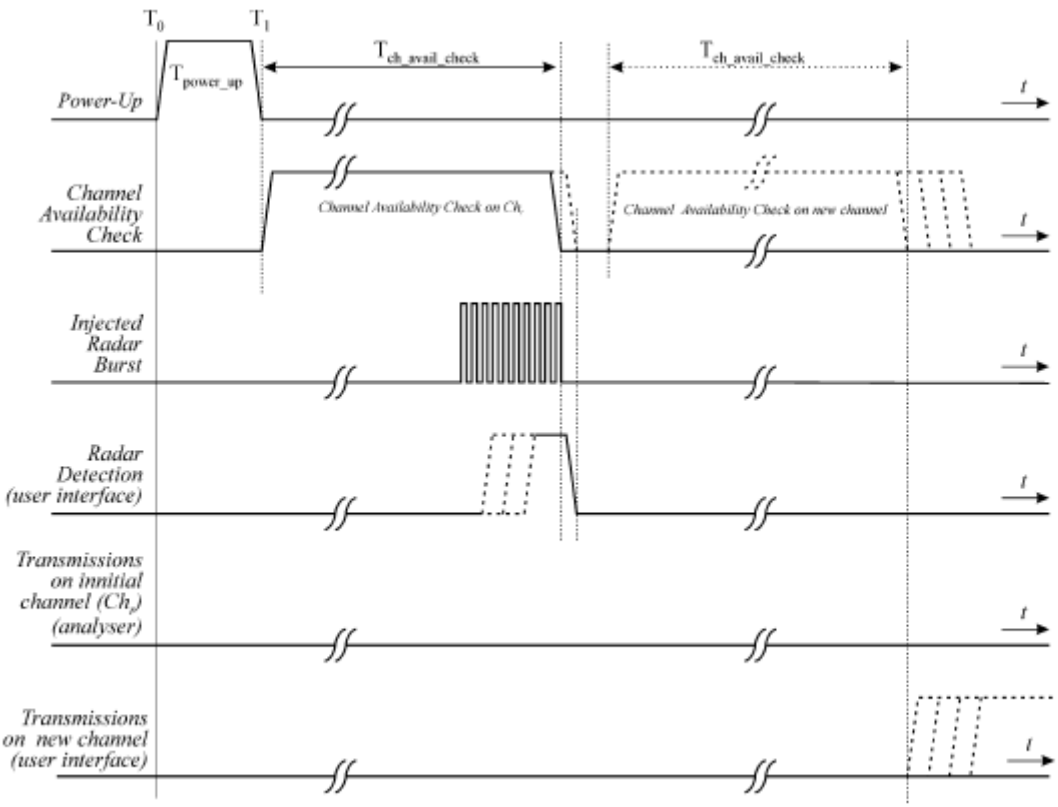


*Figure 16: Example of timing for radar testing towards the end of the Channel Availability Check Time*

### 4.3.6 In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

These tests define how the following DFS parameters are verified during *In-Service Monitoring;*
- *Channel Closing Transmission Time*
- *Channel Move Time*
- *Non-Occupancy Period*

The steps below define the procedure to determine the above mentioned parameters when a radar *Burst* with a level equal to the *DFS Detection Threshold* + 1dB is generated on the *Operating Channel* of the U-NII device *(In- Service Monitoring).*

a) One frequency will be chosen from the *Operating Channels* of the UUT within the 5250-5350 MHz or 5470-5725 MHz bands. For 802.11 devices, the test frequency must contain control signals. This can be verified by disabling channel loading and monitoring the spectrum analyzer. If no control signals are detected, another frequency must be selected within the emission bandwidth where control signals are detected.

b) In case the UUT is a U-NII device operating as a *Client Device* (with or without DFS), a U-NII device operating as a *Master Device* will be used to allow the UUT (Client device) to *Associate* with the *Master Device*. In case the UUT is a *Master Device*, a U-NII device operating as a *Client Device* will be used and it is assumed that the Client will *Associate* with the UUT (Master). In both cases for conducted tests, the *Radar Waveform* generator will be connected to the *Master Device*. For radiated tests, the emissions of the *Radar Waveform* generator will be directed towards the *Master Device*. If the *Master Device* has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.

c) Stream the channel loading test file from the *Master Device* to the *Client Device* on the test *Channel* for the entire period of the test.

d) At time T0 the *Radar Waveform* generator sends a *Burst* of pulses for one of the Radar Type 0 in **Table 5** at levels defined in **Table 3**, on the *Operating Channel*. An additional 1 dB is added to the radar test signal to ensure it is at or above the *DFS Detection Threshold*, accounting for equipment variations/errors.

e) Observe the transmissions of the UUT at the end of the radar *Burst* on the *Operating Channel* for duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (*Channel Move Time)*. Measure and record the *Channel Move Time* and *Channel Closing Transmission Time* if radar detection occurs. **Figure 17** illustrates *Channel Closing Transmission Time.*

f) When operating as a *Master Device*, monitor the UUT for more than 30 minutes following instant T2 to verify that the UUT does not resume any transmissions on this *Channel*. Perform this test once and record the measurement result.

g) In case the UUT is a U-NII device operating as a *Client Device* with *In-Service Monitoring*, perform steps a) to f).


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

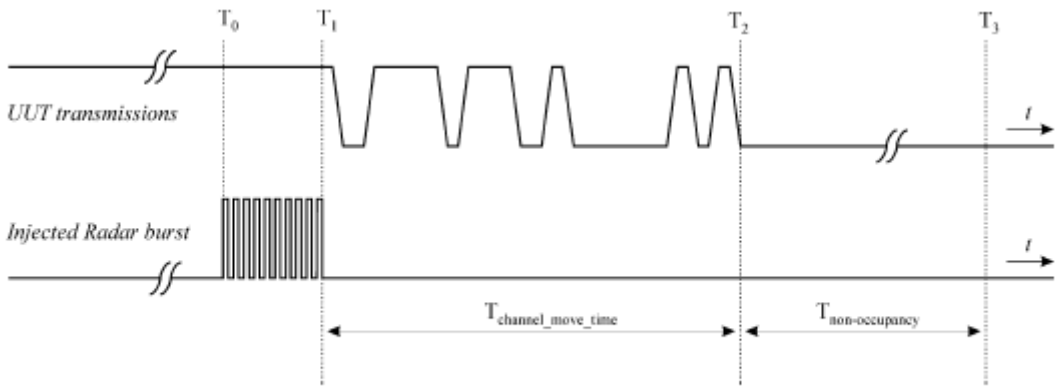


*Figure 17: Example of Channel Closing Transmission Time & Channel Closing Time*

### 4.3.7 Statistical Performance Check

The steps below define the procedure to determine the minimum percentage of successful detection requirements found in **Tables 5-7** when a radar burst with a level equal to the *DFS Detection Threshold* + 1dB is generated on the *Operating Channel* of the U-NII device *(In- Service Monitoring).*

a) One frequency will be chosen from the *Operating Channels* of the UUT within the 5250-5350 MHz or 5470-5725 MHz bands.

b) In case the UUT is a U-NII device operating as a *Client Device* (with or without Radar Detection), a U-NII device operating as a *Master Device* will be used to allow the UUT (Client device) to *Associate* with the *Master Device*. In case the UUT is a *Master Device*, a U-NII device operating as a *Client Device* will be used and it is assumed that the Client will *Associate* with the UUT (Master). In both cases for conducted tests, the *Radar Waveform* generator will be connected to the *Master Device*. For radiated tests, the emissions of the *Radar Waveform* generator will be directed towards the *Master Device*. If the *Master Device* has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.

c) Stream the channel loading test file from the *Master Device* to the Client Device on the test *Channel* for the entire period of the test.

d) At time T0 the *Radar Waveform* generator sends the individual waveform for each of the Radar Types 1- 6 in **Tables 5-7**, at levels defined in **Table 3**, on the *Operating Channel*. An additional 1 dB is added to the radar test signal to ensure it is at or above the *DFS Detection Threshold*, accounting for equipment variations/errors.

e) Observe the transmissions of the UUT at the end of the Burst on the *Operating Channel* for duration greater than 10 seconds for Radar Type 0 to ensure detection occurs.

f) Observe the transmissions of the UUT at the end of the Burst on the *Operating Channel* for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.

g) In case the UUT is a U-NII device operating as a *Client Device* with *In-Service Monitoring*, perform steps a) to f).

### 4.3.8 Short Pulse Radar Test

Once the performance requirements check is complete, statistical data will be gathered, to determine the ability of the device to detect the radar test waveforms (Short Pulse Radar Types 1-4) found in **Table 5**. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trials. The percentage of successful detection is calculated by:

$$\frac{TotalWaveformDetections}{TotalWaveformTrials} \text{x100 = Percentage of Successful Detection } \textit{Radar Waveform} \text{ N = PdN}$$

In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows:

$$\frac{P_d 1 + P_d 2 + P_d 3 + P_d 4}{4}$$

The minimum number of trails, minimum percentage of successful detection and the aggregate minimum percentage of successful detection are found in **Table 5**.

### 4.3.9 Long Pulse Radar Test

Statistical data will be gathered to determine the ability of the device to detect the Long Pulse Radar Type 5 found in **Table 6**. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trials.

Three subsets of trials will be performed with a minimum of ten trials per subset. The subset of trials differ in where the Long Pulse Type 5 Signal is tuned in frequency:


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

a) the *Channel* center frequency (Figure 18);
b) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the low edge of the UUT *Occupied Bandwidth* (Figure 19); and
c) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT *Occupied Bandwidth* (Figure 20).

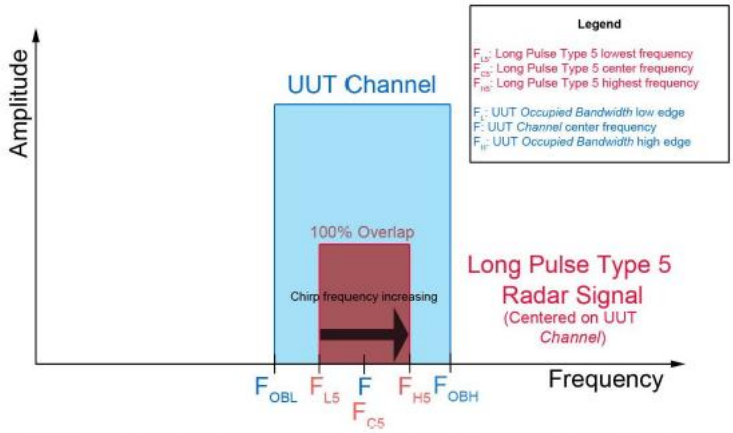


*Figure 18: Example of the Relationship Between Long Pulse Type 5 Signal and the U-NII channel when the Signal is Tuned to the UUT Channel Center Frequency*

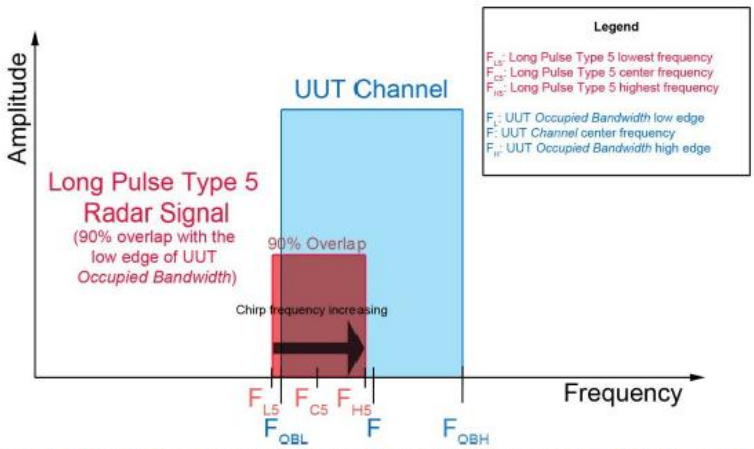


*Figure 19: Example of the Relationship Between Long Pulse Type 5 Signal and the U-NII channel when the Signal is Tuned so that 90% of the Radar Signal Overlaps with the Low Edge of the UUT Occupied Bandwidth*

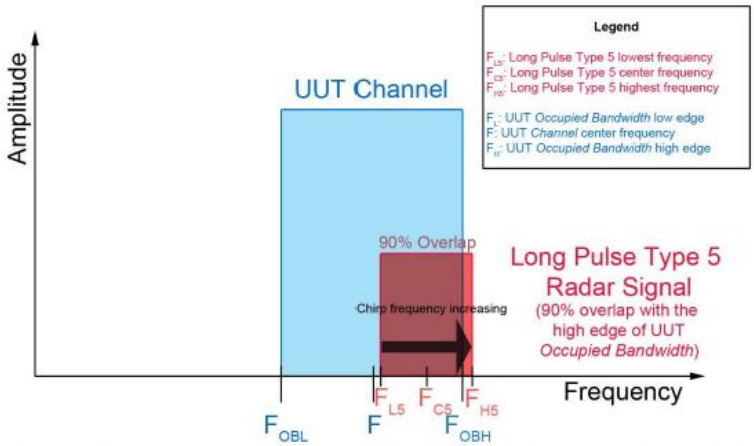


*Figure 20: Example of the Relationship Between Long Pulse Type 5 Signal and the U-NII channel when the Signal is Tuned so that 90% of the Radar Signal Overlaps with the High Edge of the UUT Occupied Bandwidth*

For subset case 1: the center frequency of the signal generator will remain fixed at the center of the UUT *Channel.*
For subset case 2: to retain 90% frequency overlap between the radar signal and the UUT *Occupied Bandwidth*, the center frequency of the signal generator will vary for each of the ten trials in subset case 2. The center frequency of the signal generator for each trial is calculated by:

$$FL+(0.4*Chirp\ Width\ [in\ MHz])$$


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

For subset case 3: to retain 90% frequency overlap between the radar signal and the UUT *Occupied Bandwidth*, the center frequency of the signal generator will vary for each of the ten trials in subset case 3. The center frequency of the signal generator for each trial is calculated by:

$$FH-(0.4*Chirp\ Width\ [in\ MHz])$$

The percentage of successful detection is calculated by dividing the sum of the detections for the three subsets by the sum of trials for the three subsets:

$$\frac{TotalWaveformDetections}{TotalWaveformTrials} \times 100$$


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

### 4.3.10 Frequency Hopping Radar Test

Statistical data will be gathered to determine the ability of the device to detect the Frequency Hopping radar test signal (radar type 6) found in **Table 7**. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The probability of successful detection is calculated by:

$$\frac{TotalWaveformDetections}{TotalWaveformTrials} \times 100$$


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

# 5 Test Setup Photos

The detailed test data see: **Appendix-C BTWIFI Setup Photos**


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

# Appendix

## DFS Detection Thresholds

### Test Result

| TestMode | Frequency[dbm] | Radar Type | Result | Limit[dbm] | Verdict |
|---|---|---|---|---|---|
| 11a | 5260 | Type0 | -62.40 | -62.19 | PASS |
| 11a | 5500 | Type0 | -60.85 | -60.72 | PASS |
| 11ac80SISO | 5290 | Type0 | -62.32 | -62.19 | PASS |
| 11ac80SISO | 5530 | Type0 | -61.11 | -60.72 | PASS |


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

## Test Graphs

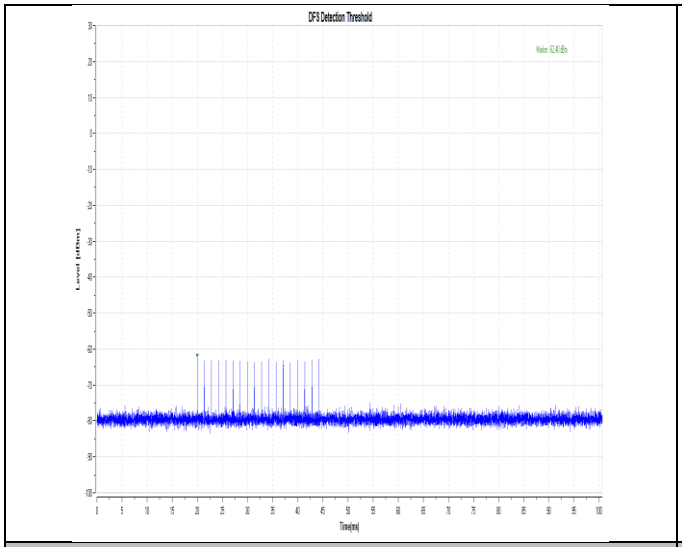


11A-5260-Type0-PASS

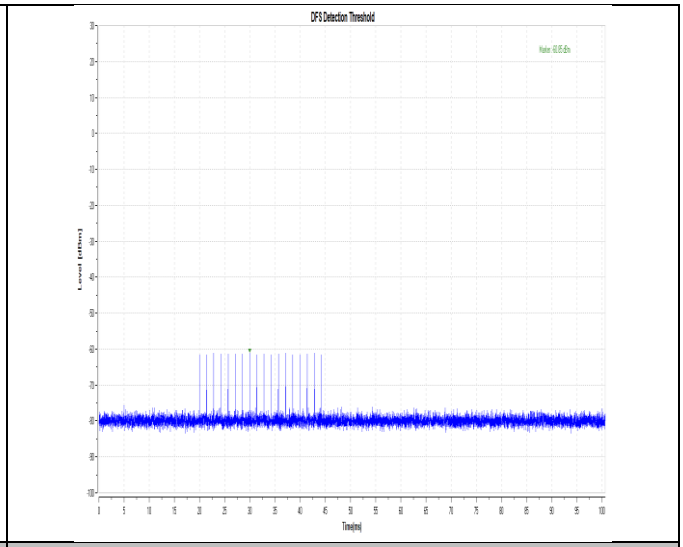


11A-5500-Type0-PASS

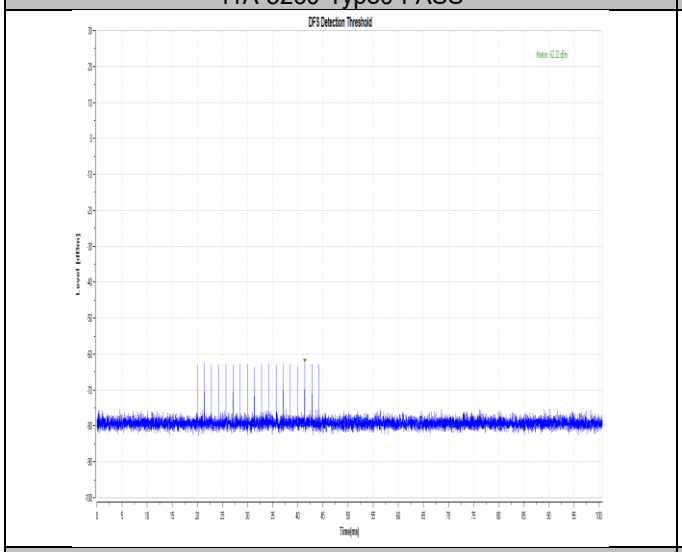


11AC80SISO-5290-Type0-PASS

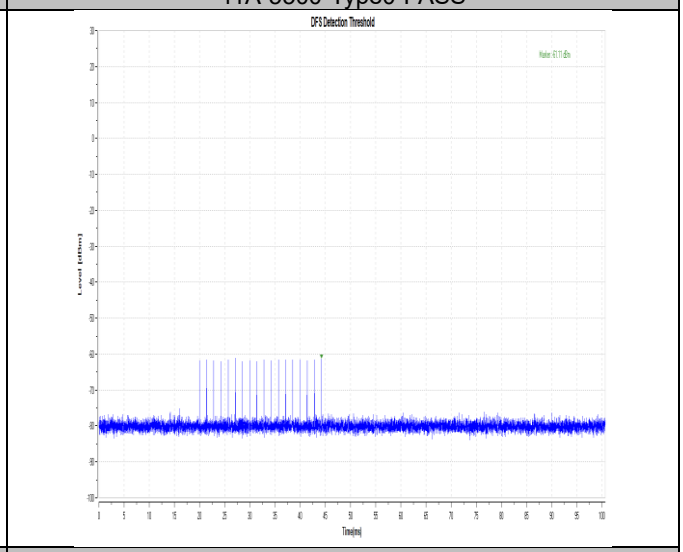


11AC80SISO-5530-Type0-PASS


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

# Channel Move Time and Channel Closing Transmission Time

## Test Result

| TestMode | Frequency[MHz] | CCTT[ms] | Limit[ms] | CMT[ms] | Limit[ms] | Verdict |
|---|---|---|---|---|---|---|
| 11a | 5260 | 200+3.9 | 200+60 | 456.3 | 10000 | PASS |
| 11a | 5500 | 200+6.5 | 200+60 | 538.2 | 10000 | PASS |
| 11ac80SISO | 5290 | 200+5.2 | 200+60 | 471.9 | 10000 | PASS |
| 11ac80SISO | 5530 | 200+6.5 | 200+60 | 497.9 | 10000 | PASS |


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

## Test Graphs

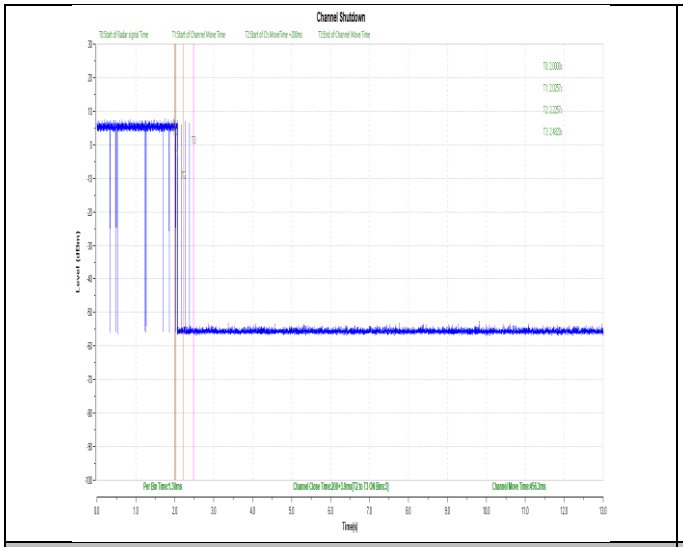


11a-5260-Type0-PASS

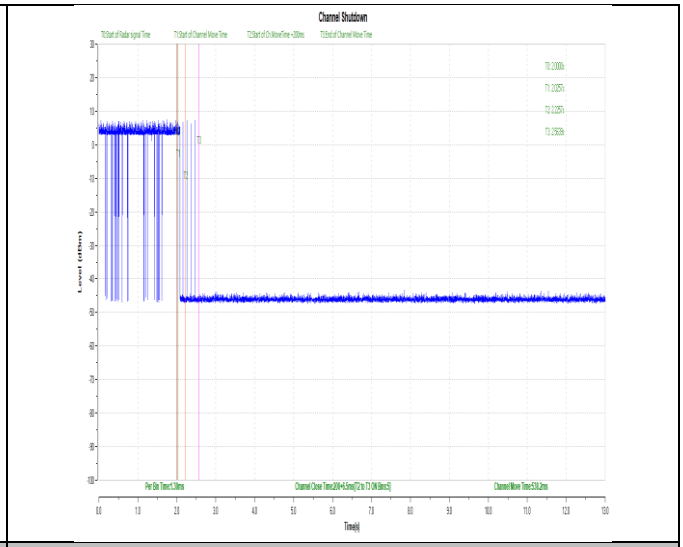


11a-5500-Type0-PASS

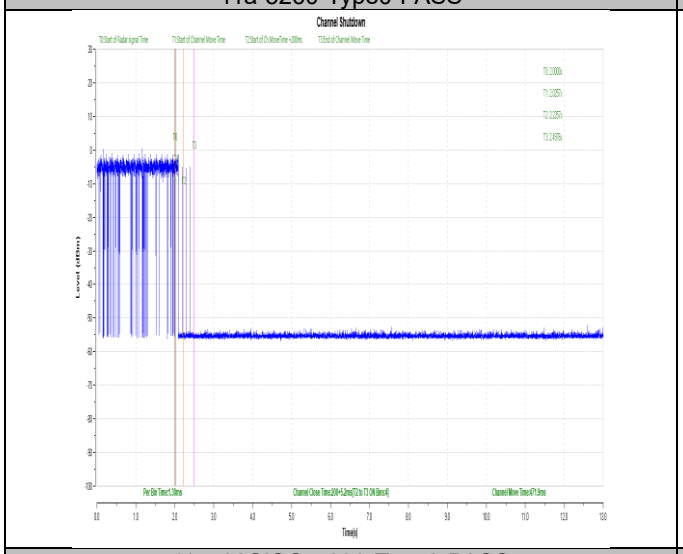


11ac80SISO-5290-Type0-PASS

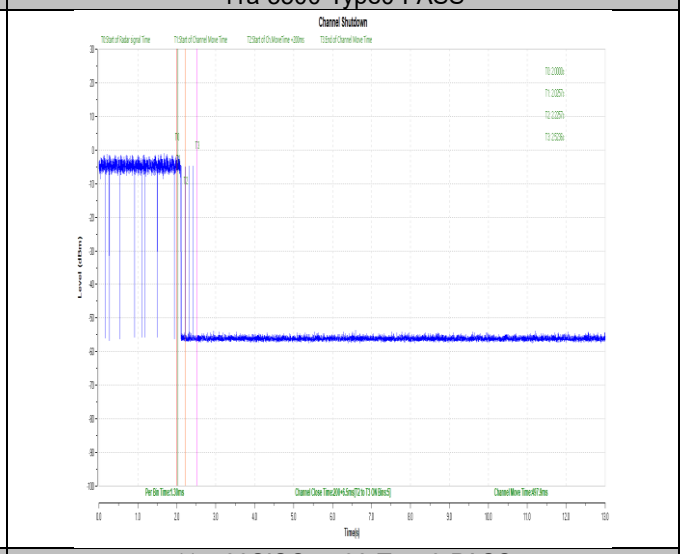


11ac80SISO-5530-Type0-PASS


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

# Non-Occupancy Period

## Test Result

| TestMode | Frequency[MHz] | Result | Limit[s] | Verdict |
|---|---|---|---|---|
| 11a | 5260 | see test graph | ≥1800 | PASS |
| 11a | 5500 | see test graph | ≥1800 | PASS |
| 11ac80SISO | 5290 | see test graph | ≥1800 | PASS |
| 11ac80SISO | 5530 | see test graph | ≥1800 | PASS |


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.

## Test Graphs

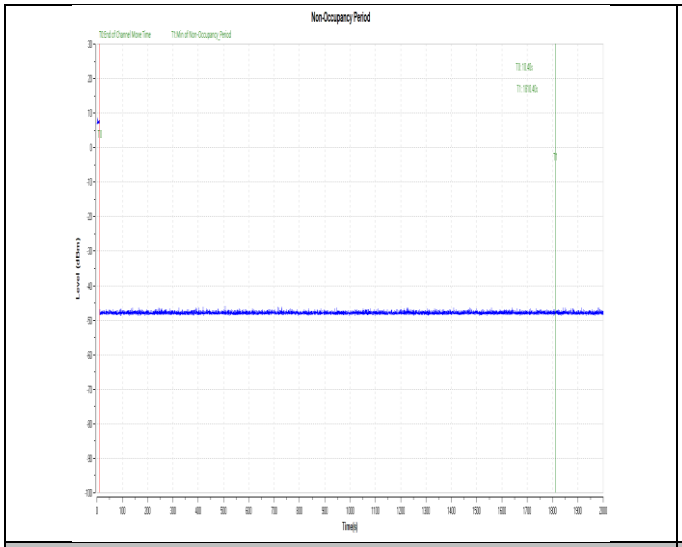


11a-5260-Type0-PASS

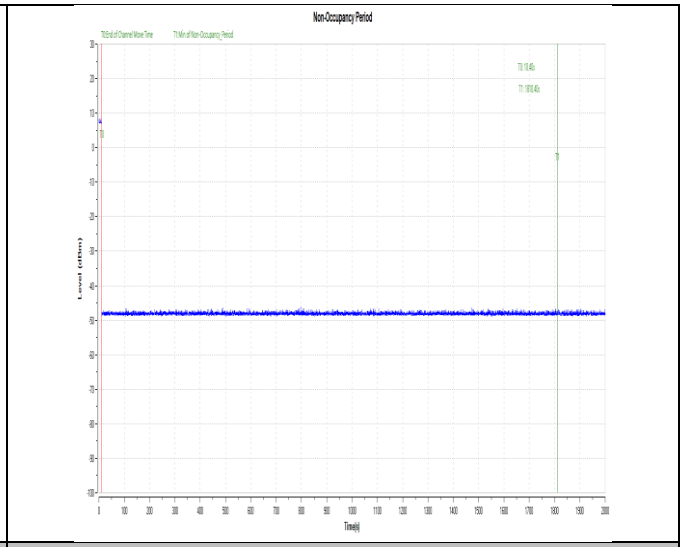


11a-5500-Type0-PASS

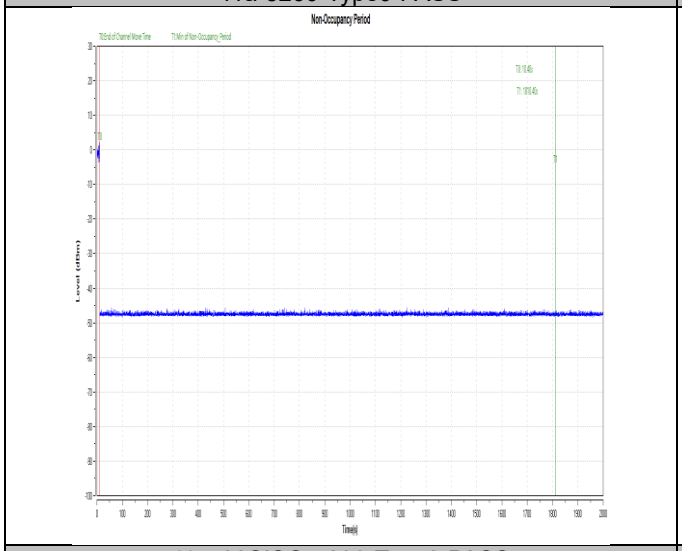


11ac80SISO-5290-Type0-PASS

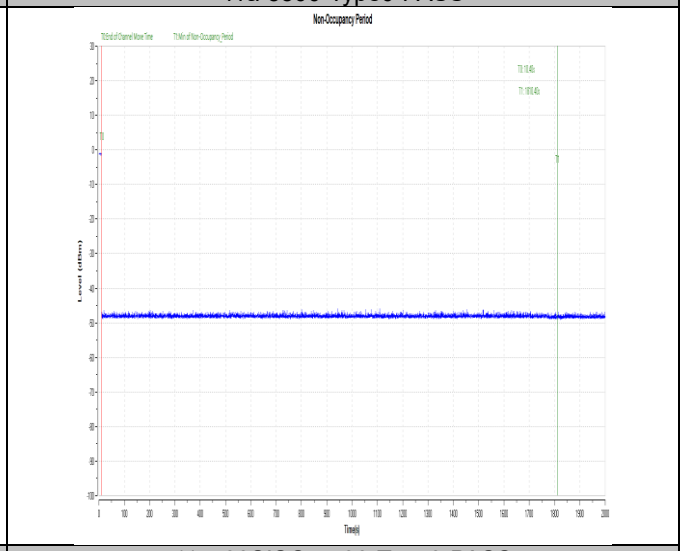


11ac80SISO-5530-Type0-PASS

~The End~


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from TOWE.