


Test Result

Project Number: P-CC26030089

Test Time: 2026-04-12_19.36.24

EUT Name:	EPOS® Reference Station RS 4G-R	Temp.(°C):	23.9
Model Number:	EPOS RS 4G-R	Humidity (%RH):	57
Sample Number:	CC26020161-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH1 P=79
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	

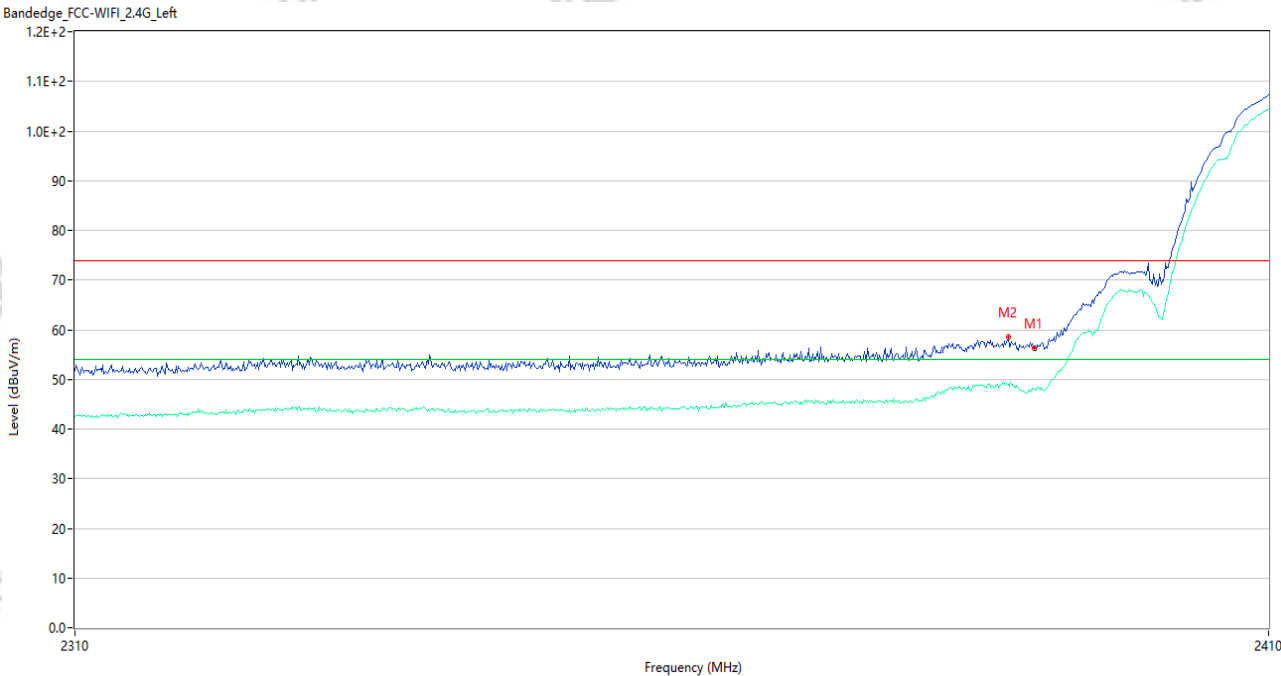


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	56.34	-4.87	74.0	17.66	Peak	78.97	150	Vertical	Pass
1**	2390.000	48.18	-4.87	54.0	5.82	AV	78.97	150	Vertical	Pass
2	2387.800	58.47	-4.75	74.0	15.53	Peak	77.00	150	Vertical	Pass
2**	2387.800	49.07	-4.75	54.0	4.93	AV	77.00	150	Vertical	Pass

Test Result

Project Number: P-CC26030089

Test Time: 2026-04-12_19.34.59

EUT Name:	EPOS® Reference Station RS 4G-R	Temp.(°C):	23.9
Model Number:	EPOS RS 4G-R	Humidity (%RH):	57
Sample Number:	CC26020161-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH1 P=79
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	

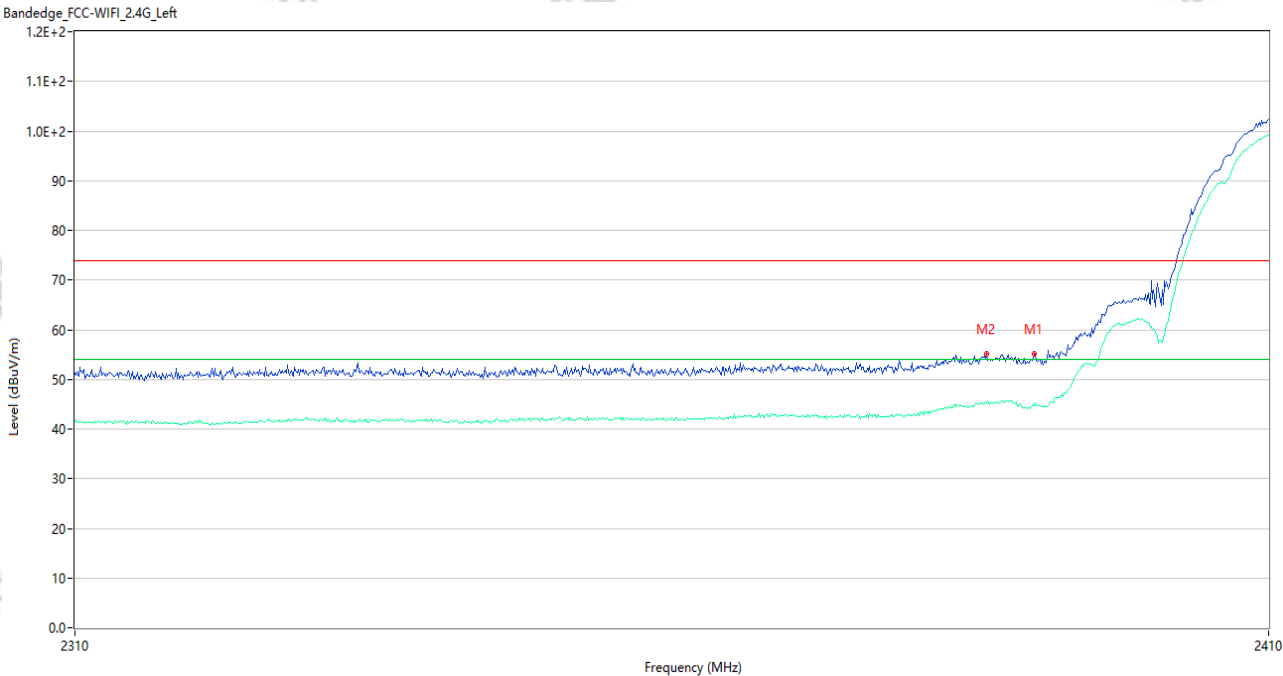


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	55.14	-4.87	74.0	18.86	Peak	74.97	150	Horizontal	Pass
1**	2390.000	44.68	-4.87	54.0	9.32	AV	74.97	150	Horizontal	Pass
2	2386.000	55.25	-4.64	74.0	18.75	Peak	68.00	150	Horizontal	Pass
2**	2386.000	45.25	-4.64	54.0	8.75	AV	68.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26030089

Test Time: 2026-04-12_19.40.05

EUT Name:	EPOS® Reference Station RS 4G-R	Temp.(°C):	23.9
Model Number:	EPOS RS 4G-R	Humidity (%RH):	57
Sample Number:	CC26020161-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH11 P=82
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	

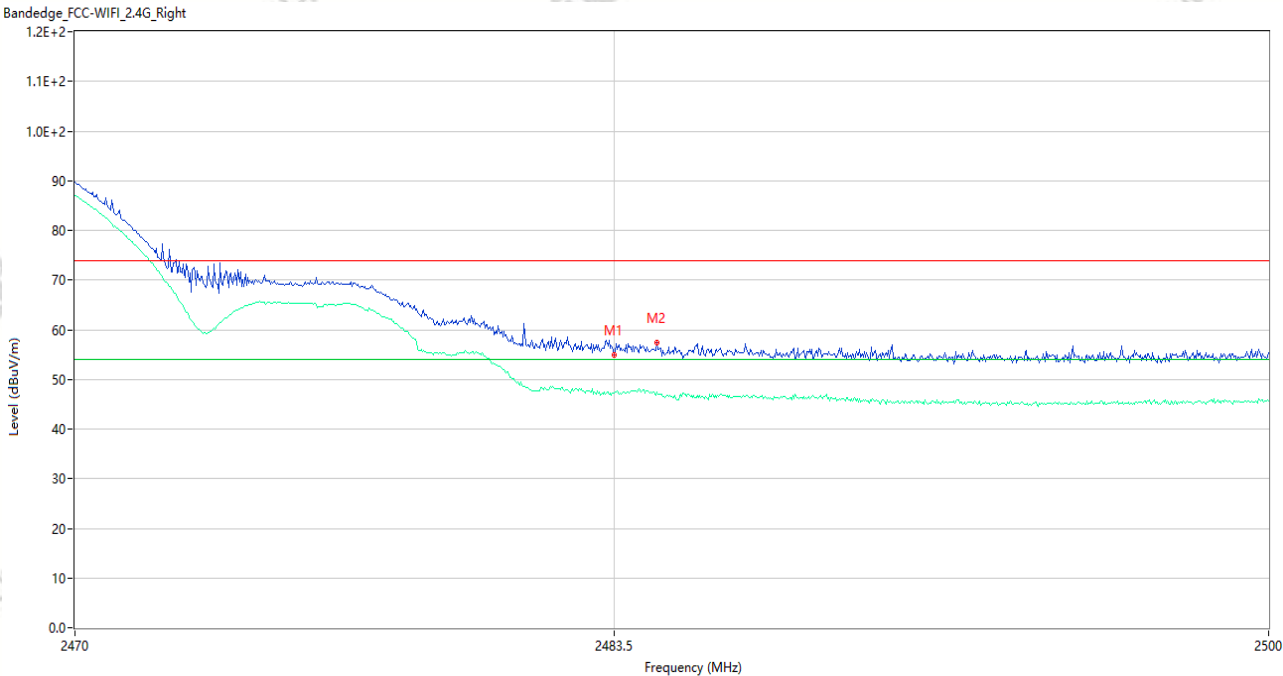


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.88	-3.78	74.0	19.12	Peak	97.00	150	Vertical	Pass
1**	2483.500	47.13	-3.78	54.0	6.87	AV	97.00	150	Vertical	Pass
2	2484.580	57.41	-3.78	74.0	16.59	Peak	80.00	150	Vertical	Pass
2**	2484.580	47.51	-3.78	54.0	6.49	AV	80.00	150	Vertical	Pass

Test Result

Project Number: P-CC26030089

Test Time: 2026-04-12_19.44.29

EUT Name:	EPOS® Reference Station RS 4G-R	Temp.(°C):	23.9
Model Number:	EPOS RS 4G-R	Humidity (%RH):	57
Sample Number:	CC26020161-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH11 P=82
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	

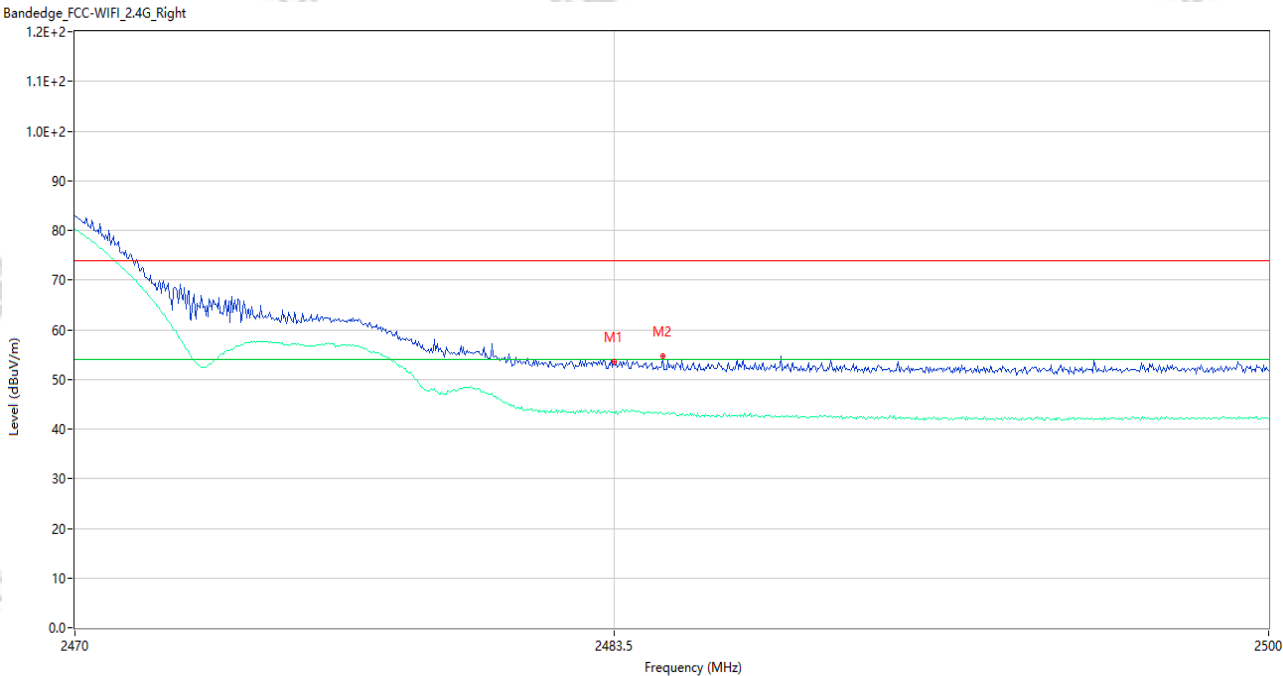

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.61	-3.78	74.0	20.39	Peak	225.00	150	Horizontal	Pass
1**	2483.500	43.28	-3.78	54.0	10.72	AV	225.00	150	Horizontal	Pass
2	2484.730	54.70	-3.78	74.0	19.30	Peak	217.00	150	Horizontal	Pass
2**	2484.730	43.03	-3.78	54.0	10.97	AV	217.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26030089

Test Time: 2026-04-12_19.27.49

EUT Name:	EPOS® Reference Station RS 4G-R	Temp.(°C):	23.9
Model Number:	EPOS RS 4G-R	Humidity (%RH):	57
Sample Number:	CC26020161-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH1 P=75
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	53.38	-4.87	74.0	20.62	Peak	77.00	150	Vertical	Pass
1**	2390.000	44.13	-4.87	54.0	9.87	AV	77.00	150	Vertical	Pass
2	2382.500	55.22	-4.44	74.0	18.78	Peak	77.00	150	Vertical	Pass
2**	2382.500	43.76	-4.44	54.0	10.24	AV	77.00	150	Vertical	Pass

Test Result

Project Number: P-CC26030089

Test Time: 2026-04-12_19.29.45

EUT Name:	EPOS® Reference Station RS 4G-R	Temp.(°C):	23.9
Model Number:	EPOS RS 4G-R	Humidity (%RH):	57
Sample Number:	CC26020161-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH1 P=75
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	

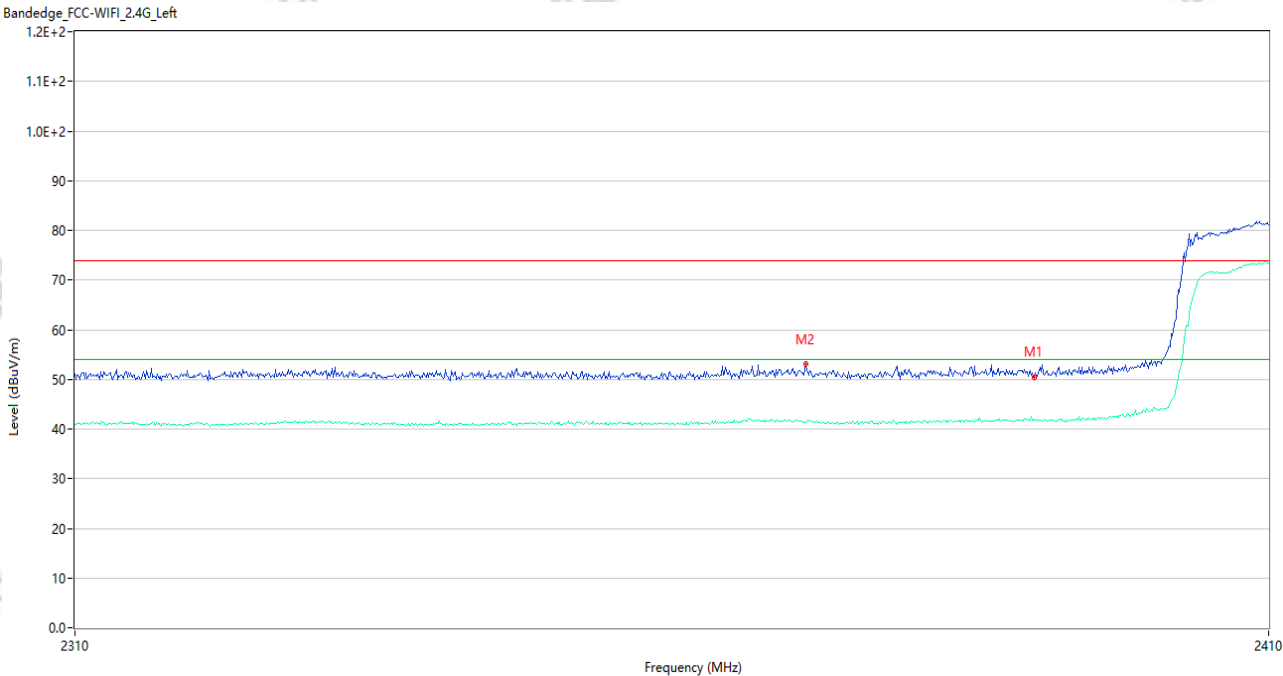


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.49	-4.87	74.0	23.51	Peak	191.04	150	Horizontal	Pass
1**	2390.000	41.83	-4.87	54.0	12.17	AV	191.04	150	Horizontal	Pass
2	2370.700	53.18	-4.02	74.0	20.82	Peak	71.00	150	Horizontal	Pass
2**	2370.700	41.36	-4.02	54.0	12.64	AV	71.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26030089
Test Time: 2026-04-12_19.51.56

EUT Name:	EPOS® Reference Station RS 4G-R	Temp.(°C):	23.9
Model Number:	EPOS RS 4G-R	Humidity (%RH):	57
Sample Number:	CC26020161-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH11 P=82
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	

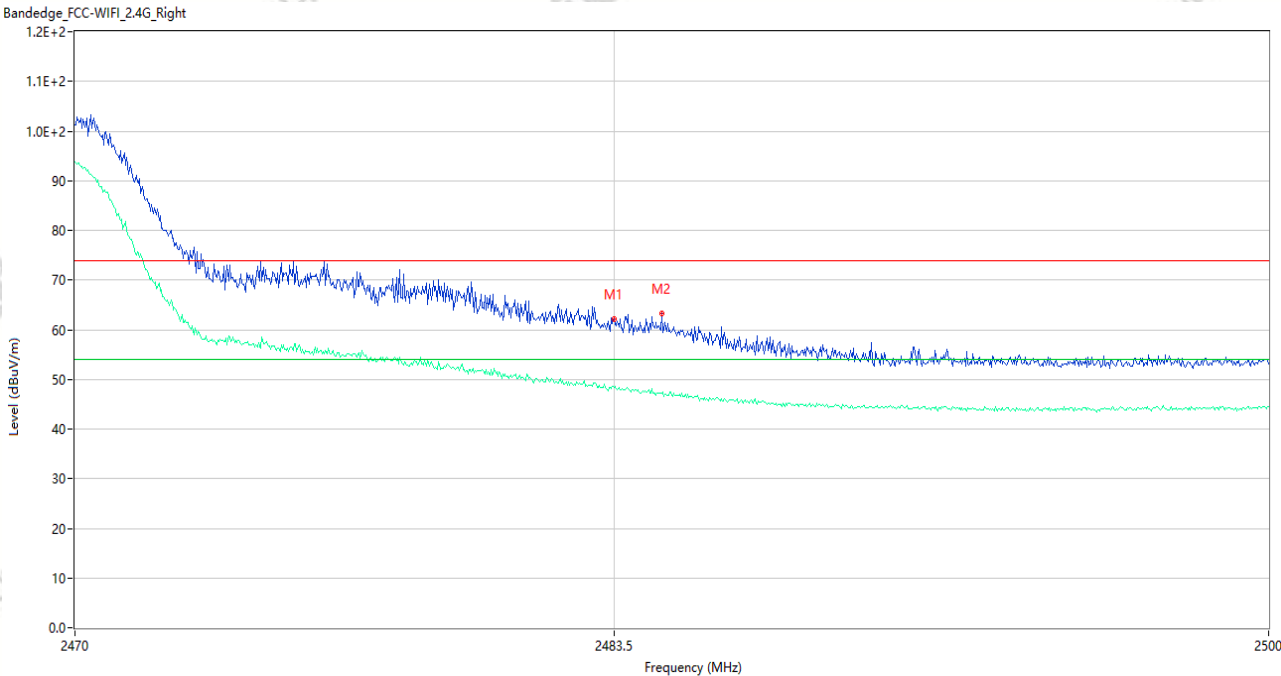


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	62.15	-3.78	74.0	11.85	Peak	78.00	150	Vertical	Pass
1**	2483.500	48.33	-3.78	54.0	5.67	AV	78.00	150	Vertical	Pass
2	2484.700	63.30	-3.78	74.0	10.70	Peak	78.00	150	Vertical	Pass
2**	2484.700	47.26	-3.78	54.0	6.74	AV	78.00	150	Vertical	Pass

Test Result

Project Number: P-CC26030089

Test Time: 2026-04-12_19.48.35

EUT Name:	EPOS® Reference Station RS 4G-R	Temp.(°C):	23.9
Model Number:	EPOS RS 4G-R	Humidity (%RH):	57
Sample Number:	CC26020161-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH11 P=82
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	

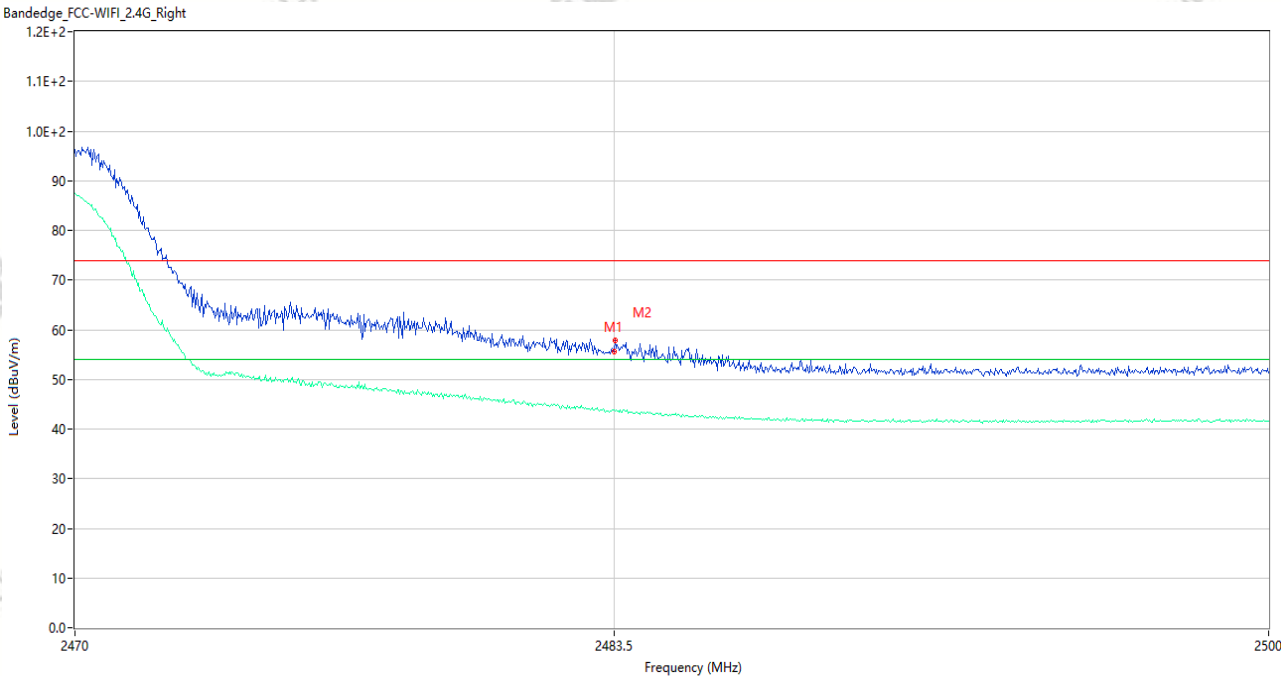


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	55.56	-3.78	74.0	18.44	Peak	61.00	150	Horizontal	Pass
1**	2483.500	43.89	-3.78	54.0	10.11	AV	61.00	150	Horizontal	Pass
2	2483.530	57.96	-3.78	74.0	16.04	Peak	200.00	150	Horizontal	Pass
2**	2483.530	43.60	-3.78	54.0	10.40	AV	200.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26030089

Test Time: 2026-04-12_19.24.22

EUT Name:	EPOS® Reference Station RS 4G-R	Temp.(°C):	23.9
Model Number:	EPOS RS 4G-R	Humidity (%RH):	57
Sample Number:	CC26020161-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH1 P=70
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	

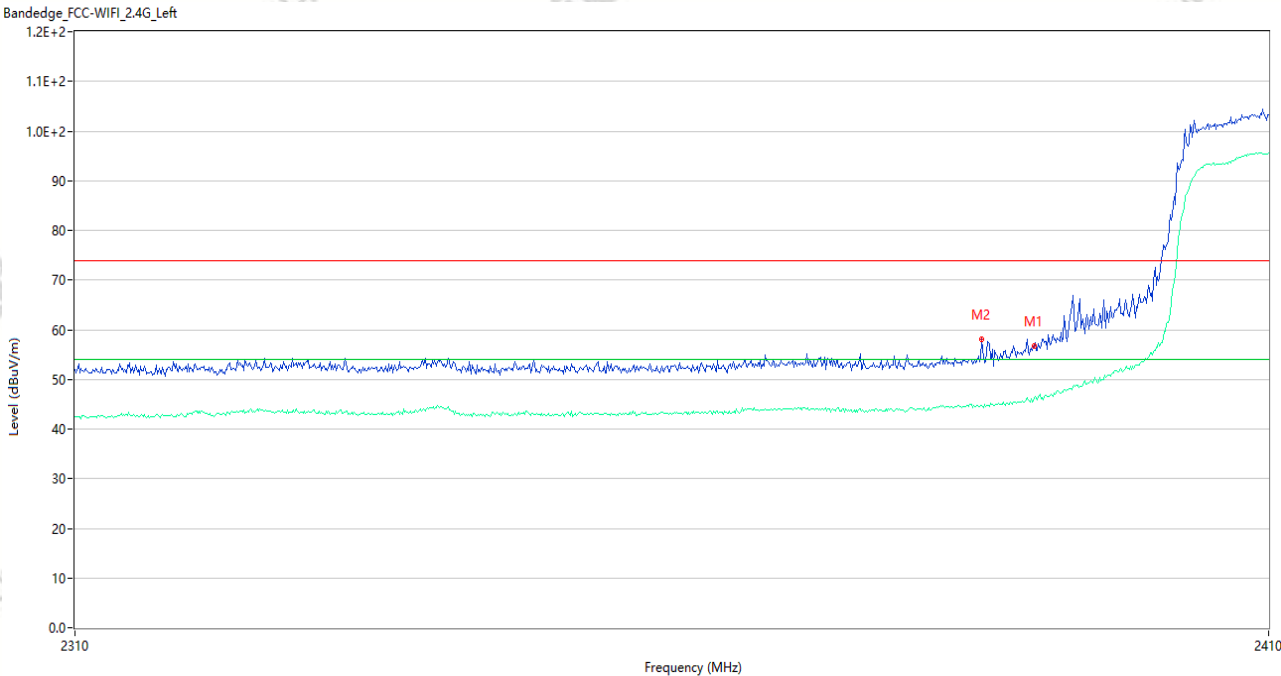


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	56.73	-4.87	74.0	17.27	Peak	78.05	150	Vertical	Pass
1**	2390.000	46.12	-4.87	54.0	7.88	AV	78.05	150	Vertical	Pass
2	2385.600	58.05	-4.62	74.0	15.95	Peak	78.00	150	Vertical	Pass
2**	2385.600	44.67	-4.62	54.0	9.33	AV	78.00	150	Vertical	Pass

Test Result

Project Number: P-CC26030089
Test Time: 2026-04-12_19.22.53

EUT Name:	EPOS® Reference Station RS 4G-R	Temp.(°C):	23.9
Model Number:	EPOS RS 4G-R	Humidity (%RH):	57
Sample Number:	CC26020161-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH1 P=70
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	

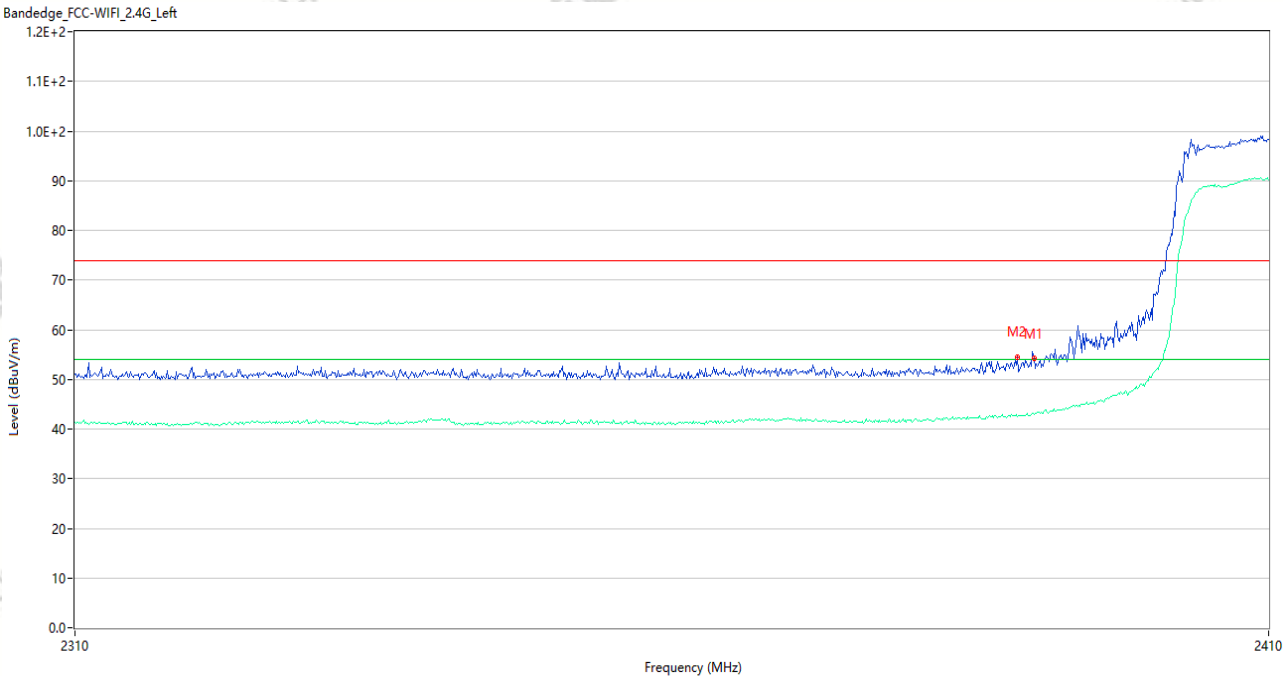


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	54.27	-4.87	74.0	19.73	Peak	71.00	150	Horizontal	Pass
1**	2390.000	43.02	-4.87	54.0	10.98	AV	71.00	150	Horizontal	Pass
2	2388.600	54.42	-4.80	74.0	19.58	Peak	71.00	150	Horizontal	Pass
2**	2388.600	42.40	-4.80	54.0	11.60	AV	71.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26030089

Test Time: 2026-04-12_19.54.53

EUT Name:	EPOS® Reference Station RS 4G-R	Temp.(°C):	23.9
Model Number:	EPOS RS 4G-R	Humidity (%RH):	57
Sample Number:	CC26020161-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH11 P=80
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	

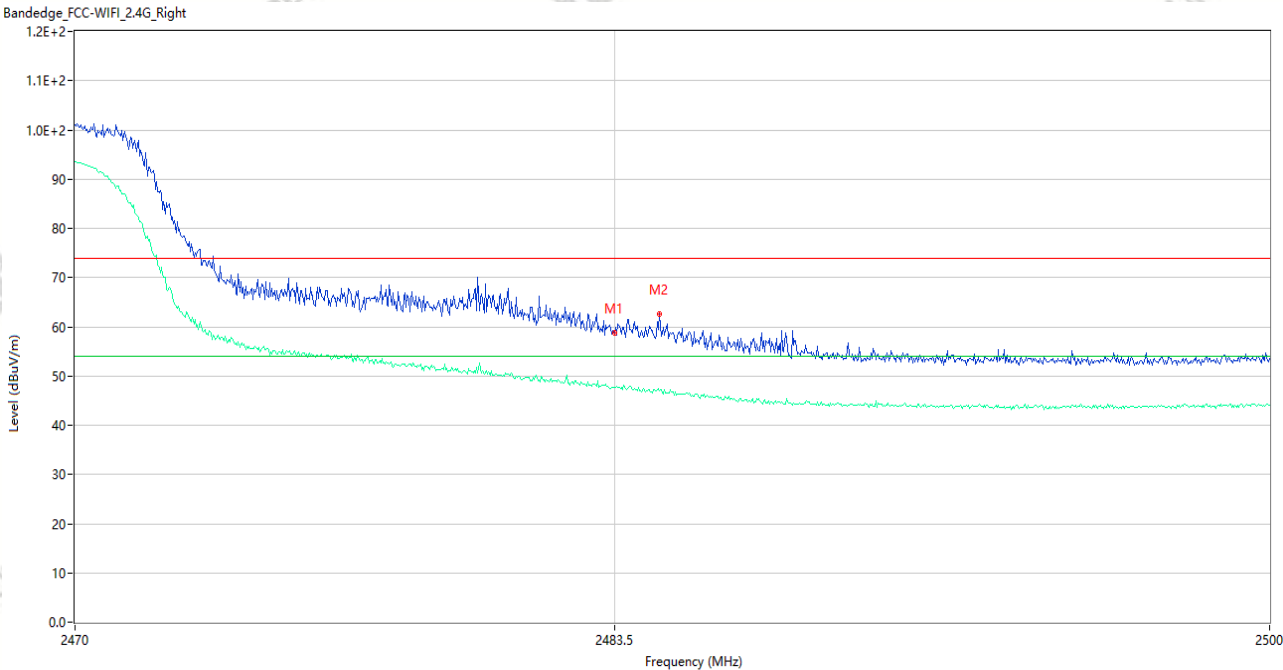


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	58.71	-3.78	74.0	15.29	Peak	96.00	150	Vertical	Pass
1**	2483.500	47.70	-3.78	54.0	6.30	AV	96.00	150	Vertical	Pass
2	2484.640	62.61	-3.78	74.0	11.39	Peak	81.00	150	Vertical	Pass
2**	2484.640	46.98	-3.78	54.0	7.02	AV	81.00	150	Vertical	Pass

Test Result

Project Number: P-CC26030089

Test Time: 2026-04-12_19.56.30

EUT Name:	EPOS® Reference Station RS 4G-R	Temp.(°C):	23.9
Model Number:	EPOS RS 4G-R	Humidity (%RH):	57
Sample Number:	CC26020161-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH11 P=80
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	

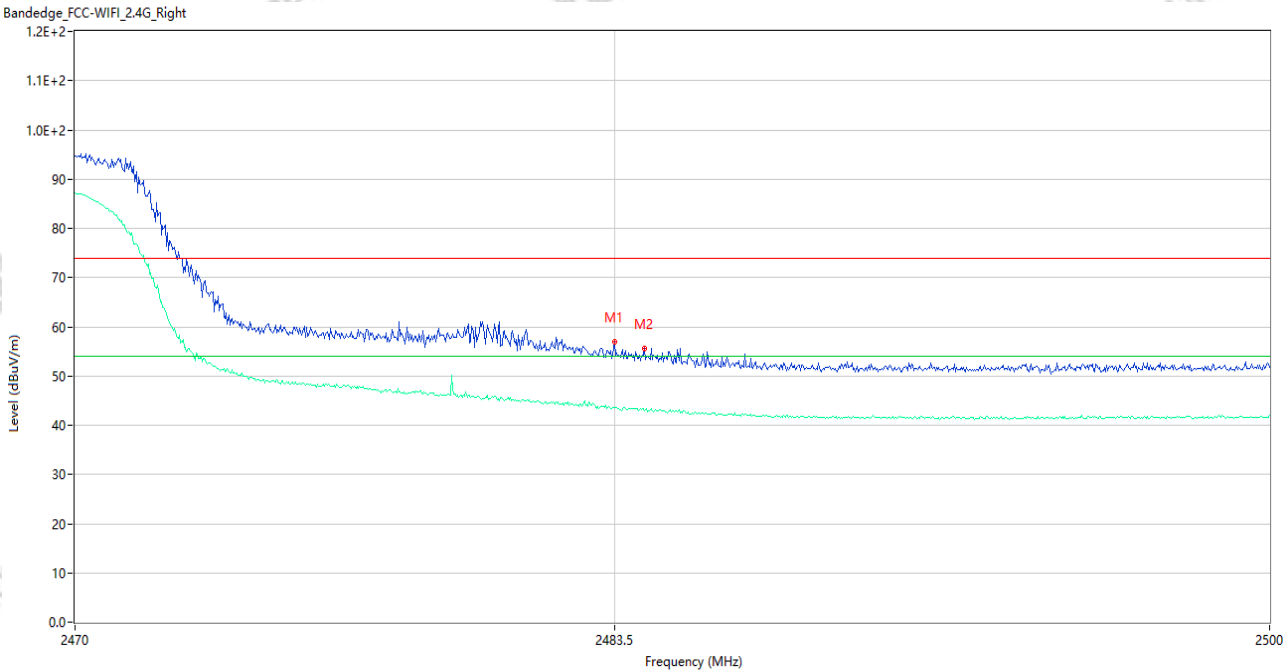

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	56.89	-3.78	74.0	17.11	Peak	72.00	150	Horizontal	Pass
1**	2483.500	43.53	-3.78	54.0	10.47	AV	72.00	150	Horizontal	Pass
2	2484.250	55.63	-3.78	74.0	18.37	Peak	72.00	150	Horizontal	Pass
2**	2484.250	42.88	-3.78	54.0	11.12	AV	72.00	150	Horizontal	Pass