

TEST REPORT

Applicant: Quectel Wireless Solutions Co., Ltd.
EUT Description: Wi-Fi & Bluetooth Module
Model: FCM260S
Brand: QUECTEL
FCC ID: XMR2026FCM260S
Standards: FCC 47 CFR Part 15 Subpart C
Date of Receipt: 2026/03/02
Date of Test: 2026/03/02 to 2026/04/01
Date of Issue: 2026/04/01

TOWE. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

the results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of the model are manufactured with identical electrical and mechanical components. All sample tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. without written approval of TOWE, the test report shall not be reproduced except in full.



A handwritten signature in black ink, appearing to read "Jim Huang", is written over a horizontal line.

Jim Huang
Approved By:

A handwritten signature in black ink, appearing to read "Carey Chen", is written over a horizontal line.

Carey Chen
Reviewed By:

Revision History

Rev.	Issue Date	Description	Revised by
01	2026/04/01	Original	Carey Chen

Summary of Test Results

Clause	FCC Part	Test Items	Result
4.1	§15.203/15.247(b)	Antenna Requirement	PASS
4.2	§15.207	AC Power Line Conducted Emission	PASS
4.3	§15.247 (b)(3)	Output Power	PASS
4.4	§15.247 (a)(2)	Occupied Bandwidth	Reporting purposes only
4.5	§15.247 (e)	Power Spectral Density	PASS
4.6	§15.247(d)	Band Edge for Conducted Emissions	PASS
4.7	§15.247(d)	Spurious RF Conducted Emissions	PASS
4.8	§15.205/15.209	Radiated Spurious emissions and Band Edge	PASS
Test Method: ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, KDB 558074 D01 15.247 Mesa Guidance v05r02. Remark: Pass is EUT meets standard requirements.			

Table of Contents

1	General Description	5
1.1	Lab Information	5
1.1.1	Testing Location	5
1.1.2	Test Facility / Accreditations	5
1.2	Client Information.....	5
1.2.1	Applicant.....	5
1.2.2	Manufacturer	5
1.3	Product Information	6
2	Test Configuration	7
2.1	Test Channel	7
2.2	Worst-case configuration and Mode	7
2.3	Support Unit used in test.....	8
2.4	Test Environment	8
2.5	Test RF Cable.....	8
2.6	Modifications	8
2.7	Test Setup Diagram.....	9
2.7.1	Conducted Configuration	9
2.7.2	Radiated Configuration	10
3	Equipment and Measurement Uncertainty.....	11
3.1	Test Equipment List	11
3.2	Measurement Uncertainty	12
4	Test Results.....	13
4.1	Antenna Requirement	13
4.2	AC Power Line Conducted Emissions	14
4.3	Output Power	17
4.4	Occupied Bandwidth.....	18
4.5	Power Spectral Density	19
4.6	Band Edge for Conducted Emissions.....	20
4.7	Spurious RF Conducted Emissions	21
4.8	Radiated Spurious Emissions and Band Edge	22
5	Test Setup Photos.....	24
	Appendix.....	25

1 General Description

1.1 Lab Information

1.1.1 Testing Location

These measurements tests were conducted at the Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. facility located at F401 and F101, Building E, Hongwei Industrial Zone, Liuxian 3rd Road, Bao'an District, Shenzhen, China. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014
Tel.: +86-755-27212361
Contact Email: info@towewireless.com

1.1.2 Test Facility / Accreditations

A2LA (Certificate Number: 7088.01)

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

FCC Designation No.: CN1353

Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. has been recognized as an accredited testing laboratory.
Test Firm Registration Number: 684095
Designation Number: CN1353.

ISED CAB identifier: CN0152

Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. has been recognized by ISED as an accredited testing laboratory.
CAB identifier: CN0152
Company Number: 31000

1.2 Client Information

1.2.1 Applicant

Applicant:	Quectel Wireless Solutions Co., Ltd.
Address:	No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China

1.2.2 Manufacturer

Manufacturer:	Quectel Wireless Solutions Co., Ltd.
Address:	No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China

1.3 Product Information

EUT Description:	Wi-Fi & Bluetooth Module		
Model No.:	FCM260S		
Brand:	QUECTEL		
Hardware Version:	R1.0		
Software Version:	FCM260SAAR01A04M08		
SN:	E1N25L31T000046		
Modulation Type:	802.11b:	DSSS-DBPSK, DQPSK, CCK	
	802.11g/n:	OFDM-BPSK, QPSK, 16QAM, 64QAM	
	802.11ax:	OFDM/OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM	
Smart System:	☒ SISO	802.11b/g/n/ax	/
	☐ MIMO	802.11n/ax	()TX()RX
	☐ CDD	802.11b/g	()TX()RX
Frequency Range:	2400 ~ 2483.5MHz		
Channel Frequency:	20M bandwidth Channel: 2412 ~ 2462MHz		
Channel Number:	11:	802.11b/g/n20/ax20	
Antenna Type:	PCB Antenna		
Antenna Gain:	Ant (dBi)		
	2		
Remark: The above EUT's information was declared by applicant, please refer to the specifications or user's manual for more detailed description.			

2 Test Configuration

2.1 Test Channel

Frequency Channels							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz	/	

Remark:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Modulation Type	Test Channel	Test Frequency
802.11b/g/n20 /ax20	The Lowest channel (CH1)	2412MHz
	The Middle channel (CH6)	2437MHz
	The Highest channel (CH11)	2462MHz

2.2 Worst-case configuration and Mode

Modulation Type	SISO - Data Rate	CDD/MIMO()TX()RX Data Rate
802.11b	1 Mbps	N/A
802.11g	6 Mbps	N/A
802.11n20	MCS0 (6.5 Mbps)	N/A
802.11ax20	MCS0 (8.6 Mbps)	N/A
Transmitting mode:	Keep the EUT was programmed to be in continuously transmitting mode.	
Normal Link:	Keep the EUT operation to normal function.	

2.3 Support Unit used in test

Description	Manufacturer	Model	Serial Number
Laptop	Dell	P104F	19W9NG3
Laptop	Lenovo	Thinkbook 14 G4+IAP	YX05AZ13
Development Board*	QUECTEL	FCM260S	E1N25LH19000006
Remark: *the information is provided by applicant.			

2.4 Test Environment

Temperature:	Normal: 15°C ~ 35°C
Humidity:	45 ~ 56 % RH Ambient
Voltage:	DC 3.3V
AC Voltage:	AC 120V/60Hz for Conducted Emissions
Remark: The testing environment is within the scope of the EUT user manual and meets the requirements of the standard testing environment.	

2.5 Test RF Cable

For all conducted test items: The offset level is set spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.


Offset = RF cable loss + attenuator factor.

2.6 Modifications


No modifications were made during testing.

2.7 Test Setup Diagram

2.7.1 Conducted Configuration

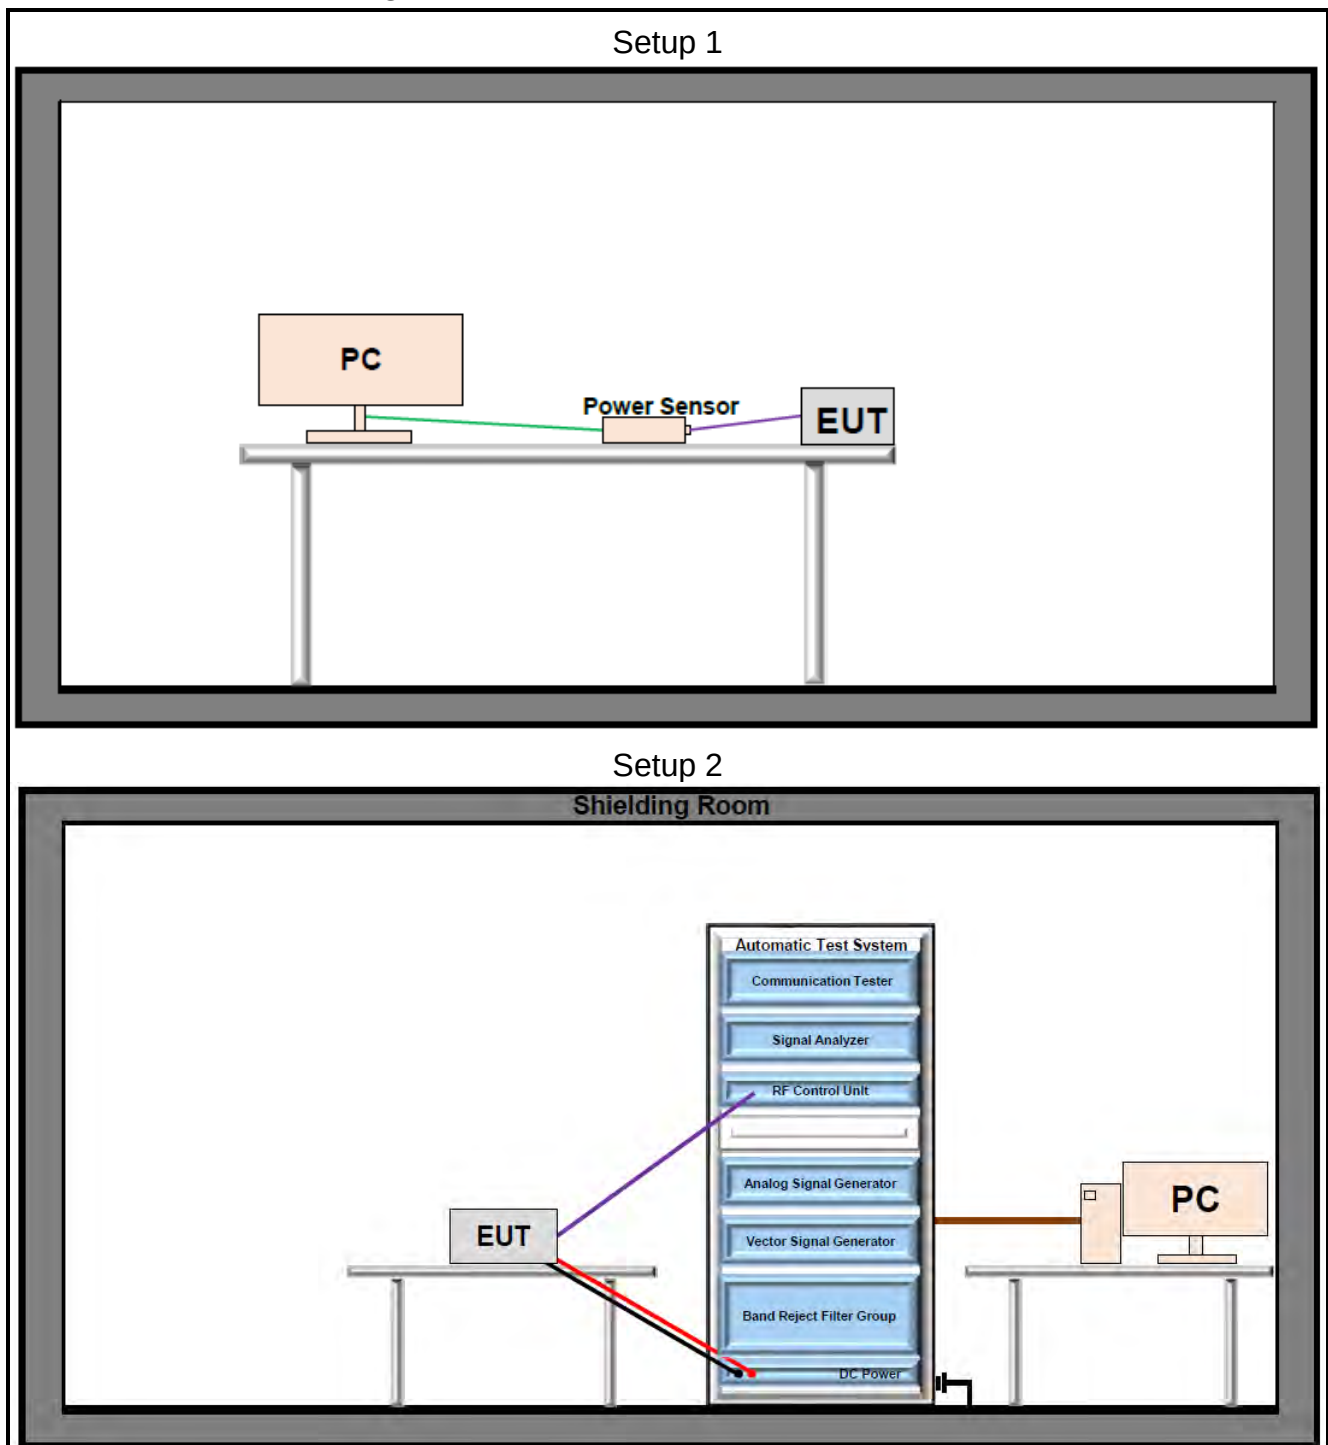

2.7.2 Radiated Configuration

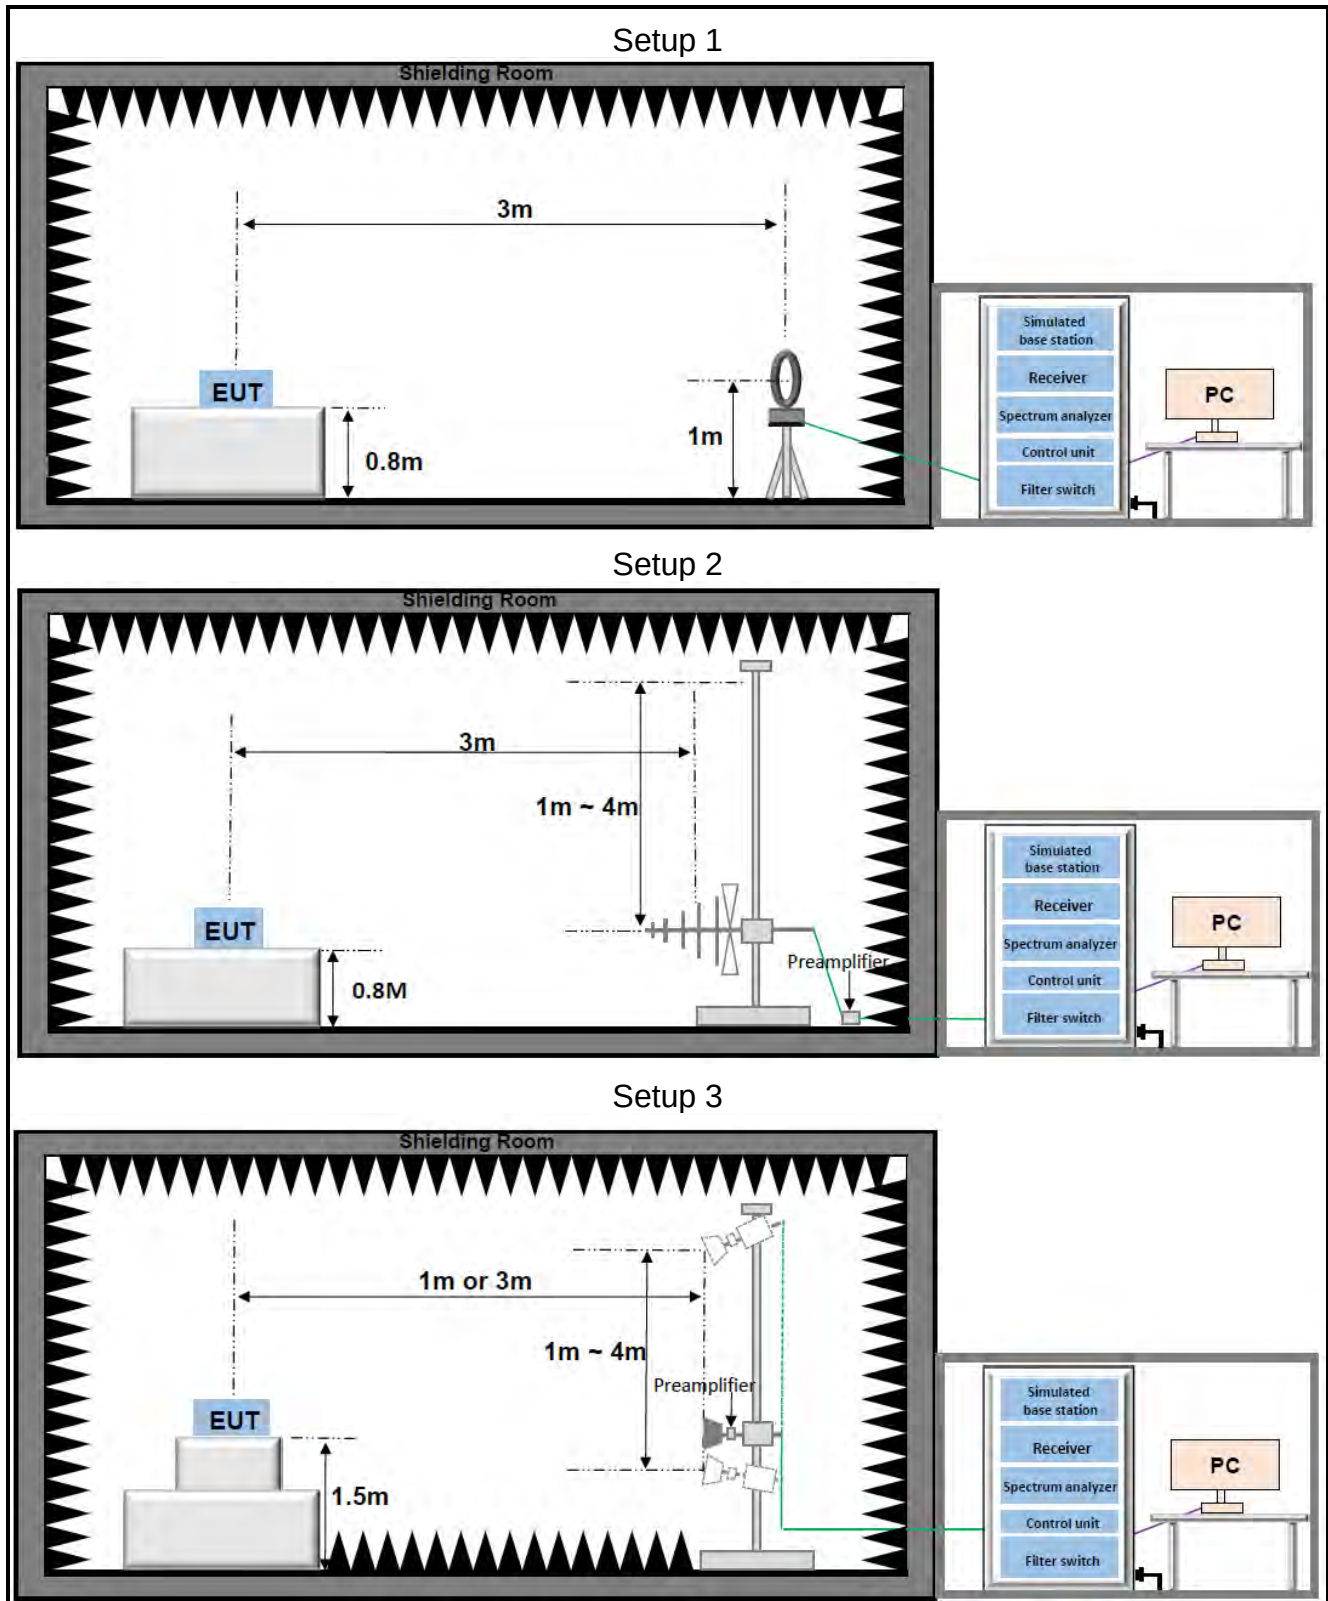

3 Equipment and Measurement Uncertainty

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, whichever is less, and where applicable is traceable to recognized national standards.

3.1 Test Equipment List

RF Conducted					
Description	Manufacturer	Model	S.N.	Last Due	Cal Due
Signal Analyzer	Keysight	N9020A	US46470429	2025/03/14	2026/03/13
				2026/03/05	2027/03/04
Signal Generator	R&S	SMR20	101027	2025/03/11	2026/03/10
				2026/03/05	2027/03/04
Vector Signal Generator	R&S	SMM100A	549353	2025/05/29	2026/05/28
Power Sensor	Anritsu	MA24408A	12520	2025/05/29	2026/05/28
RF Control Unit	Tonscend	JS0806-2	23C80620671	2025/05/29	2026/05/28
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY63440541	2025/05/29	2026/05/28
Attenuator	Yin Saige	SMA-10dBm	N/A	N/A	N/A
Measurement Software	Tonscend	TS1120-3	10659	N/A	N/A

Radiated Emission					
Description	Manufacturer	Model	S.N.	Last Due	Cal Due
Double-Ridged Horn Antennas	Tonscend	HA32-18	806HA003608251015	2025/12/13	2028/12/12
Biconic Logarithmic Periodic Antennas	Tonscend	BLA32-30	80SBLA001011251010	2025/12/13	2028/12/12
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	1290	2023/06/25	2026/06/24
Loop Antenna	Schwarzbeck	FMZB 1519C	1519C-028	2023/06/29	2026/06/28
Signal Analyzer	Keysight	N9020A	MY57120015	2026/01/19	2028/01/18
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY63440541	2025/05/29	2026/05/28
EMI Tester Receiver	Rohde & Schwarz	ESR7	102719	2025/05/29	2026/05/28
Low Noise Amplifier	Tonscend	TAP9K3G40	806JSAP044710251054	2026/01/19	2028/01/18
Low Noise Amplifier	Tonscend	TAP01018050	806JSAF044509251052	2026/01/19	2028/01/18
Low Noise Amplifier	Tonscend	TAP18040048	AP22G806247	2025/03/11	2027/03/10
Hygrometer	BINGYU	HTC-1	N/A	2025/07/25	2026/07/24
Radio Frequency Switch	Townshend	JS0806s	806JSSX019811251028	N/A	N/A
Test Software	Tonscend	TS+	Version: 5.0.0	N/A	N/A

Conducted Emission					
Description	Manufacturer	Model	S.N.	Last Due	Cal Due
EMI Tester Receiver	Rohde & Schwarz	ESR3	103108	2025/05/29	2026/05/28
LISN	Rohde & Schwarz	ENV 216	102836	2026/01/19	2027/01/18
Test software	Rohde & Schwarz	ELEKTRA V4.61	N/A	N/A	N/A

3.2 Measurement Uncertainty

Parameter	U _{lab}
Frequency Error	679.98Hz
Output Power	0.76dB
Conducted Spurious Emissions	2.22dB
Conducted Emissions(150kHz~30MHz)	2.43dB
Radiated Emissions(9kHz~30MHz)	2.40dB
Radiated Emissions(30MHz~1000MHz)	4.66dB
Radiated Emissions(1GHz~18GHz)	5.42dB
Radiated Emissions(18GHz~40GHz)	5.46dB

Uncertainty figures are valid to a confidence level of 95%

4 Test Results

4.1 Antenna Requirement

Standard Applicable:	47 CFR Part 15C Section 15.203 /247(b)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
The antenna gain and type as provided by the manufacturer are as follows: The antenna Type is PCB Antenna. With Antenna gain is 2dBi. Antenna Anti-Replacement Construction: An embedded-in antenna design is used.	

4.2 AC Power Line Conducted Emissions

Limits

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


Test Procedure

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, Section 6.2.

Test Settings


1. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
3. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
4. Set the test-receiver system to Peak detect function and specified bandwidth (if bandwidth =9kHz) with maximum hold mode. Then measurement is also conducted by average detector and Quasi-Peak detector function respectively.
5. Both sides of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Test Setup

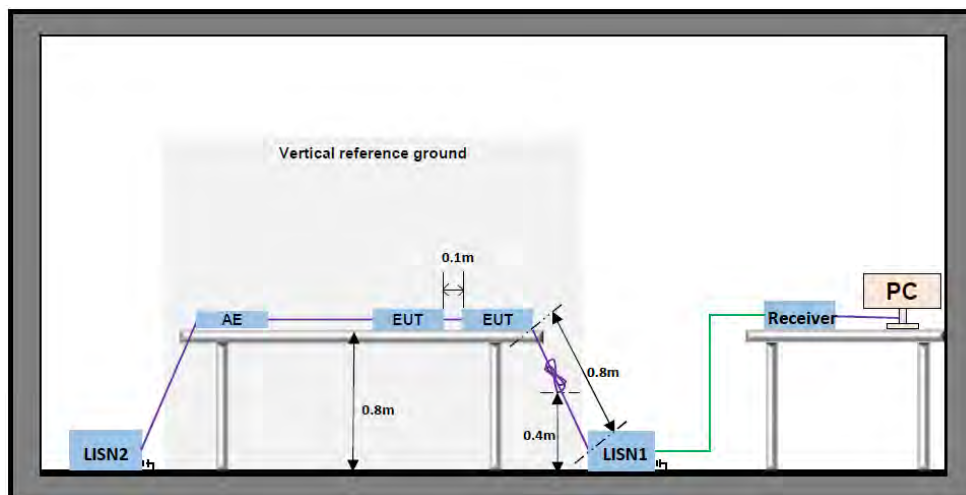

Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

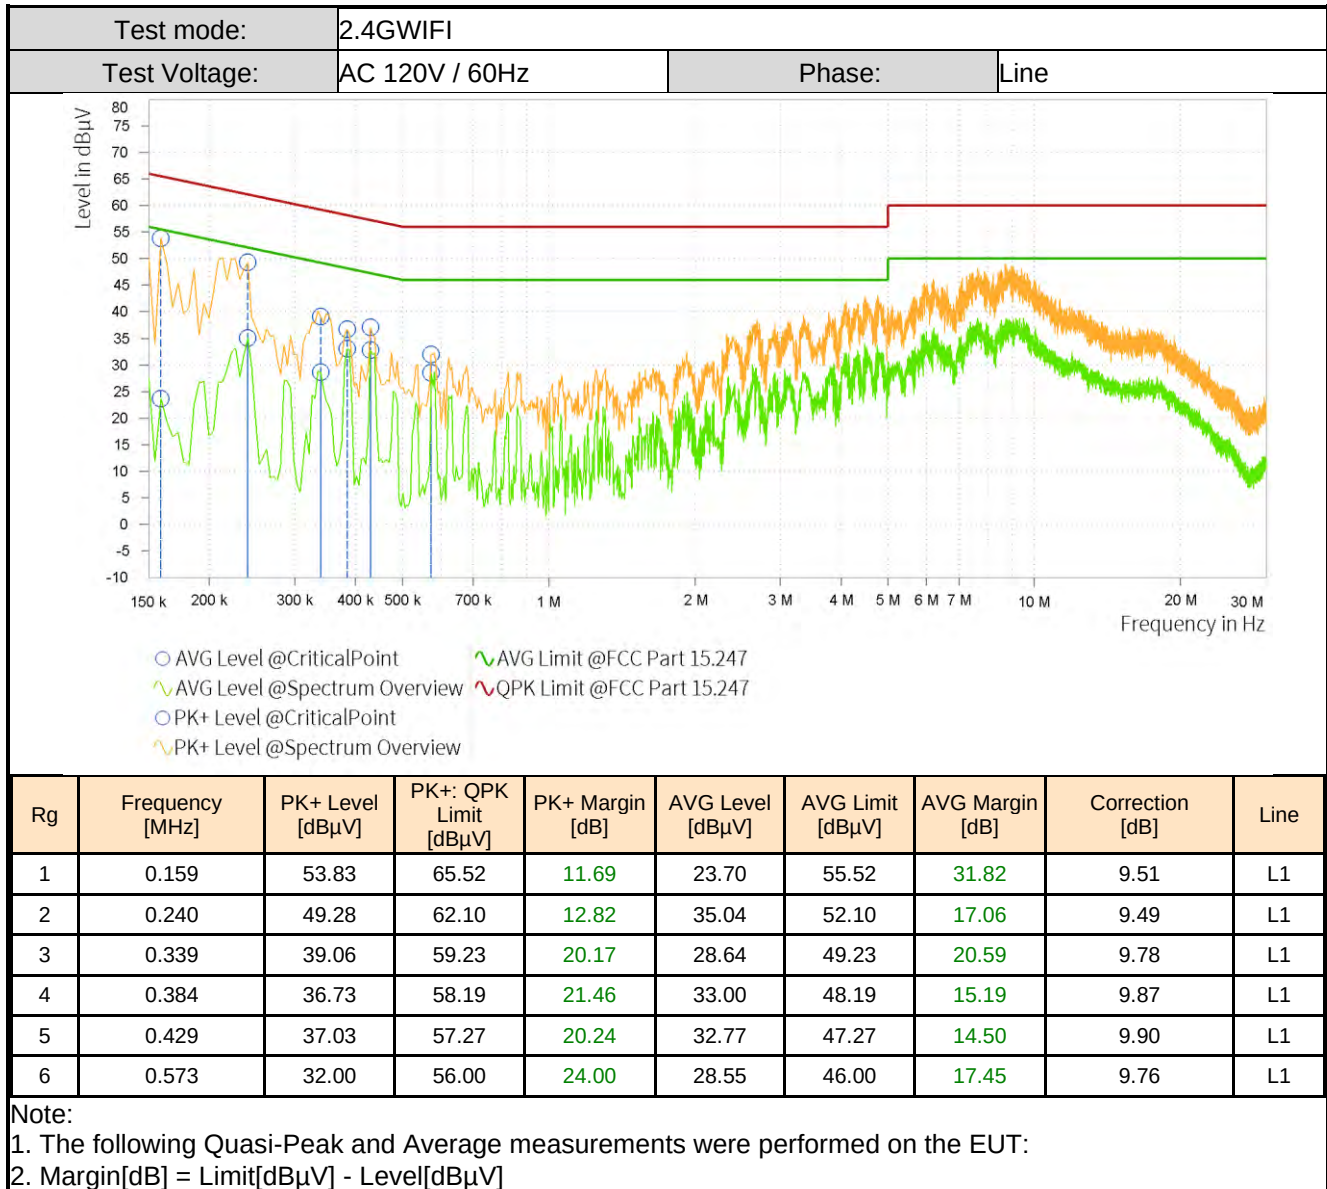Test Result:

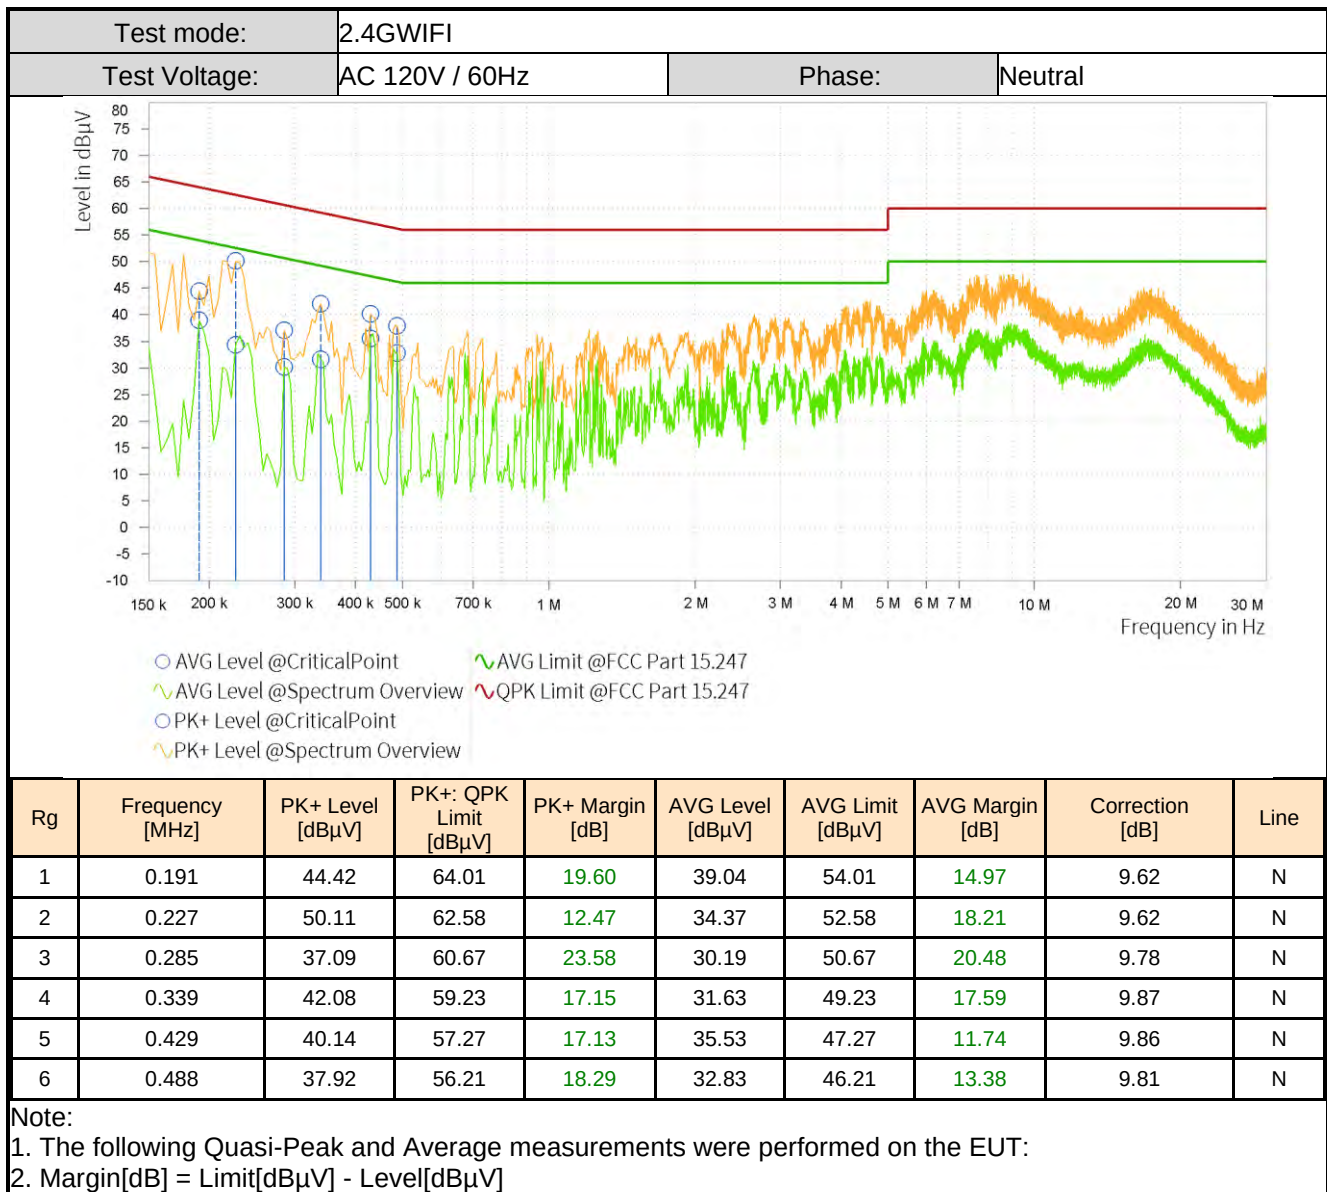

4.3 Output Power

Limits

If with directional antenna gains less than 6 dBi, the limit is 30dBm.

Test Procedure

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Section 11.9.1.2(PKPM1) or 11.9.2.3.2(AVGPM-G)

Test Settings

1. Set to the maximum power setting and enable the EUT transmit continuously.
2. The power output was measured on the EUT antenna port using RF Cable with an attenuator connected to a power sensor. Output power was read directly from the power sensor.
3. Measure and record the results in the test report.

Test Setup

Refer to section 2.7.1 Setup 1 for details.

Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

Test Result

The detailed test data see: **Appendix**.

4.4 Occupied Bandwidth

Limits

DTSBW: The minimum 6 dB bandwidth shall be at least 500 kHz.

99%BW: None, for reporting purposes only.

Test Procedure

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Section 11.8.2 and 6.9.3

Test Settings

1. Set to the maximum power setting and enable the EUT transmit continuously.
2. The transmitter output is connected to a spectrum analyzer:
3. RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz(DTS)
4. RBW = 1% - 5%(99%BW)
5. VBW $\geq$ 3 times the RBW
6. Sweep = Auto
7. Detector = Peak
8. Trace = Max hold
9. The trace was allowed to stabilize
10. Measure and record the results in the test report.

Test Notes

DTS: The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X= 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.

Test Setup

Refer to section 2.7.1 Setup 2 for details.

Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

Test Result

The detailed test data see: **Appendix**.

4.5 Power Spectral Density

Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Section 11.10.2(PKPSD)

Test Settings

1. Set to the maximum power setting and enable the EUT transmit continuously
2. The transmitter output is connected to a spectrum analyzer
3. $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$
(If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.)
4. $\text{VBW} \geq 3$ times the RBW
5. Span = 1.5 times the DTS bandwidth
6. Sweep = Auto
7. Detector = Peak
8. Trace = Max hold
9. The trace was allowed to stabilize
10. Measure and record the results in the test report.

Test Setup

Refer to section 2.7.1 Setup 2 for details.

Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

Test Result

The detailed test data see: **Appendix**.

4.6 Band Edge for Conducted Emissions

Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph 15.247(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Procedure

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Section 11.11.3

Test Settings

1. Set to the maximum power setting and enable the EUT transmit continuously
2. The transmitter output is connected to a spectrum analyzer
3. RBW = 100kHz
4. VBW = 300kHz
5. Point $\geq 2 \times \text{span/RBW}$
6. Sweep = Auto
7. Detector = Peak
8. Trace = Max hold
9. The trace was allowed to stabilize
10. Measure and record the results in the test report

Test Setup

Refer to section 2.7.1 Setup 2 for details.

Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

Test Result

The detailed test data see: **Appendix**.

4.7 Spurious RF Conducted Emissions

Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph 15.247(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Procedure

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Section 11.11.3

Test Settings

1. Set to the maximum power setting and enable the EUT transmit continuously.
2. Activate frequency hopping function if necessary.
3. The transmitter output is connected to a spectrum analyzer
4. The spectrum from 30MHz - 26.5GHz
5. RBW = 100kHz
6. VBW = 300kHz
7. Sweep = Auto
8. Detector = Peak
9. Trace = Max hold
10. The trace was allowed to stabilize
11. Measure and record the results in the test report

Test Setup

Refer to section 2.7.1 Setup 2 for details.

Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

Test Result

The detailed test data see: **Appendix**.

4.8 Radiated Spurious Emissions and Band Edge

Limits

Spurious emissions are permitted in an of the frequency bands:

MHz	MHz	MHz	MHz	GHz	GHz
0.090 - 0.110	12.29 - 12.293	149.9 - 150.05	1660 - 1710	4.5 - 5.15	14.47 - 14.5
0.495 - 0.505	12.51975 - 12.52025	156.52475 - 156.52525	1718.8 - 1722.2	5.35 - 5.46	15.35 - 16.2
2.1735 - 2.1905	12.5767 - 12.57725	156.7 - 156.9	2200 - 2300	7.25 - 7.75	17.7 - 21.4
4.125 - 128	13.36 - 13.41	162.0125 - 167.17	2310 - 2390	8.025 - 8.5	22.01 - 23.12
4.17725 - 4.17775	16.42 - 16.423	167.72 - 173.2	2483.5 - 2500	9.0 - 9.2	23.6 - 24.0
4.20725 - 4.20775	16.69475 - 16.69525	240 - 285	2655 - 2900	9.3 - 9.5	31.2 - 31.8
6.215 - 6.218	1680425 - 1680475	322 - 335.4	3260 - 3267	10.6 - 12.7	36.43 - 36.5
6.26775 - 6.26825	25.5 - 25.67	399.9 - 410	3332 - 3339	13.25 - 13.4	
6.31175 - 6.31225	37.5 - 38.25	608 - 614	3345.8 - 3358		
8.291 - 8.294	73 - 74.6	960 - 1240	3600 - 4400		
8.362 - 8.366	74.8 - 75.2	1300 - 1427			
8.37625 - 8.38675	108 - 121.94	1435 - 1626.5			
8.41425 - 8.41475	123 - 138	1645.5 - 1646.5			

Radiated disturbance of an intentional radiator:

Frequency	Field strength ($\mu\text{V/m}$)	Limit (dB $\mu\text{V/m}$)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	74.0	Peak	3
		54.0	Average	

Test Procedure

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Section 6.4 & 6.5 & 6.6

Test Settings

- For radiated emissions measurements performed at frequencies less than or equal to 1GHz, the EUT shall be placed on a RF-transparent table or support at a nominal height of 80cm above the reference ground plane.
- For radiated emissions measurements performed at frequencies above 1GHz, the EUT shall be placed on a RF-transparent table or support at a nominal height of 150cm above the ground plane.
- Radiated measurements shall be made with the measurement antenna positioned in both horizontal and vertical polarization. The measurement antenna shall be varied from 1m to 4m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level (i.e, field strength or received power), when orienting the measurement antenna in vertical polarization, the minimum height of the lowest element of the antenna shall clear the site reference ground plane by at least 25cm.
- For each suspected emission, the EUT was ranged its worst case and then tune the antenna tower(from 1~4m) and turntable(from 0~360°) find the maximum reading. Preamplifier and a high pass filter are used for the test in order get better signal level comply with the guidelines.
- Set to the maximum power setting and enable the EUT transmit continuously.
- The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
- spectrum analyzer setting:
Measurements 30MHz ~ 1000MHz: RBW = 120 kHz; VBW $\geq$ 300 kHz; Detector = Peak

Measurements Above 1000MHz: RBW = 1 MHz; VBW $\geq$ 3 MHz; Detector = Peak

Average Measurements Above 1000MHz:

RBW = 1 MHz, VBW $\geq$ 1/T, with peak detector for average measurements.

8. The field strength is calculated by adding the Antenna Factor, Cable Factor. The basic equation with a sample calculation is as follows:

Level = Reading(dB μ V) + Factor(dB):

Factor = Cable Factor(dB) + AF(dB/m) - Preamplifier gain(dB)

AF = Antenna Factor(dB/m)

Margin = Limit(dB μ V/m) – Level(dB μ V/m)

9. Repeat above procedures until all frequencies measured was complete.
10. Measure and record the results in the test report.

Test Notes

1. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
2. Radiated spurious emissions were investigated from 9kHz to 30MHz, 30MHz-1GHz and above 1GHz. the disturbance between 9kHz to 30MHz and 18GHz to 40GHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be recorded, so only the harmonics had been displayed.
3. These frequencies which near "-" should be ignored because they are Fundamental frequency.

Test Setup

Refer to section 2.7.2 for details.

Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

Test Result

The detailed test data see: **Appendix.**

5 Test Setup Photos


The detailed test data see: **Appendix A - BLEWIFI Setup Photos**

Appendix

DTS Bandwidth Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11b	Ant1	2412	9.040	2407.480	2416.520	0.5	PASS
11b	Ant1	2437	8.560	2432.480	2441.040	0.5	PASS
11b	Ant1	2462	9.000	2458.000	2467.000	0.5	PASS
11g	Ant1	2412	16.160	2404.000	2420.160	0.5	PASS
11g	Ant1	2437	16.120	2428.800	2444.920	0.5	PASS
11g	Ant1	2462	16.160	2454.040	2470.200	0.5	PASS
11n20SISO	Ant1	2412	17.560	2403.240	2420.800	0.5	PASS
11n20SISO	Ant1	2437	17.120	2428.240	2445.360	0.5	PASS
11n20SISO	Ant1	2462	17.200	2453.600	2470.800	0.5	PASS
11ax20SISO	Ant1	2412	18.600	2402.800	2421.400	0.5	PASS
11ax20SISO	Ant1	2437	18.600	2427.600	2446.200	0.5	PASS
11ax20SISO	Ant1	2462	18.760	2452.720	2471.480	0.5	PASS

Test Graphs

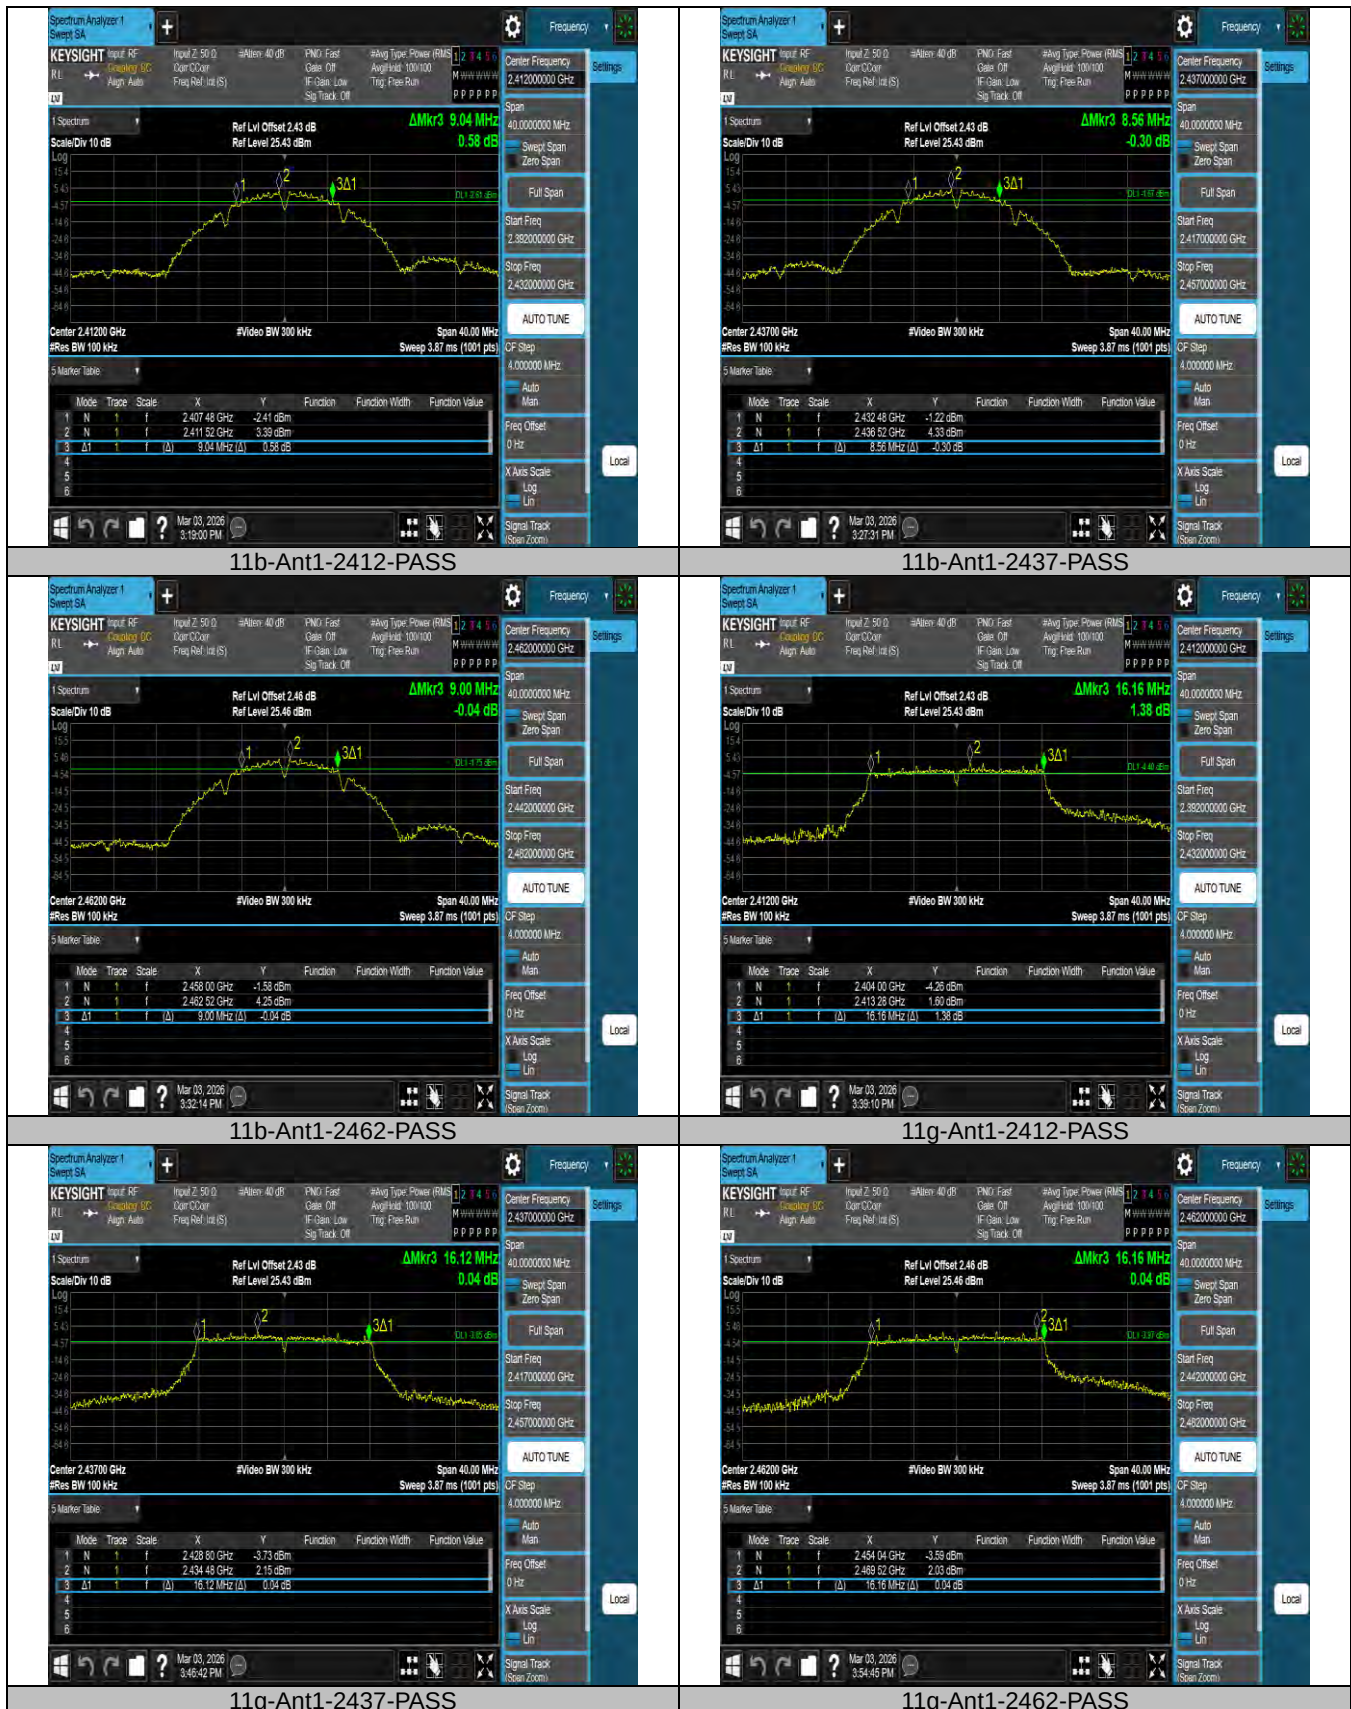



11n20SISO-Ant1-2412-PASS



11n20SISO-Ant1-2437-PASS



11n20SISO-Ant1-2462-PASS



11ax20SISO-Ant1-2412-PASS



11ax20SISO-Ant1-2437-PASS





11ax20SISO-Ant1-2462-PASS

Occupied Channel Bandwidth Test Result

TestMode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11b	Ant1	2412	13.611	2405.3912	2419.0022	---	---
11b	Ant1	2437	13.404	2430.1088	2443.5128	---	---
11b	Ant1	2462	13.467	2455.5318	2468.9988	---	---
11g	Ant1	2412	17.198	2403.5580	2420.7560	---	---
11g	Ant1	2437	17.013	2428.4391	2445.4521	---	---
11g	Ant1	2462	17.263	2453.5389	2470.8019	---	---
11n20SISO	Ant1	2412	18.056	2403.0674	2421.1234	---	---
11n20SISO	Ant1	2437	17.858	2428.0095	2445.8675	---	---
11n20SISO	Ant1	2462	18.017	2453.1260	2471.1430	---	---
11ax20SISO	Ant1	2412	19.072	2402.5417	2421.6137	---	---
11ax20SISO	Ant1	2437	18.991	2427.4882	2446.4792	---	---
11ax20SISO	Ant1	2462	19.060	2452.5384	2471.5984	---	---

Test Graphs



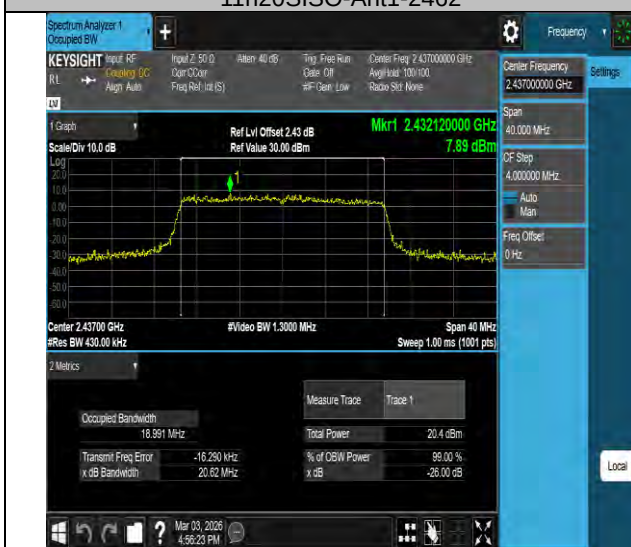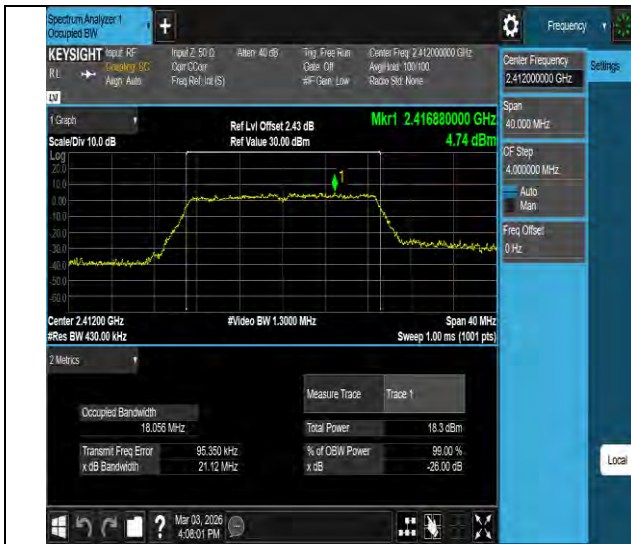


**Maximum conducted output power
Test Result**


TestMode	Frequency [MHz]	Conducted Average Power[dBm]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
11b	2412	16.475	18.971	≤30.00	PASS
	2437	16.125	18.592	≤30.00	PASS
	2462	16.188	18.911	≤30.00	PASS
11g	2412	13.212	20.418	≤30.00	PASS
	2437	13.122	20.262	≤30.00	PASS
	2462	12.868	20.054	≤30.00	PASS
11n20	2412	12.841	20.436	≤30.00	PASS
	2437	12.153	20.823	≤30.00	PASS
	2462	12.336	20.568	≤30.00	PASS
11ax20	2412	11.443	21.445	≤30.00	PASS
	2437	11.352	21.516	≤30.00	PASS
	2462	11.436	21.168	≤30.00	PASS

Maximum power spectral density Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11b	Ant1	2412	-10.54	≤8.00	PASS
11b	Ant1	2437	-9.67	≤8.00	PASS
11b	Ant1	2462	-9.56	≤8.00	PASS
11g	Ant1	2412	-12.99	≤8.00	PASS
11g	Ant1	2437	-12.66	≤8.00	PASS
11g	Ant1	2462	-12.26	≤8.00	PASS
11n20SISO	Ant1	2412	-13.39	≤8.00	PASS
11n20SISO	Ant1	2437	-12.14	≤8.00	PASS
11n20SISO	Ant1	2462	-13.13	≤8.00	PASS
11ax20SISO	Ant1	2412	-12.72	≤8.00	PASS
11ax20SISO	Ant1	2437	-12.28	≤8.00	PASS
11ax20SISO	Ant1	2462	-12.31	≤8.00	PASS

Test Graphs

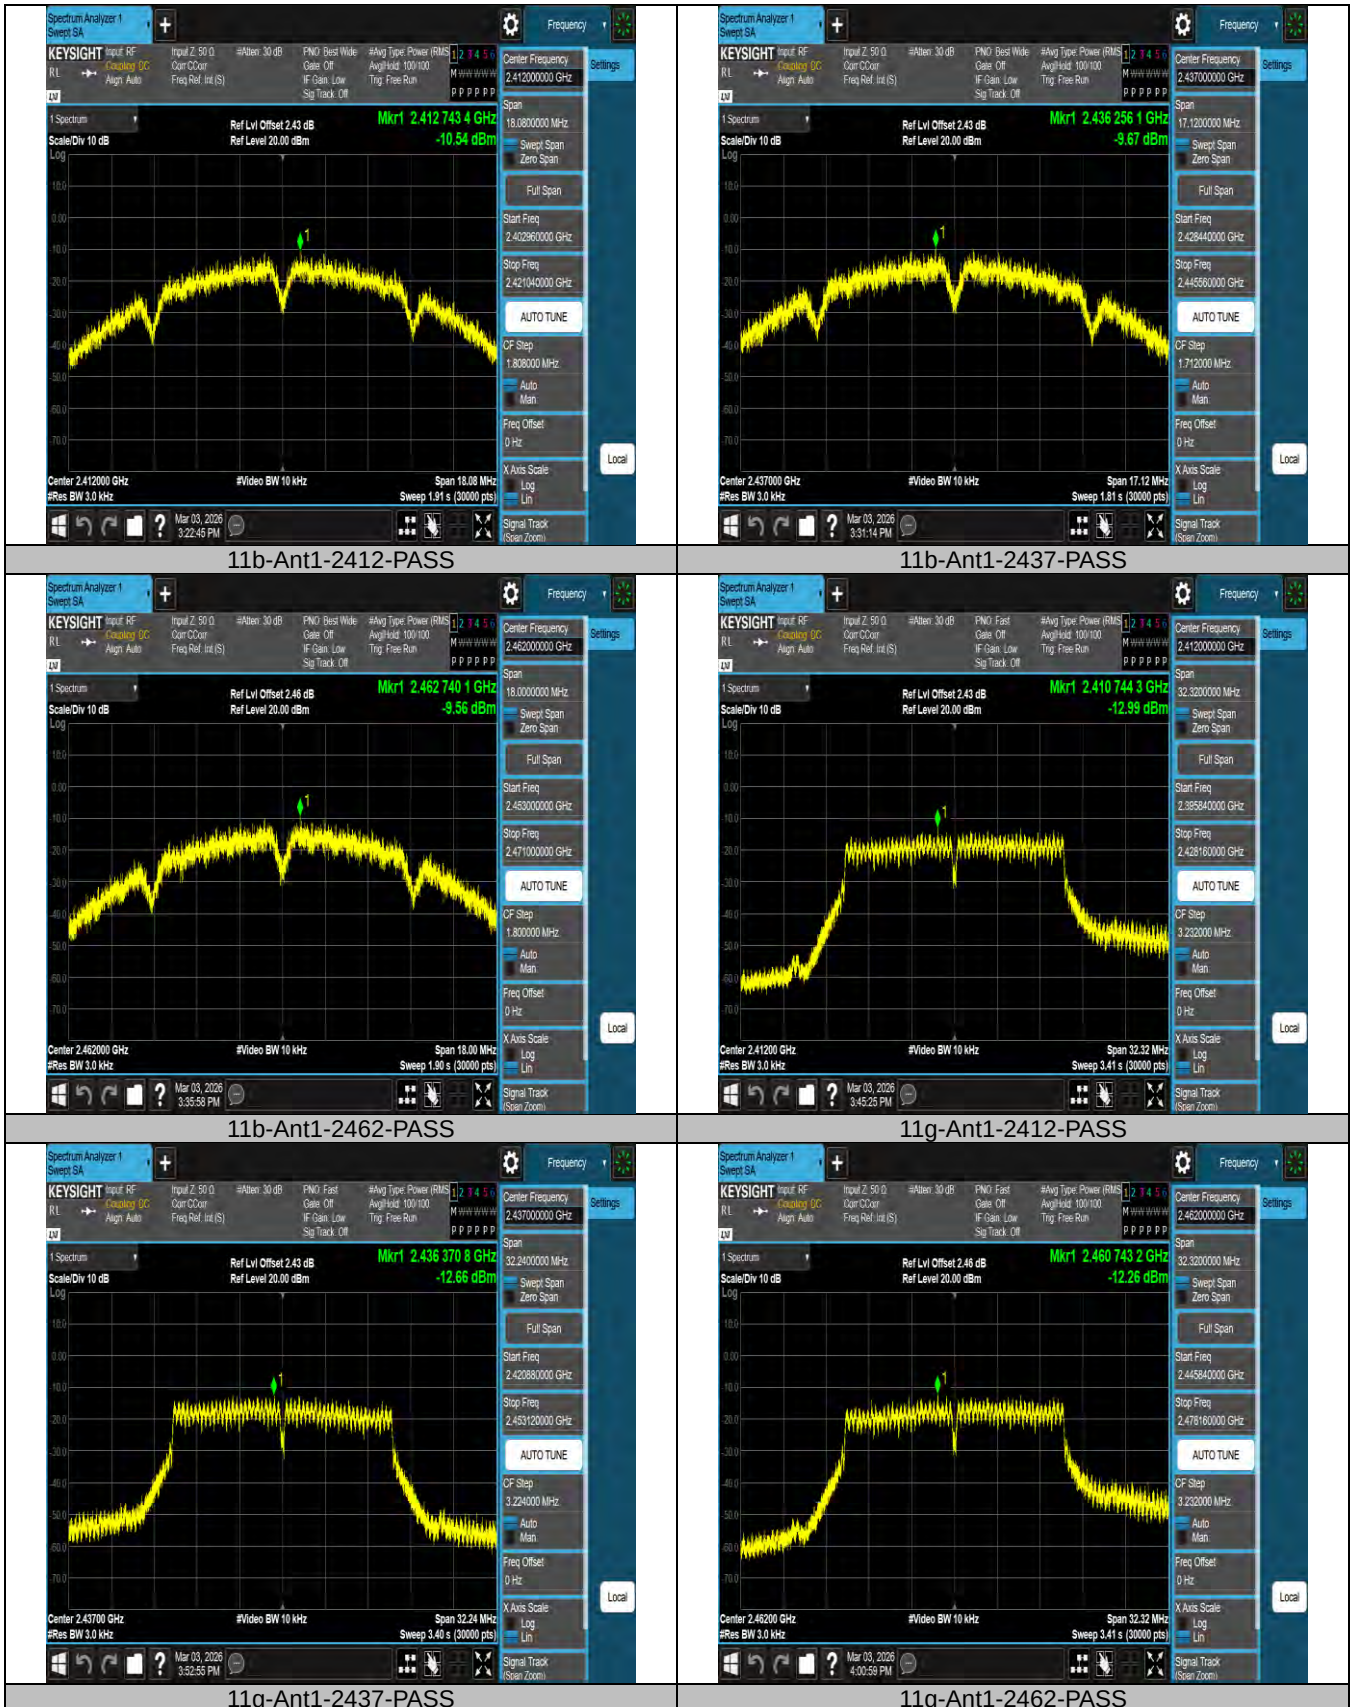


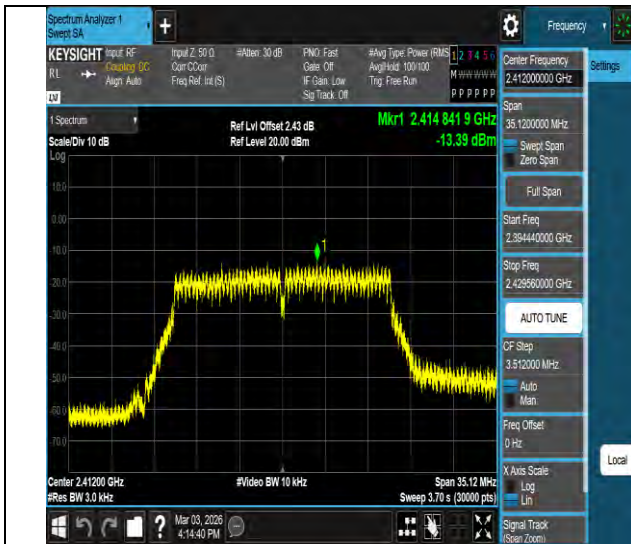

11n20SISO-Ant1-2412-PASS




11n20SISO-Ant1-2437-PASS

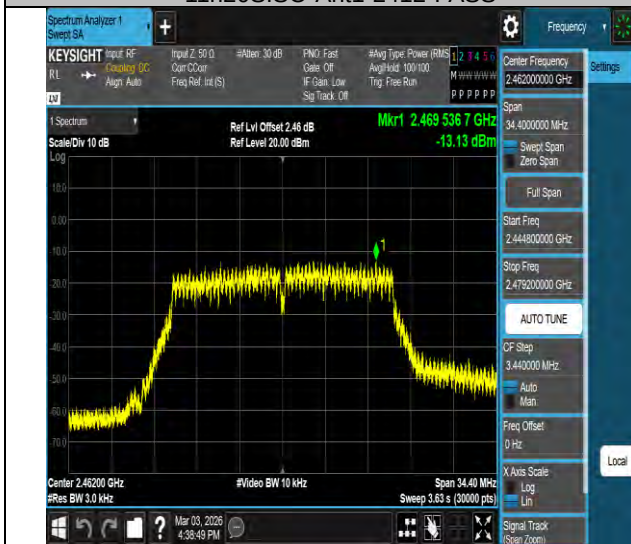

11n20SISO-Ant1-2462-PASS



11ax20SISO-Ant1-2412-PASS

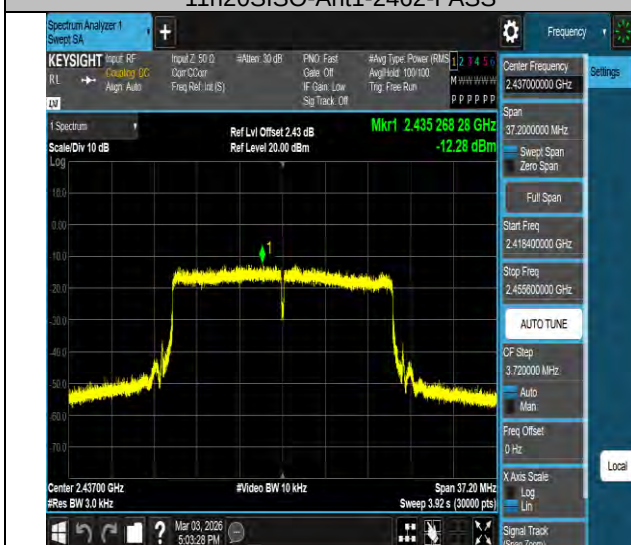

11ax20SISO-Ant1-2437-PASS




11ax20SISO-Ant1-2462-PASS

Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11b	Ant1	Low	2412	3.36	-44.01	≤-16.64	PASS
11b	Ant1	High	2462	4.19	-51.15	≤-15.81	PASS
11g	Ant1	Low	2412	1.50	-36.3	≤-18.5	PASS
11g	Ant1	High	2462	2.65	-38.64	≤-17.35	PASS
11n20SISO	Ant1	Low	2412	1.30	-41.04	≤-18.7	PASS
11n20SISO	Ant1	High	2462	2.84	-36.55	≤-17.16	PASS
11ax20SISO	Ant1	Low	2412	0.24	-37.13	≤-19.77	PASS
11ax20SISO	Ant1	High	2462	2.11	-34.13	≤-17.89	PASS

Test Graphs

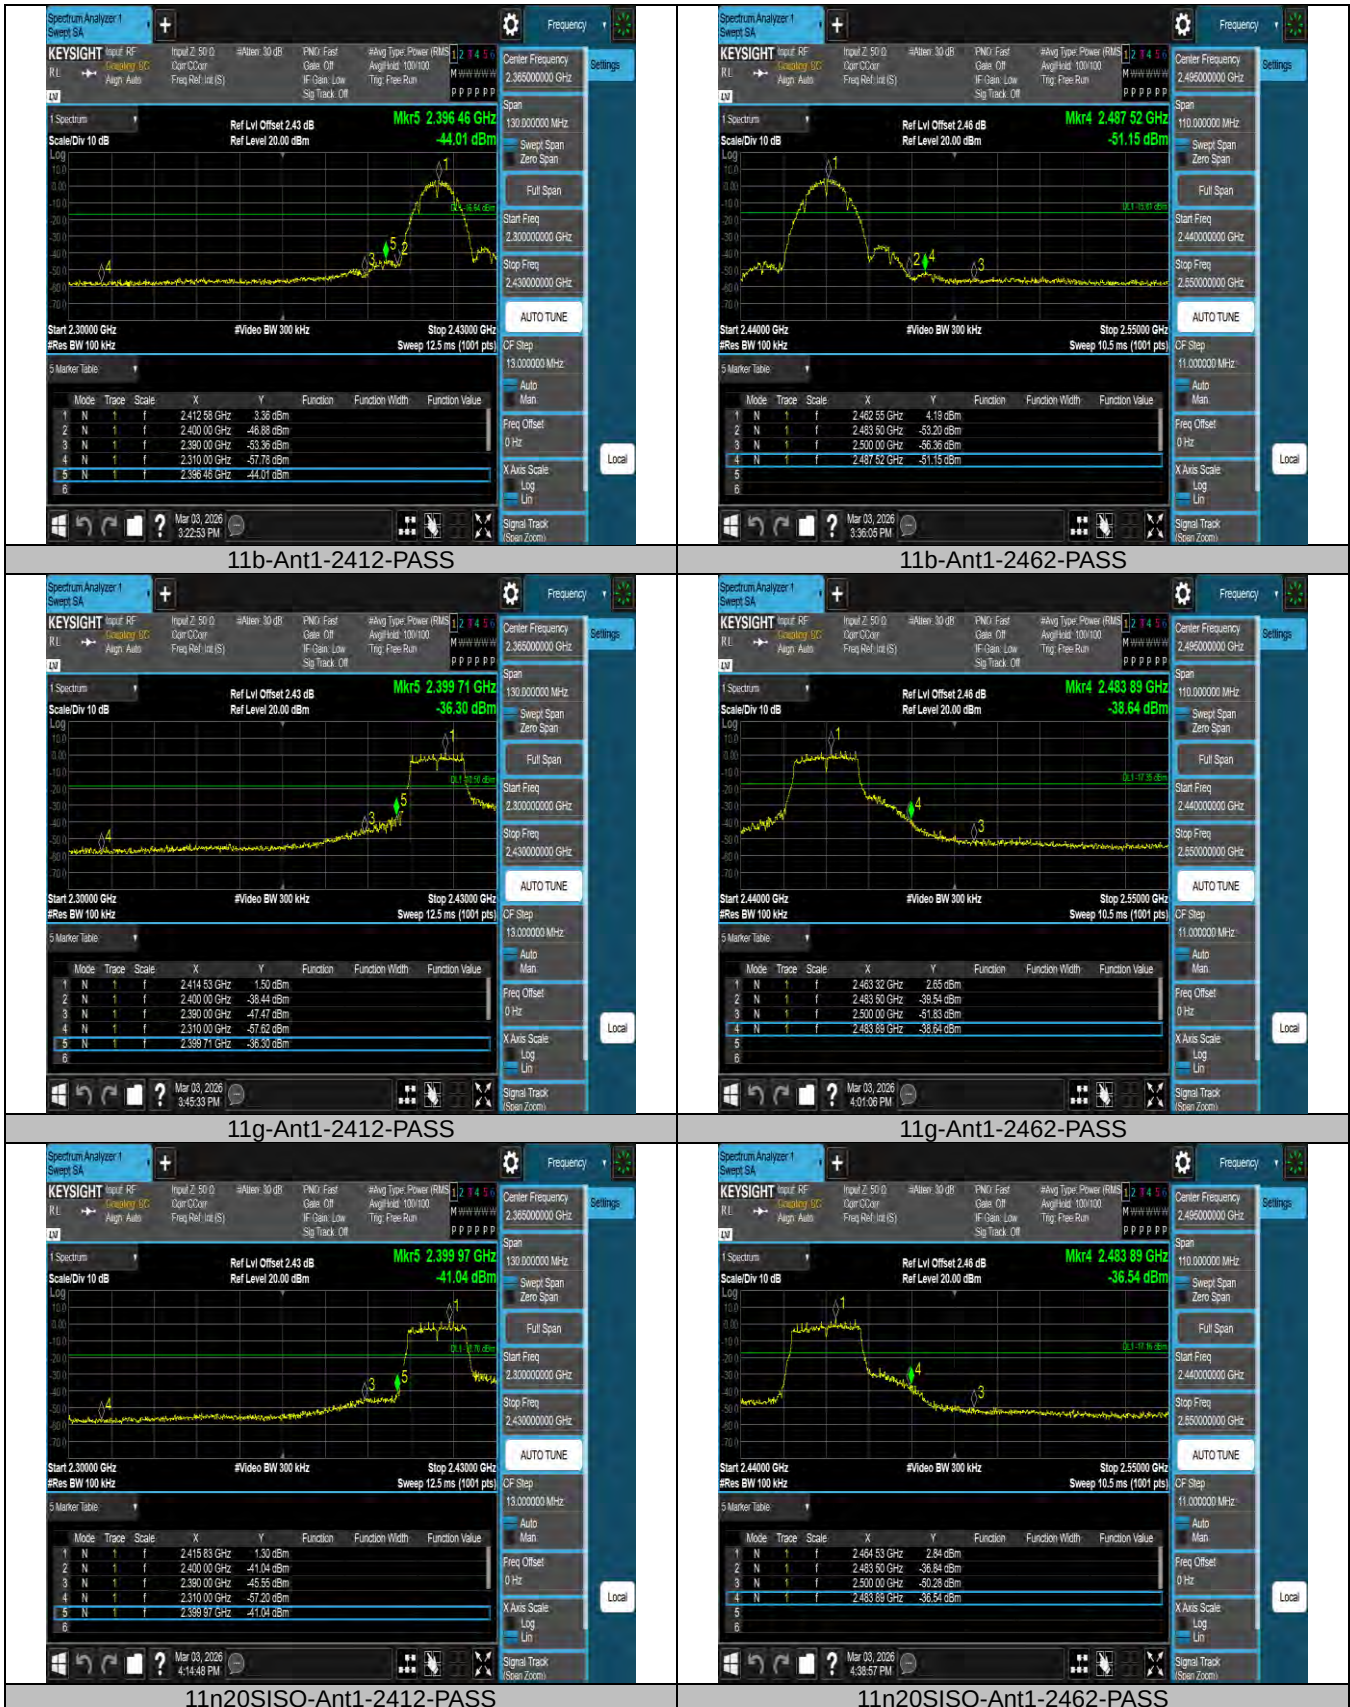



11ax20SISO-Ant1-2412-PASS




11ax20SISO-Ant1-2462-PASS

Conducted Spurious Emission Test Result

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11b	Ant1	2412	0~Reference	3.71	3.71	---	PASS
11b	Ant1	2412	30~1000	3.71	-48.38	≤-16.29	PASS
11b	Ant1	2412	1000~26500	3.71	-39.31	≤-16.29	PASS
11b	Ant1	2437	0~Reference	4.28	4.28	---	PASS
11b	Ant1	2437	30~1000	4.28	-48.6	≤-15.72	PASS
11b	Ant1	2437	1000~26500	4.28	-39.75	≤-15.72	PASS
11b	Ant1	2462	0~Reference	4.30	4.30	---	PASS
11b	Ant1	2462	30~1000	4.30	-48.48	≤-15.7	PASS
11b	Ant1	2462	1000~26500	4.30	-39.66	≤-15.7	PASS
11g	Ant1	2412	0~Reference	1.51	1.51	---	PASS
11g	Ant1	2412	30~1000	1.51	-48.53	≤-18.49	PASS
11g	Ant1	2412	1000~26500	1.51	-39.87	≤-18.49	PASS
11g	Ant1	2437	0~Reference	1.86	1.86	---	PASS
11g	Ant1	2437	30~1000	1.86	-48.57	≤-18.14	PASS
11g	Ant1	2437	1000~26500	1.86	-39.35	≤-18.14	PASS
11g	Ant1	2462	0~Reference	2.37	2.37	---	PASS
11g	Ant1	2462	30~1000	2.37	-47.96	≤-17.63	PASS
11g	Ant1	2462	1000~26500	2.37	-39.74	≤-17.63	PASS
11n20SISO	Ant1	2412	0~Reference	1.23	1.23	---	PASS
11n20SISO	Ant1	2412	30~1000	1.23	-48.46	≤-18.77	PASS
11n20SISO	Ant1	2412	1000~26500	1.23	-39.4	≤-18.77	PASS
11n20SISO	Ant1	2437	0~Reference	2.72	2.72	---	PASS
11n20SISO	Ant1	2437	30~1000	2.72	-48.49	≤-17.28	PASS
11n20SISO	Ant1	2437	1000~26500	2.72	-39.45	≤-17.28	PASS
11n20SISO	Ant1	2462	0~Reference	2.78	2.78	---	PASS
11n20SISO	Ant1	2462	30~1000	2.78	-48.82	≤-17.22	PASS
11n20SISO	Ant1	2462	1000~26500	2.78	-38.69	≤-17.22	PASS
11ax20SISO	Ant1	2412	0~Reference	1.03	1.03	---	PASS
11ax20SISO	Ant1	2412	30~1000	1.03	-48.21	≤-18.97	PASS
11ax20SISO	Ant1	2412	1000~26500	1.03	-39.67	≤-18.97	PASS
11ax20SISO	Ant1	2437	0~Reference	1.12	1.12	---	PASS
11ax20SISO	Ant1	2437	30~1000	1.12	-48.94	≤-18.88	PASS
11ax20SISO	Ant1	2437	1000~26500	1.12	-39.85	≤-18.88	PASS
11ax20SISO	Ant1	2462	0~Reference	1.35	1.35	---	PASS
11ax20SISO	Ant1	2462	30~1000	1.35	-48.94	≤-18.65	PASS
11ax20SISO	Ant1	2462	1000~26500	1.35	-39.74	≤-18.65	PASS

Test Graphs

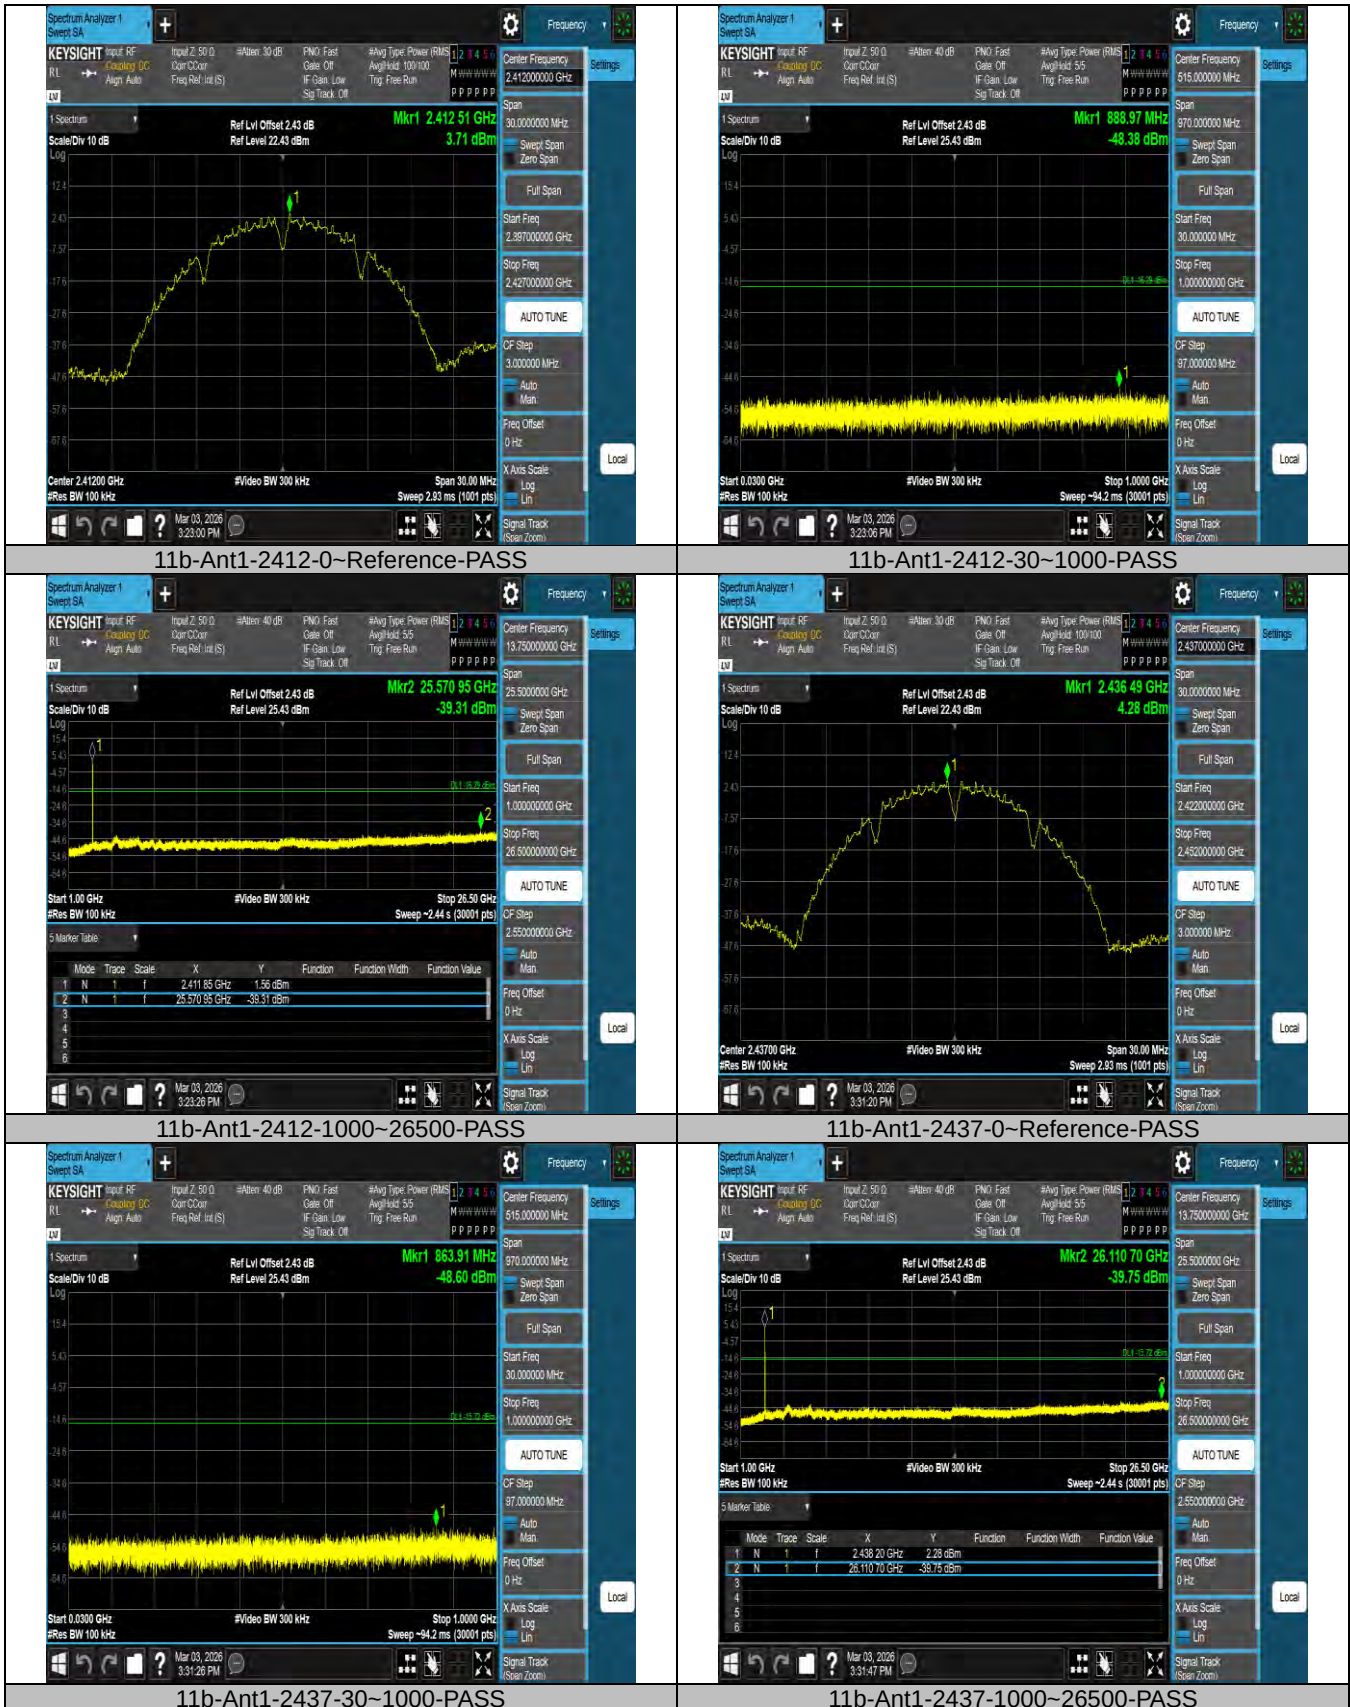




11b-Ant1-2462-0-Reference-PASS




11b-Ant1-2462-30~1000-PASS

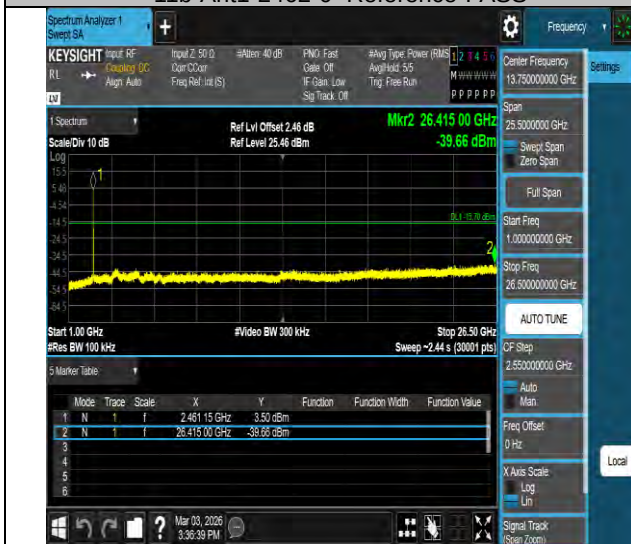

11b-Ant1-2462-1000~26500-PASS





11g-Ant1-2412-0-Reference-PASS


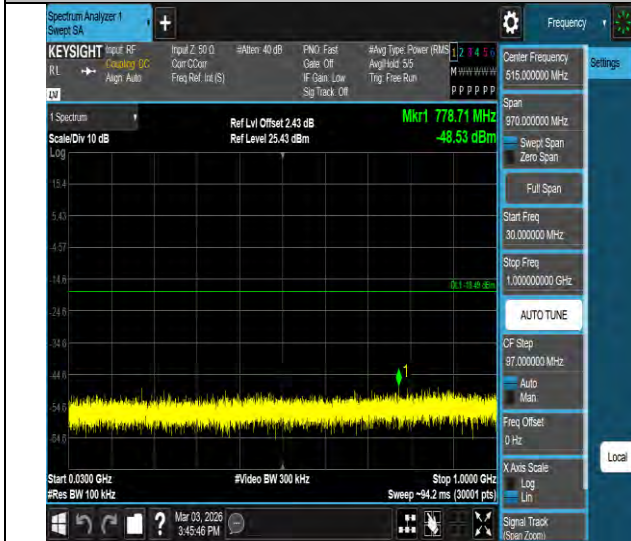


11g-Ant1-2412-30~1000-PASS



11g-Ant1-2412-1000~26500-PASS

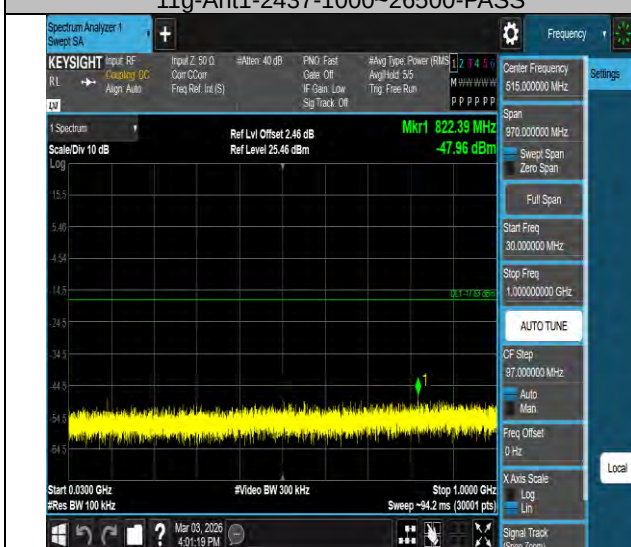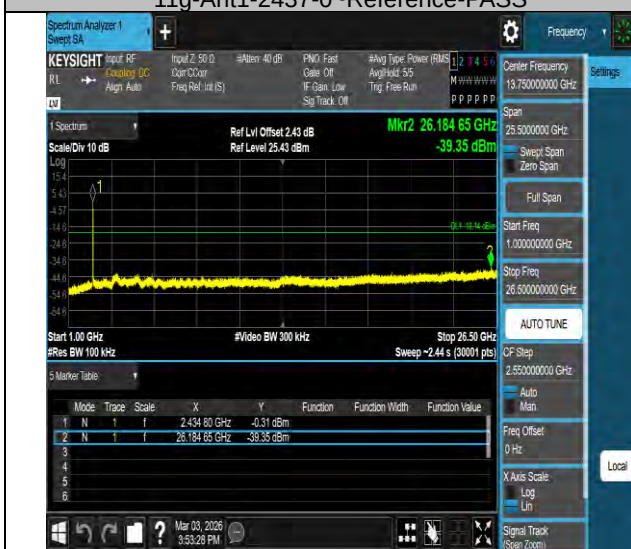

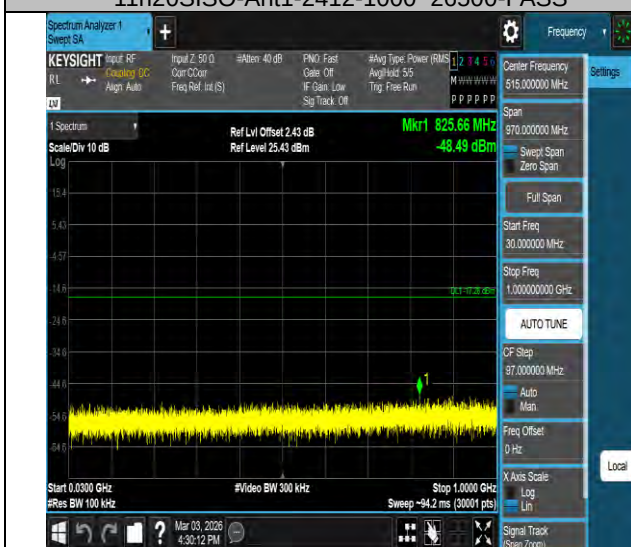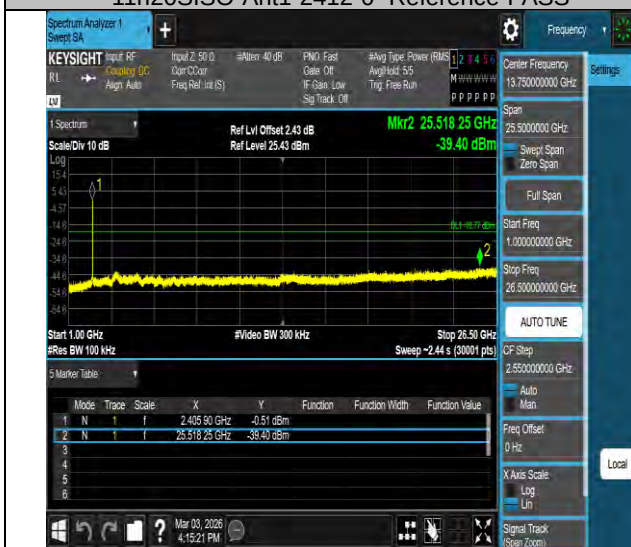




11n20SISO-Ant1-2462-0~Reference-PASS




11n20SISO-Ant1-2462-30~1000-PASS

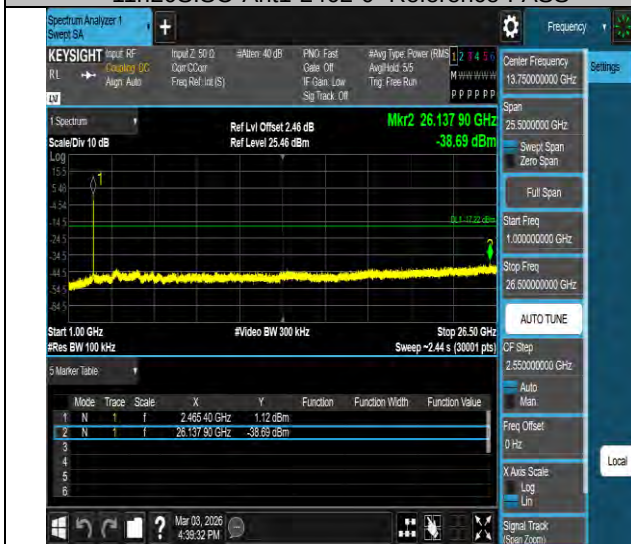

11n20SISO-Ant1-2462-1000~26500-PASS




11ax20SISO-Ant1-2412-0~Reference-PASS

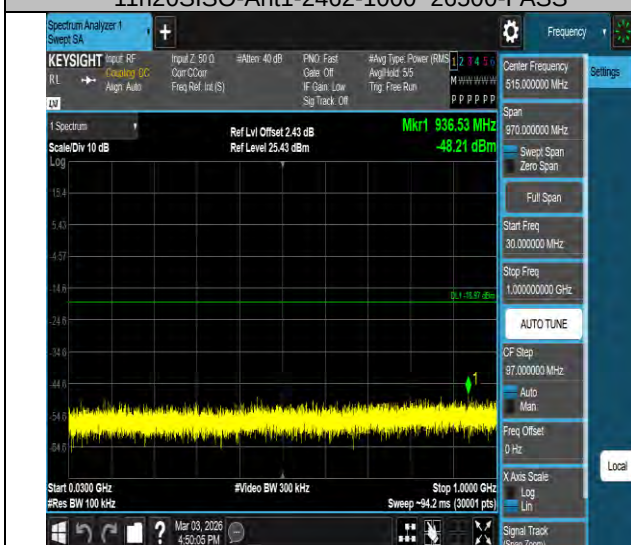

11ax20SISO-Ant1-2412-30~1000-PASS




11ax20SISO-Ant1-2412-1000~26500-PASS

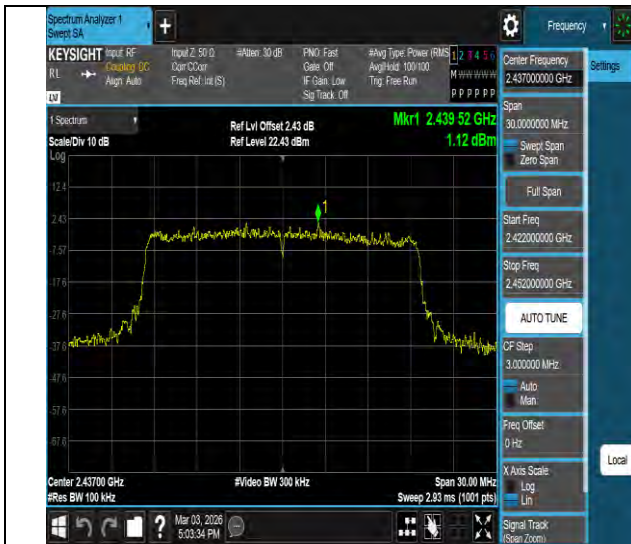

11ax20SISO-Ant1-2437-0-Reference-PASS




11ax20SISO-Ant1-2437-30~1000-PASS

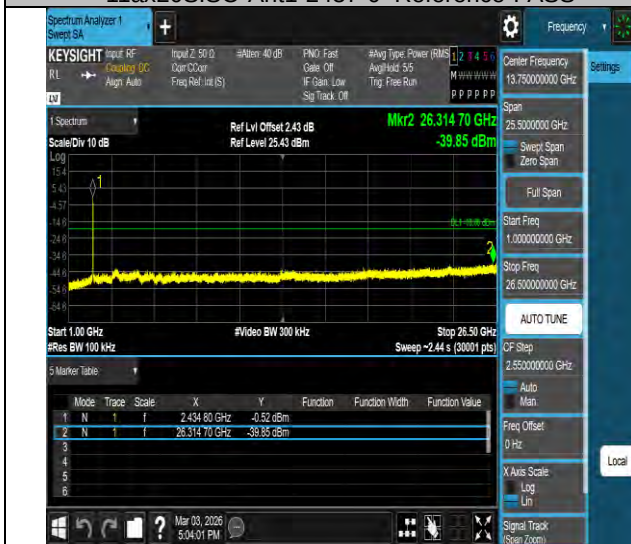

11ax20SISO-Ant1-2437-1000~26500-PASS



11ax20SISO-Ant1-2462-0-Reference-PASS

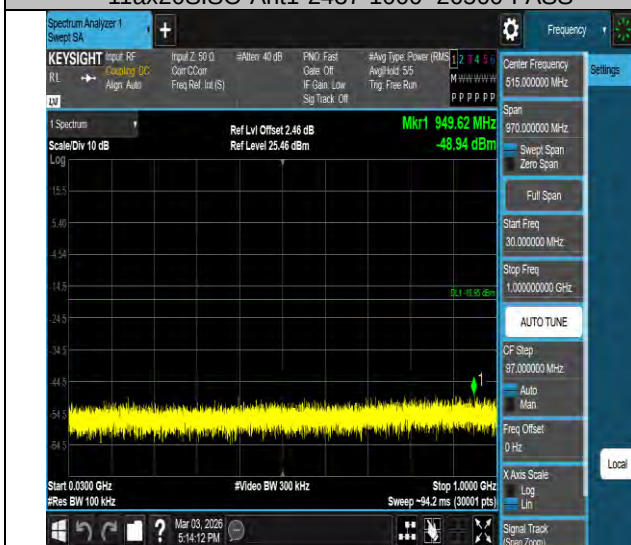

11ax20SISO-Ant1-2462-30~1000-PASS




11ax20SISO-Ant1-2462-1000~26500-PASS

Duty Cycle Test Result

TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Factor
11b	Ant1	2412	4.22	4.53	93.16	0.31
11b	Ant1	2437	4.22	4.54	92.95	0.32
11b	Ant1	2462	4.23	4.51	93.79	0.28
11g	Ant1	2412	0.70	0.78	89.74	0.47
11g	Ant1	2437	0.69	0.83	83.13	0.80
11g	Ant1	2462	0.69	0.80	86.25	0.64
11n20SISO	Ant1	2412	0.66	0.75	88.00	0.56
11n20SISO	Ant1	2437	0.66	0.75	88.00	0.56
11n20SISO	Ant1	2462	0.66	0.75	88.00	0.56
11ax20SISO	Ant1	2412	1.46	1.56	93.59	0.29
11ax20SISO	Ant1	2437	1.46	1.58	92.41	0.34
11ax20SISO	Ant1	2462	1.46	1.60	91.25	0.40

Test Graphs




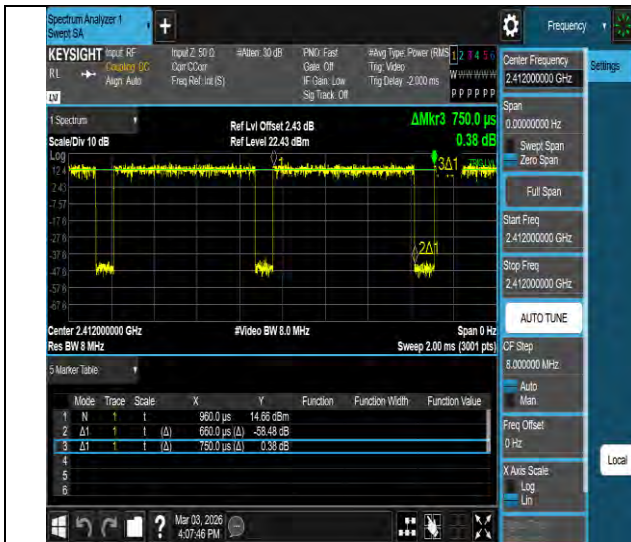

NTNV-11n20SISO-Ant1-2412




NTNV-11n20SISO-Ant1-2437

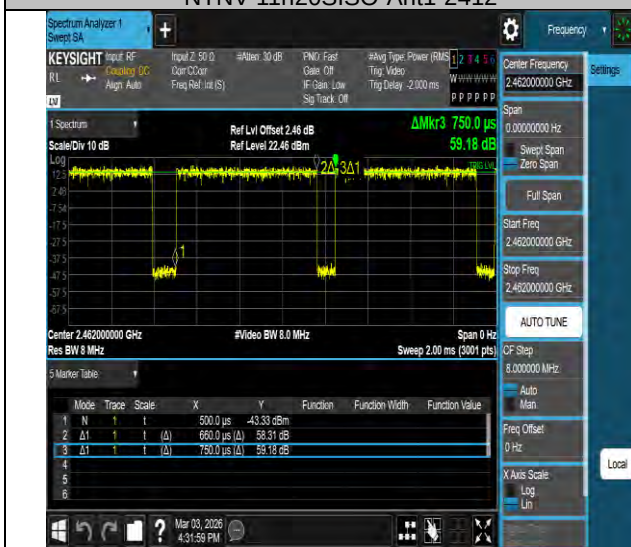


NTNV-11n20SISO-Ant1-2462



NTNV-11ax20SISO-Ant1-2412

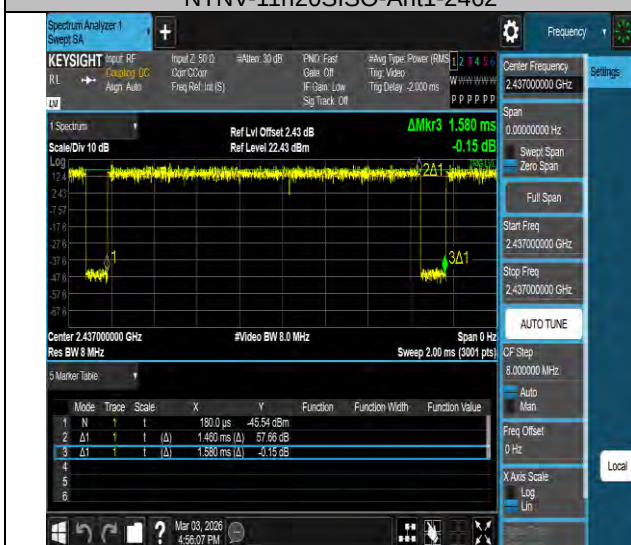

NTNV-11ax20SISO-Ant1-2437

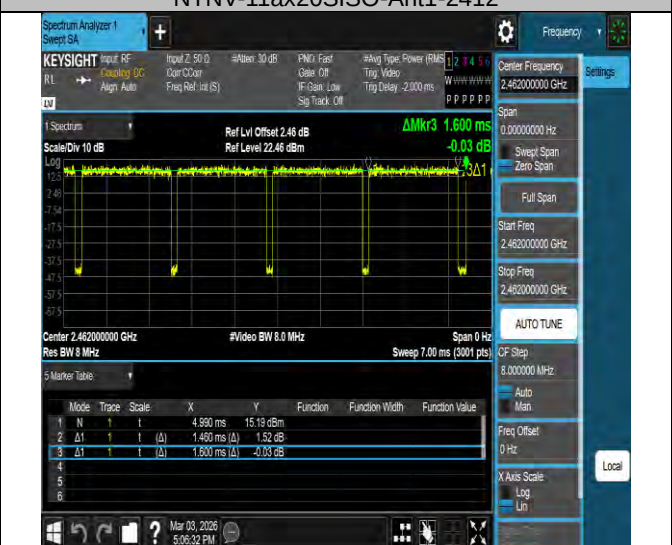


NTNV-11ax20SISO-Ant1-2462

Radiated Spurious Emissions

Test Result Below 1GHz


Project Information			
Mode:	802.11b	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X		

Test Graph

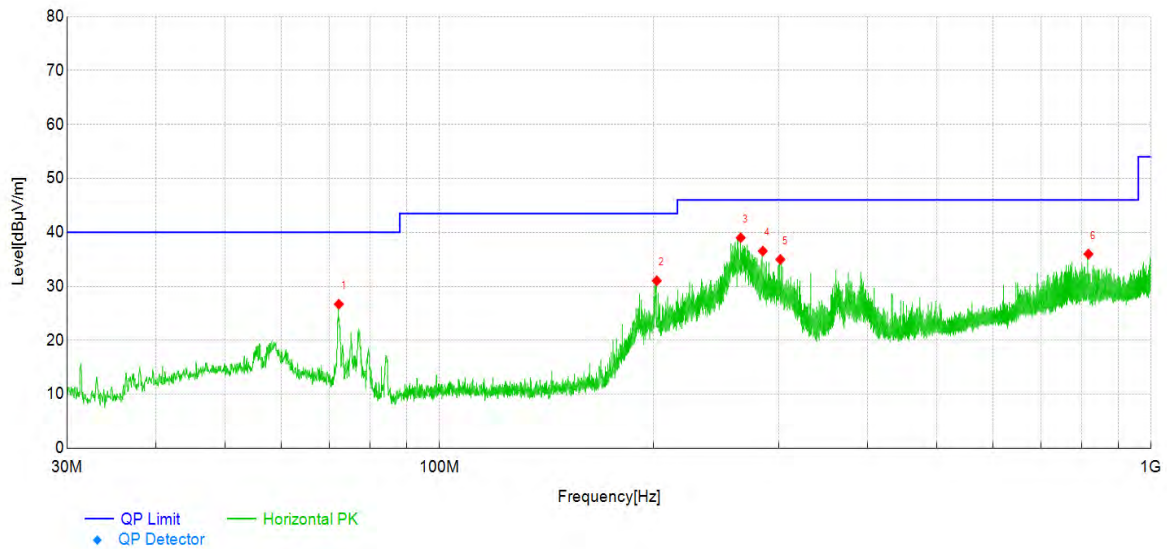

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	72.24	56.10	-29.41	26.69	40.00	13.31	Horizontal	PASS
2	202.08	58.85	-27.82	31.03	43.50	12.47	Horizontal	PASS
3	265.13	63.82	-24.81	39.01	46.00	6.99	Horizontal	PASS
4	284.77	60.93	-24.39	36.54	46.00	9.46	Horizontal	PASS
5	301.41	58.46	-23.49	34.97	46.00	11.03	Horizontal	PASS
6	816.67	48.94	-12.95	35.99	46.00	10.01	Horizontal	PASS

Project Information			
Mode:	802.11b	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X		

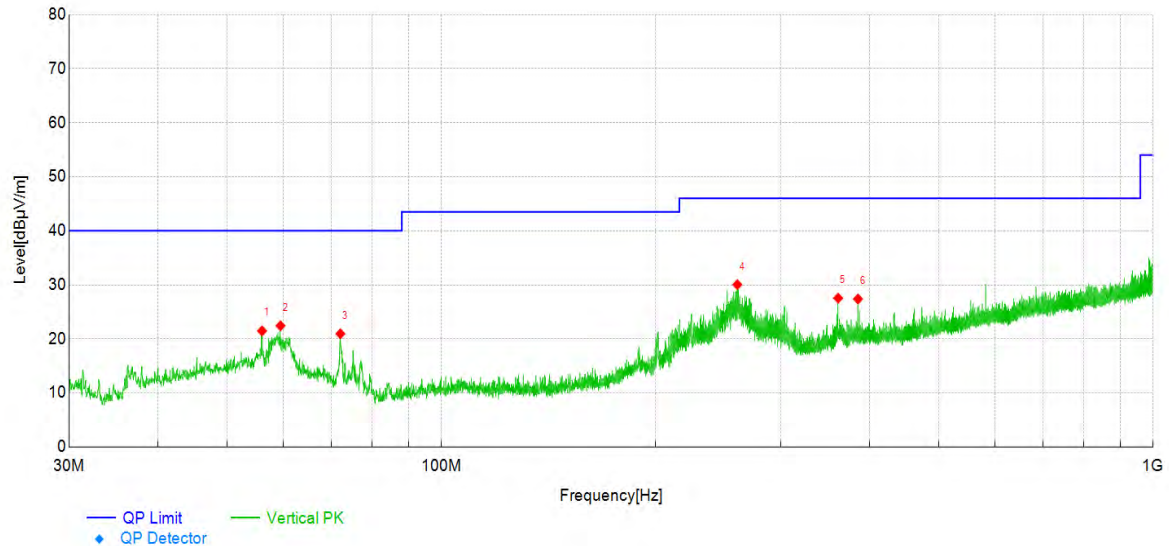
Test Graph

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	56.00	47.32	-25.84	21.48	40.00	18.52	Vertical	PASS
2	59.44	48.73	-26.30	22.43	40.00	17.57	Vertical	PASS
3	72.15	50.33	-29.38	20.95	40.00	19.05	Vertical	PASS
4	260.57	54.78	-24.74	30.04	46.00	15.96	Vertical	PASS
5	361.06	48.26	-20.72	27.54	46.00	18.46	Vertical	PASS
6	384.97	48.84	-21.46	27.38	46.00	18.62	Vertical	PASS

Test Result Above 1GHz


Project Information			
Mode:	802.11b	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X;Powersetting 15		

Test Graph

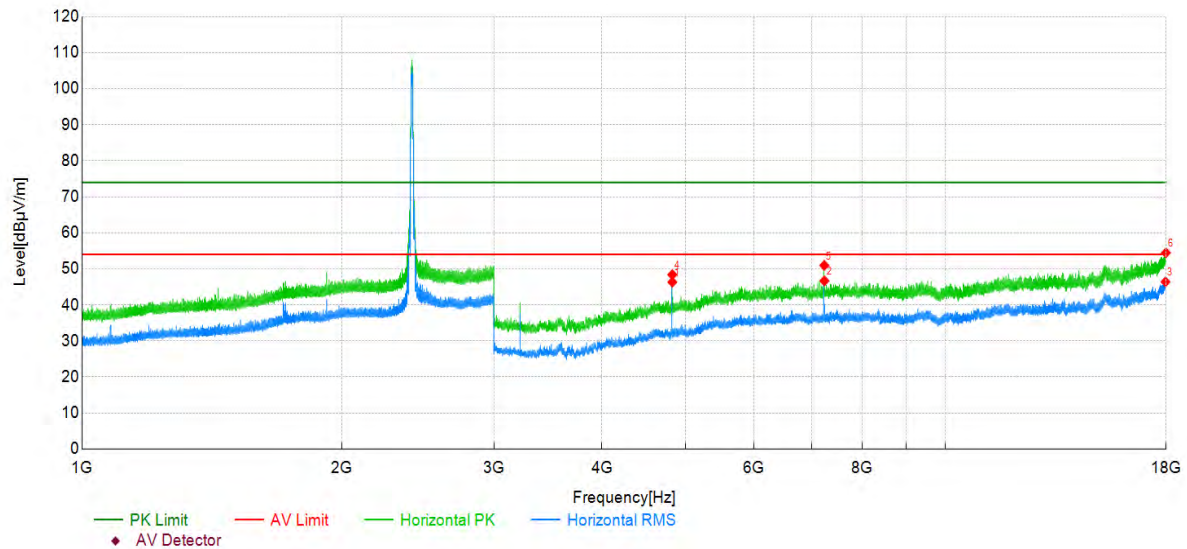

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	4824.50	53.29	-6.96	46.33	54.00	7.67	Horizontal	PASS
2	7238.00	47.01	-0.35	46.66	54.00	7.34	Horizontal	PASS
3	17974.50	29.48	16.92	46.40	54.00	7.60	Horizontal	PASS
4	4824.00	55.35	-6.96	48.39	74.00	25.61	Horizontal	PASS
5	7235.50	51.34	-0.37	50.97	74.00	23.03	Horizontal	PASS
6	17993.50	37.27	17.18	54.45	74.00	19.55	Horizontal	PASS


Project Information			
Mode:	802.11b	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X;Powersetting 15		

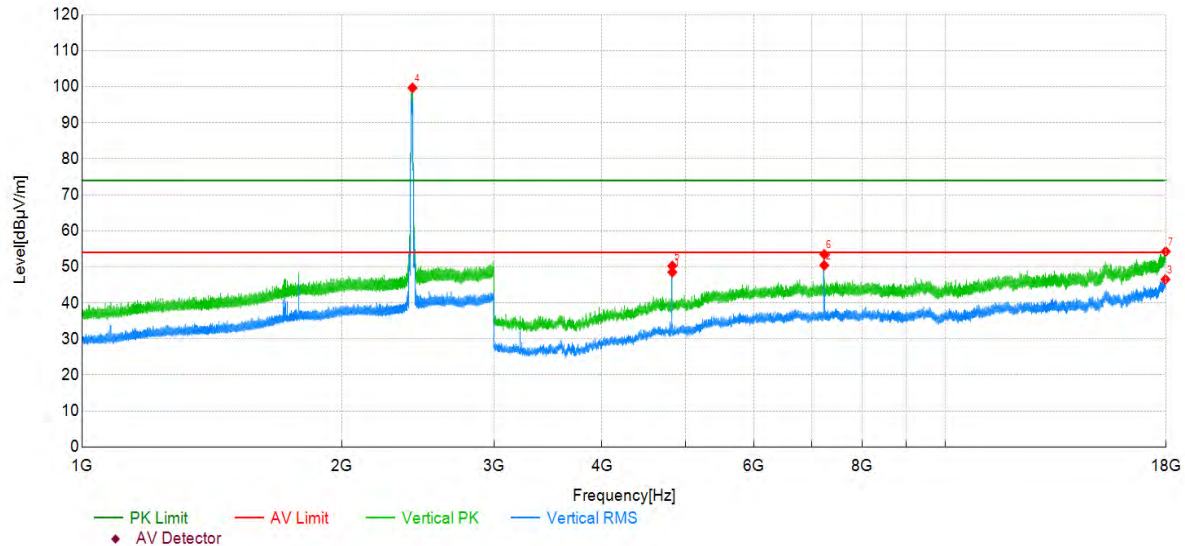Test Graph

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	4824.50	55.48	-6.96	48.52	54.00	5.48	Vertical	PASS
2	7235.50	50.81	-0.37	50.44	54.00	3.56	Vertical	PASS
3	17971.00	29.65	16.87	46.52	54.00	7.48	Vertical	PASS
4	2412.93	97.72	1.94	99.66	-	-	Vertical	NA
5	4824.00	57.23	-6.96	50.27	74.00	23.73	Vertical	PASS
6	7235.50	53.85	-0.37	53.48	74.00	20.52	Vertical	PASS
7	17986.00	37.17	17.08	54.25	74.00	19.75	Vertical	PASS

Project Information			
Mode:	802.11b	Band:	-
Bandwidth	-	Channel	6
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X; Powersetting 15		

Test Graph

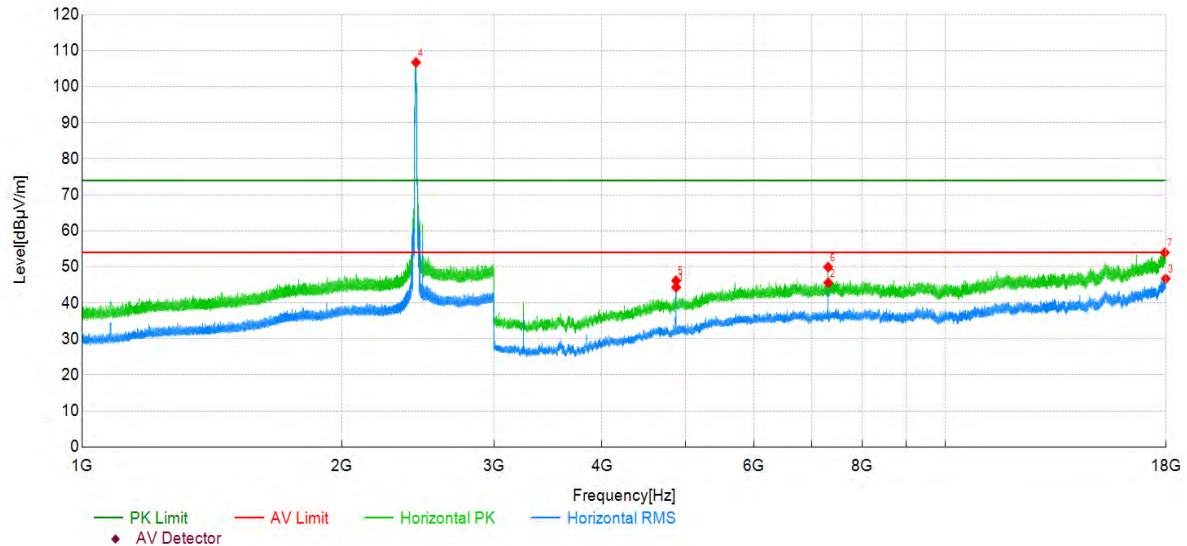


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	4874.50	50.69	-6.39	44.30	54.00	9.70	Horizontal	PASS
2	7312.50	45.82	-0.25	45.57	54.00	8.43	Horizontal	PASS
3	17987.50	29.61	17.10	46.71	54.00	7.29	Horizontal	PASS
4	2436.07	104.56	2.18	106.74	-	-	Horizontal	NA
5	4874.00	52.55	-6.40	46.15	74.00	27.85	Horizontal	PASS
6	7310.50	50.19	-0.26	49.93	74.00	24.07	Horizontal	PASS
7	17940.00	37.47	16.44	53.91	74.00	20.09	Horizontal	PASS

Project Information

Mode:	802.11b	Band:	-
Bandwidth	-	Channel	6
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X; Powersetting 15		

Test Graph

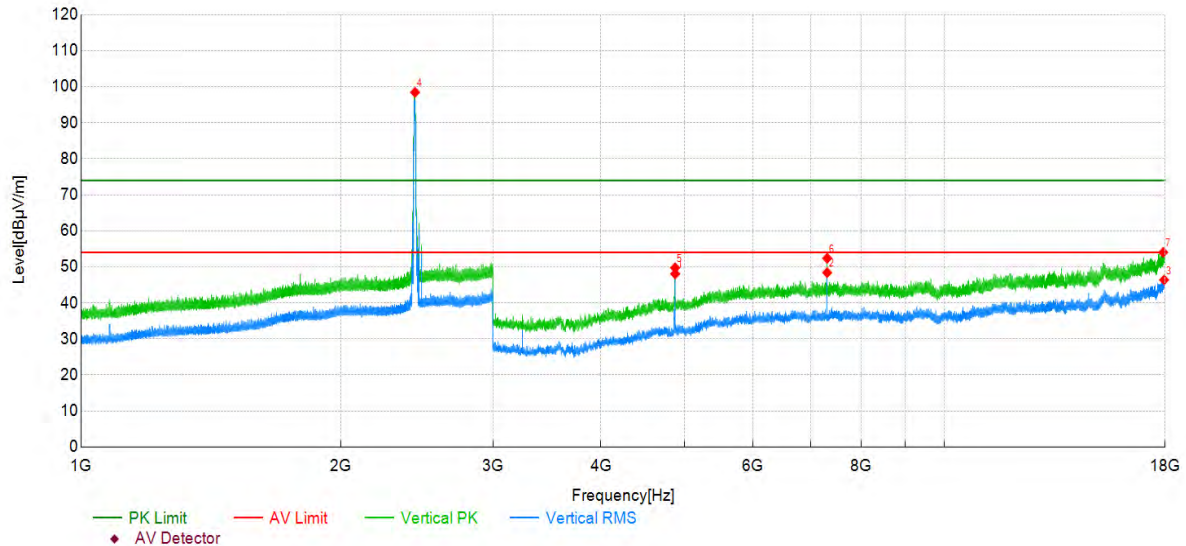


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	4874.50	54.45	-6.39	48.06	54.00	5.94	Vertical	PASS
2	7310.50	48.66	-0.26	48.40	54.00	5.60	Vertical	PASS
3	17957.00	29.69	16.68	46.37	54.00	7.63	Vertical	PASS
4	2436.13	96.25	2.18	98.43	-	-	Vertical	NA
5	4874.00	56.14	-6.40	49.74	74.00	24.26	Vertical	PASS
6	7311.50	52.64	-0.26	52.38	74.00	21.62	Vertical	PASS
7	17914.00	37.94	16.08	54.02	74.00	19.98	Vertical	PASS

Project Information

Mode:	802.11b	Band:	-
Bandwidth	-	Channel	11
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X; Powersetting 15		


Test Graph

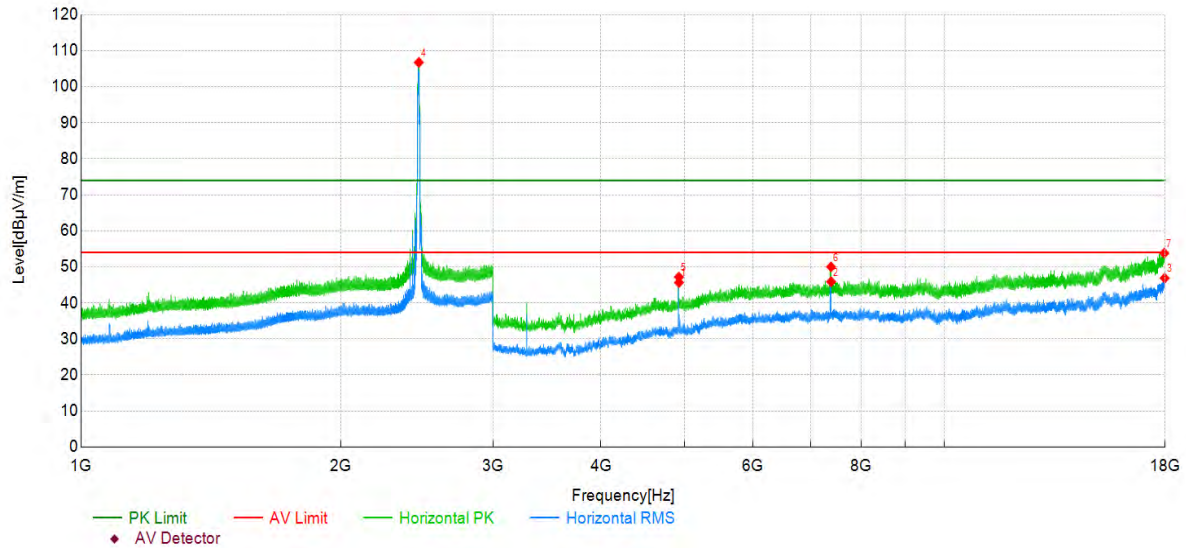

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	4924.50	51.71	-6.06	45.65	54.00	8.35	Horizontal	PASS
2	7388.00	45.99	-0.12	45.87	54.00	8.13	Horizontal	PASS
3	17981.00	29.86	17.01	46.87	54.00	7.13	Horizontal	PASS
4	2461.13	104.30	2.44	106.74	-	-	Horizontal	NA
5	4924.00	53.20	-6.06	47.14	74.00	26.86	Horizontal	PASS
6	7386.50	50.10	-0.12	49.98	74.00	24.02	Horizontal	PASS
7	17963.50	37.04	16.76	53.80	74.00	20.20	Horizontal	PASS


Project Information			
Mode:	802.11b	Band:	-
Bandwidth	-	Channel	11
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X;Powersetting 15		

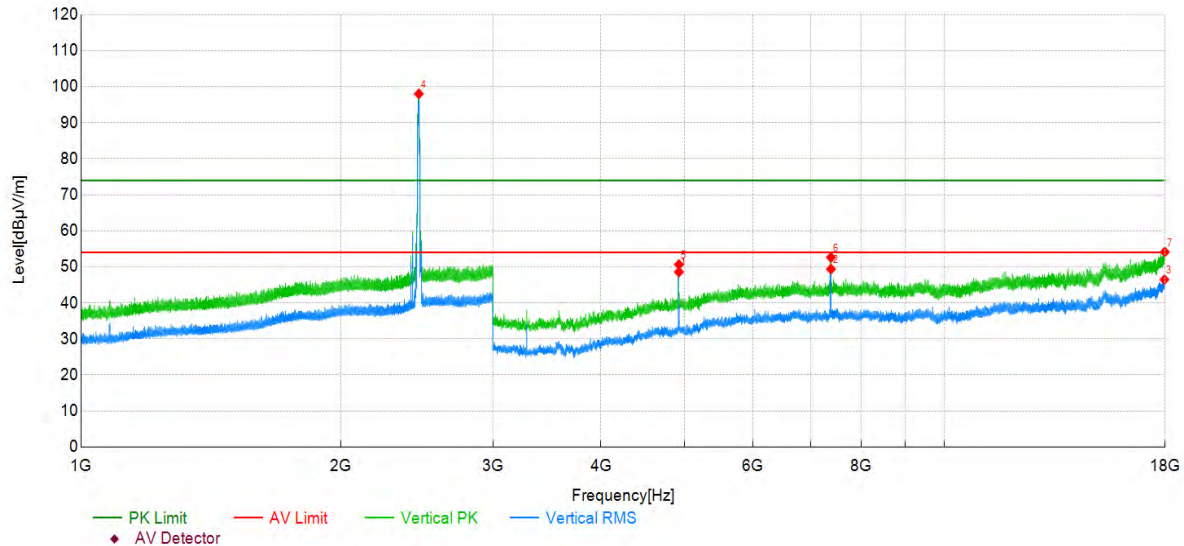Test Graph

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	4924.50	54.63	-6.06	48.57	54.00	5.43	Vertical	PASS
2	7385.00	49.50	-0.12	49.38	54.00	4.62	Vertical	PASS
3	17973.00	29.56	16.90	46.46	54.00	7.54	Vertical	PASS
4	2461.13	95.56	2.44	98.00	-	-	Vertical	NA
5	4924.00	56.70	-6.06	50.64	74.00	23.36	Vertical	PASS
6	7385.50	52.74	-0.12	52.62	74.00	21.38	Vertical	PASS
7	17989.50	37.00	17.13	54.13	74.00	19.87	Vertical	PASS

Project Information			
Mode:	802.11g	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X; Powersetting 13		

Test Graph

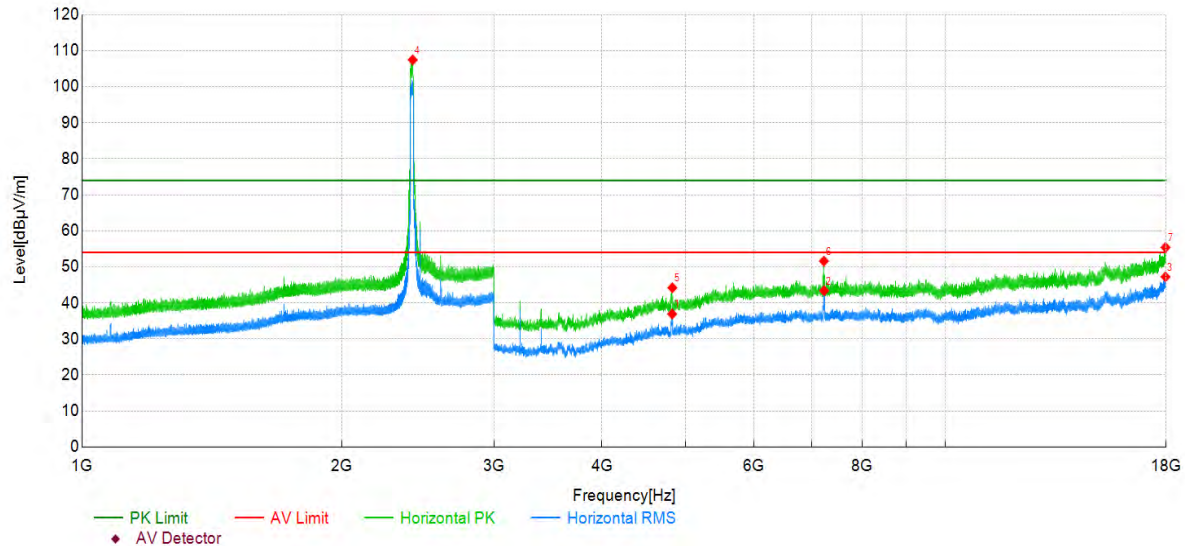


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	4822.50	43.90	-6.98	36.92	54.00	17.08	Horizontal	PASS
2	7232.00	43.77	-0.39	43.38	54.00	10.62	Horizontal	PASS
3	17973.00	30.32	16.90	47.22	54.00	6.78	Horizontal	PASS
4	2414.60	105.46	1.96	107.42	-	-	Horizontal	NA
5	4826.00	51.13	-6.94	44.19	74.00	29.81	Horizontal	PASS
6	7227.50	52.01	-0.42	51.59	74.00	22.41	Horizontal	PASS
7	17976.50	38.44	16.95	55.39	74.00	18.61	Horizontal	PASS

Project Information			
Mode:	802.11g	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X; Powersetting 13		

Test Graph

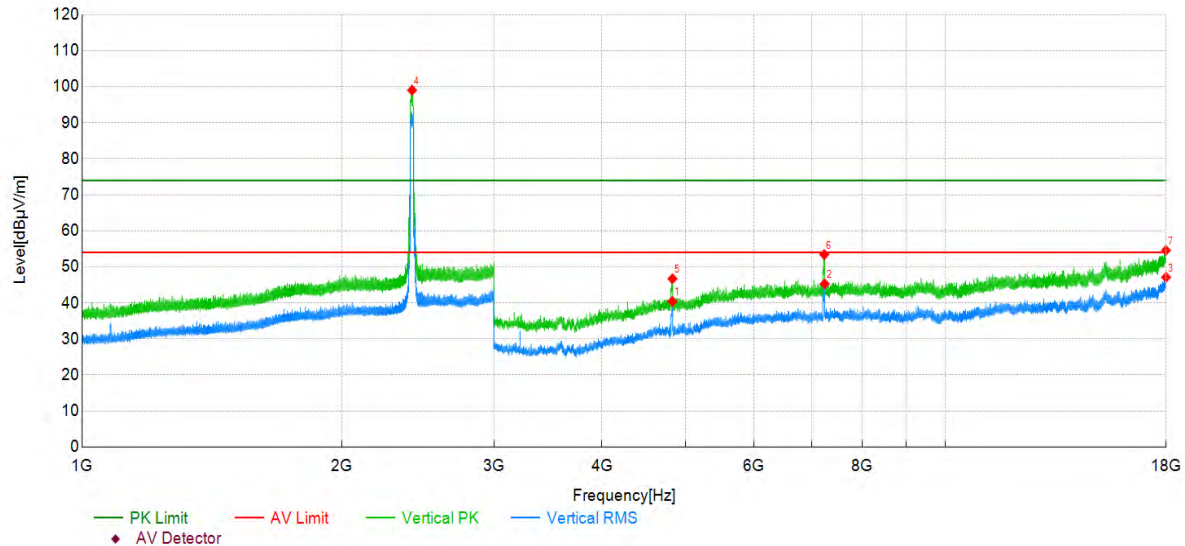


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	4824.50	47.36	-6.96	40.40	54.00	13.60	Vertical	PASS
2	7242.00	45.60	-0.32	45.28	54.00	8.72	Vertical	PASS
3	18000.00	29.82	17.28	47.10	54.00	6.90	Vertical	PASS
4	2410.53	97.13	1.91	99.04	-	-	Vertical	NA
5	4827.00	53.63	-6.93	46.70	74.00	27.30	Vertical	PASS
6	7234.50	53.78	-0.37	53.41	74.00	20.59	Vertical	PASS
7	17995.00	37.38	17.21	54.59	74.00	19.41	Vertical	PASS

Project Information

Mode:	802.11n20	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X;Powersetting 12.5		

Test Graph

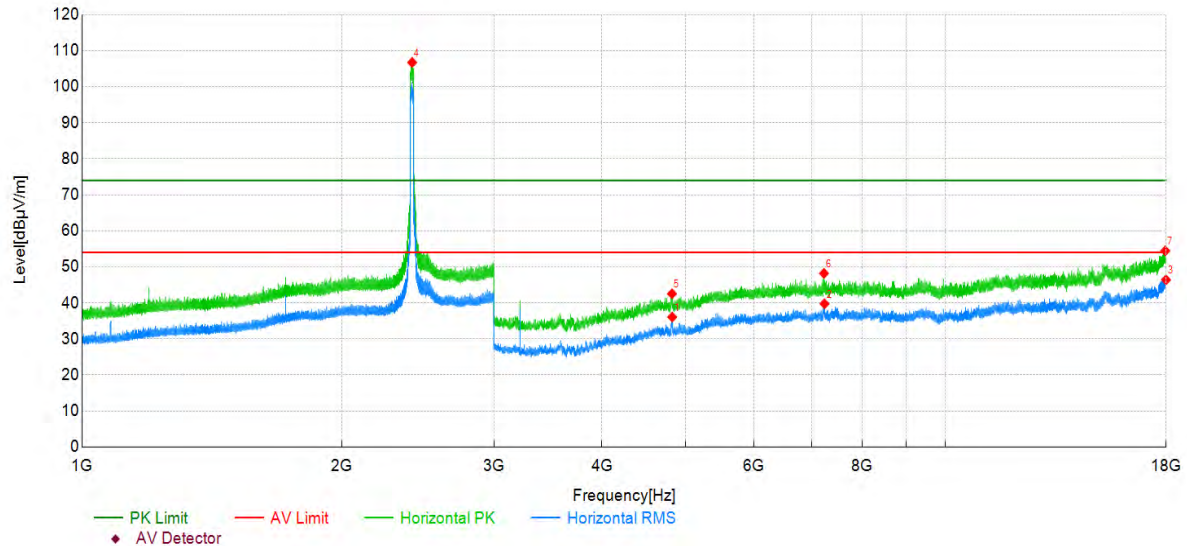


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	4823.00	43.05	-6.98	36.07	54.00	17.93	Horizontal	PASS
2	7239.00	40.11	-0.34	39.77	54.00	14.23	Horizontal	PASS
3	17996.50	29.16	17.23	46.39	54.00	7.61	Horizontal	PASS
4	2411.07	104.81	1.91	106.72	-	-	Horizontal	NA
5	4820.50	49.55	-7.01	42.54	74.00	31.46	Horizontal	PASS
6	7230.00	48.59	-0.40	48.19	74.00	25.81	Horizontal	PASS
7	17963.50	37.69	16.76	54.45	74.00	19.55	Horizontal	PASS

Project Information

Mode:	802.11n20	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X;Powersetting 12.5		

Test Graph

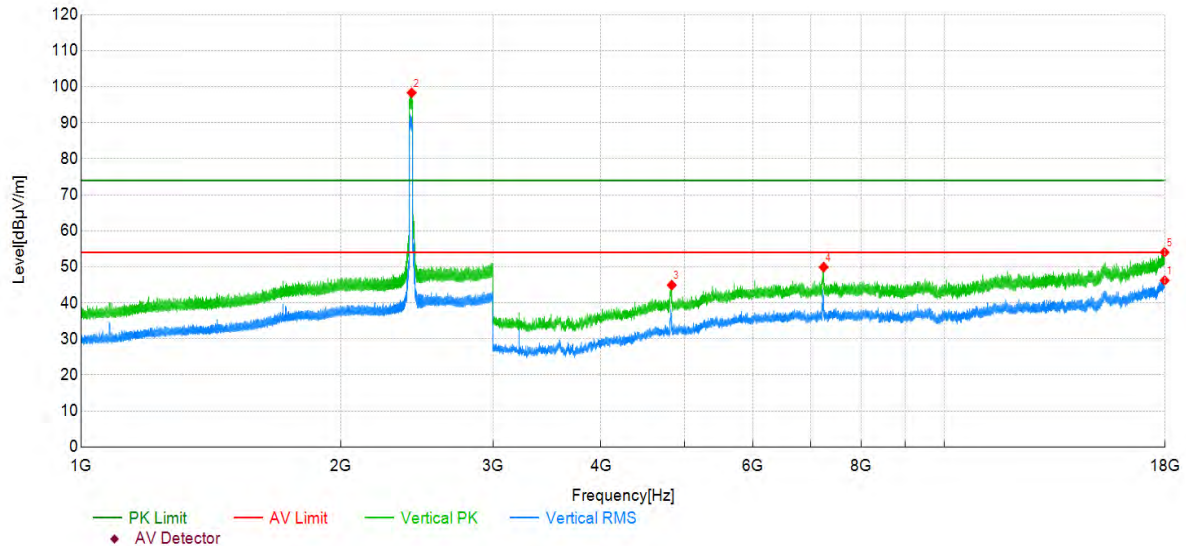


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	17983.00	29.17	17.04	46.21	54.00	7.79	Vertical	PASS
2	2414.20	96.36	1.95	98.31	-	-	Vertical	NA
3	4830.00	51.81	-6.89	44.92	74.00	29.08	Vertical	PASS
4	7243.00	50.24	-0.32	49.92	74.00	24.08	Vertical	PASS
5	17976.50	37.10	16.95	54.05	74.00	19.95	Vertical	PASS

Project Information

Mode:	802.11ax20	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000099	Engineer:	Oushuyan
Remark:	X;Powersetting 10.5		

Test Graph

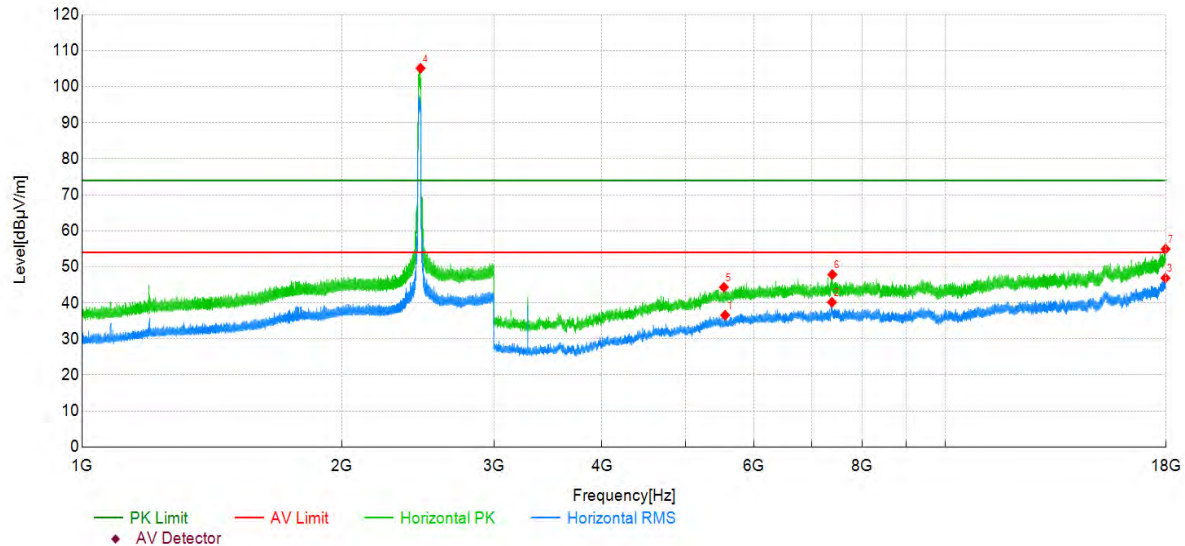


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5554.00	41.08	-4.49	36.59	54.00	17.41	Horizontal	PASS
2	7385.00	40.30	-0.12	40.18	54.00	13.82	Horizontal	PASS
3	17969.50	30.04	16.85	46.89	54.00	7.11	Horizontal	PASS
4	2465.60	102.61	2.49	105.10	-	-	Horizontal	NA
5	5536.00	48.90	-4.57	44.33	74.00	29.67	Horizontal	PASS
6	7392.00	47.99	-0.13	47.86	74.00	26.14	Horizontal	PASS
7	17978.50	37.97	16.97	54.94	74.00	19.06	Horizontal	PASS

Project Information

Mode:	802.11ax20	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000099	Engineer:	Oushuyan
Remark:	X;Powersetting 10.5		

Test Graph

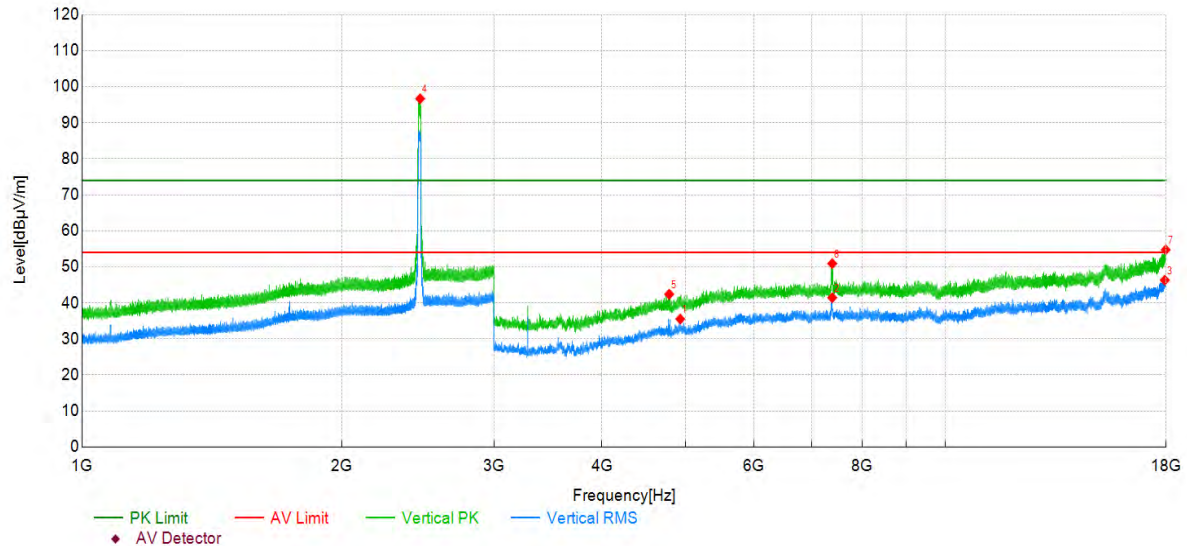

Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	4927.50	41.58	-6.05	35.53	54.00	18.47	Vertical	PASS
2	7391.00	41.56	-0.13	41.43	54.00	12.57	Vertical	PASS
3	17939.50	29.87	16.43	46.30	54.00	7.70	Vertical	PASS
4	2463.00	94.19	2.47	96.66	-	-	Vertical	NA
5	4785.00	49.55	-7.15	42.40	74.00	31.60	Vertical	PASS
6	7391.00	51.04	-0.13	50.91	74.00	23.09	Vertical	PASS
7	17983.00	37.68	17.04	54.72	74.00	19.28	Vertical	PASS

Radiated Band Edge

Test Result

Project Information			
Mode:	802.11b	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X; Powersetting 15		


Test Graph

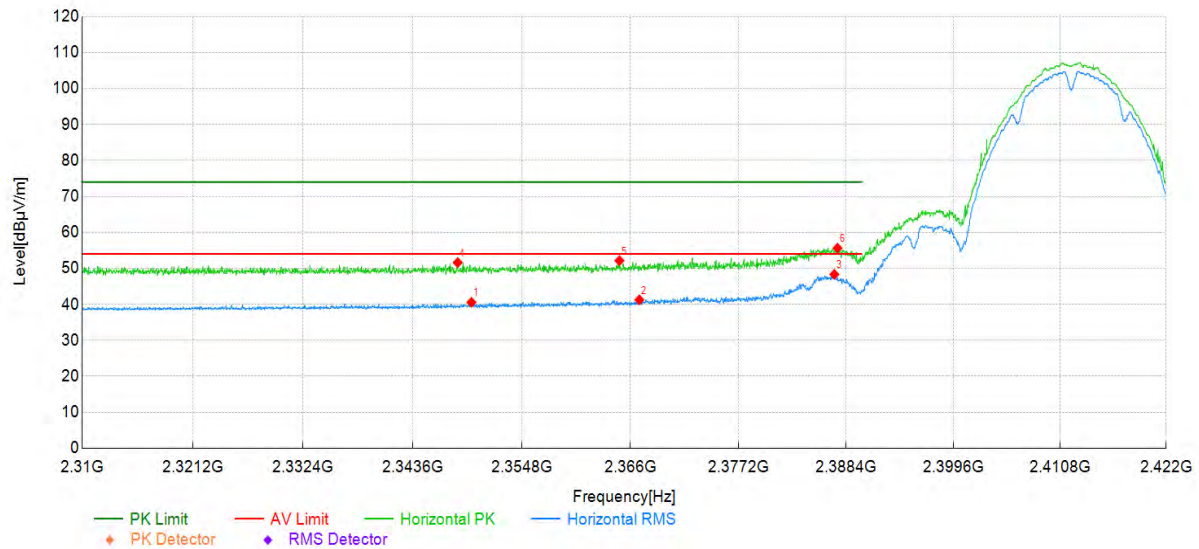

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2349.62	39.02	1.55	40.57	54.00	13.43	Horizontal	PASS
2	2366.91	39.60	1.64	41.24	54.00	12.76	Horizontal	PASS
3	2387.16	46.58	1.74	48.32	54.00	5.68	Horizontal	PASS
4	2348.20	50.07	1.54	51.61	74.00	22.39	Horizontal	PASS
5	2364.86	50.51	1.63	52.14	74.00	21.86	Horizontal	PASS
6	2387.49	53.89	1.74	55.63	74.00	18.37	Horizontal	PASS

Project Information			
Mode:	802.11b	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X; Powersetting 15		

Test Graph

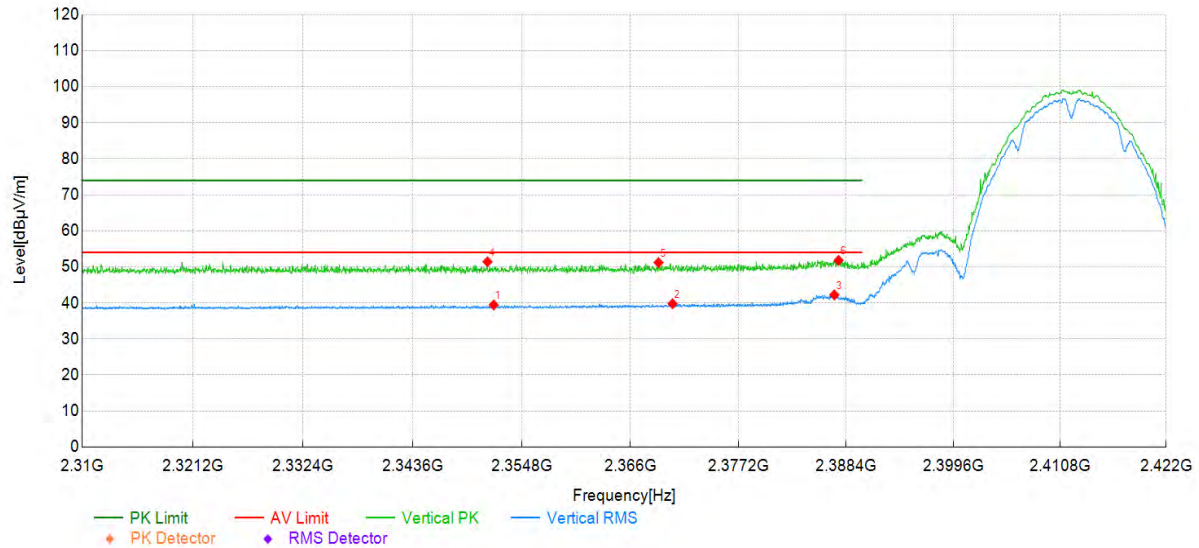


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2351.90	37.85	1.57	39.42	54.00	14.58	Vertical	PASS
2	2370.35	38.11	1.65	39.76	54.00	14.24	Vertical	PASS
3	2387.16	40.47	1.74	42.21	54.00	11.79	Vertical	PASS
4	2351.27	49.85	1.57	51.42	74.00	22.58	Vertical	PASS
5	2368.89	49.54	1.65	51.19	74.00	22.81	Vertical	PASS
6	2387.60	50.06	1.74	51.80	74.00	22.20	Vertical	PASS

Project Information			
Mode:	802.11b	Band:	-
Bandwidth	-	Channel	11
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X; Powersetting 15		


Test Graph

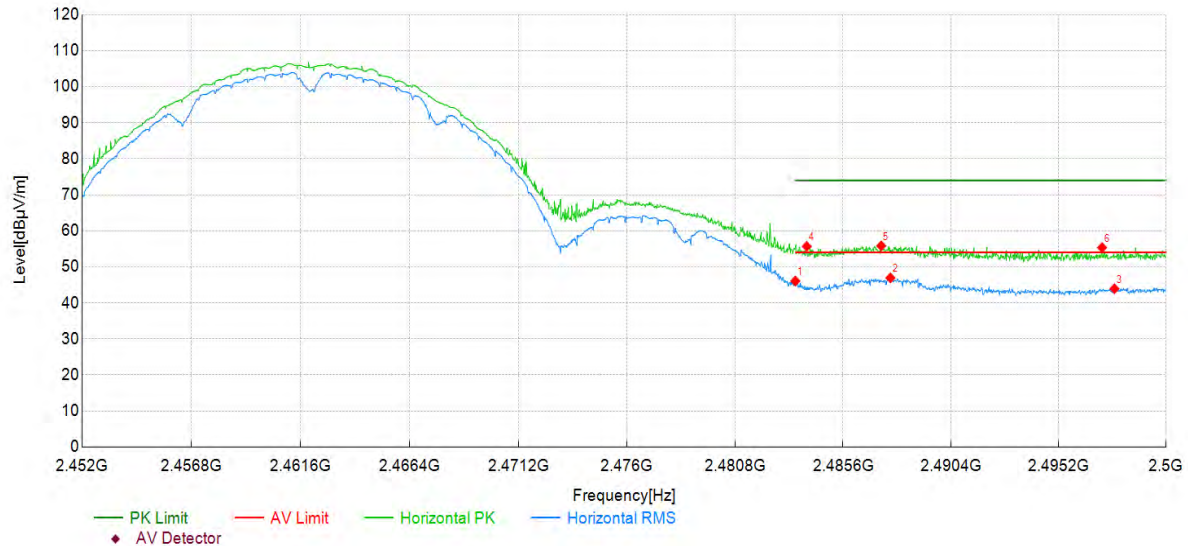

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2483.48	43.39	2.68	46.07	-	-	Horizontal	NA
2	2487.71	44.20	2.73	46.93	54.00	7.07	Horizontal	PASS
3	2497.69	41.09	2.83	43.92	54.00	10.08	Horizontal	PASS
4	2483.98	52.99	2.69	55.68	74.00	18.32	Horizontal	PASS
5	2487.30	53.09	2.73	55.82	74.00	18.18	Horizontal	PASS
6	2497.14	52.51	2.83	55.34	74.00	18.66	Horizontal	PASS


Project Information			
Mode:	802.11b	Band:	-
Bandwidth	-	Channel	11
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X;Powersetting 15		

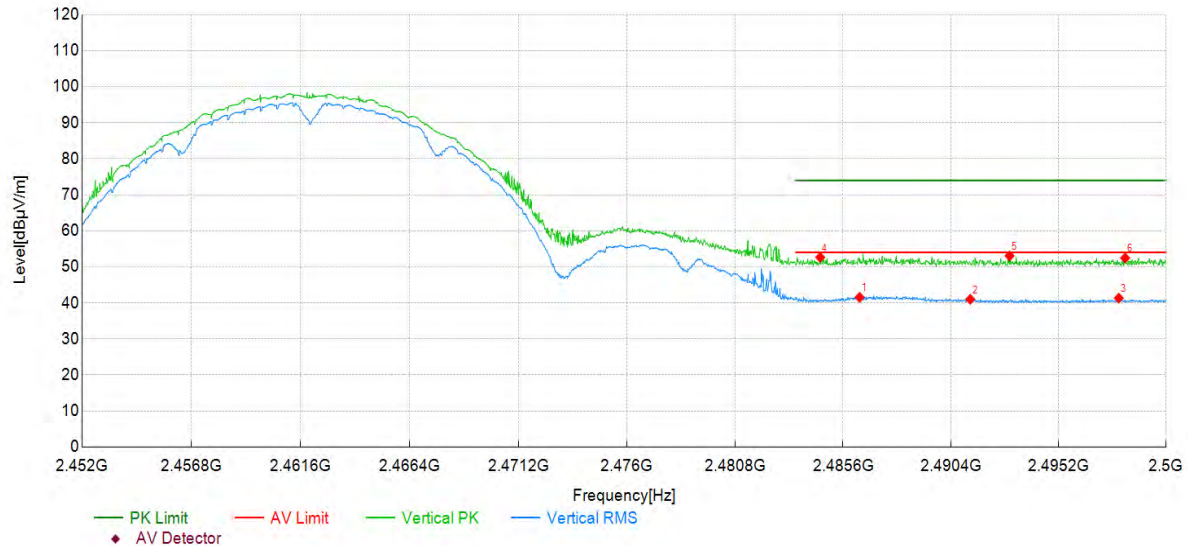Test Graph

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2486.34	38.81	2.72	41.53	54.00	12.47	Vertical	PASS
2	2491.26	38.23	2.77	41.00	54.00	13.00	Vertical	PASS
3	2497.89	38.49	2.84	41.33	54.00	12.67	Vertical	PASS
4	2484.58	49.94	2.70	52.64	74.00	21.36	Vertical	PASS
5	2493.01	50.26	2.78	53.04	74.00	20.96	Vertical	PASS
6	2498.18	49.62	2.84	52.46	74.00	21.54	Vertical	PASS

Project Information			
Mode:	802.11g	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X; Powersetting 13		


Test Graph

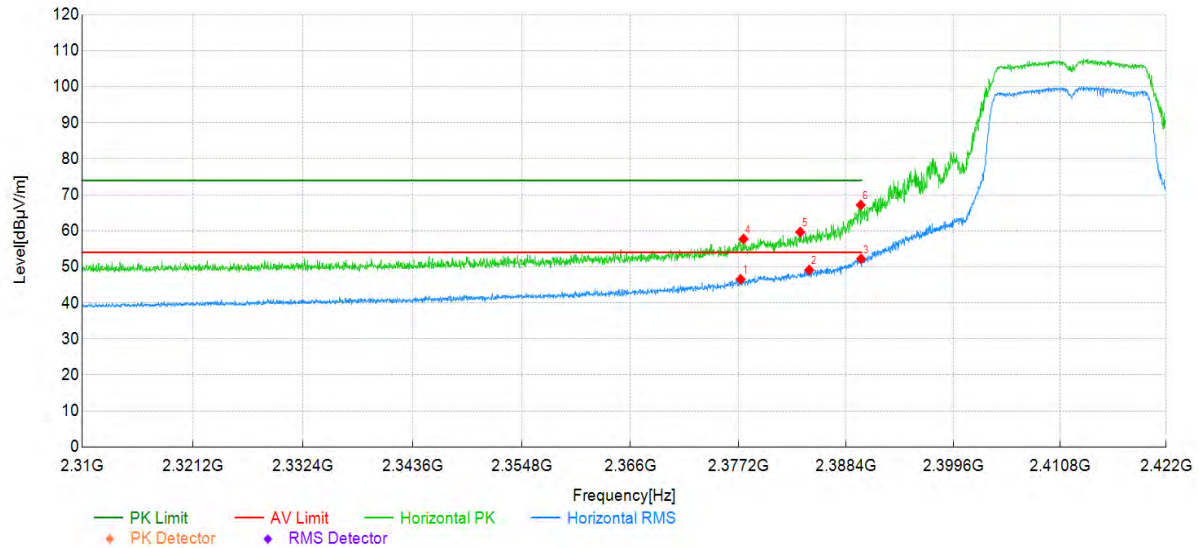

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2377.41	44.85	1.69	46.54	54.00	7.46	Horizontal	PASS
2	2384.54	47.40	1.73	49.13	54.00	4.87	Horizontal	PASS
3	2389.96	50.45	1.75	52.20	54.00	1.80	Horizontal	PASS
4	2377.71	56.02	1.69	57.71	74.00	16.29	Horizontal	PASS
5	2383.61	57.92	1.72	59.64	74.00	14.36	Horizontal	PASS
6	2389.92	65.40	1.75	67.15	74.00	6.85	Horizontal	PASS

Project Information			
Mode:	802.11g	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X; Powersetting 13		


Test Graph

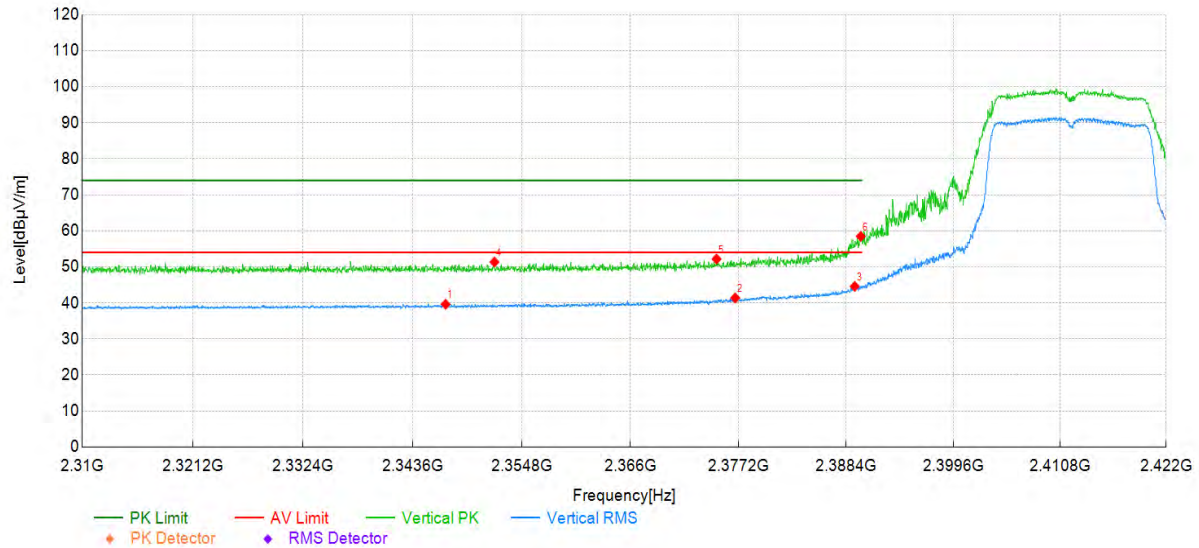

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2346.97	38.07	1.54	39.61	54.00	14.39	Vertical	PASS
2	2376.85	39.66	1.69	41.35	54.00	12.65	Vertical	PASS
3	2389.29	42.83	1.75	44.58	54.00	9.42	Vertical	PASS
4	2351.98	49.78	1.57	51.35	74.00	22.65	Vertical	PASS
5	2374.91	50.48	1.68	52.16	74.00	21.84	Vertical	PASS
6	2389.92	56.71	1.75	58.46	74.00	15.54	Vertical	PASS


Project Information			
Mode:	802.11g	Band:	-
Bandwidth	-	Channel	11
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X;Powersetting 12.5		

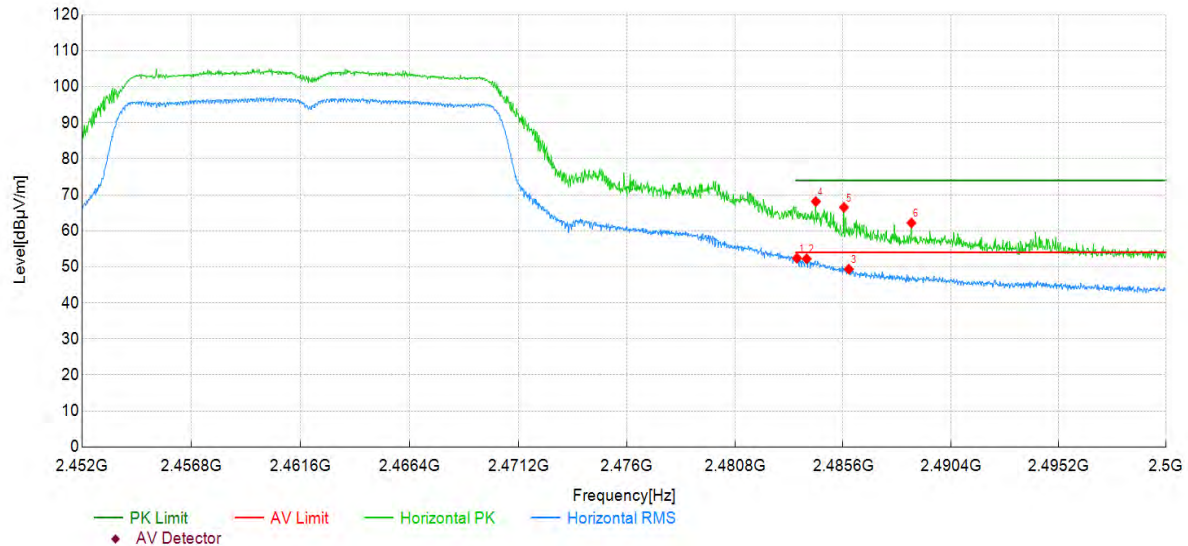Test Graph

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2483.55	49.72	2.68	52.40	54.00	1.60	Horizontal	PASS
2	2483.98	49.54	2.69	52.23	54.00	1.77	Horizontal	PASS
3	2485.86	46.66	2.71	49.37	54.00	4.63	Horizontal	PASS
4	2484.39	65.44	2.70	68.14	74.00	5.86	Horizontal	PASS
5	2485.64	63.81	2.71	66.52	74.00	7.48	Horizontal	PASS
6	2488.64	59.44	2.74	62.18	74.00	11.82	Horizontal	PASS

Project Information			
Mode:	802.11g	Band:	-
Bandwidth	-	Channel	11
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X; Powersetting 12.5		


Test Graph

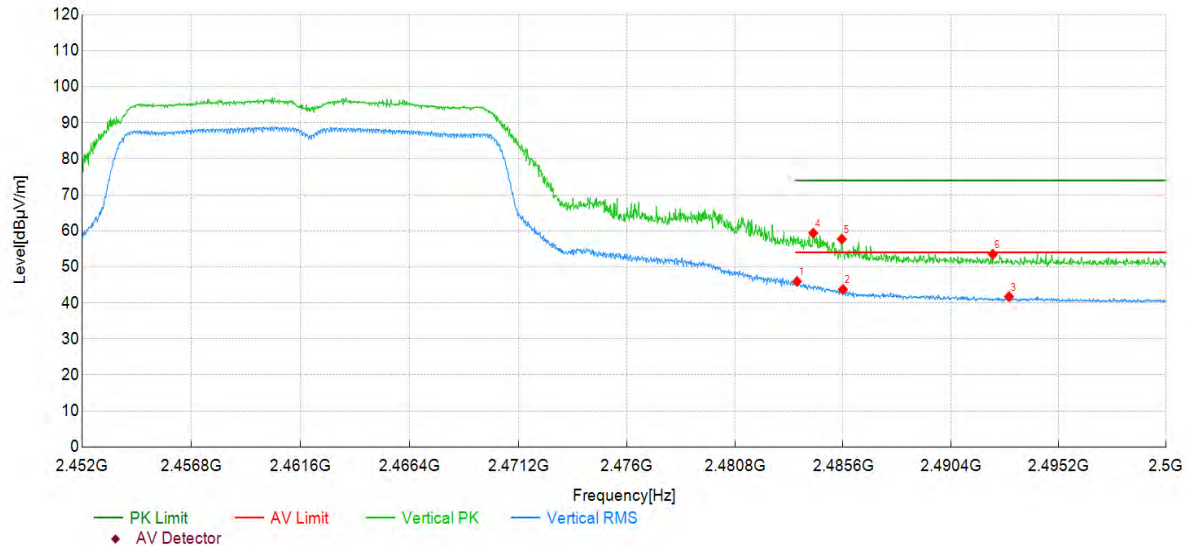

Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2483.55	43.26	2.68	45.94	54.00	8.06	Vertical	PASS
2	2485.59	41.02	2.70	43.72	54.00	10.28	Vertical	PASS
3	2492.99	38.96	2.78	41.74	54.00	12.26	Vertical	PASS
4	2484.27	56.67	2.70	59.37	74.00	14.63	Vertical	PASS
5	2485.54	55.00	2.70	57.70	74.00	16.30	Vertical	PASS
6	2492.27	50.71	2.78	53.49	74.00	20.51	Vertical	PASS

Project Information			
Mode:	802.11n20	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X;Powersetting 12.5		

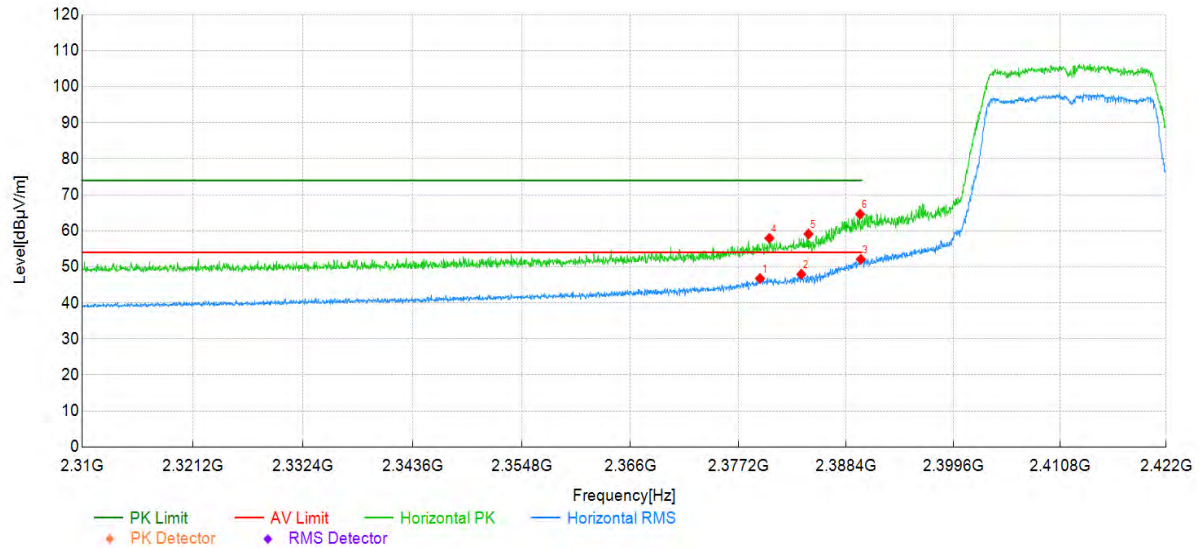Test Graph

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2379.43	45.07	1.70	46.77	54.00	7.23	Horizontal	PASS
2	2383.72	46.24	1.72	47.96	54.00	6.04	Horizontal	PASS
3	2389.92	50.34	1.75	52.09	54.00	1.91	Horizontal	PASS
4	2380.40	56.23	1.70	57.93	74.00	16.07	Horizontal	PASS
5	2384.47	57.39	1.73	59.12	74.00	14.88	Horizontal	PASS
6	2389.85	62.86	1.75	64.61	74.00	9.39	Horizontal	PASS

Project Information			
Mode:	802.11n20	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000046	Engineer:	Oushuyan
Remark:	X; Powersetting 12.5		

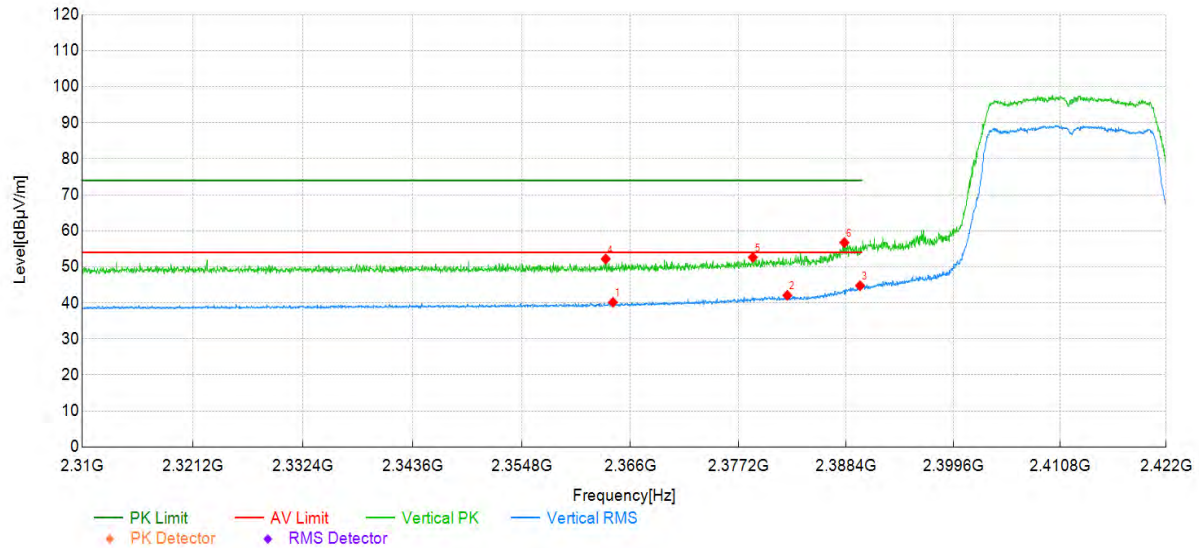
Test Graph

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2364.19	38.53	1.63	40.16	54.00	13.84	Vertical	PASS
2	2382.26	40.38	1.71	42.09	54.00	11.91	Vertical	PASS
3	2389.85	43.02	1.75	44.77	54.00	9.23	Vertical	PASS
4	2363.44	50.58	1.62	52.20	74.00	21.80	Vertical	PASS
5	2378.68	50.95	1.69	52.64	74.00	21.36	Vertical	PASS
6	2388.20	55.00	1.74	56.74	74.00	17.26	Vertical	PASS

Project Information

Mode:	802.11n20	Band:	-
Bandwidth	-	Channel	11
SN:	E1N25L31T000099	Engineer:	Oushuyan
Remark:	X;Powersetting 12.5		

Test Graph

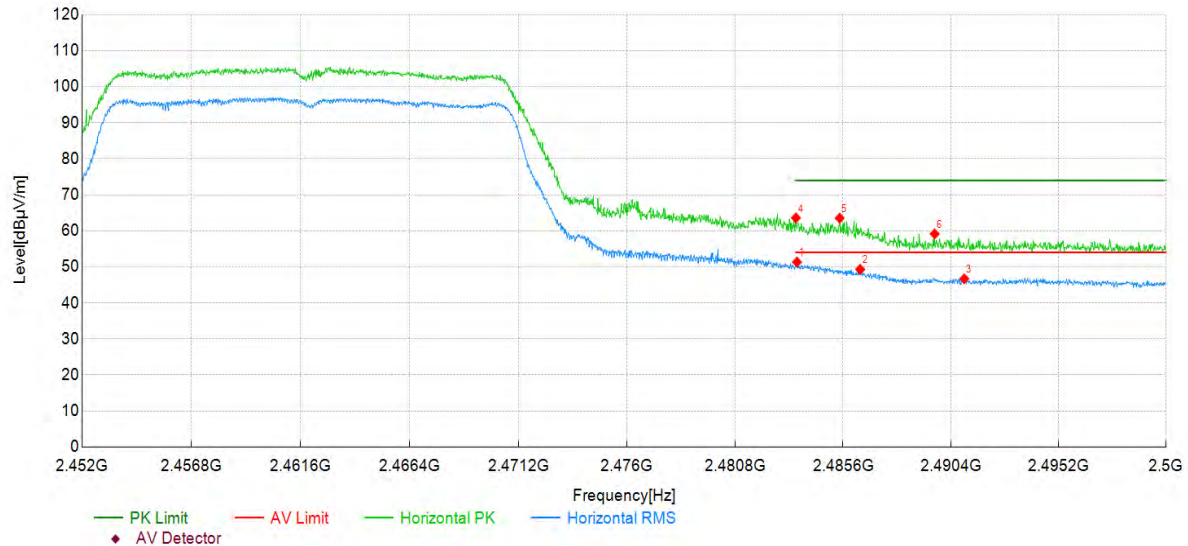


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2483.55	48.65	2.68	51.33	54.00	2.67	Horizontal	PASS
2	2486.36	46.57	2.72	49.29	54.00	4.71	Horizontal	PASS
3	2491.00	43.94	2.76	46.70	54.00	7.30	Horizontal	PASS
4	2483.50	60.92	2.68	63.60	74.00	10.40	Horizontal	PASS
5	2485.45	60.82	2.70	63.52	74.00	10.48	Horizontal	PASS
6	2489.67	56.39	2.75	59.14	74.00	14.86	Horizontal	PASS


Project Information			
Mode:	802.11n20	Band:	-
Bandwidth	-	Channel	11
SN:	E1N25L31T000099	Engineer:	Oushuyan
Remark:	X; Powersetting 12.5		

Test Graph

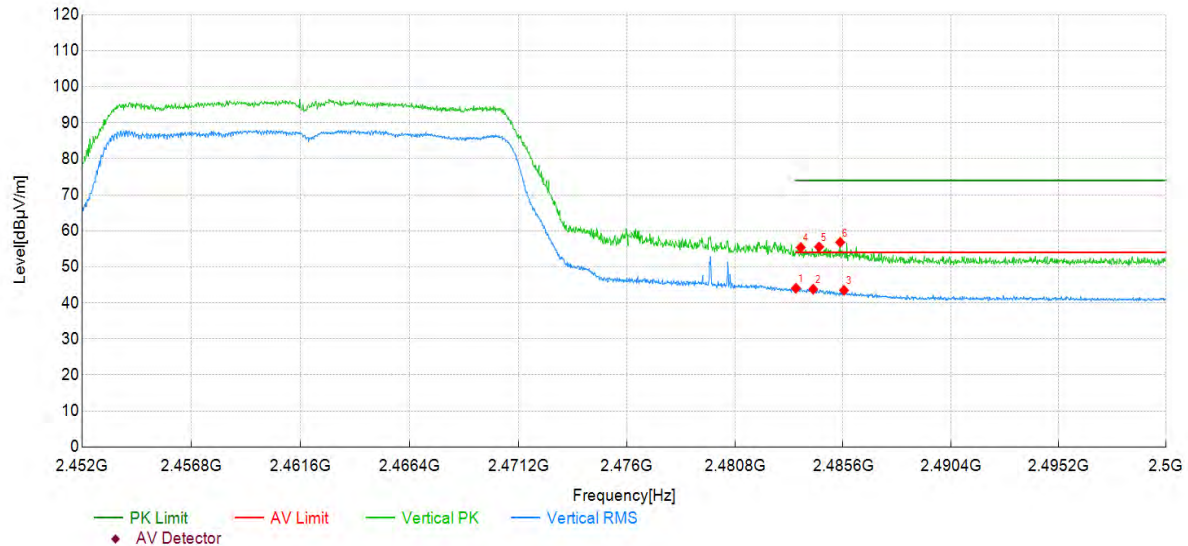


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2483.50	41.37	2.68	44.05	54.00	9.95	Vertical	PASS
2	2484.27	41.10	2.70	43.80	54.00	10.20	Vertical	PASS
3	2485.64	40.76	2.71	43.47	54.00	10.53	Vertical	PASS
4	2483.72	52.69	2.68	55.37	74.00	18.63	Vertical	PASS
5	2484.54	52.83	2.70	55.53	74.00	18.47	Vertical	PASS
6	2485.47	54.11	2.70	56.81	74.00	17.19	Vertical	PASS

Project Information			
Mode:	802.11ax20	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000099	Engineer:	Oushuyan
Remark:	X;Powersetting 10.5		

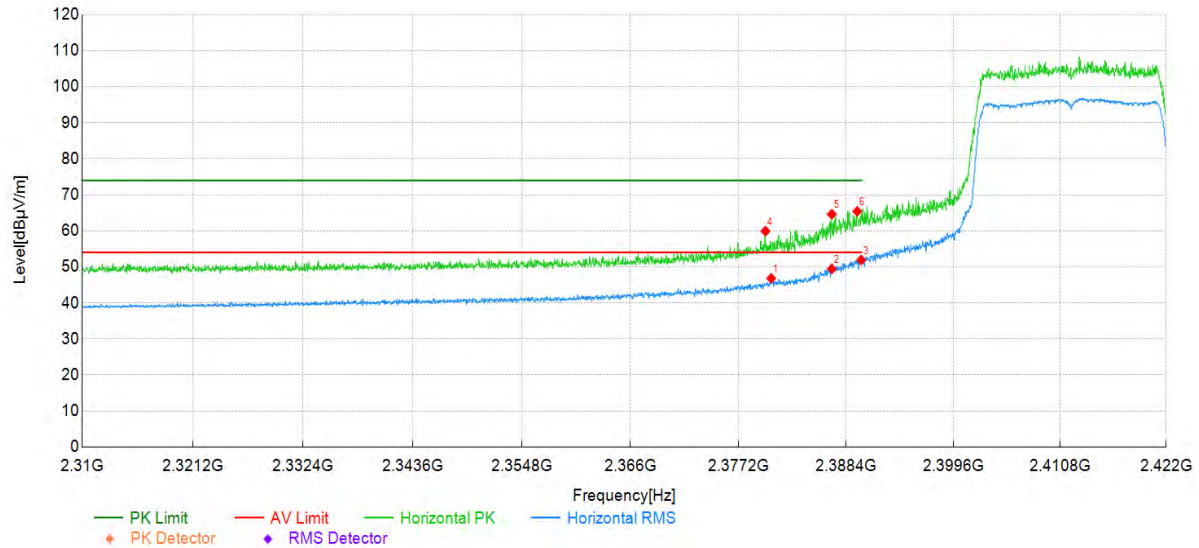Test Graph

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2380.58	45.11	1.70	46.81	54.00	7.19	Horizontal	PASS
2	2386.89	47.71	1.74	49.45	54.00	4.55	Horizontal	PASS
3	2389.96	50.15	1.75	51.90	54.00	2.10	Horizontal	PASS
4	2379.99	58.22	1.70	59.92	74.00	14.08	Horizontal	PASS
5	2386.89	62.87	1.74	64.61	74.00	9.39	Horizontal	PASS
6	2389.55	63.67	1.75	65.42	74.00	8.58	Horizontal	PASS


Project Information			
Mode:	802.11ax20	Band:	-
Bandwidth	-	Channel	1
SN:	E1N25L31T000099	Engineer:	Oushuyan
Remark:	X; Powersetting 10.5		

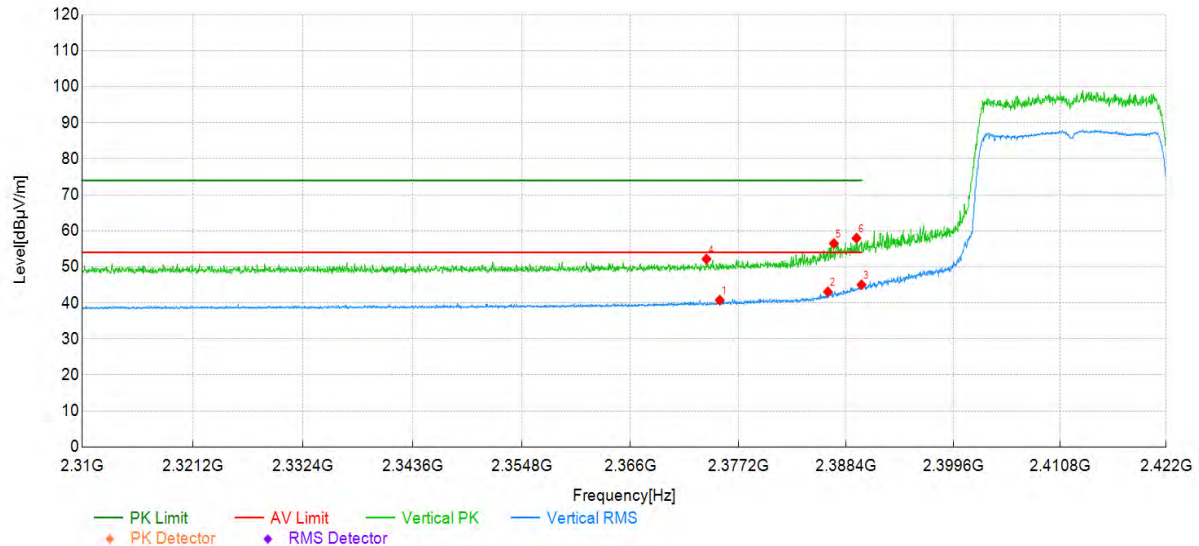Test Graph

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2375.24	39.06	1.68	40.74	54.00	13.26	Vertical	PASS
2	2386.48	41.36	1.74	43.10	54.00	10.90	Vertical	PASS
3	2389.99	43.27	1.75	45.02	54.00	8.98	Vertical	PASS
4	2373.86	50.49	1.68	52.17	74.00	21.83	Vertical	PASS
5	2387.12	54.74	1.74	56.48	74.00	17.52	Vertical	PASS
6	2389.47	56.23	1.75	57.98	74.00	16.02	Vertical	PASS

Project Information			
Mode:	802.11ax20	Band:	-
Bandwidth	-	Channel	11
SN:	E1N25L31T000099	Engineer:	Oushuyan
Remark:	X; Powersetting 10.5		

Test Graph

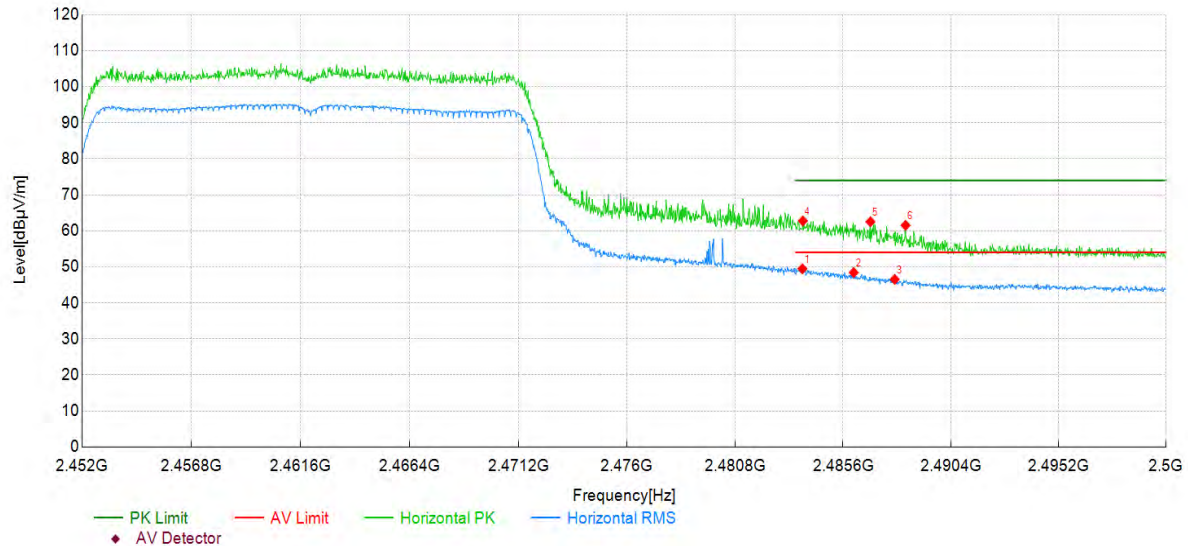


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2483.79	46.77	2.69	49.46	54.00	4.54	Horizontal	PASS
2	2486.07	45.71	2.71	48.42	54.00	5.58	Horizontal	PASS
3	2487.90	43.79	2.73	46.52	54.00	7.48	Horizontal	PASS
4	2483.82	60.06	2.69	62.75	74.00	11.25	Horizontal	PASS
5	2486.82	59.80	2.72	62.52	74.00	11.48	Horizontal	PASS
6	2488.38	58.79	2.73	61.52	74.00	12.48	Horizontal	PASS

Project Information

Mode:	802.11ax20	Band:	-
Bandwidth	-	Channel	11
SN:	E1N25L31T000099	Engineer:	Oushuyan
Remark:	X;Powersetting 10.5		

Test Graph

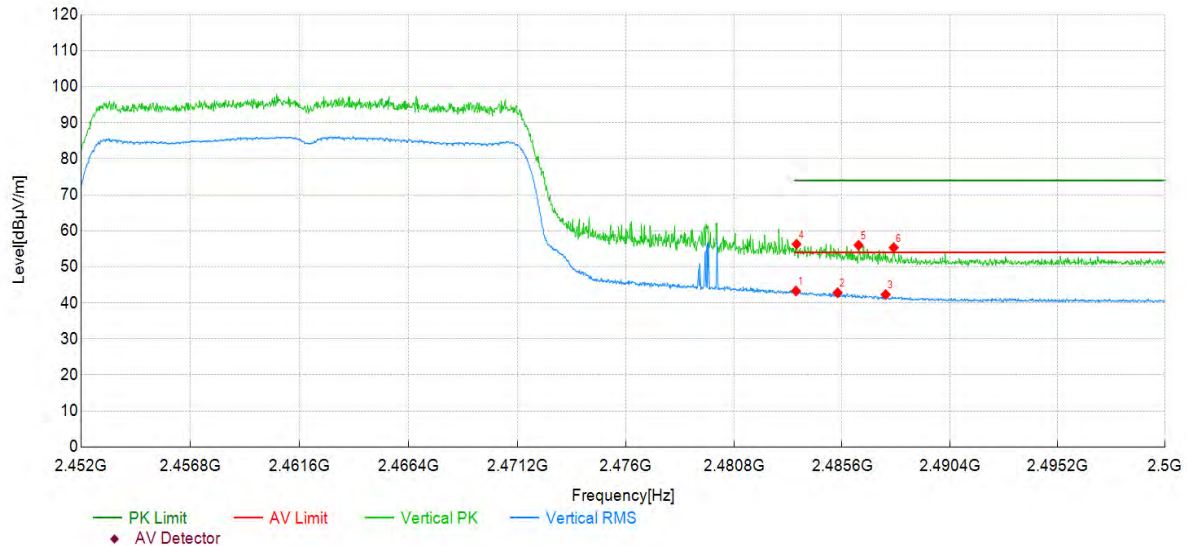

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2483.55	40.63	2.68	43.31	54.00	10.69	Vertical	PASS
2	2485.40	40.13	2.70	42.83	54.00	11.17	Vertical	PASS
3	2487.54	39.58	2.73	42.31	54.00	11.69	Vertical	PASS
4	2483.58	53.62	2.68	56.30	74.00	17.70	Vertical	PASS
5	2486.34	53.29	2.72	56.01	74.00	17.99	Vertical	PASS
6	2487.90	52.61	2.73	55.34	74.00	18.66	Vertical	PASS

~The End~