



Report No.: SUCR260400030904

Page: 1 of 146

TEST REPORT

Application No.: SUCR2604000309MO
FCC ID: XMR2026FME172Q
Applicant: Quectel Wireless Solutions Co., Ltd.
Address of Applicant: No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China
Manufacturer: Quectel Wireless Solutions Co., Ltd.
Address of Manufacturer: No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China
Equipment Under Test (EUT):
EUT Name: Wi-Fi & Bluetooth Module
Model No.: FME172Q
Trade Mark: QUECTEL
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2026-04-03
Date of Test: 2026-06-09 to 2026-07-20
Date of Issue: 2026-07-20


Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Revision Record			
Version	Description	Date	Remark
00	Original	2026-07-20	/

Authorized for issue by:				
Prepared By				
		Nature_Shen/Project Engineer		
Approved By				
		Cedar Cheng /Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2020) Section 6.10.5 & 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6 & 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Maximum Conducted Output Power		ANSI C63.10 (2020) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10 (2020) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectral Density		ANSI C63.10 (2020) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2020) Section 6.10.4	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2020) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Environment Parameter	5
4.3 Description of Support Units	5
4.4 Measurement Uncertainty & Decision Rule	6
4.5 Test Location	7
4.6 Test Facility	7
4.7 Deviation from Standards.....	7
4.8 Abnormalities from Standard Conditions.....	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement.....	10
6.1 Antenna Requirement	10
7 Radio Spectrum Matter Test Results	11
7.1 Radiated Emissions which fall in the restricted bands	11
7.2 Radiated Spurious Emissions Below 1GHz	38
7.3 Radiated Spurious Emissions Above 1GHz.....	42
7.4 Maximum Conducted Output Power	62
7.5 Minimum 6dB Bandwidth.....	64
7.6 Power Spectral Density	65
7.7 Conducted Band Edges Measurement	66
7.8 Conducted Spurious Emissions	68
8 Test Setup Photo	69
9 EUT Constructional Details (EUT Photos).....	69
10 Appendix.....	70

4 General Information

4.1 Details of E.U.T.

Software Version:	NA
Hardware Version:	R1.0
SN:	E1Y26A94M00005
Power supply:	3.3V
Operation Frequency:	802.11b/g/n(HT20)/ax(HEW20)/be(EHT20): 2412MHz to 2462MHz; 802.11n(HT40)/ax(HEW40)/be(EHT40): 2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS (DBPSK, DQPSK, CCK); 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024-QAM); 802.11be: OFDMA with enhancements (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024-QAM, 4096-QAM)
Number of Channels:	802.11b/g/n(HT20)/ax(HEW20)/be(EHT20): 11;802.11n(HT40)/ax(HEW40)/be(EHT40):7
Channel Spacing:	5MHz
Antenna Type:	Dipole Antenna
Antenna Gain:	Ant0:0.2dBi (Provided by the manufacturer) Ant1:0.2dBi (Provided by the manufacturer)
Antenna Number:	2
Note: For 802.11n/ax/be modes, all test items were evaluated only for 802.11be under the operating condition with higher output power.	

4.2 Environment Parameter

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	25	3.3
Note:		
NV:Normal Voltage	LV:Low Extreme Test Voltage	HV:High Extreme Test Voltage
NT:Normal Temperature	LT:Low Extreme Test Temperature	HT:High Extreme Test Temperature

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Computer	Lenovo	T14	2YK6GR
Mouse	Lenovo	3D optical Mouse	N/A
Router	Smavwave Technology Co.,Ltd	SRT 421	RT421X02211300001

4.4 Measurement Uncertainty & Decision Rule

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	Conduction emission	$\pm 3.0\text{dB}$ (150kHz to 30MHz)
5	RF conducted power	$\pm 0.75\text{dB}$
6	RF power density	$\pm 2.84\text{dB}$
7	Conducted Spurious emissions	$\pm 0.75\text{dB}$
8	RF Radiated power	$\pm 1.56\text{dB}$ (9KHz-30MHz)
		$\pm 4.80\text{dB}$ (30MHz-1GHz)
		$\pm 4.80\text{dB}$ (1GHz-18GHz)
		$\pm 4.80\text{dB}$ (18GHz-40GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1\%$
12	Time	$\pm 3\%$
Remark: The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.		

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)
Pilot Free Trade Zone

No tests were sub-contracted.

Note:

1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).

2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).

3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.is accredited by the American Association for Laboratory Accreditation (A2LA).

- **FCC (Designation Number: CN1312)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized as an accredited testing laboratory. Test Firm Registration Number:717327

- **ISED (CAB Identifier: CN0120)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 27594

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
RF Conducted Test						
1	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/14/2026	1/13/2027
2	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-15	11/21/2025	11/20/2026
3	MXG Vector signal genitor	KEYSIGHT	N5182B	SUWI-01-38-01	1/14/2026	1/13/2027
4	Signal Generator	ROHDE&SCHWARZ	SMW200A	SUWI-01-07-08	1/14/2026	1/13/2027
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-08-01	1/14/2026	1/13/2027
6	MXG Vector Signal Generator	ROHDE&SCHWARZ	SMR20	SUWI-01-33-01	11/21/2025	11/20/2026
7	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-13	4/22/2026	4/21/2027
8	Wideband Radio Communication Test Station	Anritsu	MT8000A	SUWI-01-34-02	11/21/2025	11/20/2026
9	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	11/21/2025	11/20/2026
10	Power meter	Anritsu	ML2495A	SUWI-01-31-01	11/21/2025	11/20/2026
11	Pulse power sensor	Anritsu	MA2411B	SUWI-01-32-01	11/21/2025	11/20/2026
12	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/14/2026	1/13/2027
13	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2/11/2026	2/10/2027
14	Temperature Chamber	GIANT FORCE	ICT-017-40-SP-SD	SUWI-01-13-02	5/7/2026	5/6/2027
15	Measurement Software	TST	TST 272 V2.02	SUWI-03-55-03	NCR	NCR
16	RF Control unit	TST	TSCB3023R2	SUWI-02-20-01	NCR	NCR
17	RFCables	Tonscend	NA	SUWI-01-03-01	1/15/2026	1/14/2027
RF Radiated Test						
1	Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/9/2026	6/8/2029
2	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/14/2026	1/13/2027
3	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	11/20/2025	11/19/2026
4	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/14/2026	1/13/2027
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-18-01	1/14/2026	1/13/2027
6	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9168	SUWI-01-11-04	11/29/2025	11/28/2027
7	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/7/2025	5/6/2027
8	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/7/2025	5/6/2027
9	Active Loop Antenna	SCHWRZBECK MESS-ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/7/2025	5/6/2027
10	Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	1/14/2026	1/13/2027
11	Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	1/14/2026	1/13/2027

12	Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	1/14/2026	1/13/2027
13	Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	8/25/2025	8/24/2026
14	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	8/25/2025	8/24/2026
15	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	8/26/2025	8/25/2026
16	Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-06	11/21/2025	11/20/2026
17	Signal Generator	ROHDE&SCHWARZ	SMB100A	SUWI-01-08-01	1/14/2026	1/13/2027
18	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/14/2026	1/13/2027
19	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/11/2026	2/10/2027
20	Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-06	NCR	NCR
21	RF Control unit	Tonscend	JS0806-1	SUWI-02-20-01	NCR	NCR
22	RFCables	Tonscend	NA	SUWI-01-03-02	NCR	NCR

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna are Dipole Antenna and no consideration of replacement. The best case gain of the 2400 MHz to 2483.5 MHz:

Operation Frequency	ANT0 Gain (dBi)	ANT1 Gain (dBi)	Directional gain For Power (dBi)	Directional gain For PSD (dBi)	Power Limit Reduction (dBm)	PSD Limit Reduction (dBm)
2400 MHz to 2483.5 MHz	0.2	0.2	0.2	3.21	0	0

7 Radio Spectrum Matter Test Results

7.1 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.10.5 & 11.12

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode(2.4G)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested. Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

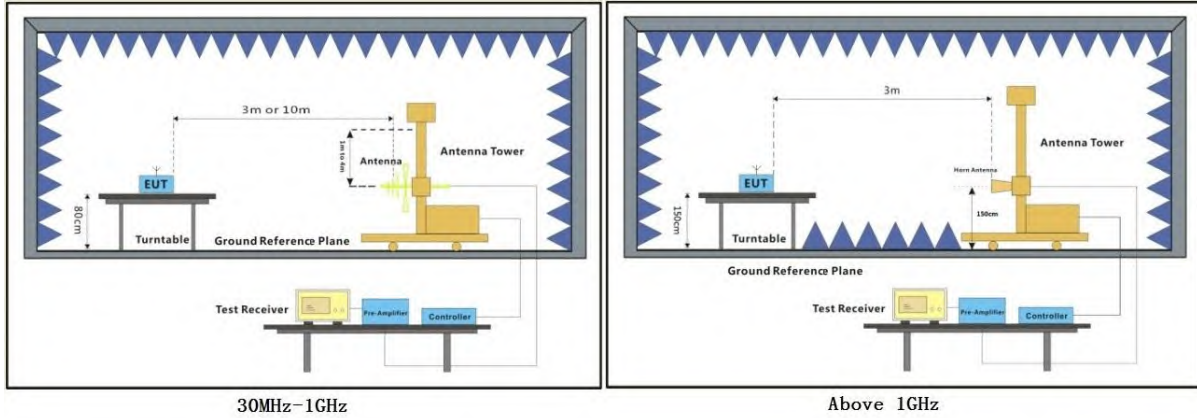

7.1.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.


Remark 4: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

11b_TX_CH_01_Horizontal_Peak

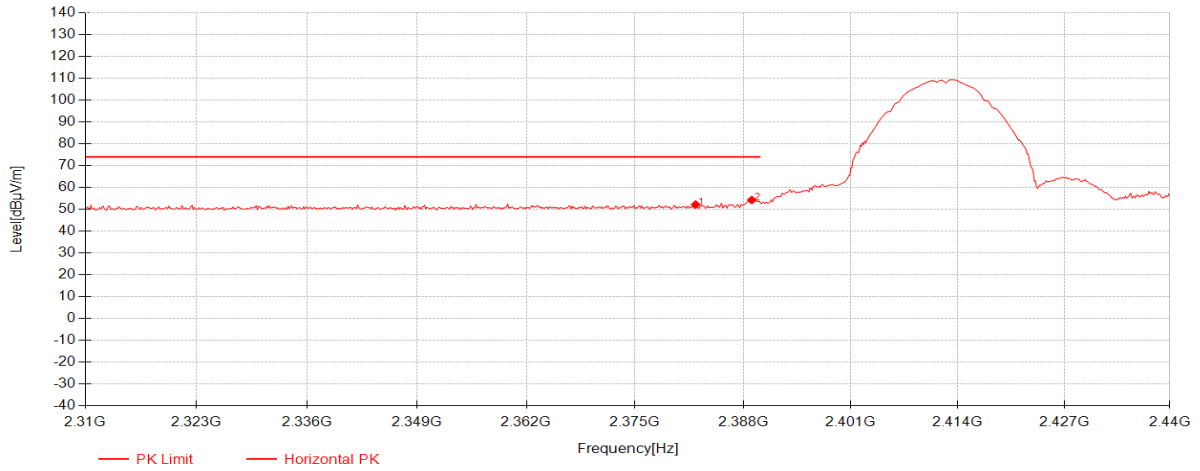


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2382.28	48.51	27.56	-23.87	52.19	74.00	21.81	Horizontal
2	2389.04	50.53	27.61	-23.87	54.28	74.00	19.72	Horizontal

11b_TX_CH_01_Horizontal_Average

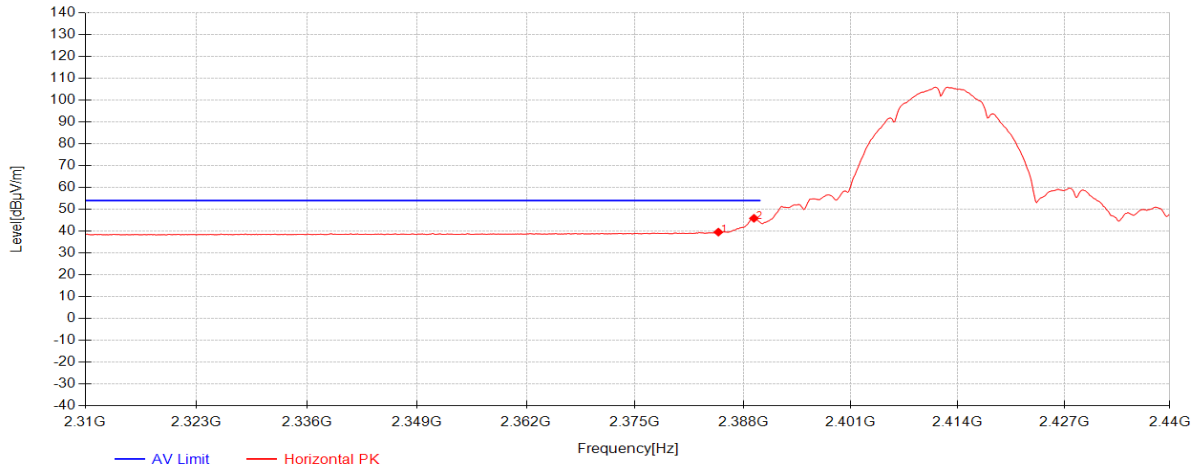


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.01	35.85	27.58	-23.87	39.56	54.00	14.44	Horizontal
2	2389.3	42.15	27.61	-23.86	45.90	54.00	8.10	Horizontal

11b_TX_CH_01_Vertical_Peak

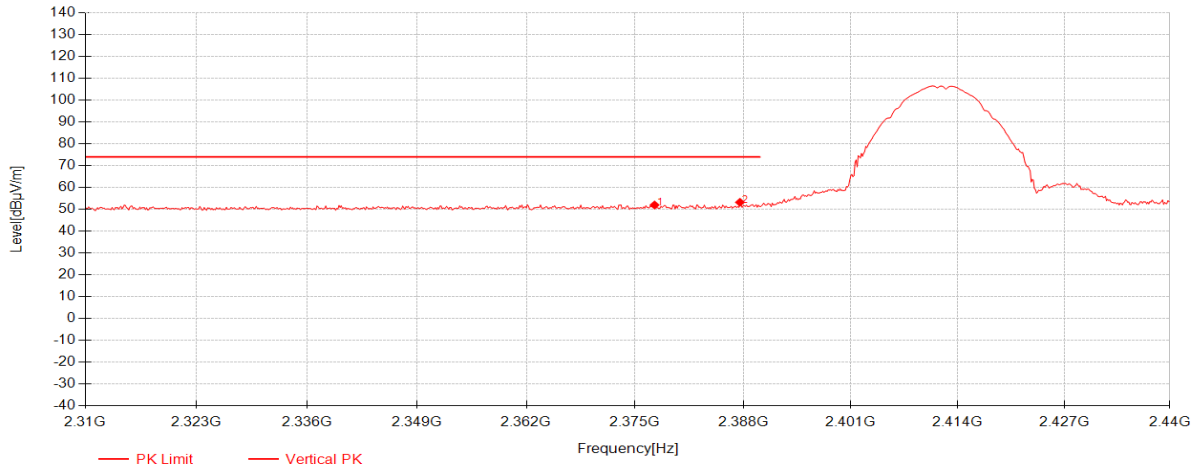


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2377.34	48.36	27.52	-23.88	52.00	74.00	22.00	Vertical
2	2387.61	49.49	27.60	-23.87	53.22	74.00	20.78	Vertical

11b_TX_CH_01_Vertical_Average

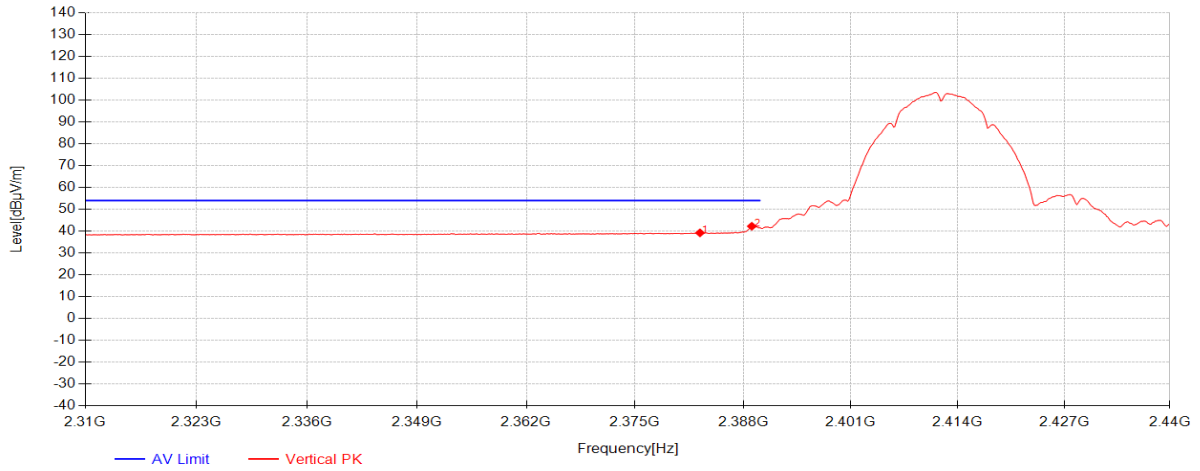


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2382.8	35.52	27.56	-23.87	39.21	54.00	14.79	Vertical
2	2389.04	38.49	27.61	-23.87	42.24	54.00	11.76	Vertical

11b_TX_CH_11_Horizontal_Peak

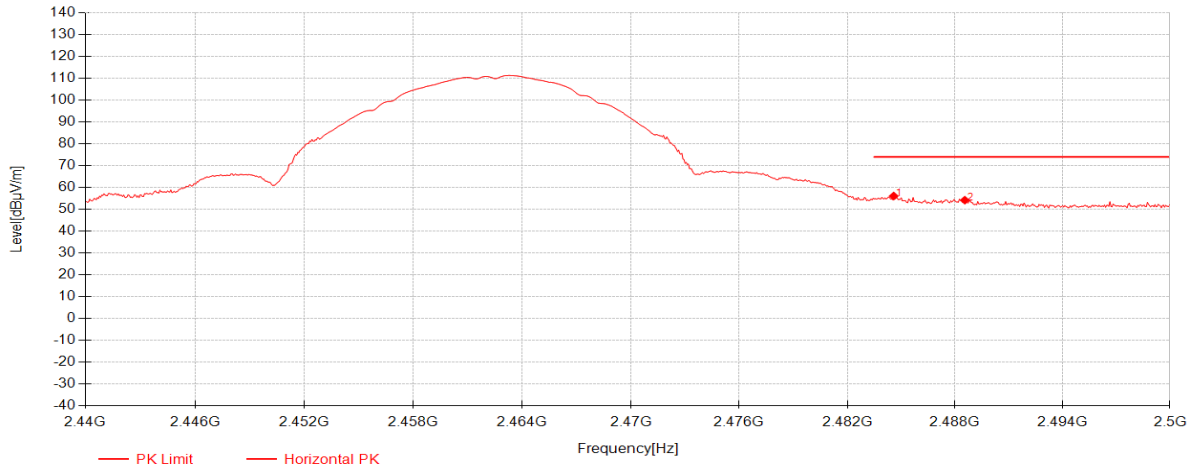


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.58	51.84	27.90	-23.64	56.10	74.00	17.90	Horizontal
2	2488.54	49.93	27.90	-23.63	54.20	74.00	19.80	Horizontal

11b_TX_CH_11_Horizontal_Average

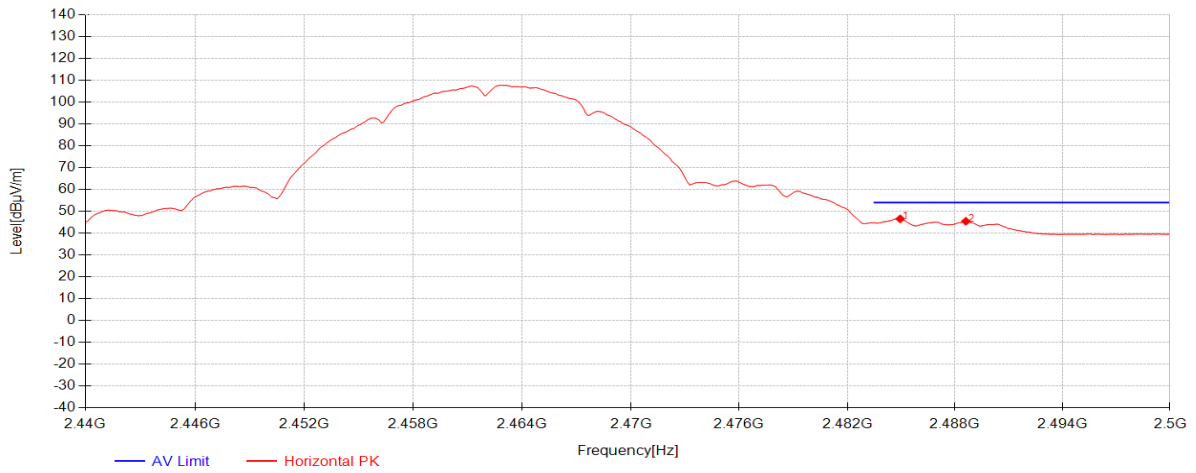


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.94	42.29	27.90	-23.64	46.55	54.00	7.45	Horizontal
2	2488.6	41.17	27.90	-23.63	45.44	54.00	8.56	Horizontal

11b_TX_CH_11_Vertical_Peak

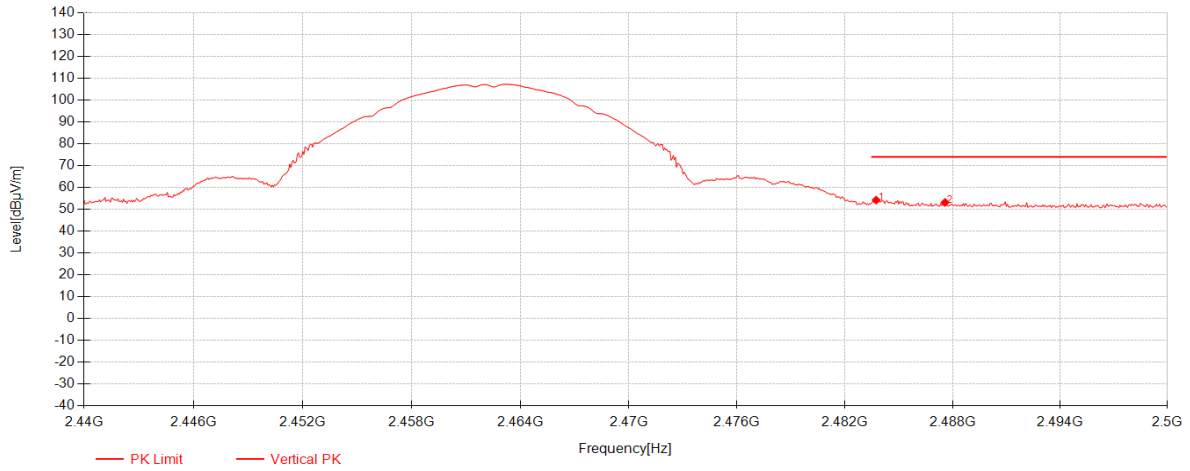


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.74	50.00	27.90	-23.64	54.26	74.00	19.74	Vertical
2	2487.58	48.90	27.90	-23.63	53.17	74.00	20.83	Vertical

11b_TX_CH_11_Vertical_Average

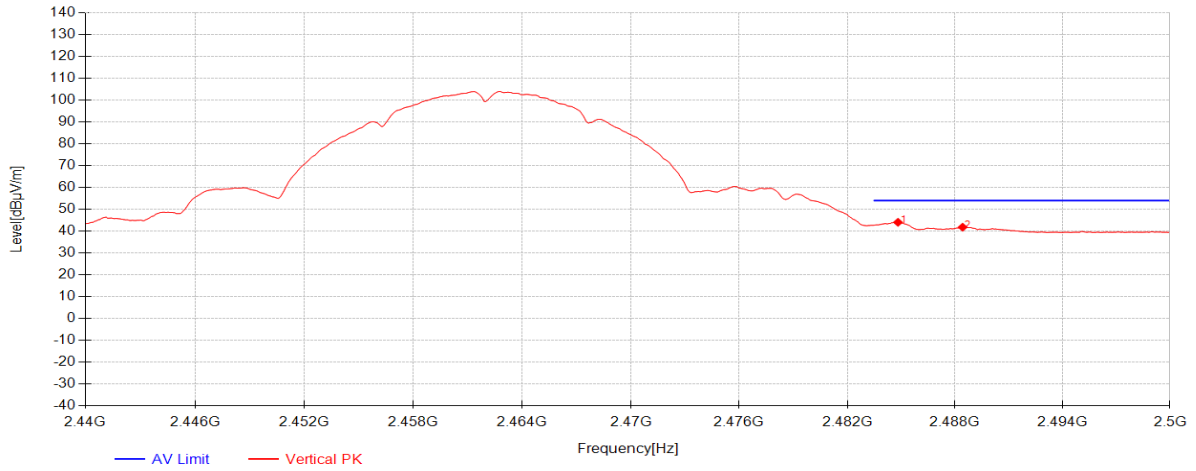


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.82	39.79	27.90	-23.64	44.05	54.00	9.95	Vertical
2	2488.42	37.55	27.90	-23.63	41.82	54.00	12.18	Vertical

11be(EHT20)_TX_CH_01_Horizontal_Peak

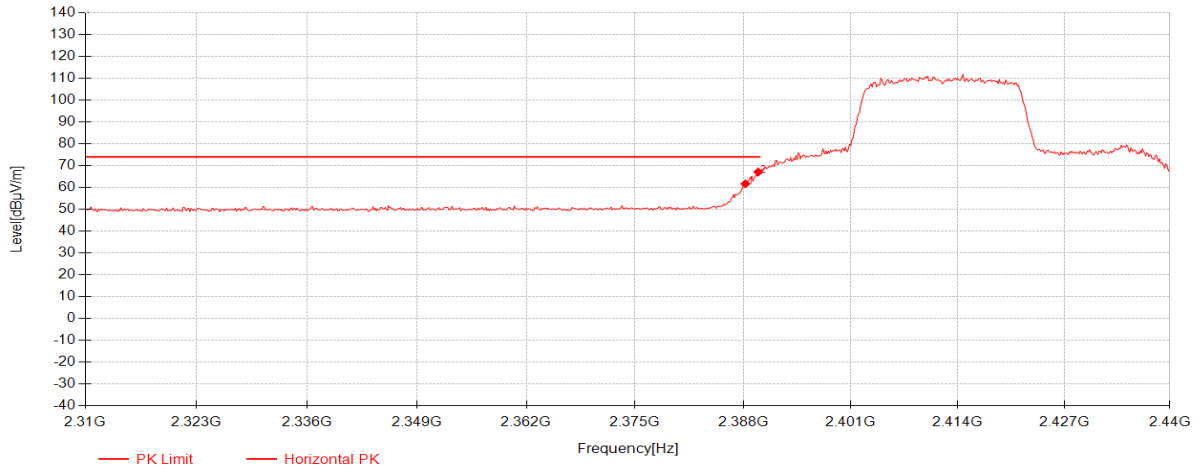


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.26	57.96	27.61	-23.87	61.70	74.00	12.30	Horizontal
2	2389.82	63.37	27.62	-23.86	67.12	74.00	6.88	Horizontal

11be(EHT20)_TX_CH_01_Horizontal_Average

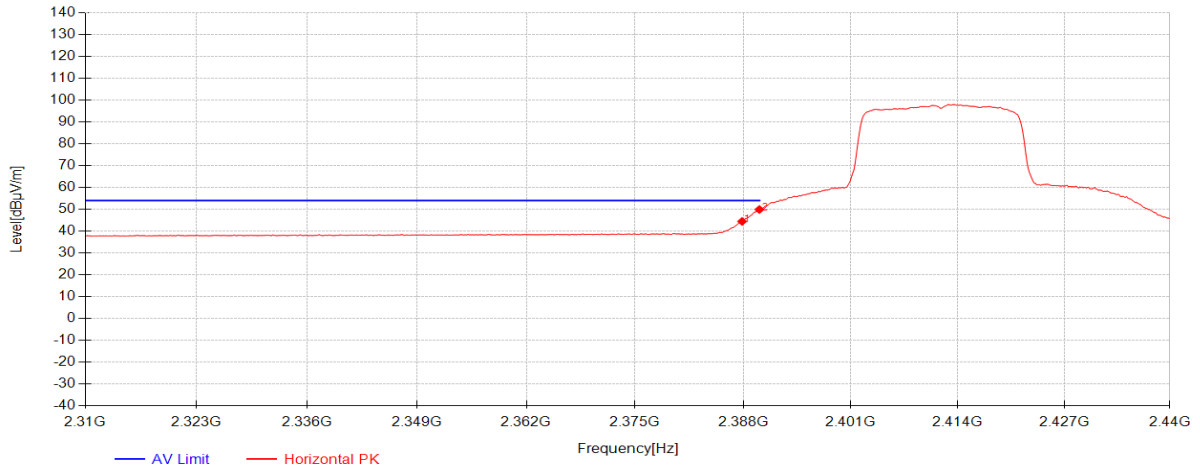


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.87	40.71	27.60	-23.87	44.45	54.00	9.55	Horizontal
2	2389.95	46.16	27.62	-23.86	49.92	54.00	4.08	Horizontal

11be(EHT20)_TX_CH_01_Vertical_Peak

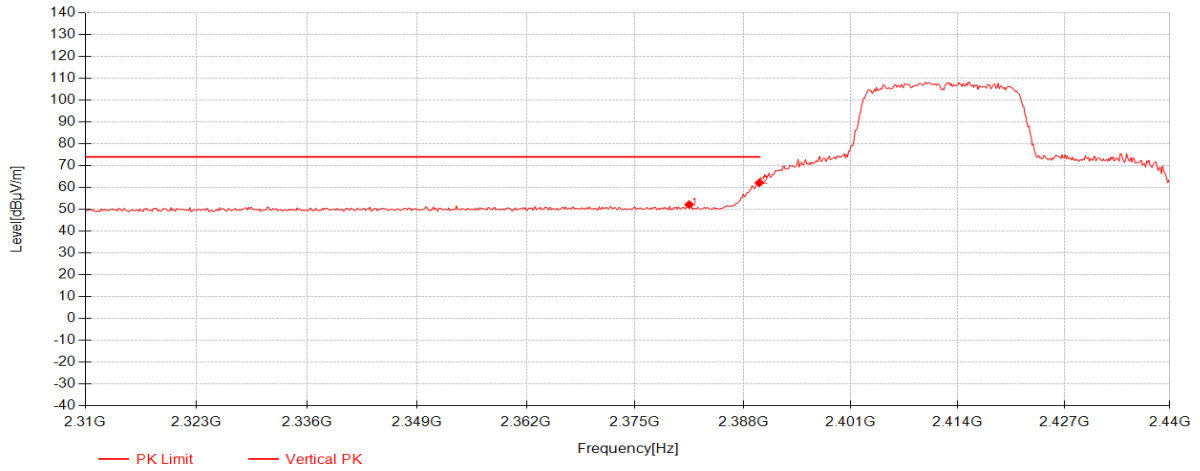


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2381.5	48.50	27.55	-23.88	52.18	74.00	21.82	Vertical
2	2389.95	58.40	27.62	-23.86	62.16	74.00	11.84	Vertical

11be(EHT20)_TX_CH_01_Vetical_Average

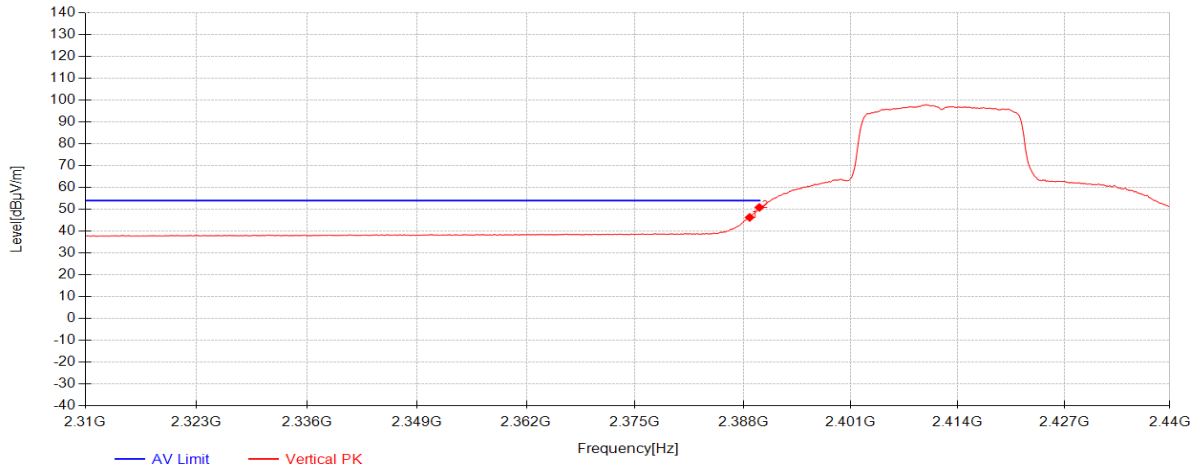


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.78	42.55	27.61	-23.87	46.29	54.00	7.71	Vertical
2	2389.95	47.12	27.62	-23.86	50.88	54.00	3.12	Vertical

11be(EHT20)_TX_CH_11_Horizontal_Peak

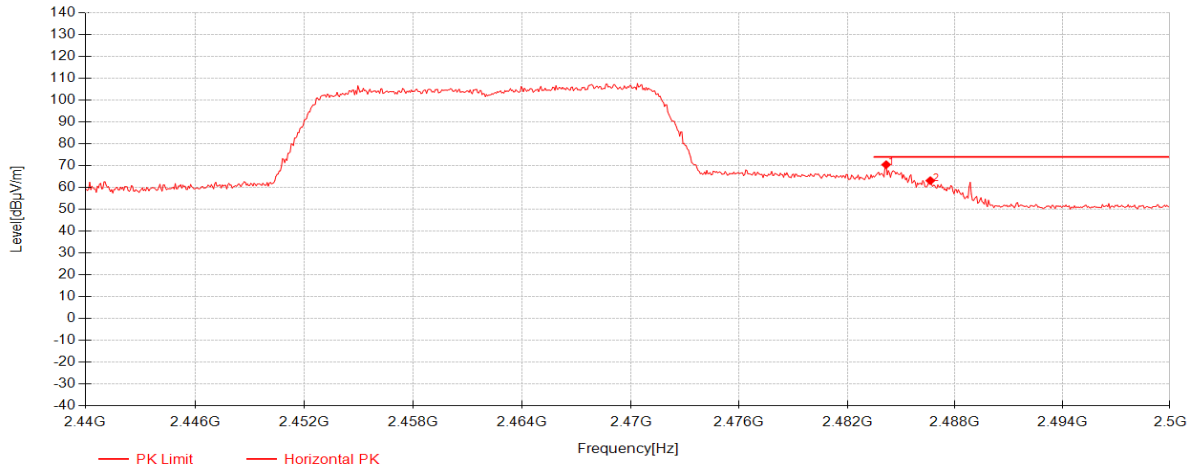


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.16	66.21	27.90	-23.64	70.47	74.00	3.53	Horizontal
2	2486.62	58.87	27.90	-23.63	63.14	74.00	10.86	Horizontal

11be(EHT20)_TX_CH_11_Horizontal_Average

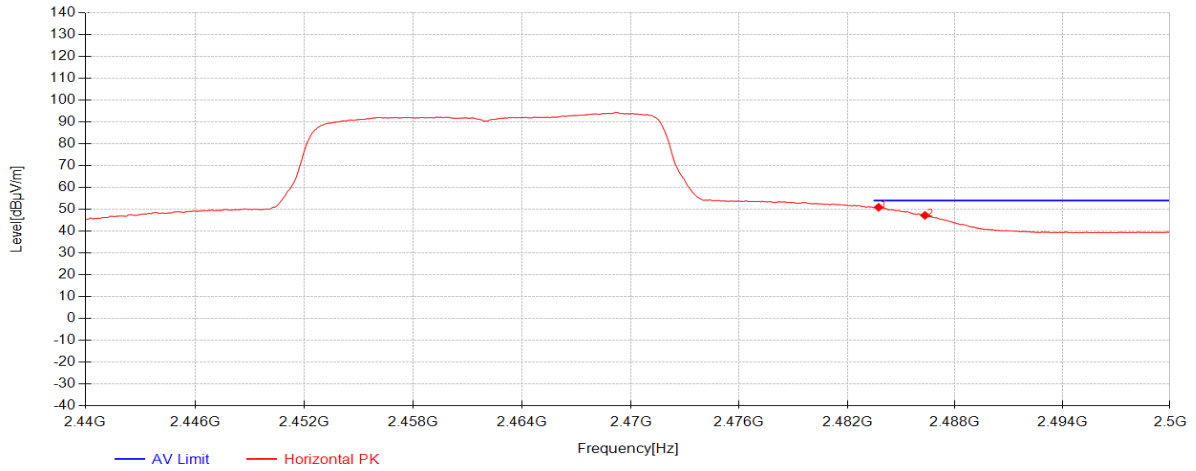


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.74	46.68	27.90	-23.64	50.94	54.00	3.06	Horizontal
2	2486.32	42.97	27.90	-23.63	47.24	54.00	6.76	Horizontal

11be(EHT20)_TX_CH_11_Vertical_Peak

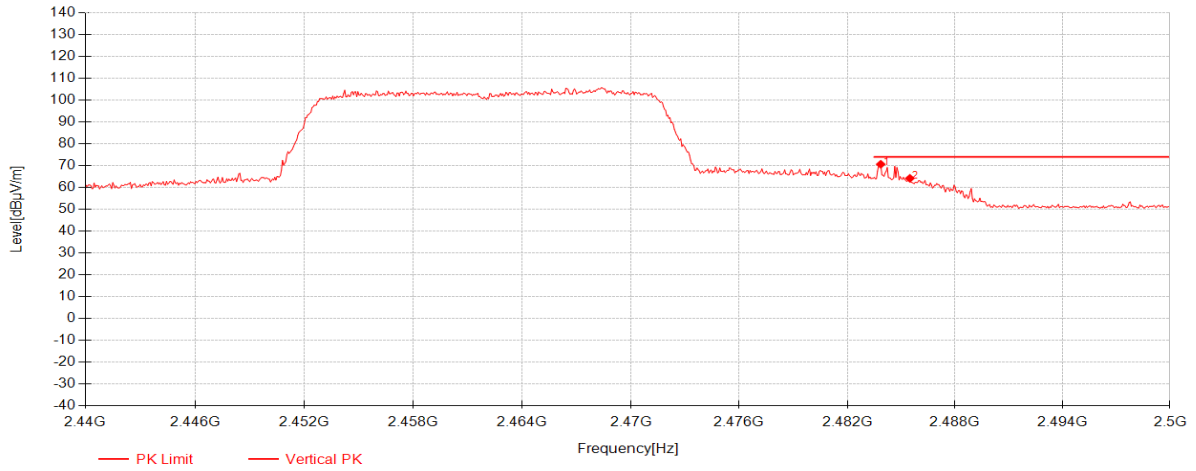


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.86	66.39	27.90	-23.64	70.65	74.00	3.35	Vertical
2	2485.48	59.94	27.90	-23.64	64.20	74.00	9.80	Vertical

11be(EHT20)_TX_CH_11_Vetical_Average

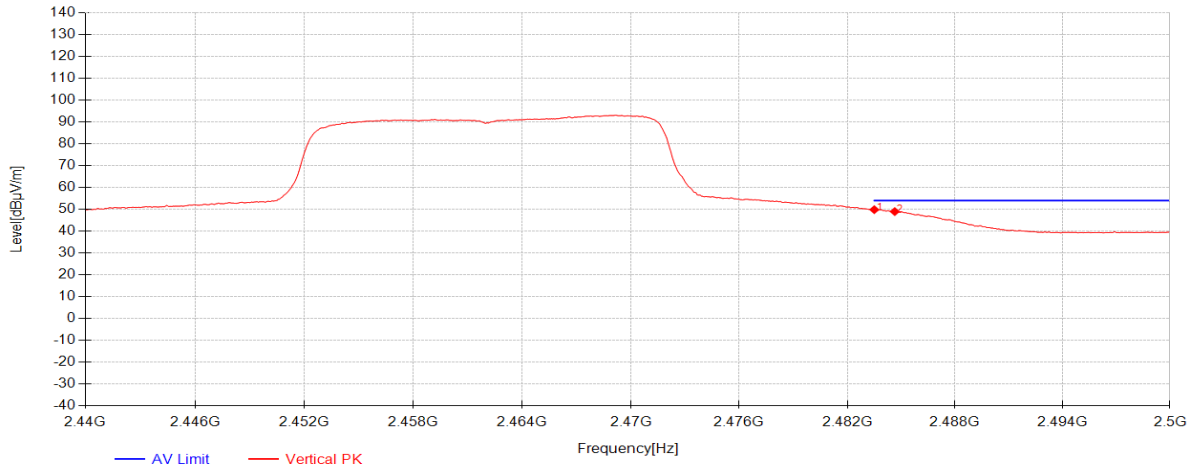


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.5	45.59	27.90	-23.64	49.85	54.00	4.15	Vertical
2	2484.64	44.69	27.90	-23.64	48.95	54.00	5.05	Vertical

11be(EHT40)_TX_CH_03_Horizontal_Peak

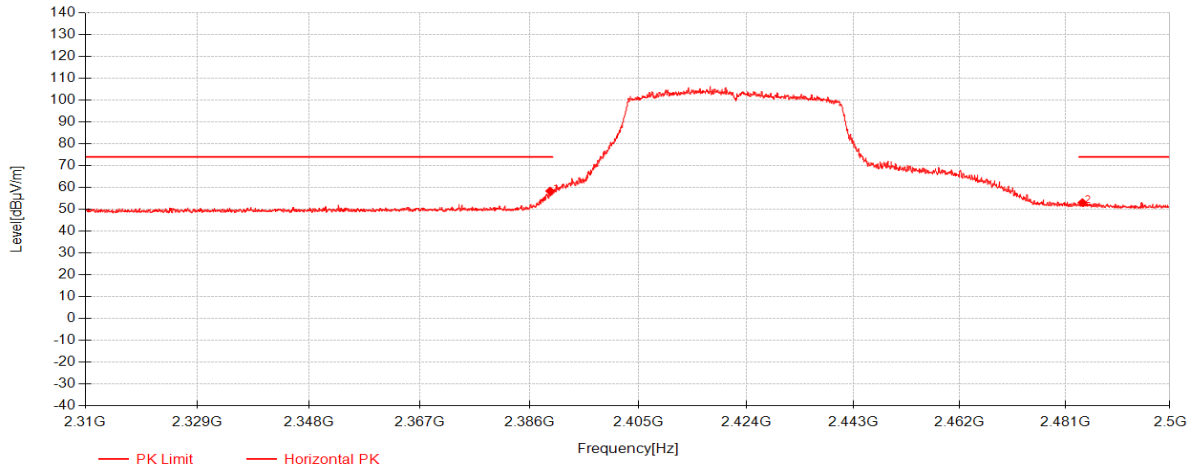


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.6033	54.62	27.62	-23.86	58.37	74.00	15.63	Horizontal
2	2484.1	48.84	27.90	-23.64	53.10	74.00	20.90	Horizontal

11be(EHT40)_TX_CH_03_Horizontal_Average

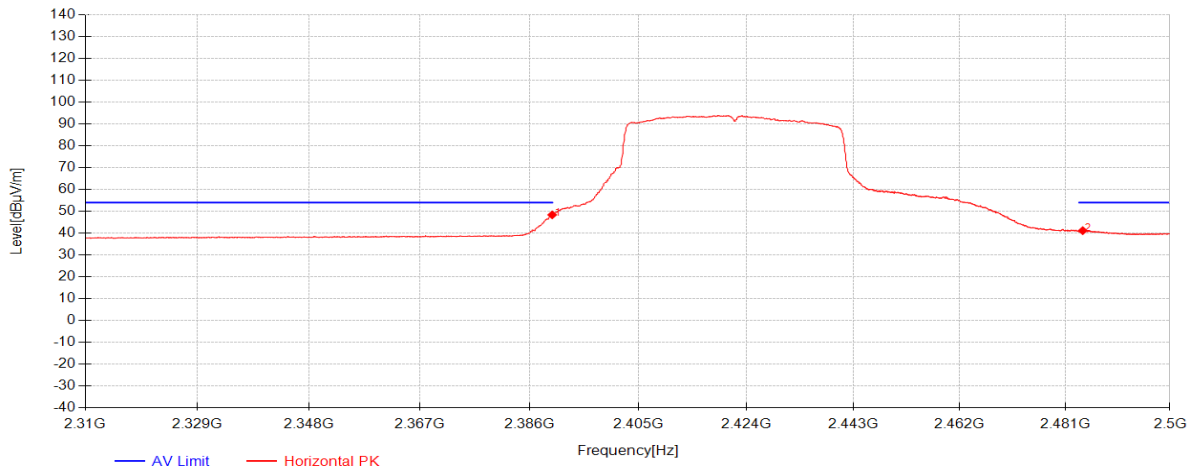


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.95	44.63	27.62	-23.86	48.39	54.00	5.61	Horizontal
2	2484.16	36.88	27.90	-23.64	41.14	54.00	12.86	Horizontal

11be(EHT40)_TX_CH_03_Vetical_Peak

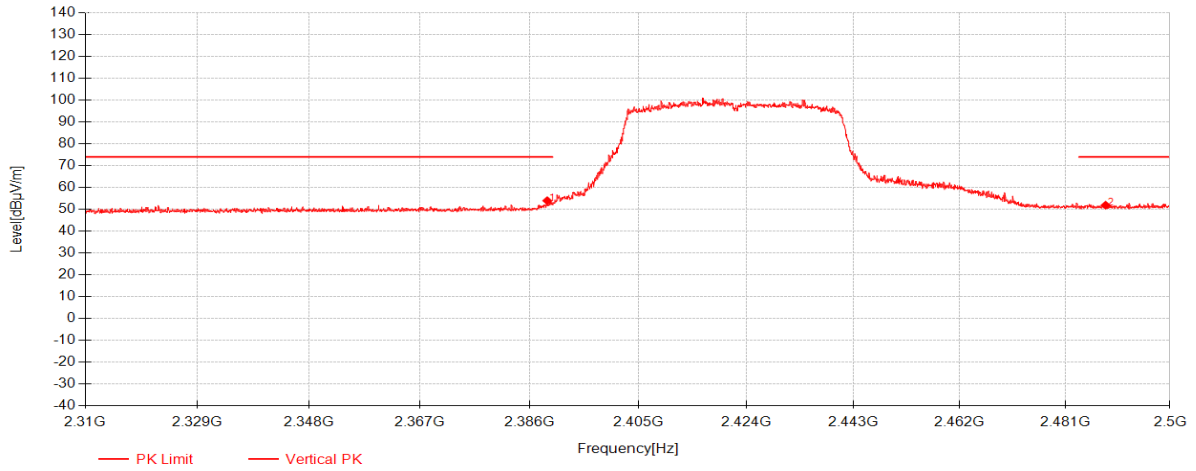


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.0833	50.21	27.61	-23.87	53.96	74.00	20.04	Vertical
2	2488.3	47.63	27.90	-23.63	51.90	74.00	22.10	Vertical

11be(EHT40)_TX_CH_03_Vetical_Average

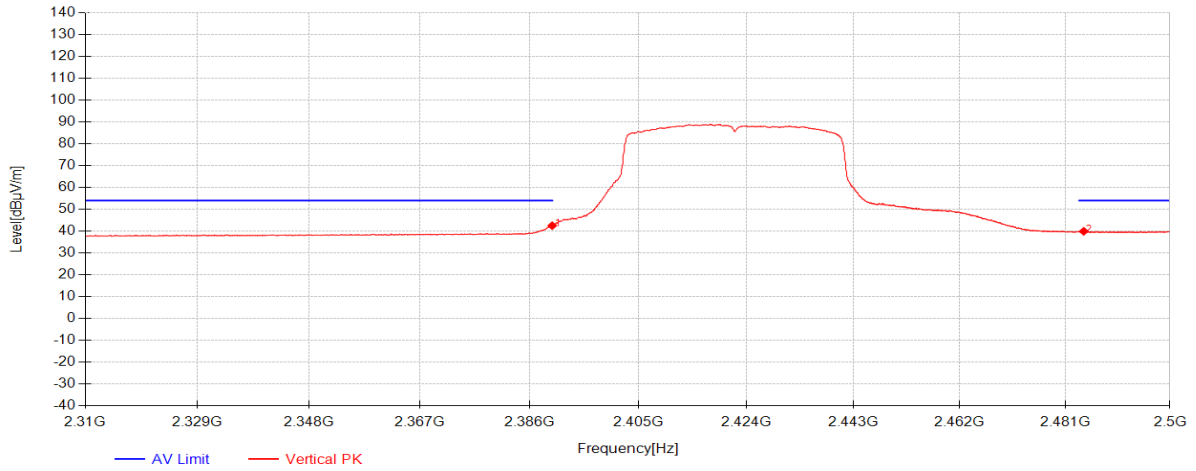


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.95	38.76	27.62	-23.86	42.52	54.00	11.48	Vertical
2	2484.34	35.66	27.90	-23.64	39.92	54.00	14.08	Vertical

11be(EHT40)_TX_CH_09_Horizontal_Peak

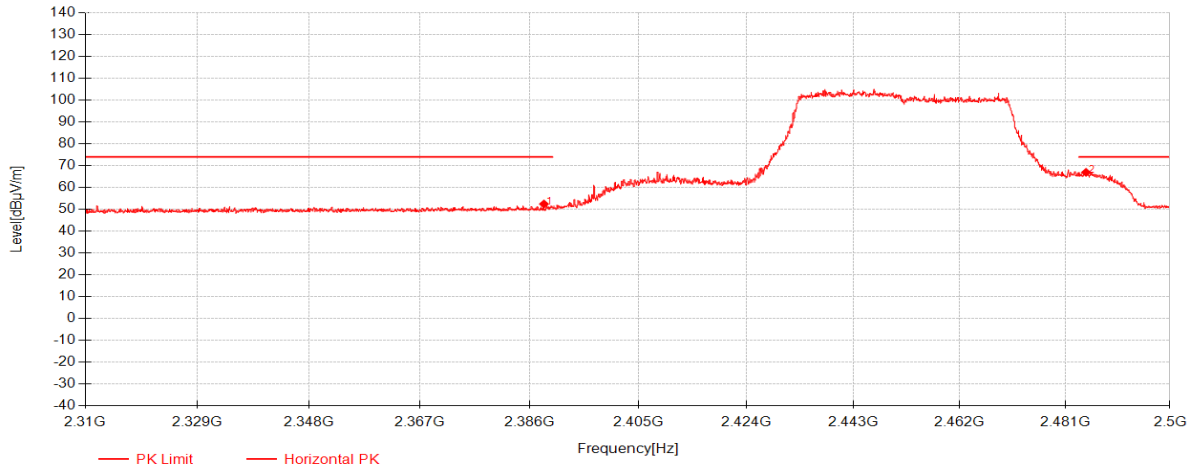


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.52	48.71	27.61	-23.87	52.45	74.00	21.55	Horizontal
2	2484.76	62.69	27.90	-23.64	66.95	74.00	7.05	Horizontal

11be(EHT40)_TX_CH_09_Horizontal_Average

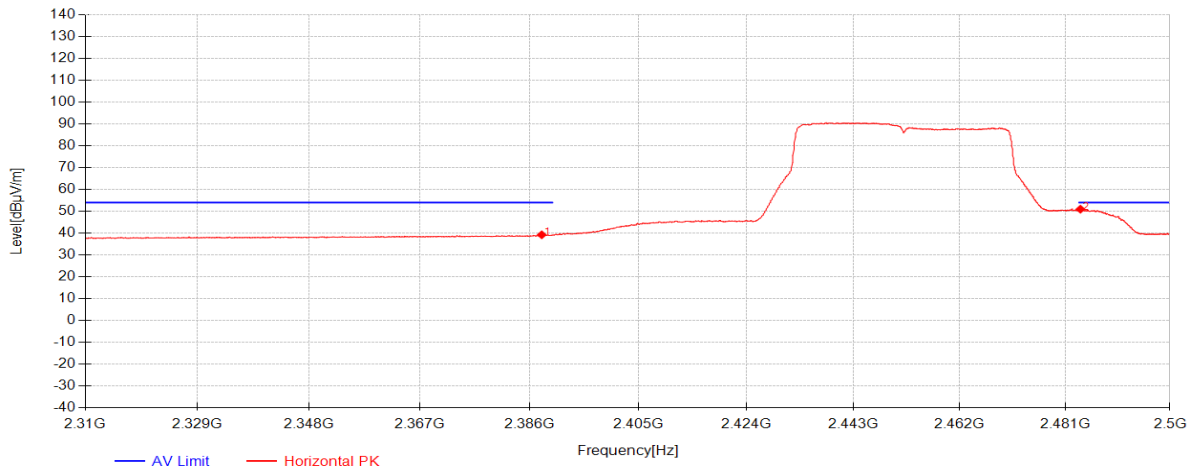


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.13	35.50	27.61	-23.87	39.24	54.00	14.76	Horizontal
2	2483.74	46.71	27.90	-23.64	50.97	54.00	3.03	Horizontal

11be(EHT40)_TX_CH_09_Vetical_Peak

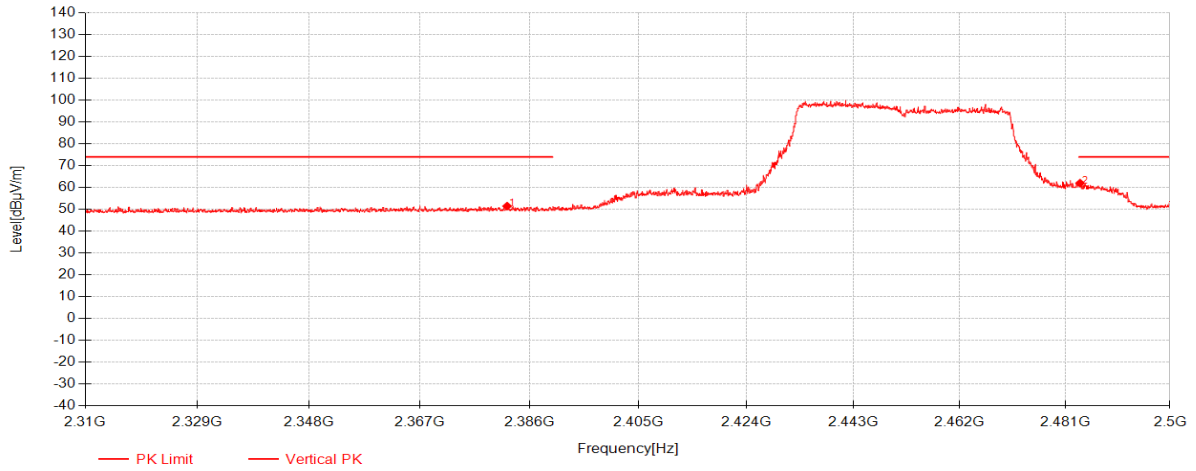

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2382.1067	47.80	27.56	-23.88	51.48	74.00	22.52	Vertical
2	2483.68	57.75	27.90	-23.64	62.01	74.00	11.99	Vertical

11be(EHT40)_TX_CH_09_Vertical_Average

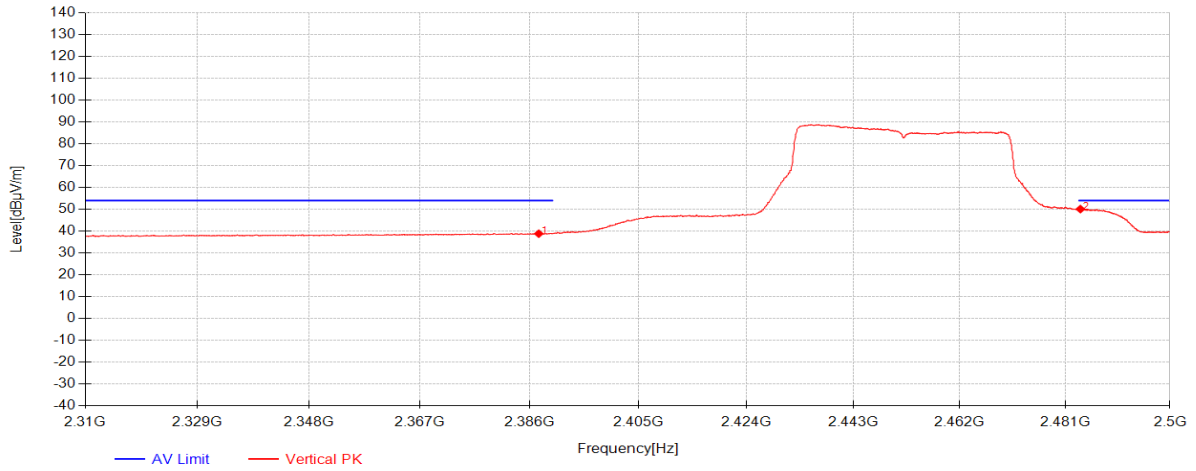

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.61	35.11	27.60	-23.87	38.84	54.00	15.16	Vertical
2	2483.74	45.84	27.90	-23.64	50.10	54.00	3.90	Vertical

7.2 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

Limit:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	Field strength (dBμV/m@3m)
0.009-0.490	2400/F(kHz)	300	128.5 to 93.8
0.490-1.705	24000/F(kHz)	30	73.8 to 62.9
1.705-30.0	30	30	69.60
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
960-1000	500	3	54.0

Note : The above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode(2.4G)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested. Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

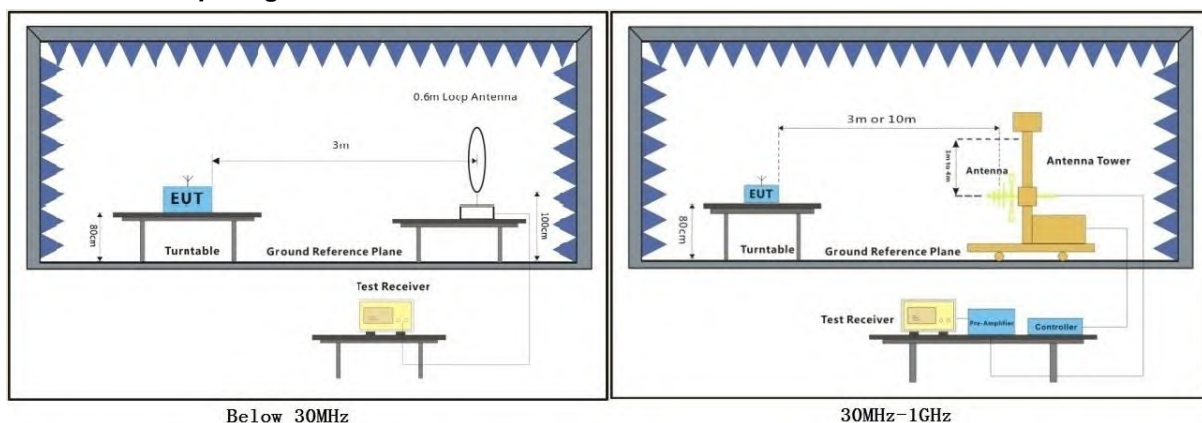


7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8m above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3m or 10m away from the interference-receiving antenna, which was mounted on the variable-height antenna tower.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1m) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


- 1 Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
2. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the worst-case test curve is displayed.

Test Mode: 06; Polarity: Horizontal

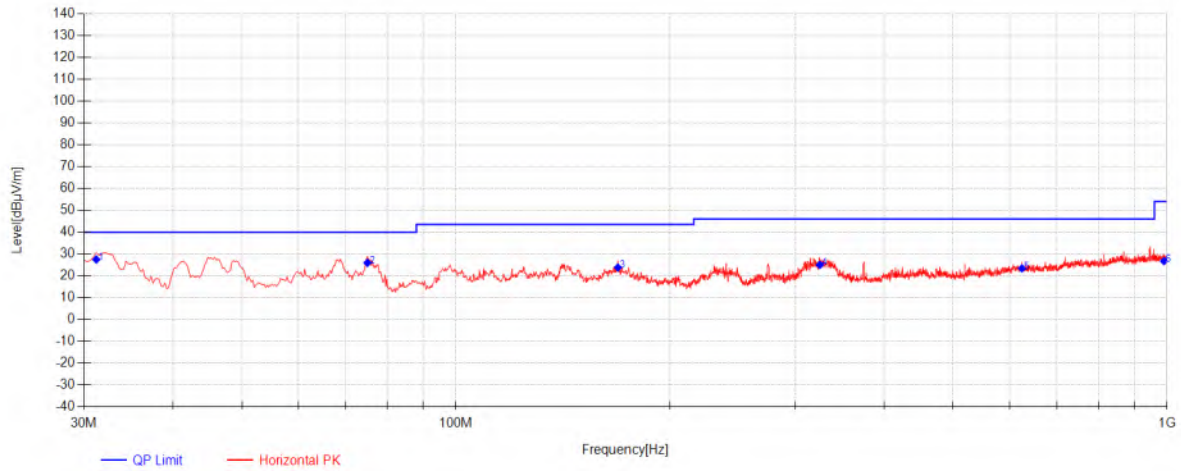

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	31.2125	51.44	-42.30	18.34	27.48	40.00	12.52	Horizontal
2	75.105	51.15	-41.73	16.52	25.94	40.00	14.06	Horizontal
3	168.9525	45.22	-40.67	19.25	23.80	43.50	19.70	Horizontal
4	324.88	45.10	-39.79	19.67	24.98	46.00	21.02	Horizontal
5	625.095	34.24	-37.65	26.78	23.37	46.00	22.63	Horizontal
6	990.0575	32.51	-35.71	29.92	26.72	54.00	27.28	Horizontal

Test Mode: 06; Polarity: Vertical

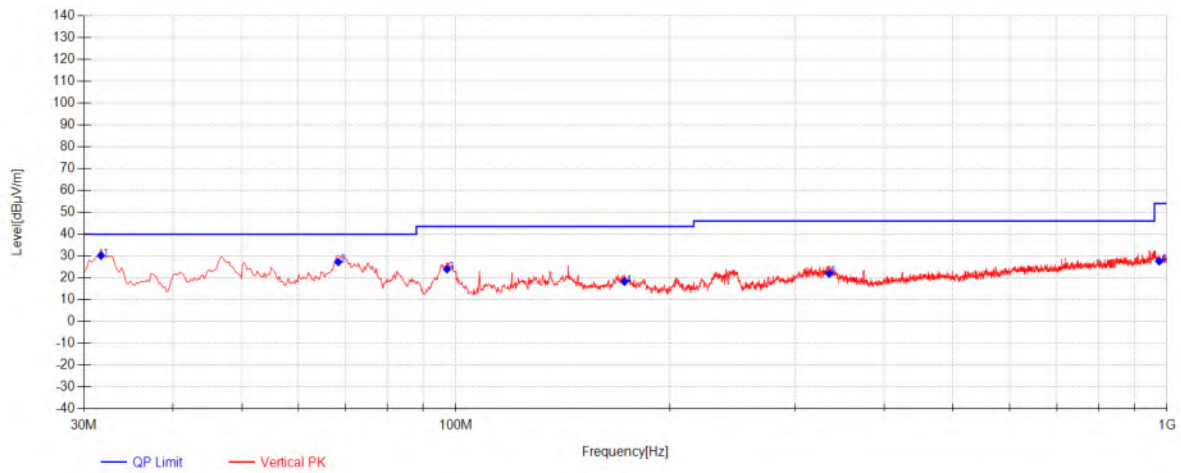

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	31.6975	54.01	-42.30	18.44	30.15	40.00	9.85	Vertical
2	68.315	50.83	-41.86	18.25	27.23	40.00	12.77	Vertical
3	97.1725	51.12	-41.43	14.22	23.91	43.50	19.59	Vertical
4	172.59	40.16	-40.66	18.68	18.18	43.50	25.32	Vertical
5	334.8225	41.16	-39.77	20.54	21.93	46.00	24.07	Vertical
6	974.78	33.62	-35.62	29.61	27.61	54.00	26.39	Vertical

7.3 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.6 & 11.12

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

Note:

At Above 18GHz, measurements may be performed at a distance shorter than that specified in the regulations

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Above 18GHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(1/3) = -9.54\text{dB}$ (for 1m test distance).

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode(2.4G)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested. Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

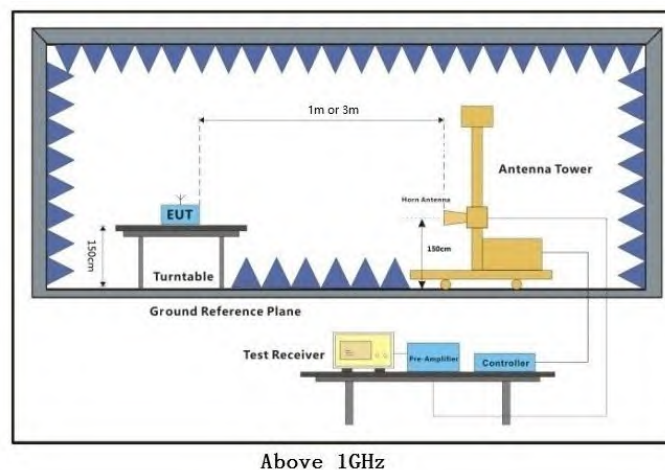


7.3.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5m above the ground at a 3m fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3m away from the interference-receiving antenna from 1GHz to 18GHz, and 1m away from the interference-receiving antenna above 18GHz.
- b. The interference-receiving antenna was mounted on the variable-height antenna tower, with its boresight facing the EUT throughout the test.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- g. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- h. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Scan from 1GHz to 10th harmonic of the highest frequency or 40 GHz, whichever is lower.
2. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
3. For the frequency above 18GHz, testing had been executed under all test modes, only the worst-case test curve is displayed in the report.
4. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s).

11b_TX_CH_01_Horizontal

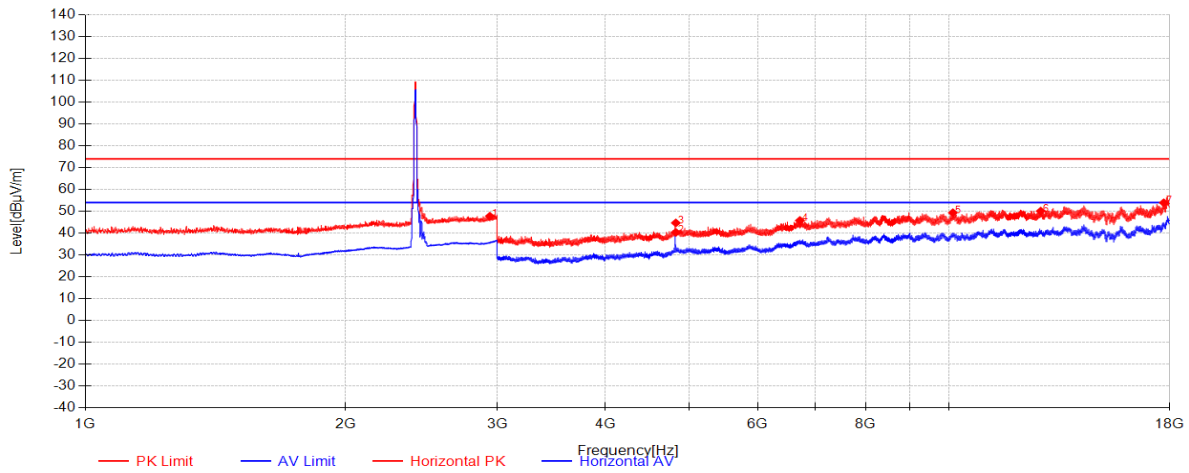


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2939	41.58	29.11	-22.89	47.80	74.00	26.20	Horizontal
2	4824.375	53.34	33.00	-45.98	40.36	54.00	13.64	Horizontal
3	4824.375	57.67	33.00	-45.98	44.69	74.00	29.31	Horizontal
4	6714.75	54.08	36.04	-44.30	45.82	74.00	28.18	Horizontal
5	10093.875	50.26	38.58	-39.49	49.35	74.00	24.65	Horizontal
6	12754.875	48.83	39.45	-38.16	50.11	74.00	23.89	Horizontal
7	17706.375	48.38	41.24	-35.70	53.92	74.00	20.08	Horizontal

11b_TX_CH_01_Vertical

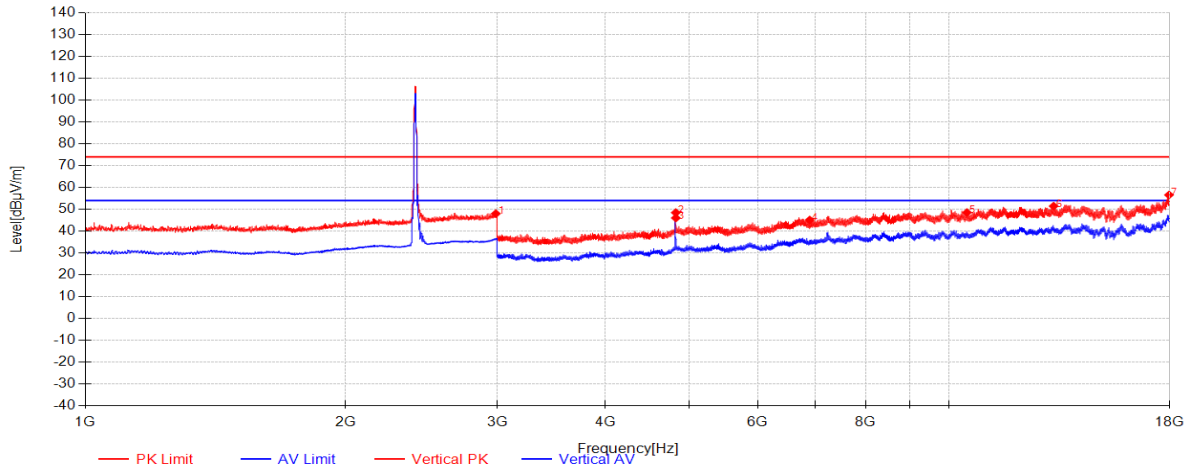


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2986	41.07	29.78	-22.83	48.02	74.00	25.98	Vertical
2	4824	61.45	33.00	-45.98	48.47	74.00	25.53	Vertical
3	4824.375	59.02	33.00	-45.98	46.04	54.00	7.96	Vertical
4	6892.125	54.61	36.04	-45.57	45.08	74.00	28.92	Vertical
5	10479.75	49.50	38.38	-39.35	48.53	74.00	25.47	Vertical
6	13202.625	48.58	39.80	-36.93	51.45	74.00	22.55	Vertical
7	17956.5	48.95	42.88	-35.23	56.60	74.00	17.40	Vertical

11b_TX_CH_06_Horizontal

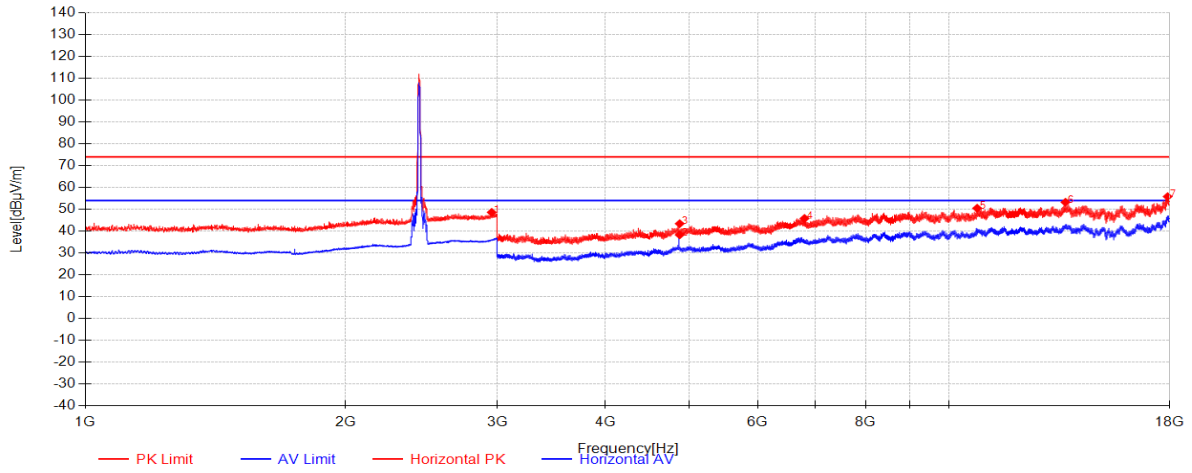


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2953.5	42.23	29.26	-22.87	48.62	74.00	25.38	Horizontal
2	4874.25	51.45	32.95	-46.11	38.30	54.00	15.70	Horizontal
3	4874.25	56.57	32.95	-46.11	43.42	74.00	30.58	Horizontal
4	6798.375	54.76	35.61	-44.54	45.83	74.00	28.17	Horizontal
5	10768.125	50.31	38.87	-38.68	50.50	74.00	23.50	Horizontal
6	13625.25	49.69	39.93	-36.35	53.26	74.00	20.74	Horizontal
7	17889.75	48.18	42.53	-34.88	55.83	74.00	18.17	Horizontal

11b_TX_CH_06_Vertical

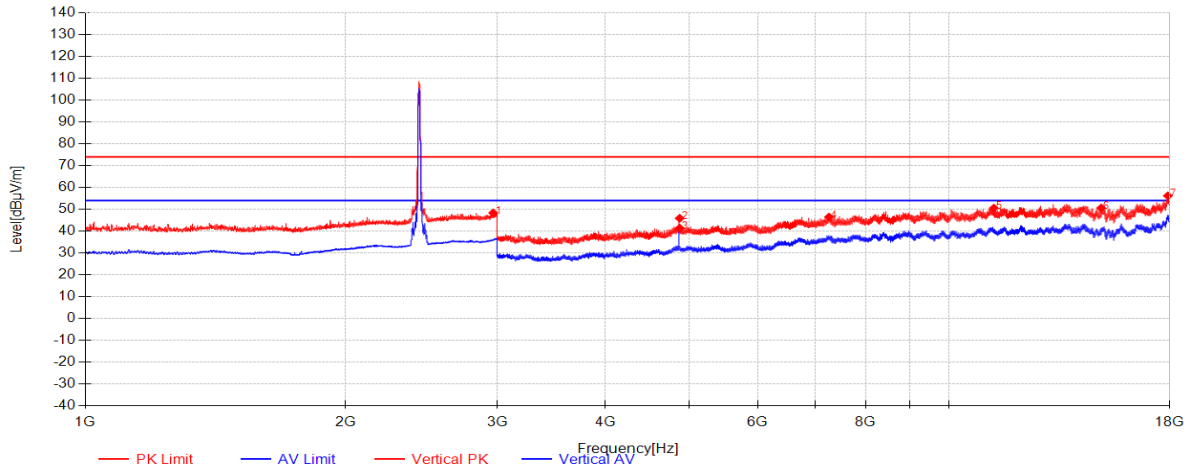


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2965	41.77	29.44	-22.86	48.35	74.00	25.65	Vertical
2	4873.875	59.06	32.96	-46.10	45.91	74.00	28.09	Vertical
3	4874.25	54.54	32.95	-46.11	41.39	54.00	12.61	Vertical
4	7255.875	53.95	36.66	-44.14	46.47	74.00	27.53	Vertical
5	11258.25	49.86	38.92	-38.24	50.54	74.00	23.46	Vertical
6	14986.875	48.03	39.49	-36.91	50.61	74.00	23.39	Vertical
7	17899.5	48.24	42.60	-34.64	56.19	74.00	17.81	Vertical

11b_TX_CH_11_Horizontal

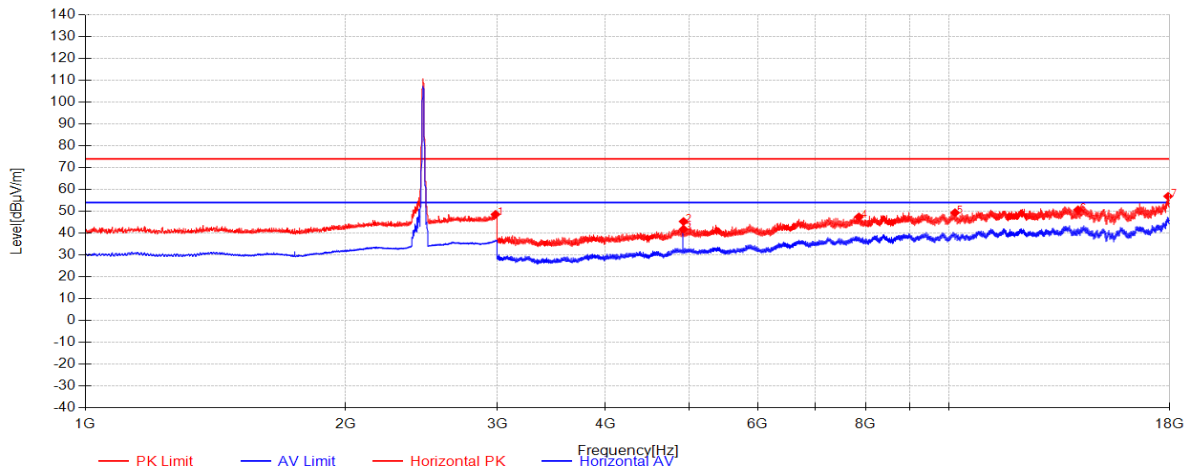


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2984	41.71	29.74	-22.83	48.62	74.00	25.38	Horizontal
2	4924.125	58.62	32.80	-46.08	45.34	74.00	28.66	Horizontal
3	4924.5	55.08	32.80	-46.08	41.80	54.00	12.20	Horizontal
4	7857.75	53.73	36.62	-42.90	47.45	74.00	26.55	Horizontal
5	10151.625	50.16	38.45	-39.23	49.37	74.00	24.63	Horizontal
6	14089.5	47.36	39.83	-36.50	50.69	74.00	23.31	Horizontal
7	17914.125	48.99	42.67	-34.78	56.88	74.00	17.12	Horizontal

11b_TX_CH_11_Vertical

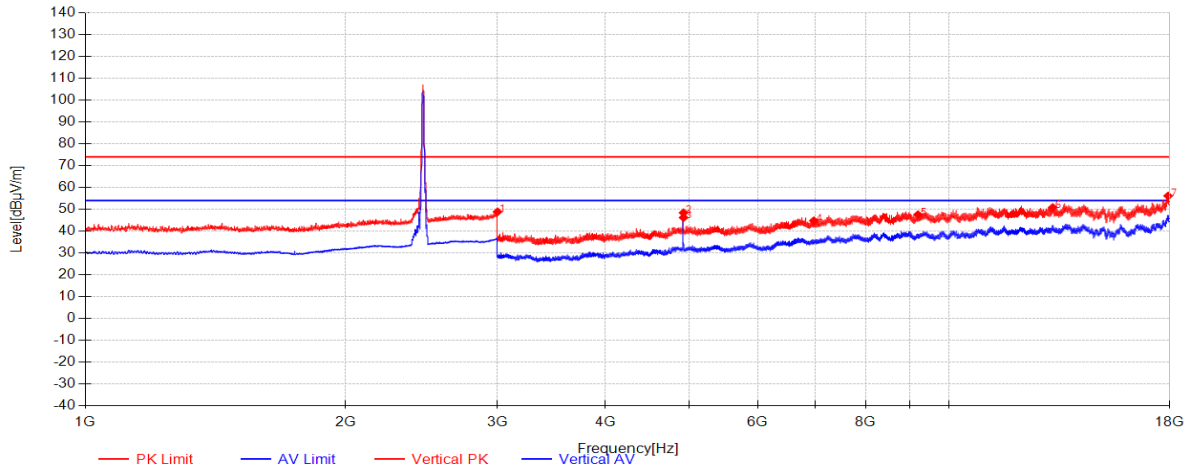


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	3000	41.68	30.00	-22.81	48.87	74.00	25.13	Vertical
2	4924.125	61.72	32.80	-46.08	48.44	74.00	25.56	Vertical
3	4924.5	59.49	32.80	-46.08	46.21	54.00	7.79	Vertical
4	6969	53.46	36.06	-44.73	44.79	74.00	29.21	Vertical
5	9198.375	51.38	38.00	-41.82	47.56	74.00	26.44	Vertical
6	13170.75	48.29	39.74	-37.18	50.85	74.00	23.15	Vertical
7	17913	48.26	42.67	-34.77	56.16	74.00	17.84	Vertical

11be(EHT20)_TX_CH_01_Horizontal

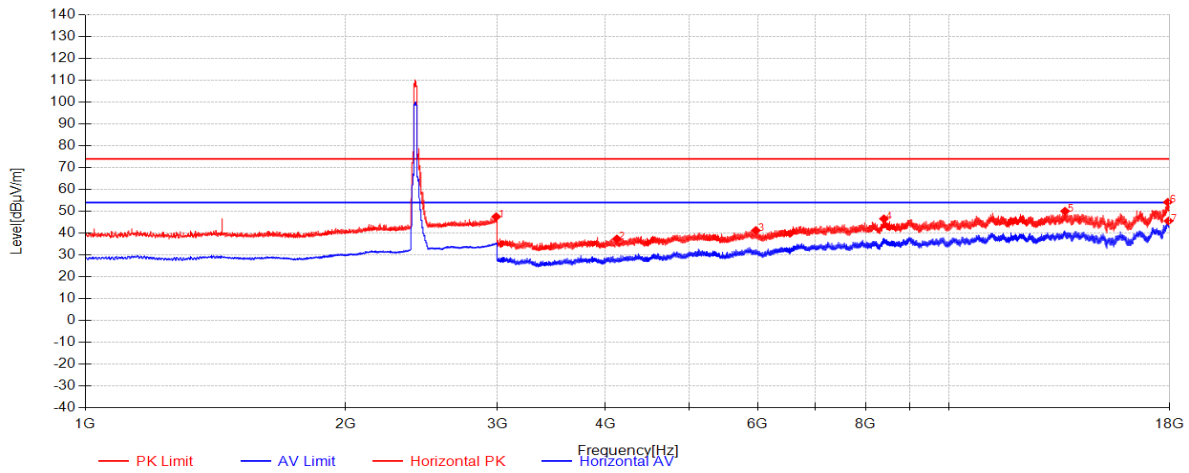


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2989	40.55	29.82	-22.82	47.55	74.00	26.45	Horizontal
2	4123.5	52.45	31.06	-46.16	37.35	74.00	36.65	Horizontal
3	5971.125	53.11	34.22	-46.09	41.23	74.00	32.77	Horizontal
4	8399.625	51.03	37.10	-41.56	46.57	74.00	27.43	Horizontal
5	13610.25	46.40	39.91	-36.23	50.08	74.00	23.92	Horizontal
6	17898.375	46.27	42.59	-34.67	54.19	74.00	19.81	Horizontal
7	17932.875	37.79	42.76	-34.98	45.58	54.00	8.42	Horizontal

11be(EHT20)_TX_CH_01_Vertical

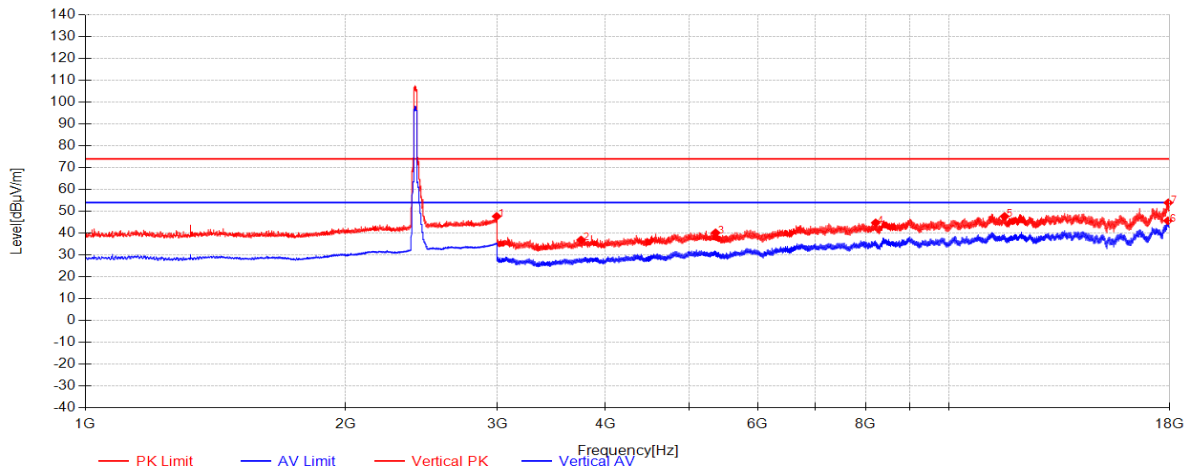


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2992.5	40.64	29.88	-22.82	47.70	74.00	26.30	Vertical
2	3747.75	52.84	30.38	-46.34	36.88	74.00	37.12	Vertical
3	5363.25	52.42	33.22	-45.48	40.16	74.00	33.84	Vertical
4	8217	50.16	37.37	-42.78	44.75	74.00	29.25	Vertical
5	11583.375	45.35	38.90	-36.57	47.68	74.00	26.32	Vertical
6	17900.625	37.72	42.60	-34.64	45.69	54.00	8.31	Vertical
7	17921.625	46.08	42.71	-34.86	53.93	74.00	20.07	Vertical

11be(EHT20)_TX_CH_06_Horizontal

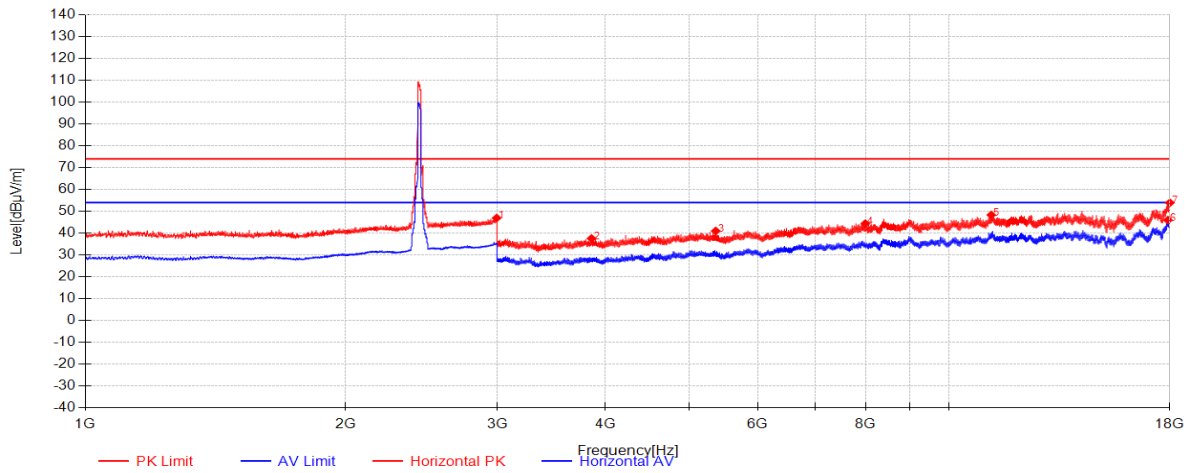


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2992.5	39.86	29.88	-22.82	46.92	74.00	27.08	Horizontal
2	3853.5	53.34	30.88	-46.64	37.58	74.00	36.42	Horizontal
3	5366.25	53.26	33.20	-45.46	41.00	74.00	33.00	Horizontal
4	7992.375	50.33	37.30	-43.29	44.34	74.00	29.66	Horizontal
5	11182.125	46.81	38.87	-37.35	48.33	74.00	25.67	Horizontal
6	17903.625	38.02	42.62	-34.67	45.97	54.00	8.03	Horizontal
7	17994.75	46.48	43.07	-35.63	53.92	74.00	20.08	Horizontal

11be(EHT20)_TX_CH_06_Vertical

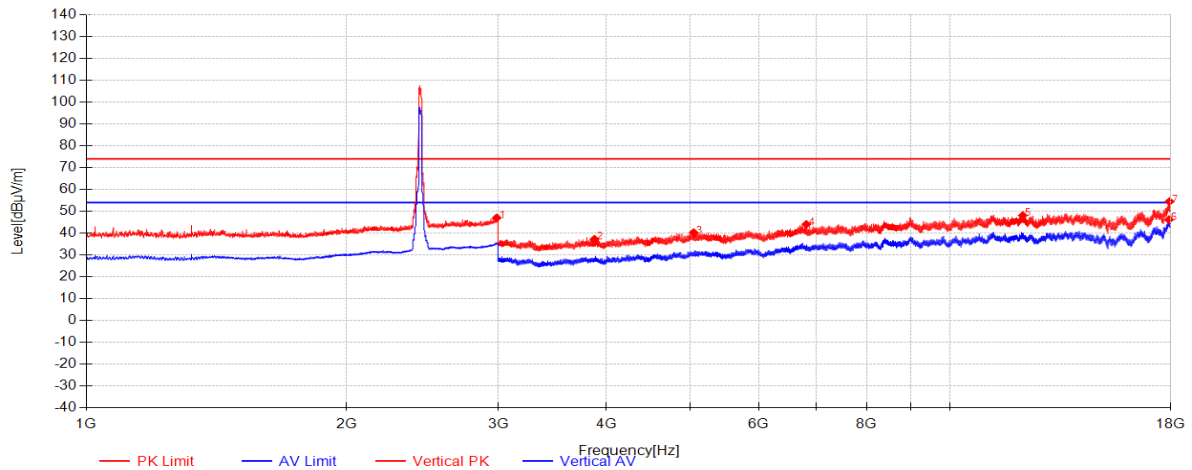


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2985.5	40.09	29.77	-22.83	47.03	74.00	26.97	Vertical
2	3873	53.05	30.76	-46.57	37.24	74.00	36.76	Vertical
3	5046	52.76	33.46	-45.97	40.25	74.00	33.75	Vertical
4	6812.25	53.08	35.62	-44.68	44.03	74.00	29.97	Vertical
5	12127.125	45.96	39.05	-36.92	48.09	74.00	25.91	Vertical
6	17903.25	38.23	42.62	-34.66	46.18	54.00	7.82	Vertical
7	17930.625	46.69	42.75	-34.95	54.49	74.00	19.51	Vertical

11be(EHT20)_TX_CH_11_Horizontal

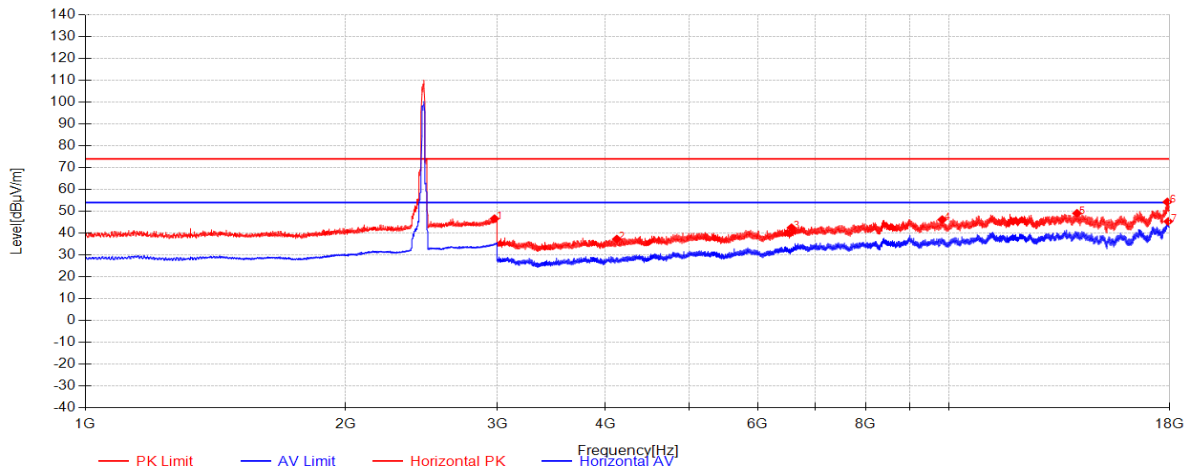


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2976	39.86	29.62	-22.84	46.63	74.00	27.37	Horizontal
2	4122.375	52.36	31.07	-46.17	37.26	74.00	36.74	Horizontal
3	6565.875	52.59	35.33	-45.44	42.47	74.00	31.53	Horizontal
4	9811.5	47.47	38.20	-39.48	46.19	74.00	27.81	Horizontal
5	14050.875	45.83	39.95	-36.71	49.07	74.00	24.93	Horizontal
6	17875.125	47.11	42.43	-35.23	54.31	74.00	19.69	Horizontal
7	17920.125	37.51	42.70	-34.84	45.37	54.00	8.63	Horizontal

11be(EHT20)_TX_CH_11_Vertical

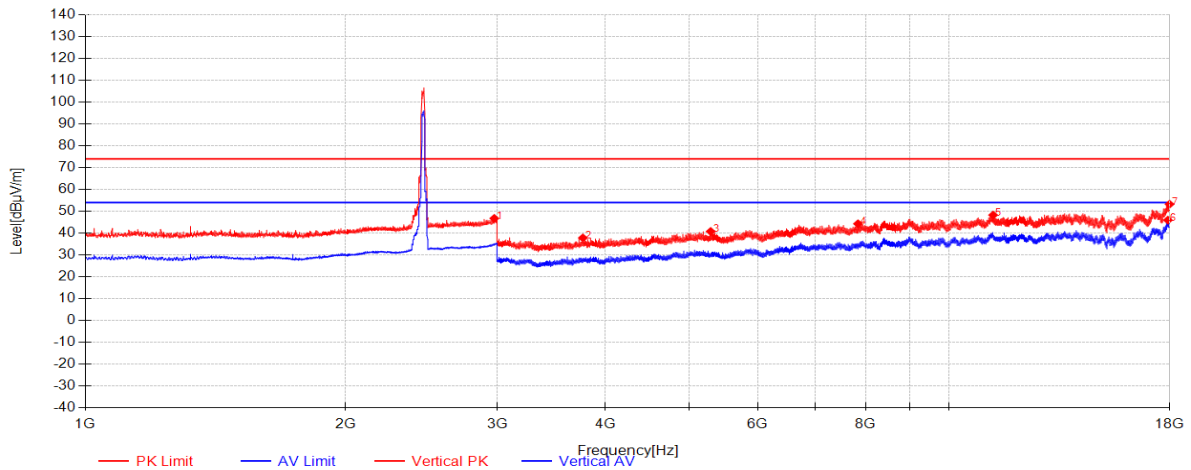


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2974	40.04	29.58	-22.84	46.78	74.00	27.22	Vertical
2	3766.125	53.69	30.66	-46.51	37.83	74.00	36.17	Vertical
3	5293.5	53.42	33.25	-45.88	40.79	74.00	33.21	Vertical
4	7839.375	50.54	36.62	-42.87	44.29	74.00	29.71	Vertical
5	11237.25	47.22	38.87	-37.81	48.29	74.00	25.71	Vertical
6	17902.5	38.00	42.61	-34.66	45.96	54.00	8.04	Vertical
7	17982	45.77	43.01	-35.50	53.28	74.00	20.72	Vertical

11be(EHT40)_TX_CH_03_Horizontal

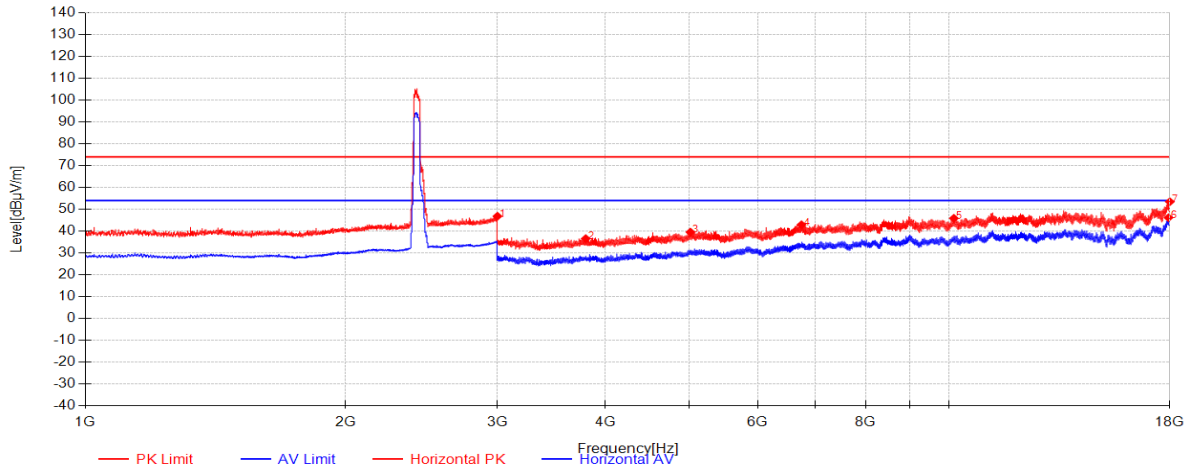


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2999	39.68	29.98	-22.81	46.85	74.00	27.15	Horizontal
2	3794.625	52.27	31.11	-46.79	36.60	74.00	37.40	Horizontal
3	5015.625	52.25	33.16	-45.86	39.55	74.00	34.45	Horizontal
4	6743.25	51.37	35.93	-44.38	42.92	74.00	31.08	Horizontal
5	10121.25	46.65	38.54	-39.30	45.89	74.00	28.11	Horizontal
6	17929.125	38.35	42.75	-34.94	46.16	54.00	7.84	Horizontal
7	17997	46.05	43.09	-35.66	53.48	74.00	20.52	Horizontal

11be(EHT40)_TX_CH_03_Vertical

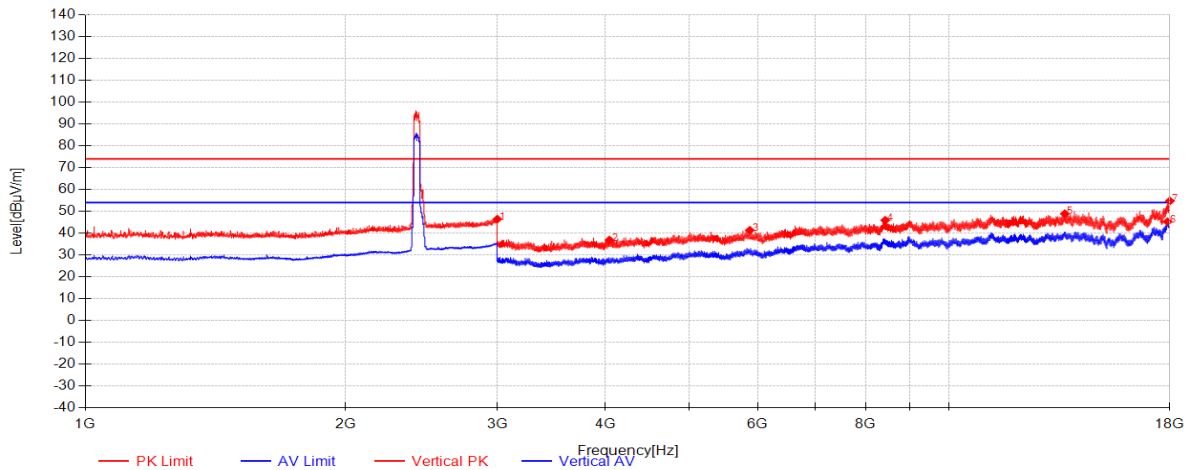


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2998	39.27	29.97	-22.81	46.43	74.00	27.57	Vertical
2	4041.75	52.20	31.45	-46.82	36.83	74.00	37.17	Vertical
3	5875.5	52.50	34.35	-45.55	41.31	74.00	32.69	Vertical
4	8428.5	50.40	37.39	-41.89	45.90	74.00	28.10	Vertical
5	13602.375	45.15	39.90	-36.16	48.89	74.00	25.11	Vertical
6	17884.5	37.76	42.49	-35.00	45.25	54.00	8.75	Vertical
7	17997	47.31	43.09	-35.66	54.74	74.00	19.26	Vertical

11be(EHT40)_TX_CH_06_Horizontal

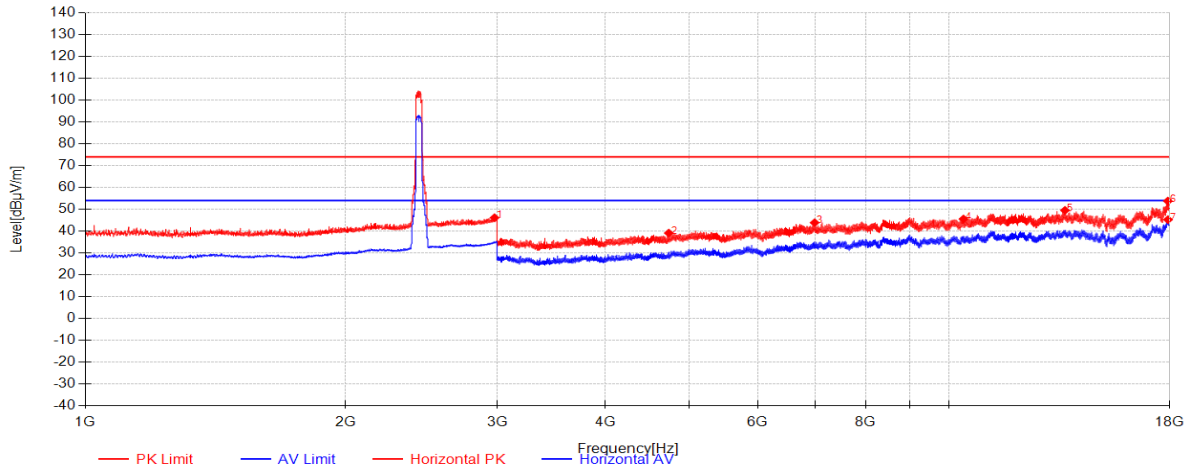


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2976	39.39	29.62	-22.84	46.16	74.00	27.84	Horizontal
2	4734.375	53.31	32.14	-46.35	39.11	74.00	34.89	Horizontal
3	6983.25	52.38	36.03	-44.54	43.88	74.00	30.12	Horizontal
4	10383.375	46.29	38.65	-39.38	45.56	74.00	28.44	Horizontal
5	13607.25	45.83	39.91	-36.20	49.54	74.00	24.46	Horizontal
6	17899.5	45.83	42.60	-34.64	53.78	74.00	20.22	Horizontal
7	17907	37.35	42.64	-34.70	45.28	54.00	8.72	Horizontal

11be(EHT40)_TX_CH_06_Vertical

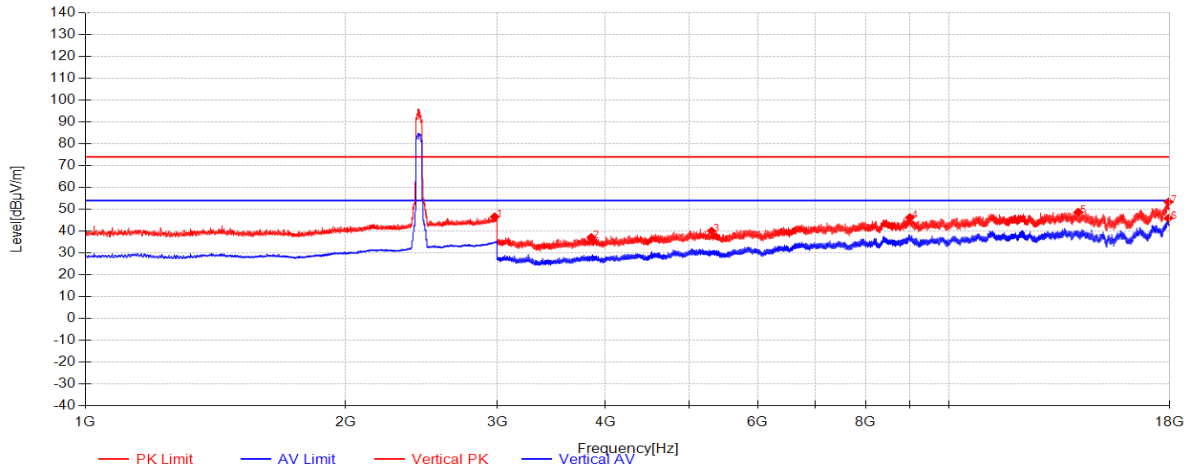


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2977.5	39.81	29.64	-22.84	46.61	74.00	27.39	Vertical
2	3850.125	52.86	30.90	-46.65	37.10	74.00	36.90	Vertical
3	5306.25	52.65	33.30	-45.88	40.07	74.00	33.93	Vertical
4	9001.875	48.49	38.19	-40.44	46.24	74.00	27.76	Vertical
5	14099.25	45.36	39.80	-36.44	48.72	74.00	25.28	Vertical
6	17920.5	38.04	42.70	-34.85	45.90	54.00	8.10	Vertical
7	17927.25	45.56	42.74	-34.92	53.38	74.00	20.62	Vertical

11be(EHT40)_TX_CH_09_Horizontal

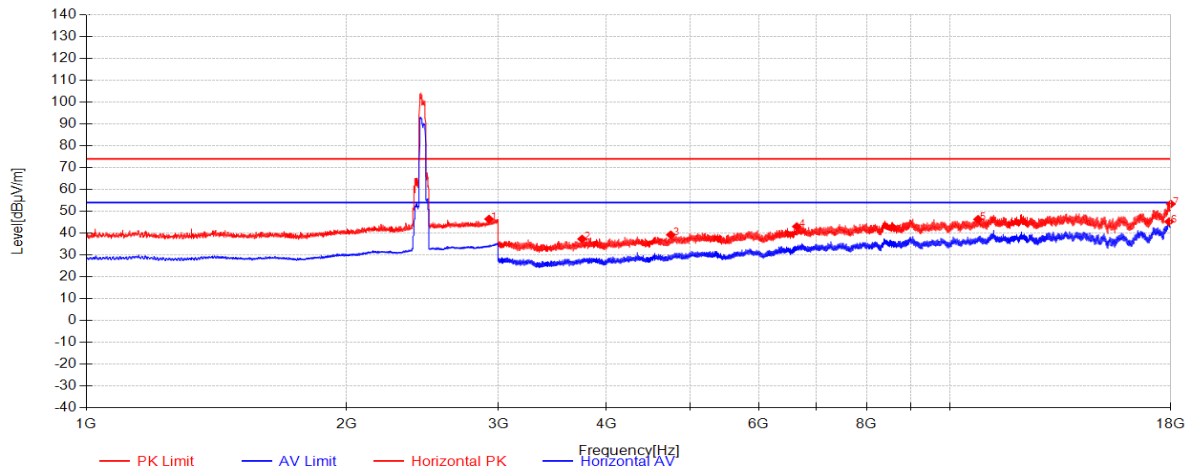

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2925	40.36	29.00	-22.91	46.45	74.00	27.55	Horizontal
2	3747.75	53.28	30.38	-46.34	37.32	74.00	36.68	Horizontal
3	4747.125	53.23	32.27	-46.26	39.24	74.00	34.76	Horizontal
4	6641.625	52.10	35.85	-44.93	43.02	74.00	30.98	Horizontal
5	10766.625	46.17	38.87	-38.71	46.33	74.00	27.67	Horizontal
6	17911.875	37.37	42.66	-34.76	45.27	54.00	8.73	Horizontal
7	17994	45.91	43.07	-35.63	53.35	74.00	20.65	Horizontal

11be(EHT40)_TX_CH_09_Vertical

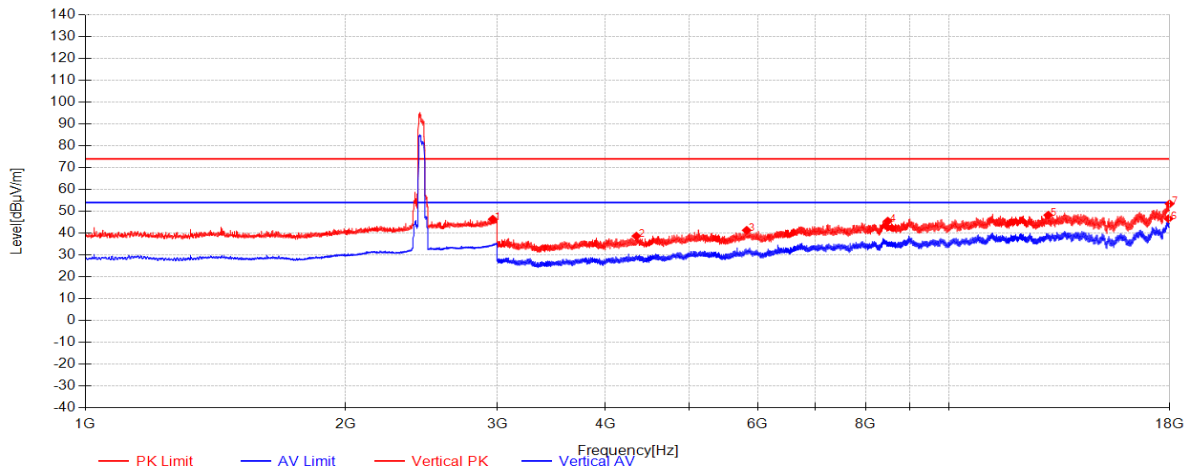

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2961.5	39.88	29.38	-22.86	46.40	74.00	27.60	Vertical
2	4342.5	53.04	32.02	-46.39	38.66	74.00	35.34	Vertical
3	5827.125	52.88	34.21	-45.77	41.32	74.00	32.68	Vertical
4	8486.25	50.43	37.67	-42.58	45.53	74.00	28.47	Vertical
5	13013.625	45.54	39.77	-37.03	48.28	74.00	25.72	Vertical
6	17931.75	38.80	42.76	-34.97	46.59	54.00	7.41	Vertical
7	17983.125	45.94	43.02	-35.51	53.44	74.00	20.56	Vertical

7.4 Maximum Conducted Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2020) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode(2.4G)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested. Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

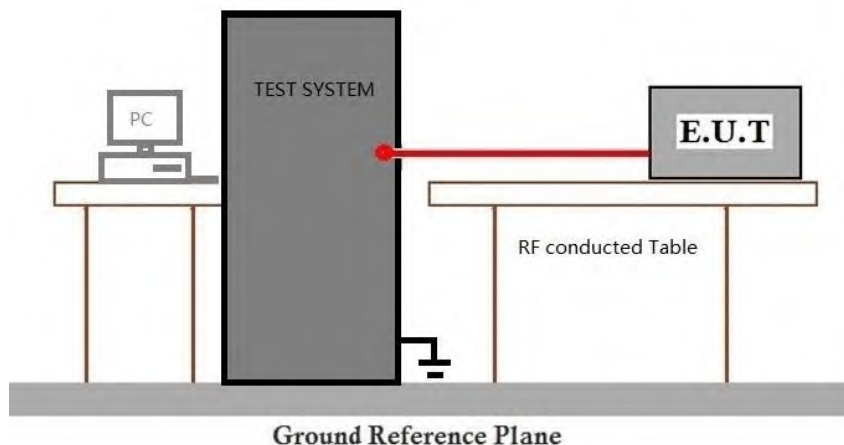



Report No.: SUCR260400030904

Page: 63 of 146

7.4.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.5 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2020) Section 11.8.1

Limit:

≥500 kHz

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode(2.4G)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested. Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

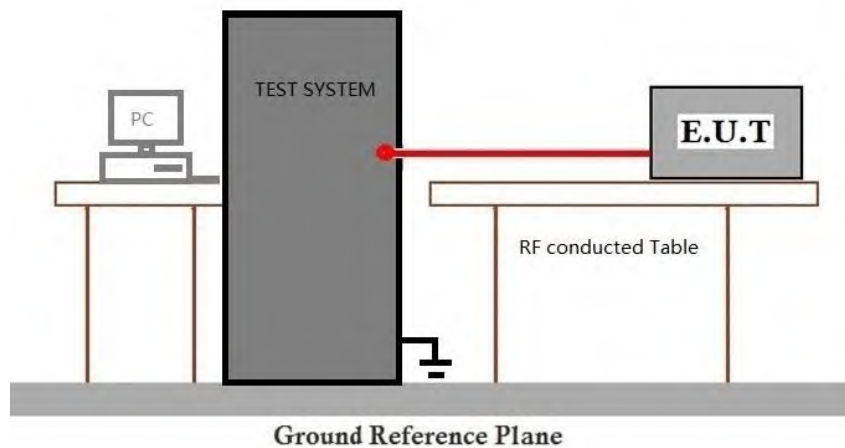

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 Power Spectral Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2020) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode(2.4G)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested. Only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

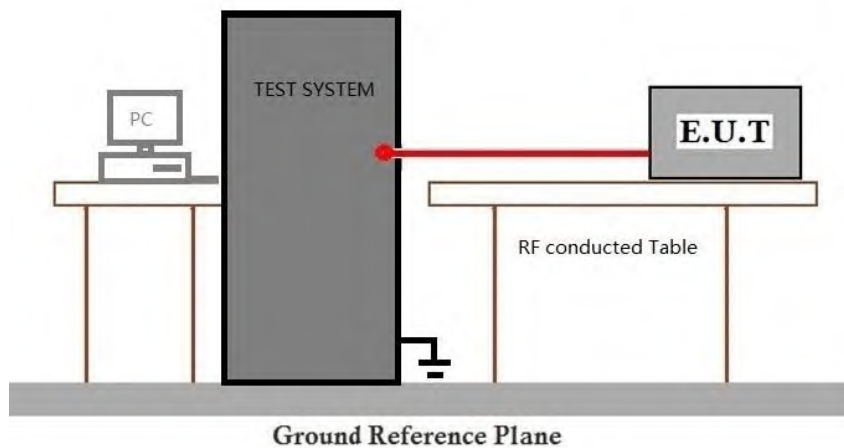

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 6.10.4

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode(2.4G)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested. Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

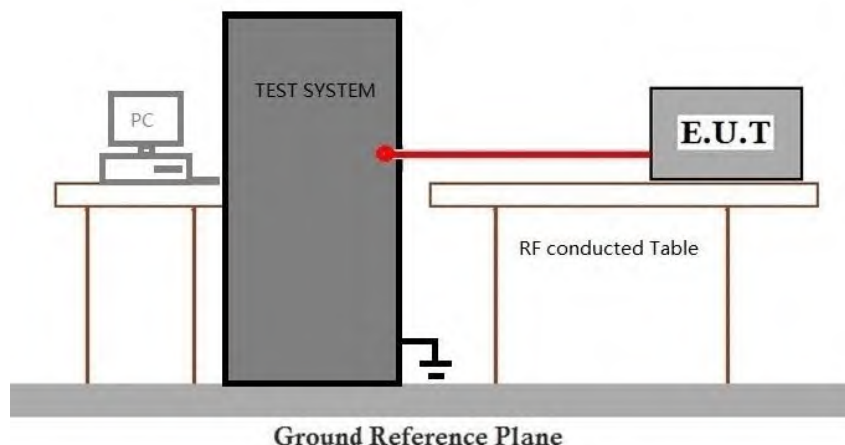

7.7.4 Measurement Procedure and Data



Report No.: SUCR260400030904

Page: 67 of 146

Please Refer to Appendix for Details

7.8 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode(2.4G)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested. Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

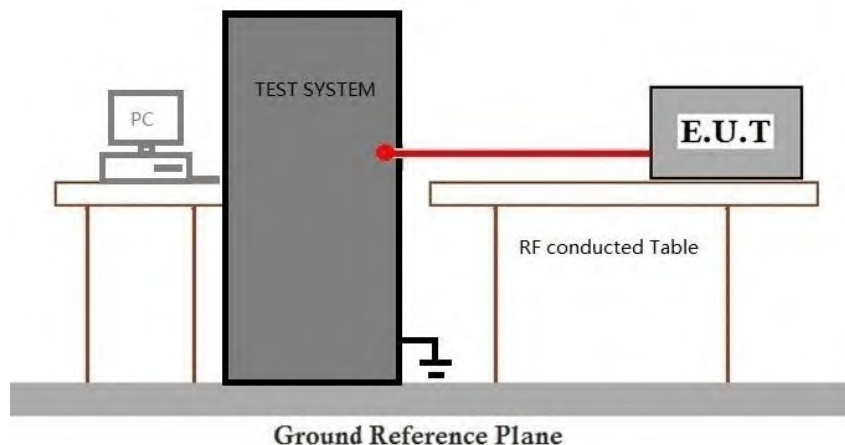

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Report No.: SUCR260400030904

Page: 69 of 146

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SUCR2604000309MO

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SUCR2604000309MO

10 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant0

Ant0									
Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	MIMO	2412	/	/	0.664	0.684	97.08	0.13	0.13
802.11g	MIMO	2412	/	/	2.097	2.114	99.20	0.04	0.03
802.11n (HT20)	MIMO	2412	/	/	5.428	5.446	99.67	0.01	0.04
802.11n (HT40)	MIMO	2422	/	/	5.428	5.446	99.67	0.01	0.04
802.11ax (HEW20)	MIMO	2412	SU	/	5.444	5.462	99.67	0.01	0.04
802.11ax (HEW40)	MIMO	2422	SU	/	5.444	5.462	99.67	0.01	0.04
802.11be (EHT20)	MIMO	2412	SU	/	5.452	5.470	99.67	0.01	0.04
802.11be (EHT40)	MIMO	2422	SU	/	5.452	5.470	99.67	0.01	0.04

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	MIMO	2412	/	/	0	13.023	/	Pass
		2437	/	/	0	12.830	/	Pass
		2462	/	/	0	13.118	/	Pass
802.11g	MIMO	2412	/	/	0	16.758	/	Pass
		2437	/	/	0	16.586	/	Pass
		2462	/	/	0	16.574	/	Pass
802.11be (EHT20)	MIMO	2412	SU	/	0	18.852	/	Pass
		2437	SU	/	0	18.805	/	Pass
		2462	SU	/	0	18.881	/	Pass
802.11be (EHT40)	MIMO	2422	SU	/	0	37.989	/	Pass
		2437	SU	/	0	37.755	/	Pass
		2452	SU	/	0	38.222	/	Pass


2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	6dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	MIMO	2412	/	/	0	8.055	≥ 0.5	Pass
		2437	/	/	0	8.039	≥ 0.5	Pass
		2462	/	/	0	7.691	≥ 0.5	Pass
802.11g	MIMO	2412	/	/	0	16.390	≥ 0.5	Pass
		2437	/	/	0	16.325	≥ 0.5	Pass
		2462	/	/	0	16.445	≥ 0.5	Pass
802.11be (EHT20)	MIMO	2412	SU	/	0	18.790	≥ 0.5	Pass
		2437	SU	/	0	18.490	≥ 0.5	Pass
		2462	SU	/	0	18.897	≥ 0.5	Pass
802.11be (EHT40)	MIMO	2422	SU	/	0	37.760	≥ 0.5	Pass
		2437	SU	/	0	35.307	≥ 0.5	Pass
		2452	SU	/	0	36.897	≥ 0.5	Pass


2.2 Test Graph

2.2.1 OBW


802.11b_LCH_2412MHz_Ant0 (MIMO)_NTNV

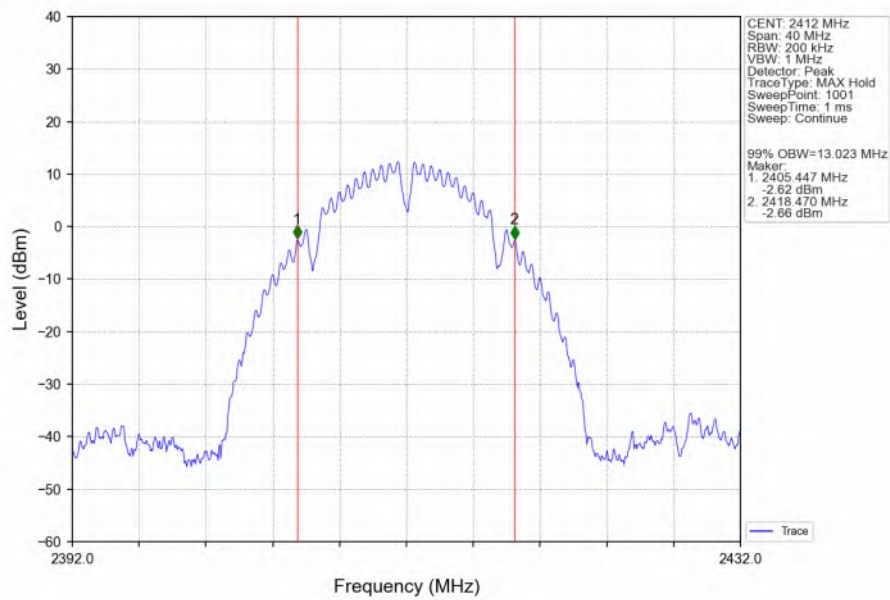


802.11b_MCH_2437MHz_Ant0 (MIMO)_NTNV

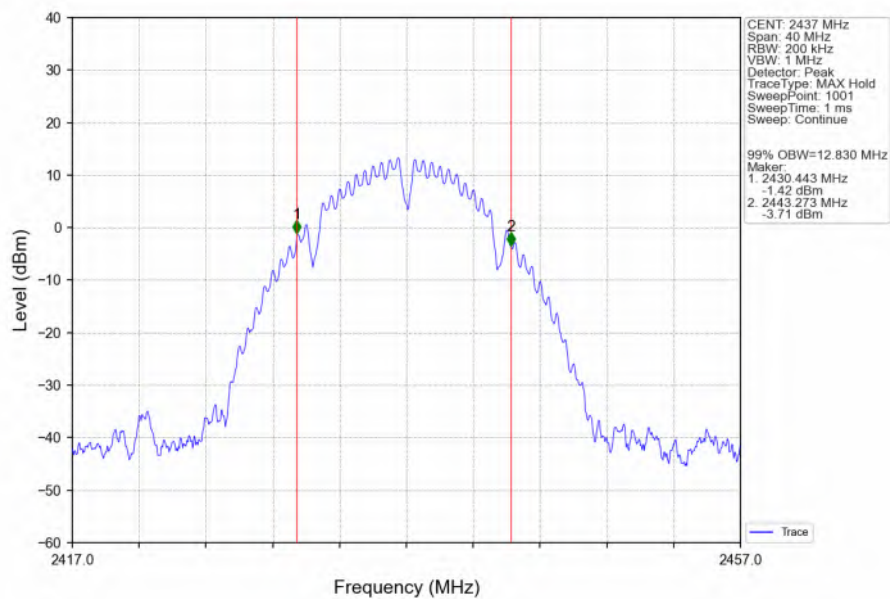


802.11b_HCH_2462MHz_Ant0 (MIMO)_NTNV

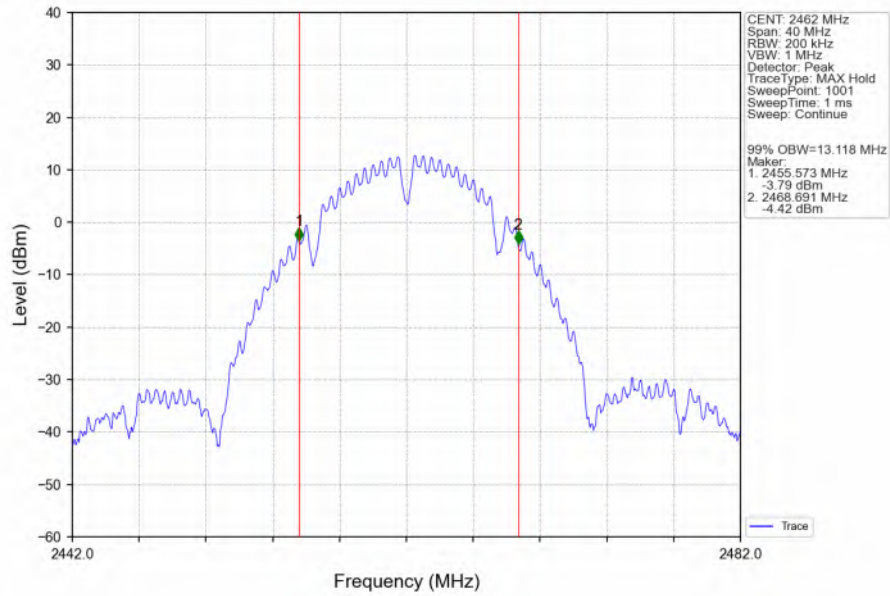


802.11g_LCH_2412MHz_Ant0 (MIMO)_NTNV

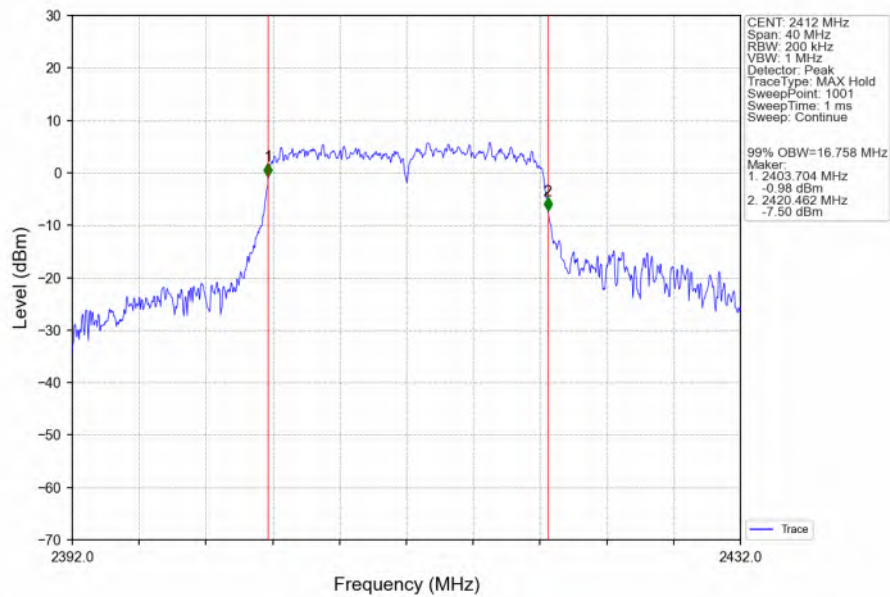


802.11g_MCH_2437MHz_Ant0 (MIMO)_NTNV

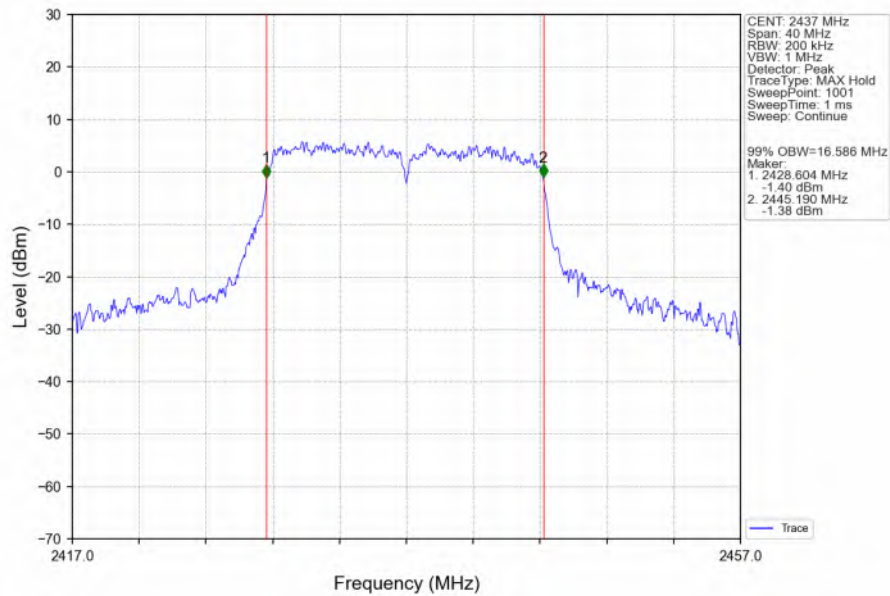


802.11g_HCH_2462MHz_Ant0 (MIMO)_NTNV

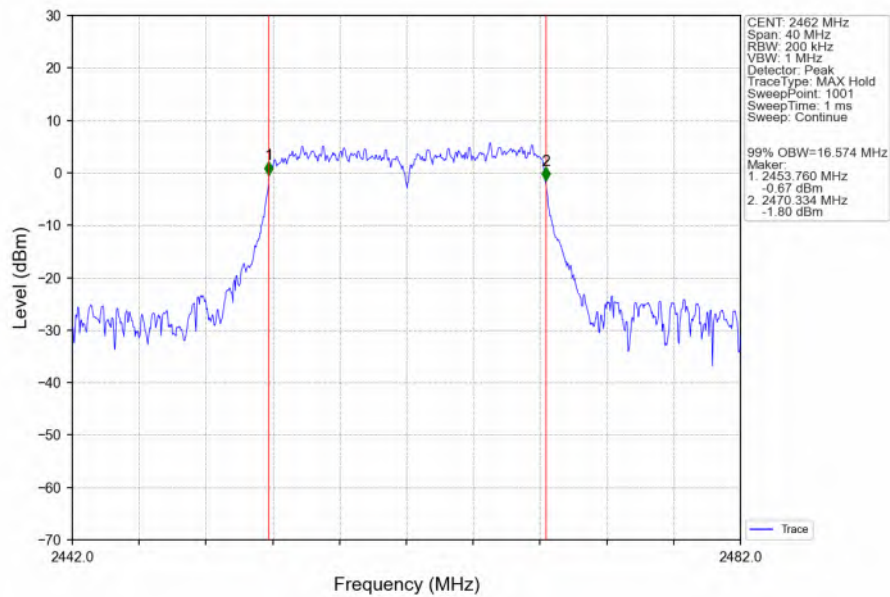


802.11be(EHT20)_LCH_2412MHz_SU_/_Ant0 (MIMO)_NTNV

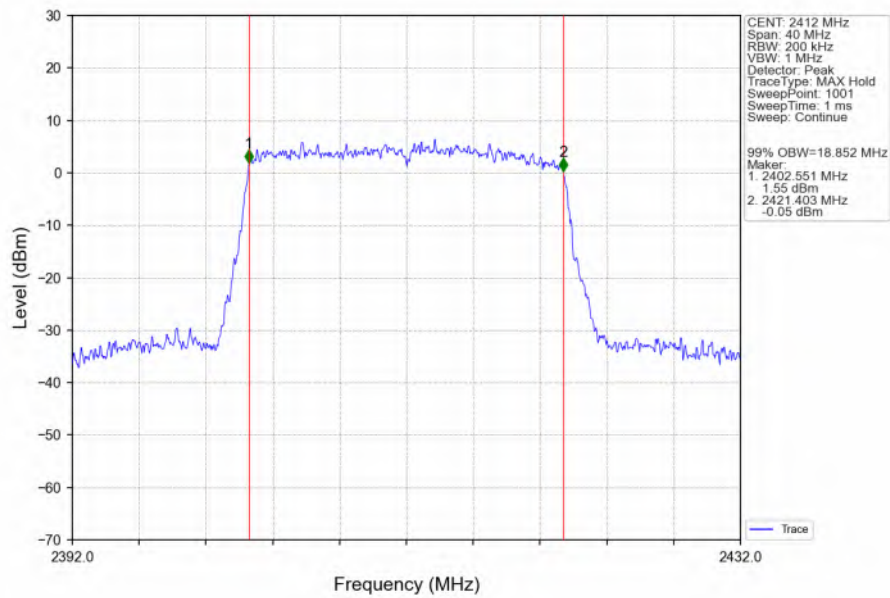


802.11be(EHT20)_MCH_2437MHz_SU_/_Ant0 (MIMO)_NTNV

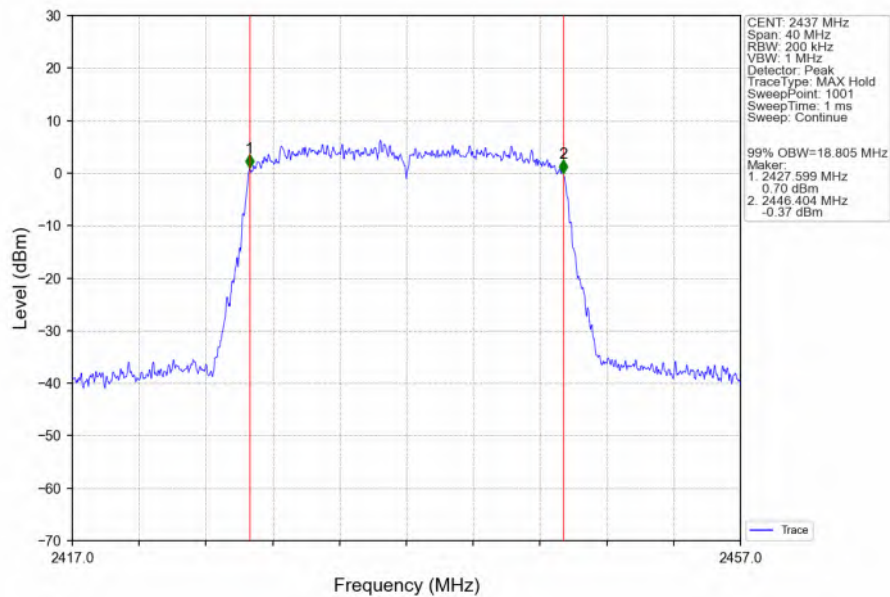


802.11be(EHT20)_HCH_2462MHz_SU / _Ant0 (MIMO)_NTNV

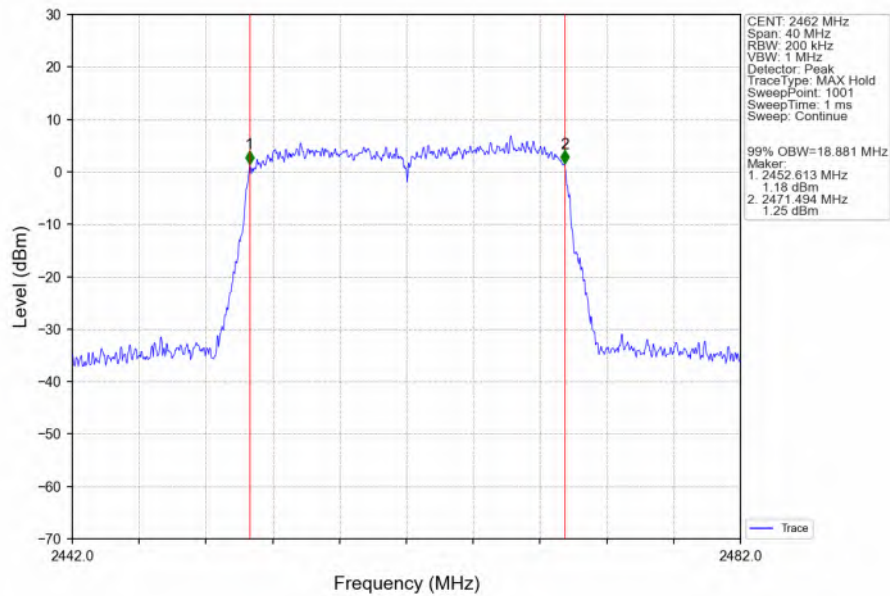


802.11be(EHT40)_LCH_2422MHz_SU / _Ant0 (MIMO)_NTNV

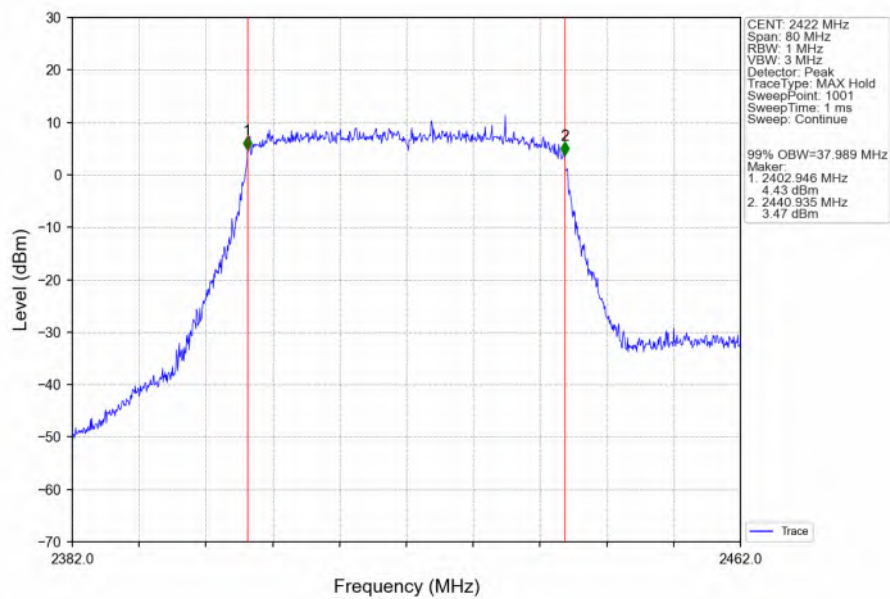

802.11be(EHT40)_MCH_2437MHz_SU_/_Ant0 (MIMO)_NTNV

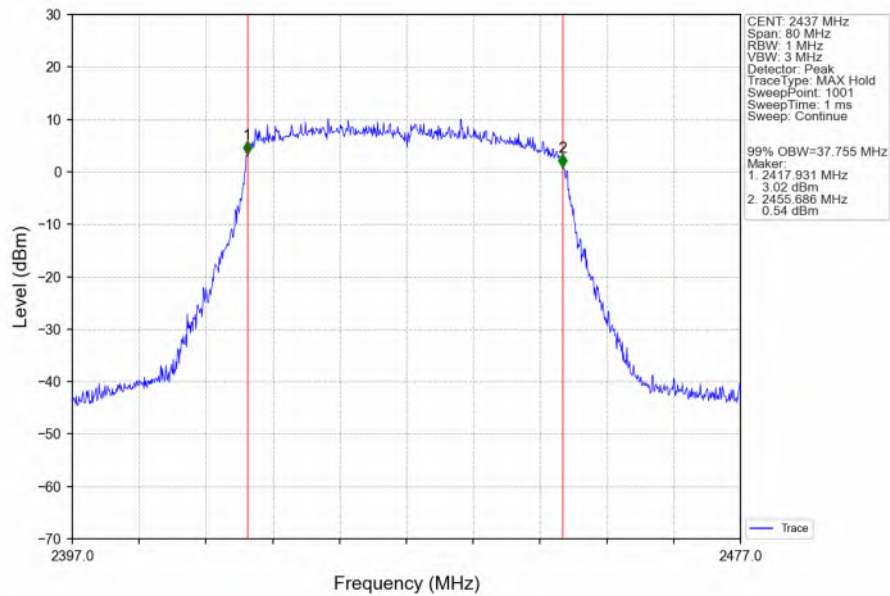


802.11be(EHT40)_HCH_2452MHz_SU_/_Ant0 (MIMO)_NTNV

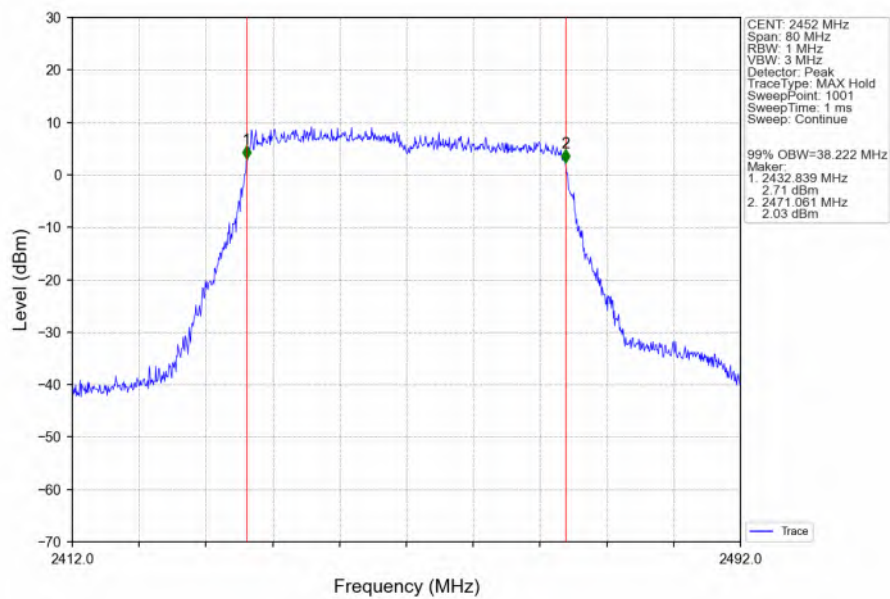


2.2.2 6dB BW


802.11b_LCH_2412MHz_Ant0 (MIMO)_NTNV

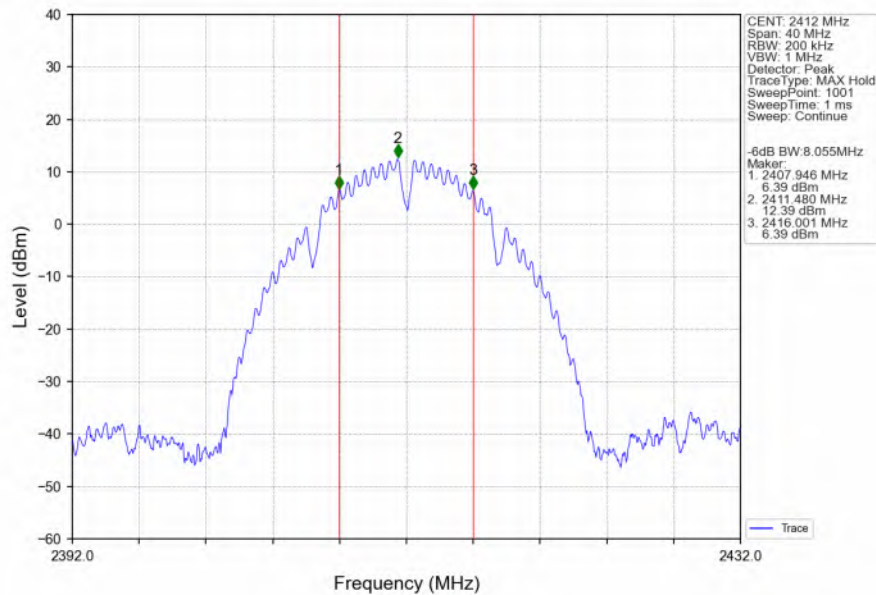


802.11b_MCH_2437MHz_Ant0 (MIMO)_NTNV

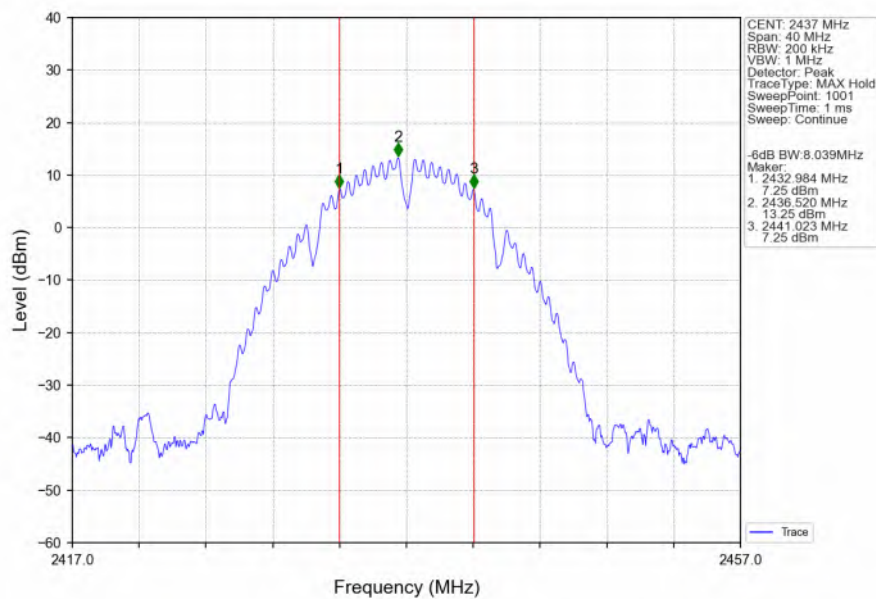


802.11b_HCH_2462MHz_Ant0 (MIMO)_NTNV

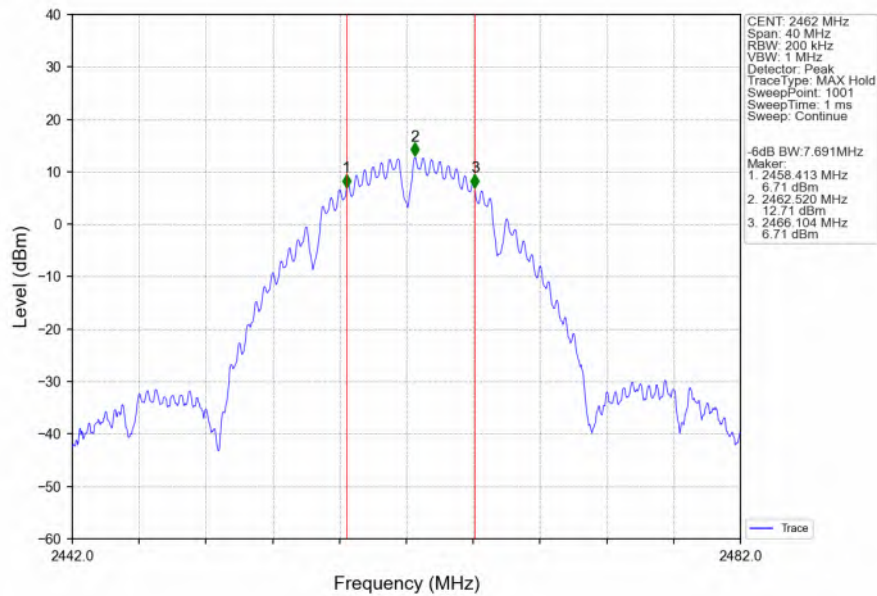


802.11g_LCH_2412MHz_Ant0 (MIMO)_NTNV

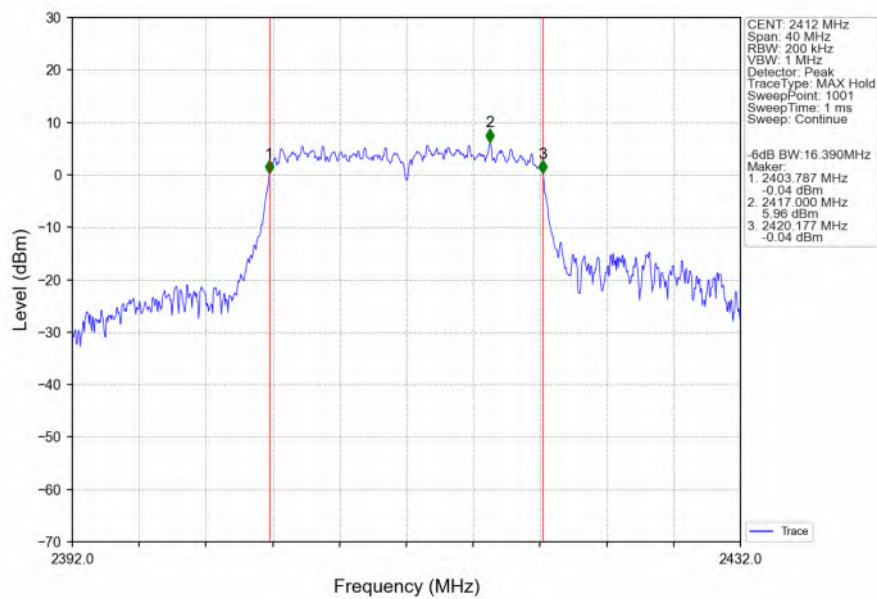


802.11g_MCH_2437MHz_Ant0 (MIMO)_NTNV

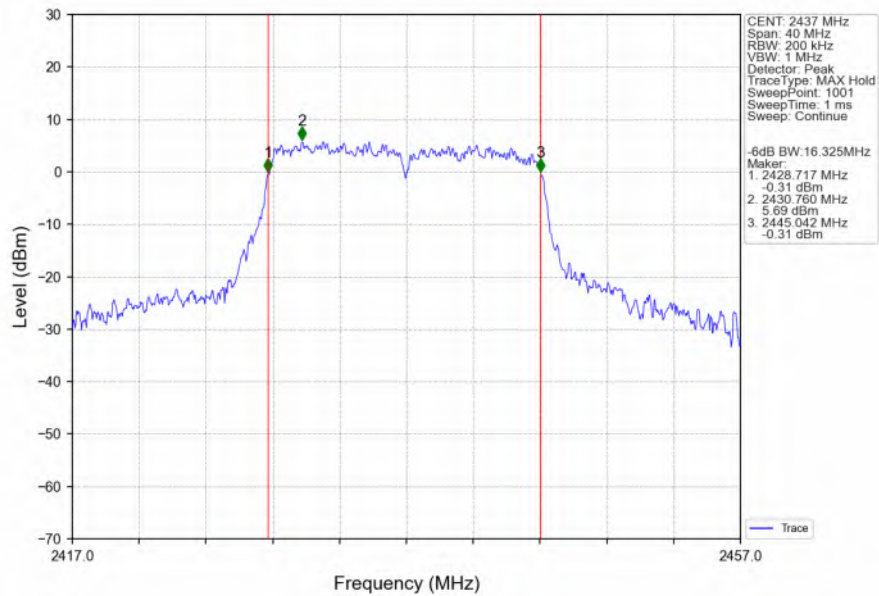


802.11g_HCH_2462MHz_Ant0 (MIMO)_NTNV

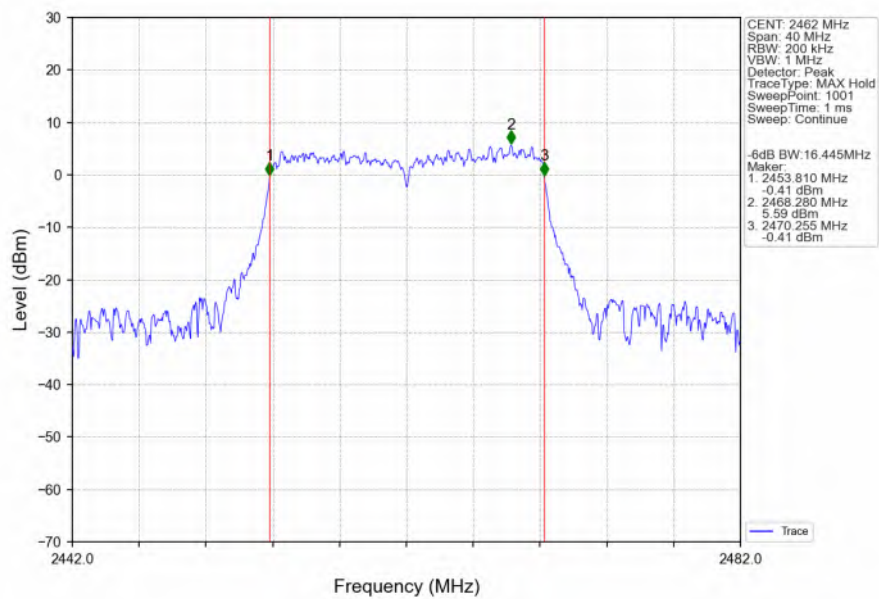


802.11be(EHT20)_LCH_2412MHz_SU_/_Ant0 (MIMO)_NTNV

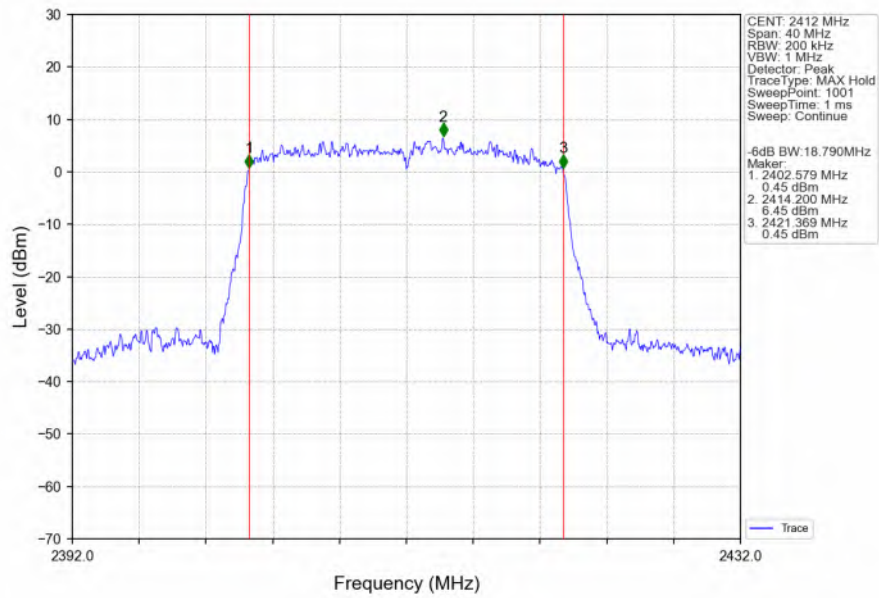


802.11be(EHT20)_MCH_2437MHz_SU_/_Ant0 (MIMO)_NTNV

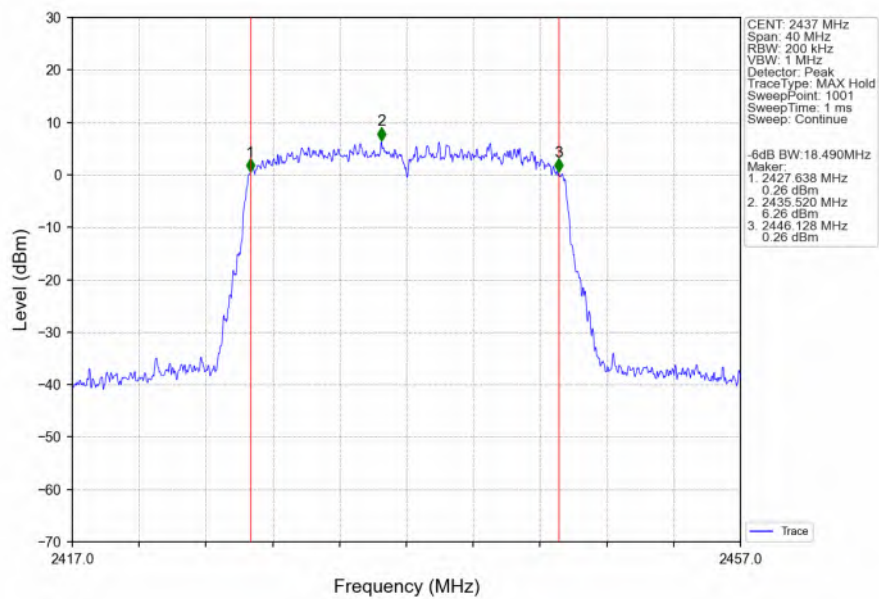


802.11be(EHT20)_HCH_2462MHz_SU_/_Ant0 (MIMO)_NTNV

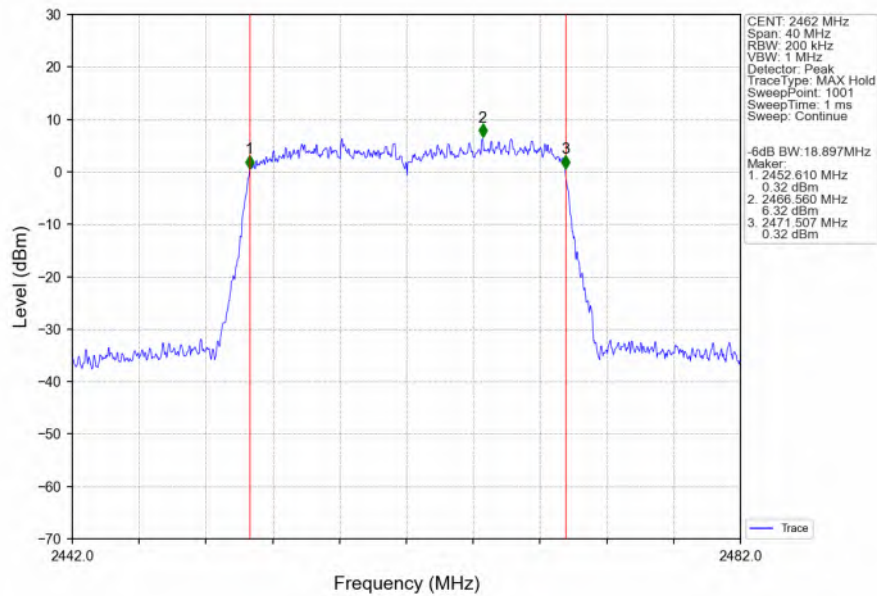


802.11be(EHT40)_LCH_2422MHz_SU_/_Ant0 (MIMO)_NTNV

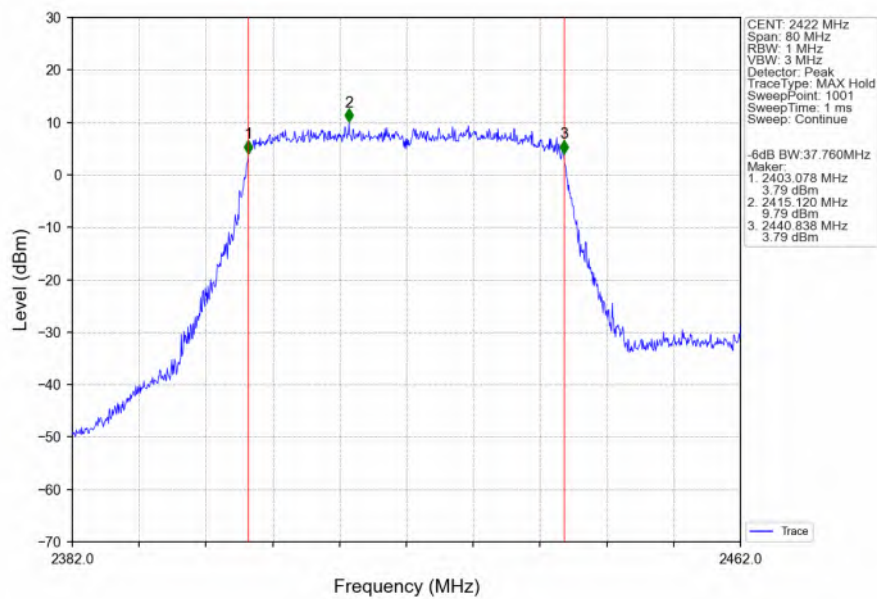

802.11be(EHT40)_MCH_2437MHz_SU_/_Ant0 (MIMO)_NTNV

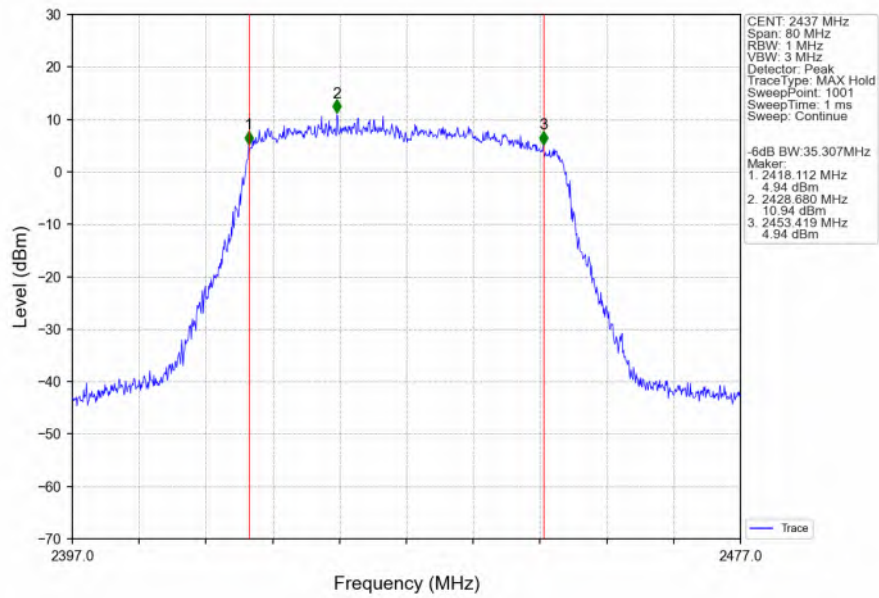

802.11be(EHT40)_HCH_2452MHz_SU_/_Ant0 (MIMO)_NTNV

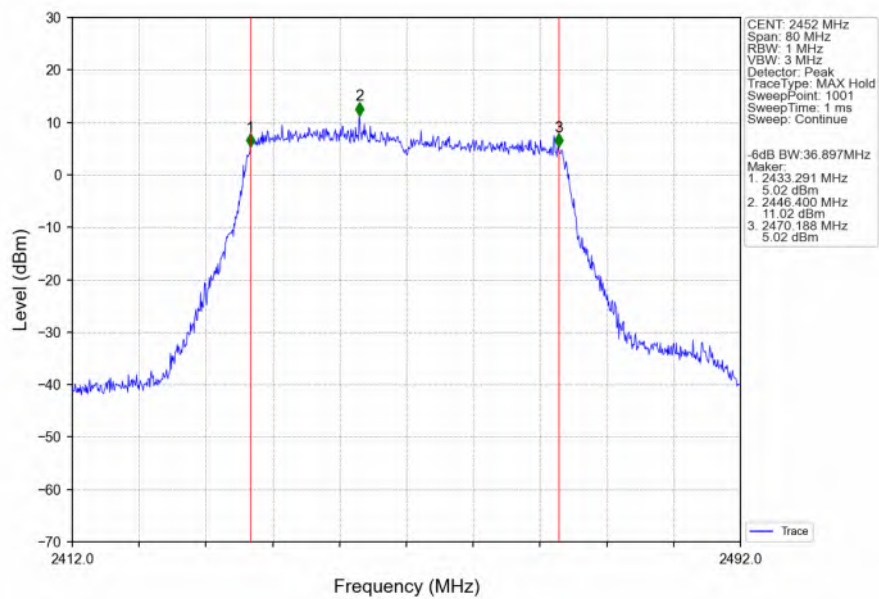

3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power

Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Peak Conducted Output Power (dBm)				Verdict
					ANT0	ANT1	MIMO	Limit	
802.11b	MIMO	2412	/	/	22.51	22.15	25.34	<=30	Pass
		2437	/	/	23.25	22.89	26.08	<=30	Pass
		2462	/	/	23.74	23.53	26.65	<=30	Pass
802.11g	MIMO	2412	/	/	23.85	23.47	26.67	<=30	Pass
		2437	/	/	23.39	23.01	26.21	<=30	Pass
		2462	/	/	23.45	23.16	26.32	<=30	Pass
802.11n (HT20)	MIMO	2412	/	/	22.66	22.25	25.47	<=30	Pass
		2437	/	/	23.31	23.03	26.18	<=30	Pass
		2462	/	/	22.01	21.63	24.83	<=30	Pass
802.11n (HT40)	MIMO	2422	/	/	22.59	22.17	25.39	<=30	Pass
		2437	/	/	22.41	22.16	25.30	<=30	Pass
		2452	/	/	20.65	20.26	23.47	<=30	Pass
802.11ax (HEW20)	MIMO	2412	SU	/	22.96	22.66	25.82	<=30	Pass
		2437	SU	/	23.48	23.27	26.39	<=30	Pass
		2462	SU	/	22.30	21.89	25.11	<=30	Pass
802.11ax (HEW40)	MIMO	2422	SU	/	22.79	22.34	25.58	<=30	Pass
		2437	SU	/	22.59	22.31	25.46	<=30	Pass
		2452	SU	/	20.90	20.45	23.69	<=30	Pass
802.11be (EHT20)	MIMO	2412	SU	/	23.11	22.81	25.97	<=30	Pass
			RU26+52	/	17.34	17.67	20.53	<=30	Pass
			RU26+106	/	19.31	19.00	22.17	<=30	Pass
		2437	SU	/	23.82	23.41	26.63	<=30	Pass
			RU26+52	/	14.28	18.98	20.34	<=30	Pass
			RU26+106	/	17.25	19.49	21.58	<=30	Pass
		2462	SU	/	22.47	22.08	25.29	<=30	Pass
			RU26+52	/	17.09	16.59	19.85	<=30	Pass
			RU26+106	/	18.73	18.47	21.61	<=30	Pass
802.11be (EHT40)	MIMO	2422	SU	/	22.75	22.43	25.60	<=30	Pass
		2437	SU	/	22.43	22.15	25.30	<=30	Pass
		2452	SU	/	20.74	20.34	23.55	<=30	Pass

4. Maximum Power Spectral Density

4.1 Test Result


4.1.1 PSD

Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm)				Verdict
					ANT0	ANT1	MIMO	Limit(dBm/3kHz)	
802.11b	MIMO	2412	/	/	-2.92dBm/3kHz	-3.59dBm/3kHz	-0.31dBm/3kHz	<=8	Pass
		2437	/	/	-2.51dBm/3kHz	-2.37dBm/3kHz	0.48dBm/3kHz	<=8	Pass
		2462	/	/	-2.35dBm/3kHz	-2.85dBm/3kHz	0.40dBm/3kHz	<=8	Pass
802.11g	MIMO	2412	/	/	-10.90dBm/3kHz	-11.40dBm/3kHz	-9.01dBm/3kHz	<=8	Pass
		2437	/	/	-11.02dBm/3kHz	-10.56dBm/3kHz	-8.97dBm/3kHz	<=8	Pass
		2462	/	/	-10.97dBm/3kHz	-10.46dBm/3kHz	-8.89dBm/3kHz	<=8	Pass
802.11b _e (EHT20)	MIMO	2412	SU	/	-11.13dBm/3kHz	-10.63dBm/3kHz	-8.95dBm/3kHz	<=8	Pass
			RU26+52	/	-11.90dBm/3kHz	-12.55dBm/3kHz	-9.85dBm/3kHz	<=8	Pass
			RU26+106	/	-13.26dBm/3kHz	-12.24dBm/3kHz	-9.94dBm/3kHz	<=8	Pass
		2437	SU	/	-10.08dBm/3kHz	-10.38dBm/3kHz	-9.13dBm/3kHz	<=8	Pass
			RU26+52	/	-11.68dBm/3kHz	-13.74dBm/3kHz	10.90dBm/3kHz	<=8	Pass
			RU26+106	/	-13.21dBm/3kHz	-12.74dBm/3kHz	10.22dBm/3kHz	<=8	Pass
		2462	SU	/	-10.90dBm/3kHz	-10.56dBm/3kHz	-9.25dBm/3kHz	<=8	Pass
			RU26+52	/	-12.49dBm/3kHz	-12.24dBm/3kHz	-9.35dBm/3kHz	<=8	Pass
			RU26+106	/	-12.25dBm/3kHz	-12.97dBm/3kHz	10.16dBm/3kHz	<=8	Pass
802.11b _e (EHT40)	MIMO	2422	SU	/	-14.97dBm/3kHz	-15.57dBm/3kHz	13.98dBm/3kHz	<=8	Pass
		2437	SU	/	-14.93dBm/3kHz	-13.29dBm/3kHz	12.75dBm/3kHz	<=8	Pass
		2452	SU	/	-15.29dBm/3kHz	-14.54dBm/3kHz	13.23dBm/3kHz	<=8	Pass


4.2 Test Graph

4.2.1 PSD


802.11b_LCH_2412MHz_Ant0 (MIMO)_NTNV

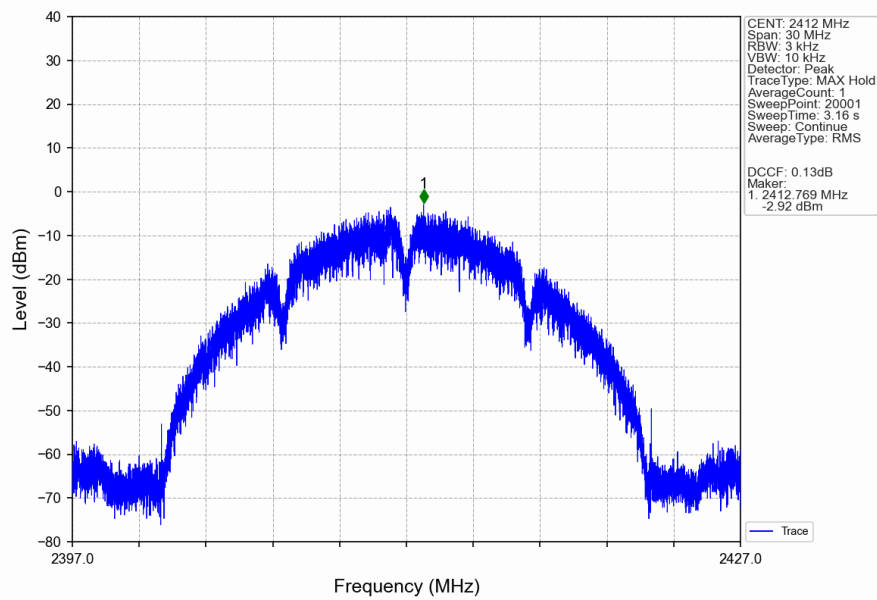


802.11b_LCH_2412MHz_Ant1 (MIMO)_NTNV

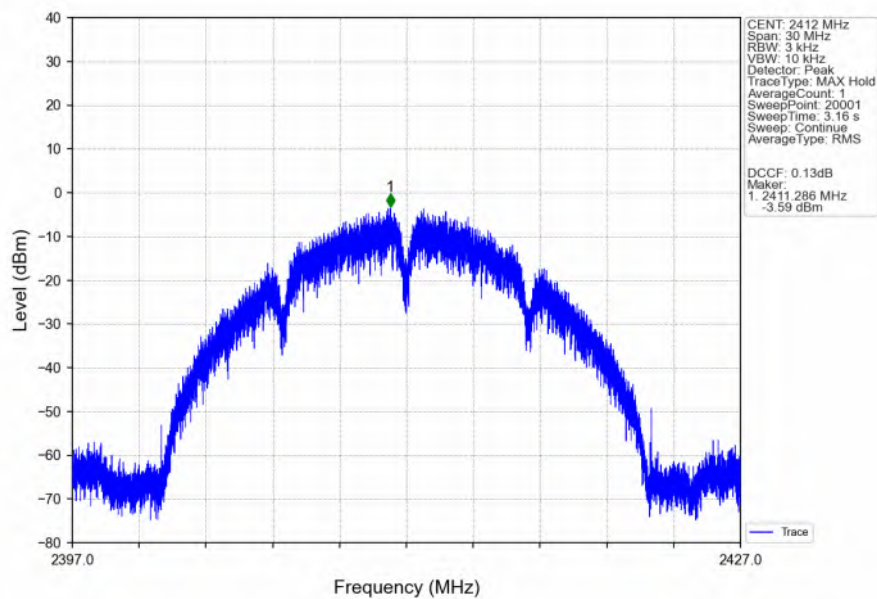


802.11b_LCH_2412MHz_MIMO_NTNV

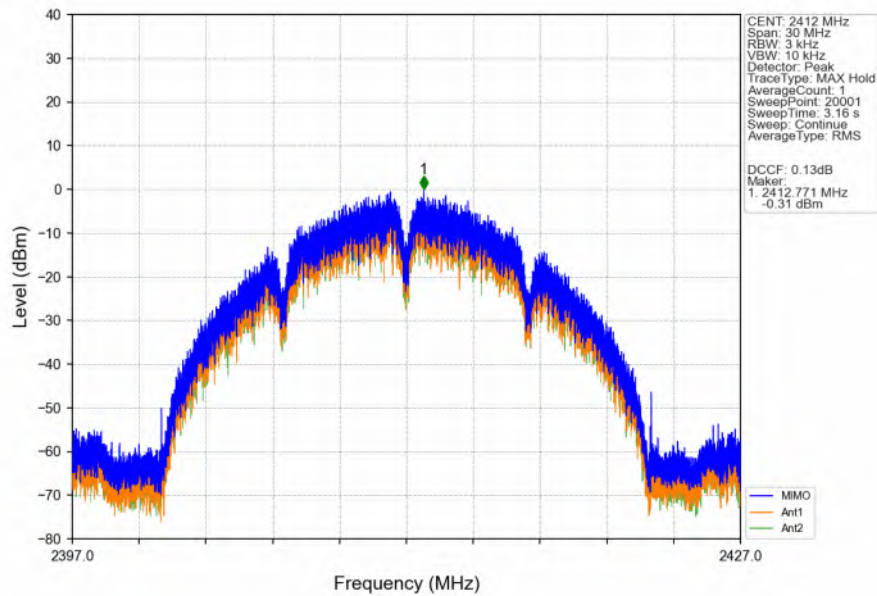


802.11b_MCH_2437MHz_Ant0 (MIMO)_NTNV

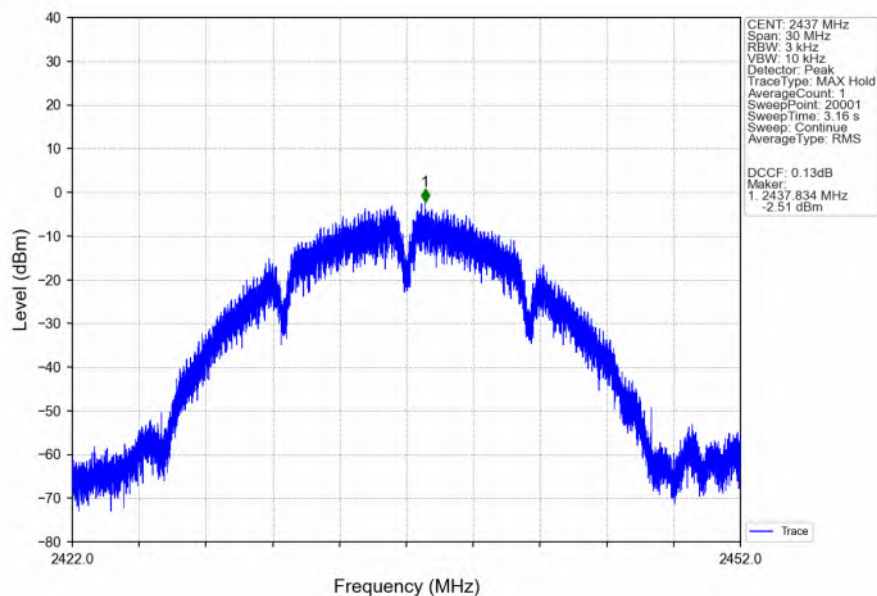


802.11b_MCH_2437MHz_Ant1 (MIMO)_NTNV

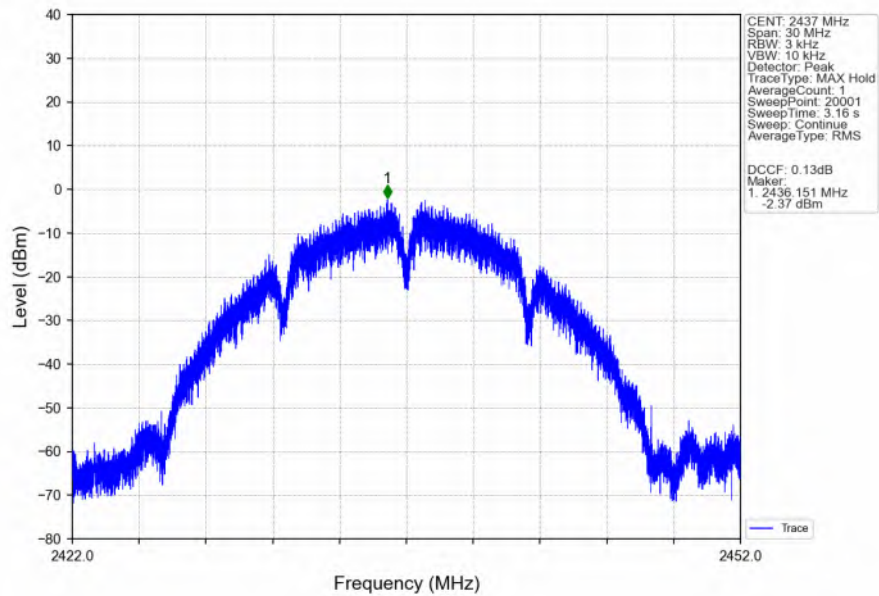


802.11b_MCH_2437MHz_MIMO_NTNV

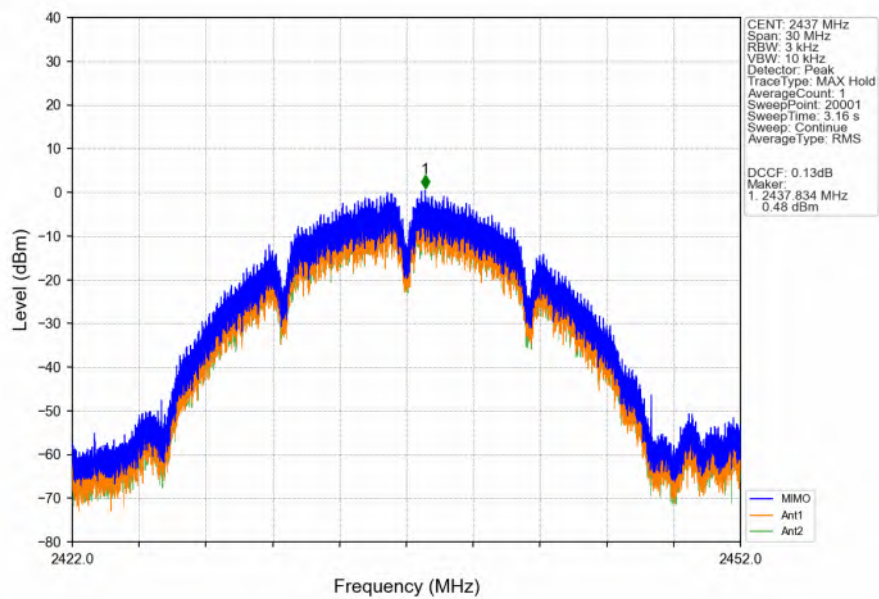


802.11b_HCH_2462MHz_Ant0 (MIMO)_NTNV

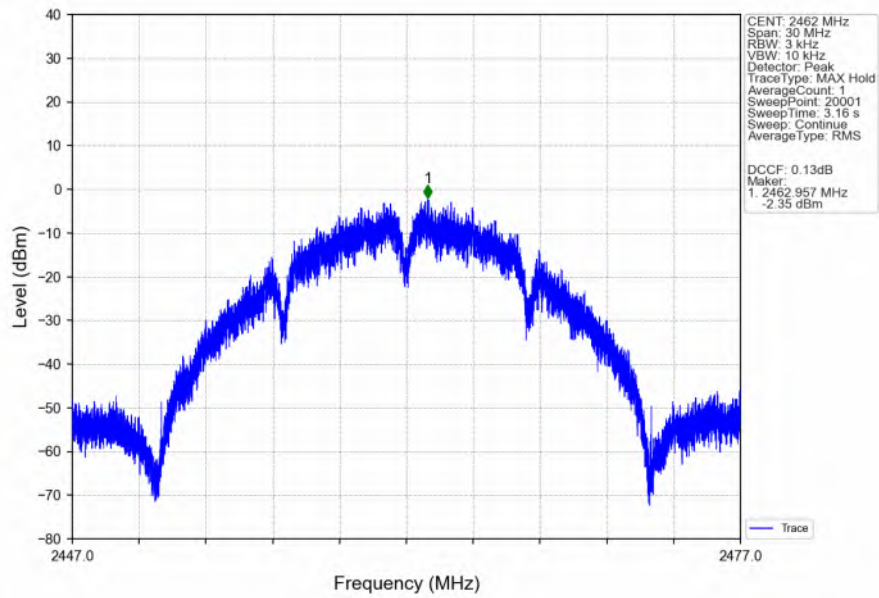


802.11b_HCH_2462MHz_Ant1 (MIMO)_NTNV

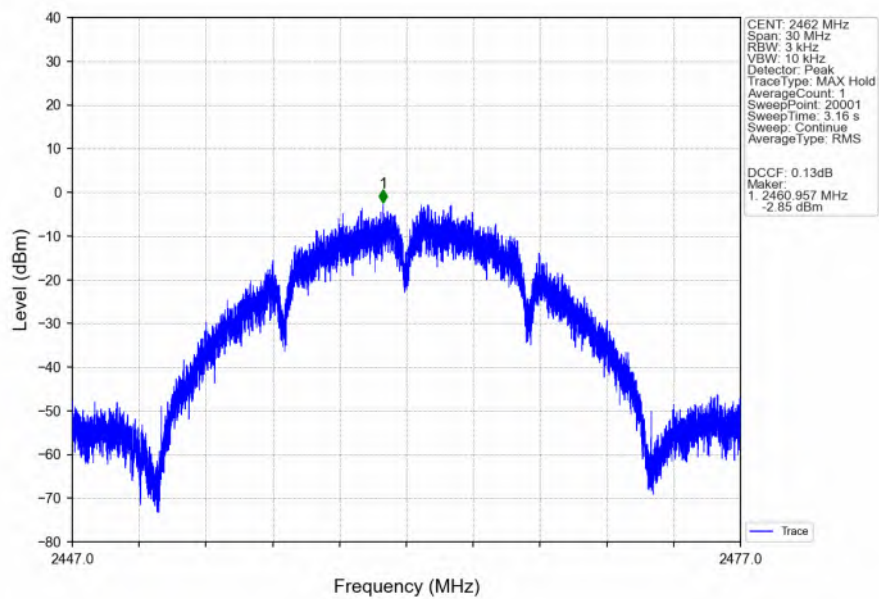


802.11b_HCH_2462MHz_MIMO_NTNV

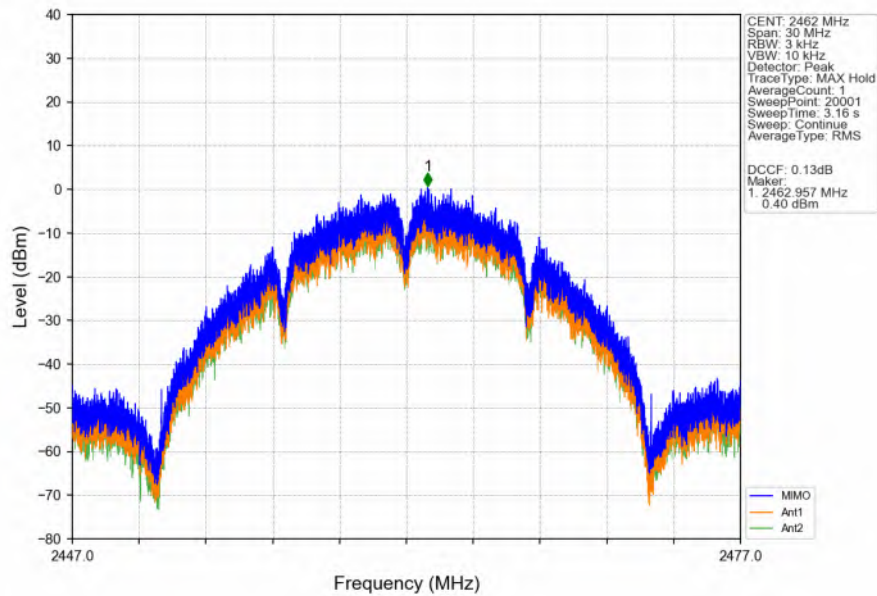


802.11g_LCH_2412MHz_Ant0 (MIMO)_NTNV

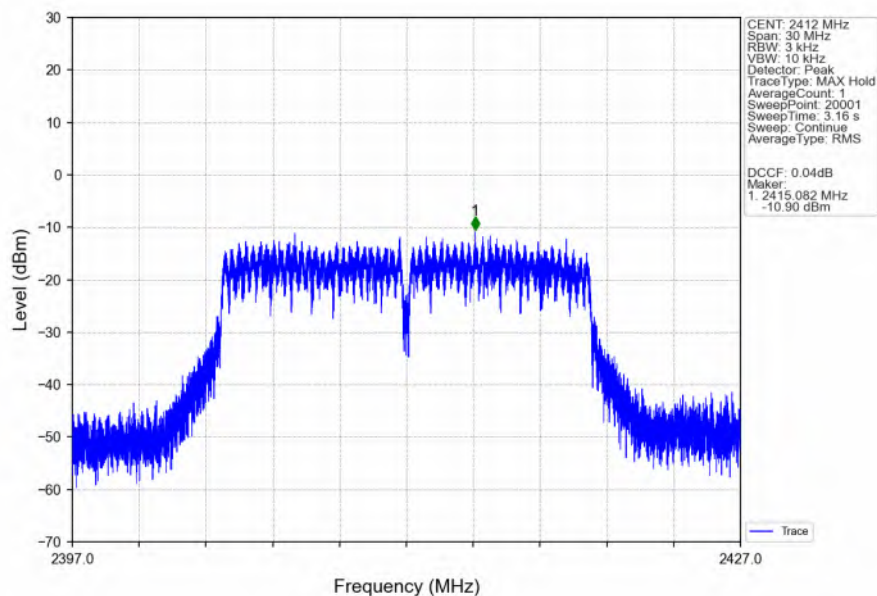


802.11g_LCH_2412MHz_Ant1 (MIMO)_NTNV

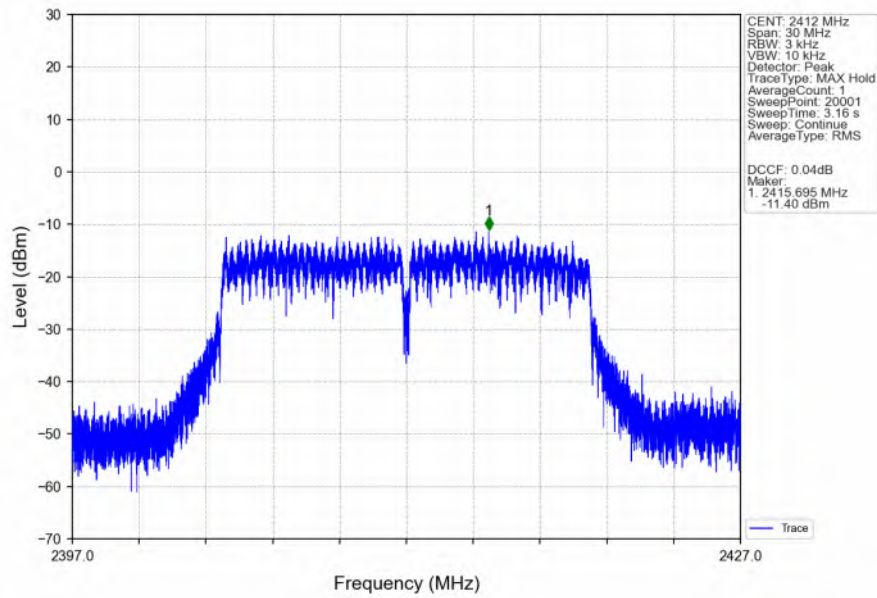


802.11g_LCH_2412MHz_MIMO_NTNV

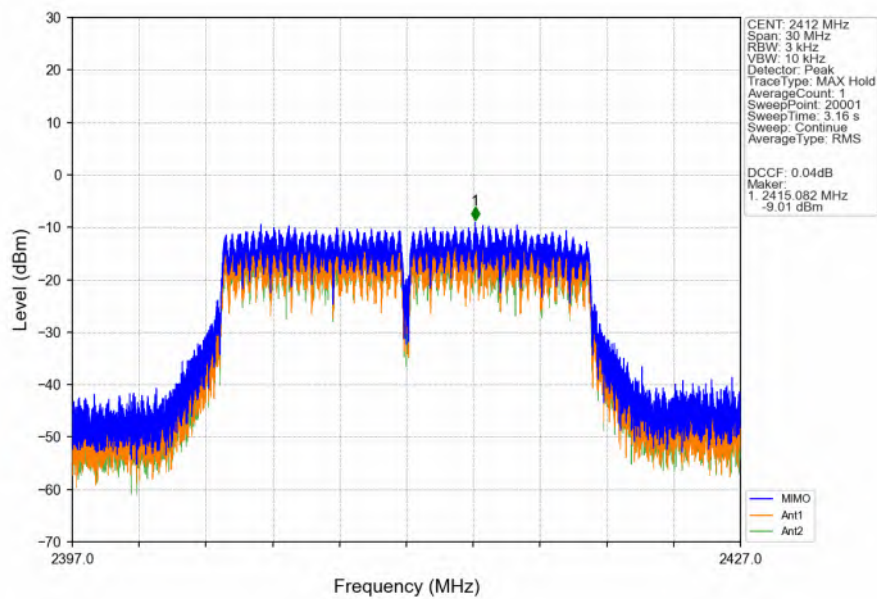


802.11g_MCH_2437MHz_Ant0 (MIMO)_NTNV

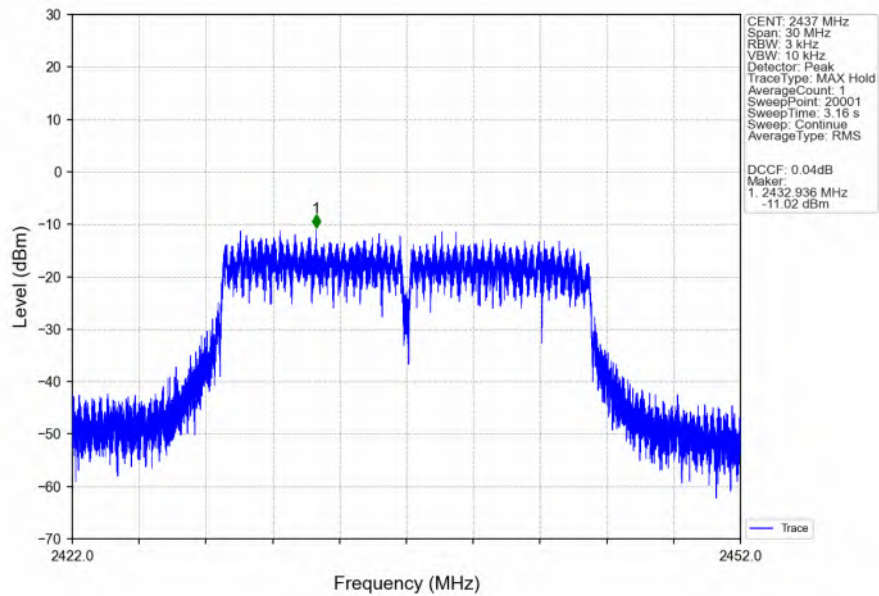


802.11g_MCH_2437MHz_Ant1 (MIMO)_NTNV

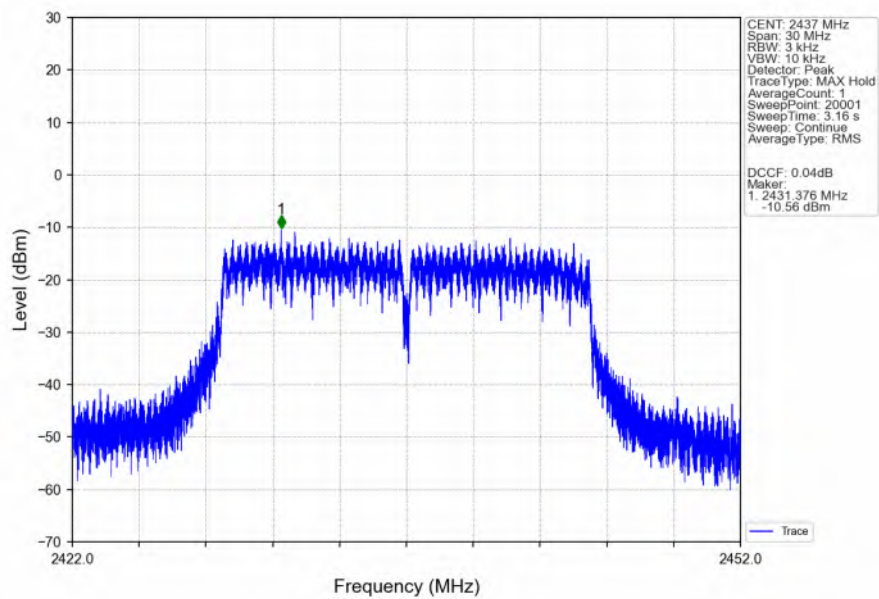


802.11g_MCH_2437MHz_MIMO_NTNV

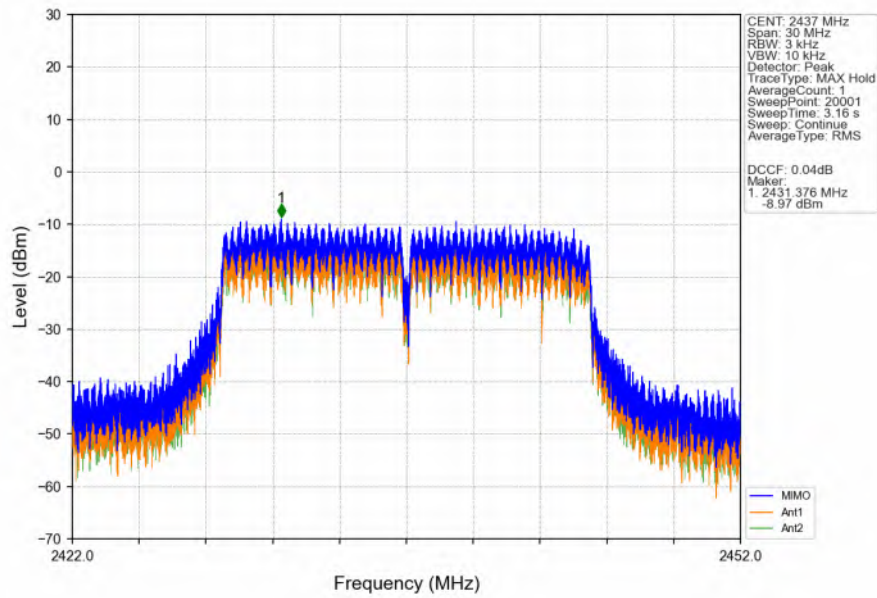


802.11g_HCH_2462MHz_Ant0 (MIMO)_NTNV

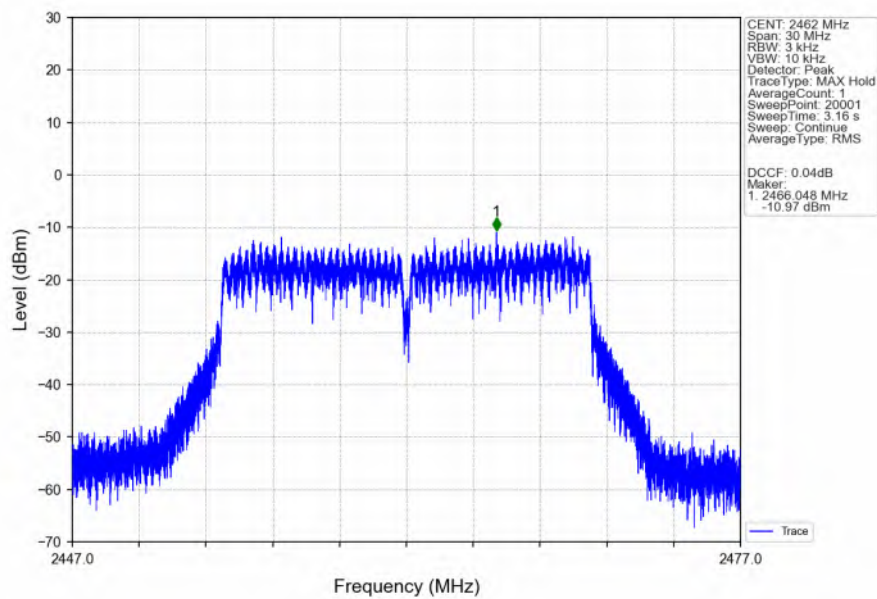


802.11g_HCH_2462MHz_Ant1 (MIMO)_NTNV

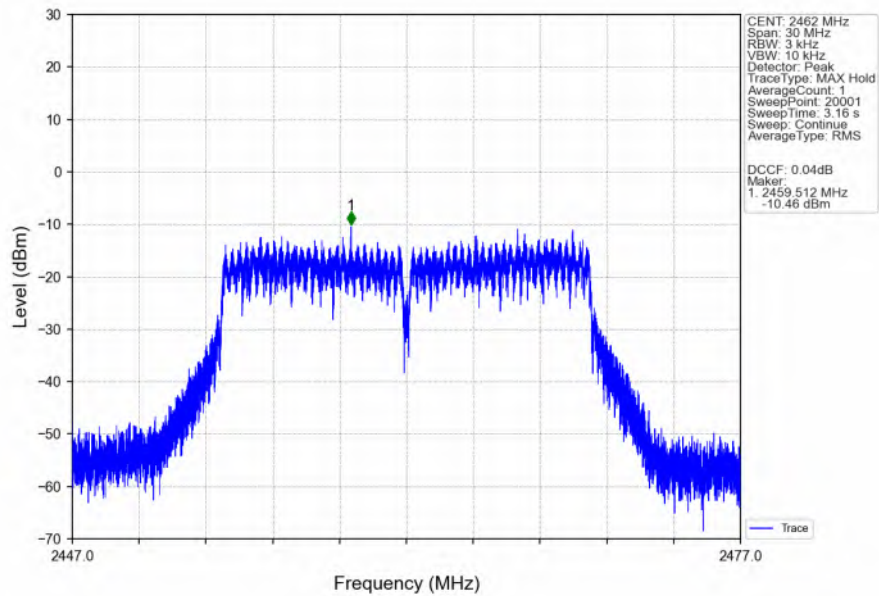


802.11g_HCH_2462MHz_MIMO_NTNV

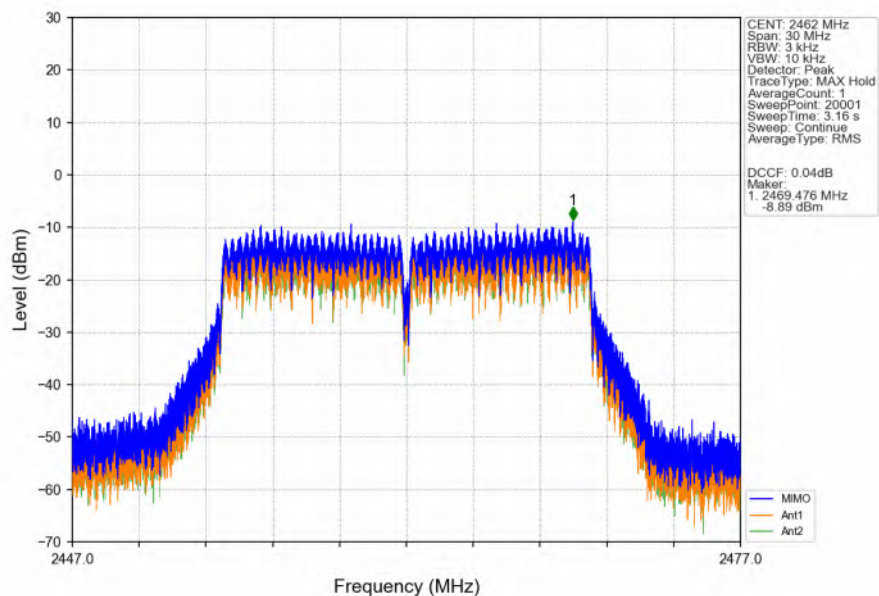


802.11be(EHT20)_LCH_2412MHz_SU_ / _Ant0 (MIMO)_NTNV

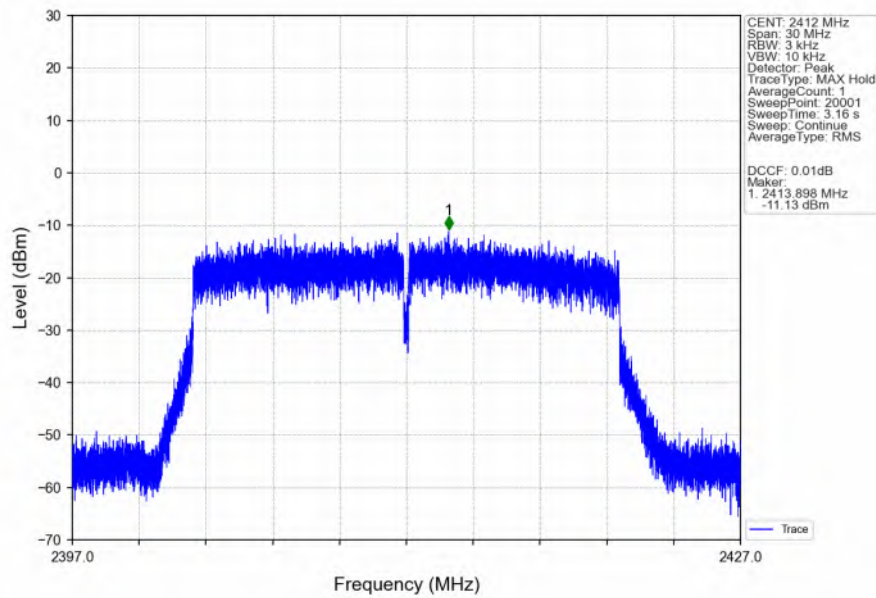


802.11be(EHT20)_LCH_2412MHz_SU_ / _Ant1 (MIMO)_NTNV

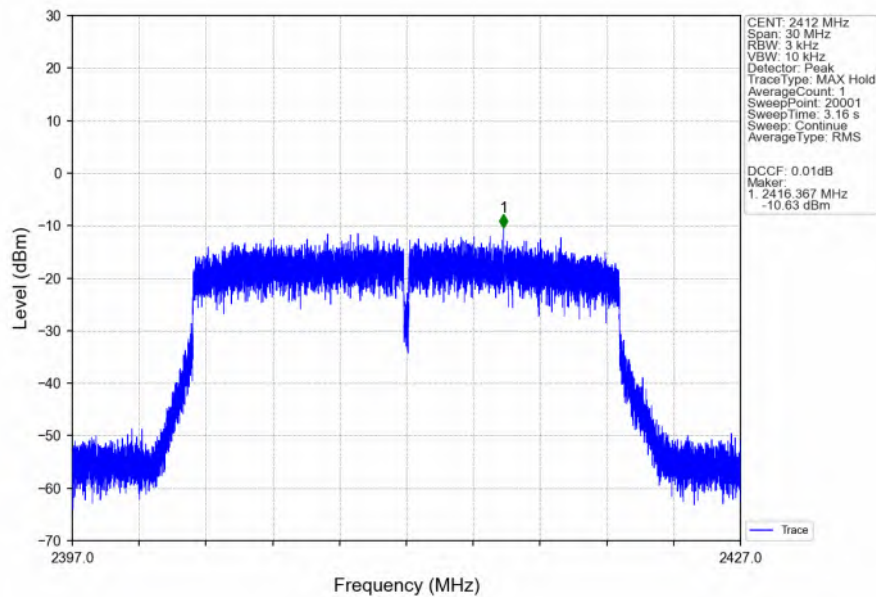


802.11be(EHT20)_LCH_2412MHz_SU_/_MIMO_NTNV

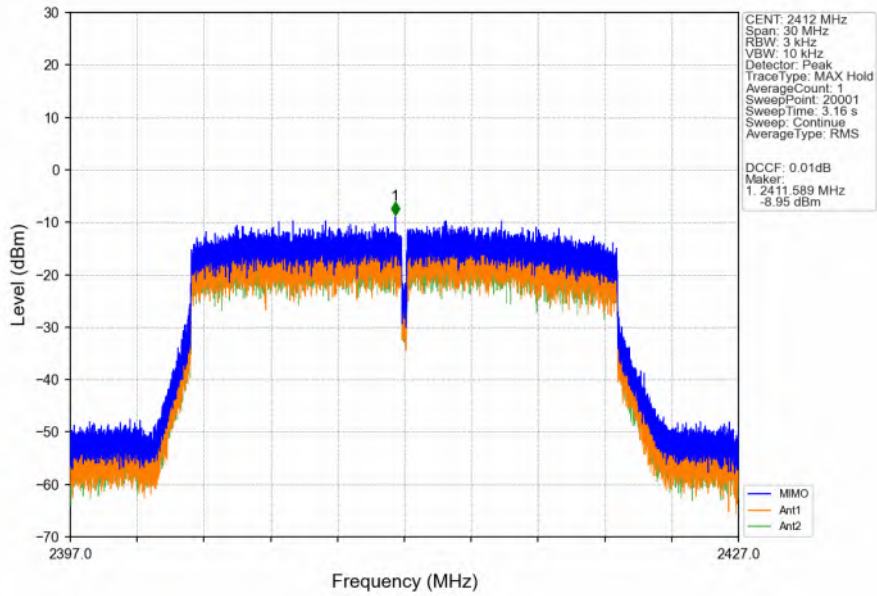


802.11be(EHT20)_LCH_2412MHz_26+52_/_Ant0 (MIMO)_NTNV

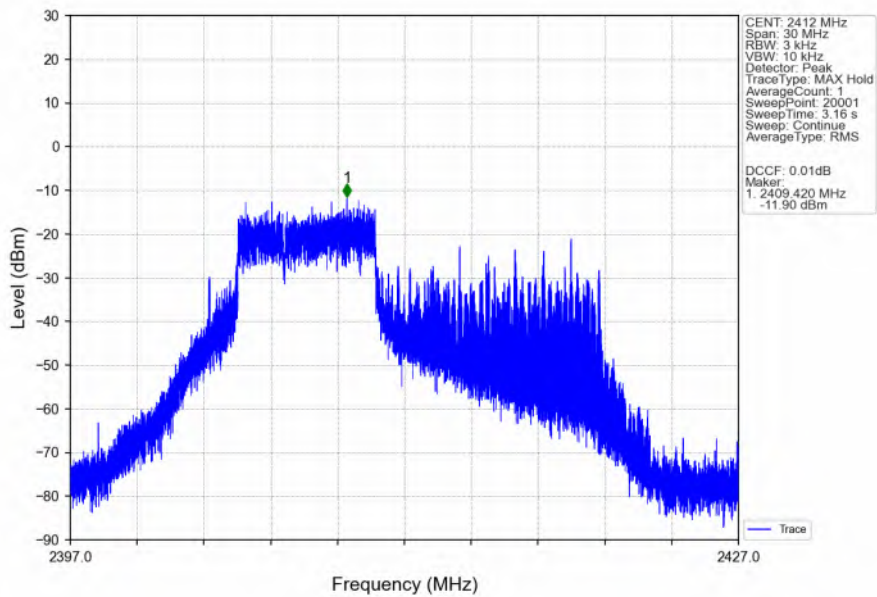


802.11be(EHT20)_LCH_2412MHz_26+52_/_Ant1 (MIMO)_NTNV

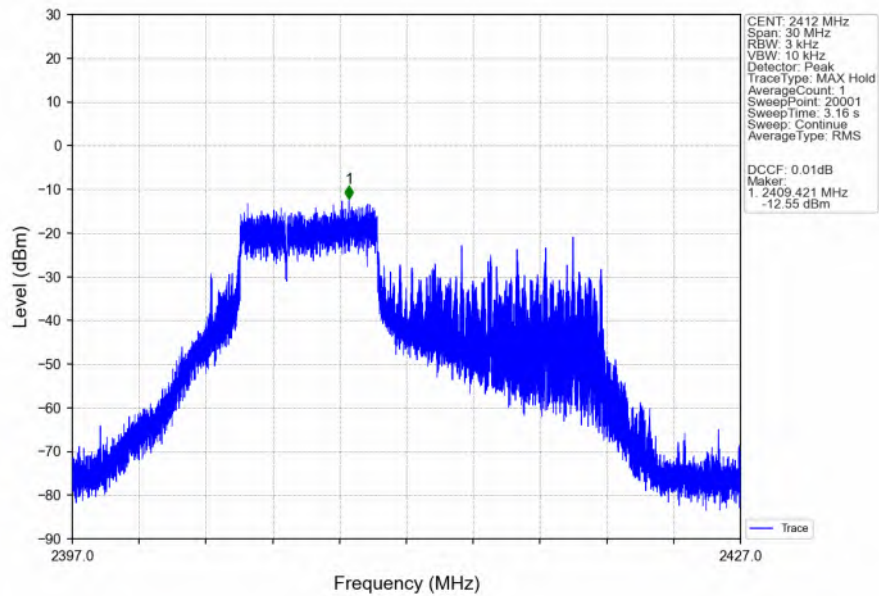


802.11be(EHT20)_LCH_2412MHz_26+52_/_MIMO_NTNV

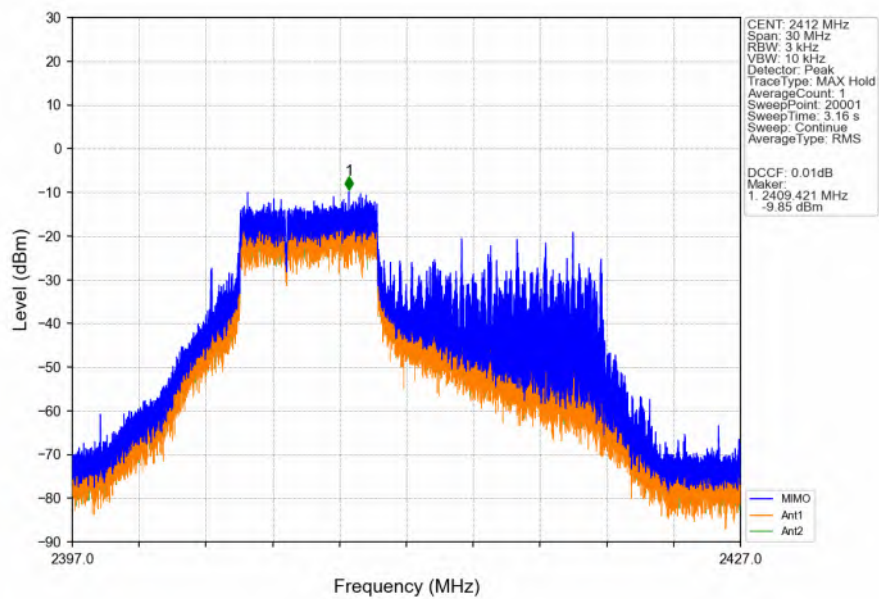


802.11be(EHT20)_LCH_2412MHz_26+106_ / _Ant0 (MIMO)_NTNV

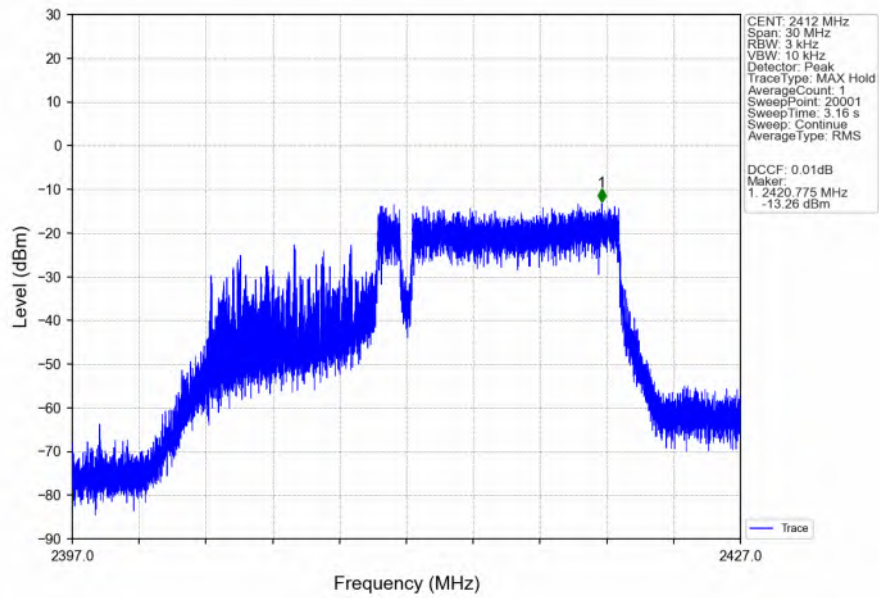


802.11be(EHT20)_LCH_2412MHz_26+106_ / _Ant1 (MIMO)_NTNV

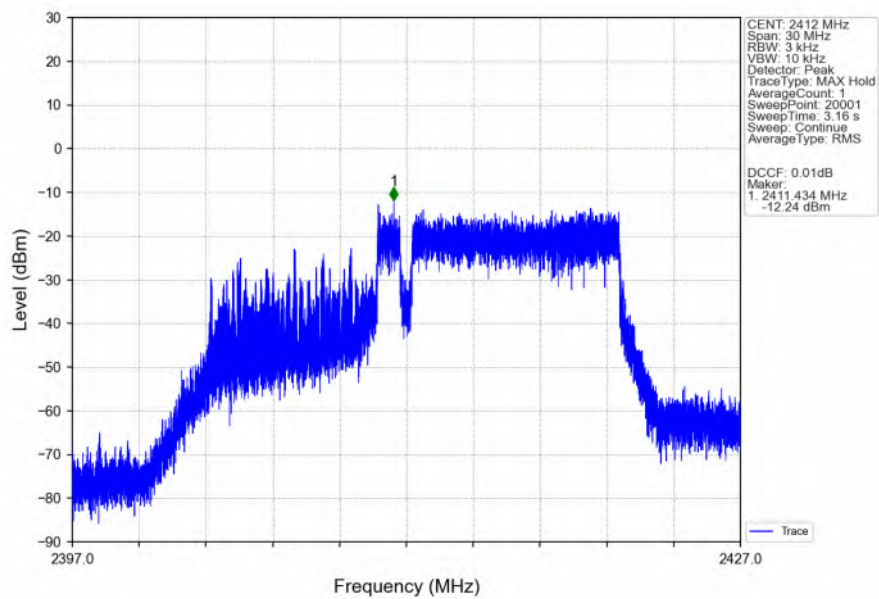


802.11be(EHT20)_LCH_2412MHz_26+106_/_MIMO_NTNV

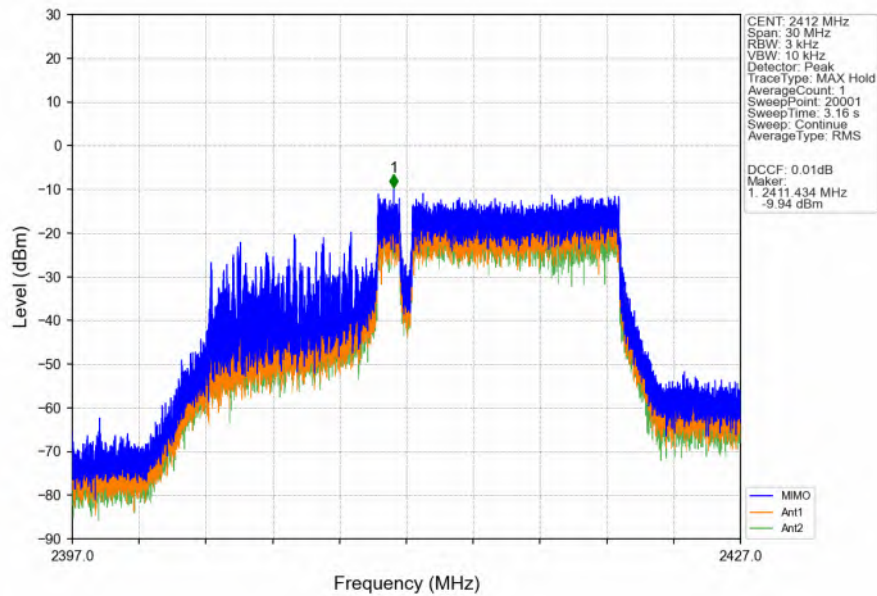


802.11be(EHT20)_MCH_2437MHz_SU_/_Ant0 (MIMO)_NTNV

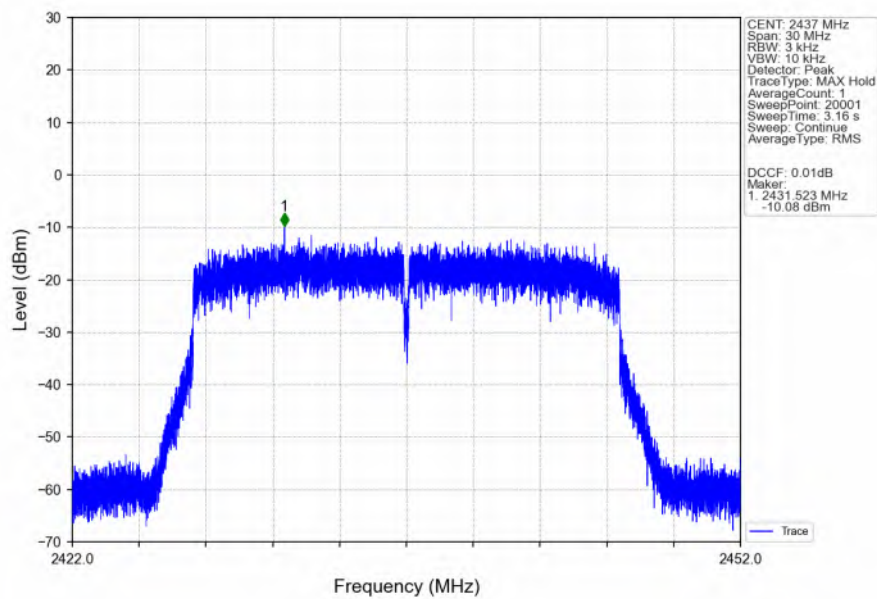


802.11be(EHT20)_MCH_2437MHz_SU_/_Ant1 (MIMO)_NTNV

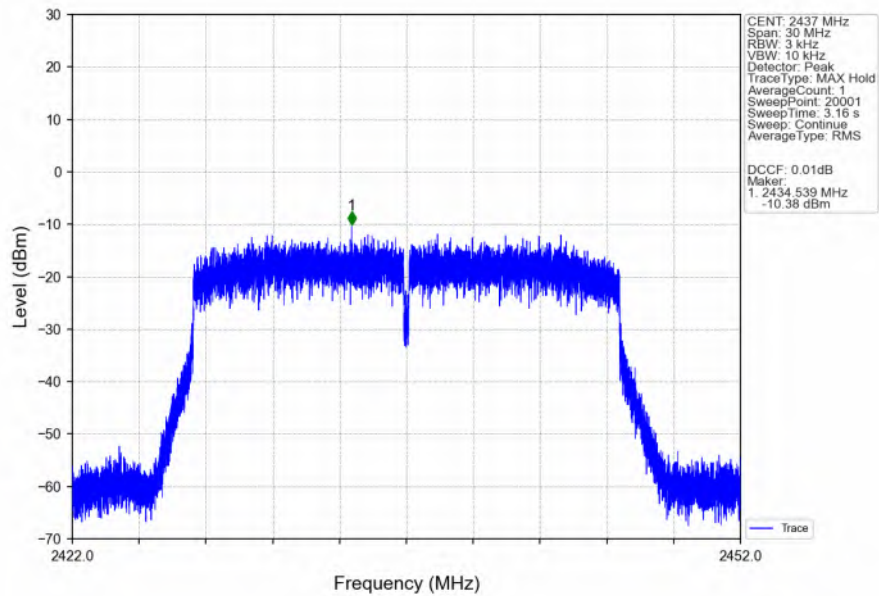


802.11be(EHT20)_MCH_2437MHz_SU_/_MIMO_NTNV

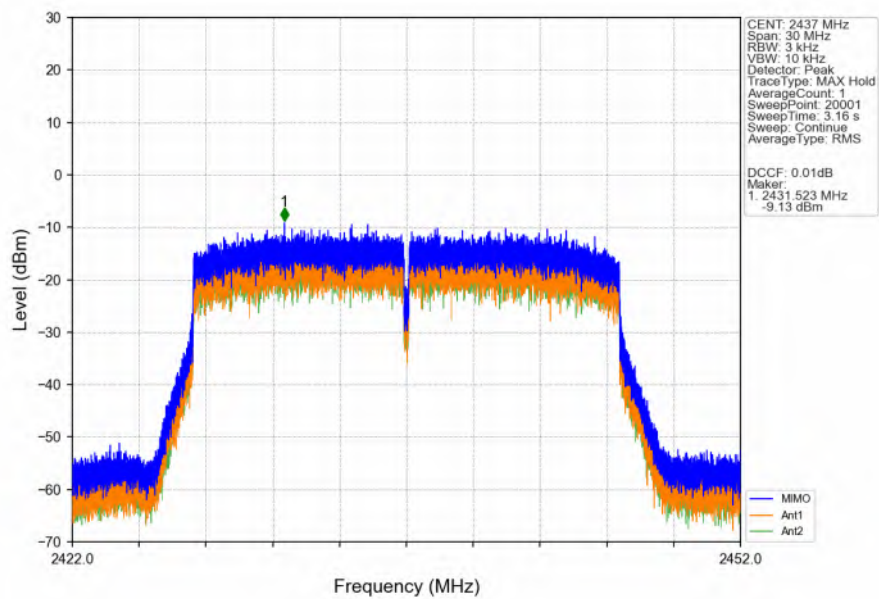


802.11be(EHT20)_MCH_2437MHz_26+52_ / _Ant0 (MIMO)_NTNV

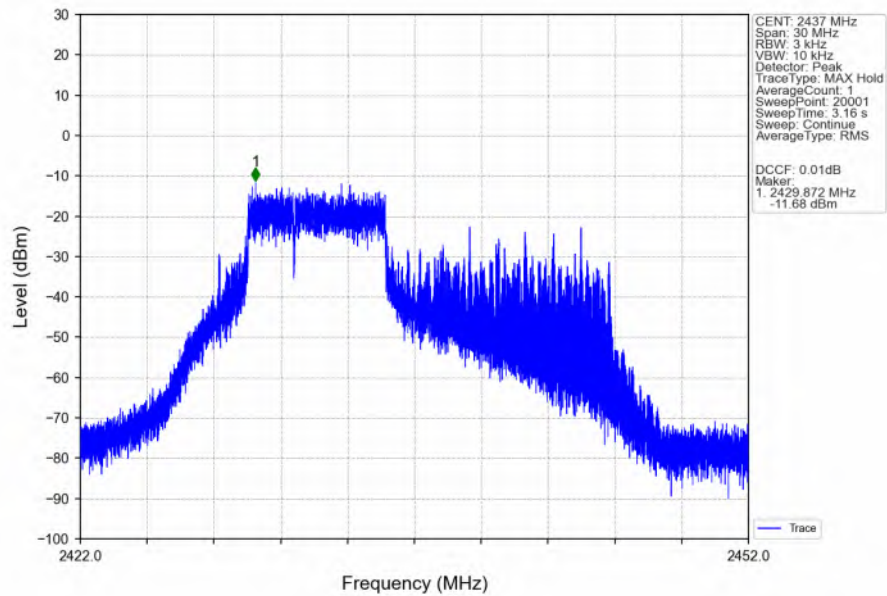


802.11be(EHT20)_MCH_2437MHz_26+52_ / _Ant1 (MIMO)_NTNV

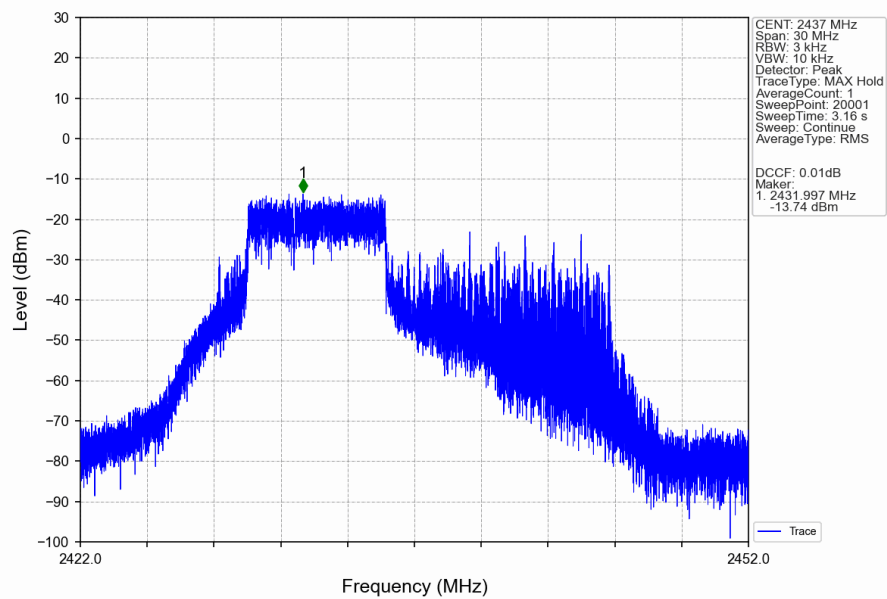


802.11be(EHT20)_MCH_2437MHz_26+52_/_MIMO_NTNV

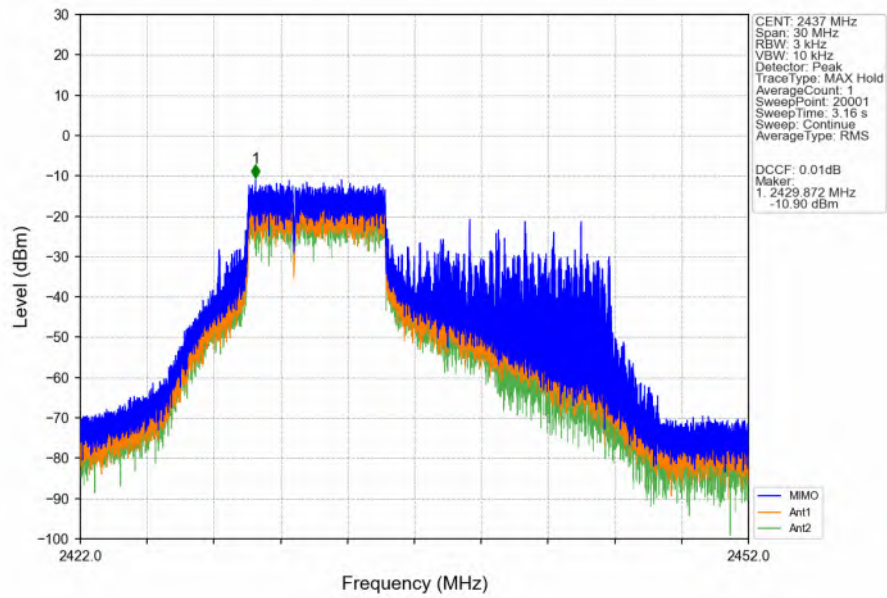


802.11be(EHT20)_MCH_2437MHz_26+106_/_Ant0 (MIMO)_NTNV

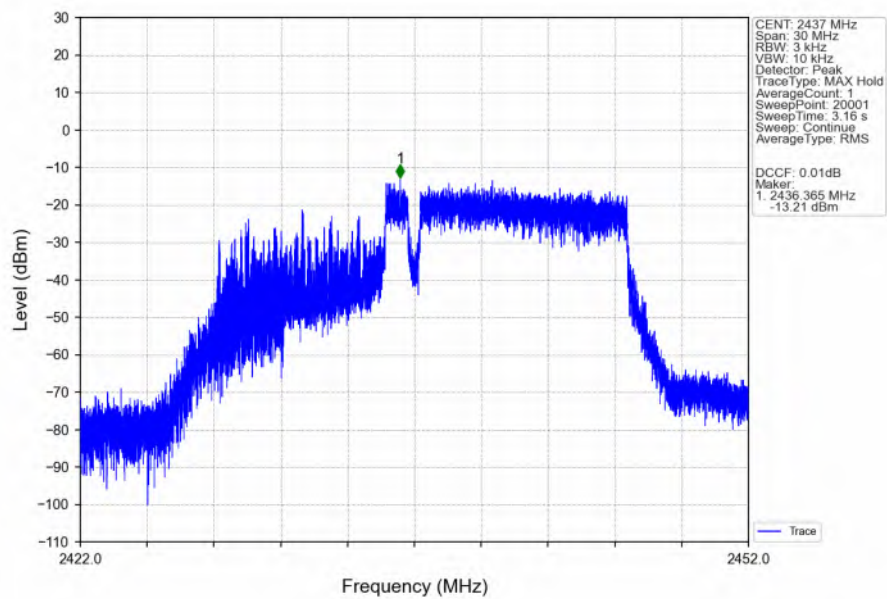


802.11be(EHT20)_MCH_2437MHz_26+106_/_Ant1 (MIMO)_NTNV

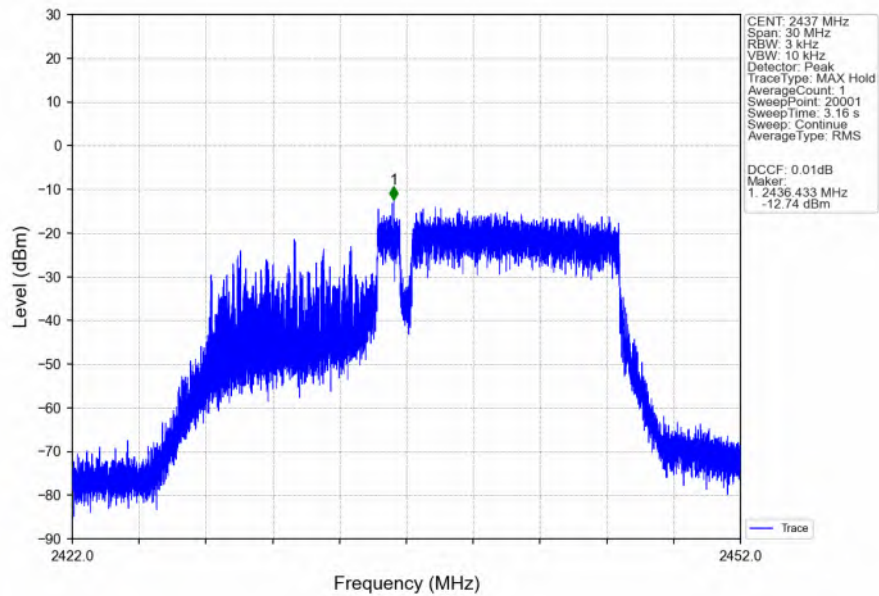


802.11be(EHT20)_MCH_2437MHz_26+106_/_MIMO_NTNV

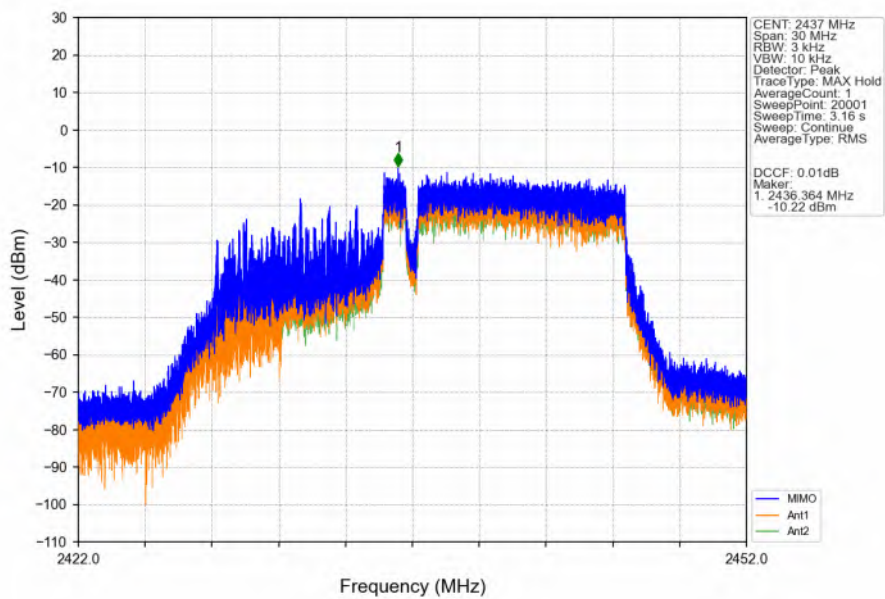


802.11be(EHT20)_HCH_2462MHz_SU_/_Ant0 (MIMO)_NTNV

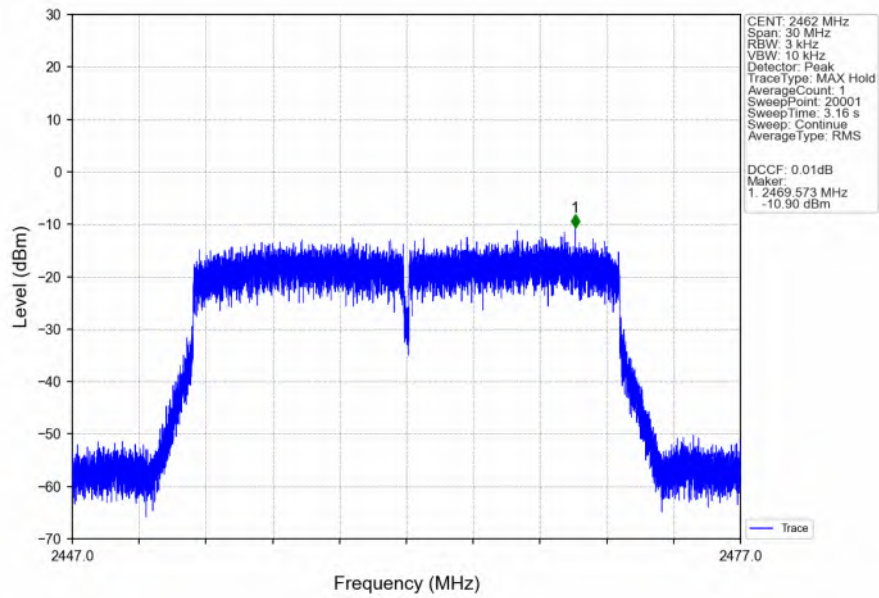


802.11be(EHT20)_HCH_2462MHz_SU_/_Ant1 (MIMO)_NTNV

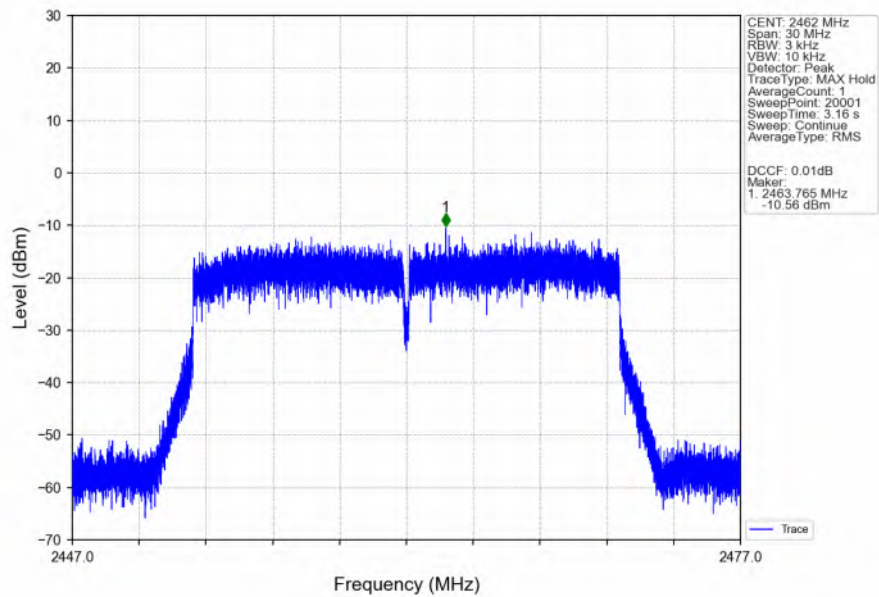


802.11be(EHT20)_HCH_2462MHz_SU_/_MIMO_NTNV

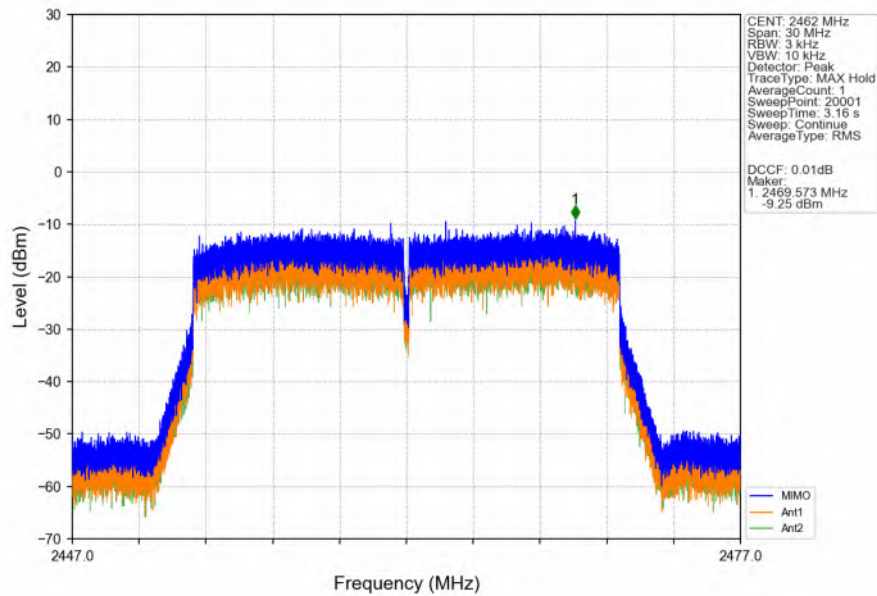


802.11be(EHT20)_HCH_2462MHz_26+52_/_Ant0 (MIMO)_NTNV

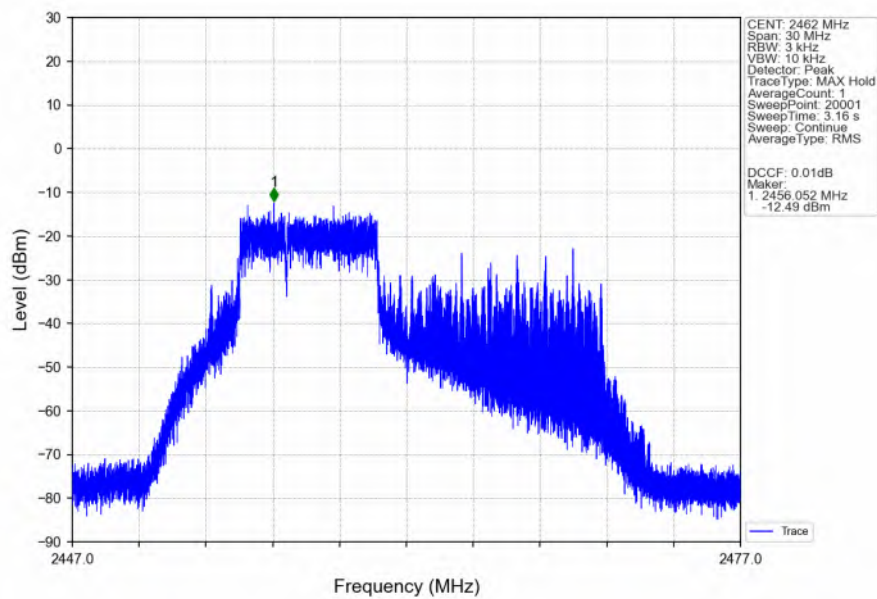


802.11be(EHT20)_HCH_2462MHz_26+52_ / _Ant1 (MIMO)_NTNV

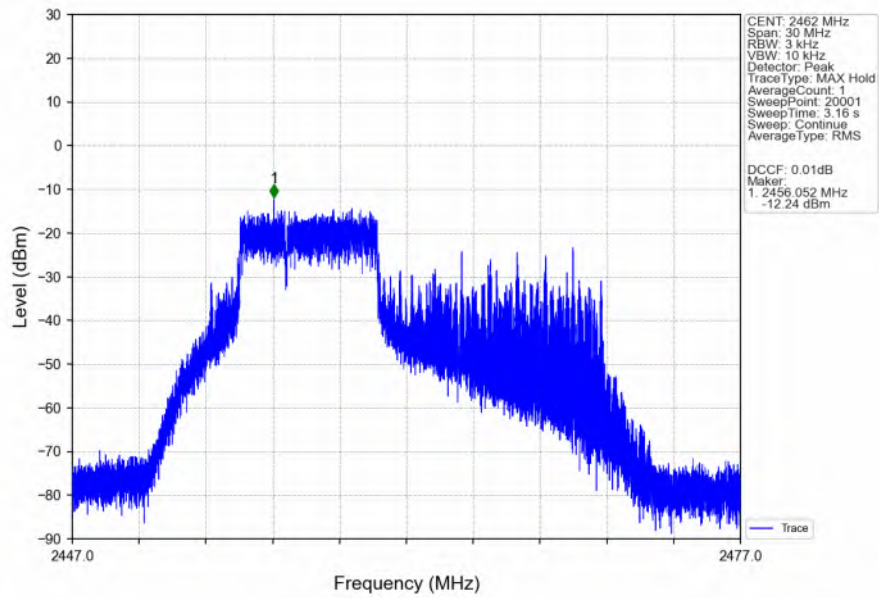


802.11be(EHT20)_HCH_2462MHz_26+52_ / _MIMO_NTNV

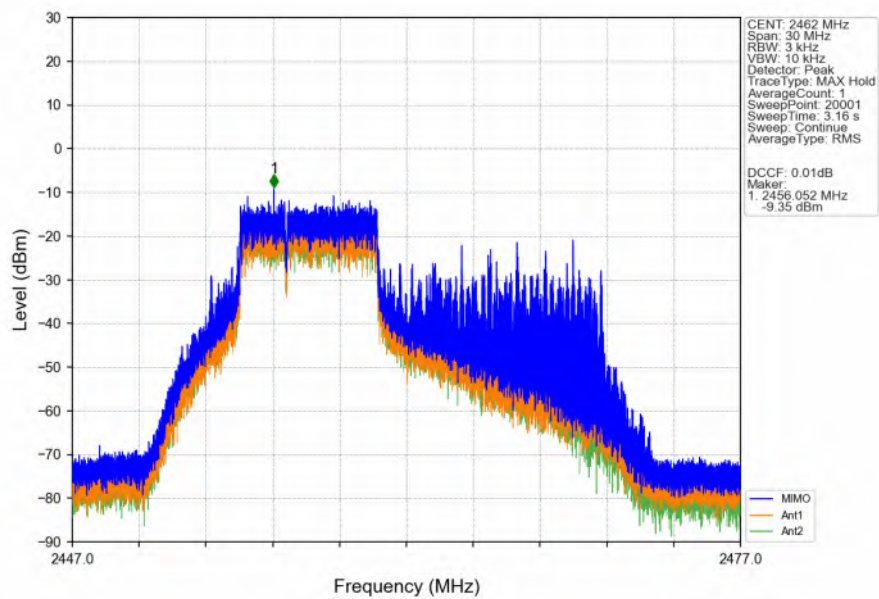


802.11be(EHT20)_HCH_2462MHz_26+106_ / _Ant0 (MIMO)_NTNV

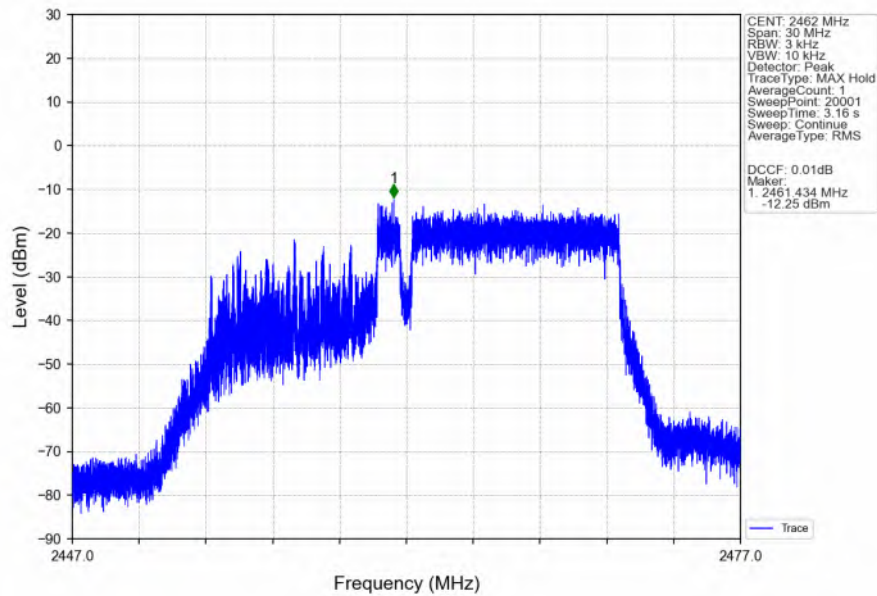


802.11be(EHT20)_HCH_2462MHz_26+106_ / _Ant1 (MIMO)_NTNV

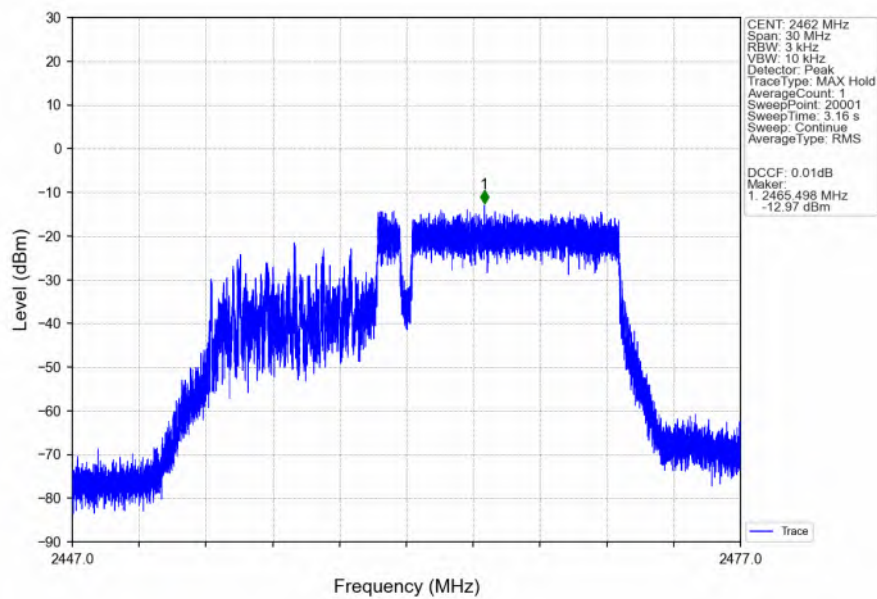


802.11be(EHT20)_HCH_2462MHz_26+106_/_MIMO_NTNV

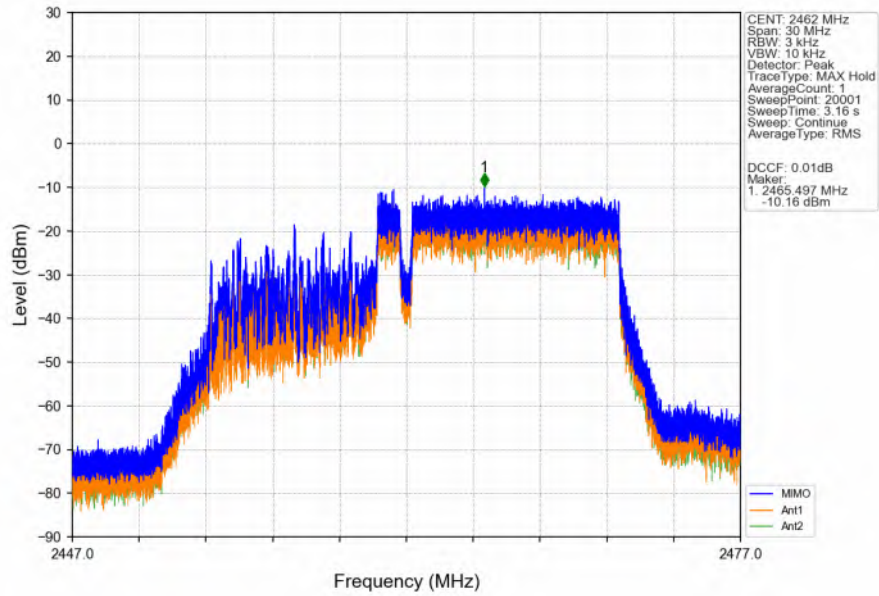


802.11be(EHT40)_LCH_2422MHz_SU_/_Ant0 (MIMO)_NTNV

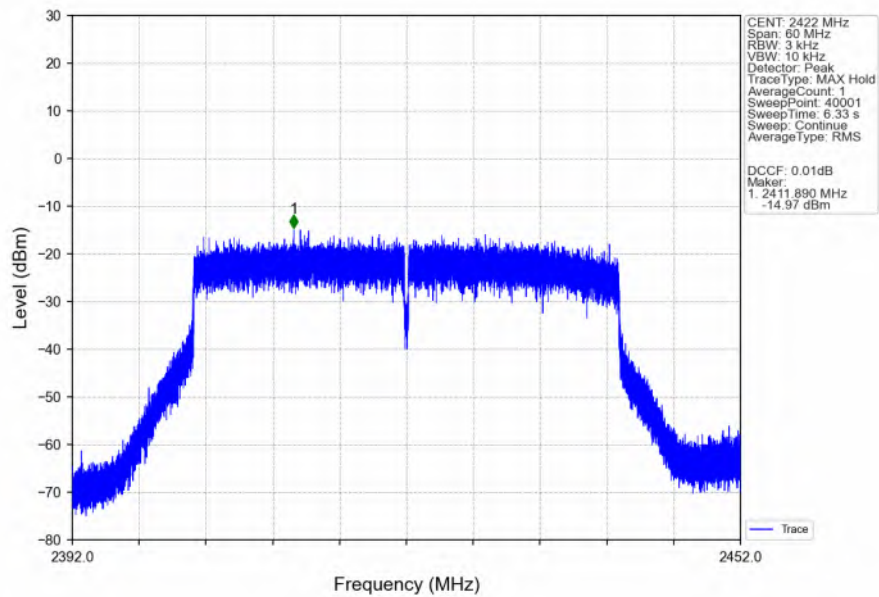


802.11be(EHT40)_LCH_2422MHz_SU_/_Ant1 (MIMO)_NTNV

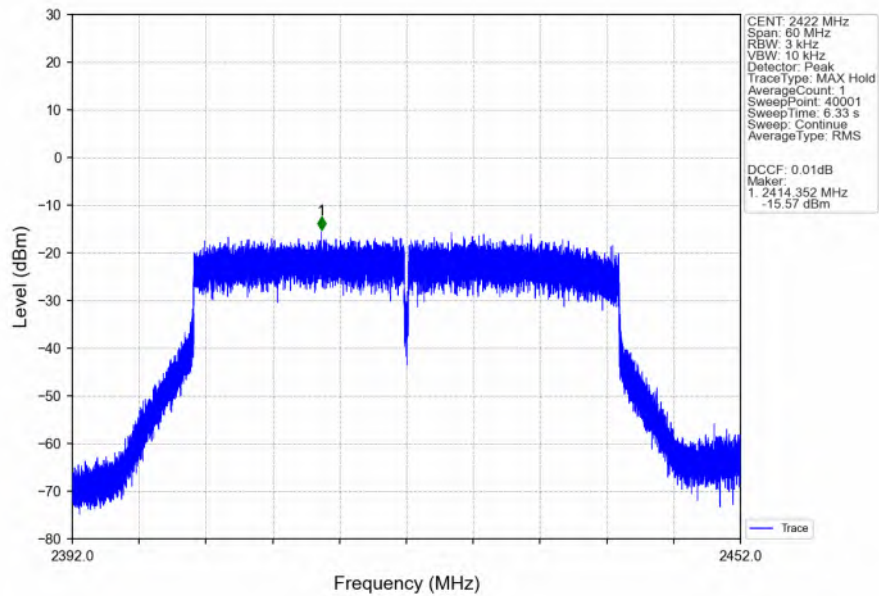


802.11be(EHT40)_LCH_2422MHz_SU_/_MIMO_NTNV

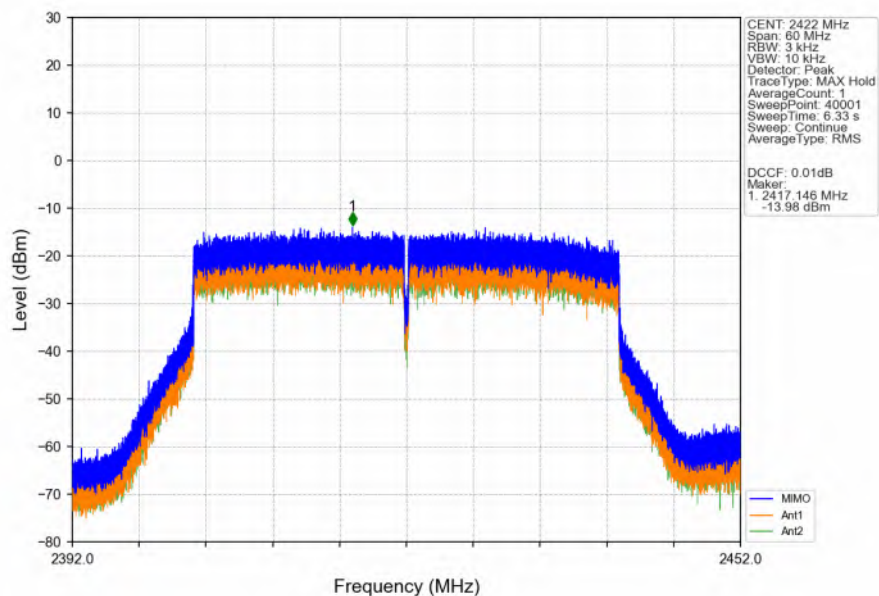


802.11be(EHT40)_MCH_2437MHz_SU_/_Ant0 (MIMO)_NTNV

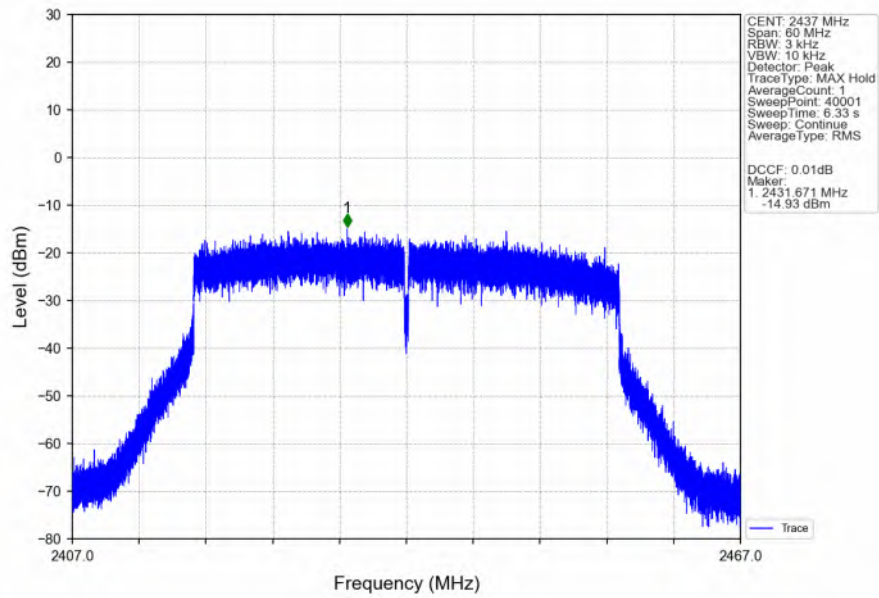


802.11be(EHT40)_MCH_2437MHz_SU_/_Ant1 (MIMO)_NTNV

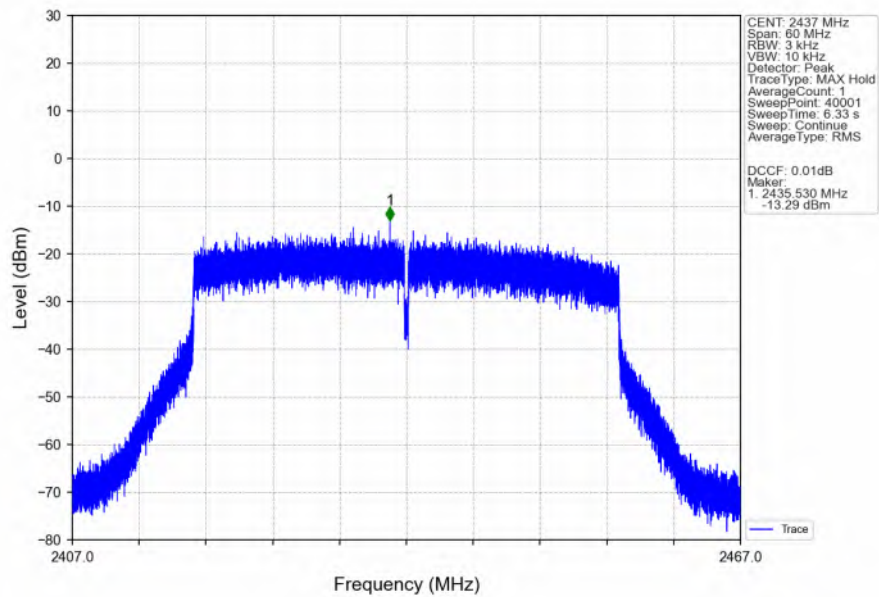


802.11be(EHT40)_MCH_2437MHz_SU_/_MIMO_NTNV

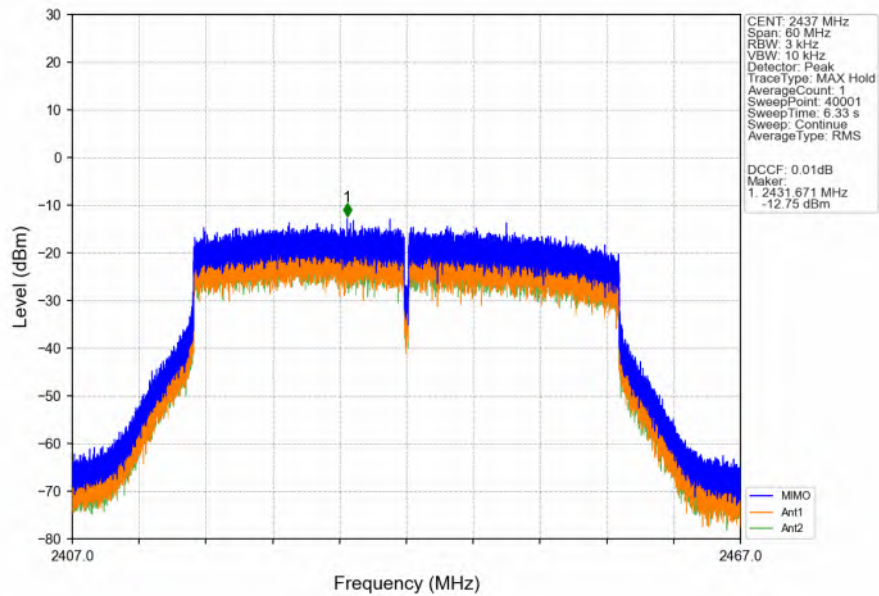


802.11be(EHT40)_HCH_2452MHz_SU_/_Ant0 (MIMO)_NTNV

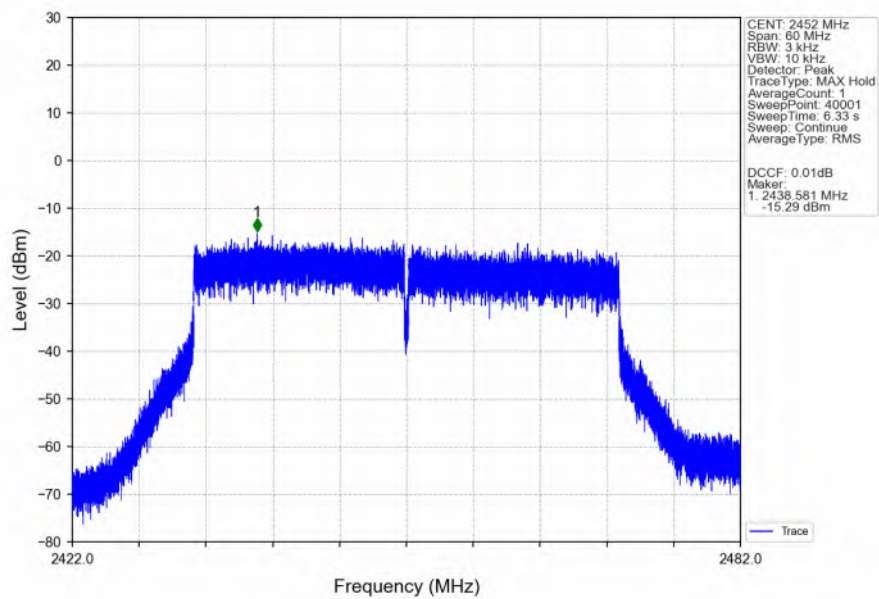

802.11be(EHT40)_HCH_2452MHz_SU_/_Ant1 (MIMO)_NTNV

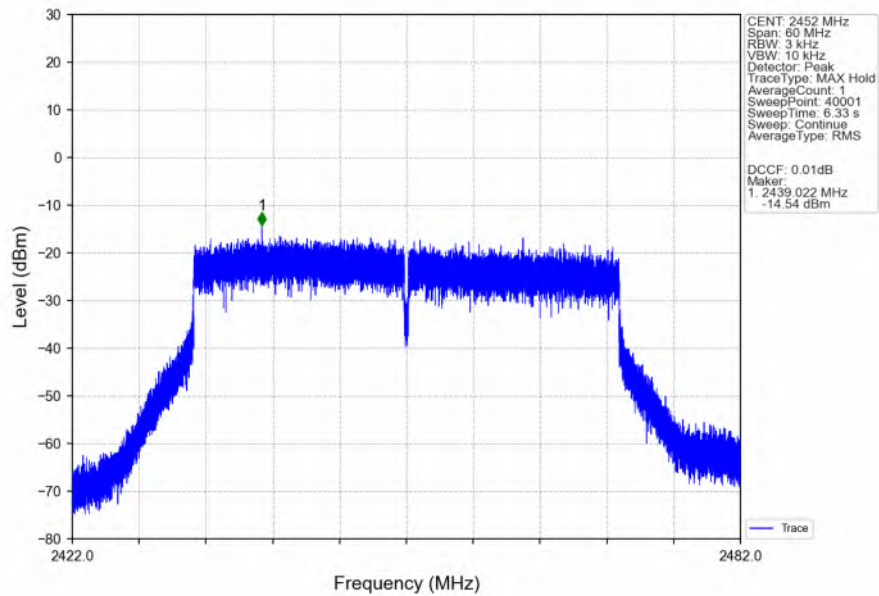

802.11be(EHT40)_HCH_2452MHz_SU_/_MIMO_NTNV

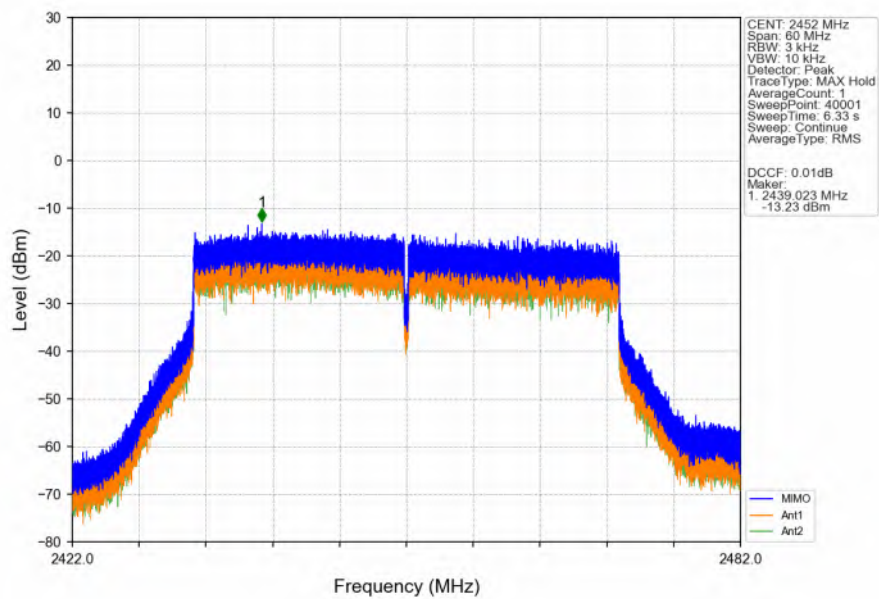

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	Level of Reference (dBm)
802.11b	MIMO	2412	/	/	0	11.78
					1	11.80
		2437	/	/	0	12.64
					1	12.83
		2462	/	/	0	12.74
					1	12.70
802.11g	MIMO	2412	/	/	0	5.01
					1	4.98
		2437	/	/	0	4.70
					1	4.79
		2462	/	/	0	4.78
					1	4.86
802.11be (EHT20)	MIMO	2412	SU	/	0	5.03
					1	4.75
		2437	SU	/	0	4.64
					1	4.87
		2462	SU	/	0	4.80
					1	5.57
802.11be (EHT40)	MIMO	2422	SU	/	0	0.55
					1	-0.65
		2437	SU	/	0	1.19
					1	0.19
		2452	SU	/	0	0.25
					1	0.09


5.1.2 CSE

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
802.11b	MIMO	2412	/	/	0	11.78	-8.22	Pass
					1	11.80	-8.20	Pass
		2437	/	/	0	12.64	-7.36	Pass
					1	12.83	-7.17	Pass
		2462	/	/	0	12.74	-7.26	Pass
					0	12.74	-7.26	Pass


					1	12.70	-7.30	Pass
802.11g	MIMO	2412	/	/	0	5.01	-14.99	Pass
					1	4.98	-15.02	Pass
		2437	/	/	0	4.70	-15.30	Pass
					1	4.79	-15.21	Pass
		2462	/	/	0	4.78	-15.22	Pass
					1	4.86	-15.14	Pass
802.11be (EHT20)	MIMO	2412	SU	/	0	5.03	-14.97	Pass
					1	4.75	-15.25	Pass
		2437	SU	/	0	4.64	-15.36	Pass
					1	4.87	-15.13	Pass
		2462	SU	/	0	4.80	-15.20	Pass
					1	5.57	-14.43	Pass
802.11be (EHT40)	MIMO	2422	SU	/	0	0.55	-19.45	Pass
					1	-0.65	-20.65	Pass
		2437	SU	/	0	1.19	-18.81	Pass
					1	0.19	-19.81	Pass
		2452	SU	/	0	0.25	-19.75	Pass
					1	0.09	-19.91	Pass

5.2 Test Graph


5.2.1 Ref

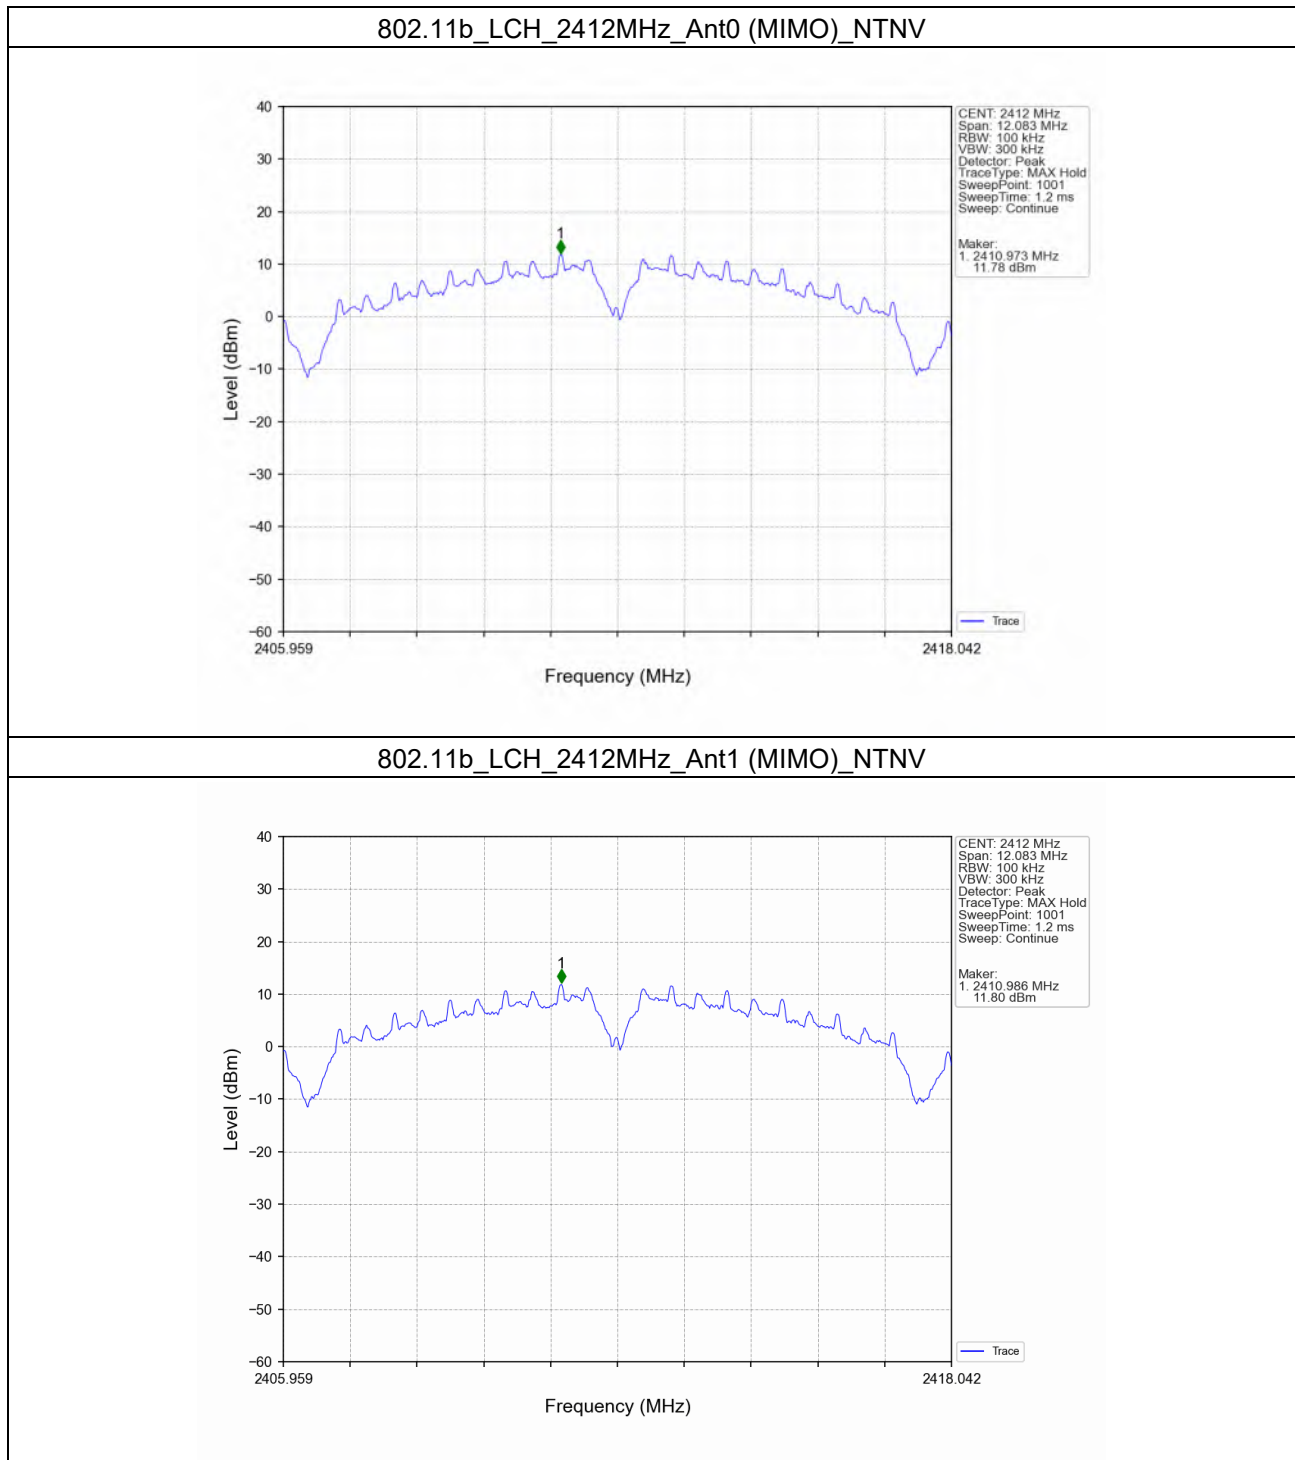


802.11b_MCH_2437MHz_Ant0 (MIMO)_NTNV

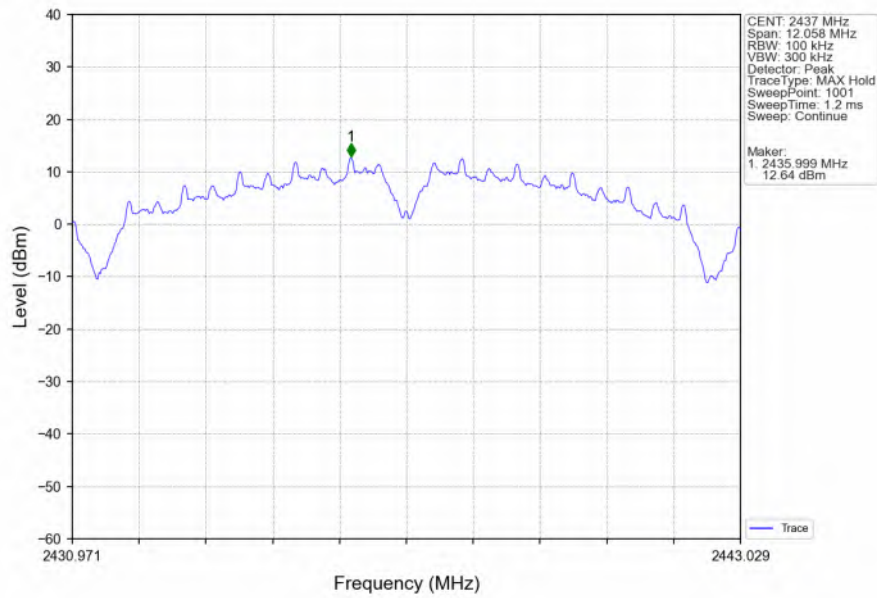


802.11b_MCH_2437MHz_Ant1 (MIMO)_NTNV

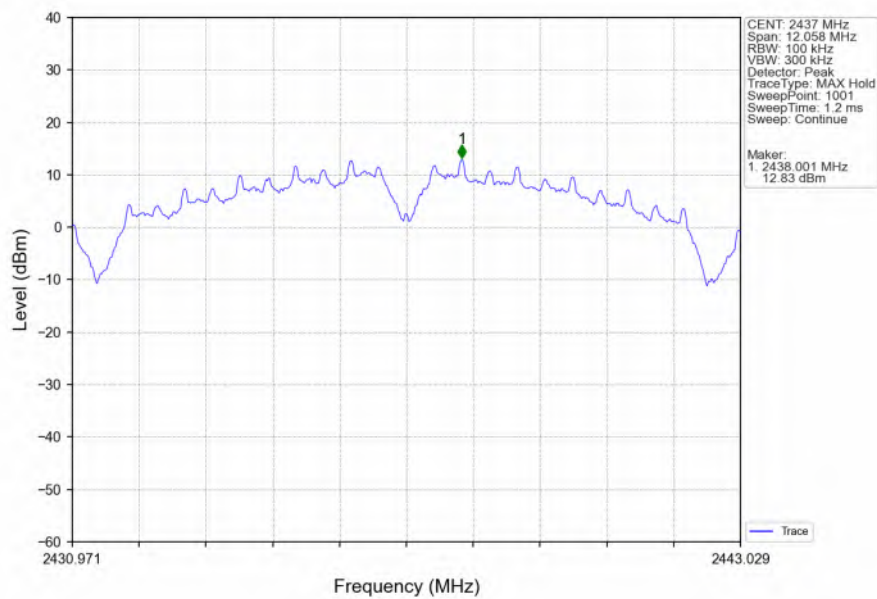


802.11b_HCH_2462MHz_Ant0 (MIMO)_NTNV

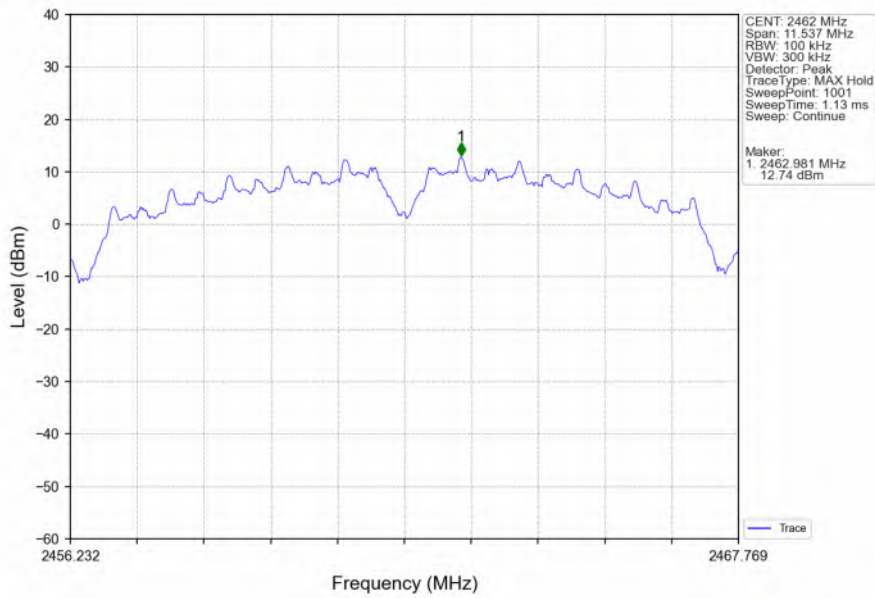


802.11b_HCH_2462MHz_Ant1 (MIMO)_NTNV

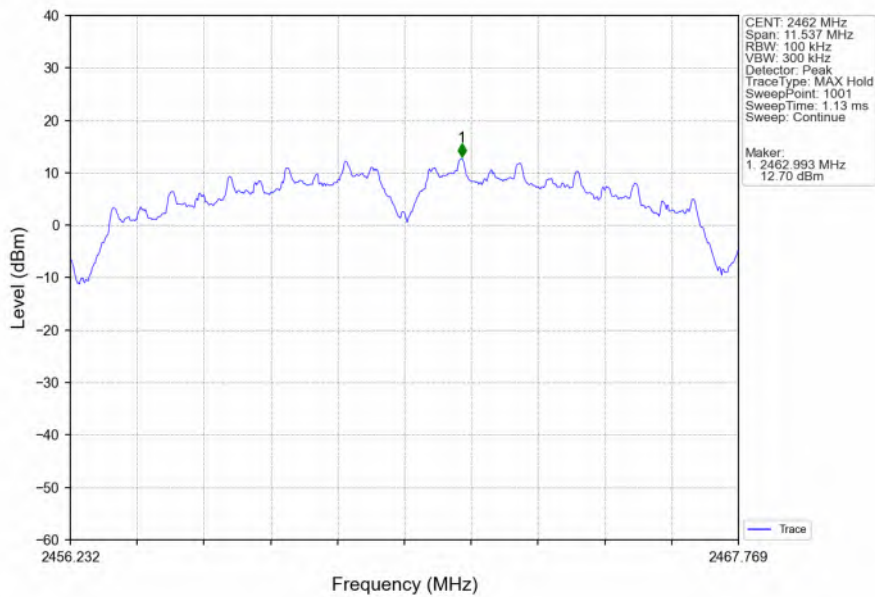


802.11g_LCH_2412MHz_Ant0 (MIMO)_NTNV

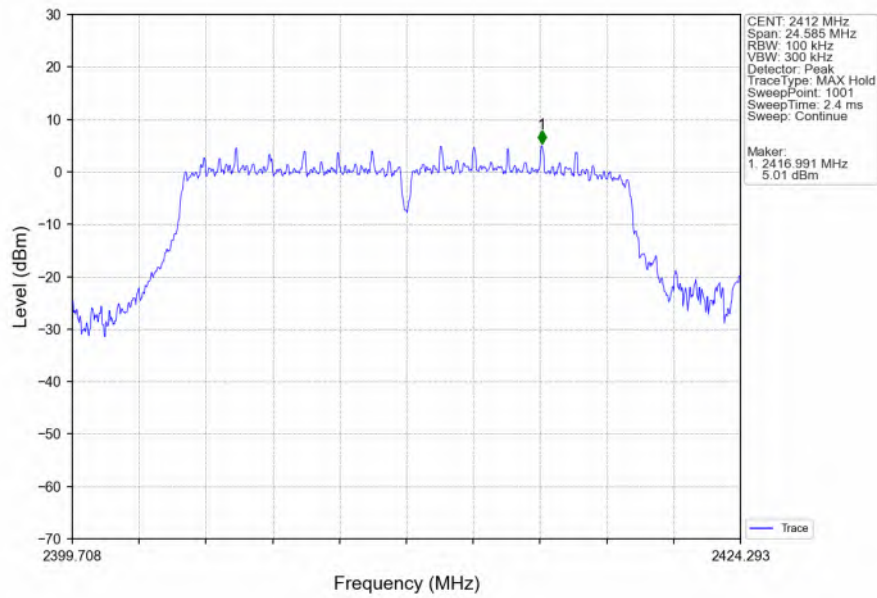


802.11g_LCH_2412MHz_Ant1 (MIMO)_NTNV

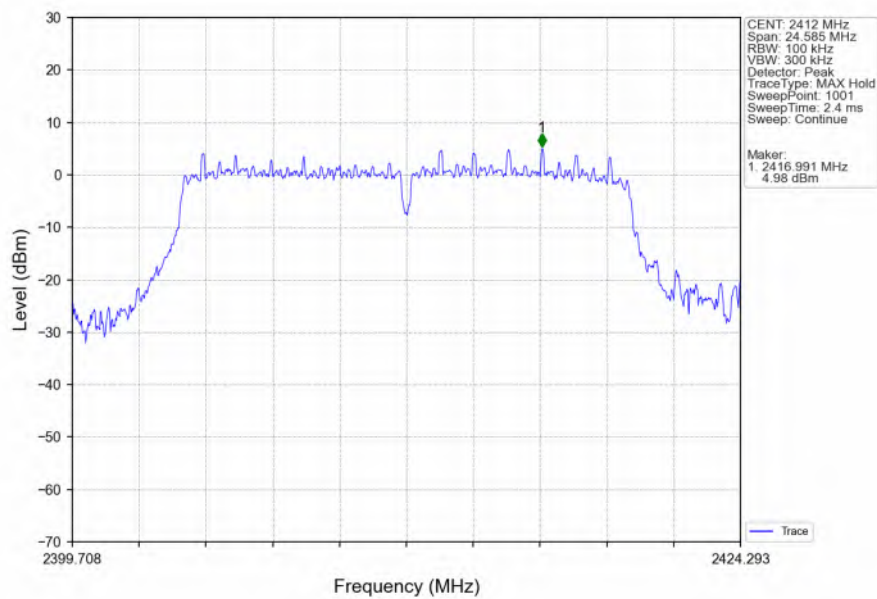


802.11g_MCH_2437MHz_Ant0 (MIMO)_NTNV

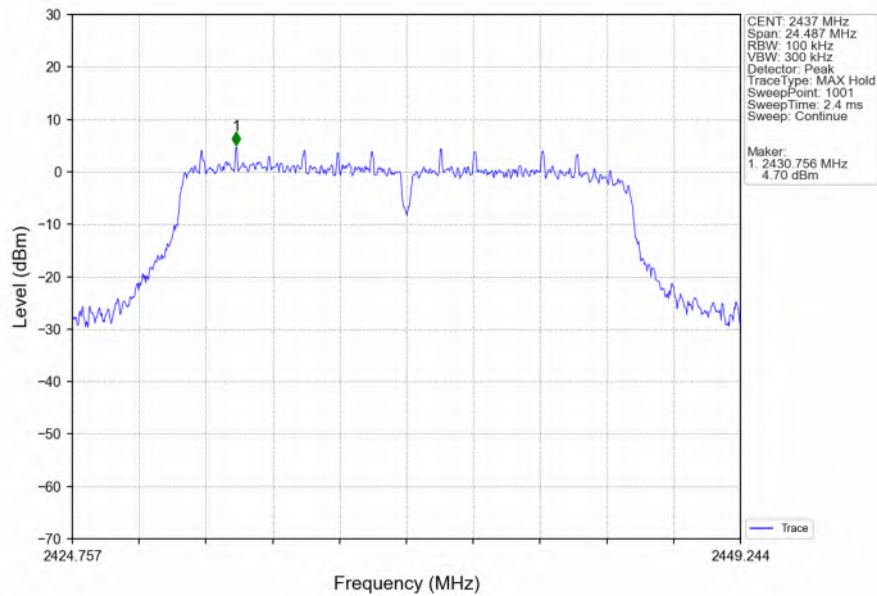


802.11g_MCH_2437MHz_Ant1 (MIMO)_NTNV

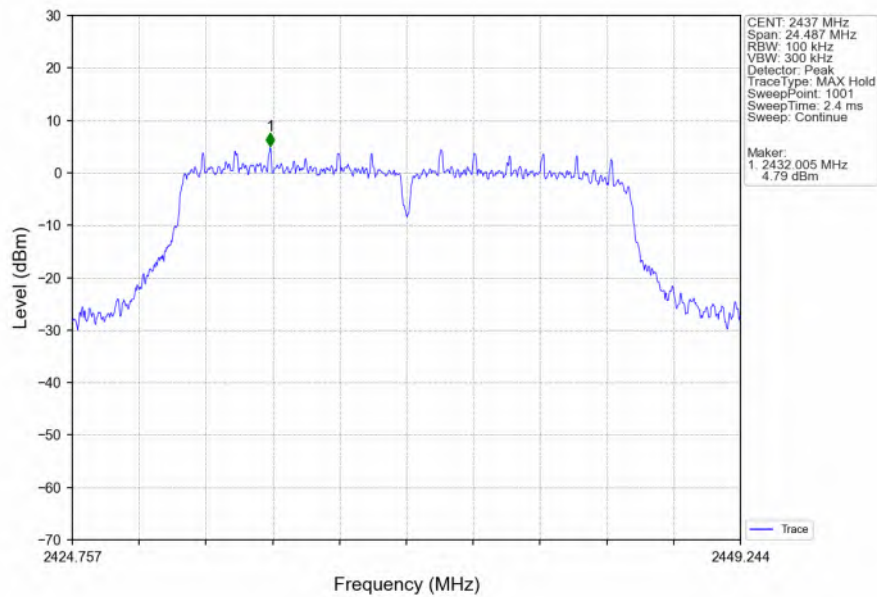


802.11g_HCH_2462MHz_Ant0 (MIMO)_NTNV

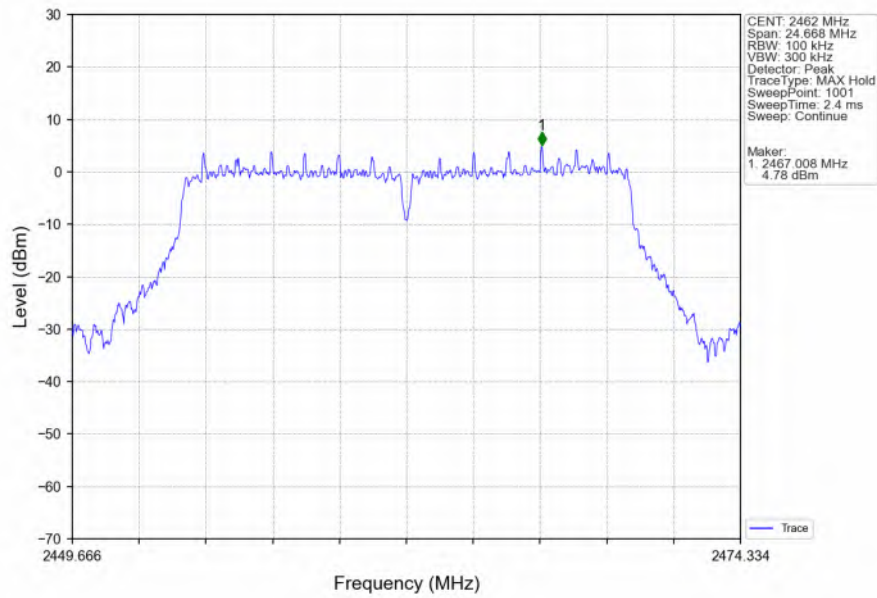


802.11g_HCH_2462MHz_Ant1 (MIMO)_NTNV

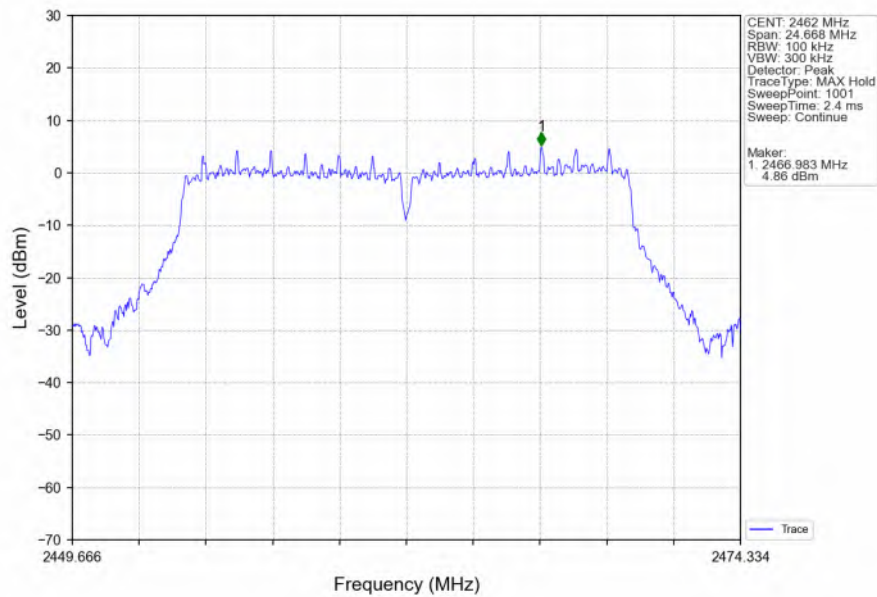


802.11be(EHT20)_LCH_2412MHz_SU_ / _Ant0 (MIMO)_NTNV

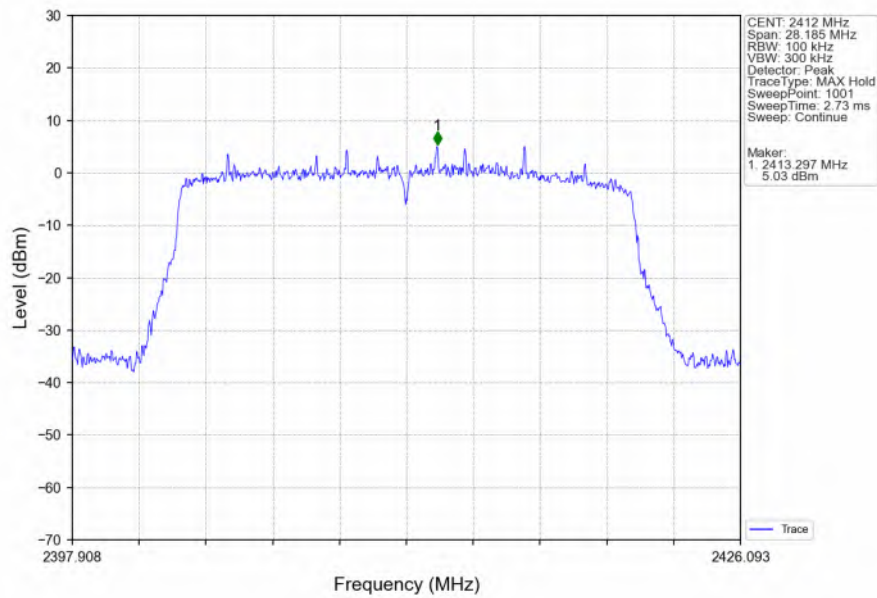


802.11be(EHT20)_LCH_2412MHz_SU_ / _Ant1 (MIMO)_NTNV

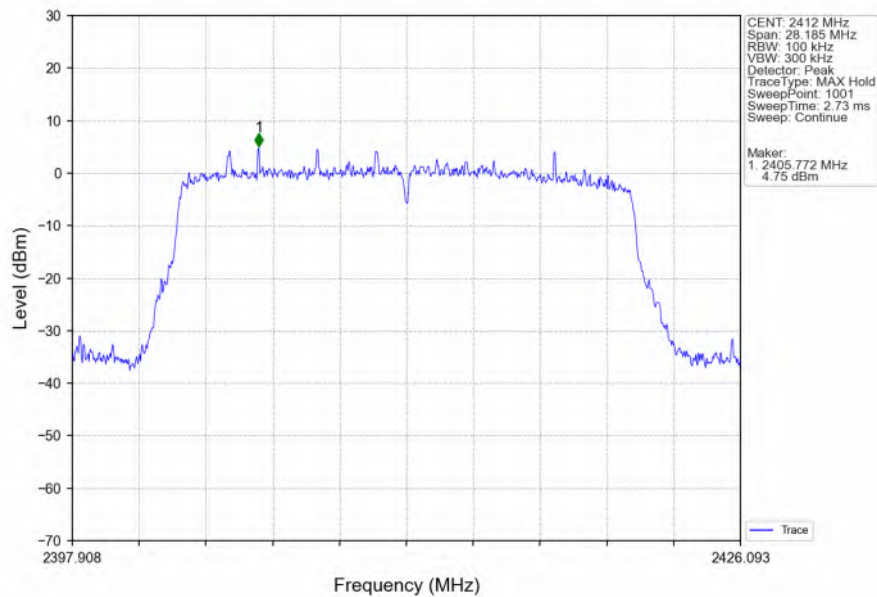


802.11be(EHT20)_MCH_2437MHz_SU_/_Ant0 (MIMO)_NTNV

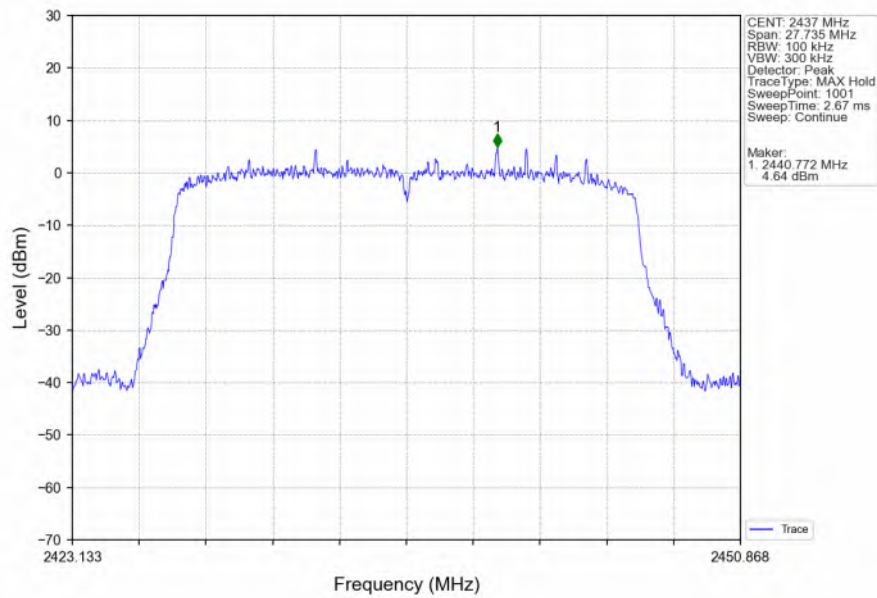


802.11be(EHT20)_MCH_2437MHz_SU_/_Ant1 (MIMO)_NTNV

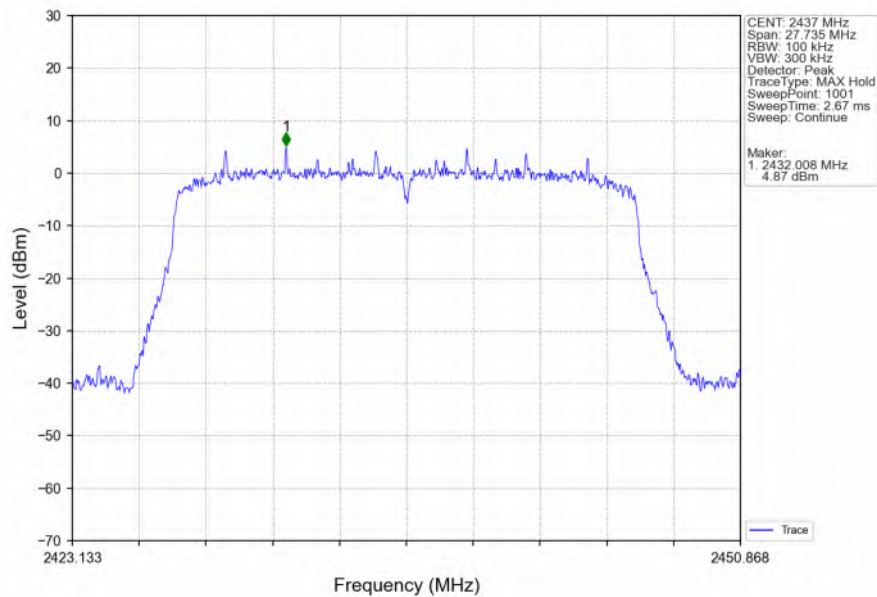


802.11be(EHT20)_HCH_2462MHz_SU_ / _Ant0 (MIMO)_NTNV

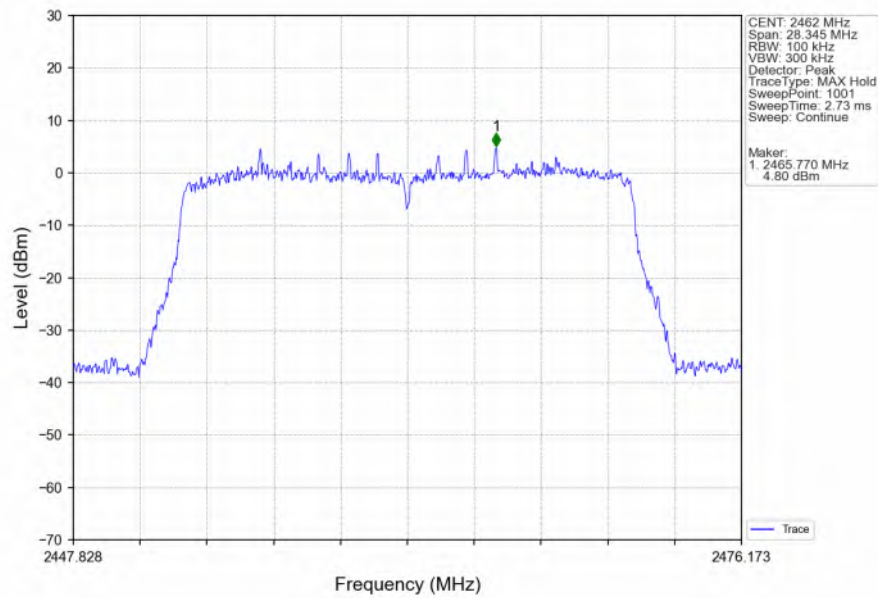


802.11be(EHT20)_HCH_2462MHz_SU_ / _Ant1 (MIMO)_NTNV

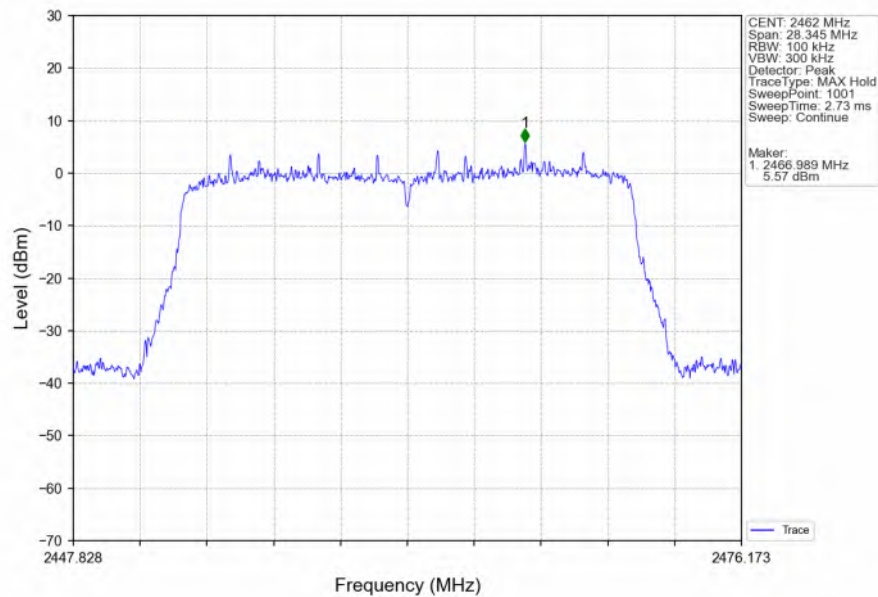


802.11be(EHT40)_LCH_2422MHz_SU_/_Ant0 (MIMO)_NTNV

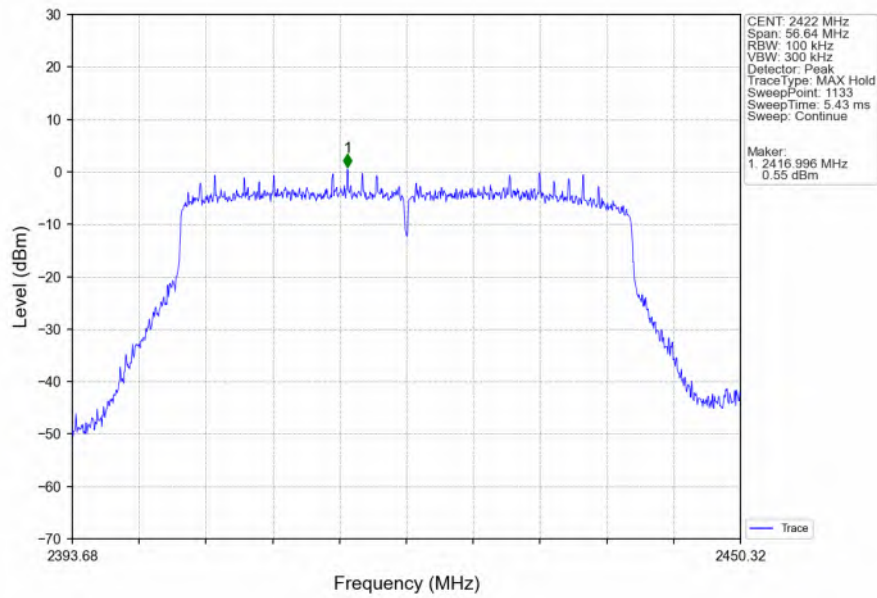


802.11be(EHT40)_LCH_2422MHz_SU_/_Ant1 (MIMO)_NTNV

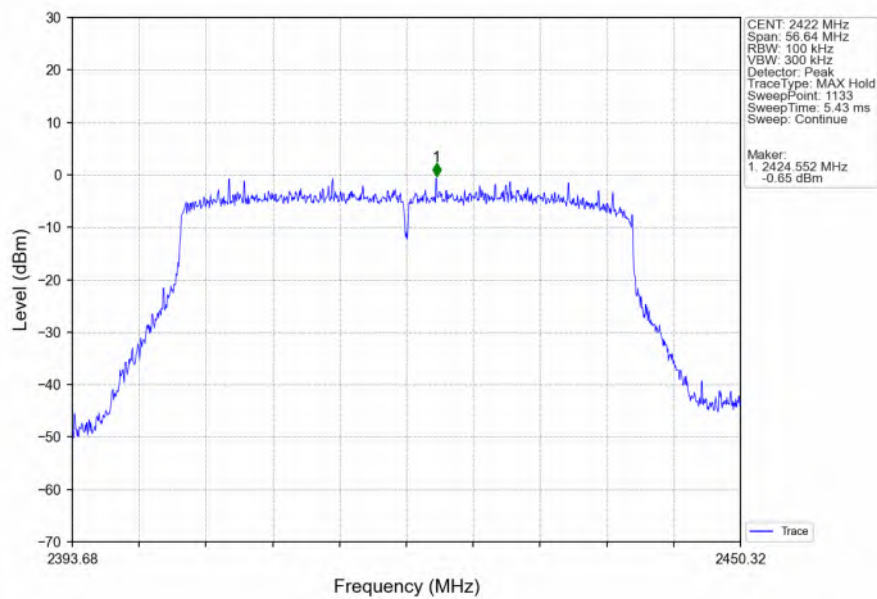


802.11be(EHT40)_MCH_2437MHz_SU_/_Ant0 (MIMO)_NTNV

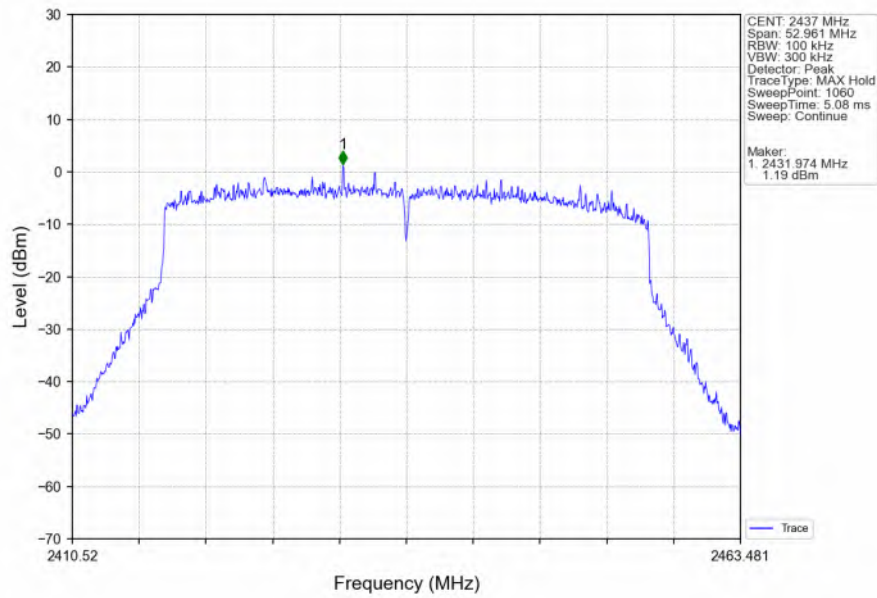


802.11be(EHT40)_MCH_2437MHz_SU_/_Ant1 (MIMO)_NTNV

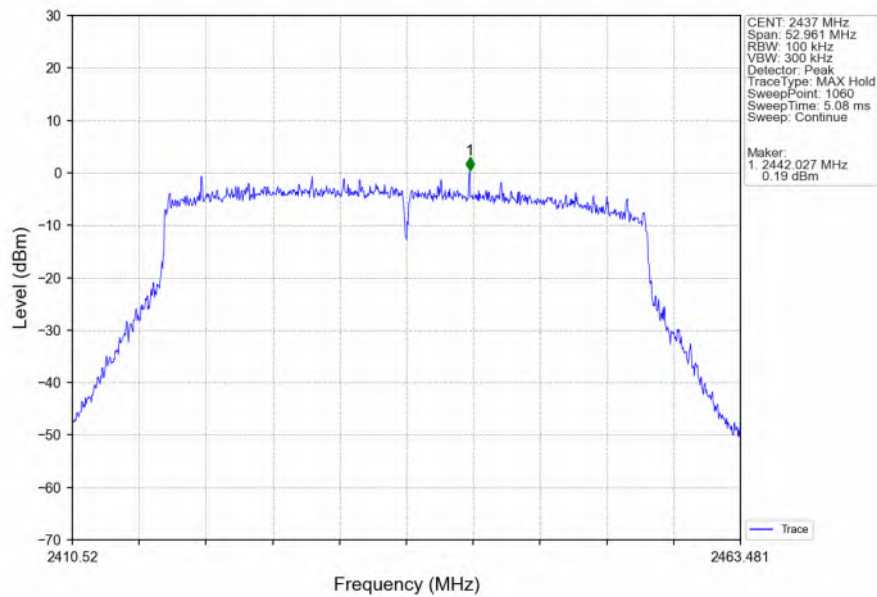

802.11be(EHT40)_HCH_2452MHz_SU_/_Ant0 (MIMO)_NTNV

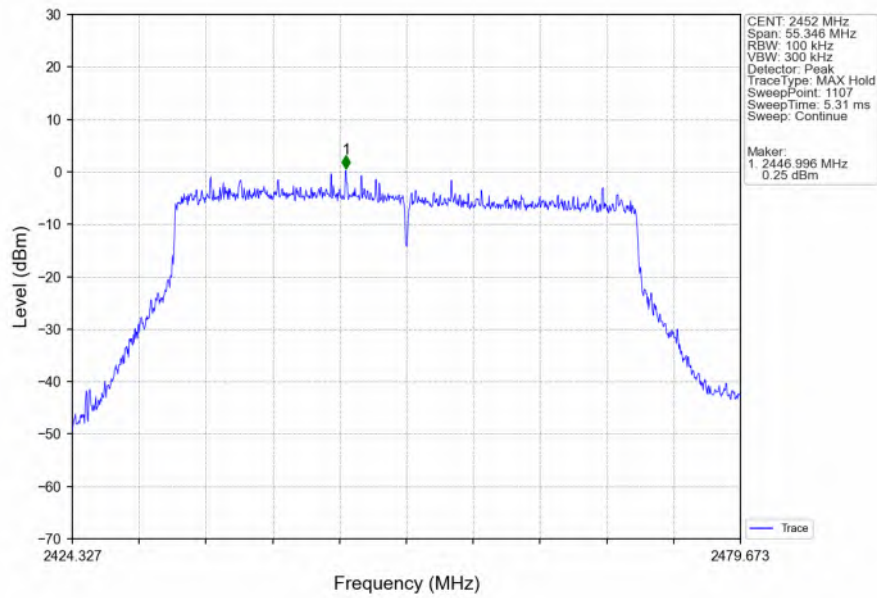


802.11be(EHT40)_HCH_2452MHz_SU_/_Ant1 (MIMO)_NTNV

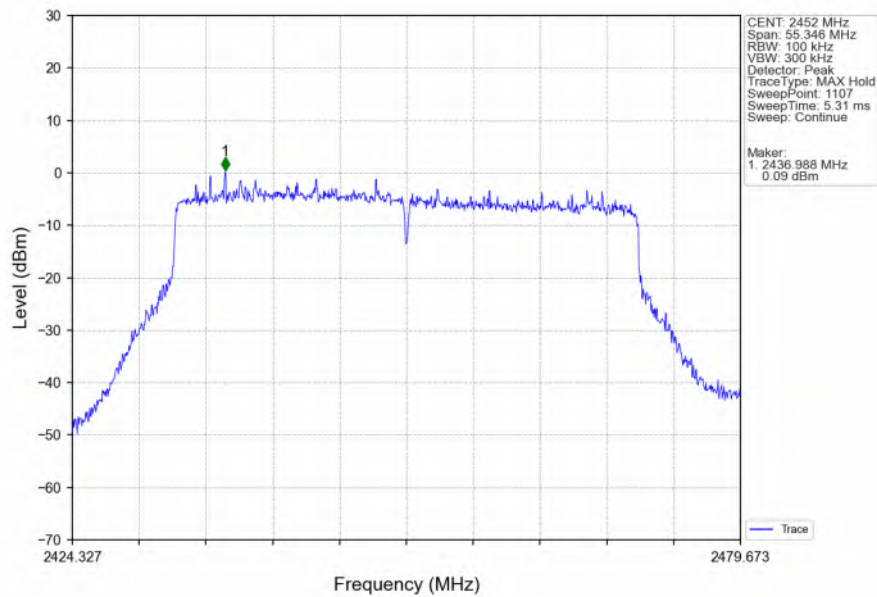


5.2.2 CSE


802.11b_LCH_2412MHz_Ant0 (MIMO)_NTNV

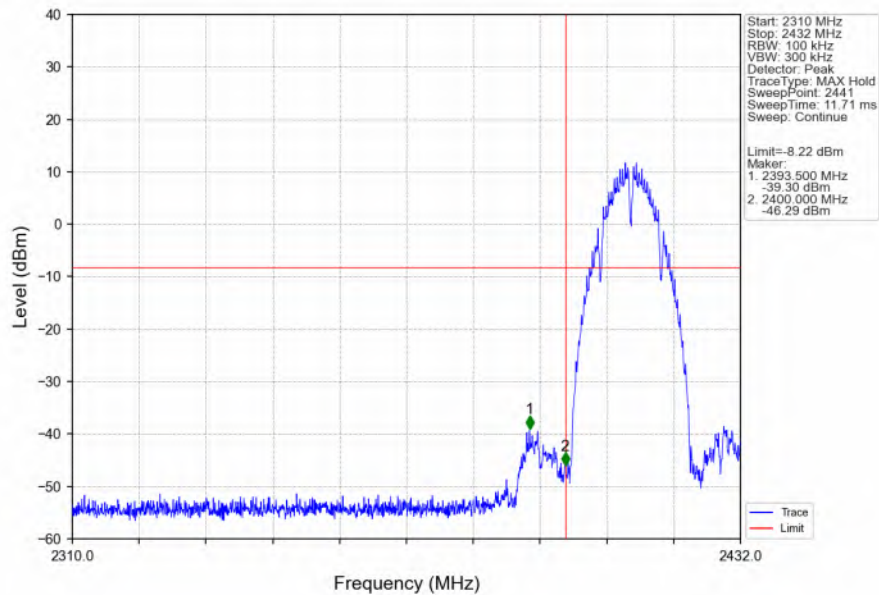


802.11b_LCH_2412MHz_Ant0 (MIMO)_NTNV

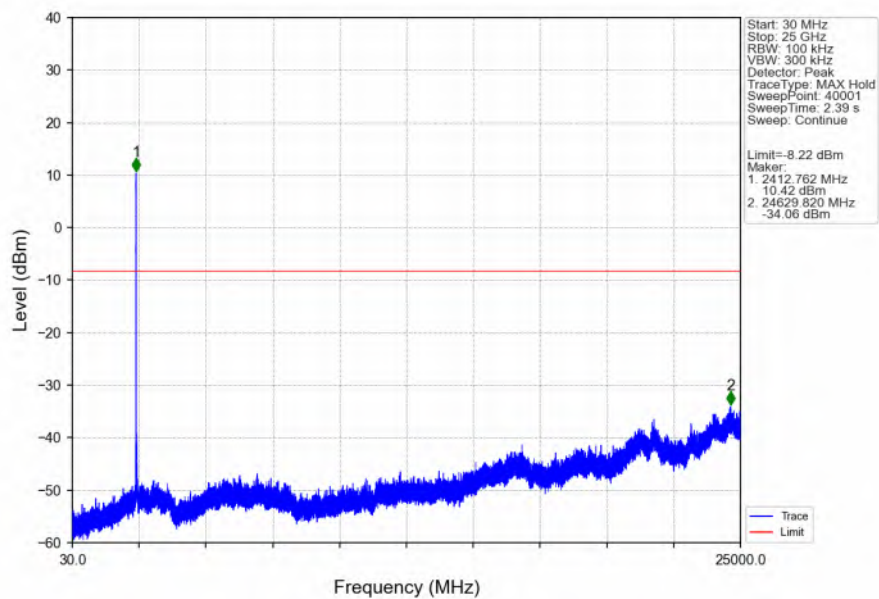


802.11b_LCH_2412MHz_Ant1 (MIMO)_NTNV

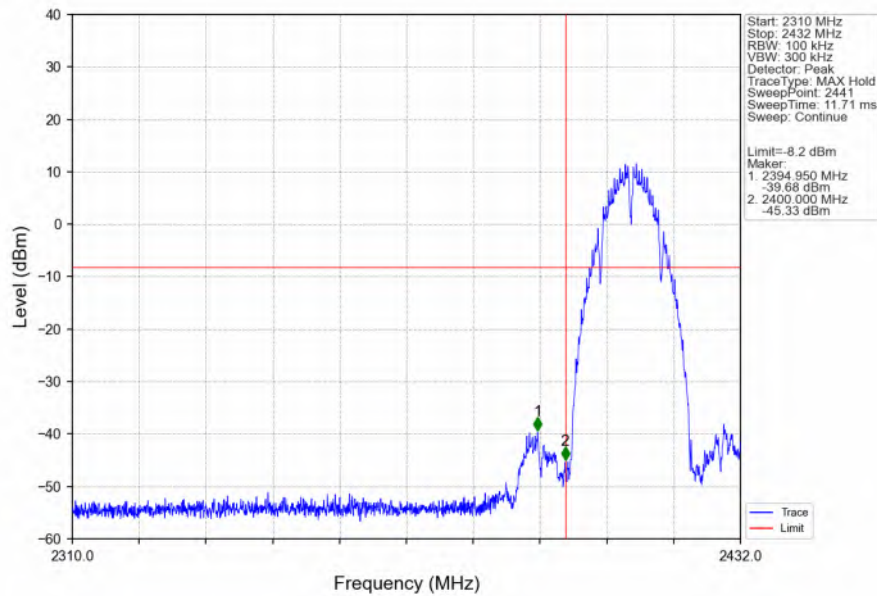

802.11b_LCH_2412MHz_Ant1 (MIMO)_NTNV

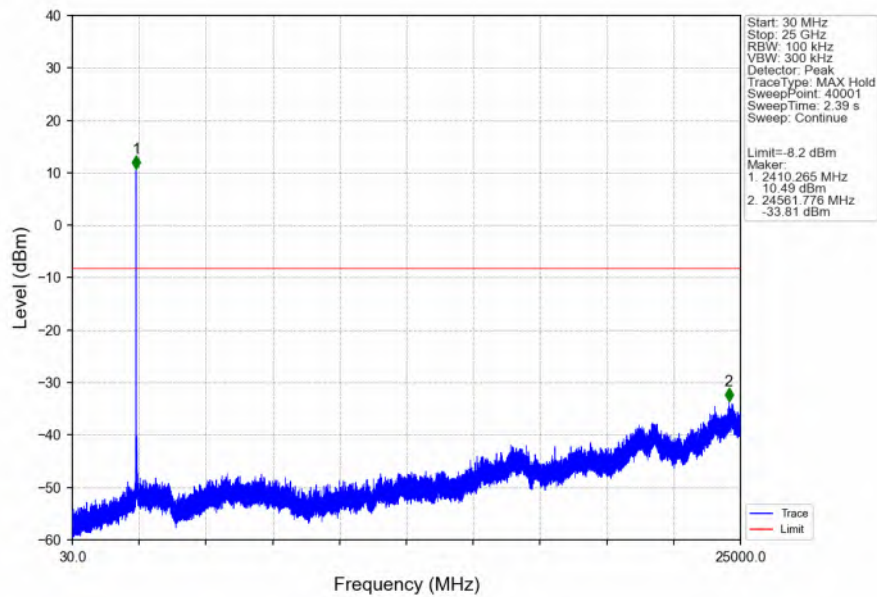

802.11b_MCH_2437MHz_Ant0 (MIMO)_NTNV

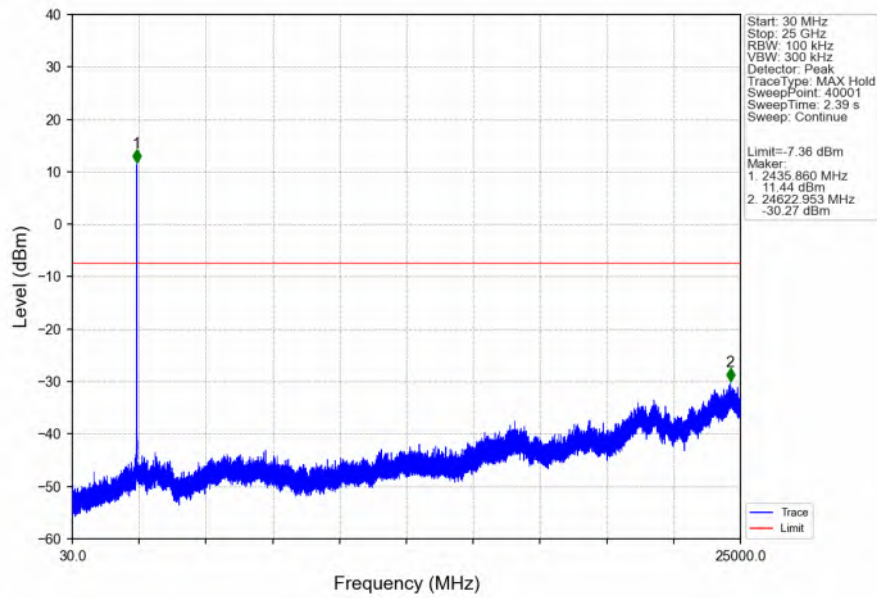

802.11b_MCH_2437MHz_Ant1 (MIMO)_NTNV

