



Report No.: SUCR260400030905

Page: 1 of 385

TEST REPORT

Application No.: SUCR2604000309MO
FCC ID: XMR2026FME172Q
Applicant: Quectel Wireless Solutions Co., Ltd.
Address of Applicant: No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China
Manufacturer: Quectel Wireless Solutions Co., Ltd.
Address of Manufacturer: No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China
Equipment Under Test (EUT):
EUT Name: Wi-Fi & Bluetooth Module
Model No.: FME172Q
Trade Mark: QUECTEL
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2026-04-03
Date of Test: 2026-06-09 to 2026-07-20
Date of Issue: 2026-07-20

Test Result:


Pass*

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Revision Record			
Version	Description	Date	Remark
00	Original	2026-07-20	/

Authorized for issue by:				
Prepared By				
		Nature_Shen/Project Engineer		
Approved By				
		Cedar Cheng /Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart E 15.407 (c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Radiated Emissions (Below 1GHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.10 (2020) Section 6.6 & 12.7	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5 & 12.7.2	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Duty Cycle		ANSI C63.10 (2020) Section 12.2	ANSI C63.10 (2020) Section 12.2	Pass
99% Bandwidth		ANSI C63.10 (2020) Section 12.5.3	ANSI C63.10 (2020) Section 12.5.3	Pass
26dB Emission Bandwidth		ANSI C63.10 (2020) Section 12.5.2	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Minimum 6 dB Bandwidth (5.725-5.85 GHz band)		ANSI C63.10 (2020) Section 12.5.1	47 CFR Part 15, Subpart E 15.407 (e)	Pass
Maximum Conducted Output Power		ANSI C63.10 (2020) Section 12.4	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Power Spectral Density		ANSI C63.10 (2020) Section 12.6	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Channel Move Time		KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass
Channel Closing Transmission Time		KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass

3 Contents

Page

1	COVER PAGE	1
2	Test Summary	3
3	Contents.....	4
4	General Information.....	5
4.1	Details of E.U.T.	5
4.2	Environment Parameter	6
4.3	Description of Support Units	6
4.4	Measurement Uncertainty & Decision Rule	7
4.5	Test Location	8
4.6	Test Facility	8
4.7	Deviation from Standards.....	8
4.8	Abnormalities from Standard Conditions.....	8
5	Equipment List	9
6	Radio Spectrum Technical Requirement.....	11
6.1	Antenna Requirement	11
6.2	Transmission in the Absence of Data	12
7	Radio Spectrum Matter Test Results	13
7.1	Radiated Emissions (Below 1GHz)	13
7.2	Radiated Emissions (Above 1GHz).....	18
7.3	Radiated Emissions which fall in the restricted bands	125
7.4	Duty Cycle	204
7.5	99% Bandwidth	205
7.6	26dB Emission Bandwidth.....	206
7.7	Minimum 6 dB Bandwidth (5.725-5.85 GHz band)	207
7.8	Maximum Conducted Output Power	208
7.9	Power Spectral Density	210
7.10	Channel Move Time	212
7.11	Channel Closing Transmission Time	214
8	Test Setup Photo	216
9	EUT Constructional Details (EUT Photos).....	216
10	Appendix.....	217

4 General Information

4.1 Details of E.U.T.

Software Version:	NA
Hardware Version:	R1.0
SN:	E1Y26A94M00005
Power supply:	3.3V
Operation Frequency/Number of channels (20MHz):	U-NII-1: 5180-5240MHz (4 Channels); U-NII-2A: 5260-5320MHz (4 Channels); U-NII-2C: 5500-5720MHz (12 Channels); U-NII-3: 5745-5825MHz (5 Channels)
Operation Frequency/Number of channels/(40MHz):	U-NII-1: 5190-5230MHz (2 Channels); U-NII-2A: 5270-5310MHz (2 Channels); U-NII-2C: 5510-5710MHz (6 Channels); U-NII-3: 5755-5795MHz (2 Channels)
Operation Frequency/Number of channels (80MHz):	U-NII-1: 5210MHz (1 Channel); U-NII-2A: 5290MHz (1 Channels); U-NII-2C: 5530-5690MHz (3 Channels); U-NII-3: 5775MHz (1 Channel)
Operation Frequency/Number of channels (160MHz):	U-NII-1&2A: 5250MHz (1 Channel); U-NII-2C: 5570MHz (1 Channels)
Modulation Type:	802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM); 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024-QAM); 802.11be: OFDMA with enhancements (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024-QAM, 4096-QAM)
Channel Spacing:	802.11a/n/ac/ax/be 20: 20MHz; 802.11n/ac/ax/be 40: 40MHz; 802.11ac/ax/be 80: 80MHz; 802.11ac/ax/be 160: 160MHz
DFS Function:	Slave without Radar detection
TPC Function:	Support TPC function
Antenna Type:	Dipole Antenna
Antenna Gain:	U-NII-1: -0.70dBi(Ant0); -0.70dBi(Ant1) (Provided by the manufacturer) U-NII-2A: -0.80dBi(Ant0); -0.80dBi(Ant1) (Provided by the manufacturer) U-NII-2C: -1.20dBi(Ant0); -1.20dBi(Ant1) (Provided by the manufacturer) U-NII-3: -1.50dBi(Ant0); -1.50dBi(Ant1) (Provided by the manufacturer)
Antenna Number:	2
Note: - For 802.11n/ac/ax/be modes, all test items were evaluated only for 802.11be under the operating condition with higher output power. - The device operates across UNII 2C and UNII 3 bands on channels 138, 142 and 144. All test items shall be performed in accordance with the stricter regulatory limits applicable to the two bands to ensure full compliance with both UNII 2C and UNII 3 requirements.	



Report No.: SUCR260400030905

Page: 6 of 385

4.2 Environment Parameter

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	25	3.3
Note: NV:Normal Voltage LV:Low Extreme Test Voltage HV:High Extreme Test Voltage NT:Normal Temperature LT:Low Extreme Test Temperature HT:High Extreme Test Temperature		

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Computer	Lenovo	T14	2YK6GR
Mouse	Lenovo	3D optical Mouse	N/A
Router	Smauwave Technology Co.,Ltd	SRT 421	RT421X02211300001

4.4 Measurement Uncertainty & Decision Rule

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	Conduction emission	$\pm 3.0\text{dB}$ (150kHz to 30MHz)
5	RF conducted power	$\pm 0.75\text{dB}$
6	RF power density	$\pm 2.84\text{dB}$
7	Conducted Spurious emissions	$\pm 0.75\text{dB}$
8	RF Radiated power	$\pm 1.56\text{dB}$ (9KHz-30MHz)
		$\pm 4.80\text{dB}$ (30MHz-1GHz)
		$\pm 4.80\text{dB}$ (1GHz-18GHz)
		$\pm 4.80\text{dB}$ (18GHz-40GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1\%$
12	Time	$\pm 3\%$
Remark: The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.		

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)
Pilot Free Trade Zone

No tests were sub-contracted.

Note:

1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).

2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).

3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 6336.01)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.is accredited by the American Association for Laboratory Accreditation (A2LA).

• **FCC (Designation Number: CN1312)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized as an accredited testing laboratory. Test Firm Registration Number:717327

• **ISED (CAB Identifier: CN0120)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 27594

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
RF Conducted Test						
1	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/14/2026	1/13/2027
2	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-15	11/21/2025	11/20/2026
3	MXG Vector signal genitor	KEYSIGHT	N5182B	SUWI-01-38-01	1/14/2026	1/13/2027
4	Signal Generator	ROHDE&SCHWARZ	SMW200A	SUWI-01-07-08	1/14/2026	1/13/2027
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-08-01	1/14/2026	1/13/2027
6	MXG Vector Signal Generator	ROHDE&SCHWARZ	SMR20	SUWI-01-33-01	11/21/2025	11/20/2026
7	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-13	4/22/2026	4/21/2027
8	Wideband Radio Communication Test Station	Anritsu	MT8000A	SUWI-01-34-02	11/21/2025	11/20/2026
9	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	11/21/2025	11/20/2026
10	Power meter	Anritsu	ML2495A	SUWI-01-31-01	11/21/2025	11/20/2026
11	Pulse power sensor	Anritsu	MA2411B	SUWI-01-32-01	11/21/2025	11/20/2026
12	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/14/2026	1/13/2027
13	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2/11/2026	2/10/2027
14	Temperature Chamber	GIANT FORCE	ICT-017-40-SP-SD	SUWI-01-13-02	5/7/2026	5/6/2027
15	Measurement Software	TST	TST 272 V2.02	SUWI-03-55-03	NCR	NCR
16	RF Control unit	TST	TSCB3023R2	SUWI-02-20-01	NCR	NCR
17	RFCables	Tonscend	NA	SUWI-01-03-01	1/15/2026	1/14/2027
RF Radiated Test						
1	Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/9/2026	6/8/2029
2	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/14/2026	1/13/2027
3	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	11/20/2025	11/19/2026
4	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/14/2026	1/13/2027
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-18-01	1/14/2026	1/13/2027
6	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9168	SUWI-01-11-04	11/29/2025	11/28/2027
7	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/7/2025	5/6/2027
8	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/7/2025	5/6/2027
9	Active Loop Antenna	SCHWRZBECK MESS-ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/7/2025	5/6/2027
10	Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	1/14/2026	1/13/2027
11	Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	1/14/2026	1/13/2027

12	Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	1/14/2026	1/13/2027
13	Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	8/25/2025	8/24/2026
14	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	8/25/2025	8/24/2026
15	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	8/26/2025	8/25/2026
16	Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-06	11/21/2025	11/20/2026
17	Signal Generator	ROHDE&SCHWARZ	SMB100A	SUWI-01-08-01	1/14/2026	1/13/2027
18	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/14/2026	1/13/2027
19	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/11/2026	2/10/2027
20	Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-06	NCR	NCR
21	RF Control unit	Tonscend	JS0806-1	SUWI-02-20-01	NCR	NCR
22	RFCables	Tonscend	NA	SUWI-01-03-02	NCR	NCR

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna are Dipole Antenna and no consideration of replacement. The best case gain of the 5150 MHz to 5850 MHz:

Operation Frequency	ANT0 Gain (dBi)	ANT1 Gain (dBi)	Directional gain For Power (dBi)	Directional gain For PSD (dBi)	Power Limit Reduction (dBm)	PSD Limit Reduction (dBm)
5150 MHz to 5250 MHz	-0.70	-0.70	-0.70	2.31	0	0
5250 MHz to 5350 MHz	-0.80	-0.80	-0.80	2.21	0	0
5470 MHz to 5725 MHz	-1.20	-1.20	-1.20	1.81	0	0
5725 MHz to 5850 MHz	-1.50	-1.50	-1.50	1.51	0	0

6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (c)

6.2.2 Conclusion

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.

7 Radio Spectrum Matter Test Results

7.1 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

Note

1.The above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

2. At frequencies below 1GHz, measurements may be performed at a distance different to specified in the regulations.

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Below 30MHz, Aux Factor = 40 dB/decade of distance, the aux factor is $40\log(3/300) = -80\text{dB}$ (for 3m test distance).

EX. Above 30MHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(10/3) = 10.46\text{dB}$ (for 10m test distance).

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C

Humidity: 42 % RH


Atmospheric Pressure: 1001 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Pre-scan	08	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have

		been tested, Only the data of worst case is recorded in the report.
Pre-scan	09	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Pre-scan	10	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

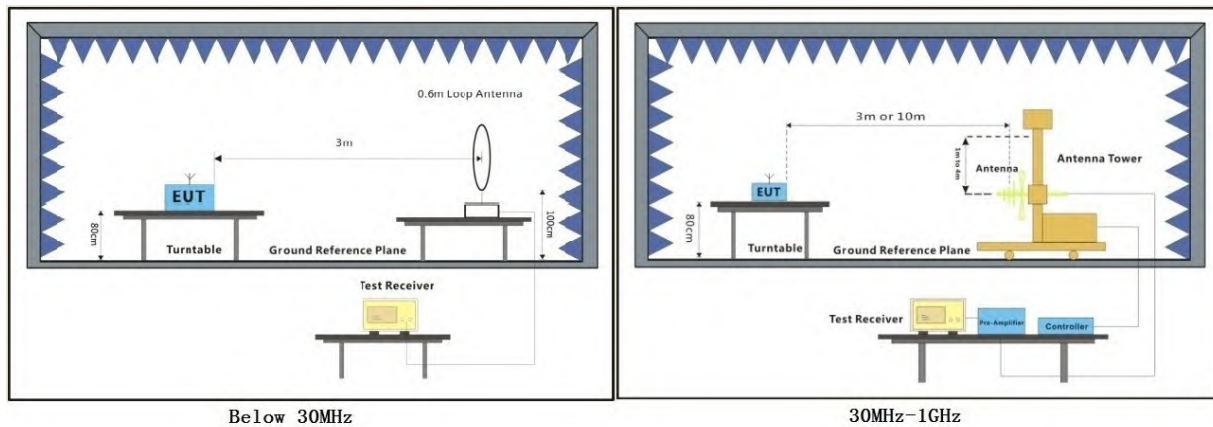

7.1.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8m above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3m or 10m away from the interference-receiving antenna, which was mounted on the variable-height antenna tower.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1m) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. At frequencies below 1GHz, measurements may be performed at a distance different to specified in the regulations.

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.


EX. Below 30MHz, Aux Factor = 40 dB/decade of distance, the aux factor is $40\log(3/300) = -80\text{dB}$ (for 3m test distance).

EX. Above 30MHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(10/3) = 10.46\text{dB}$ (for 10m test distance).

2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the worst-case test curve is displayed.


Test Mode: 07; Polarity: Horizontal

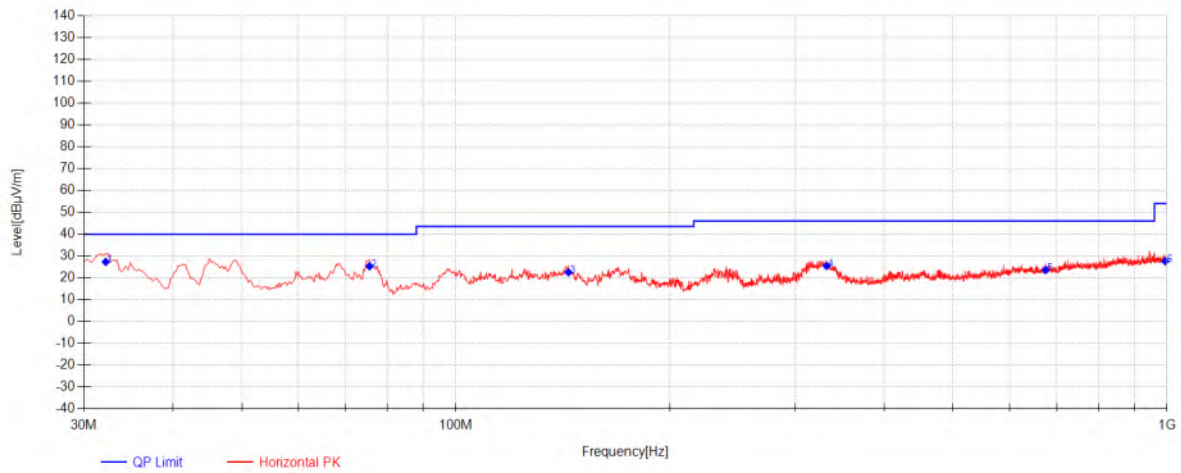

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	32.1825	51.11	-42.29	18.46	27.28	40.00	12.72	Horizontal
2	75.59	50.85	-41.72	16.13	25.26	40.00	14.74	Horizontal
3	143.975	44.21	-40.89	19.21	22.52	43.50	20.98	Horizontal
4	332.155	45.23	-39.77	19.96	25.42	46.00	20.58	Horizontal
5	674.8075	34.59	-37.76	26.72	23.55	46.00	22.45	Horizontal
6	993.9375	33.27	-35.69	30.02	27.60	54.00	26.40	Horizontal

Test Mode: 07; Polarity: Vertical

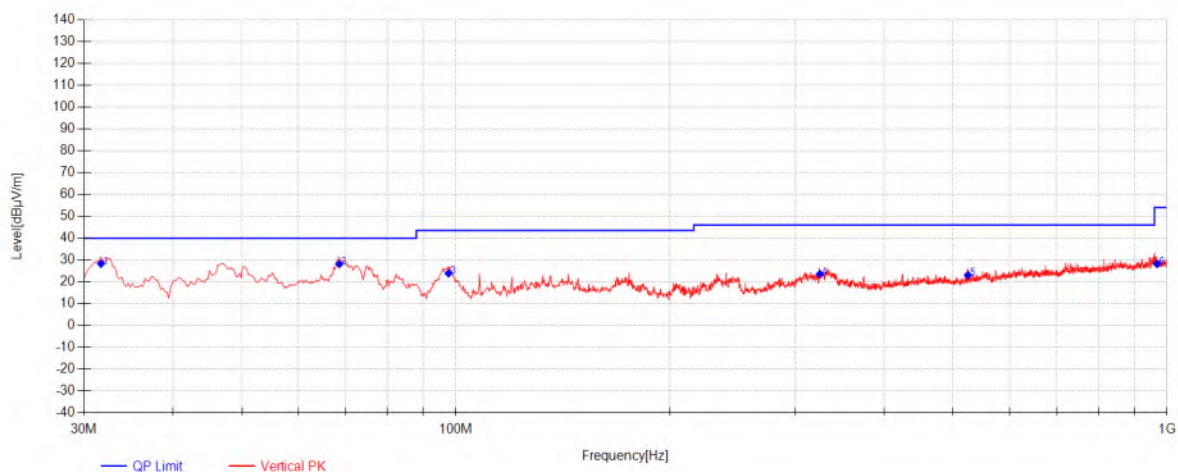

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	31.6975	52.13	-42.30	18.44	28.27	40.00	11.73	Vertical
2	68.5575	52.01	-41.85	17.99	28.14	40.00	11.86	Vertical
3	97.6575	50.48	-41.43	14.85	23.90	43.50	19.60	Vertical
4	324.88	43.61	-39.79	19.67	23.49	46.00	22.51	Vertical
5	524.9425	37.41	-38.47	24.06	23.00	46.00	23.00	Vertical
6	967.7475	34.26	-35.62	29.54	28.18	54.00	25.82	Vertical

7.2 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2020) Section 6.6 & 12.7

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark:

1. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

2. Above 18GHz, measurements may be performed at a distance shorter than that specified in the regulations

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Above 18GHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(1/3) = -9.54\text{dB}$ (for 1m test distance).

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

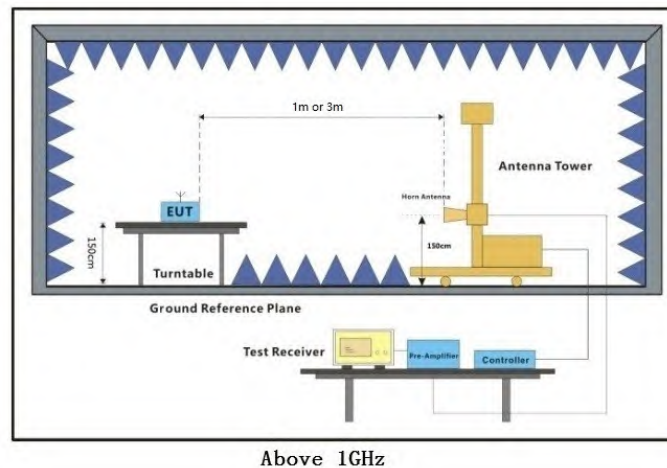


7.2.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 40GHz, The points marked on below plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the below harmonics were the highest point could be found when testing, so only the below harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
7. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle<98%) or 10Hz (Duty cycle $\geq$ 98%) for Average detection (AV) at frequency above 1GHz.

11a_TX_CH_36_Horizontal

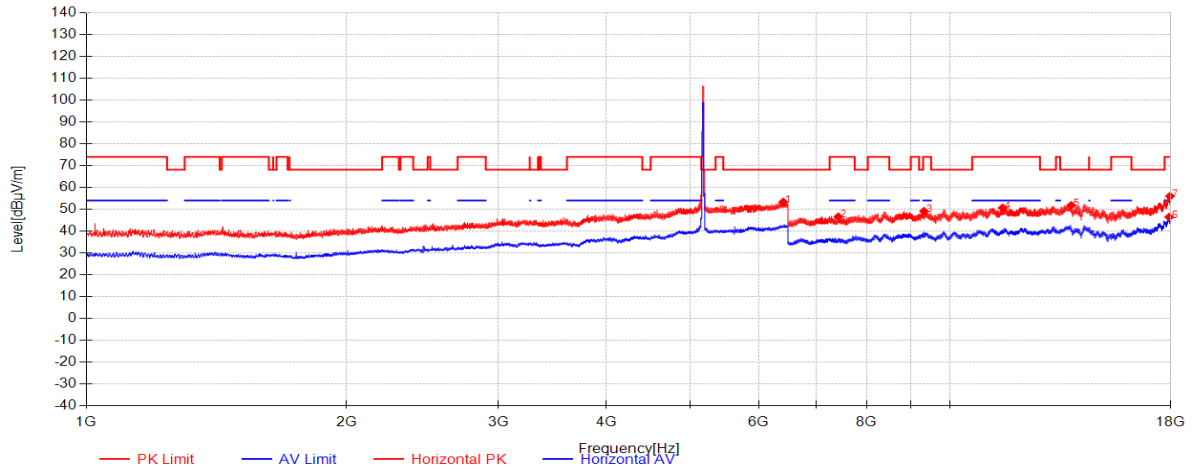


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6405.2308	37.60	35.11	-19.35	53.36	68.20	14.84	Horizontal
2	7417.125	54.27	36.50	-44.21	46.56	74.00	27.44	Horizontal
3	9321.8125	52.10	38.36	-41.31	49.15	74.00	24.85	Horizontal
4	11492.9167	48.92	38.91	-37.18	50.65	74.00	23.35	Horizontal
5	13798.1875	48.72	39.90	-36.78	51.84	68.20	16.36	Horizontal
6	17914.7083	38.83	42.67	-35.07	46.44	54.00	7.56	Horizontal
7	17954	48.21	42.87	-35.06	56.02	74.00	17.98	Horizontal

11a_TX_CH_36_Vertical

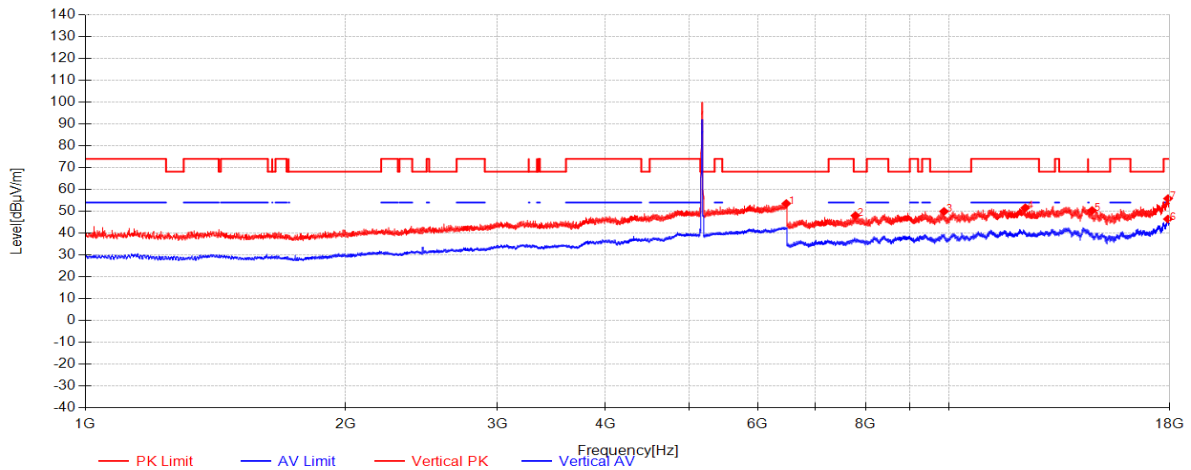


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6475.8846	37.62	35.20	-19.24	53.58	68.20	14.62	Vertical
2	7785.6042	54.53	36.73	-43.23	48.03	68.20	20.17	Vertical
3	9857.5208	51.37	38.15	-39.58	49.95	68.20	18.25	Vertical
4	12242.3333	49.69	39.03	-37.13	51.59	74.00	22.41	Vertical
5	14626.6667	47.63	39.70	-36.96	50.37	68.20	17.83	Vertical
6	17904.6458	38.91	42.62	-35.07	46.46	54.00	7.54	Vertical
7	17911.8333	48.25	42.66	-35.07	55.84	74.00	18.16	Vertical

11a_TX_CH_40_Horizontal

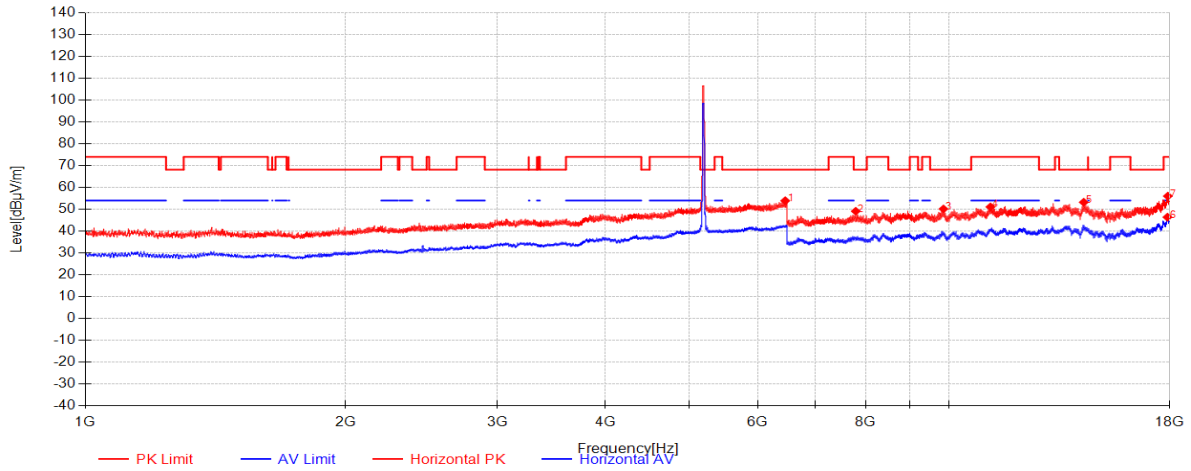


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6456.4231	38.01	35.20	-19.27	53.94	68.20	14.26	Horizontal
2	7791.8333	55.65	36.72	-43.24	49.13	68.20	19.07	Horizontal
3	9844.1042	51.43	38.20	-39.45	50.18	68.20	18.02	Horizontal
4	11157.5	49.56	38.97	-37.42	51.11	74.00	22.89	Horizontal
5	14307.5417	49.08	39.98	-35.82	53.24	68.20	14.96	Horizontal
6	17882.6042	39.31	42.48	-35.38	46.41	54.00	7.59	Horizontal
7	17900.3333	48.54	42.60	-35.07	56.07	74.00	17.93	Horizontal

11a_TX_CH_40_Vertical

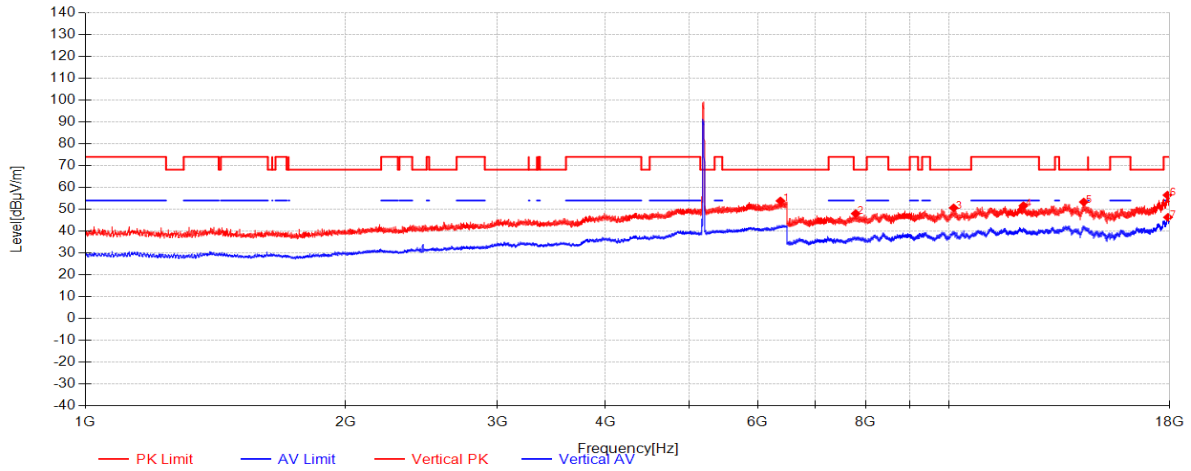


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6376.0385	38.33	34.86	-19.33	53.86	68.20	14.34	Vertical
2	7791.3542	54.56	36.72	-43.24	48.04	68.20	20.16	Vertical
3	10114.3542	50.94	38.56	-38.84	50.66	68.20	17.54	Vertical
4	12181	49.28	39.16	-36.82	51.62	74.00	22.38	Vertical
5	14307.0625	49.19	39.99	-35.82	53.36	68.20	14.84	Vertical
6	17879.25	49.51	42.45	-35.44	56.52	74.00	17.48	Vertical
7	17905.6042	38.77	42.63	-35.07	46.33	54.00	7.67	Vertical

11a_TX_CH_48_Horizontal

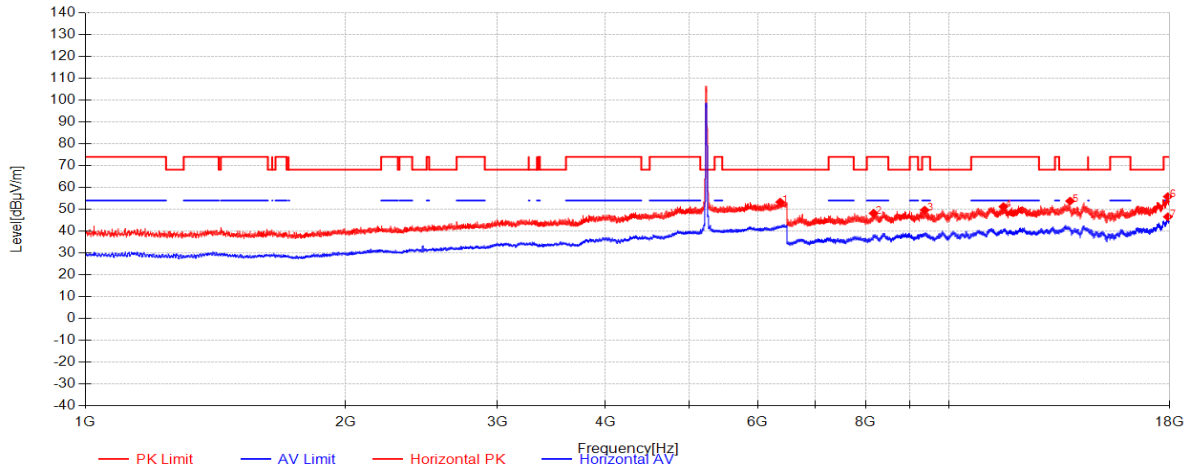


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6372.2308	37.82	34.82	-19.32	53.32	68.20	14.88	Horizontal
2	8172.7708	53.50	37.07	-42.39	48.18	74.00	25.82	Horizontal
3	9363.5	52.48	38.27	-41.11	49.64	74.00	24.36	Horizontal
4	11548.9792	49.12	38.90	-36.80	51.22	74.00	22.78	Horizontal
5	13795.3125	50.65	39.90	-36.78	53.78	68.20	14.42	Horizontal
6	17896.9792	48.39	42.58	-35.12	55.84	74.00	18.16	Horizontal
7	17902.25	39.04	42.61	-35.07	46.58	54.00	7.42	Horizontal

11a_TX_CH_48_Vertical

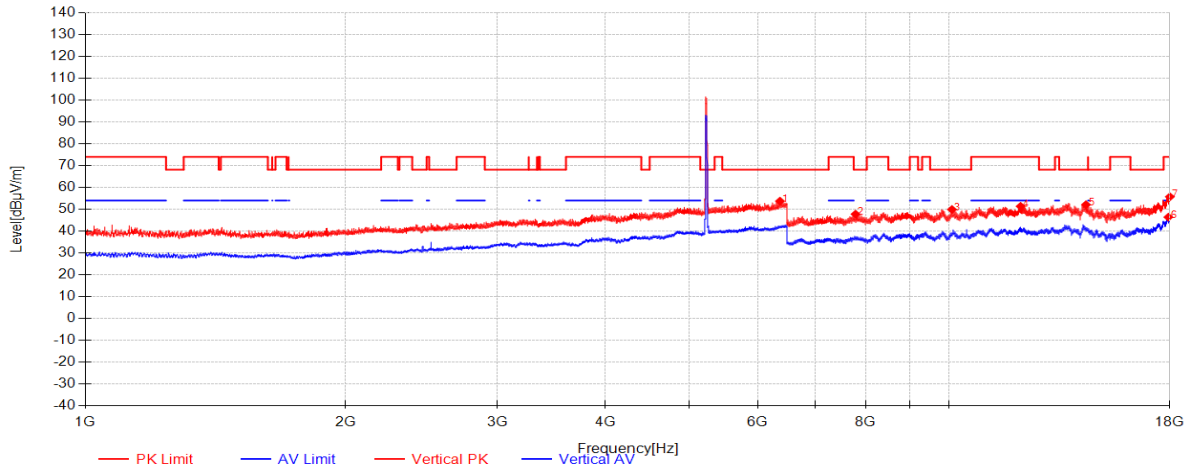


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6367.5769	38.29	34.78	-19.31	53.75	68.20	14.45	Vertical
2	7787.0417	54.28	36.73	-43.23	47.78	68.20	20.42	Vertical
3	10068.3542	51.16	38.51	-39.74	49.92	68.20	18.28	Vertical
4	12091.3958	49.08	38.98	-36.69	51.37	74.00	22.63	Vertical
5	14391.875	48.73	39.82	-36.42	52.12	68.20	16.08	Vertical
6	17925.25	38.76	42.73	-35.07	46.42	54.00	7.58	Vertical
7	17997.6042	47.74	43.09	-35.06	55.77	74.00	18.23	Vertical

11a_TX_CH_52_Horizontal

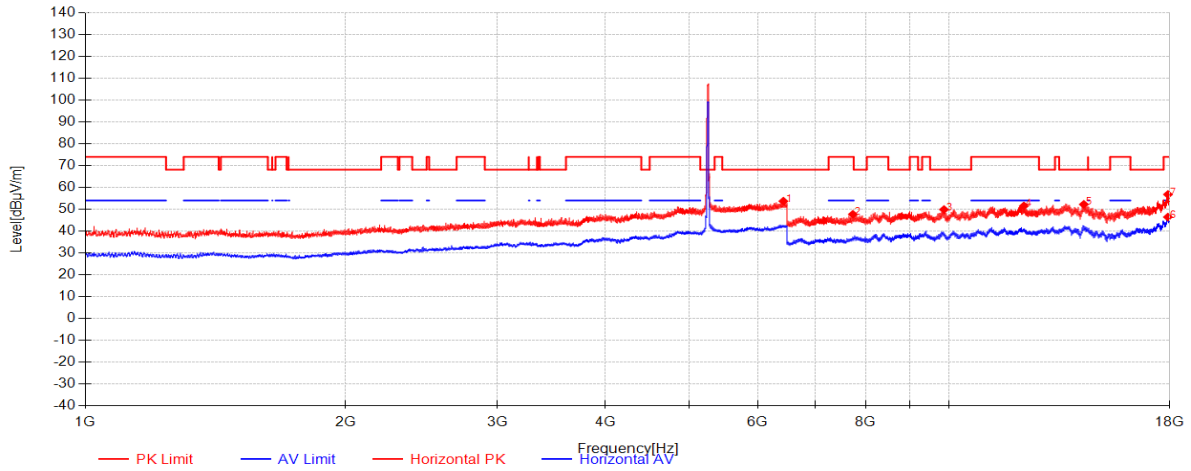


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6425.5385	37.88	35.15	-19.32	53.71	68.20	14.49	Horizontal
2	7733.375	54.10	36.77	-43.15	47.72	74.00	26.28	Horizontal
3	9858	51.33	38.15	-39.58	49.90	68.20	18.30	Horizontal
4	12196.8125	49.22	39.19	-36.87	51.54	74.00	22.46	Horizontal
5	14308.0208	48.09	39.98	-35.83	52.25	68.20	15.95	Horizontal
6	17901.2917	38.92	42.61	-35.07	46.46	54.00	7.54	Horizontal
7	17905.125	49.25	42.63	-35.07	56.81	74.00	17.19	Horizontal

11a_TX_CH_52_Vertical

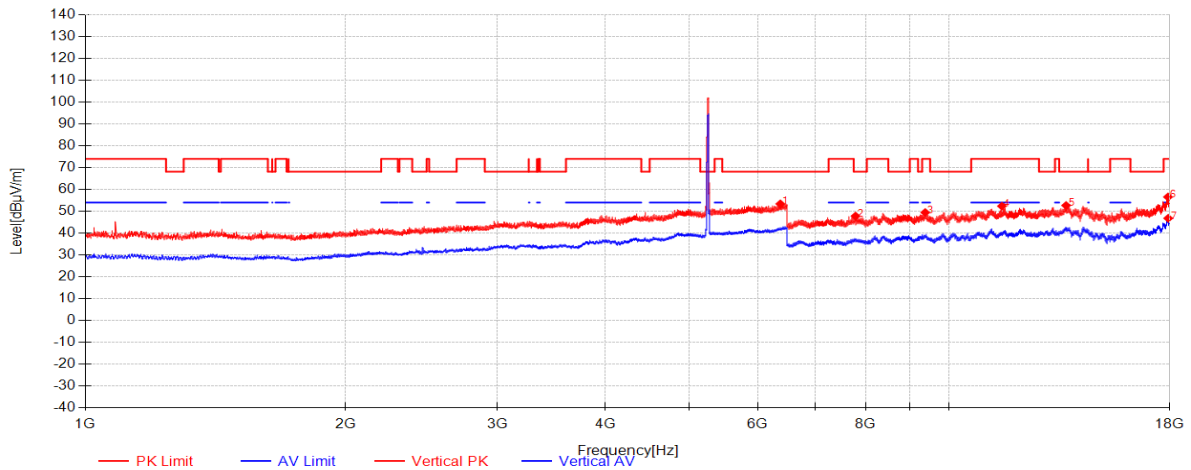


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6373.5	37.89	34.83	-19.32	53.40	68.20	14.80	Vertical
2	7788	54.33	36.72	-43.23	47.82	68.20	20.38	Vertical
3	9376.4375	52.26	38.25	-41.05	49.46	74.00	24.54	Vertical
4	11502.9792	50.50	38.90	-37.03	52.37	74.00	21.63	Vertical
5	13648.6875	49.16	39.95	-36.42	52.69	68.20	15.51	Vertical
6	17906.5625	49.02	42.63	-35.07	56.58	74.00	17.42	Vertical
7	17919.9792	39.19	42.70	-35.07	46.82	54.00	7.18	Vertical

11a_TX_CH_60_Horizontal

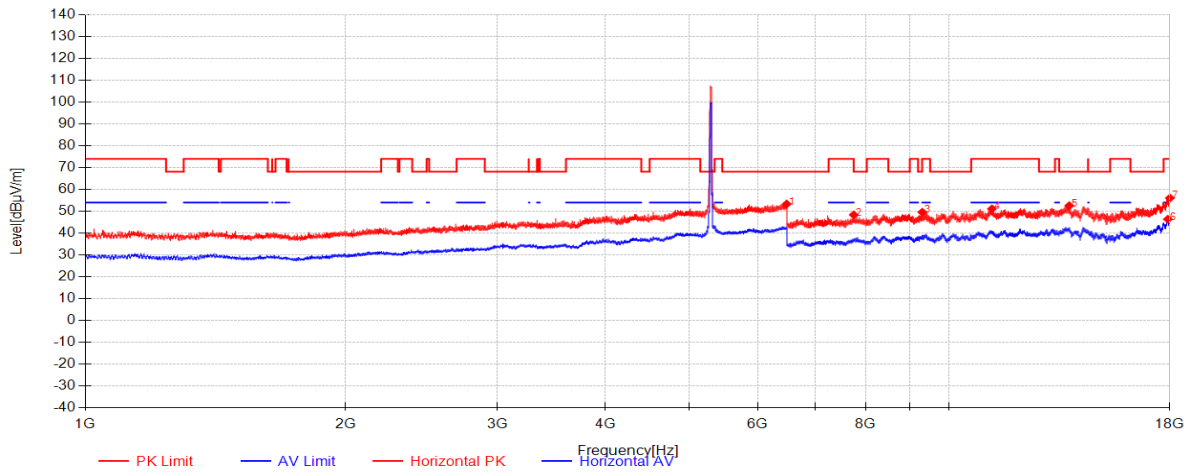


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6482.2308	37.39	35.20	-19.23	53.36	68.20	14.84	Horizontal
2	7750.625	54.77	36.80	-43.18	48.39	68.20	19.81	Horizontal
3	9305.0417	52.61	38.39	-41.39	49.61	74.00	24.39	Horizontal
4	11201.5833	48.92	38.80	-36.57	51.15	74.00	22.85	Horizontal
5	13764.1667	49.42	39.94	-36.77	52.58	68.20	15.62	Horizontal
6	17898.8958	38.87	42.59	-35.09	46.37	54.00	7.63	Horizontal
7	17997.6042	48.08	43.09	-35.06	56.11	74.00	17.89	Horizontal

11a_TX_CH_60_Vertical

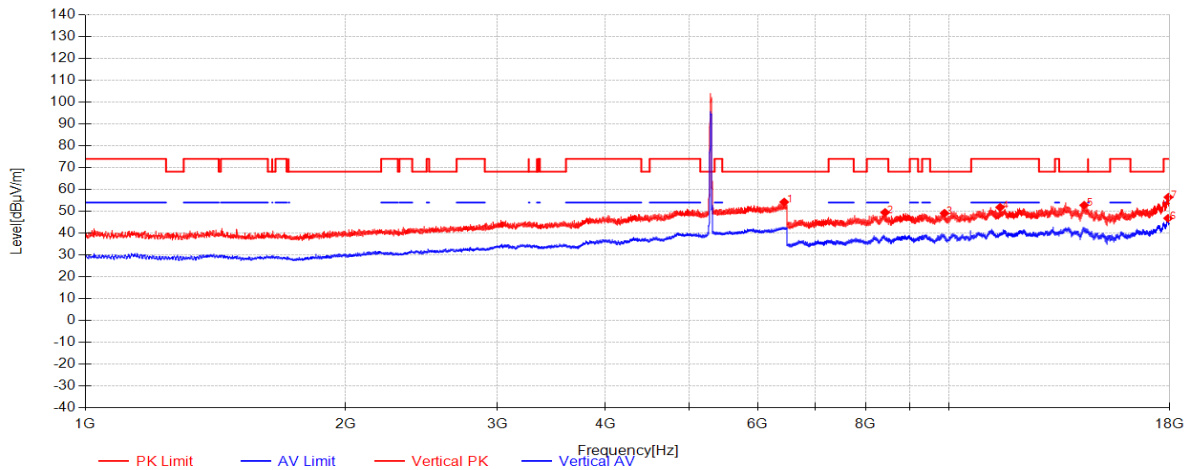


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6439.5	38.38	35.18	-19.30	54.26	68.20	13.94	Vertical
2	8425.7708	53.82	37.36	-41.70	49.48	74.00	24.52	Vertical
3	9870.4583	50.75	38.08	-39.71	49.12	68.20	19.08	Vertical
4	11447.875	50.84	39.00	-38.00	51.84	74.00	22.16	Vertical
5	14320.9583	48.76	39.96	-35.92	52.80	68.20	15.40	Vertical
6	17911.8333	39.21	42.66	-35.07	46.80	54.00	7.20	Vertical
7	17926.6875	48.80	42.73	-35.07	56.47	74.00	17.53	Vertical

11a_TX_CH_64_Horizontal

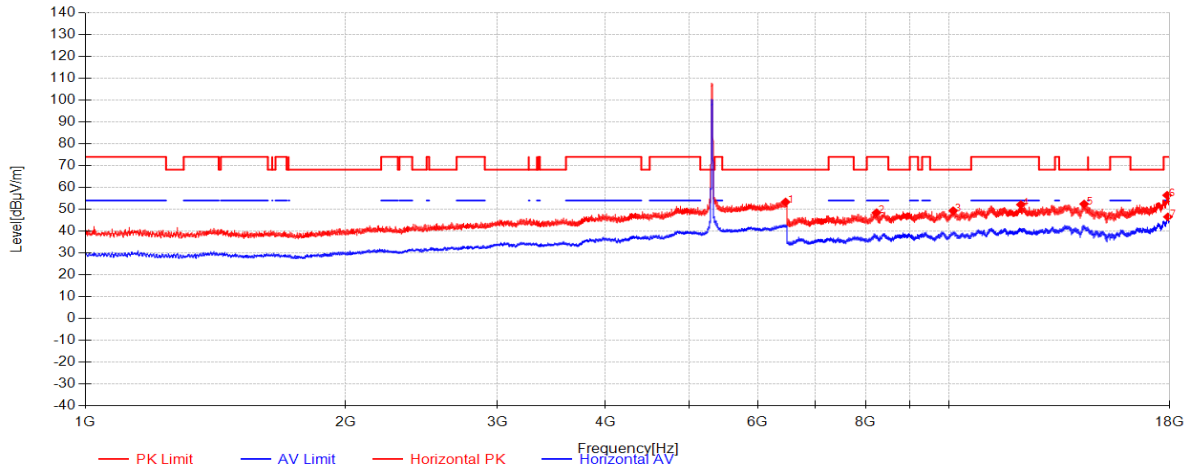


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6463.6154	37.44	35.20	-19.26	53.38	68.20	14.82	Horizontal
2	8236.5	54.08	37.33	-42.95	48.46	74.00	25.54	Horizontal
3	10101.4167	49.58	38.60	-38.81	49.36	68.20	18.84	Horizontal
4	12098.1042	49.79	39.00	-36.61	52.17	74.00	21.83	Horizontal
5	14320	48.39	39.96	-35.91	52.44	68.20	15.76	Horizontal
6	17866.7917	49.74	42.37	-35.67	56.44	74.00	17.56	Horizontal
7	17902.25	39.01	42.61	-35.07	46.55	54.00	7.45	Horizontal

11a_TX_CH_64_Vertical

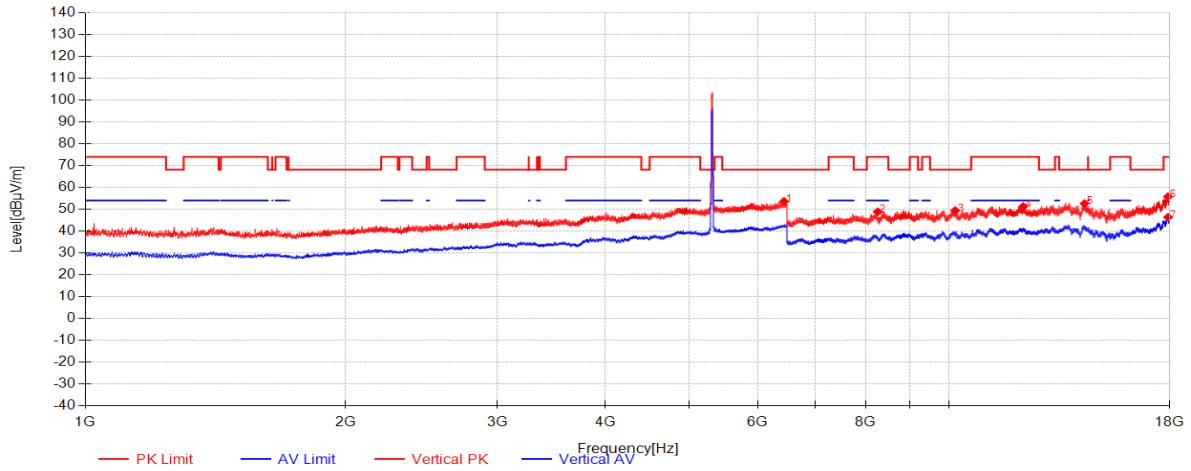


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6436.5385	37.77	35.17	-19.30	53.64	68.20	14.56	Vertical
2	8260.9375	54.97	37.26	-43.37	48.86	74.00	25.14	Vertical
3	10156.0417	49.95	38.43	-38.92	49.47	68.20	18.73	Vertical
4	12172.375	48.95	39.14	-36.80	51.29	74.00	22.71	Vertical
5	14335.3333	48.74	39.93	-36.02	52.65	68.20	15.55	Vertical
6	17903.2083	48.23	42.62	-35.07	55.78	74.00	18.22	Vertical
7	17910.3958	38.81	42.65	-35.07	46.39	54.00	7.61	Vertical

11a_TX_CH_100_Horizontal

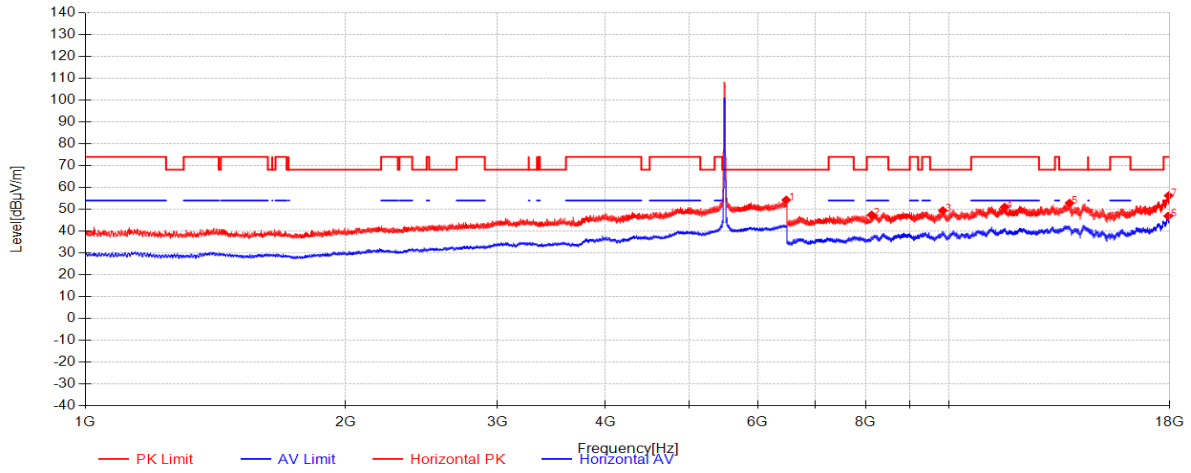


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6474.1923	38.34	35.20	-19.24	54.30	68.20	13.90	Horizontal
2	8128.6875	53.16	36.76	-42.51	47.41	74.00	26.59	Horizontal
3	9826.375	50.49	38.20	-39.27	49.42	68.20	18.78	Horizontal
4	11587.7917	48.69	38.90	-36.59	51.00	74.00	23.00	Horizontal
5	13776.1458	49.72	39.92	-36.78	52.87	68.20	15.33	Horizontal
6	17913.75	39.33	42.67	-35.07	46.93	54.00	7.07	Horizontal
7	17937.7083	48.55	42.79	-35.07	56.27	74.00	17.73	Horizontal

11a_TX_CH_100_Vertical

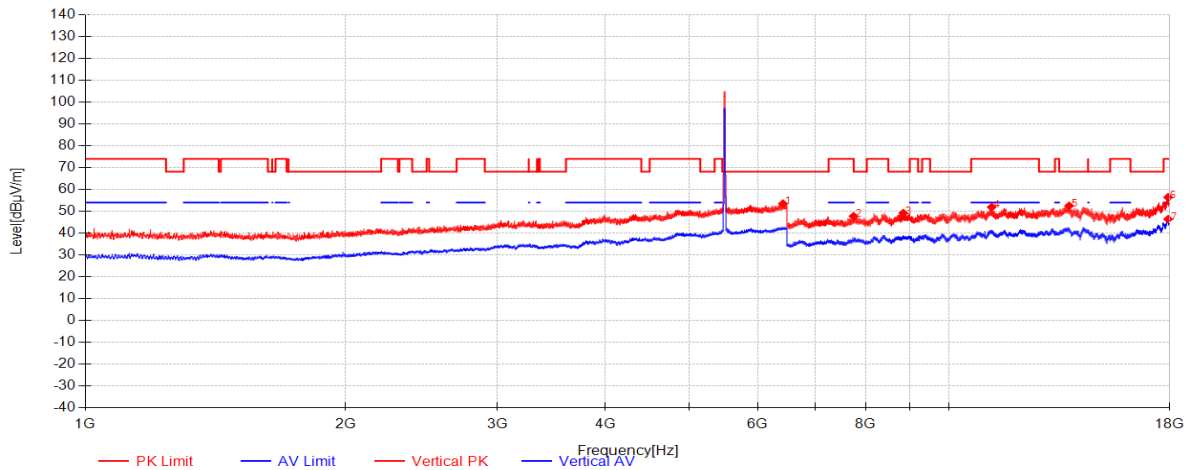


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6417.5	37.71	35.13	-19.33	53.51	68.20	14.69	Vertical
2	7746.3125	54.12	36.79	-43.17	47.74	74.00	26.26	Vertical
3	8843.125	52.83	37.81	-41.48	49.16	68.20	19.04	Vertical
4	11194.3958	49.75	38.82	-36.65	51.92	74.00	22.08	Vertical
5	13759.8542	49.34	39.94	-36.77	52.51	68.20	15.69	Vertical
6	17911.8333	48.84	42.66	-35.07	56.43	74.00	17.57	Vertical
7	17913.75	38.83	42.67	-35.07	46.43	54.00	7.57	Vertical

11a_TX_CH_116_Horizontal

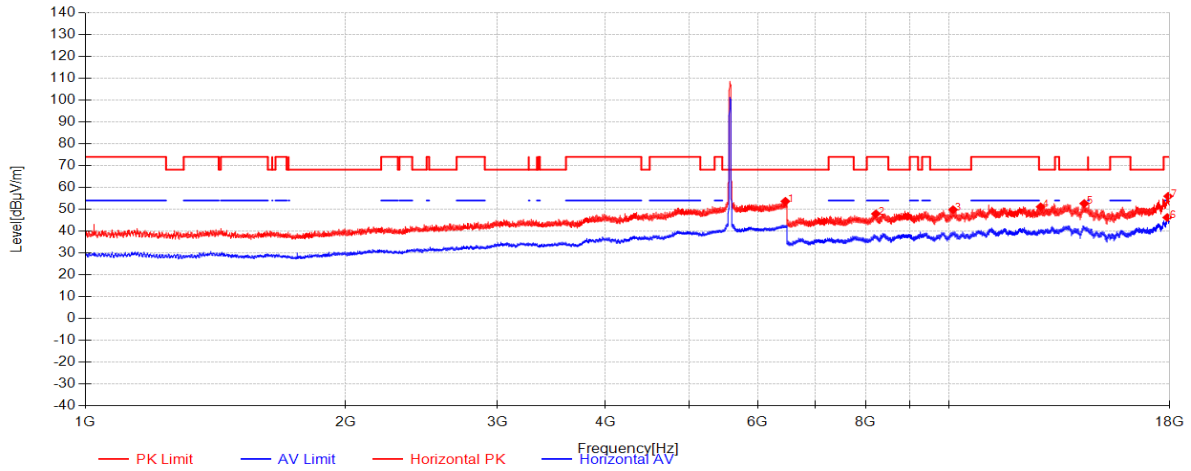


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6460.2308	37.74	35.20	-19.26	53.68	68.20	14.52	Horizontal
2	8222.6042	53.29	37.35	-42.71	47.94	74.00	26.06	Horizontal
3	10097.5833	50.12	38.59	-38.88	49.83	68.20	18.37	Horizontal
4	12754.0833	49.89	39.45	-38.18	51.15	68.20	17.05	Horizontal
5	14325.2708	48.67	39.95	-35.95	52.67	68.20	15.53	Horizontal
6	17873.0208	39.39	42.41	-35.56	46.25	54.00	7.75	Horizontal
7	17916.1458	48.39	42.68	-35.07	56.00	74.00	18.00	Horizontal

11a_TX_CH_116_Vertical

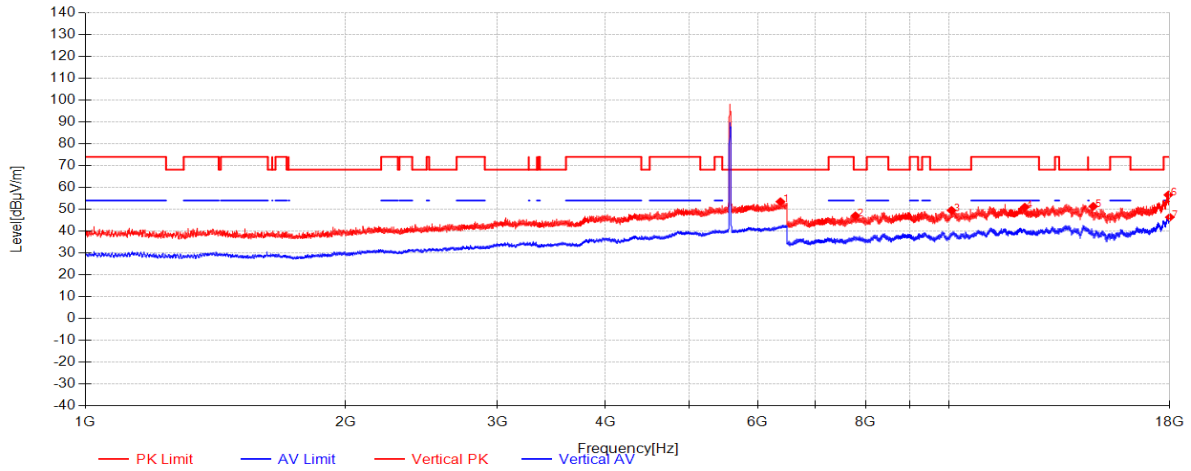


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6375.1923	37.99	34.85	-19.33	53.52	68.20	14.68	Vertical
2	7786.0833	53.52	36.73	-43.23	47.02	68.20	21.18	Vertical
3	10056.8542	51.12	38.47	-40.08	49.51	68.20	18.69	Vertical
4	12226.0417	48.93	39.10	-37.04	50.99	74.00	23.01	Vertical
5	14671.7083	48.22	39.70	-36.56	51.36	68.20	16.84	Vertical
6	17924.2917	48.95	42.72	-35.07	56.60	74.00	17.40	Vertical
7	17995.2083	38.36	43.08	-35.06	46.38	54.00	7.62	Vertical

11a_TX_CH_120_Horizontal

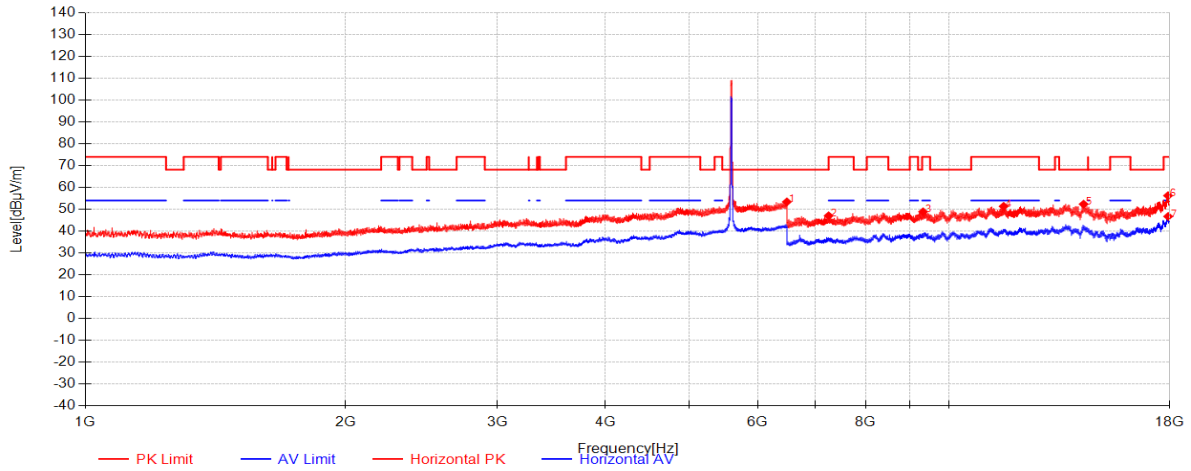


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6485.6154	37.45	35.20	-19.22	53.43	68.20	14.77	Horizontal
2	7248.9375	54.58	36.70	-44.23	47.05	68.20	21.15	Horizontal
3	9323.25	51.83	38.35	-41.30	48.88	74.00	25.12	Horizontal
4	11556.6458	49.22	38.90	-36.76	51.36	74.00	22.64	Horizontal
5	14301.3125	48.14	40.00	-35.78	52.36	68.20	15.84	Horizontal
6	17909.9167	48.70	42.65	-35.07	56.28	74.00	17.72	Horizontal
7	17914.7083	39.13	42.67	-35.07	46.74	54.00	7.26	Horizontal

11a_TX_CH_120_Vertical

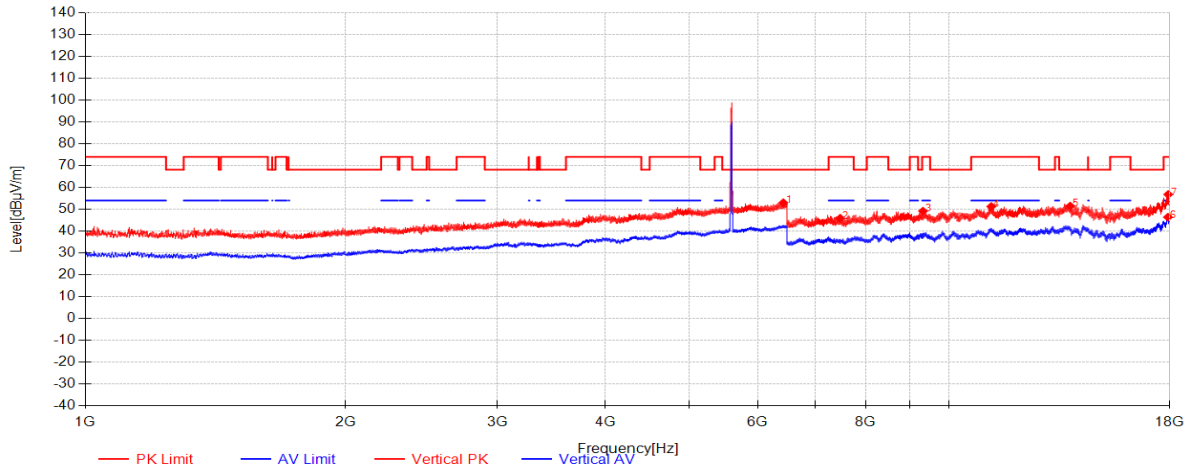


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6423.8462	37.21	35.15	-19.32	53.04	68.20	15.16	Vertical
2	7475.5833	53.05	36.55	-43.67	45.92	74.00	28.08	Vertical
3	9320.375	52.13	38.36	-41.31	49.18	74.00	24.82	Vertical
4	11182.4167	49.33	38.87	-36.90	51.30	74.00	22.70	Vertical
5	13799.625	48.36	39.90	-36.78	51.48	68.20	16.72	Vertical
6	17903.6875	38.86	42.62	-35.07	46.41	54.00	7.59	Vertical
7	17916.625	49.20	42.68	-35.07	56.81	74.00	17.19	Vertical

11a_TX_CH_124_Horizontal

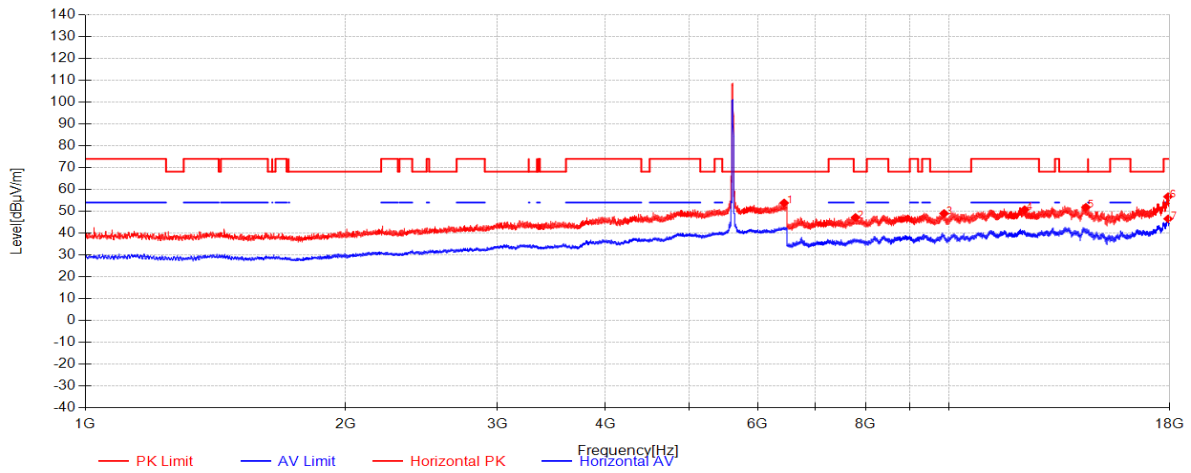


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6439.0769	37.98	35.18	-19.30	53.86	68.20	14.34	Horizontal
2	7786.5625	53.69	36.73	-43.23	47.19	68.20	21.01	Horizontal
3	9859.4375	50.47	38.14	-39.60	49.01	68.20	19.19	Horizontal
4	12219.8125	48.62	39.12	-37.00	50.74	74.00	23.26	Horizontal
5	14387.0833	48.42	39.83	-36.39	51.86	68.20	16.34	Horizontal
6	17908	49.14	42.64	-35.07	56.71	74.00	17.29	Horizontal
7	17916.625	38.96	42.68	-35.07	46.57	54.00	7.43	Horizontal

11a_TX_CH_124_Vertical

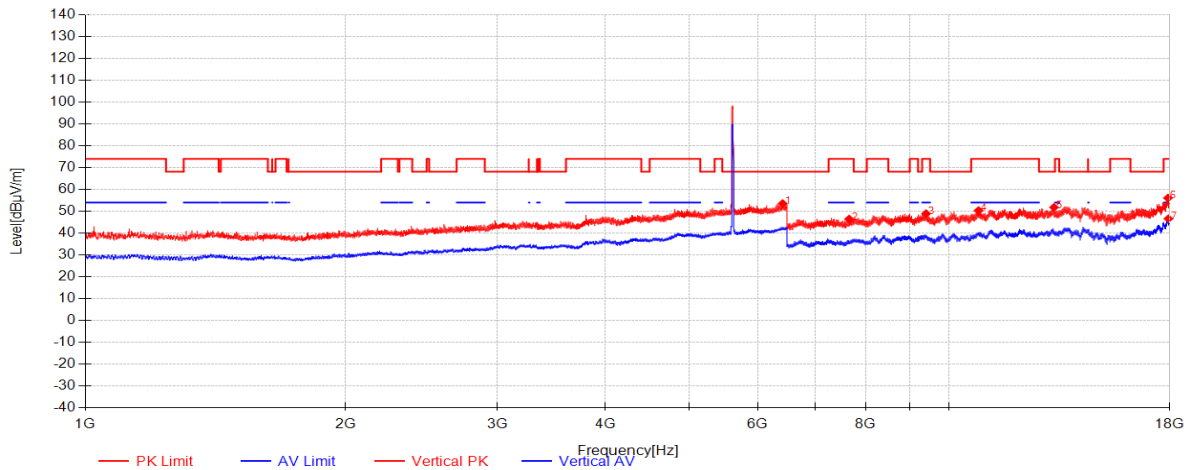


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6412	37.77	35.12	-19.34	53.55	68.20	14.65	Vertical
2	7655.75	53.27	36.43	-43.25	46.46	74.00	27.54	Vertical
3	9398.9583	51.68	38.20	-40.94	48.94	74.00	25.06	Vertical
4	10807.2292	49.40	39.01	-38.07	50.34	74.00	23.66	Vertical
5	13216.9583	48.75	39.80	-36.73	51.82	68.20	16.38	Vertical
6	17905.6042	48.56	42.63	-35.07	56.12	74.00	17.88	Vertical
7	17926.6875	38.95	42.73	-35.07	46.62	54.00	7.38	Vertical

11a_TX_CH_128_Horizontal

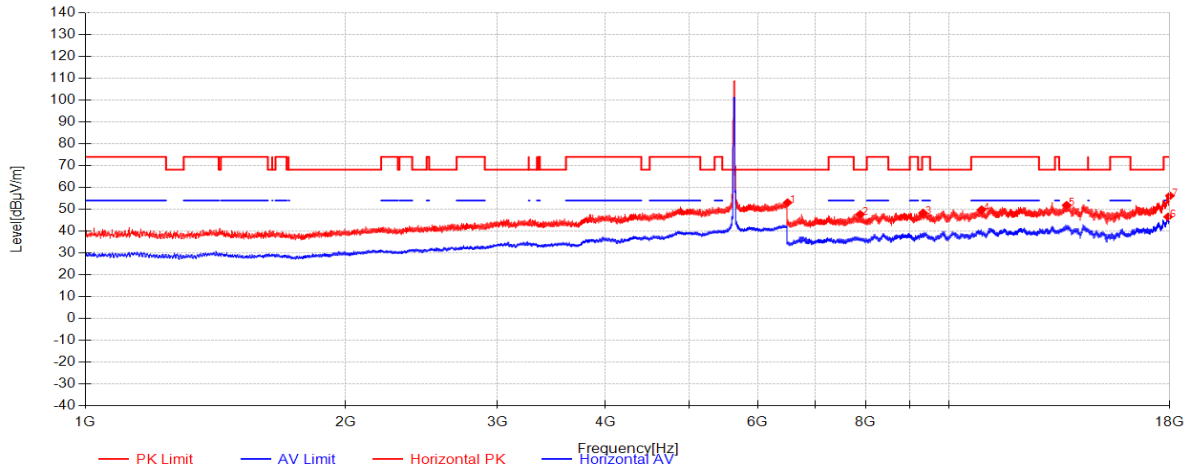


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6497.4615	37.07	35.20	-19.20	53.07	68.20	15.13	Horizontal
2	7884.7917	53.88	36.67	-42.89	47.66	68.20	20.54	Horizontal
3	9323.25	51.30	38.35	-41.30	48.35	74.00	25.65	Horizontal
4	10897.7917	48.66	39.10	-37.95	49.80	74.00	24.20	Horizontal
5	13667.375	48.45	39.97	-36.54	51.87	68.20	16.33	Horizontal
6	17912.7917	38.95	42.66	-35.07	46.55	54.00	7.45	Horizontal
7	17997.6042	48.17	43.09	-35.06	56.20	74.00	17.80	Horizontal

11a_TX_CH_128_Vertical

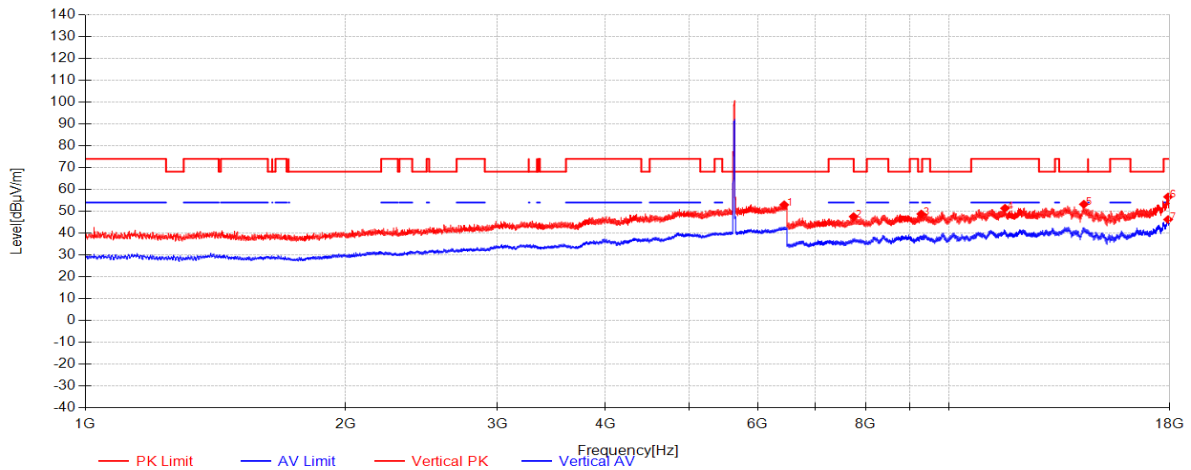


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6439.9231	37.13	35.18	-19.30	53.01	68.20	15.19	Vertical
2	7747.75	53.95	36.80	-43.17	47.57	74.00	26.43	Vertical
3	9279.6458	51.94	38.28	-41.45	48.77	68.20	19.43	Vertical
4	11597.375	49.04	38.90	-36.54	51.40	74.00	22.60	Vertical
5	14309.9375	49.10	39.98	-35.84	53.24	68.20	14.96	Vertical
6	17910.3958	49.04	42.65	-35.07	56.62	74.00	17.38	Vertical
7	17912.7917	38.65	42.66	-35.07	46.25	54.00	7.75	Vertical

11a_TX_CH_140_Horizontal

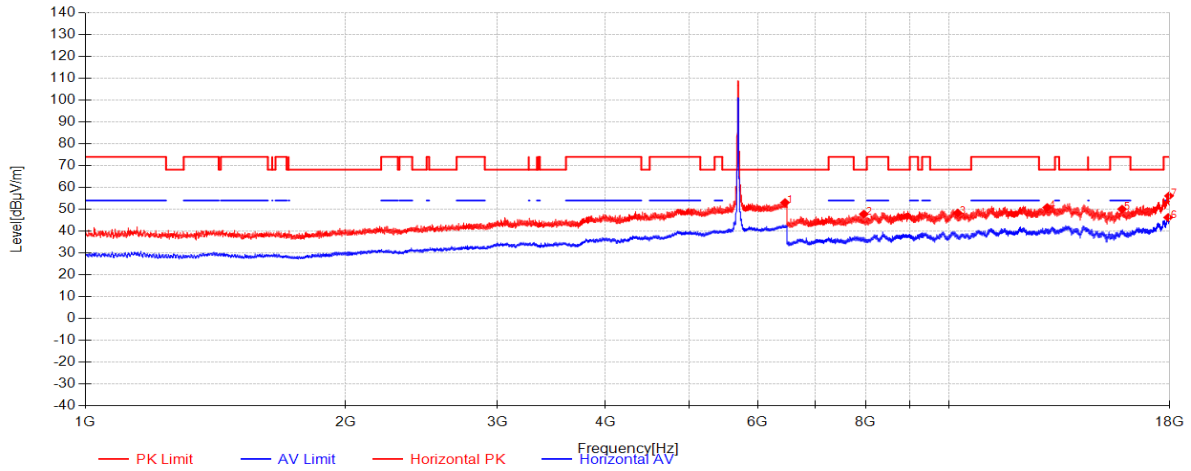


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6453.8846	37.18	35.20	-19.27	53.11	68.20	15.09	Horizontal
2	7961.9375	53.58	37.30	-43.07	47.81	68.20	20.39	Horizontal
3	10226.9583	49.25	38.33	-39.26	48.32	68.20	19.88	Horizontal
4	12977.8542	48.45	39.76	-37.36	50.85	68.20	17.35	Horizontal
5	15846.1458	48.07	39.46	-37.47	50.07	74.00	23.93	Horizontal
6	17914.2292	38.67	42.67	-35.07	46.27	54.00	7.73	Horizontal
7	17955.9167	48.34	42.88	-35.06	56.16	74.00	17.84	Horizontal

11a_TX_CH_140_Vertical

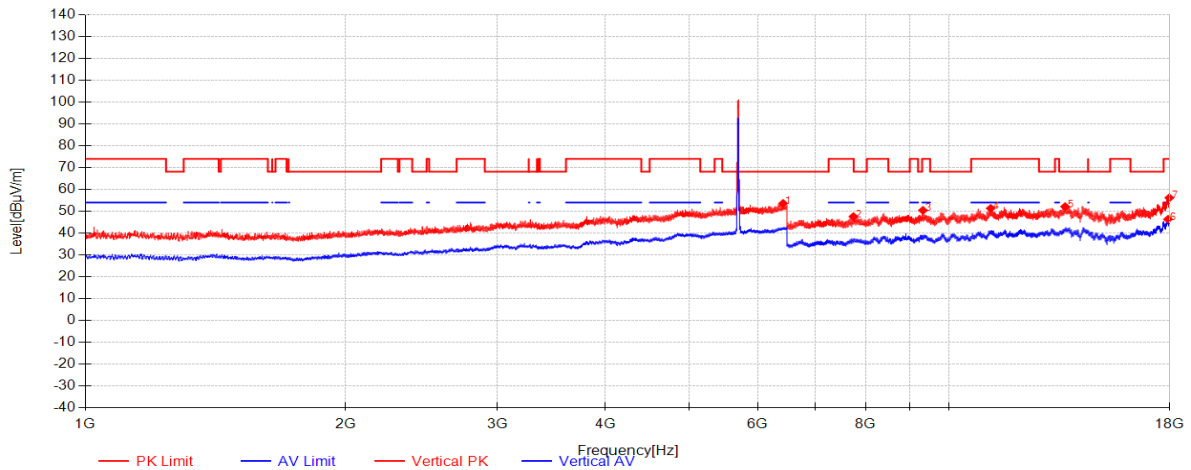


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6420.0385	37.81	35.14	-19.33	53.62	68.20	14.58	Vertical
2	7743.9167	53.97	36.79	-43.17	47.59	74.00	26.41	Vertical
3	9319.4167	53.41	38.36	-41.32	50.45	74.00	23.55	Vertical
4	11164.2083	49.70	38.94	-37.28	51.36	74.00	22.64	Vertical
5	13610.8333	48.43	39.91	-36.17	52.17	68.20	16.03	Vertical
6	17907.5208	38.81	42.64	-35.07	46.38	54.00	7.62	Vertical
7	17970.7708	48.33	42.95	-35.06	56.22	74.00	17.78	Vertical

11a_TX_CH_144_Horizontal

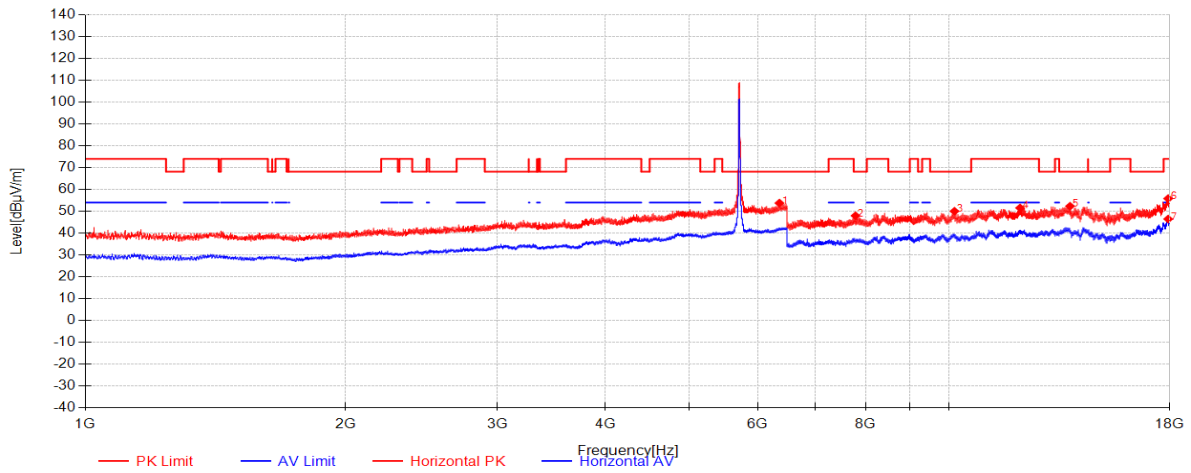


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6358.2692	38.39	34.68	-19.30	53.77	68.20	14.43	Horizontal
2	7787.5208	54.47	36.72	-43.23	47.96	68.20	20.24	Horizontal
3	10136.875	50.43	38.49	-38.88	50.04	68.20	18.16	Horizontal
4	12074.1458	49.48	38.95	-36.88	51.54	74.00	22.46	Horizontal
5	13791.4792	49.20	39.91	-36.78	52.33	68.20	15.87	Horizontal
6	17914.7083	48.24	42.67	-35.07	55.85	74.00	18.15	Horizontal
7	17916.625	38.86	42.68	-35.07	46.47	54.00	7.53	Horizontal

11a_TX_CH_144_Vertical

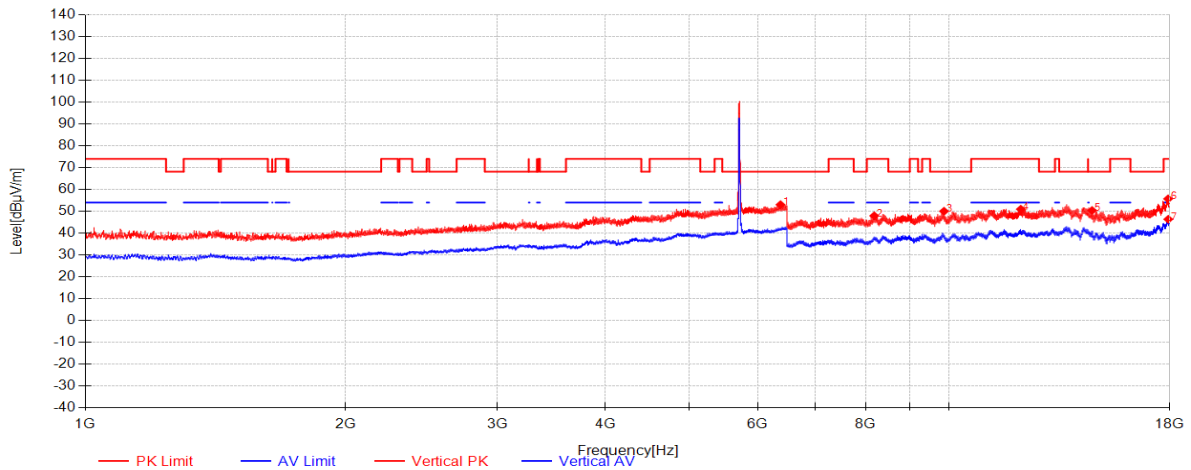


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6376.0385	37.53	34.86	-19.33	53.06	68.20	15.14	Vertical
2	8185.2292	53.08	37.22	-42.36	47.94	74.00	26.06	Vertical
3	9858.4792	51.48	38.15	-39.59	50.04	68.20	18.16	Vertical
4	12096.1875	48.62	38.99	-36.63	50.98	74.00	23.02	Vertical
5	14626.1875	47.67	39.70	-36.97	50.40	68.20	17.80	Vertical
6	17914.2292	48.12	42.67	-35.07	55.72	74.00	18.28	Vertical
7	17919.5	38.73	42.70	-35.07	46.36	54.00	7.64	Vertical

11a_TX_CH_149_Horizontal

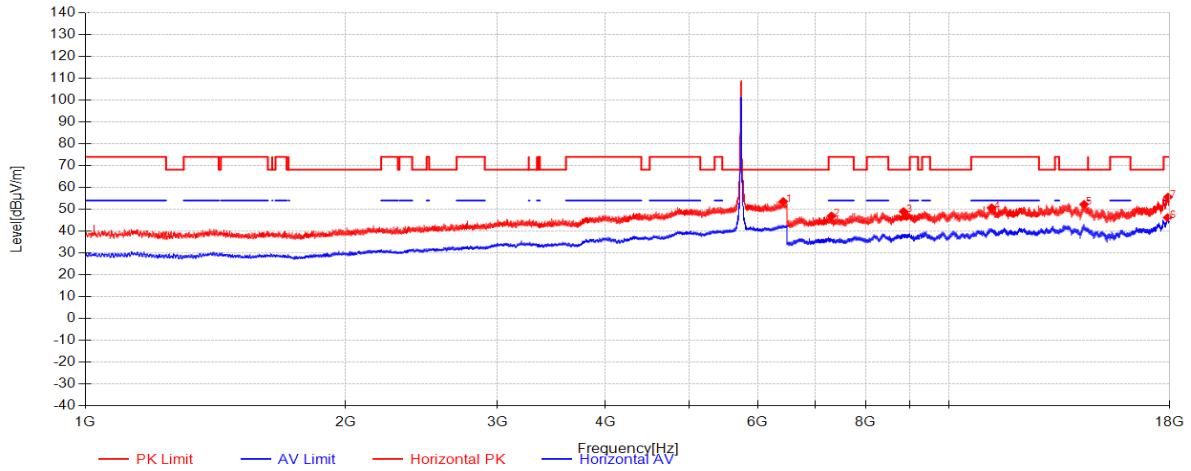


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6423.4231	37.78	35.15	-19.32	53.60	68.20	14.60	Horizontal
2	7304.5208	54.28	36.39	-43.74	46.93	74.00	27.07	Horizontal
3	8851.2708	52.69	37.80	-41.49	49.00	68.20	19.20	Horizontal
4	11192.4792	48.55	38.83	-36.69	50.69	74.00	23.31	Horizontal
5	14318.0833	48.21	39.96	-35.90	52.28	68.20	15.92	Horizontal
6	17885.4792	39.01	42.50	-35.33	46.18	54.00	7.82	Horizontal
7	17906.5625	48.06	42.63	-35.07	55.62	74.00	18.38	Horizontal

11a_TX_CH_149_Vertical

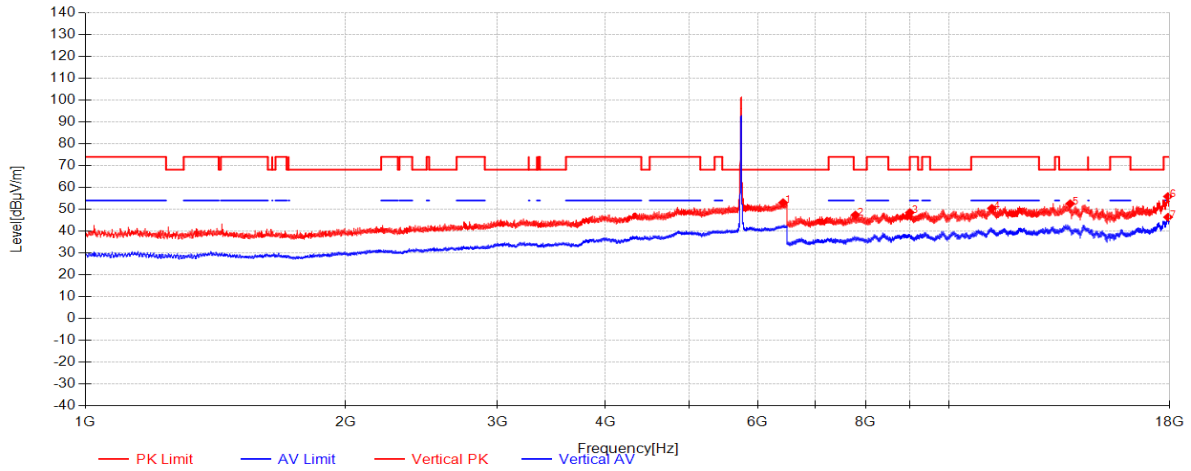


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6420.8846	37.26	35.14	-19.33	53.08	68.20	15.12	Vertical
2	7785.6042	53.92	36.73	-43.23	47.42	68.20	20.78	Vertical
3	9001.25	50.94	38.19	-40.60	48.53	74.00	25.47	Vertical
4	11200.1458	48.22	38.80	-36.53	50.49	74.00	23.51	Vertical
5	13800.1042	49.49	39.90	-36.78	52.61	68.20	15.59	Vertical
6	17902.25	48.34	42.61	-35.07	55.88	74.00	18.12	Vertical
7	17909.9167	38.83	42.65	-35.07	46.41	54.00	7.59	Vertical

11a_TX_CH_157_Horizontal

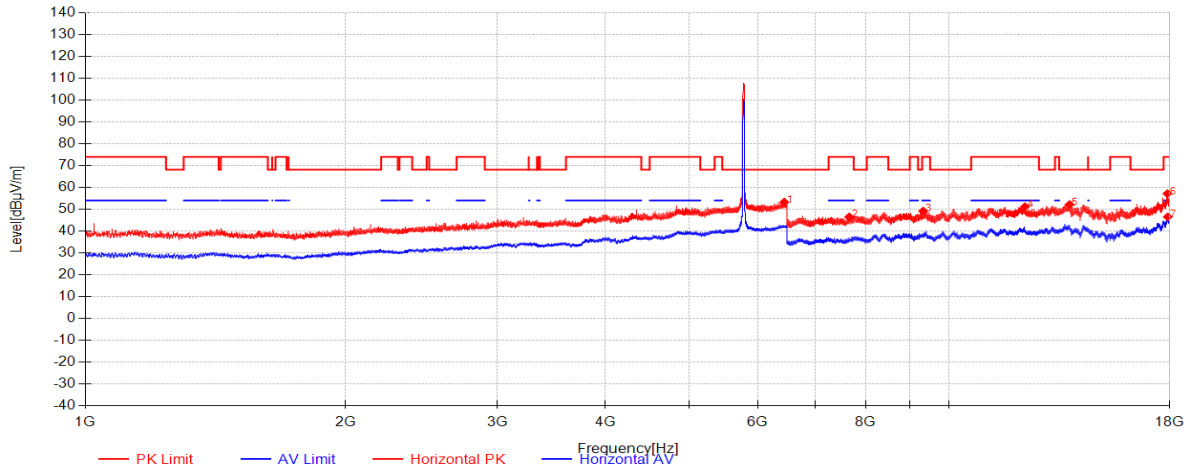


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6440.3462	37.43	35.18	-19.30	53.32	68.20	14.88	Horizontal
2	7657.6667	53.33	36.45	-43.24	46.54	74.00	27.46	Horizontal
3	9325.6458	52.16	38.35	-41.29	49.22	74.00	24.78	Horizontal
4	12230.3542	49.19	39.08	-37.06	51.21	74.00	22.79	Horizontal
5	13778.0625	49.06	39.92	-36.78	52.21	68.20	15.99	Horizontal
6	17878.7708	50.18	42.45	-35.45	57.18	74.00	16.82	Horizontal
7	17894.5833	39.13	42.56	-35.17	46.52	54.00	7.48	Horizontal

11a_TX_CH_157_Vertical

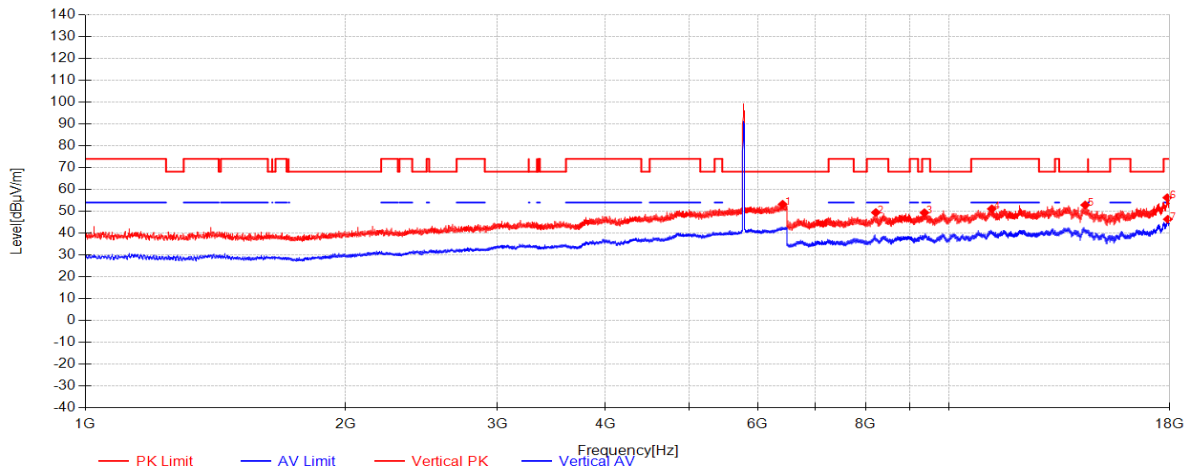


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6412.8462	37.45	35.13	-19.34	53.24	68.20	14.96	Vertical
2	8220.6875	54.78	37.36	-42.68	49.46	74.00	24.54	Vertical
3	9357.2708	52.22	38.29	-41.14	49.36	74.00	24.64	Vertical
4	11197.2708	48.92	38.81	-36.59	51.14	74.00	22.86	Vertical
5	14361.6875	49.23	39.88	-36.21	52.90	68.20	15.30	Vertical
6	17873.0208	49.41	42.41	-35.56	56.27	74.00	17.73	Vertical
7	17897.4583	38.90	42.58	-35.12	46.37	54.00	7.63	Vertical

11a_TX_CH_165_Horizontal

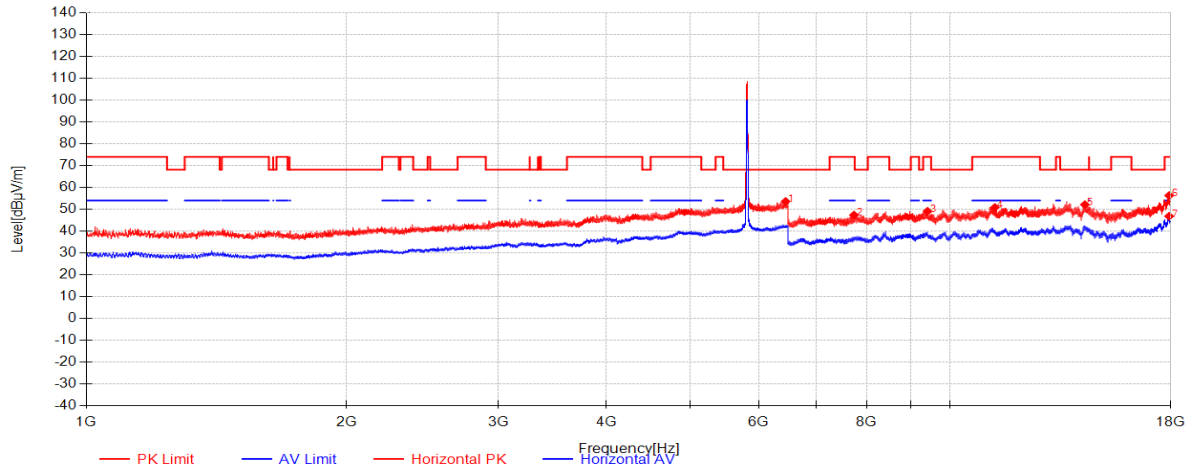


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6446.6923	37.71	35.19	-19.29	53.62	68.20	14.58	Horizontal
2	7734.8125	53.75	36.77	-43.15	47.37	74.00	26.63	Horizontal
3	9409.5	51.85	38.20	-40.95	49.10	74.00	24.90	Horizontal
4	11257.6458	49.93	38.92	-37.99	50.85	74.00	23.15	Horizontal
5	14311.375	48.04	39.98	-35.85	52.17	68.20	16.03	Horizontal
6	17915.6667	48.70	42.68	-35.07	56.31	74.00	17.69	Horizontal
7	17917.1042	39.22	42.69	-35.07	46.84	54.00	7.16	Horizontal

11a_TX_CH_165_Vertical

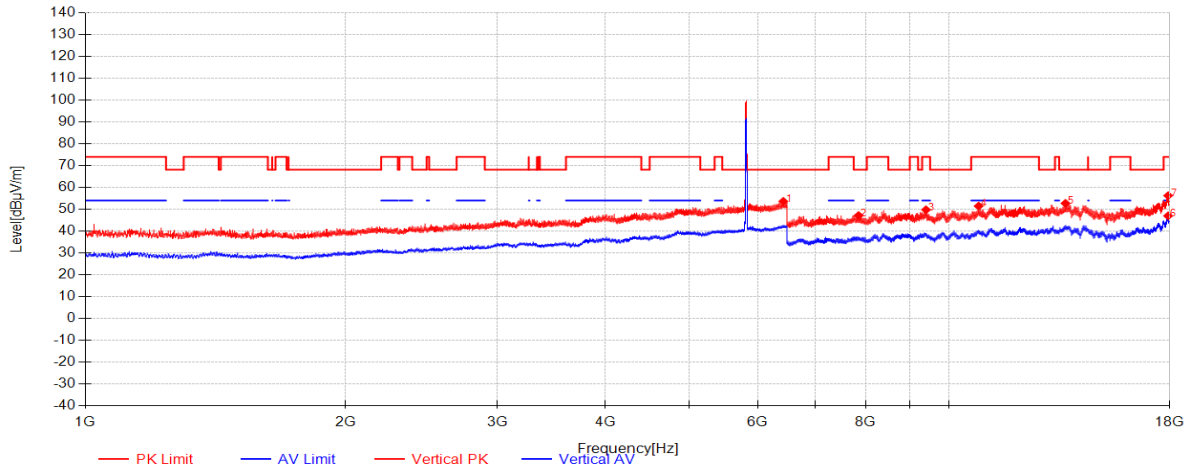


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6423.8462	37.83	35.15	-19.32	53.66	68.20	14.54	Vertical
2	7852.2083	53.61	36.60	-43.03	47.19	68.20	21.01	Vertical
3	9396.5625	52.57	38.21	-40.96	49.82	74.00	24.18	Vertical
4	10810.5833	50.55	39.01	-38.07	51.49	74.00	22.51	Vertical
5	13625.2083	49.09	39.93	-36.27	52.75	68.20	15.45	Vertical
6	17912.7917	39.42	42.66	-35.07	47.02	54.00	6.98	Vertical
7	17914.7083	48.68	42.67	-35.07	56.29	74.00	17.71	Vertical

11be(EHT20)_TX_CH_36_Horizontal

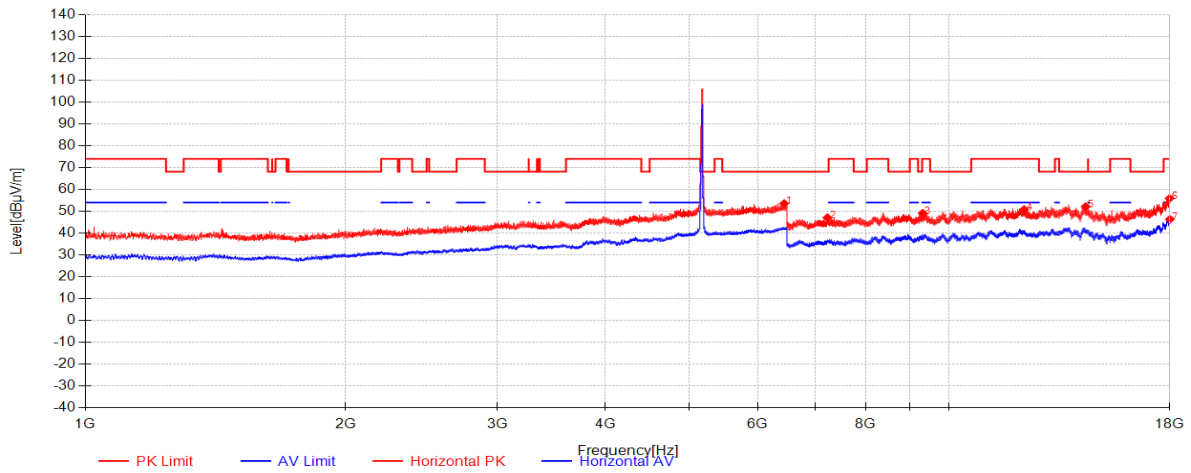


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6438.2308	37.69	35.18	-19.30	53.57	68.20	14.63	Horizontal
2	7225.9375	54.75	36.80	-44.47	47.08	68.20	21.12	Horizontal
3	9312.7083	52.14	38.37	-41.35	49.16	74.00	24.84	Horizontal
4	12203.5208	48.51	39.19	-36.90	50.79	74.00	23.21	Horizontal
5	14378.9375	48.66	39.84	-36.33	52.17	68.20	16.03	Horizontal
6	17988.9792	47.93	43.04	-35.06	55.91	74.00	18.09	Horizontal
7	17998.5625	38.36	43.09	-35.06	46.39	54.00	7.61	Horizontal

11be(EHT20)_TX_CH_36_Vertical

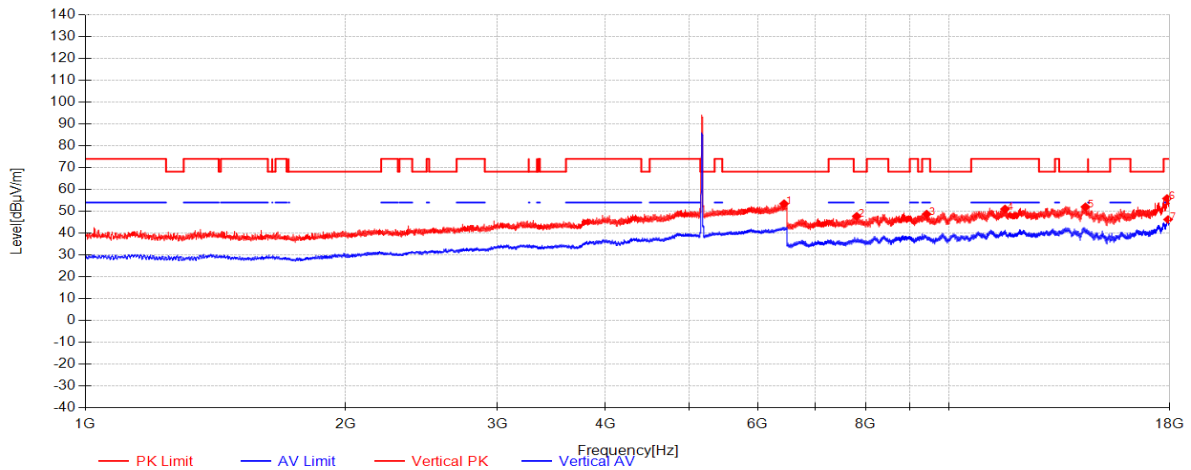


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6436.9615	37.61	35.17	-19.30	53.48	68.20	14.72	Vertical
2	7812.4375	54.26	36.68	-43.20	47.74	68.20	20.46	Vertical
3	9412.375	51.49	38.20	-40.96	48.73	74.00	25.27	Vertical
4	11597.8542	48.69	38.90	-36.54	51.05	74.00	22.95	Vertical
5	14369.3542	48.44	39.86	-36.26	52.04	68.20	16.16	Vertical
6	17859.6042	49.34	42.32	-35.80	55.86	74.00	18.14	Vertical
7	17909.9167	38.66	42.65	-35.07	46.24	54.00	7.76	Vertical

11be(EHT20)_TX_CH_40_Horizontal

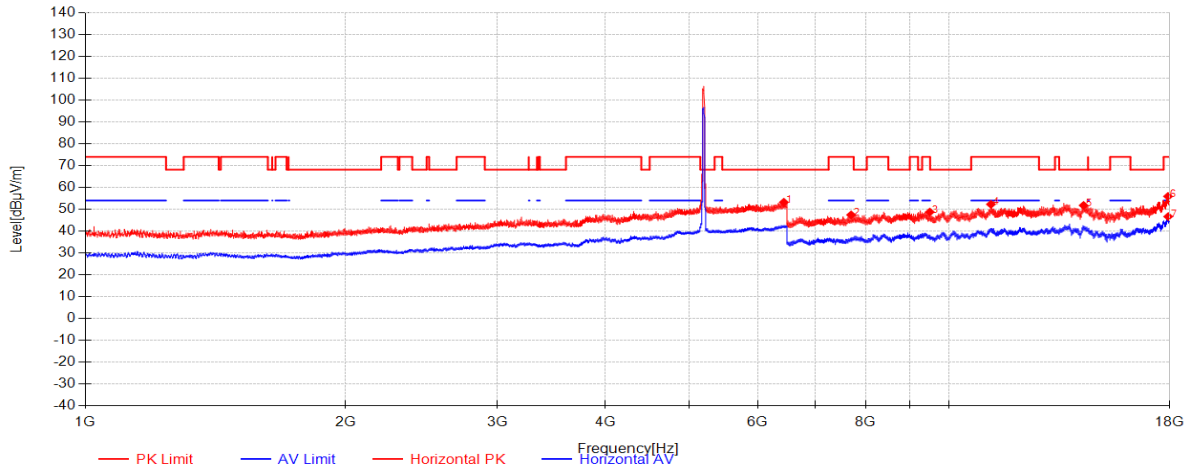


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6434	37.38	35.17	-19.31	53.24	68.20	14.96	Horizontal
2	7696.9583	53.87	36.68	-43.11	47.44	74.00	26.56	Horizontal
3	9492.3958	51.54	38.28	-41.07	48.76	74.00	25.24	Horizontal
4	11170.9167	50.53	38.92	-37.14	52.31	74.00	21.69	Horizontal
5	14300.3542	47.56	40.00	-35.77	51.79	68.20	16.41	Horizontal
6	17908	48.36	42.64	-35.07	55.93	74.00	18.07	Horizontal
7	17916.625	39.08	42.68	-35.07	46.69	54.00	7.31	Horizontal

11be(EHT20)_TX_CH_40_Vertical

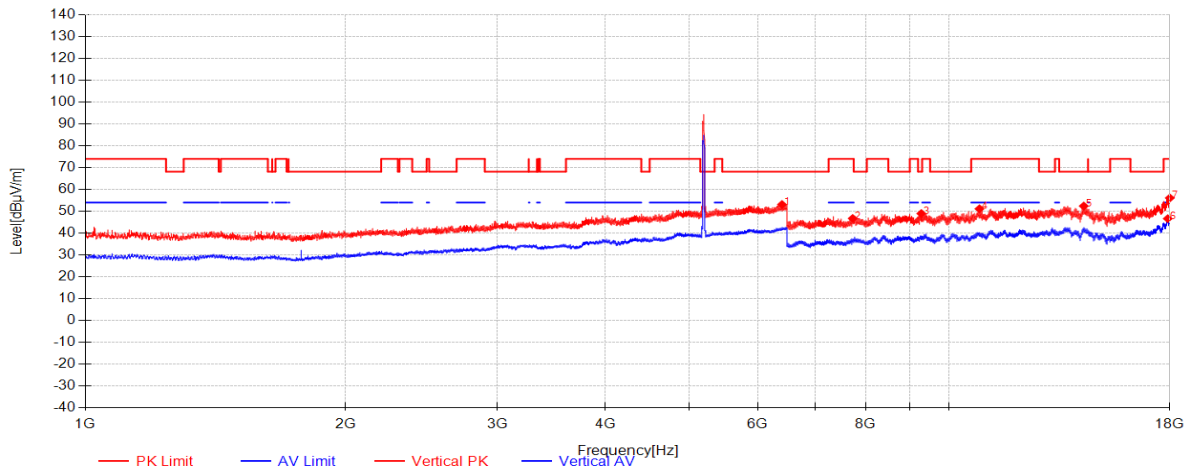


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6402.2692	37.39	35.10	-19.36	53.14	68.20	15.06	Vertical
2	7728.5833	53.13	36.76	-43.14	46.74	74.00	27.26	Vertical
3	9279.6458	52.15	38.28	-41.45	48.98	68.20	19.22	Vertical
4	10835.0208	50.16	39.04	-38.03	51.16	74.00	22.84	Vertical
5	14305.1458	48.24	39.99	-35.81	52.42	68.20	15.78	Vertical
6	17895.5417	39.24	42.57	-35.15	46.66	54.00	7.34	Vertical
7	17994.25	48.12	43.07	-35.06	56.13	74.00	17.87	Vertical

11be(EHT20)_TX_CH_48_Horizontal

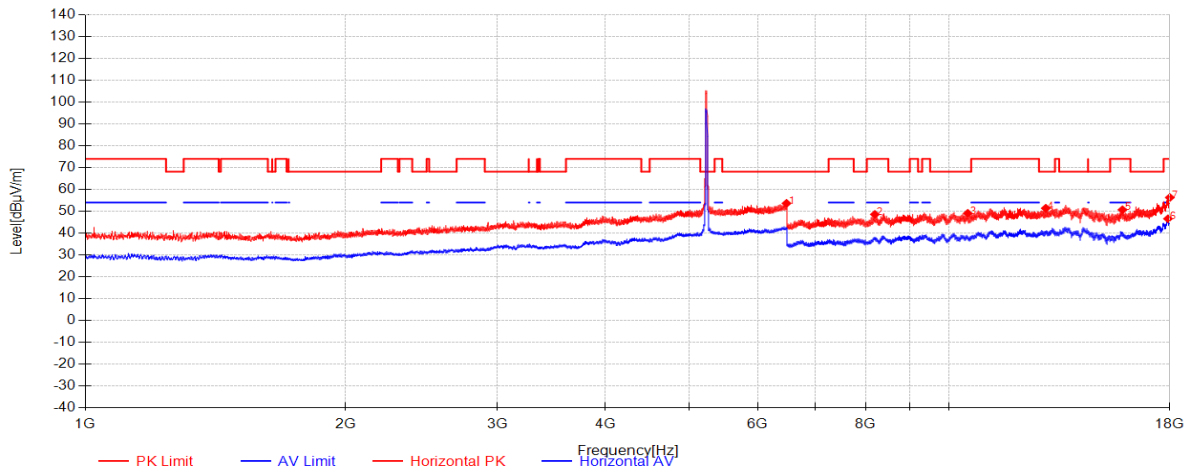


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6479.2692	37.68	35.20	-19.23	53.65	68.20	14.55	Horizontal
2	8199.6042	53.51	37.40	-42.32	48.58	74.00	25.42	Horizontal
3	10503.4375	50.01	38.32	-39.25	49.08	68.20	19.12	Horizontal
4	12929.9375	49.63	39.66	-37.87	51.42	68.20	16.78	Horizontal
5	15861.4792	48.82	39.42	-37.52	50.71	74.00	23.29	Horizontal
6	17907.0417	39.02	42.64	-35.07	46.59	54.00	7.41	Horizontal
7	17996.1667	48.30	43.08	-35.06	56.32	74.00	17.68	Horizontal

11be(EHT20)_TX_CH_48_Vertical

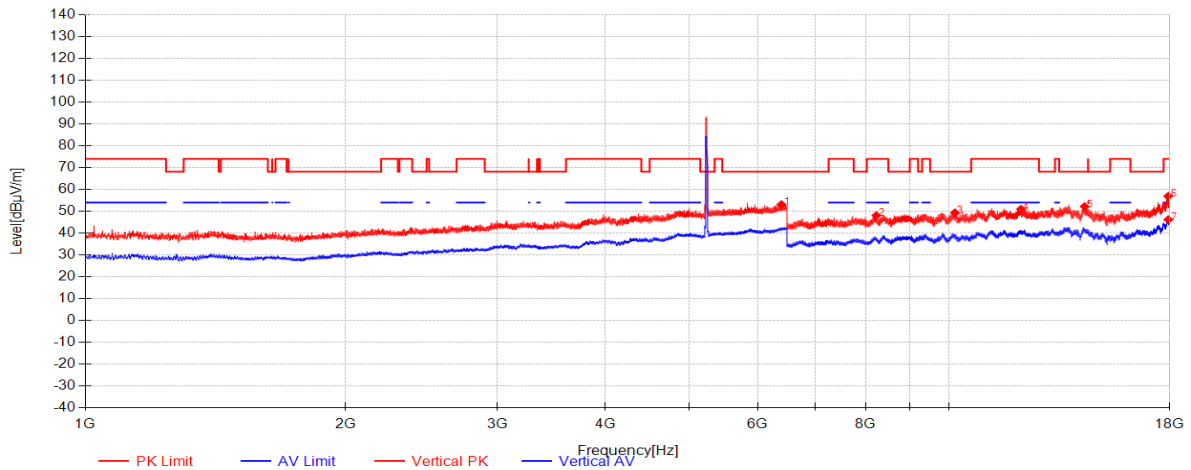


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6392.1154	37.47	35.02	-19.35	53.14	68.20	15.06	Vertical
2	8231.7083	53.61	37.34	-42.87	48.08	74.00	25.92	Vertical
3	10149.8125	49.80	38.45	-38.90	49.35	68.20	18.85	Vertical
4	12100.9792	48.55	39.00	-36.59	50.96	74.00	23.04	Vertical
5	14340.125	48.33	39.92	-36.05	52.19	68.20	16.01	Vertical
6	17917.1042	49.32	42.69	-35.07	56.94	74.00	17.06	Vertical
7	17919.5	38.59	42.70	-35.07	46.22	54.00	7.78	Vertical

11be(EHT20)_TX_CH_52_Horizontal

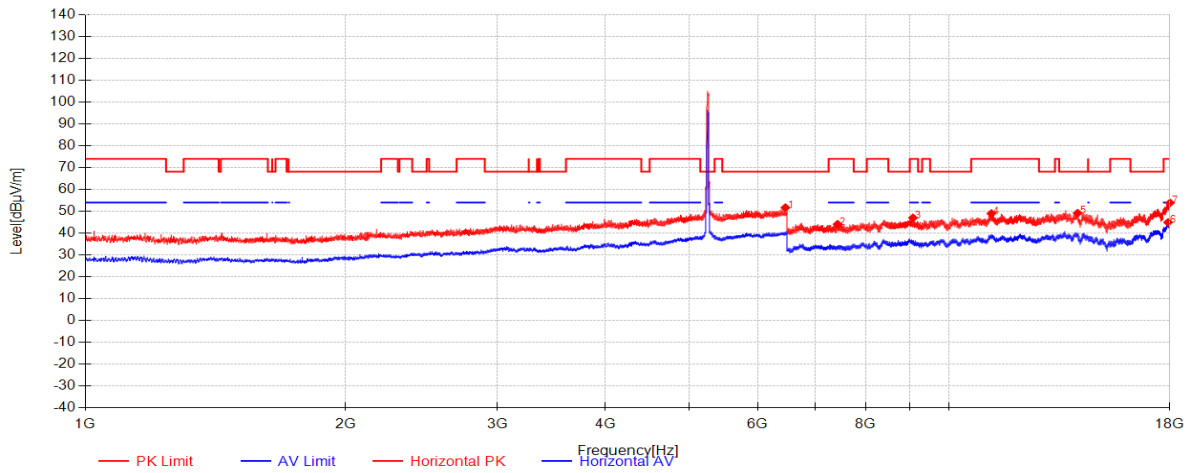


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6460.6538	35.76	35.20	-19.26	51.70	68.20	16.50	Horizontal
2	7424.3125	51.70	36.55	-44.15	44.10	74.00	29.90	Horizontal
3	9076.4792	50.22	38.05	-41.25	47.03	74.00	26.97	Horizontal
4	11184.3333	46.99	38.86	-36.86	48.99	74.00	25.01	Horizontal
5	14070.3542	45.51	39.89	-36.23	49.17	68.20	19.03	Horizontal
6	17909.9167	37.36	42.65	-35.07	44.94	54.00	9.06	Horizontal
7	17999.5208	45.83	43.10	-35.06	53.87	74.00	20.13	Horizontal

11be(EHT20)_TX_CH_52_Vertical

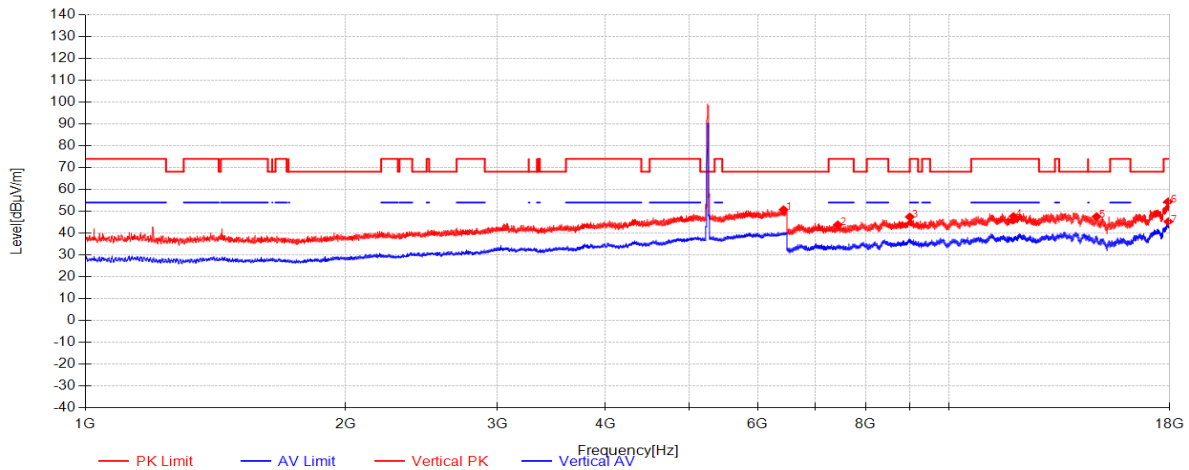


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6428.0769	34.92	35.16	-19.32	50.76	68.20	17.44	Vertical
2	7428.625	51.36	36.57	-44.11	43.83	74.00	30.17	Vertical
3	8999.8125	49.86	38.20	-40.59	47.47	68.20	20.73	Vertical
4	11861.875	47.22	38.80	-38.33	47.69	74.00	26.31	Vertical
5	14803	44.68	39.69	-36.78	47.60	68.20	20.60	Vertical
6	17916.1458	46.83	42.68	-35.07	54.44	74.00	19.56	Vertical
7	17923.3333	37.65	42.72	-35.07	45.30	54.00	8.70	Vertical

11be(EHT20)_TX_CH_60_Horizontal

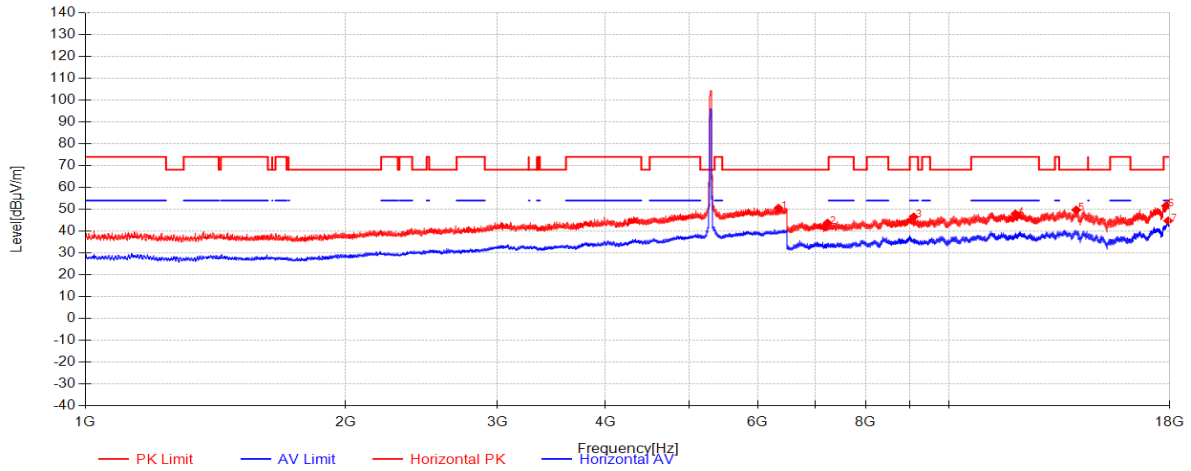


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6341.3462	35.28	34.55	-19.28	50.55	68.20	17.65	Horizontal
2	7226.4167	51.42	36.79	-44.46	43.75	68.20	24.45	Horizontal
3	9093.25	49.87	38.09	-41.39	46.56	74.00	27.44	Horizontal
4	11923.2083	47.54	38.80	-38.41	47.93	74.00	26.07	Horizontal
5	14021.9583	45.71	40.03	-36.02	49.73	68.20	18.47	Horizontal
6	17810.7292	46.27	41.98	-36.68	51.57	74.00	22.43	Horizontal
7	17916.1458	37.12	42.68	-35.07	44.73	54.00	9.27	Horizontal

11be(EHT20)_TX_CH_60_Vertical

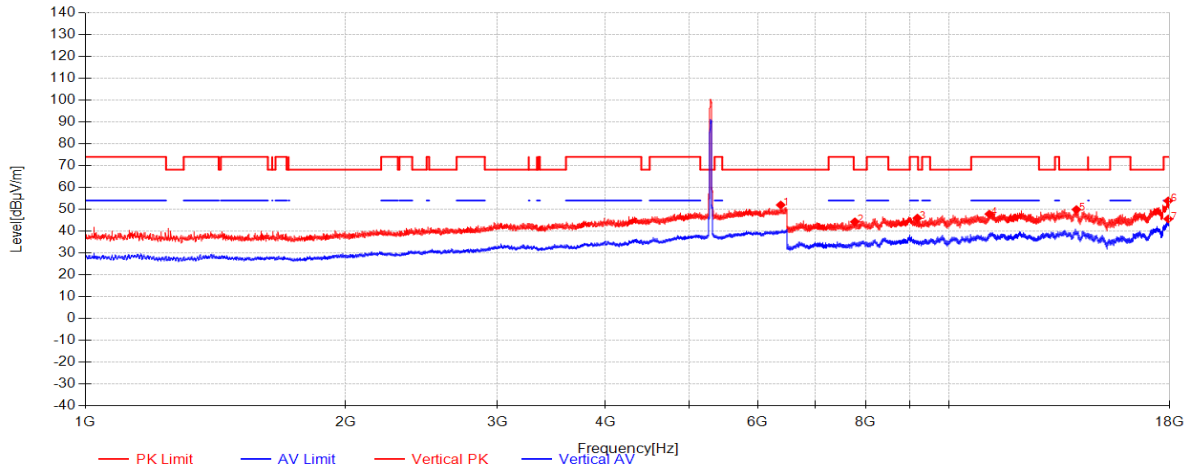


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6380.2692	36.44	34.90	-19.33	52.01	68.20	16.19	Vertical
2	7773.625	50.77	36.75	-43.21	44.31	68.20	23.89	Vertical
3	9182.8542	49.60	37.97	-41.57	46.00	74.00	28.00	Vertical
4	11123.9583	46.83	39.10	-38.13	47.81	74.00	26.19	Vertical
5	14030.5833	45.96	40.01	-36.05	49.91	68.20	18.29	Vertical
6	17916.1458	46.28	42.68	-35.07	53.89	74.00	20.11	Vertical
7	17921.4167	37.95	42.71	-35.07	45.59	54.00	8.41	Vertical

11be(EHT20)_TX_CH_64_Horizontal

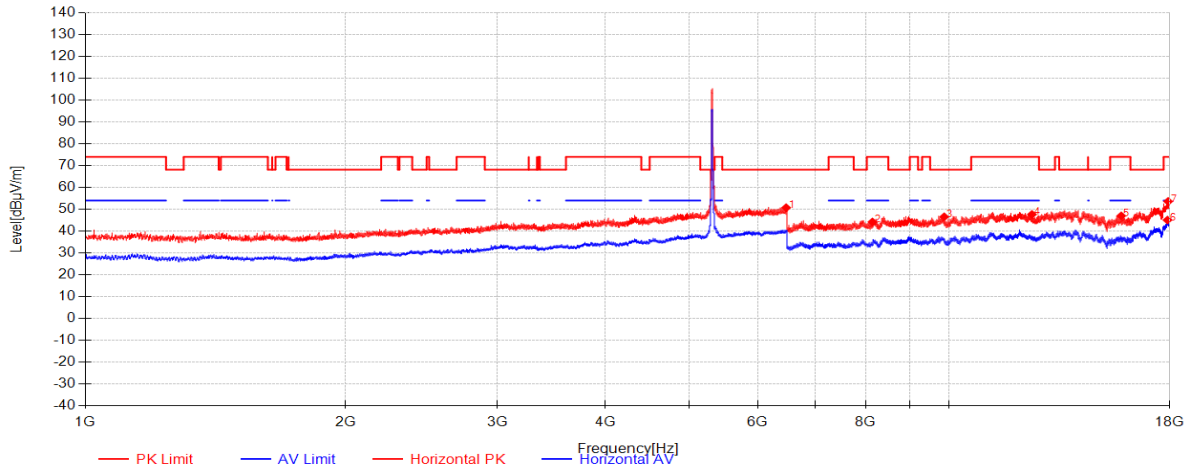


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6472.9231	34.79	35.20	-19.24	50.75	68.20	17.45	Horizontal
2	8146.4167	49.90	36.79	-42.46	44.23	74.00	29.77	Horizontal
3	9863.2708	48.07	38.12	-39.64	46.55	68.20	21.65	Horizontal
4	12461.3125	46.65	38.98	-37.96	47.67	74.00	26.33	Horizontal
5	15809.7292	44.77	39.57	-37.34	47.01	74.00	26.99	Horizontal
6	17881.1667	38.02	42.47	-35.41	45.08	54.00	8.92	Horizontal
7	17914.7083	46.00	42.67	-35.07	53.61	74.00	20.39	Horizontal

11be(EHT20)_TX_CH_64_Vertical

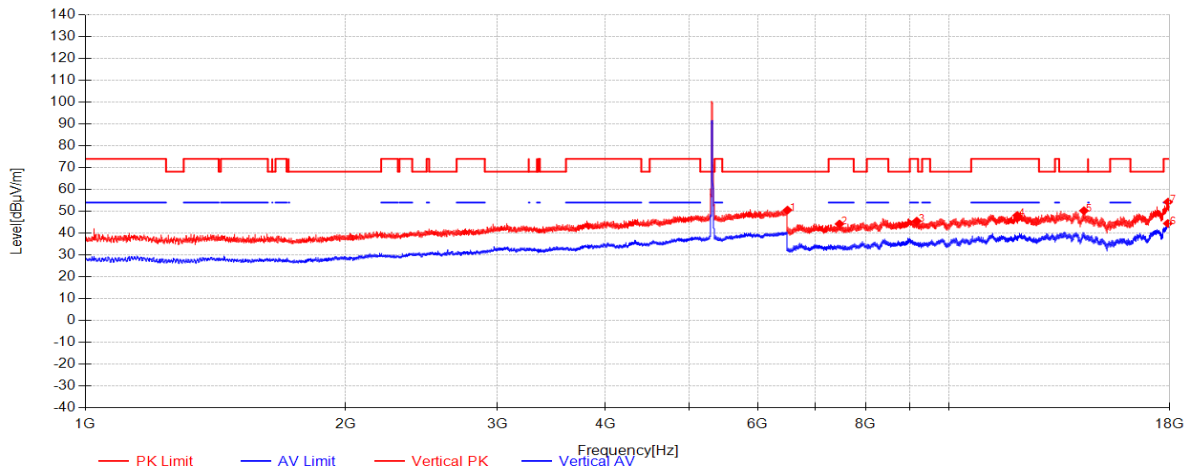


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6496.1923	34.57	35.20	-19.21	50.56	68.20	17.64	Vertical
2	7461.6875	51.40	36.63	-43.80	44.23	74.00	29.77	Vertical
3	9168.9583	49.13	37.94	-41.55	45.52	74.00	28.48	Vertical
4	11980.7083	47.22	38.80	-37.90	48.12	74.00	25.88	Vertical
5	14313.7708	46.18	39.97	-35.87	50.28	68.20	17.92	Vertical
6	17896.5	37.00	42.58	-35.13	44.44	54.00	9.56	Vertical
7	17909.9167	46.69	42.65	-35.07	54.27	74.00	19.73	Vertical

11be(EHT20)_TX_CH_100_Horizontal

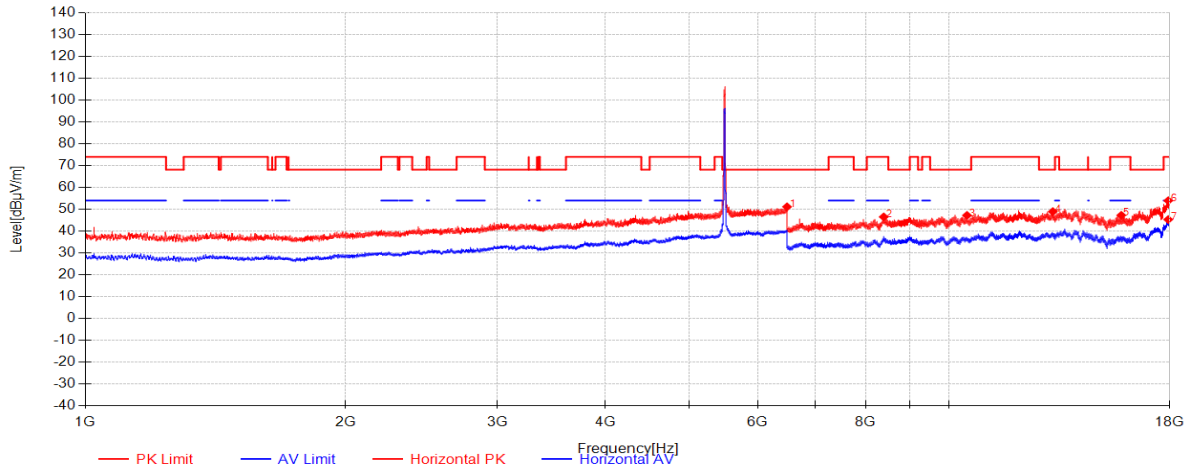


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6488.5769	35.18	35.20	-19.22	51.16	68.20	17.04	Horizontal
2	8395.1042	50.97	37.08	-41.52	46.53	74.00	27.47	Horizontal
3	10479.9583	48.01	38.38	-39.16	47.23	68.20	20.97	Horizontal
4	13174.7917	45.84	39.75	-36.62	48.97	68.20	19.23	Horizontal
5	15811.1667	45.04	39.57	-37.34	47.27	74.00	26.73	Horizontal
6	17920.4583	46.35	42.70	-35.07	53.98	74.00	20.02	Horizontal
7	17920.4583	37.70	42.70	-35.07	45.33	54.00	8.67	Horizontal

11be(EHT20)_TX_CH_100_Veritical

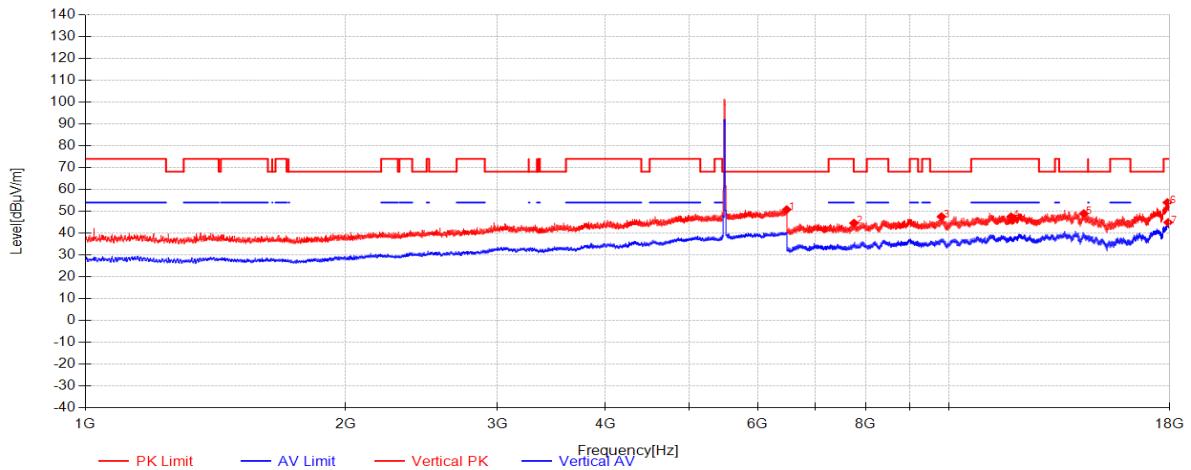


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6483.0769	34.84	35.20	-19.23	50.81	68.20	17.39	Vertical
2	7755.4167	51.00	36.79	-43.18	44.61	68.20	23.59	Vertical
3	9790.9167	48.54	38.15	-39.11	47.57	68.20	20.63	Vertical
4	11786.1667	46.50	38.79	-37.77	47.51	74.00	26.49	Vertical
5	14309.4583	44.86	39.98	-35.84	49.00	68.20	19.20	Vertical
6	17876.8542	47.09	42.44	-35.49	54.04	74.00	19.96	Vertical
7	17915.6667	37.30	42.68	-35.07	44.91	54.00	9.09	Vertical

11be(EHT20)_TX_CH_116_Horizontal

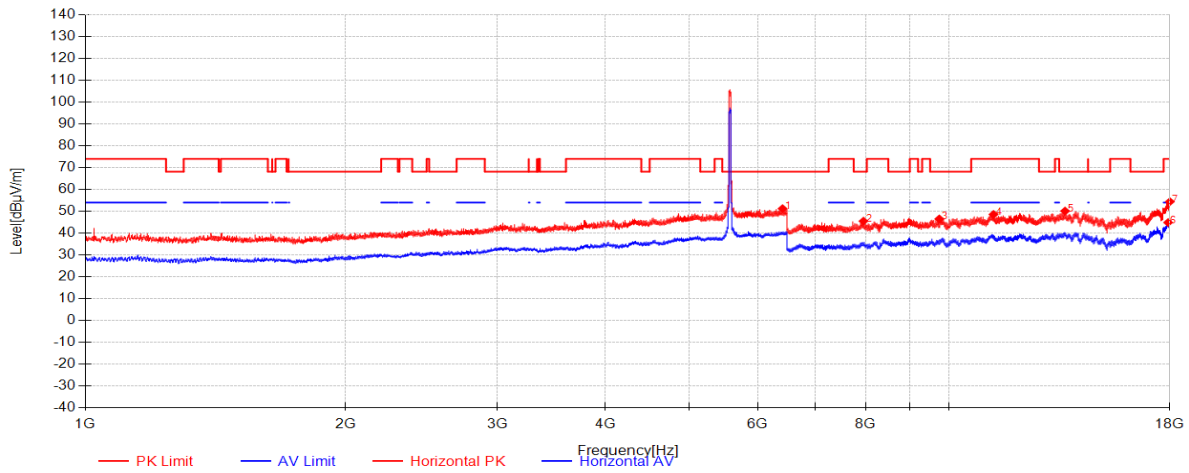


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6411.1538	35.47	35.12	-19.34	51.25	68.20	16.95	Horizontal
2	7954.2708	51.25	37.30	-43.04	45.51	68.20	22.69	Horizontal
3	9734.8542	48.36	37.87	-39.73	46.50	68.20	21.70	Horizontal
4	11248.0625	47.42	38.90	-37.75	48.57	74.00	25.43	Horizontal
5	13610.3542	46.38	39.91	-36.17	50.12	68.20	18.08	Horizontal
6	17912.7917	37.27	42.66	-35.07	44.87	54.00	9.13	Horizontal
7	17998.5625	46.41	43.09	-35.06	54.44	74.00	19.56	Horizontal

11be(EHT20)_TX_CH_116_Vertical

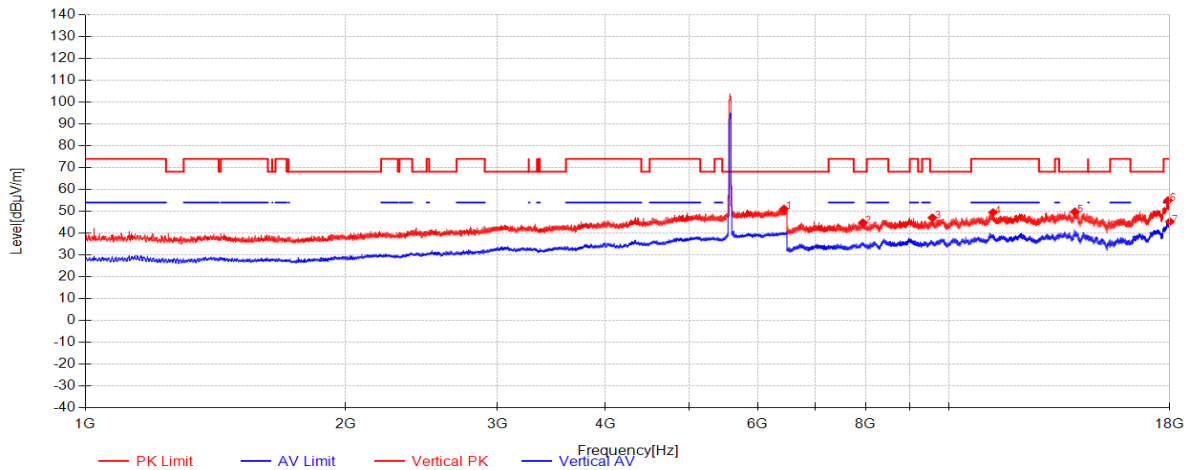


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6436.5385	35.23	35.17	-19.30	51.10	68.20	17.10	Vertical
2	7939.8958	50.58	37.18	-42.98	44.78	68.20	23.42	Vertical
3	9559	49.58	38.38	-40.91	47.05	68.20	21.15	Vertical
4	11234.1667	48.00	38.87	-37.40	49.47	74.00	24.53	Vertical
5	13973.0833	46.02	39.99	-36.20	49.81	68.20	18.39	Vertical
6	17905.125	47.40	42.63	-35.07	54.96	74.00	19.04	Vertical
7	18000	37.25	43.10	-35.06	45.29	54.00	8.71	Vertical

11be(EHT20)_TX_CH_120_Horizontal

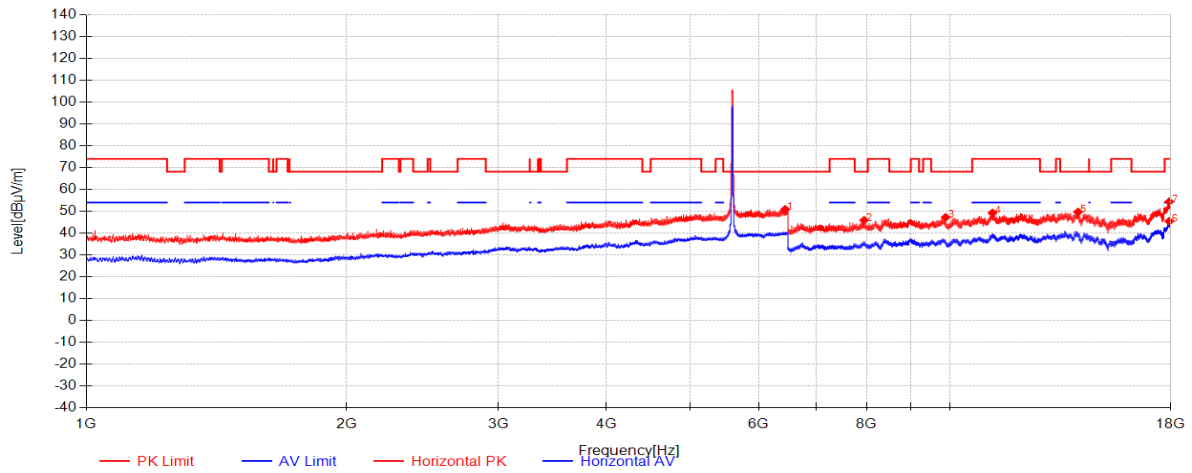


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6438.6538	35.03	35.18	-19.30	50.91	68.20	17.29	Horizontal
2	7947.0833	51.66	37.27	-43.01	45.91	68.20	22.29	Horizontal
3	9875.25	48.96	38.05	-39.75	47.25	68.20	20.95	Horizontal
4	11188.6458	47.19	38.85	-36.77	49.27	74.00	24.73	Horizontal
5	14053.1042	45.93	39.94	-36.15	49.72	68.20	18.48	Horizontal
6	17914.7083	37.83	42.67	-35.07	45.44	54.00	8.56	Horizontal
7	17918.0625	46.78	42.69	-35.07	54.40	74.00	19.60	Horizontal

11be(EHT20)_TX_CH_120_Vertical

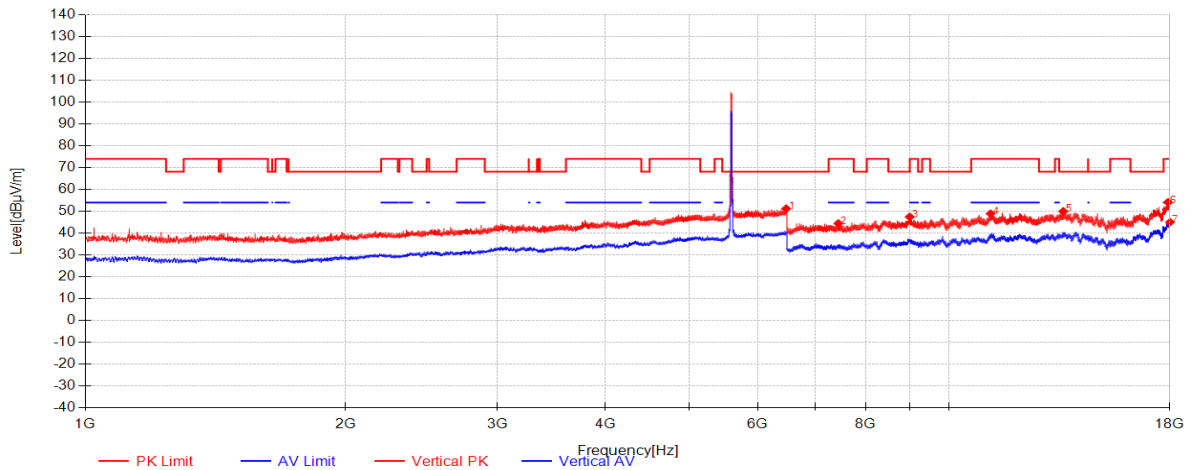


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6472.9231	35.26	35.20	-19.24	51.22	68.20	16.98	Vertical
2	7438.6875	51.82	36.63	-44.01	44.44	74.00	29.56	Vertical
3	8996.4583	49.90	38.19	-40.62	47.47	68.20	20.73	Vertical
4	11160.8542	47.32	38.96	-37.35	48.92	74.00	25.08	Vertical
5	13543.2708	47.02	40.01	-37.04	49.99	68.20	18.21	Vertical
6	17905.6042	46.57	42.63	-35.07	54.13	74.00	19.87	Vertical
7	17999.0417	36.99	43.10	-35.06	45.03	54.00	8.97	Vertical

11be(EHT20)_TX_CH_124_Horizontal

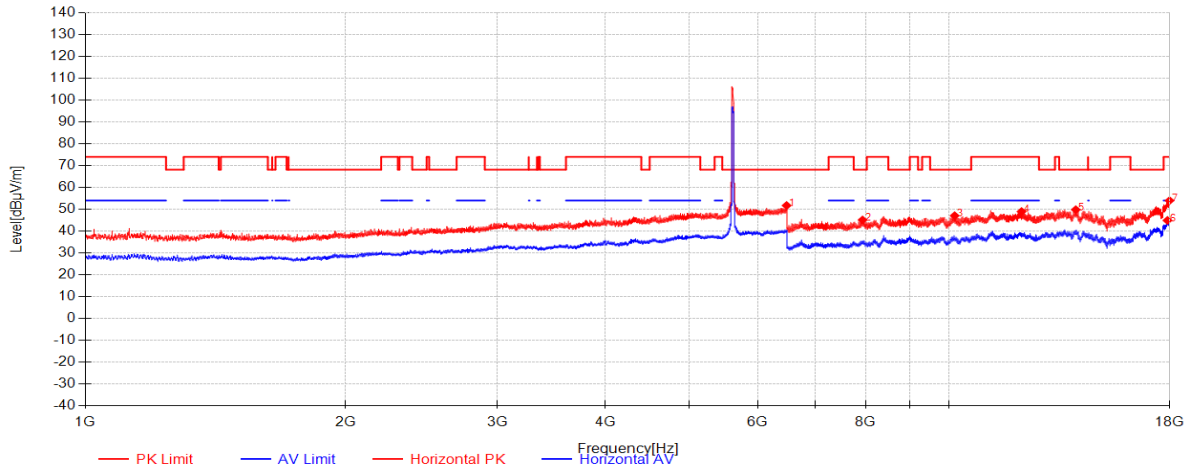


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6480.9615	35.79	35.20	-19.23	51.76	68.20	16.44	Horizontal
2	7934.625	50.98	37.12	-42.96	45.13	68.20	23.07	Horizontal
3	10141.6667	47.50	38.48	-38.89	47.09	68.20	21.11	Horizontal
4	12120.1458	46.57	39.04	-36.65	48.96	74.00	25.04	Horizontal
5	14005.6667	45.70	40.08	-35.94	49.84	68.20	18.36	Horizontal
6	17882.125	37.84	42.47	-35.39	44.92	54.00	9.08	Horizontal
7	17980.8333	46.06	43.00	-35.06	54.00	74.00	20.00	Horizontal

11be(EHT20)_TX_CH_124_Vertical

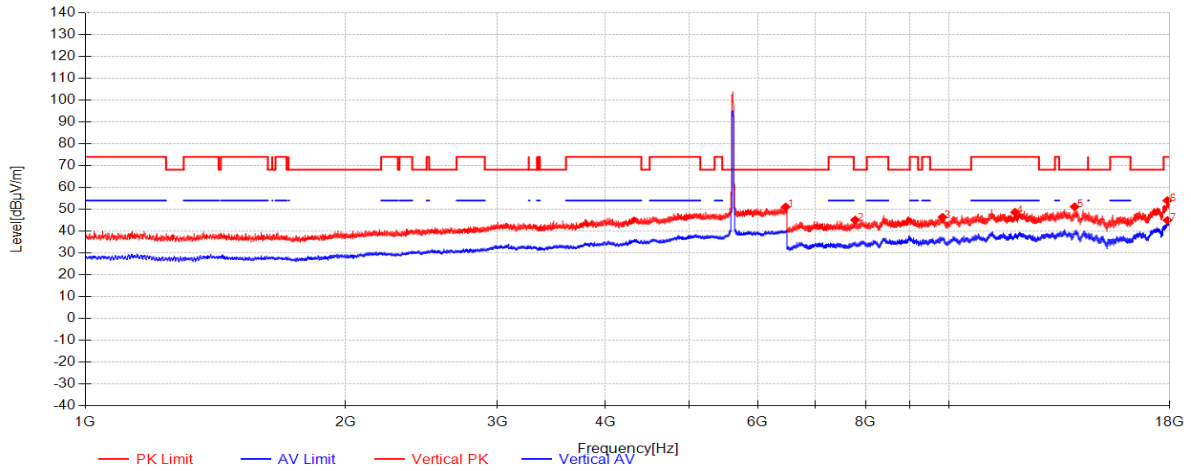


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6465.3077	35.16	35.20	-19.26	51.10	68.20	17.10	Vertical
2	7779.375	51.61	36.74	-43.22	45.13	68.20	23.07	Vertical
3	9818.2292	47.42	38.20	-39.19	46.43	68.20	21.77	Vertical
4	11916.0208	48.34	38.80	-38.47	48.67	74.00	25.33	Vertical
5	13961.5833	47.56	39.95	-36.32	51.18	68.20	17.02	Vertical
6	17876.375	47.07	42.43	-35.50	54.01	74.00	19.99	Vertical
7	17876.8542	38.01	42.44	-35.49	44.96	54.00	9.04	Vertical

11be(EHT20)_TX_CH_128_Horizontal

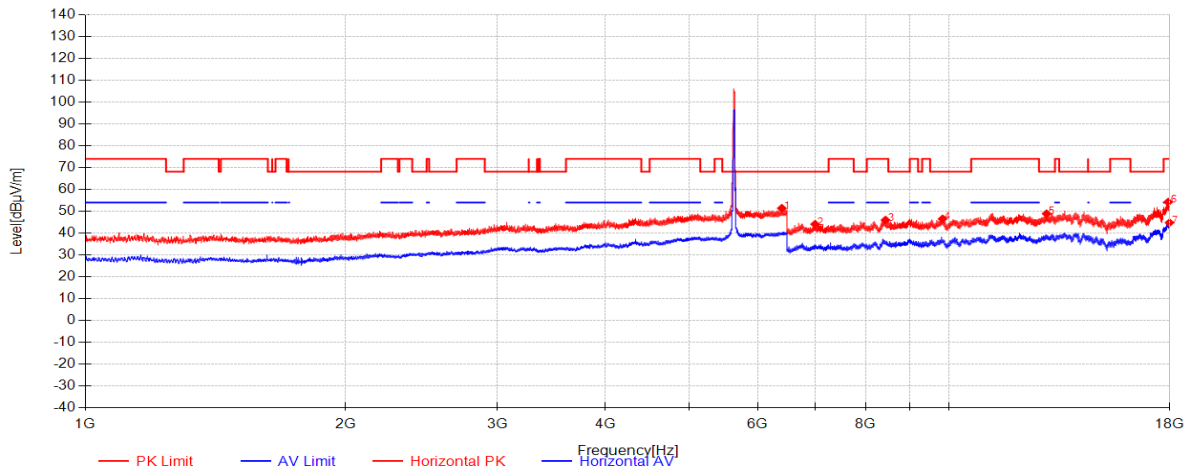


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6399.7308	35.67	35.10	-19.36	51.41	68.20	16.79	Horizontal
2	6992.5833	51.75	36.01	-43.69	44.08	68.20	24.12	Horizontal
3	8435.8333	50.38	37.46	-41.82	46.02	74.00	27.98	Horizontal
4	9820.1458	47.56	38.20	-39.21	46.55	68.20	21.65	Horizontal
5	12956.7708	46.77	39.71	-37.58	48.90	68.20	19.30	Horizontal
6	17915.1875	46.63	42.68	-35.07	54.24	74.00	19.76	Horizontal
7	17978.4375	36.86	42.99	-35.06	44.79	54.00	9.21	Horizontal

11be(EHT20)_TX_CH_128_Vertical

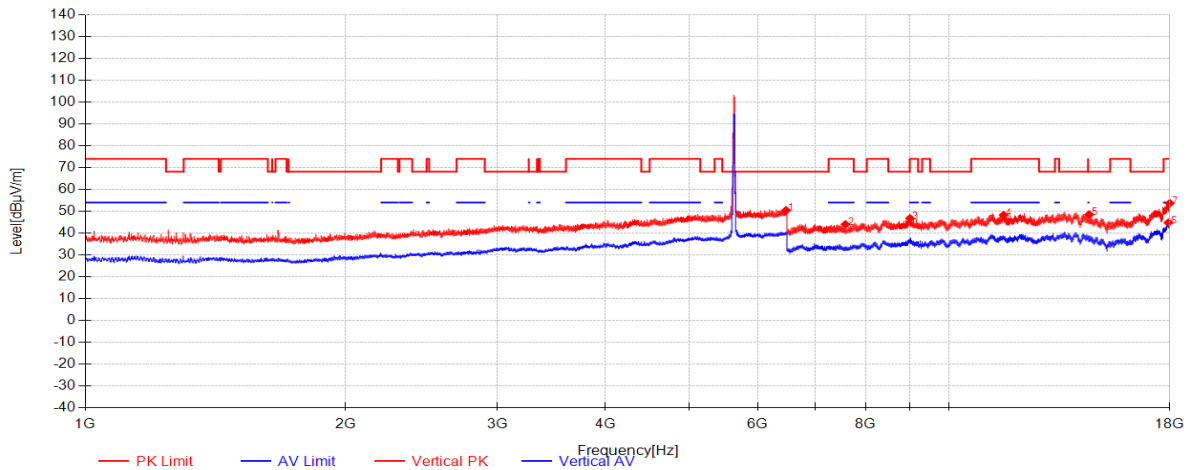


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6469.9615	34.50	35.20	-19.25	50.45	68.20	17.75	Vertical
2	7580.5208	51.44	36.00	-43.43	44.01	74.00	29.99	Vertical
3	9003.1667	49.22	38.19	-40.62	46.79	74.00	27.21	Vertical
4	11554.7292	46.15	38.90	-36.77	48.28	74.00	25.72	Vertical
5	14513.1042	45.06	39.96	-36.46	48.56	68.20	19.64	Vertical
6	17927.6458	37.15	42.74	-35.07	44.82	54.00	9.18	Vertical
7	17988.5	45.73	43.04	-35.06	53.71	74.00	20.29	Vertical

11be(EHT20)_TX_CH_134_Horizontal

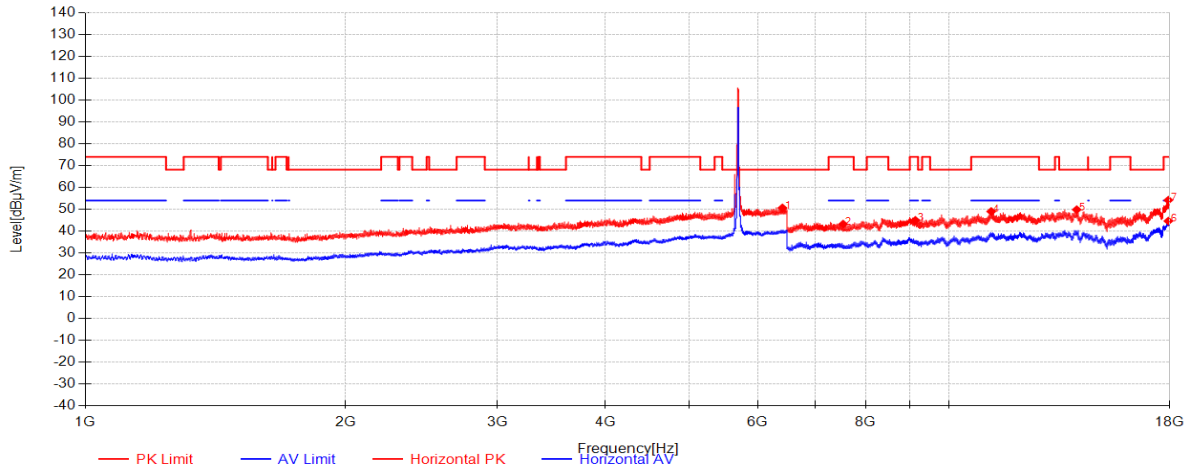


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6409.0385	34.87	35.12	-19.35	50.64	68.20	17.56	Horizontal
2	7535	50.55	36.12	-43.44	43.23	74.00	30.77	Horizontal
3	9133.9792	48.48	37.96	-41.50	44.95	74.00	29.05	Horizontal
4	11179.5417	47.09	38.88	-36.96	49.01	74.00	24.99	Horizontal
5	14040.6458	45.96	39.98	-36.10	49.84	68.20	18.36	Horizontal
6	17923.8125	36.98	42.72	-35.07	44.63	54.00	9.37	Horizontal
7	17925.25	46.55	42.73	-35.07	54.21	74.00	19.79	Horizontal

11be(EHT20)_TX_CH_134_Vertical

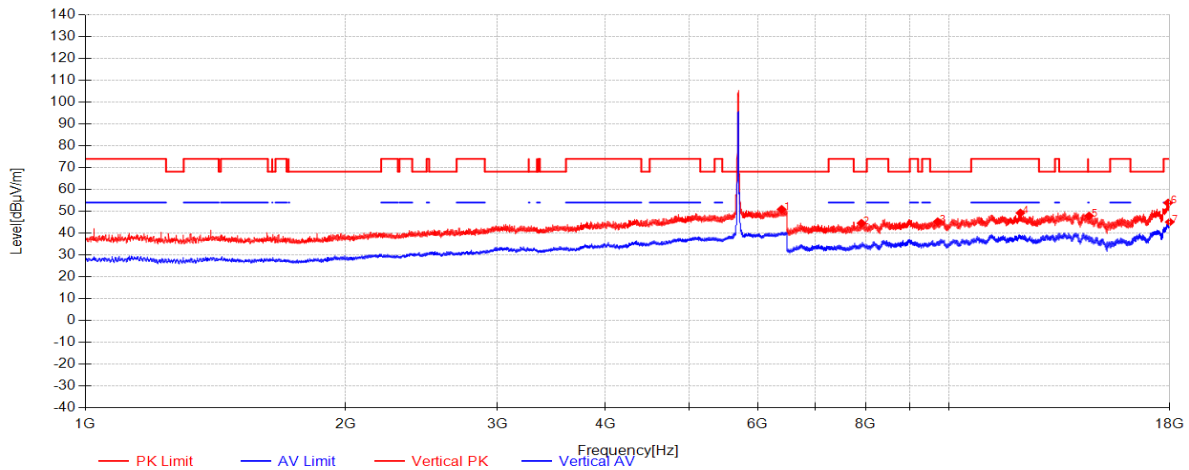


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6395.5	35.20	35.05	-19.35	50.90	68.20	17.30	Vertical
2	7911.625	50.57	36.84	-42.87	44.54	68.20	23.66	Vertical
3	9692.6875	47.58	37.83	-40.17	45.24	68.20	22.96	Vertical
4	12084.6875	47.04	38.97	-36.76	49.24	74.00	24.76	Vertical
5	14510.7083	44.36	39.97	-36.44	47.89	68.20	20.31	Vertical
6	17914.7083	46.24	42.67	-35.07	53.85	74.00	20.15	Vertical
7	17991.8542	37.10	43.06	-35.06	45.10	54.00	8.90	Vertical

11be(EHT20)_TX_CH_144_Horizontal

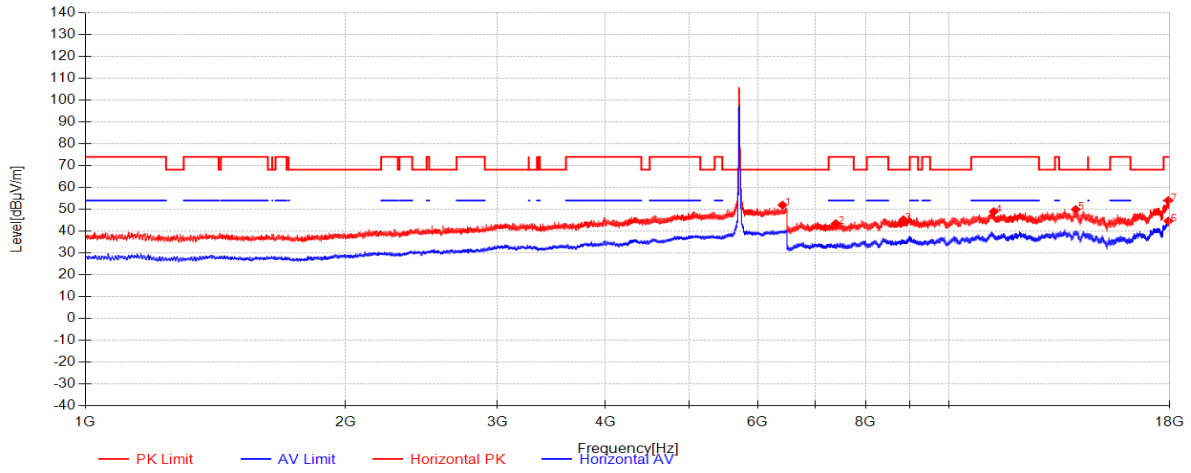


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6409.0385	36.16	35.12	-19.35	51.93	68.20	16.27	Horizontal
2	7387.8958	51.43	36.38	-44.29	43.52	74.00	30.48	Horizontal
3	8847.4375	48.94	37.81	-41.48	45.26	68.20	22.94	Horizontal
4	11254.7708	47.96	38.91	-37.92	48.95	74.00	25.05	Horizontal
5	14002.3125	45.80	40.09	-35.93	49.96	68.20	18.24	Horizontal
6	17921.4167	37.00	42.71	-35.07	44.64	54.00	9.36	Horizontal
7	17922.8542	46.43	42.71	-35.07	54.08	74.00	19.92	Horizontal

11be(EHT20)_TX_CH_144_Vertical

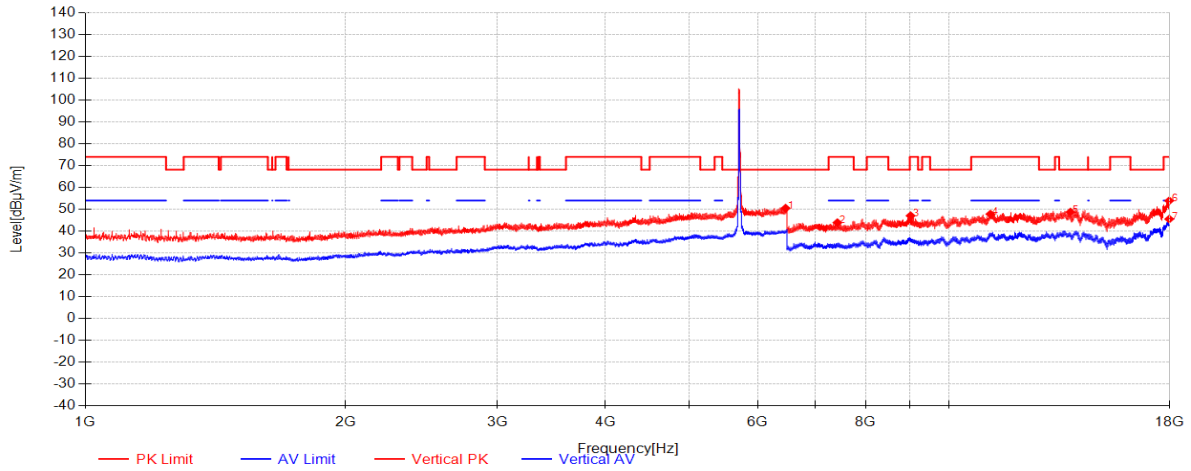


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6463.1923	34.58	35.20	-19.26	50.52	68.20	17.68	Vertical
2	7420.4792	51.54	36.52	-44.18	43.88	74.00	30.12	Vertical
3	9017.5417	49.67	38.13	-40.74	47.06	74.00	26.94	Vertical
4	11154.1458	46.33	38.98	-37.49	47.82	74.00	26.18	Vertical
5	13807.7708	45.68	39.88	-36.79	48.77	68.20	19.43	Vertical
6	17965.5	46.07	42.93	-35.06	53.93	74.00	20.07	Vertical
7	17966.4583	37.67	42.93	-35.06	45.54	54.00	8.46	Vertical

11be(EHT20)_TX_CH_149_Horizontal

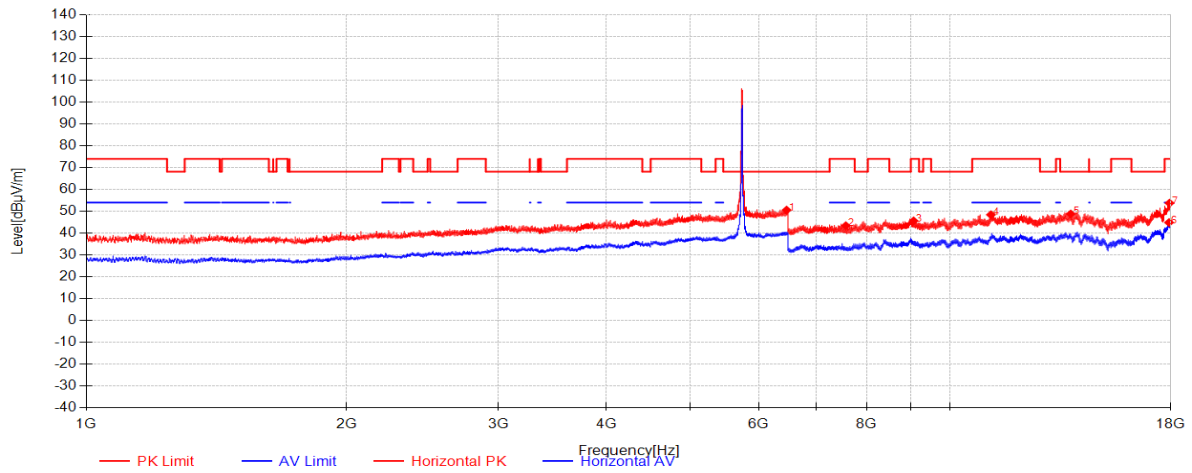


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6463.6154	34.64	35.20	-19.26	50.58	68.20	17.62	Horizontal
2	7568.5417	50.85	36.00	-43.44	43.41	74.00	30.59	Horizontal
3	9066.4167	48.75	38.03	-41.16	45.62	74.00	28.38	Horizontal
4	11142.6458	47.14	39.03	-37.73	48.43	74.00	25.57	Horizontal
5	13782.8542	45.66	39.92	-36.78	48.80	68.20	19.40	Horizontal
6	17910.875	37.28	42.65	-35.07	44.87	54.00	9.13	Horizontal
7	17932.4375	46.08	42.76	-35.07	53.78	74.00	20.22	Horizontal

11be(EHT20)_TX_CH_149_Vertical

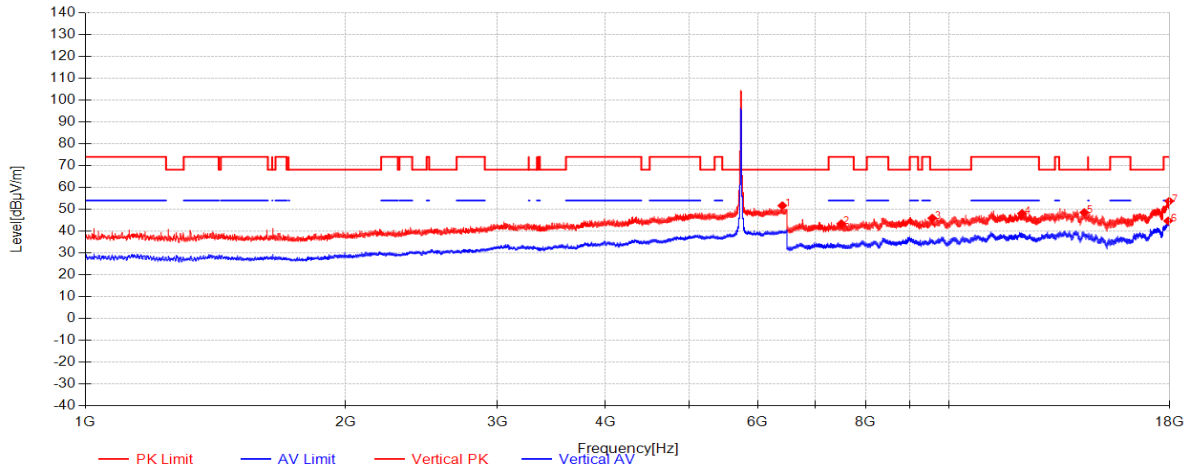


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6407.3462	35.92	35.11	-19.35	51.69	68.20	16.51	Vertical
2	7498.5833	50.48	36.41	-43.46	43.43	74.00	30.57	Vertical
3	9555.6458	48.50	38.39	-40.92	45.96	68.20	22.24	Vertical
4	12136.4375	45.71	39.07	-36.70	48.09	74.00	25.91	Vertical
5	14327.1875	44.59	39.95	-35.96	48.57	68.20	19.63	Vertical
6	17914.7083	37.08	42.67	-35.07	44.69	54.00	9.31	Vertical
7	17969.3333	45.88	42.95	-35.06	53.76	74.00	20.24	Vertical

11be(EHT20)_TX_CH_157_Horizontal

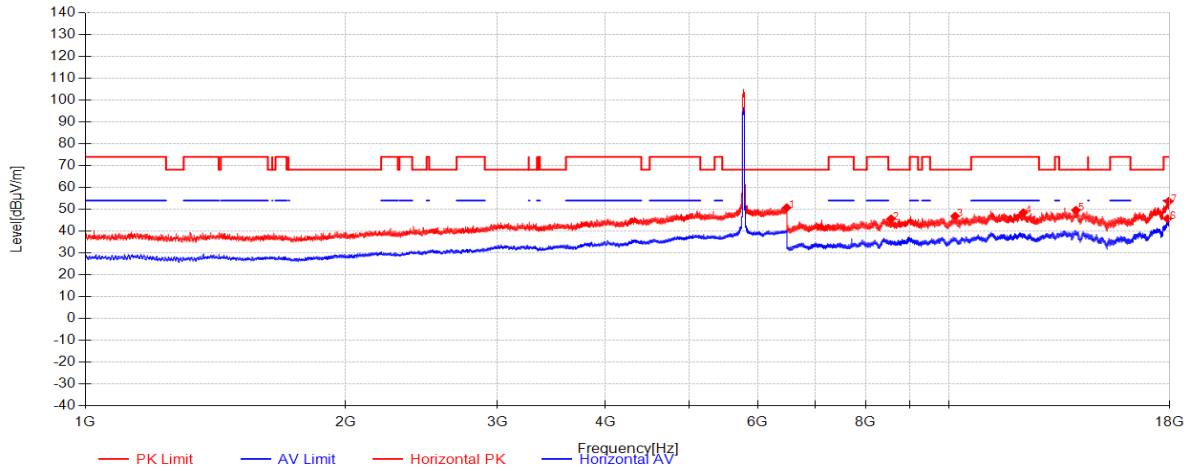


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6483.0769	34.76	35.20	-19.23	50.73	68.20	17.47	Horizontal
2	8561.8542	49.93	37.65	-41.91	45.67	68.20	22.53	Horizontal
3	10154.6042	47.34	38.44	-38.91	46.86	68.20	21.34	Horizontal
4	12179.5625	46.17	39.16	-36.82	48.51	74.00	25.49	Horizontal
5	14011.8958	45.52	40.06	-35.97	49.61	68.20	18.59	Horizontal
6	17884.5208	38.63	42.49	-35.35	45.77	54.00	8.23	Horizontal
7	17937.2292	45.96	42.79	-35.07	53.68	74.00	20.32	Horizontal

11be(EHT20)_TX_CH_157_Vertical

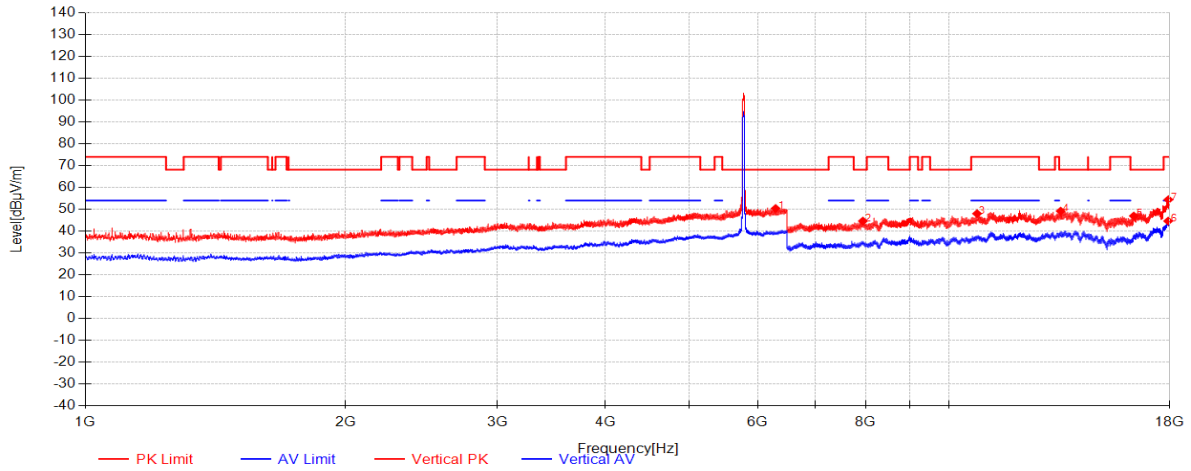


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6293.9615	35.33	34.29	-19.22	50.40	68.20	17.80	Vertical
2	7941.8125	50.41	37.20	-42.99	44.62	68.20	23.58	Vertical
3	10766.0208	47.68	38.86	-38.51	48.03	74.00	25.97	Vertical
4	13454.1458	46.91	40.01	-37.74	49.18	68.20	19.02	Vertical
5	16346.3958	45.78	38.49	-37.30	46.97	68.20	21.23	Vertical
6	17915.6667	37.01	42.68	-35.07	44.62	54.00	9.38	Vertical
7	17927.1667	46.78	42.74	-35.07	54.45	74.00	19.55	Vertical

11be(EHT20)_TX_CH_165_Horizontal

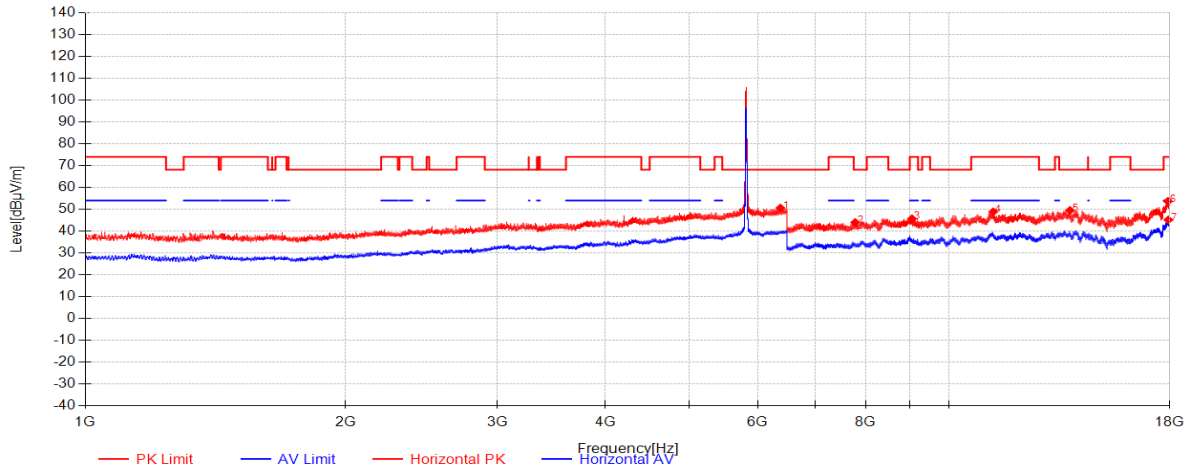


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6373.9231	35.08	34.84	-19.32	50.60	68.20	17.60	Horizontal
2	7780.8125	50.46	36.74	-43.22	43.98	68.20	24.22	Horizontal
3	9051.5625	48.75	38.00	-41.03	45.72	74.00	28.28	Horizontal
4	11239.4375	47.52	38.88	-37.53	48.87	74.00	25.13	Horizontal
5	13791.4792	46.39	39.91	-36.78	49.52	68.20	18.68	Horizontal
6	17906.0833	46.12	42.63	-35.07	53.68	74.00	20.32	Horizontal
7	17924.7708	37.52	42.72	-35.07	45.18	54.00	8.82	Horizontal

11be(EHT20)_TX_CH_165_Vertical

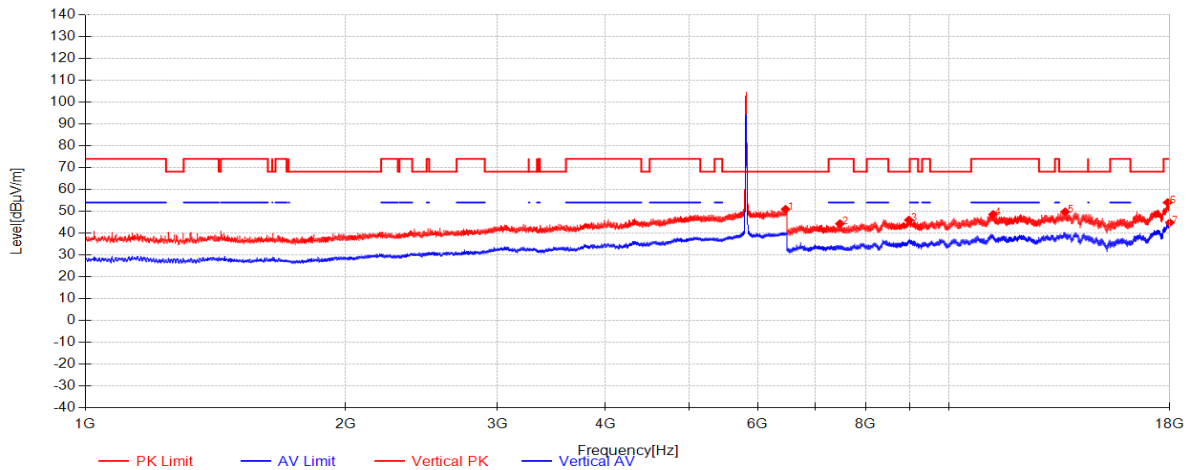


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6463.1923	35.03	35.20	-19.26	50.97	68.20	17.23	Vertical
2	7470.7917	51.48	36.58	-43.72	44.34	74.00	29.66	Vertical
3	8977.2917	48.64	38.15	-40.79	46.00	68.20	22.20	Vertical
4	11235.125	47.12	38.87	-37.42	48.57	74.00	25.43	Vertical
5	13615.1458	46.08	39.92	-36.20	49.80	68.20	18.40	Vertical
6	17894.1042	46.67	42.56	-35.18	54.05	74.00	19.95	Vertical
7	17995.2083	36.79	43.08	-35.06	44.81	54.00	9.19	Vertical

11be(EHT40)_TX_CH_38_Horizontal

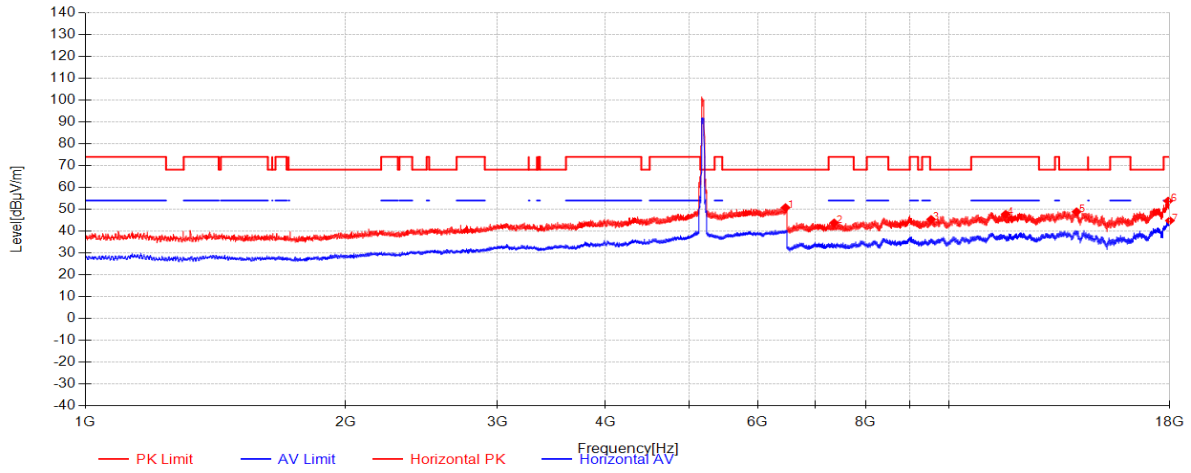


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6462.3462	34.84	35.20	-19.26	50.78	68.20	17.42	Horizontal
2	7356.75	51.57	36.31	-44.08	43.80	74.00	30.20	Horizontal
3	9524.5	48.04	38.35	-41.01	45.38	68.20	22.82	Horizontal
4	11618.9375	45.54	38.86	-36.65	47.75	74.00	26.25	Horizontal
5	14033.9375	44.95	40.00	-36.07	48.88	68.20	19.32	Horizontal
6	17913.75	46.21	42.67	-35.07	53.81	74.00	20.19	Horizontal
7	17996.6458	36.82	43.08	-35.06	44.84	54.00	9.16	Horizontal

11be(EHT40)_TX_CH_38_Vertical

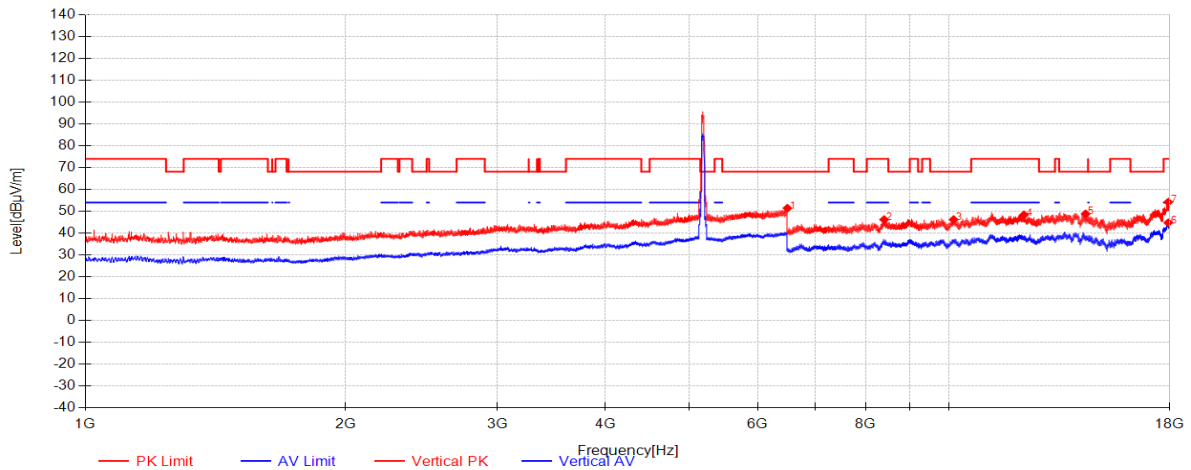


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6494.5	35.46	35.20	-19.21	51.45	68.20	16.75	Vertical
2	8405.1667	50.52	37.15	-41.45	46.22	74.00	27.78	Vertical
3	10113.875	46.51	38.56	-38.84	46.23	68.20	21.97	Vertical
4	12199.6875	46.06	39.20	-36.88	48.38	74.00	25.62	Vertical
5	14376.0625	45.29	39.85	-36.31	48.83	68.20	19.37	Vertical
6	17919.0208	37.15	42.70	-35.07	44.78	54.00	9.22	Vertical
7	17920.9375	46.60	42.70	-35.07	54.24	74.00	19.76	Vertical

11be(EHT40)_TX_CH_46_Horizontal

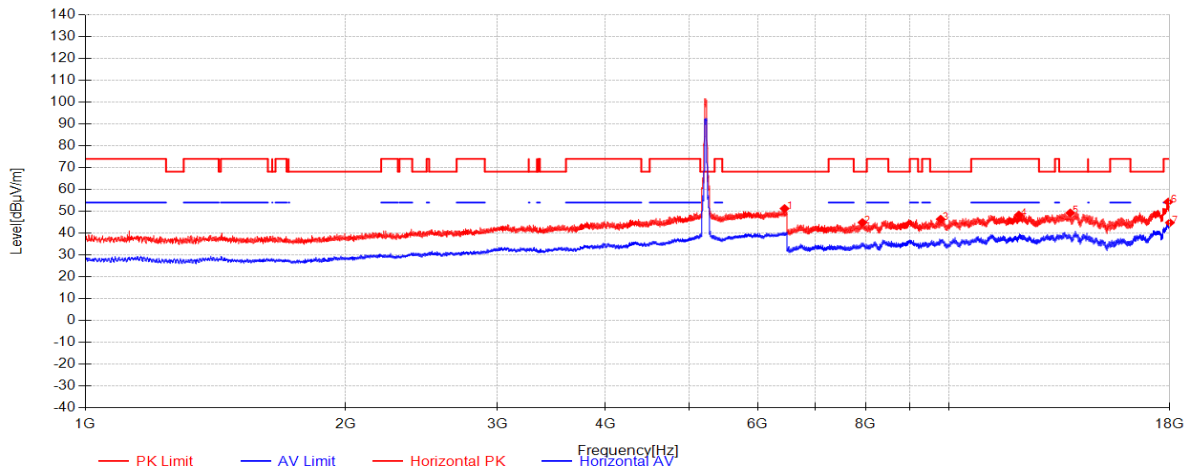


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6446.2692	35.36	35.19	-19.29	51.27	68.20	16.93	Horizontal
2	7931.2708	50.73	37.08	-42.95	44.86	68.20	23.34	Horizontal
3	9771.75	47.68	38.03	-39.32	46.39	68.20	21.81	Horizontal
4	12033.4167	46.80	38.87	-37.35	48.32	74.00	25.68	Horizontal
5	13802.9792	46.18	39.89	-36.79	49.29	68.20	18.91	Horizontal
6	17919.0208	46.65	42.70	-35.07	54.28	74.00	19.72	Horizontal
7	17996.6458	36.76	43.08	-35.06	44.78	54.00	9.22	Horizontal

11be(EHT40)_TX_CH_46_Vertical

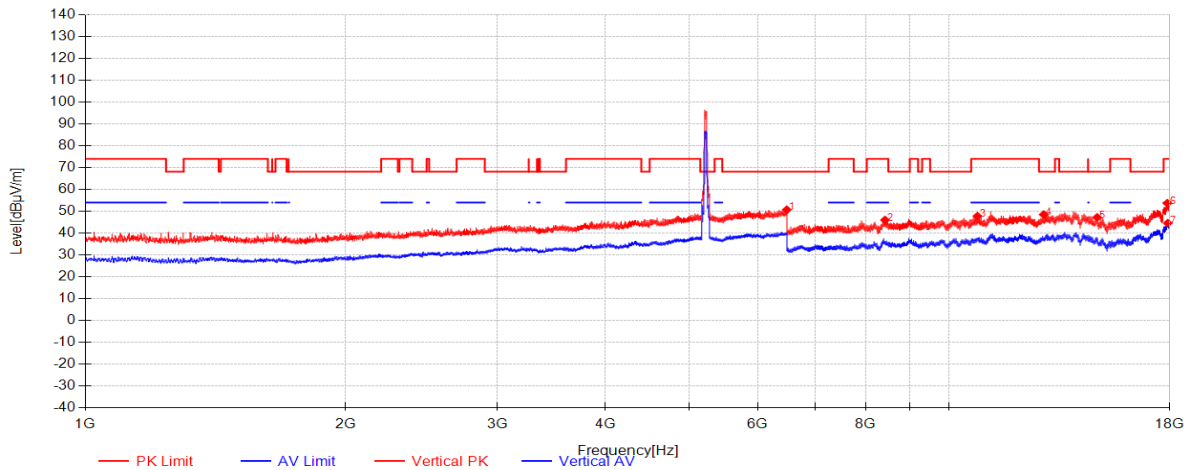


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6483.5	34.75	35.20	-19.23	50.72	68.20	17.48	Vertical
2	8424.3333	50.37	37.34	-41.68	46.03	74.00	27.97	Vertical
3	10776.5625	47.26	38.91	-38.38	47.79	74.00	26.21	Vertical
4	12857.1042	46.97	39.51	-37.99	48.50	68.20	19.70	Vertical
5	14826.4792	44.75	39.62	-37.14	47.24	68.20	20.96	Vertical
6	17874.9375	46.81	42.42	-35.52	53.71	74.00	20.29	Vertical
7	17898.4167	37.08	42.59	-35.10	44.57	54.00	9.43	Vertical

11be(EHT40)_TX_CH_54_Horizontal

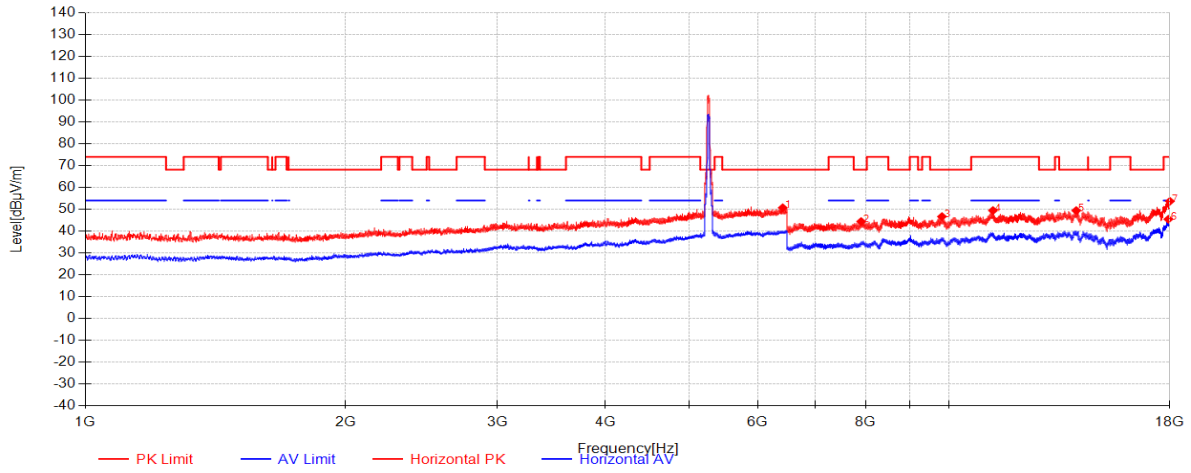


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6414.1154	34.96	35.13	-19.34	50.75	68.20	17.45	Horizontal
2	7904.9167	50.50	36.76	-42.84	44.42	68.20	23.78	Horizontal
3	9804.8125	47.55	38.20	-39.06	46.69	68.20	21.51	Horizontal
4	11231.7708	47.94	38.86	-37.34	49.47	74.00	24.53	Horizontal
5	14022.9167	45.44	40.03	-36.02	49.45	68.20	18.75	Horizontal
6	17921.8958	37.83	42.71	-35.07	45.47	54.00	8.53	Horizontal
7	17997.125	45.66	43.09	-35.06	53.69	74.00	20.31	Horizontal

11be(EHT40)_TX_CH_54_Vertical

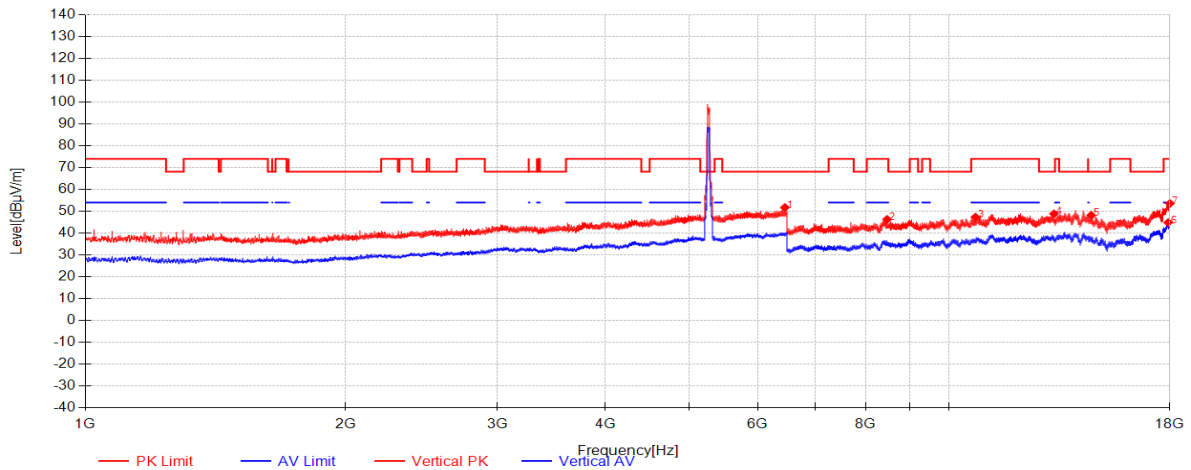


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6451.3462	35.84	35.20	-19.28	51.76	68.20	16.44	Vertical
2	8471.7708	50.93	37.64	-42.24	46.33	74.00	27.67	Vertical
3	10718.5833	47.82	38.67	-39.11	47.38	74.00	26.62	Vertical
4	13215.0417	45.75	39.80	-36.69	48.86	68.20	19.34	Vertical
5	14592.1667	45.62	39.72	-37.13	48.21	68.20	19.99	Vertical
6	17918.0625	37.24	42.69	-35.07	44.86	54.00	9.14	Vertical
7	17998.0833	45.57	43.09	-35.06	53.60	74.00	20.40	Vertical

11be(EHT40)_TX_CH_62_Horizontal

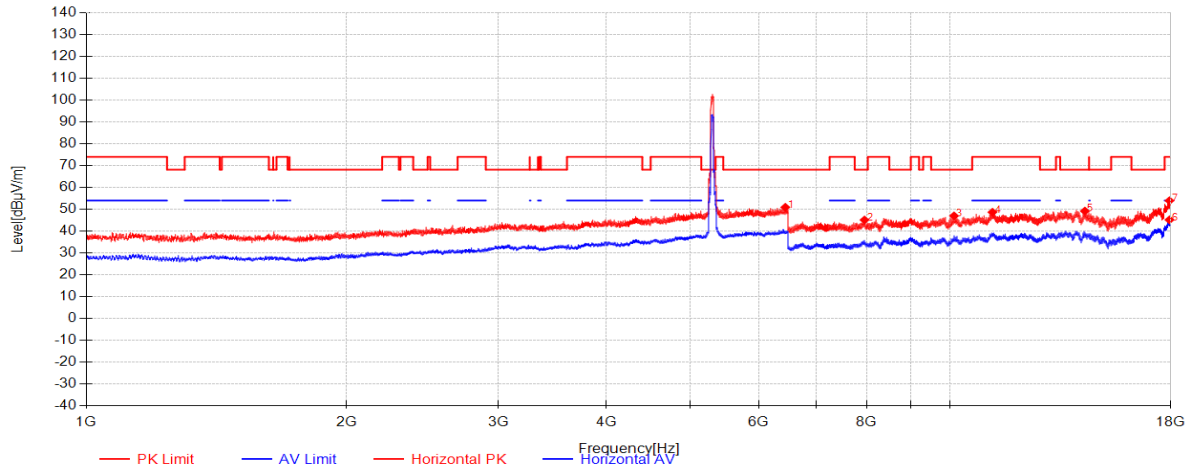


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6441.1923	35.06	35.18	-19.29	50.95	68.20	17.25	Horizontal
2	7954.75	50.88	37.30	-43.04	45.14	68.20	23.06	Horizontal
3	10097.5833	47.28	38.59	-38.88	46.99	68.20	21.21	Horizontal
4	11186.25	46.64	38.86	-36.82	48.68	74.00	25.32	Horizontal
5	14309.4583	45.06	39.98	-35.84	49.20	68.20	19.00	Horizontal
6	17928.125	37.51	42.74	-35.07	45.18	54.00	8.82	Horizontal
7	17929.0833	46.29	42.75	-35.07	53.97	74.00	20.03	Horizontal

11be(EHT40)_TX_CH_62_Vertical

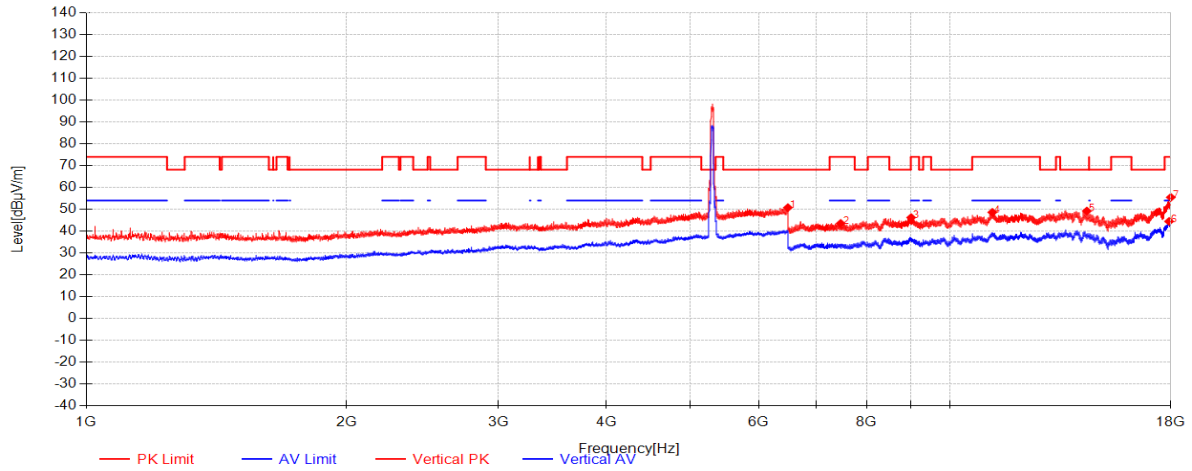


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6485.6154	34.80	35.20	-19.22	50.78	68.20	17.42	Vertical
2	7465.5208	50.74	36.61	-43.77	43.58	74.00	30.42	Vertical
3	9007.9583	48.72	38.17	-40.66	46.23	74.00	27.77	Vertical
4	11183.8542	46.62	38.86	-36.87	48.62	74.00	25.38	Vertical
5	14386.125	45.77	39.83	-36.38	49.22	68.20	18.98	Vertical
6	17911.8333	36.87	42.66	-35.07	44.46	54.00	9.54	Vertical
7	17994.25	47.49	43.07	-35.06	55.50	74.00	18.50	Vertical

11be(EHT40)_TX_CH_102_Horizontal

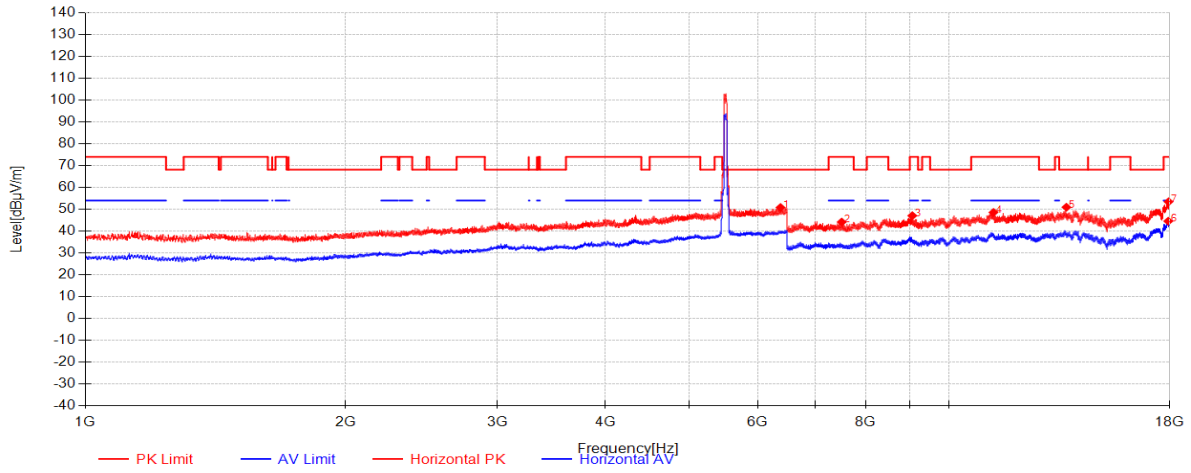


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6376.0385	35.31	34.86	-19.33	50.84	68.20	17.36	Horizontal
2	7506.25	51.27	36.35	-43.45	44.17	74.00	29.83	Horizontal
3	9060.1875	50.18	38.02	-41.11	47.09	74.00	26.91	Horizontal
4	11247.1042	47.42	38.89	-37.73	48.59	74.00	25.41	Horizontal
5	13661.1458	47.50	39.96	-36.50	50.96	68.20	17.24	Horizontal
6	17919.0208	36.94	42.70	-35.07	44.57	54.00	9.43	Horizontal
7	17933.875	45.77	42.77	-35.07	53.47	74.00	20.53	Horizontal

11be(EHT40)_TX_CH_102_Vertical

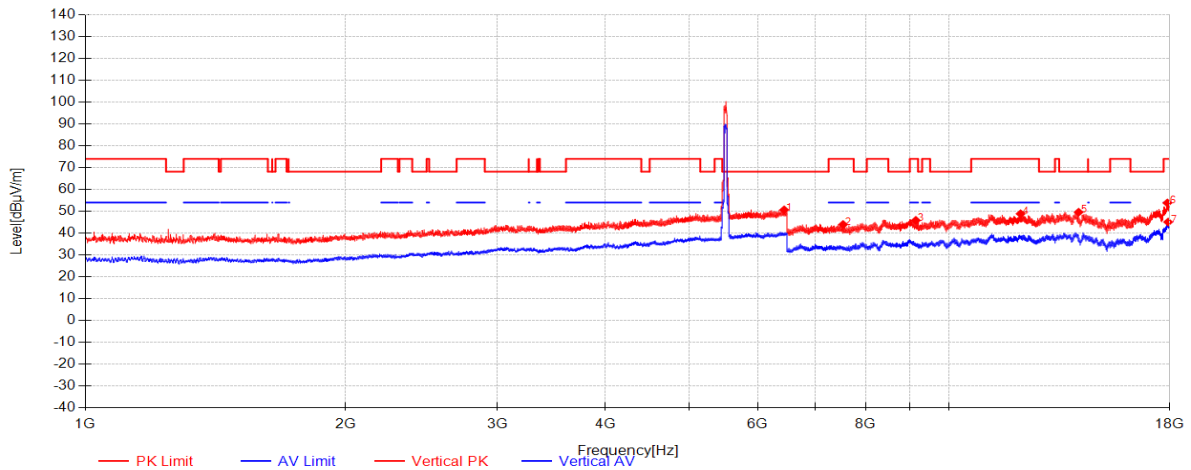


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6438.2308	34.80	35.18	-19.30	50.68	68.20	17.52	Vertical
2	7533.5625	51.27	36.13	-43.44	43.96	74.00	30.04	Vertical
3	9145.9583	49.47	37.92	-41.51	45.87	74.00	28.13	Vertical
4	12090.4375	46.58	38.98	-36.70	48.86	74.00	25.14	Vertical
5	14111.0833	46.42	39.84	-36.66	49.60	68.20	18.60	Vertical
6	17877.8125	46.86	42.44	-35.47	53.84	74.00	20.16	Vertical
7	17913.75	37.50	42.67	-35.07	45.10	54.00	8.90	Vertical

11be(EHT40)_TX_CH_110_Horizontal

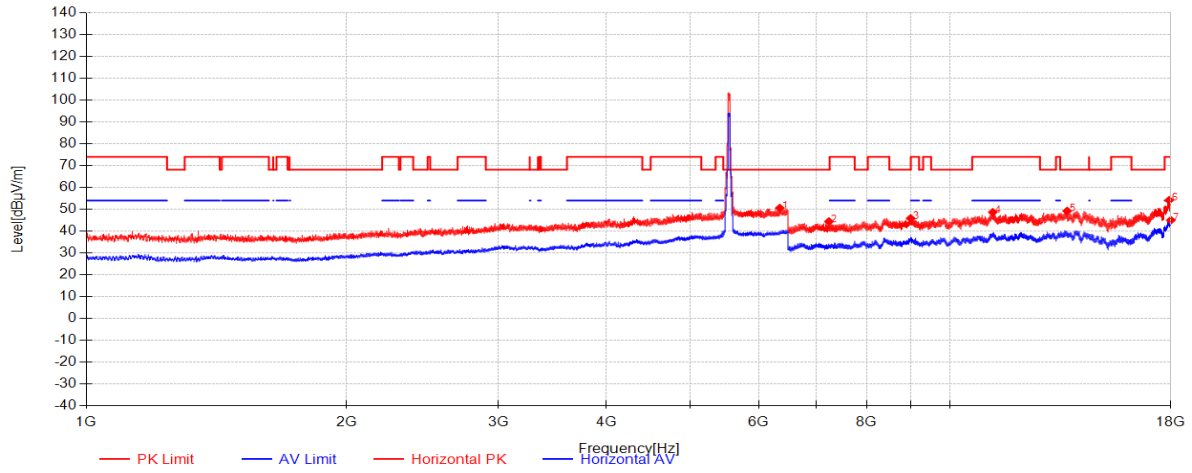


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6347.2692	35.30	34.58	-19.29	50.60	68.20	17.60	Horizontal
2	7234.5625	52.00	36.76	-44.38	44.38	68.20	23.82	Horizontal
3	8996.4583	48.29	38.19	-40.62	45.86	68.20	22.34	Horizontal
4	11196.3125	46.45	38.81	-36.61	48.66	74.00	25.34	Horizontal
5	13651.0833	45.73	39.95	-36.44	49.24	68.20	18.96	Horizontal
6	17914.7083	46.56	42.67	-35.07	54.17	74.00	19.83	Horizontal
7	17994.7292	37.00	43.07	-35.06	45.01	54.00	8.99	Horizontal

11be(EHT40)_TX_CH_110_Vertical

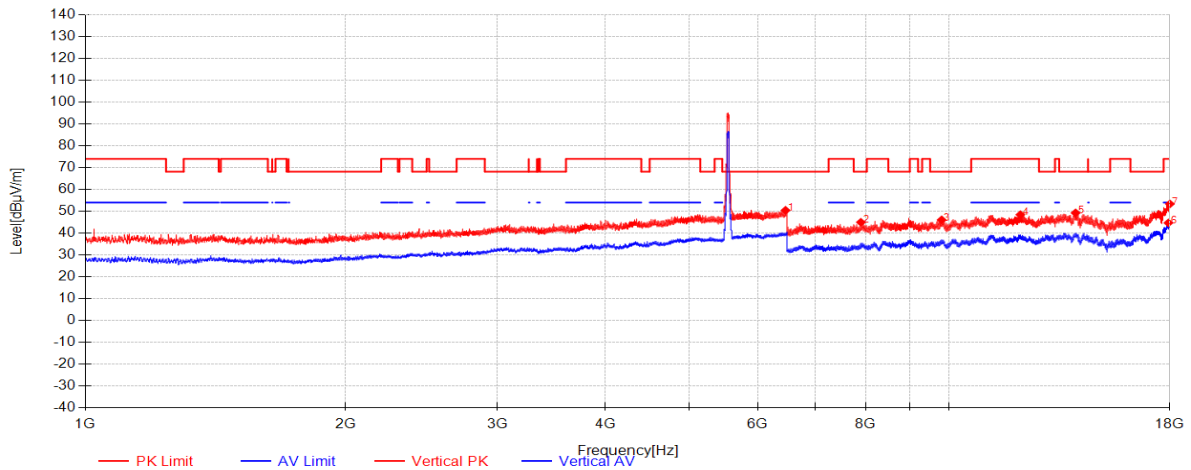


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6462.7692	34.53	35.20	-19.26	50.47	68.20	17.73	Vertical
2	7899.6458	51.10	36.70	-42.82	44.98	68.20	23.22	Vertical
3	9796.6667	46.95	38.18	-39.05	46.08	68.20	22.12	Vertical
4	12082.7708	46.27	38.97	-36.79	48.45	74.00	25.55	Vertical
5	13998	45.12	40.09	-35.94	49.27	68.20	18.93	Vertical
6	17926.2083	37.04	42.73	-35.07	44.70	54.00	9.30	Vertical
7	17998.5625	45.36	43.09	-35.06	53.39	74.00	20.61	Vertical

11be(EHT40)_TX_CH_118_Horizontal

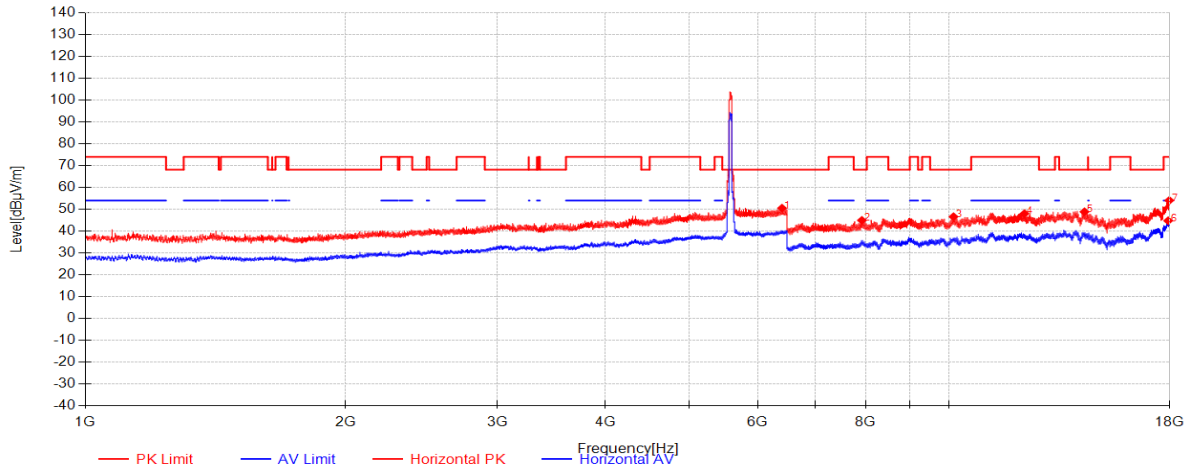


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6401.8462	34.80	35.10	-19.36	50.55	68.20	17.65	Horizontal
2	7920.25	50.90	36.94	-42.90	44.94	68.20	23.26	Horizontal
3	10110.0417	46.87	38.57	-38.83	46.61	68.20	21.59	Horizontal
4	12216.4583	45.85	39.13	-36.98	48.01	74.00	25.99	Horizontal
5	14334.8542	44.95	39.93	-36.02	48.86	68.20	19.34	Horizontal
6	17914.2292	37.17	42.67	-35.07	44.77	54.00	9.23	Horizontal
7	17971.25	46.19	42.96	-35.06	54.08	74.00	19.92	Horizontal

11be(EHT40)_TX_CH_118_Vertical

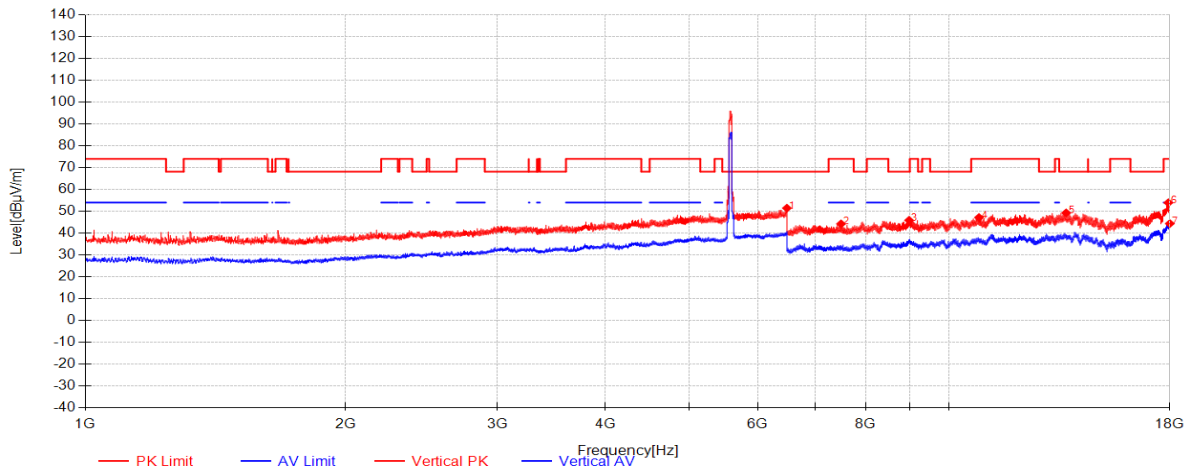


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6486.0385	35.49	35.20	-19.22	51.47	68.20	16.73	Vertical
2	7492.3542	51.31	36.45	-43.52	44.24	74.00	29.76	Vertical
3	8983.0417	48.47	38.17	-40.74	45.89	68.20	22.31	Vertical
4	10822.5625	46.19	39.02	-38.05	47.16	74.00	26.84	Vertical
5	13651.5625	45.77	39.95	-36.44	49.28	68.20	18.92	Vertical
6	17925.7292	46.28	42.73	-35.07	53.94	74.00	20.06	Vertical
7	17996.6458	36.37	43.08	-35.06	44.39	54.00	9.61	Vertical

11be(EHT40)_TX_CH_126_Horizontal

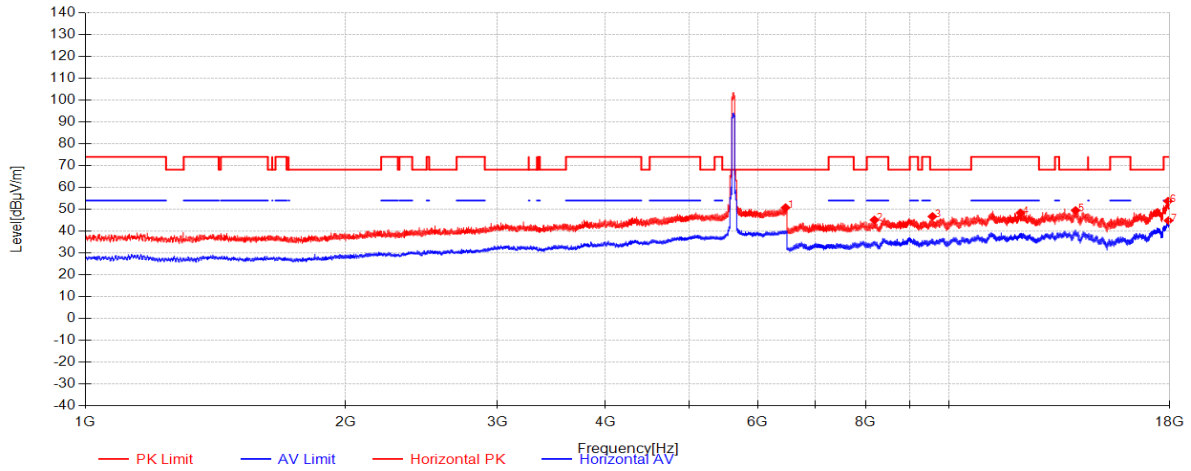


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6463.1923	34.84	35.20	-19.26	50.78	68.20	17.42	Horizontal
2	8190.0208	50.22	37.28	-42.35	45.15	74.00	28.85	Horizontal
3	9558.5208	49.25	38.38	-40.92	46.72	68.20	21.48	Horizontal
4	12084.6875	46.17	38.97	-36.76	48.37	74.00	25.63	Horizontal
5	13998.4792	45.34	40.09	-35.94	49.50	68.20	18.70	Horizontal
6	17909.9167	46.17	42.65	-35.07	53.75	74.00	20.25	Horizontal
7	17931.9583	37.15	42.76	-35.07	44.84	54.00	9.16	Horizontal

11be(EHT40)_TX_CH_126_Vertical

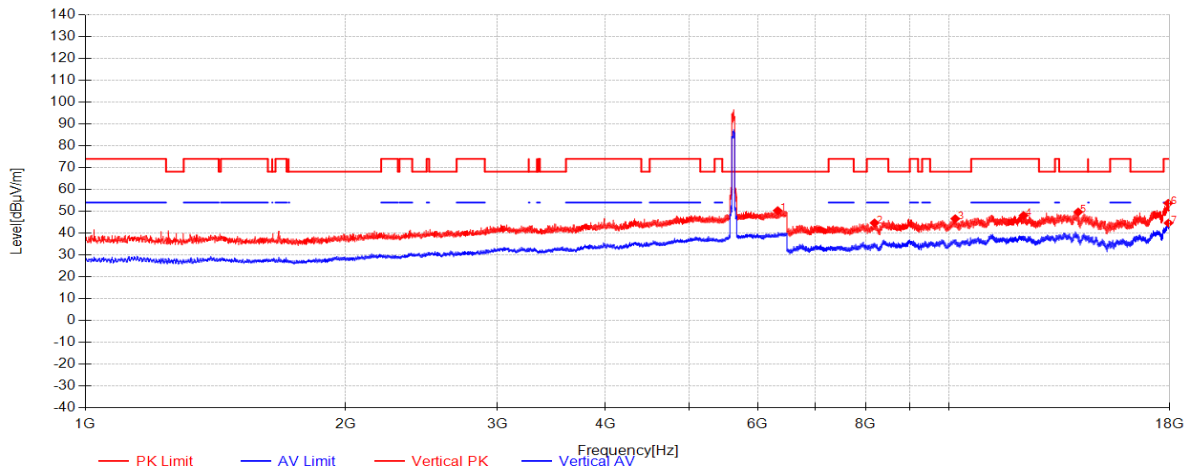


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6329.0769	35.12	34.47	-19.26	50.33	68.20	17.87	Vertical
2	8191.9375	49.75	37.30	-42.34	44.71	74.00	29.29	Vertical
3	10158.9167	47.13	38.42	-38.92	46.63	68.20	21.57	Vertical
4	12187.2292	45.76	39.17	-36.84	48.09	74.00	25.91	Vertical
5	14097.6667	46.26	39.81	-36.35	49.72	68.20	18.48	Vertical
6	17918.0625	46.07	42.69	-35.07	53.69	74.00	20.31	Vertical
7	17931.9583	36.94	42.76	-35.07	44.63	54.00	9.37	Vertical

11be(EHT40)_TX_CH_134_Horizontal

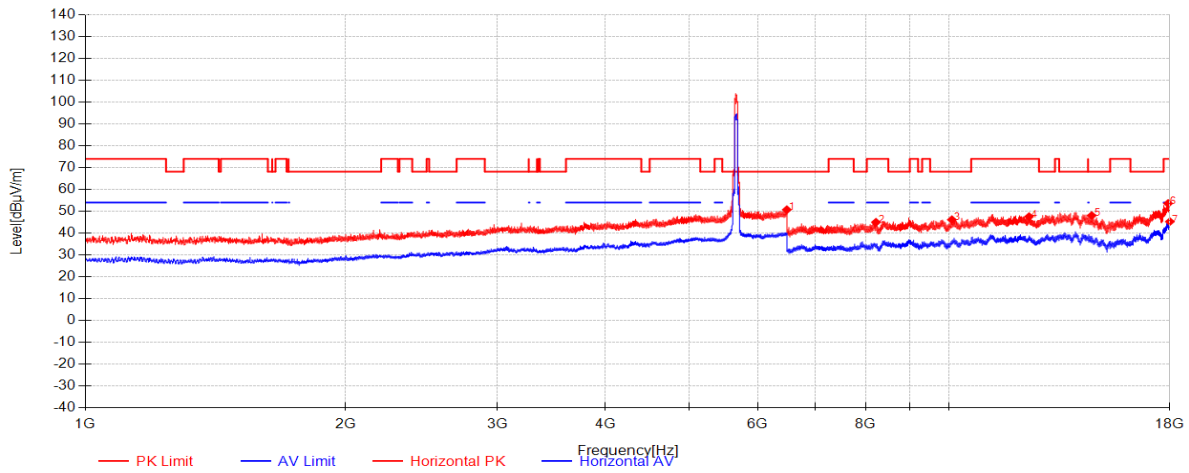


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6484.7692	34.75	35.20	-19.22	50.73	68.20	17.47	Horizontal
2	8223.5625	50.36	37.35	-42.73	44.99	74.00	29.01	Horizontal
3	10066.9167	47.43	38.50	-39.78	46.15	68.20	22.05	Horizontal
4	12366.9167	46.57	39.00	-38.00	47.58	74.00	26.42	Horizontal
5	14614.2083	45.45	39.70	-37.07	48.08	68.20	20.12	Horizontal
6	17912.3125	46.00	42.66	-35.07	53.59	74.00	20.41	Horizontal
7	17996.1667	37.27	43.08	-35.06	45.29	54.00	8.71	Horizontal

11be(EHT40)_TX_CH_134_Vertical

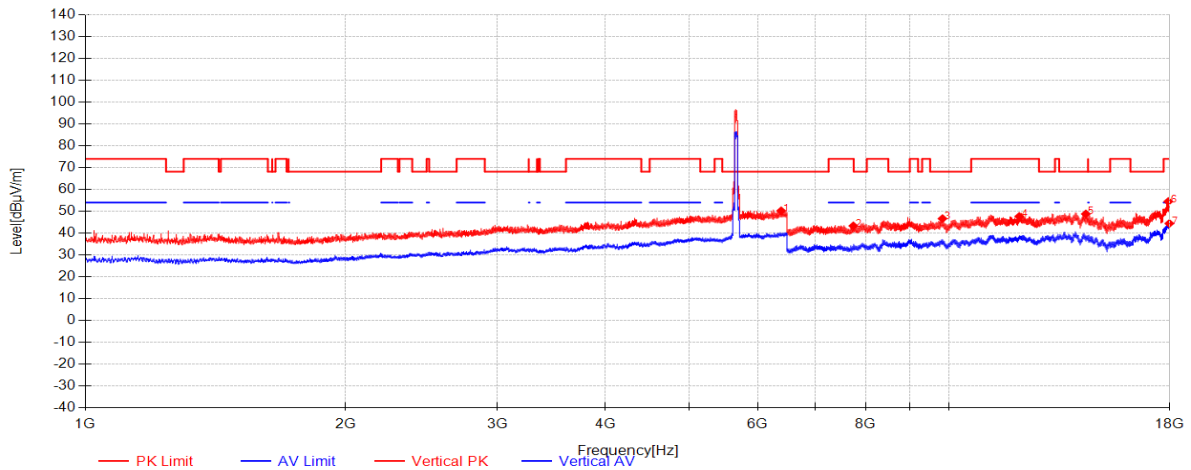


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6387.4615	34.62	34.97	-19.34	50.25	68.20	17.95	Vertical
2	7741.5208	49.71	36.78	-43.16	43.33	74.00	30.67	Vertical
3	9818.2292	47.66	38.20	-39.19	46.67	68.20	21.53	Vertical
4	12046.8333	45.94	38.89	-37.20	47.64	74.00	26.36	Vertical
5	14385.6458	45.36	39.83	-36.38	48.81	68.20	19.39	Vertical
6	17922.375	46.87	42.71	-35.07	54.51	74.00	19.49	Vertical
7	17971.25	36.55	42.96	-35.06	44.44	54.00	9.56	Vertical

11be(EHT40)_TX_CH_142_Horizontal

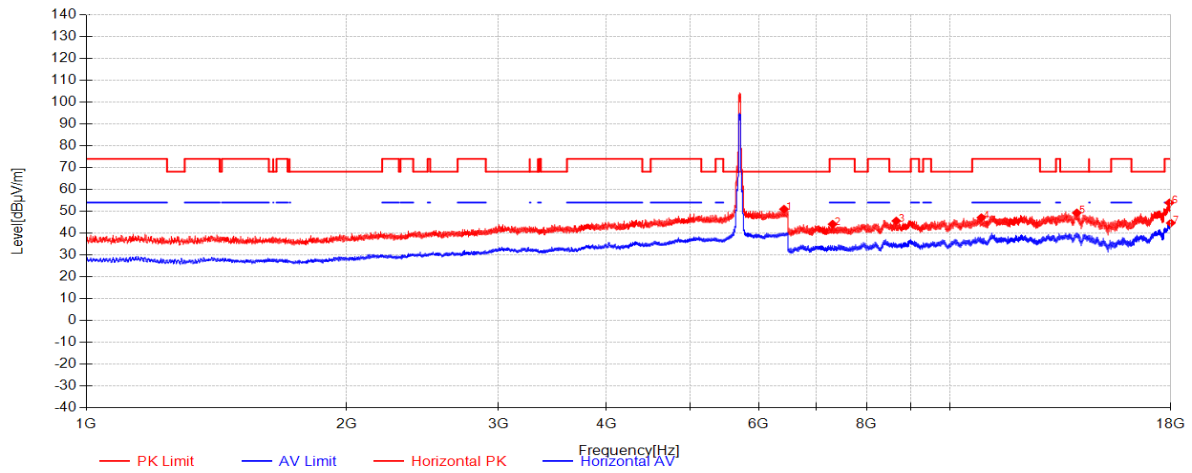


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6420.0385	35.17	35.14	-19.33	50.98	68.20	17.22	Horizontal
2	7307.3958	51.47	36.39	-43.76	44.10	74.00	29.90	Horizontal
3	8658.1667	49.78	37.67	-41.85	45.60	68.20	22.60	Horizontal
4	10861.375	46.04	39.06	-38.00	47.10	74.00	26.90	Horizontal
5	14006.1458	45.16	40.08	-35.95	49.29	68.20	18.91	Horizontal
6	17928.125	46.21	42.74	-35.07	53.88	74.00	20.12	Horizontal
7	17993.2917	36.64	43.07	-35.06	44.65	54.00	9.35	Horizontal

11be(EHT40)_TX_CH_142_Vertical

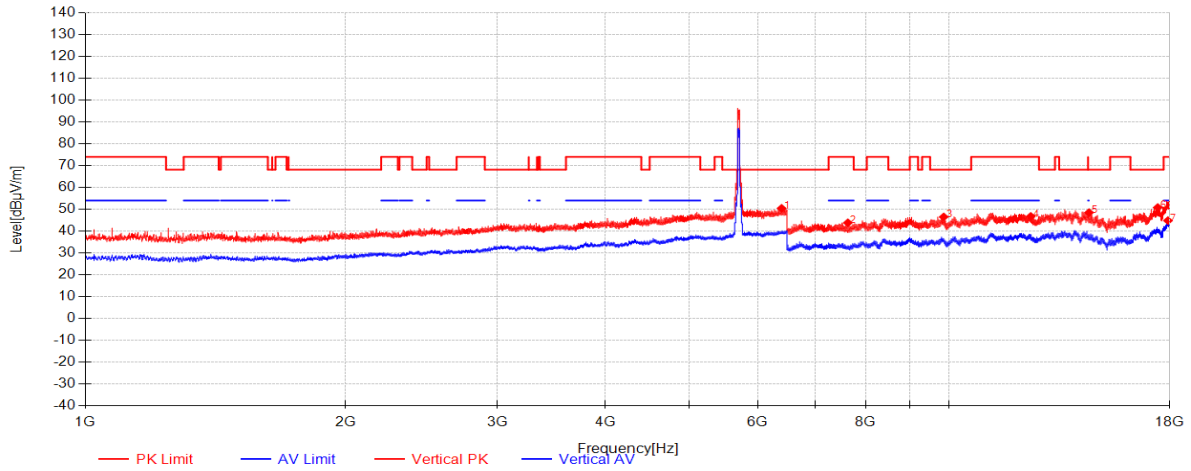


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6395.5	34.76	35.05	-19.35	50.46	68.20	17.74	Vertical
2	7629.875	50.93	36.24	-43.33	43.84	74.00	30.16	Vertical
3	9849.375	47.82	38.20	-39.50	46.52	68.20	21.68	Vertical
4	12422.0208	45.83	39.06	-38.14	46.74	74.00	27.26	Vertical
5	14508.3125	44.96	39.98	-36.42	48.51	68.20	19.69	Vertical
6	17423.5625	46.28	39.97	-35.43	50.82	68.20	17.38	Vertical
7	17906.0833	37.27	42.63	-35.07	44.83	54.00	9.17	Vertical

11be(EHT40)_TX_CH_151_Horizontal

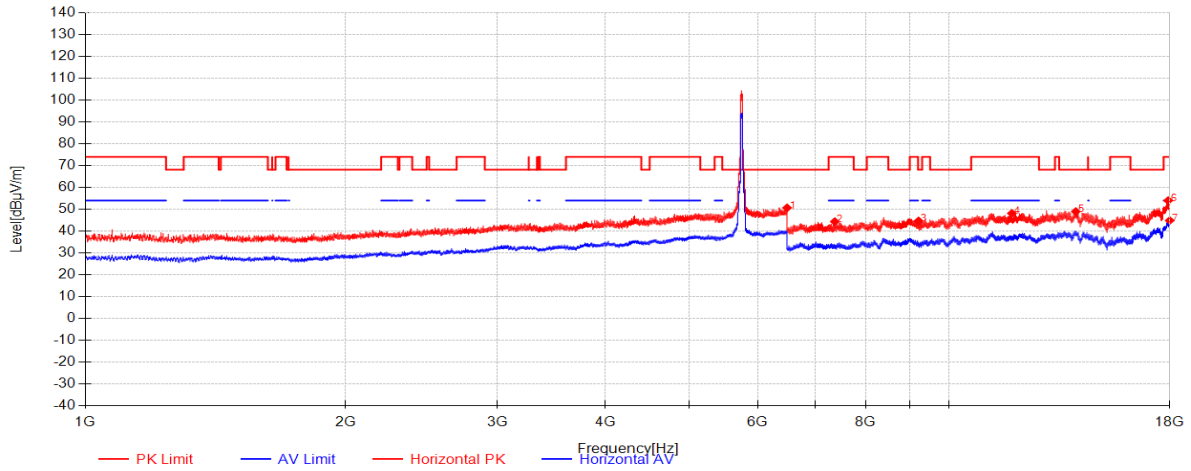

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6489.4231	34.71	35.20	-19.22	50.69	68.20	17.51	Horizontal
2	7368.7292	52.22	36.34	-44.16	44.39	74.00	29.61	Horizontal
3	9212.0833	48.23	38.02	-41.57	44.69	68.20	23.51	Horizontal
4	11812.5208	47.30	38.80	-37.96	48.14	74.00	25.86	Horizontal
5	14006.625	44.87	40.08	-35.95	49.00	68.20	19.20	Horizontal
6	17915.6667	46.39	42.68	-35.07	54.00	74.00	20.00	Horizontal
7	17987.5417	36.90	43.04	-35.06	44.88	54.00	9.12	Horizontal

11be(EHT40)_TX_CH_151_Vertical

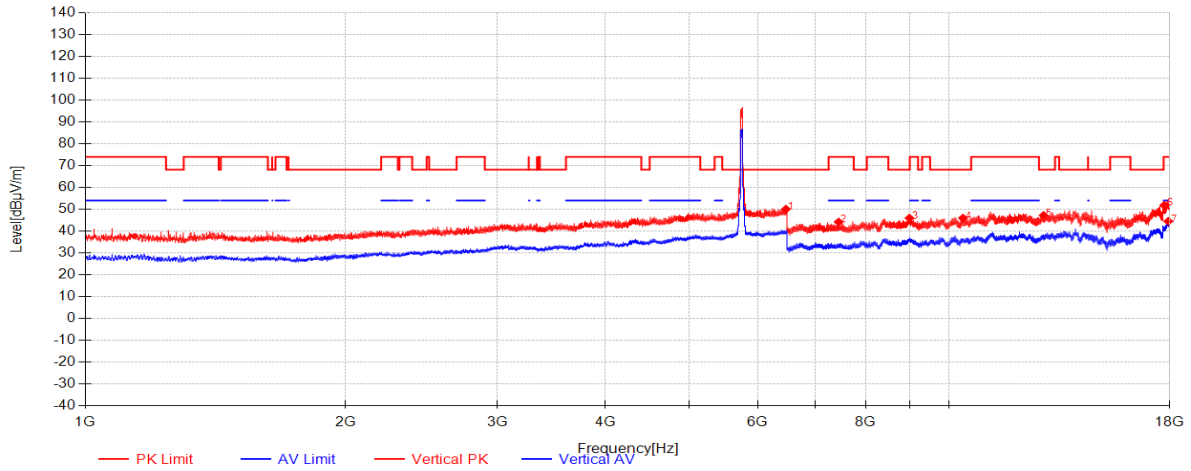

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6469.1154	34.13	35.20	-19.25	50.08	68.20	18.12	Vertical
2	7443.4792	51.49	36.66	-43.97	44.18	74.00	29.82	Vertical
3	8990.2292	48.49	38.18	-40.68	45.99	68.20	22.21	Vertical
4	10368.3125	46.65	38.60	-39.24	46.01	68.20	22.19	Vertical
5	12853.2708	45.68	39.51	-37.97	47.22	68.20	20.98	Vertical
6	17731.6667	45.97	41.42	-35.52	51.87	74.00	22.13	Vertical
7	17918.5417	36.90	42.69	-35.07	44.52	54.00	9.48	Vertical