



11be(EHT40)_TX_CH_195_Vertical

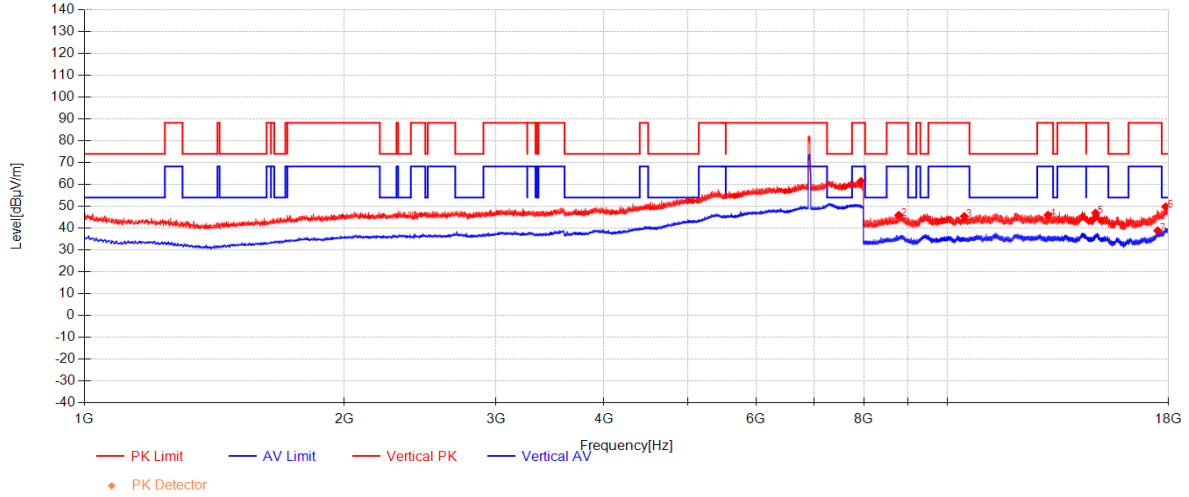


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7936	43.04	36.31	-17.88	61.48	88.30	26.82	Vertical
2	8779	52.24	37.16	-43.43	45.97	88.30	42.33	Vertical
3	10455.666	47.47	39.12	-41.19	45.40	88.30	42.90	Vertical
4	13071	45.66	38.91	-38.53	46.03	88.30	42.27	Vertical
5	14837.666	44.44	40.22	-37.73	46.93	88.30	41.37	Vertical
6	17886.666	42.80	44.12	-37.09	49.83	74.00	24.17	Vertical
7	17513.333	33.76	41.88	-36.79	38.85	68.30	29.45	Vertical

11be(EHT40)_TX_CH_203_Horizontal

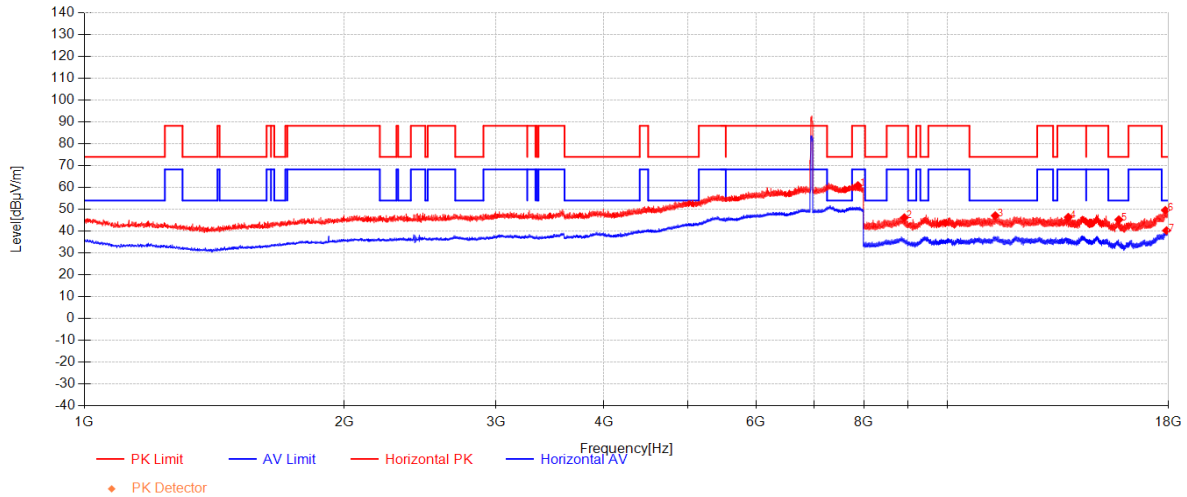


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7872	42.23	36.33	-17.63	60.92	88.30	27.38	Horizontal
2	8910.3333	51.98	37.30	-43.08	46.20	88.30	42.10	Horizontal
3	11355	47.52	39.46	-39.89	47.10	74.00	26.90	Horizontal
4	13797	45.34	40.00	-38.94	46.39	88.30	41.91	Horizontal
5	15787.666	43.86	38.78	-37.39	45.25	74.00	28.75	Horizontal
6	17871.333	42.74	44.03	-37.22	49.55	74.00	24.45	Horizontal
7	17927.666	32.82	44.37	-36.92	40.26	54.00	13.74	Horizontal

11be(EHT40)_TX_CH_203_Vertical

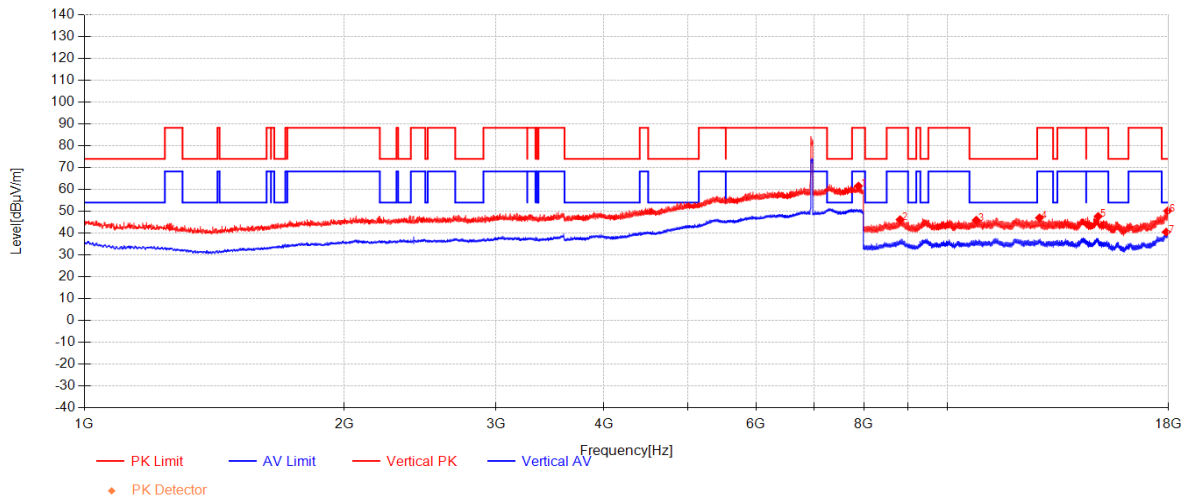


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7884	42.94	36.32	-17.68	61.59	88.30	26.71	Vertical
2	8810	52.29	37.19	-43.28	46.20	88.30	42.10	Vertical
3	10796	47.24	39.36	-40.65	45.95	74.00	28.05	Vertical
4	12775.666	47.14	38.93	-39.09	46.99	88.30	41.31	Vertical
5	14939.666	45.21	40.21	-37.75	47.67	88.30	40.63	Vertical
6	17982.666	42.31	44.70	-36.81	50.19	74.00	23.81	Vertical
7	17914.666	33.15	44.29	-36.95	40.49	54.00	13.51	Vertical

11be(EHT40)_TX_CH_211_Horizontal

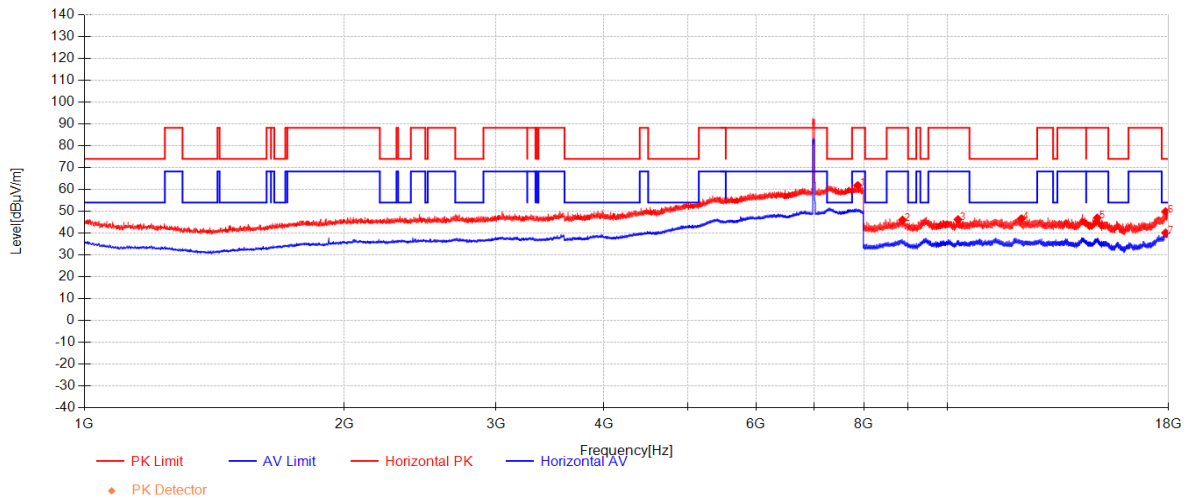


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7869	43.19	36.33	-17.62	61.90	88.30	26.40	Horizontal
2	8867.3333	51.94	37.25	-43.12	46.07	88.30	42.23	Horizontal
3	10280.333	48.73	39.00	-41.48	46.25	88.30	42.05	Horizontal
4	12176.666	47.04	39.29	-39.67	46.67	74.00	27.33	Horizontal
5	14903.666	44.38	40.21	-37.60	46.99	88.30	41.31	Horizontal
6	17882.333	42.90	44.09	-37.13	49.87	74.00	24.13	Horizontal
7	17884	33.15	44.10	-37.11	40.14	54.00	13.86	Horizontal

11be(EHT40)_TX_CH_211_Vertical

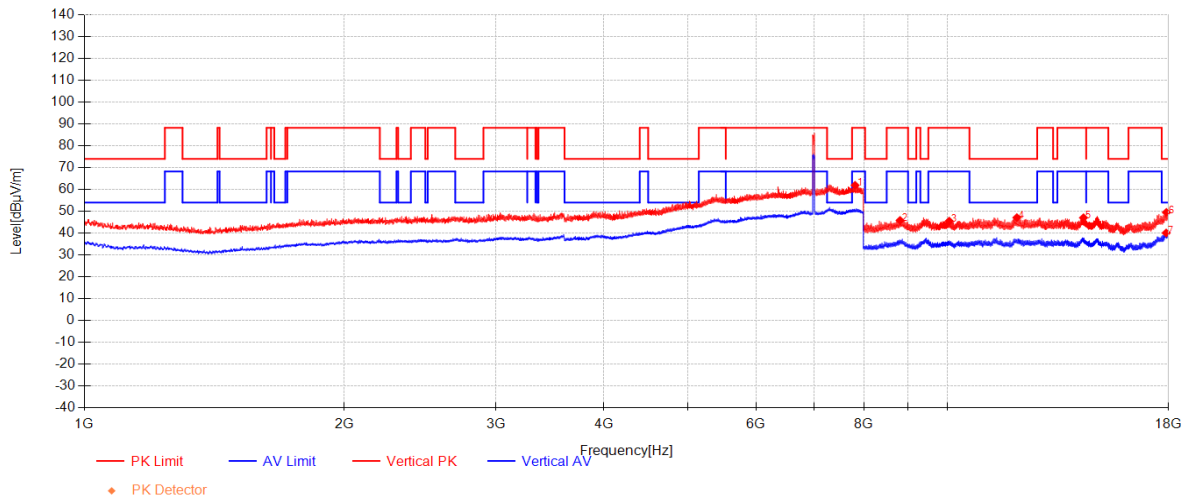


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7813.5	43.00	36.34	-17.40	61.93	88.30	26.37	Vertical
2	8810	51.93	37.19	-43.28	45.84	88.30	42.46	Vertical
3	10043.333	48.34	38.83	-41.63	45.54	88.30	42.76	Vertical
4	12028.666	47.15	39.38	-39.42	47.11	74.00	26.89	Vertical
5	14367.333	45.44	40.26	-38.63	47.08	88.30	41.22	Vertical
6	17920.333	42.13	44.32	-36.94	49.51	74.00	24.49	Vertical
7	17910.666	32.77	44.26	-36.96	40.08	54.00	13.92	Vertical

11be(EHT40)_TX_CH_227_Horizontal

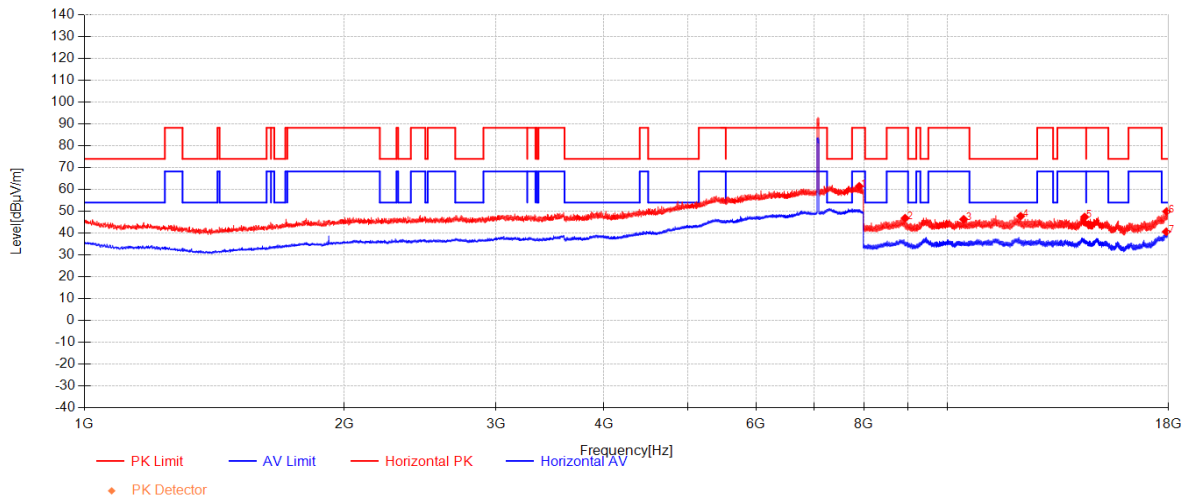


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7900.5	42.88	36.32	-17.74	61.46	88.30	26.84	Horizontal
2	8928.6667	52.69	37.32	-43.16	46.85	88.30	41.45	Horizontal
3	10438	48.39	39.11	-41.15	46.35	88.30	41.95	Horizontal
4	12150.333	48.11	39.31	-39.63	47.79	74.00	26.21	Horizontal
5	14410	45.80	40.26	-38.67	47.39	88.30	40.91	Horizontal
6	17931.666	42.44	44.39	-36.92	49.91	74.00	24.09	Horizontal
7	17918.333	33.28	44.31	-36.94	40.65	54.00	13.35	Horizontal

11be(EHT40)_TX_CH_227_Vertical

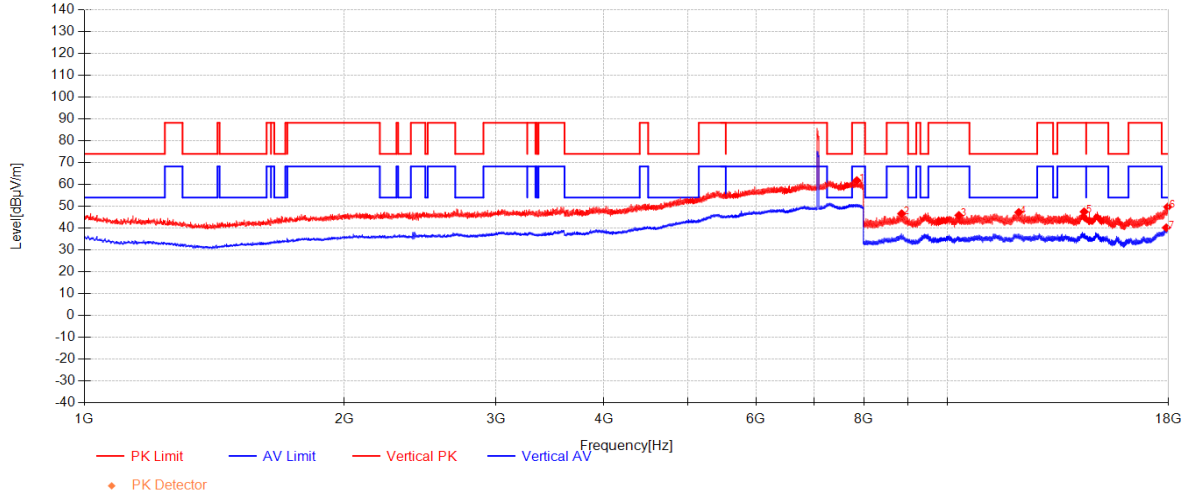


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7850.5	43.05	36.33	-17.55	61.83	88.30	26.47	Vertical
2	8846.3333	52.57	37.23	-43.18	46.62	88.30	41.68	Vertical
3	10304.333	48.19	39.01	-41.35	45.86	88.30	42.44	Vertical
4	12089	47.43	39.35	-39.54	47.24	74.00	26.76	Vertical
5	14391	45.92	40.26	-38.66	47.52	88.30	40.78	Vertical
6	17985.333	41.81	44.71	-36.81	49.71	74.00	24.29	Vertical
7	17917	32.84	44.30	-36.95	40.20	54.00	13.80	Vertical

11be(EHT80)_TX_CH_007_Horizontal

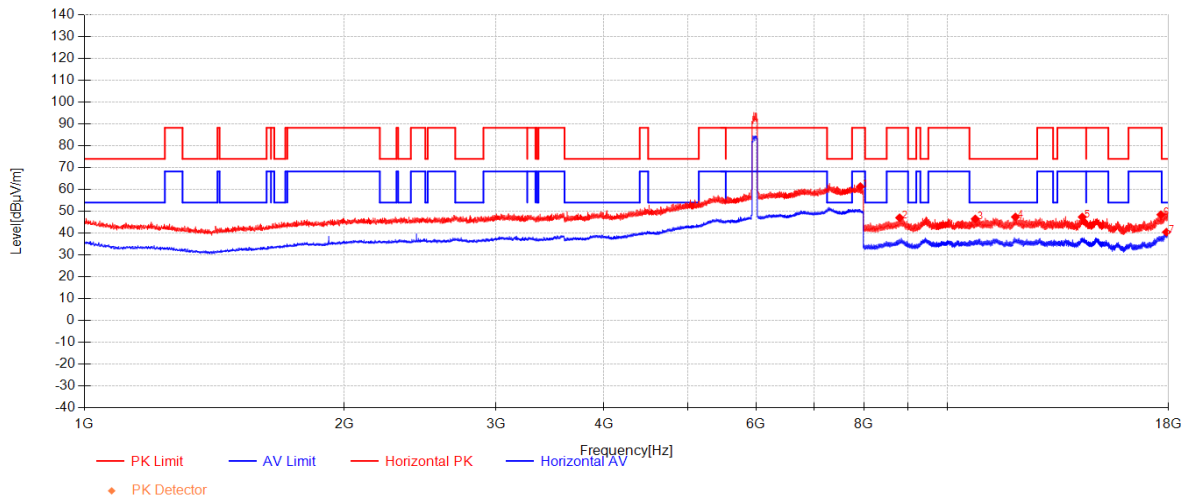


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7925	42.85	36.32	-17.84	61.33	88.30	26.97	Horizontal
2	8799	53.19	37.18	-43.32	47.05	88.30	41.25	Horizontal
3	10766	47.92	39.34	-40.74	46.52	74.00	27.48	Horizontal
4	11982.666	47.46	39.40	-39.45	47.41	74.00	26.59	Horizontal
5	14320.666	45.68	40.27	-38.57	47.38	88.30	40.92	Horizontal
6	17662	43.15	42.77	-37.46	48.46	88.30	39.84	Horizontal
7	17925	33.03	44.35	-36.93	40.45	54.00	13.55	Horizontal

11be(EHT80)_TX_CH_007_Vertical

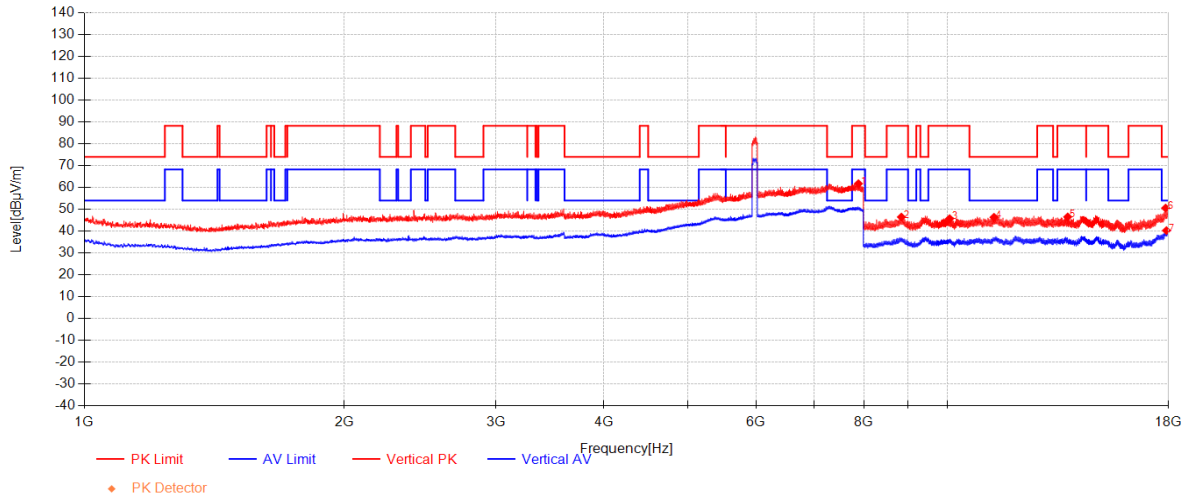


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7883.5	43.12	36.32	-17.68	61.77	88.30	26.53	Vertical
2	8840.3333	52.44	37.22	-43.20	46.47	88.30	41.83	Vertical
3	10053.333	48.53	38.84	-41.63	45.74	88.30	42.56	Vertical
4	11318	46.77	39.47	-39.88	46.36	74.00	27.64	Vertical
5	13774.666	45.38	39.96	-38.80	46.54	88.30	41.76	Vertical
6	17883.666	43.57	44.10	-37.12	50.56	74.00	23.44	Vertical
7	17924	32.87	44.34	-36.93	40.28	54.00	13.72	Vertical

11be(EHT80)_TX_CH_039_Horizontal

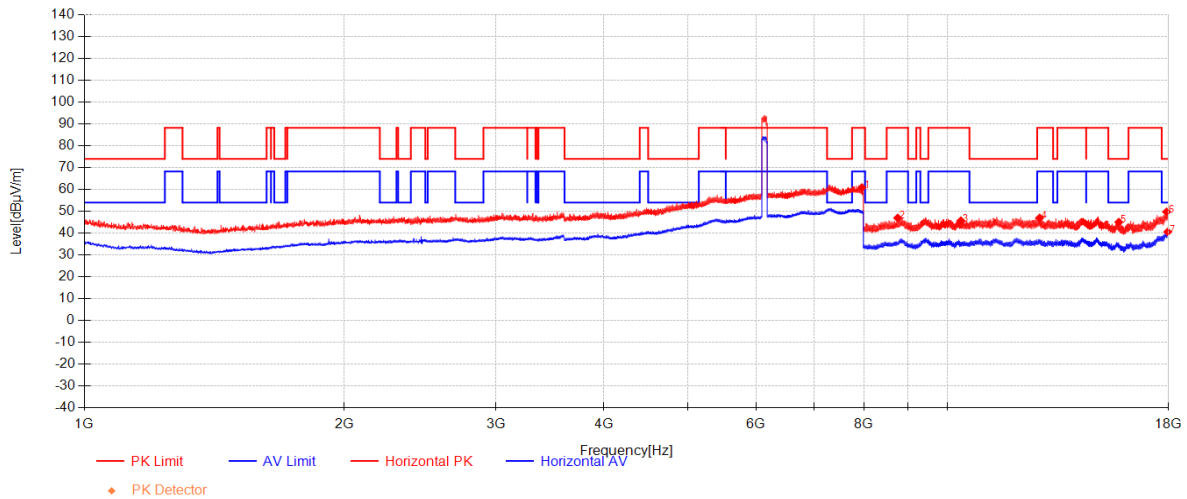


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7957	42.54	36.31	-17.96	60.89	88.30	27.41	Horizontal
2	8754	53.41	37.13	-43.57	46.97	88.30	41.33	Horizontal
3	10360.666	47.82	39.05	-41.18	45.69	88.30	42.61	Horizontal
4	12781	47.12	38.93	-39.08	46.97	88.30	41.33	Horizontal
5	15786	43.67	38.79	-37.40	45.06	74.00	28.94	Horizontal
6	17929	42.31	44.37	-36.92	49.76	74.00	24.24	Horizontal
7	17984.666	32.69	44.71	-36.81	40.59	54.00	13.41	Horizontal

11be(EHT80)_TX_CH_039_Vertical

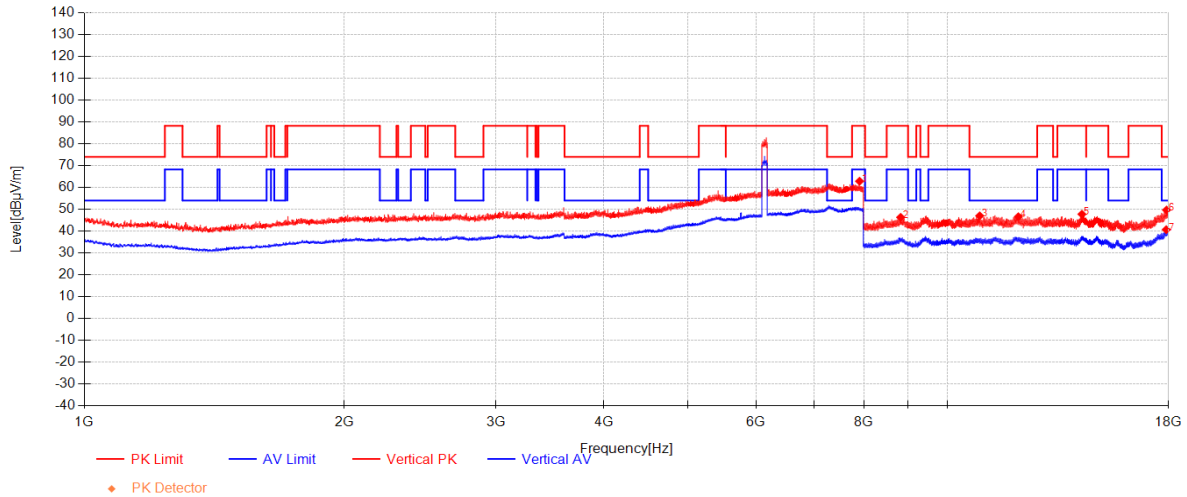


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7907	44.34	36.32	-17.77	62.89	88.30	25.41	Vertical
2	8824.3333	52.38	37.21	-43.24	46.34	88.30	41.96	Vertical
3	10892.666	47.96	39.42	-40.35	47.03	74.00	26.97	Vertical
4	12076.333	46.78	39.35	-39.52	46.62	74.00	27.38	Vertical
5	14307.666	46.04	40.27	-38.55	47.76	88.30	40.54	Vertical
6	17927.666	42.25	44.37	-36.92	49.69	74.00	24.31	Vertical
7	17914.333	33.36	44.29	-36.95	40.69	54.00	13.31	Vertical

11be(EHT80)_TX_CH_055_Horizontal

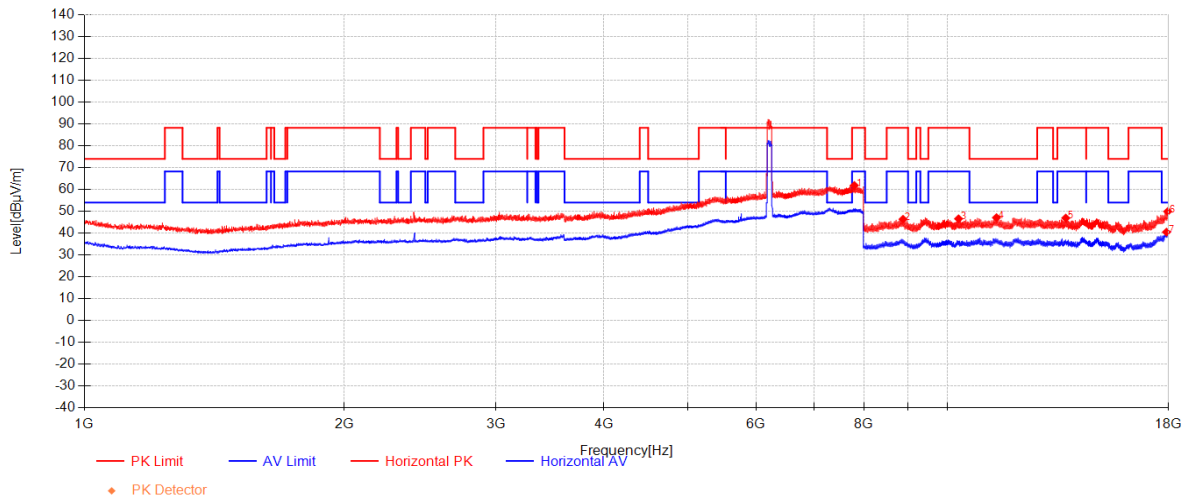


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7798.5	42.86	36.34	-17.35	61.85	88.30	26.45	Horizontal
2	8879	52.21	37.27	-43.09	46.39	88.30	41.91	Horizontal
3	10296	48.97	39.01	-41.38	46.59	88.30	41.71	Horizontal
4	11392	47.55	39.46	-39.90	47.11	74.00	26.89	Horizontal
5	13704.333	45.41	39.86	-38.35	46.92	88.30	41.38	Horizontal
6	17984	42.04	44.70	-36.81	49.93	74.00	24.07	Horizontal
7	17928	33.04	44.37	-36.92	40.48	54.00	13.52	Horizontal

11be(EHT80)_TX_CH_055_Vertical

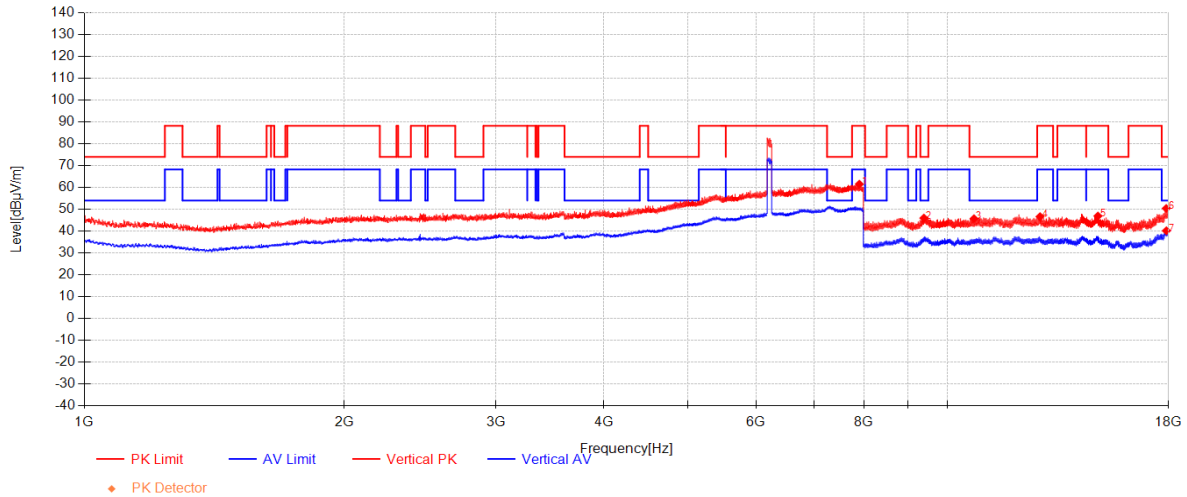


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7902.5	42.96	36.32	-17.75	61.53	88.30	26.77	Vertical
2	9387	50.89	37.94	-42.84	45.99	74.00	28.01	Vertical
3	10729.333	47.26	39.31	-40.84	45.73	74.00	28.27	Vertical
4	12796	46.80	38.92	-39.07	46.65	88.30	41.65	Vertical
5	14929.333	44.44	40.21	-37.71	46.94	88.30	41.36	Vertical
6	17913.333	43.10	44.28	-36.95	50.43	74.00	23.57	Vertical
7	17923.333	32.77	44.34	-36.93	40.18	54.00	13.82	Vertical

11be(EHT80)_TX_CH_087_Horizontal

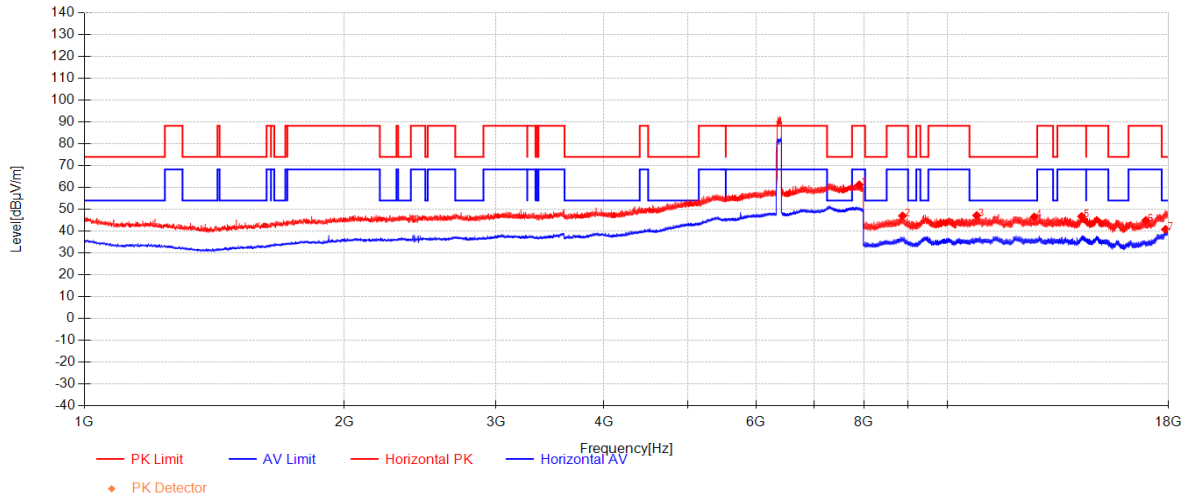


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7900.5	42.68	36.32	-17.74	61.26	88.30	27.04	Horizontal
2	8867.6667	52.89	37.25	-43.12	47.02	88.30	41.28	Horizontal
3	10807	48.46	39.36	-40.62	47.21	74.00	26.79	Horizontal
4	12598.666	46.54	39.04	-39.06	46.52	74.00	27.48	Horizontal
5	14295	45.04	40.27	-38.53	46.78	88.30	41.52	Horizontal
6	16964.666	43.51	38.79	-37.38	44.91	88.30	43.39	Horizontal
7	17881.333	33.87	44.09	-37.13	40.82	54.00	13.18	Horizontal

11be(EHT80)_TX_CH_087_Vertical

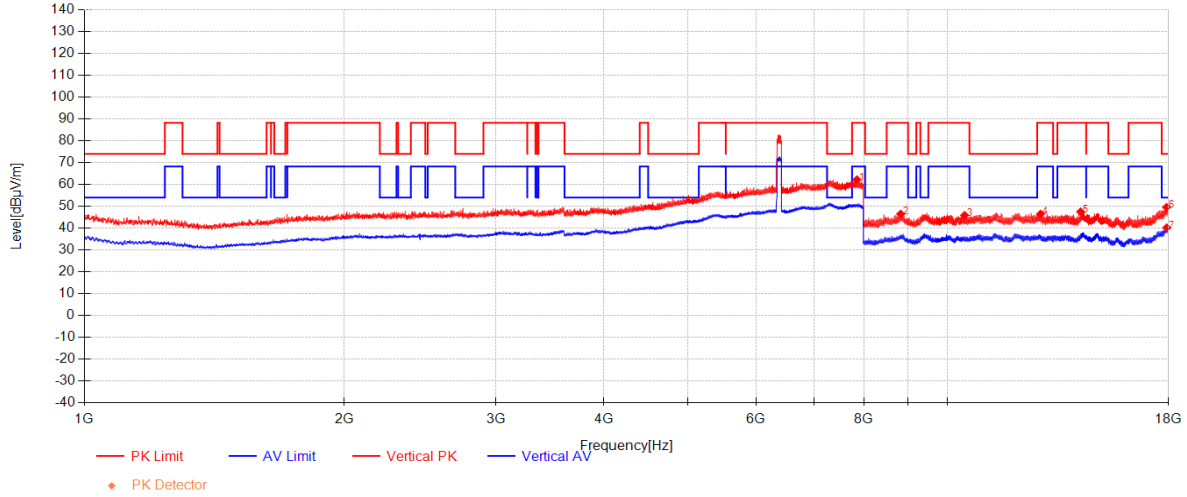


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7851.5	43.45	36.33	-17.55	62.23	88.30	26.07	Vertical
2	8823.6667	52.53	37.21	-43.24	46.49	88.30	41.81	Vertical
3	10464	47.98	39.12	-41.20	45.90	88.30	42.40	Vertical
4	12811.333	46.70	38.91	-39.11	46.50	88.30	41.80	Vertical
5	14260	45.66	40.27	-38.43	47.51	88.30	40.79	Vertical
6	17928	42.16	44.37	-36.92	49.60	74.00	24.40	Vertical
7	17938	32.68	44.43	-36.90	40.20	54.00	13.80	Vertical

11be(EHT80)_TX_CH_103_Horizontal

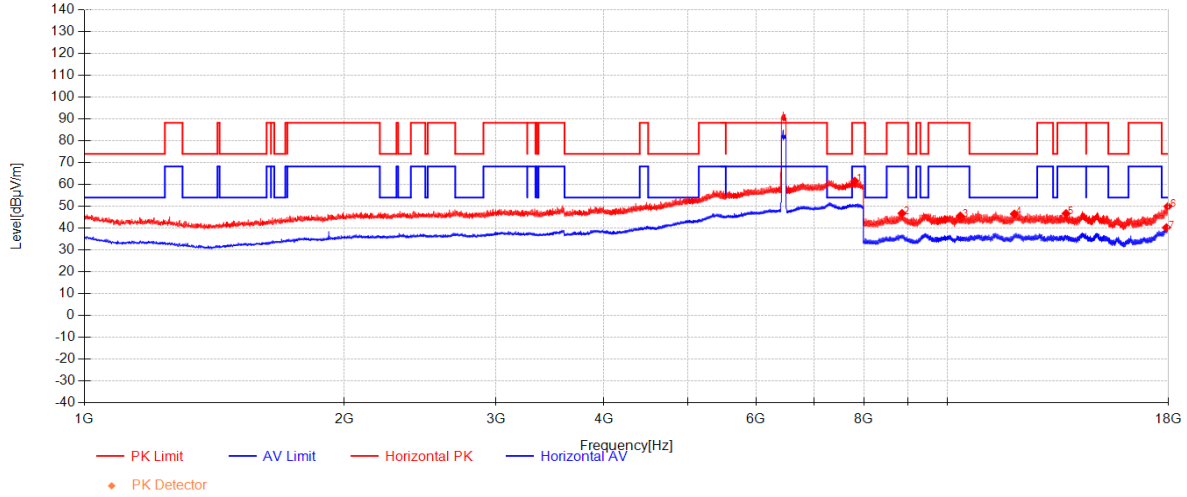


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7806.5	42.64	36.34	-17.38	61.60	88.30	26.70	Horizontal
2	8853.6667	52.71	37.24	-43.16	46.79	88.30	41.51	Horizontal
3	10345.333	47.81	39.04	-41.23	45.62	88.30	42.68	Horizontal
4	11946.666	46.75	39.41	-39.62	46.54	74.00	27.46	Horizontal
5	13715.666	45.28	39.87	-38.42	46.73	88.30	41.57	Horizontal
6	17995.666	41.96	44.77	-36.79	49.95	74.00	24.05	Horizontal
7	17923.666	32.84	44.34	-36.93	40.25	54.00	13.75	Horizontal

11be(EHT80)_TX_CH_103_Vertical

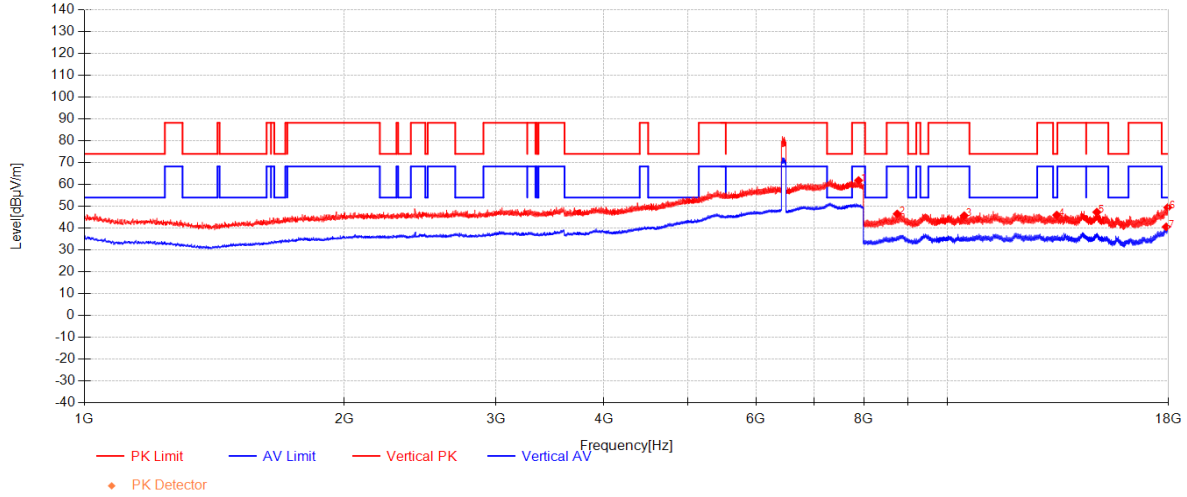


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7886.5	43.22	36.32	-17.69	61.86	88.30	26.44	Vertical
2	8743	53.03	37.12	-43.63	46.51	88.30	41.79	Vertical
3	10452.666	47.79	39.12	-41.18	45.73	88.30	42.57	Vertical
4	13377.666	45.80	39.37	-39.16	46.01	74.00	27.99	Vertical
5	14887	44.73	40.21	-37.61	47.33	88.30	40.97	Vertical
6	17988.333	41.55	44.73	-36.80	49.48	74.00	24.52	Vertical
7	17913.333	33.25	44.28	-36.95	40.58	54.00	13.42	Vertical

11be(EHT80)_TX_CH_119_Horizontal

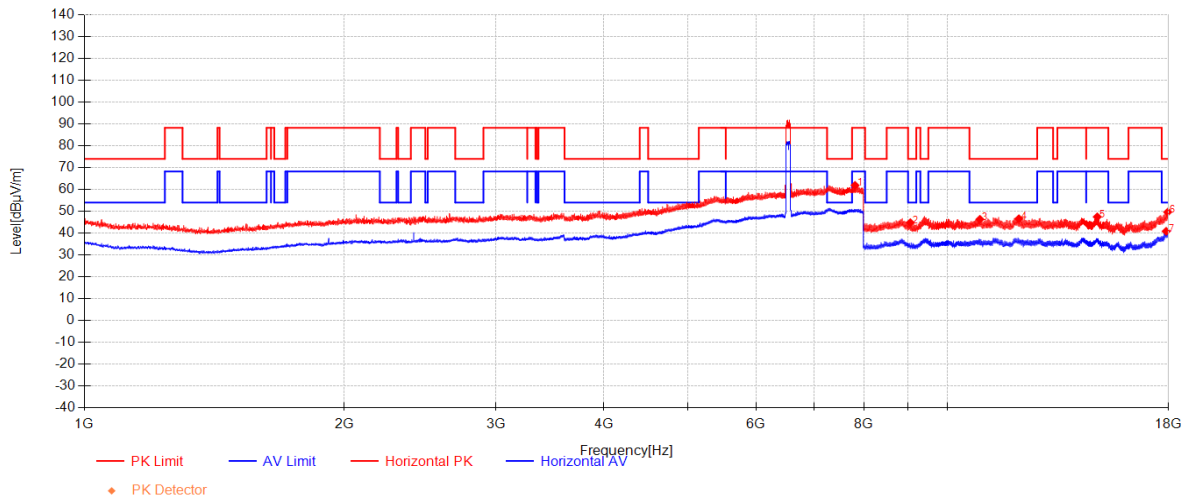


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7812.5	42.98	36.34	-17.40	61.92	88.30	26.38	Horizontal
2	9052.6667	50.48	37.47	-43.16	44.80	74.00	29.20	Horizontal
3	10899.666	47.25	39.43	-40.33	46.35	74.00	27.65	Horizontal
4	12093.333	46.80	39.34	-39.55	46.60	74.00	27.40	Horizontal
5	14904.666	44.85	40.21	-37.60	47.46	88.30	40.84	Horizontal
6	17985.666	41.74	44.71	-36.81	49.65	74.00	24.35	Horizontal
7	17912.666	33.54	44.28	-36.95	40.86	54.00	13.14	Horizontal

11be(EHT80)_TX_CH_119_Vertical

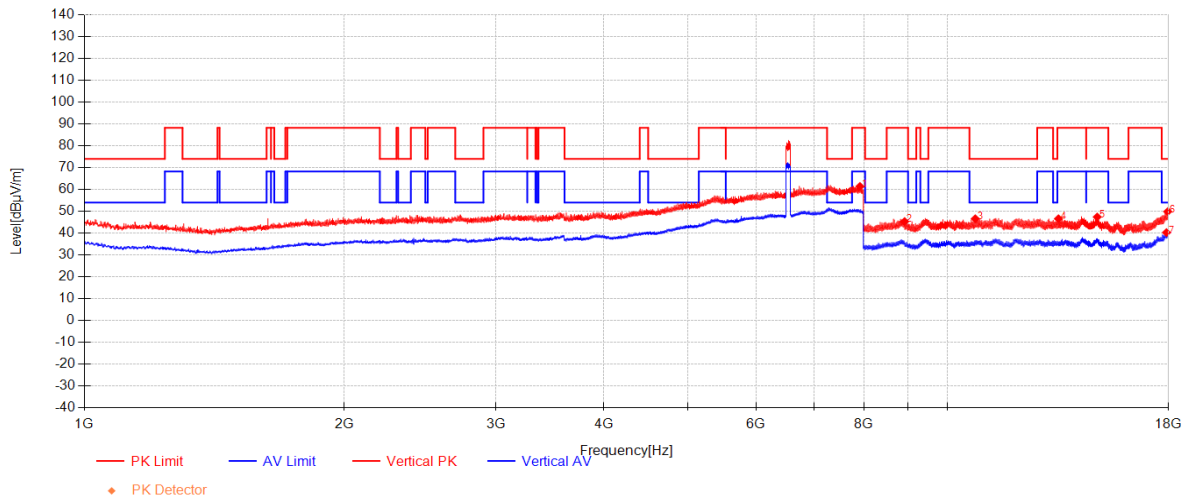


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7915.5	42.90	36.32	-17.80	61.42	88.30	26.88	Vertical
2	8916	51.12	37.31	-43.10	45.33	88.30	42.97	Vertical
3	10764.666	48.01	39.34	-40.74	46.60	74.00	27.40	Vertical
4	13438.666	46.44	39.46	-39.30	46.60	88.30	41.70	Vertical
5	14902.666	44.79	40.21	-37.59	47.41	88.30	40.89	Vertical
6	17985.666	41.98	44.71	-36.81	49.89	74.00	24.11	Vertical
7	17924.666	32.85	44.35	-36.93	40.27	54.00	13.73	Vertical

11be(EHT80)_TX_CH_135_Horizontal

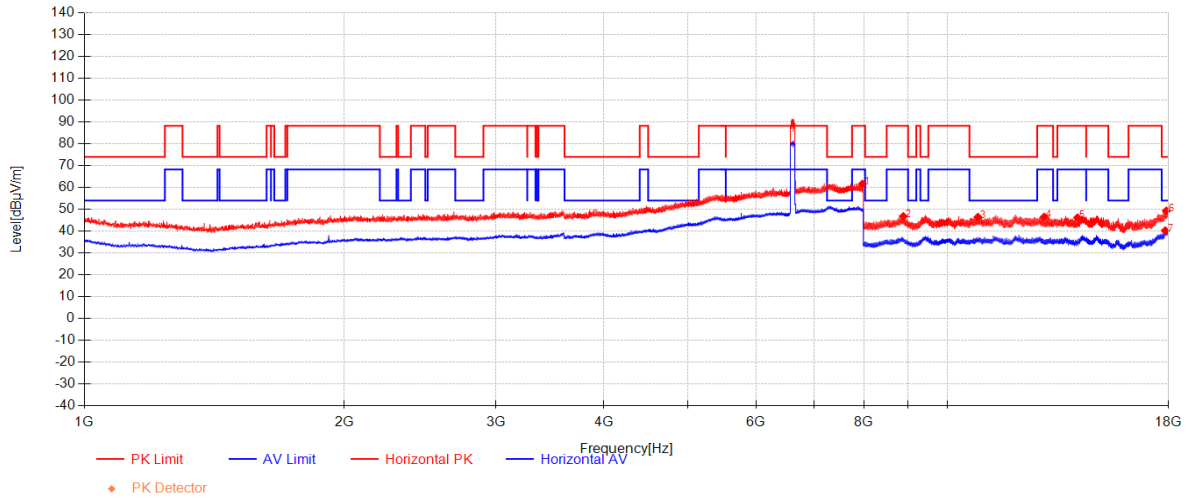


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7966.5	43.30	36.31	-17.99	61.61	88.30	26.69	Horizontal
2	8885.6667	52.59	37.27	-43.07	46.79	88.30	41.51	Horizontal
3	10841.666	47.57	39.39	-40.51	46.45	74.00	27.55	Horizontal
4	12938.666	47.07	38.84	-39.39	46.51	88.30	41.79	Horizontal
5	14139.333	44.30	40.29	-38.42	46.16	88.30	42.14	Horizontal
6	17920	41.93	44.32	-36.94	49.31	74.00	24.69	Horizontal
7	17870.333	33.43	44.02	-37.23	40.23	54.00	13.77	Horizontal

11be(EHT80)_TX_CH_135_Vertical

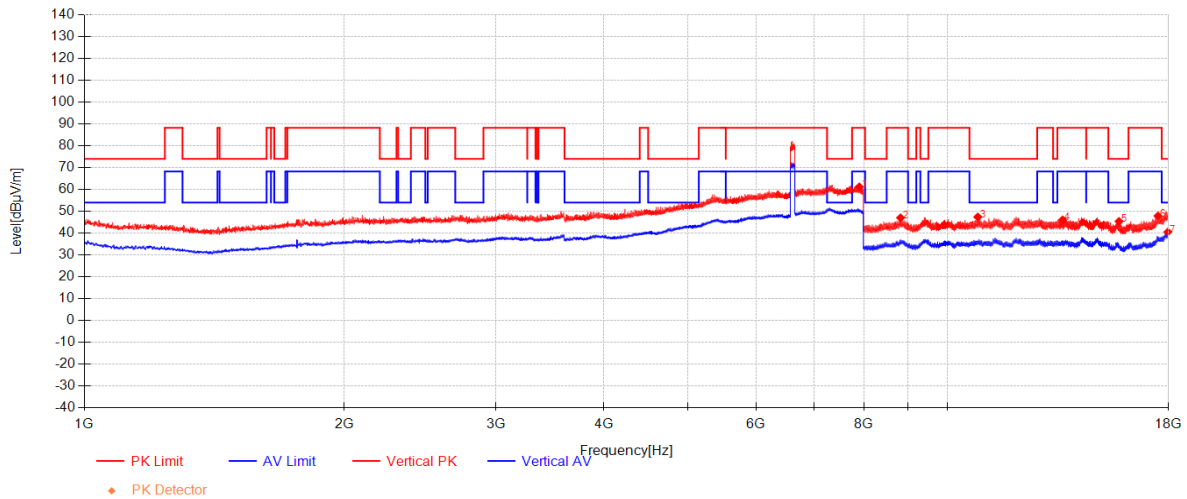


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7901.5	42.68	36.32	-17.75	61.25	88.30	27.05	Vertical
2	8819.6667	53.10	37.20	-43.25	47.05	88.30	41.25	Vertical
3	10838.666	48.55	39.39	-40.52	47.42	74.00	26.58	Vertical
4	13588.666	45.44	39.68	-39.02	46.10	88.30	42.20	Vertical
5	15794	44.02	38.77	-37.37	45.42	74.00	28.58	Vertical
6	17523.333	42.75	41.94	-36.79	47.90	88.30	40.40	Vertical
7	17991.666	32.61	44.75	-36.80	40.56	54.00	13.44	Vertical

11be(EHT80)_TX_CH_151_Horizontal

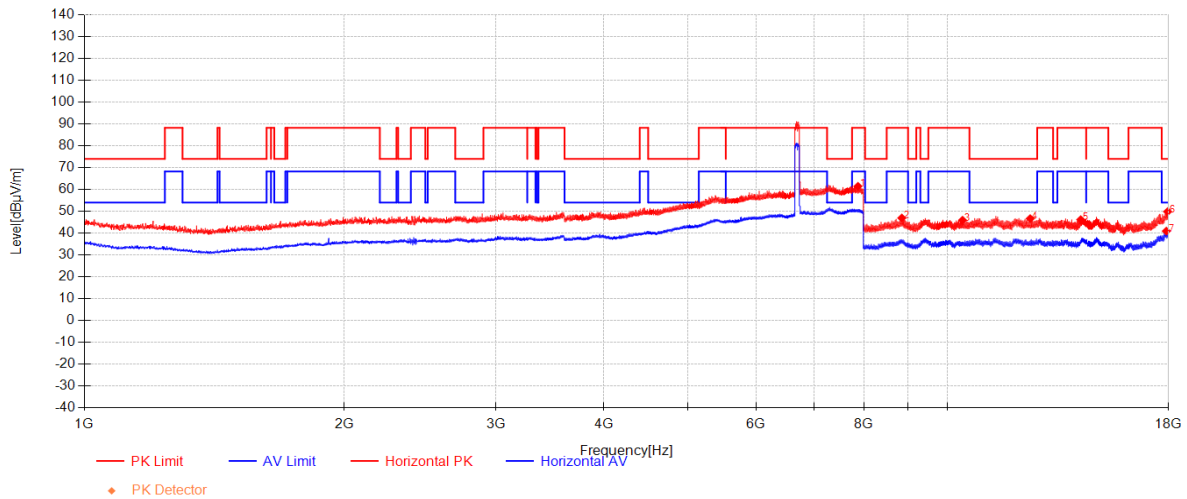


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7873.5	42.79	36.33	-17.64	61.48	88.30	26.82	Horizontal
2	8849.6667	52.88	37.23	-43.17	46.94	88.30	41.36	Horizontal
3	10406.333	47.93	39.08	-41.08	45.93	88.30	42.37	Horizontal
4	12464	47.07	39.12	-39.52	46.67	74.00	27.33	Horizontal
5	14262	44.35	40.27	-38.43	46.19	88.30	42.11	Horizontal
6	17980	42.00	44.68	-36.82	49.86	74.00	24.14	Horizontal
7	17919	33.58	44.31	-36.94	40.95	54.00	13.05	Horizontal

11be(EHT80)_TX_CH_151_Vertical

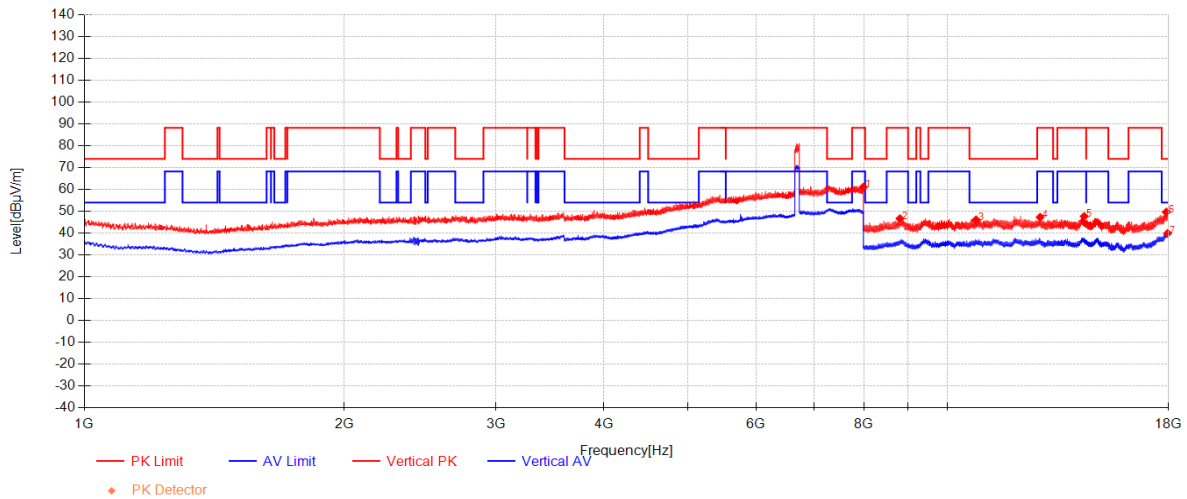


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7987.5	42.89	36.30	-18.07	61.12	88.30	27.18	Vertical
2	8806.3333	52.77	37.19	-43.29	46.66	88.30	41.64	Vertical
3	10787	47.47	39.35	-40.68	46.14	74.00	27.86	Vertical
4	12798.666	47.48	38.92	-39.07	47.33	88.30	40.97	Vertical
5	14393	46.11	40.26	-38.66	47.71	88.30	40.59	Vertical
6	17918.666	42.31	44.31	-36.94	49.68	74.00	24.32	Vertical
7	17981.333	32.08	44.69	-36.82	39.95	54.00	14.05	Vertical

11be(EHT80)_TX_CH_167_Horizontal

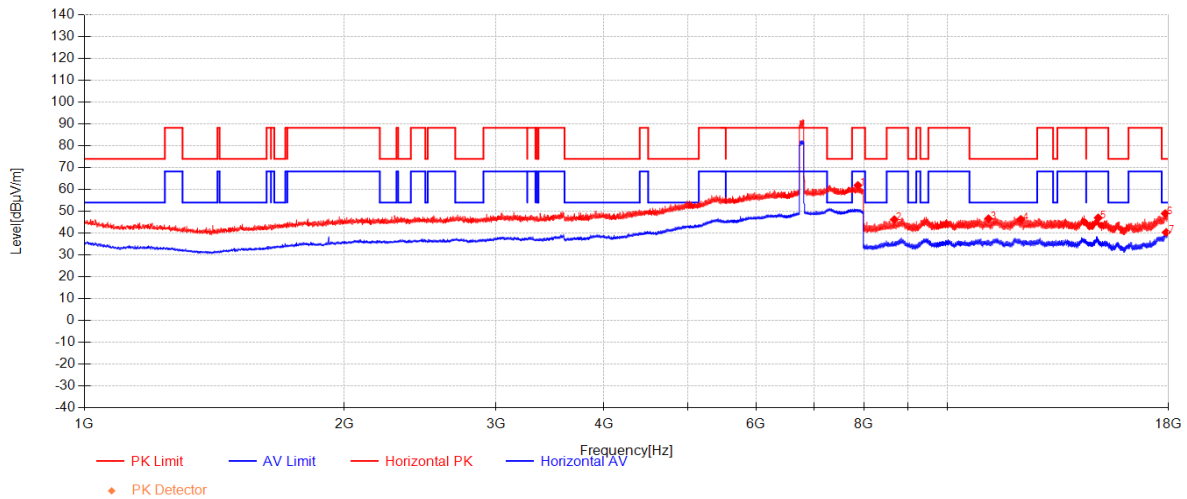


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7873	43.20	36.33	-17.63	61.89	88.30	26.41	Horizontal
2	8674.3333	52.99	37.04	-43.82	46.21	88.30	42.09	Horizontal
3	11152.666	47.56	39.48	-40.44	46.61	74.00	27.39	Horizontal
4	12156.333	46.66	39.31	-39.64	46.33	74.00	27.67	Horizontal
5	14943	44.59	40.21	-37.76	47.03	88.30	41.27	Horizontal
6	17867.666	42.21	44.01	-37.25	48.97	74.00	25.03	Horizontal
7	17915	33.01	44.29	-36.95	40.35	54.00	13.65	Horizontal

11be(EHT80)_TX_CH_167_Vertical

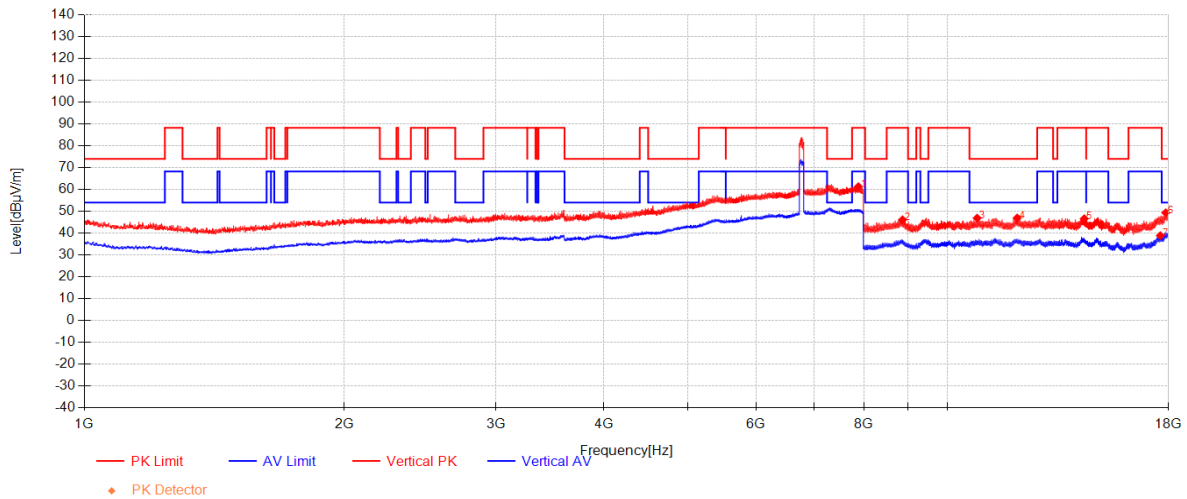


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7883.5	42.68	36.32	-17.68	61.33	88.30	26.97	Vertical
2	8867	52.02	37.25	-43.12	46.15	88.30	42.15	Vertical
3	10819	48.10	39.37	-40.58	46.89	74.00	27.11	Vertical
4	12038.666	47.04	39.38	-39.44	46.97	74.00	27.03	Vertical
5	14396.666	45.03	40.26	-38.67	46.62	88.30	41.68	Vertical
6	17892	42.25	44.15	-37.05	49.36	74.00	24.64	Vertical
7	17633	33.45	42.60	-37.16	38.88	68.30	29.42	Vertical

11be(EHT80)_TX_CH_183_Horizontal

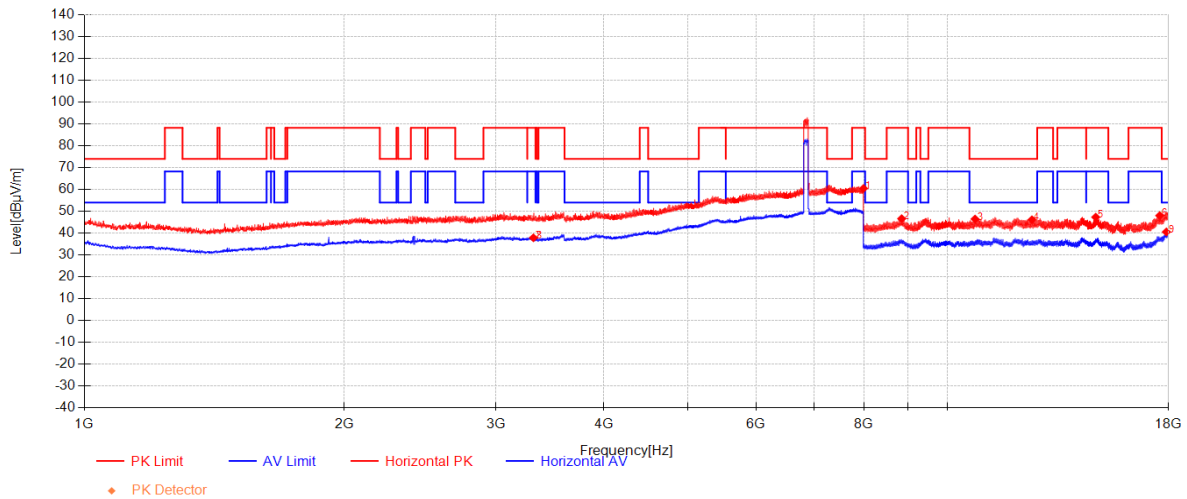


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7991	42.29	36.30	-18.09	60.51	88.30	27.79	Horizontal
2	8847	52.58	37.23	-43.18	46.63	88.30	41.67	Horizontal
3	10759.666	47.90	39.33	-40.76	46.47	74.00	27.53	Horizontal
4	12521.666	46.56	39.09	-39.54	46.11	74.00	27.89	Horizontal
5	14843.333	44.82	40.22	-37.72	47.32	88.30	40.98	Horizontal
6	17606	42.50	42.44	-36.88	48.05	88.30	40.25	Horizontal
7	3313.5	31.78	28.35	-22.26	37.88	68.30	30.42	Horizontal
8	3319	31.67	28.36	-22.28	37.75	68.30	30.55	Horizontal
9	17921.666	33.18	44.33	-36.94	40.57	54.00	13.43	Horizontal

11be(EHT80)_TX_CH_183_Vertical

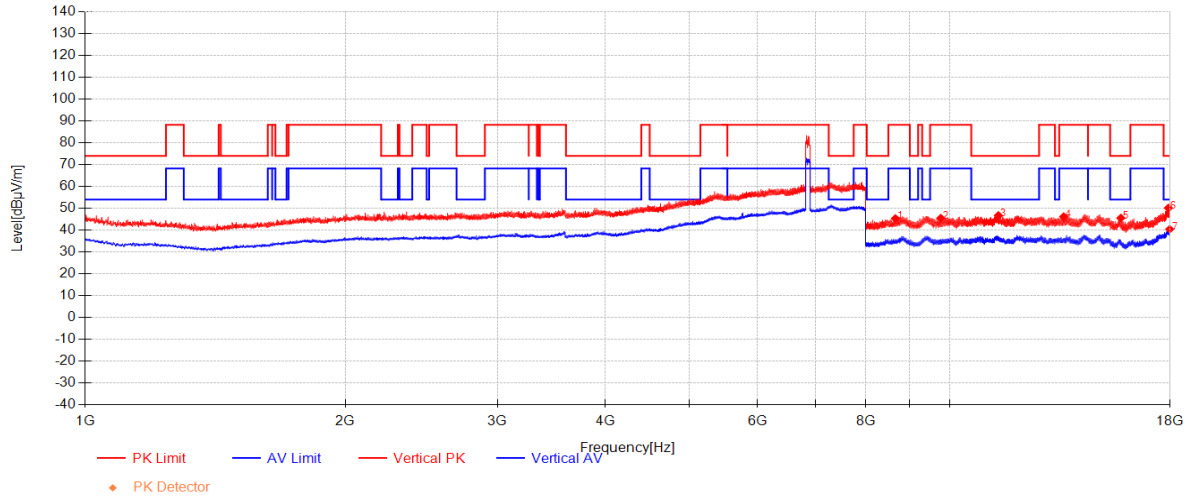


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	8659.3333	52.12	37.03	-43.78	45.36	88.30	42.94	Vertical
2	9773.6667	49.14	38.48	-42.16	45.46	88.30	42.84	Vertical
3	11395.333	47.17	39.46	-39.90	46.73	74.00	27.27	Vertical
4	13560.666	45.64	39.64	-39.11	46.17	88.30	42.13	Vertical
5	15792.333	44.16	38.77	-37.38	45.56	74.00	28.44	Vertical
6	17924.333	42.73	44.35	-36.93	50.14	74.00	23.86	Vertical
7	17987	32.52	44.72	-36.81	40.44	54.00	13.56	Vertical

11be(EHT80)_TX_CH_199_Horizontal

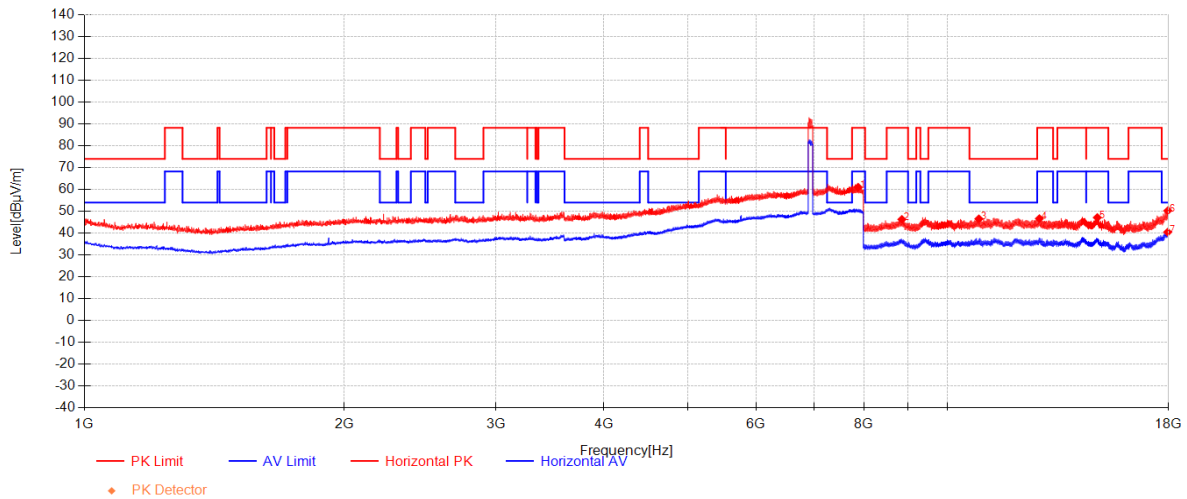


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7877.5	42.42	36.32	-17.65	61.09	88.30	27.21	Horizontal
2	8852.3333	52.23	37.24	-43.16	46.30	88.30	42.00	Horizontal
3	10870	47.57	39.41	-40.42	46.56	74.00	27.44	Horizontal
4	12773	46.83	38.94	-39.09	46.68	88.30	41.62	Horizontal
5	14907	44.56	40.21	-37.61	47.16	88.30	41.14	Horizontal
6	17988	42.38	44.73	-36.80	50.30	74.00	23.70	Horizontal
7	17983.333	32.57	44.70	-36.81	40.46	54.00	13.54	Horizontal

11be(EHT80)_TX_CH_199_Vertical

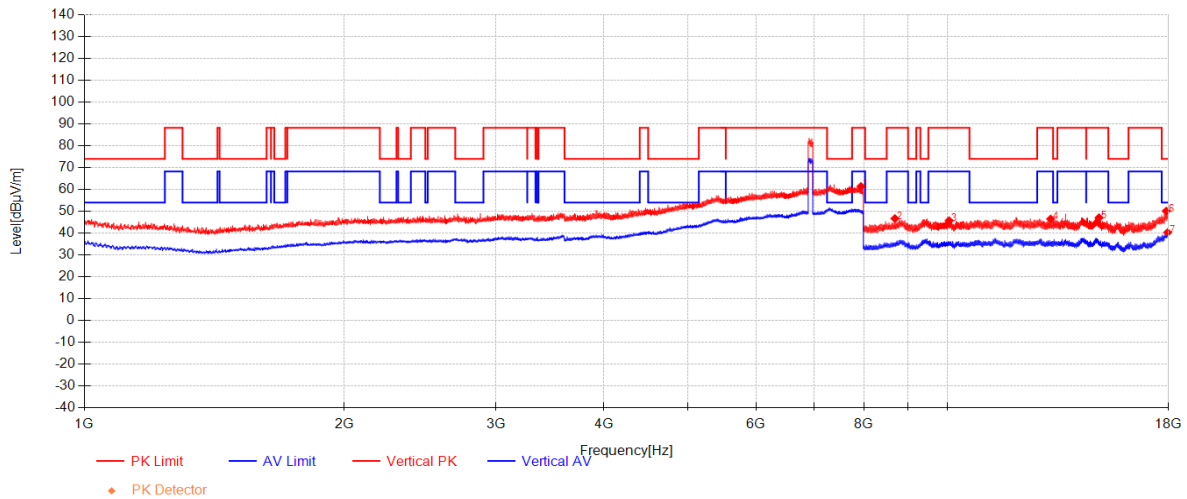


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7936.5	43.00	36.31	-17.88	61.43	88.30	26.87	Vertical
2	8688.6667	53.49	37.06	-43.85	46.69	88.30	41.61	Vertical
3	10039.666	48.55	38.83	-41.63	45.75	88.30	42.55	Vertical
4	13162	46.09	39.04	-38.64	46.49	88.30	41.81	Vertical
5	14976.333	44.80	40.20	-37.91	47.09	88.30	41.21	Vertical
6	17914.333	42.79	44.29	-36.95	50.12	74.00	23.88	Vertical
7	17982.666	32.44	44.70	-36.81	40.32	54.00	13.68	Vertical

11be(EHT80)_TX_CH_215_Horizontal

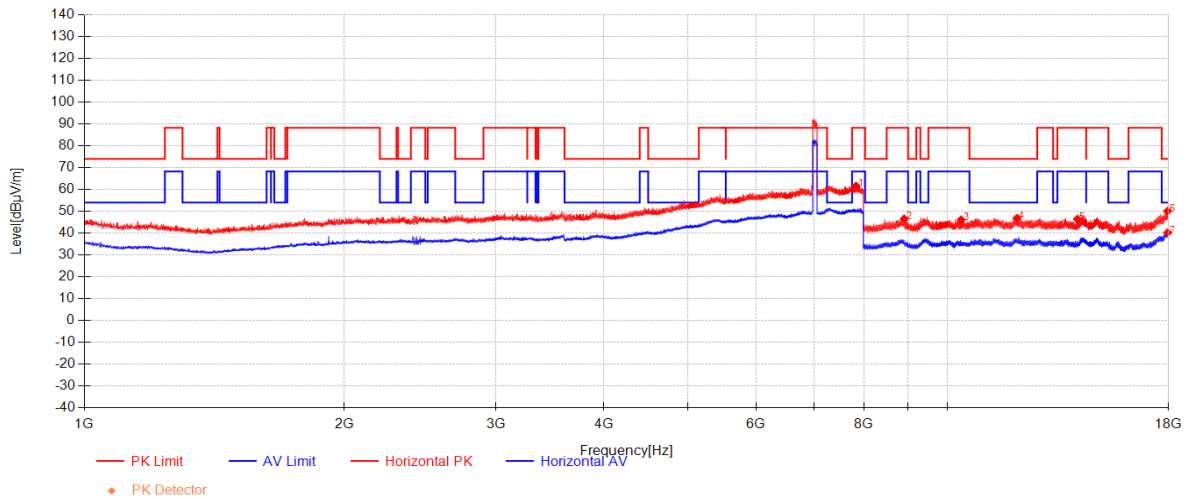


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7834.5	42.79	36.33	-17.48	61.64	88.30	26.66	Horizontal
2	8906.6667	52.35	37.30	-43.06	46.59	88.30	41.71	Horizontal
3	10368	48.29	39.06	-41.16	46.18	88.30	42.12	Horizontal
4	12029	46.90	39.38	-39.43	46.86	74.00	27.14	Horizontal
5	14136.333	44.60	40.29	-38.43	46.45	88.30	41.85	Horizontal
6	17974	42.27	44.64	-36.83	50.08	74.00	23.92	Horizontal
7	17980.333	32.35	44.68	-36.82	40.21	54.00	13.79	Horizontal

11be(EHT80)_TX_CH_215_Horizontal

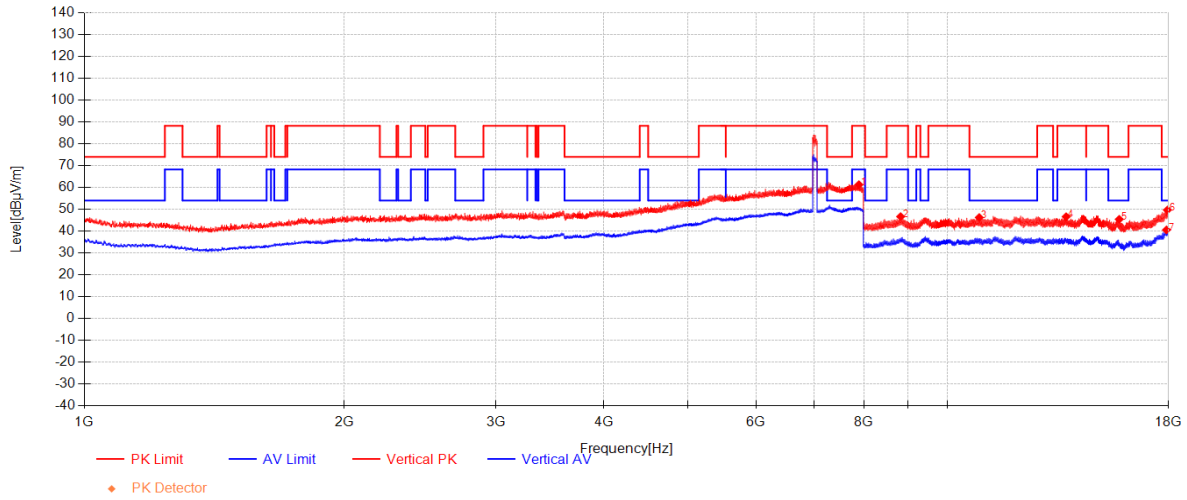


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7894	42.70	36.32	-17.72	61.30	88.30	27.00	Vertical
2	8822.6667	52.71	37.20	-43.25	46.67	88.30	41.63	Vertical
3	10881	47.23	39.42	-40.39	46.26	74.00	27.74	Vertical
4	13718.333	45.17	39.88	-38.44	46.61	88.30	41.69	Vertical
5	15803.333	44.06	38.75	-37.37	45.44	74.00	28.56	Vertical
6	17969.333	41.93	44.62	-36.84	49.70	74.00	24.30	Vertical
7	17926	33.15	44.36	-36.93	40.58	54.00	13.42	Vertical

11be(EHT160)_TX_CH_015_Horizontal

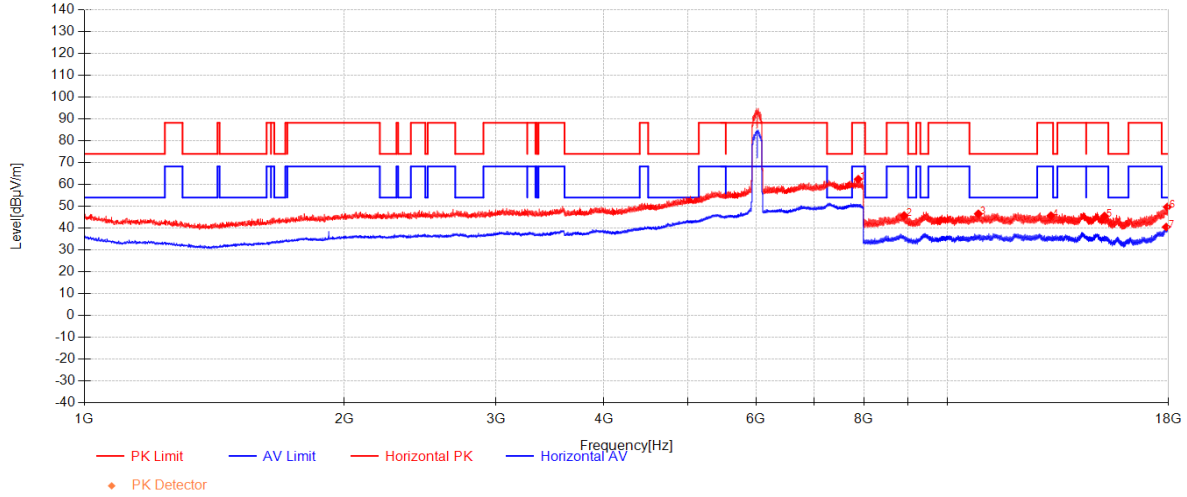


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7880.5	43.79	36.32	-17.66	62.45	88.30	25.85	Horizontal
2	8905.3333	51.55	37.30	-43.05	45.79	88.30	42.51	Horizontal
3	10856.666	47.64	39.40	-40.46	46.58	74.00	27.42	Horizontal
4	13172.666	45.36	39.06	-38.72	45.70	88.30	42.60	Horizontal
5	15195	43.51	39.85	-37.82	45.54	88.30	42.76	Horizontal
6	17965.333	41.92	44.59	-36.85	49.66	74.00	24.34	Horizontal
7	17913.333	33.19	44.28	-36.95	40.52	54.00	13.48	Horizontal

11be(EHT160)_TX_CH_015_Vertical

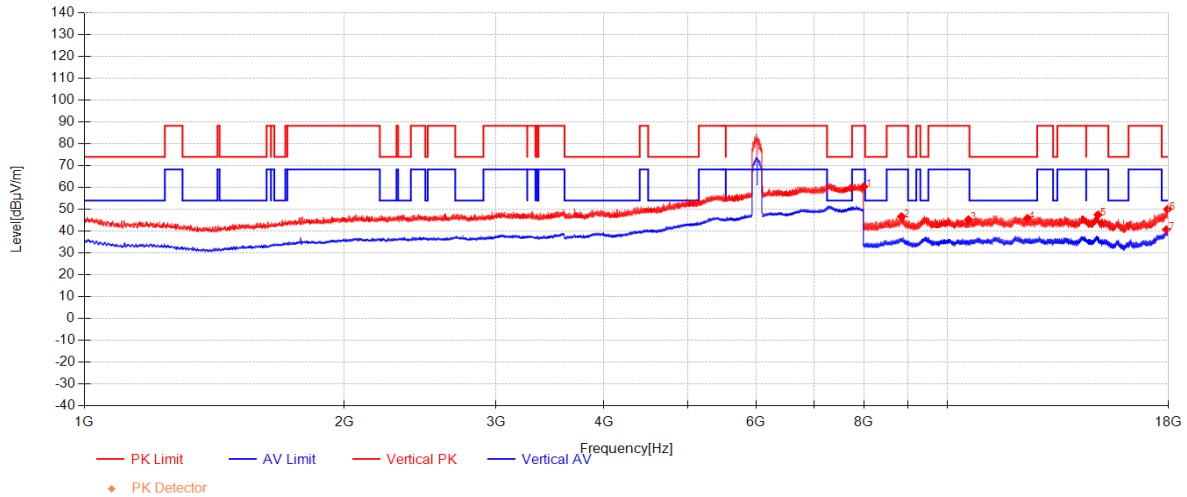


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7997	42.20	36.30	-18.11	60.39	88.30	27.91	Vertical
2	8842.3333	52.66	37.23	-43.19	46.70	88.30	41.60	Vertical
3	10572	47.20	39.20	-41.08	45.32	88.30	42.98	Vertical
4	12371	46.05	39.18	-39.32	45.91	74.00	28.09	Vertical
5	14932.333	44.99	40.21	-37.72	47.48	88.30	40.82	Vertical
6	17978.333	42.20	44.67	-36.82	50.05	74.00	23.95	Vertical
7	17924	33.29	44.34	-36.93	40.70	54.00	13.30	Vertical

11be(EHT160)_TX_CH_047_Horizontal

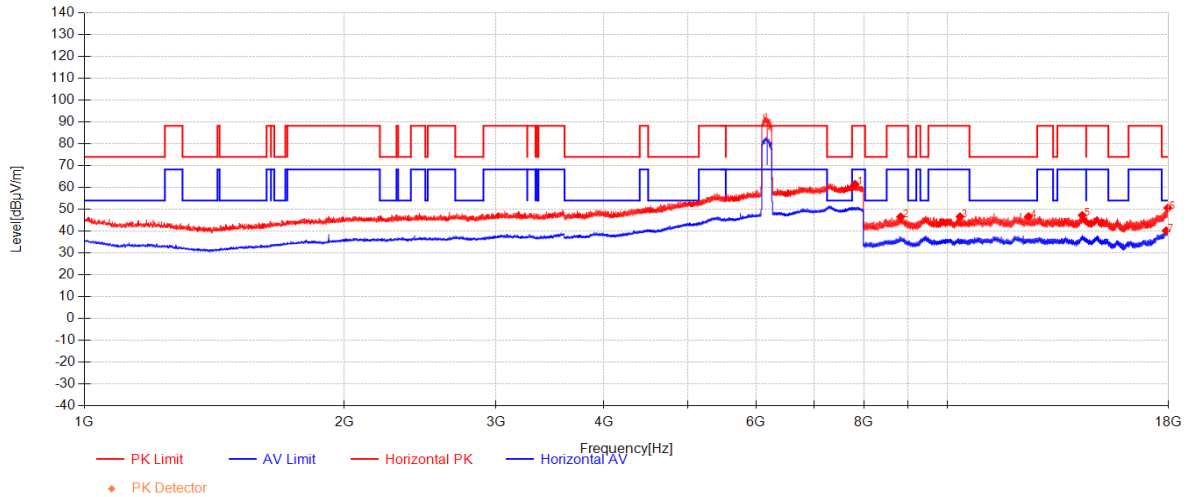


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7812.5	42.59	36.34	-17.40	61.53	88.30	26.77	Horizontal
2	8822	52.61	37.20	-43.25	46.57	88.30	41.73	Horizontal
3	10337.333	48.87	39.04	-41.25	46.65	88.30	41.65	Horizontal
4	12408.333	46.82	39.15	-39.29	46.69	74.00	27.31	Horizontal
5	14318	45.57	40.27	-38.56	47.27	88.30	41.03	Horizontal
6	17989.333	42.70	44.74	-36.80	50.63	74.00	23.37	Horizontal
7	17910.666	32.90	44.26	-36.96	40.21	54.00	13.79	Horizontal

11be(EHT160)_TX_CH_047_Vertical

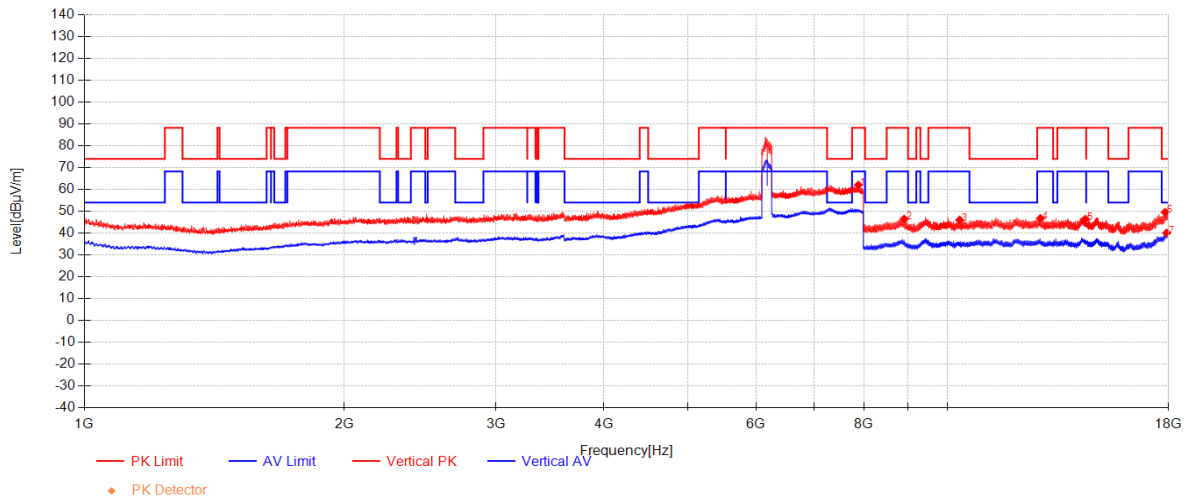


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7881	43.42	36.32	-17.67	62.08	88.30	26.22	Vertical
2	8905.6667	52.24	37.30	-43.06	46.48	88.30	41.82	Vertical
3	10326.333	48.34	39.03	-41.28	46.08	88.30	42.22	Vertical
4	12808.333	46.91	38.91	-39.10	46.73	88.30	41.57	Vertical
5	14438.666	44.85	40.26	-38.68	46.43	88.30	41.87	Vertical
6	17860.333	42.97	43.96	-37.31	49.62	74.00	24.38	Vertical
7	17934.666	32.60	44.41	-36.91	40.10	54.00	13.90	Vertical

11be(EHT160)_TX_CH_111_Horizontal

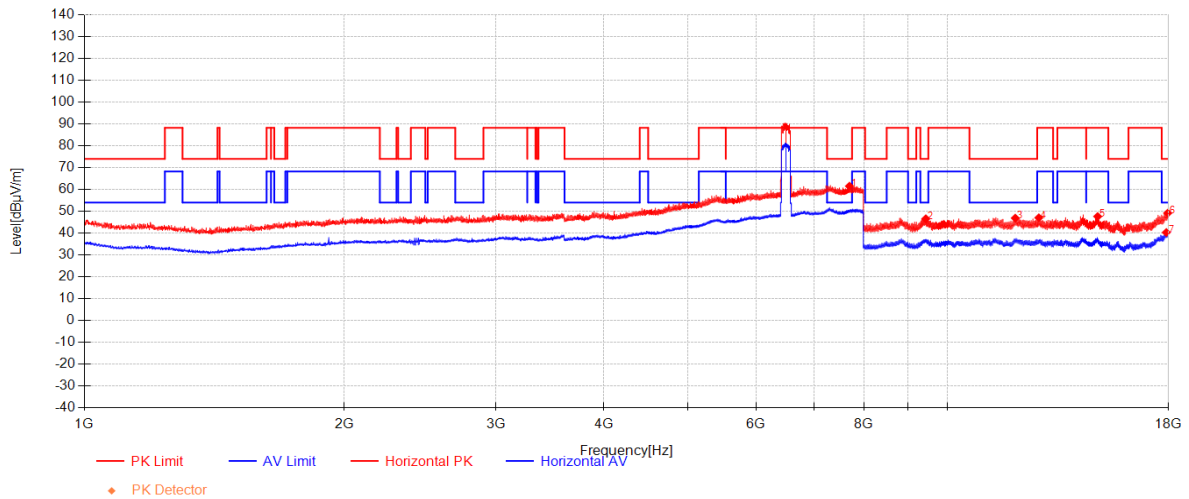


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7697	42.32	36.36	-17.14	61.54	74.00	12.46	Horizontal
2	9435.3333	51.28	38.01	-42.68	46.61	74.00	27.39	Horizontal
3	11978	46.97	39.40	-39.47	46.90	74.00	27.10	Horizontal
4	12754.333	47.20	38.95	-39.10	47.05	88.30	41.25	Horizontal
5	14921.333	45.10	40.21	-37.67	47.64	88.30	40.66	Horizontal
6	17984	41.28	44.70	-36.81	49.17	74.00	24.83	Horizontal
7	17917	32.96	44.30	-36.95	40.32	54.00	13.68	Horizontal

11be(EHT160)_TX_CH_111_Vertical

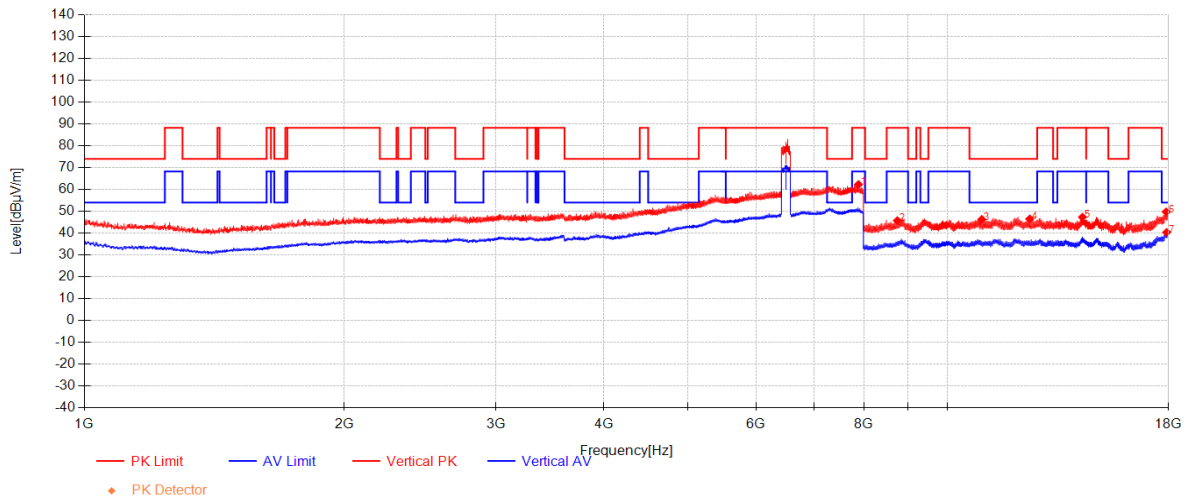


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7883.5	43.66	36.32	-17.68	62.31	88.30	25.99	Vertical
2	8746	52.24	37.12	-43.62	45.74	88.30	42.56	Vertical
3	10955	47.19	39.47	-40.32	46.33	74.00	27.67	Vertical
4	12448.333	46.82	39.13	-39.45	46.50	74.00	27.50	Vertical
5	14326.666	45.65	40.27	-38.57	47.34	88.30	40.96	Vertical
6	17912	42.45	44.27	-36.96	49.77	74.00	24.23	Vertical
7	17932.666	32.87	44.40	-36.91	40.35	54.00	13.65	Vertical

11be(EHT160)_TX_CH_143_Horizontal

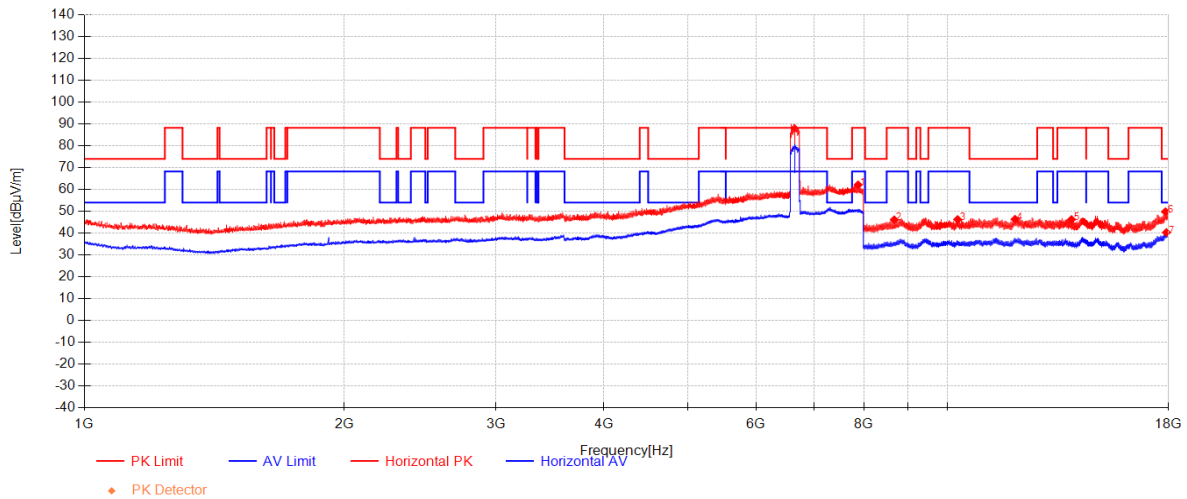


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7876.5	43.46	36.32	-17.65	62.14	88.30	26.16	Horizontal
2	8673.6667	52.92	37.04	-43.82	46.14	88.30	42.16	Horizontal
3	10270.333	48.84	38.99	-41.54	46.29	88.30	42.01	Horizontal
4	11970	46.48	39.40	-39.51	46.38	74.00	27.62	Horizontal
5	13914.666	44.86	40.17	-38.79	46.24	88.30	42.06	Horizontal
6	17876.666	42.94	44.06	-37.17	49.83	74.00	24.17	Horizontal
7	17922.333	32.91	44.33	-36.94	40.31	54.00	13.69	Horizontal

11be(EHT160)_TX_CH_143_Vertical

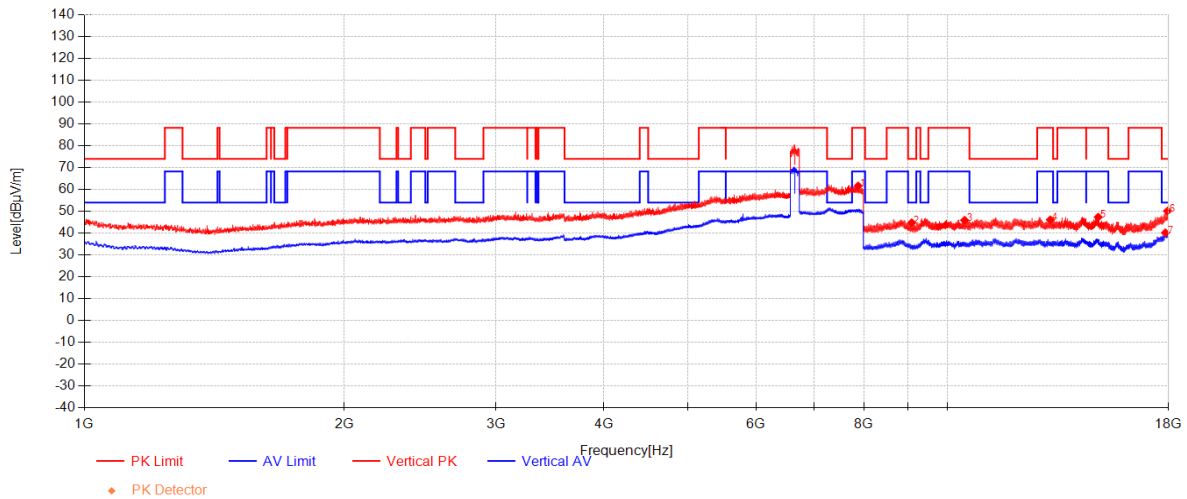


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7878	42.99	36.32	-17.65	61.66	88.30	26.64	Vertical
2	9087.6667	50.22	37.52	-42.95	44.80	74.00	29.20	Vertical
3	10464	48.00	39.12	-41.20	45.92	88.30	42.38	Vertical
4	13150.333	45.66	39.03	-38.56	46.13	88.30	42.17	Vertical
5	14941.666	44.90	40.21	-37.76	47.35	88.30	40.95	Vertical
6	17973.666	42.32	44.64	-36.83	50.13	74.00	23.87	Vertical
7	17874.333	33.34	44.05	-37.19	40.19	54.00	13.81	Vertical

11be(EHT160)_TX_CH_175_Horizontal

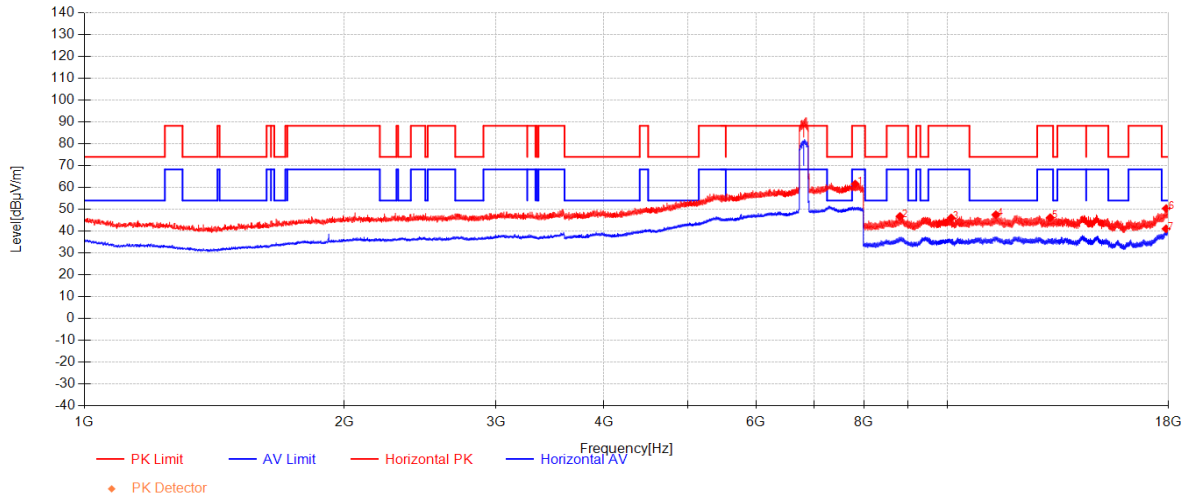


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7816.5	42.66	36.34	-17.41	61.58	88.30	26.72	Horizontal
2	8807.6667	52.88	37.19	-43.29	46.78	88.30	41.52	Horizontal
3	10096.333	48.79	38.87	-41.62	46.04	88.30	42.26	Horizontal
4	11373.333	47.95	39.46	-39.89	47.52	74.00	26.48	Horizontal
5	13147.333	45.69	39.02	-38.54	46.18	88.30	42.12	Horizontal
6	17913.333	43.06	44.28	-36.95	50.39	74.00	23.61	Horizontal
7	17908	33.80	44.25	-36.96	41.08	54.00	12.92	Horizontal

11be(EHT160)_TX_CH_175_Vertical

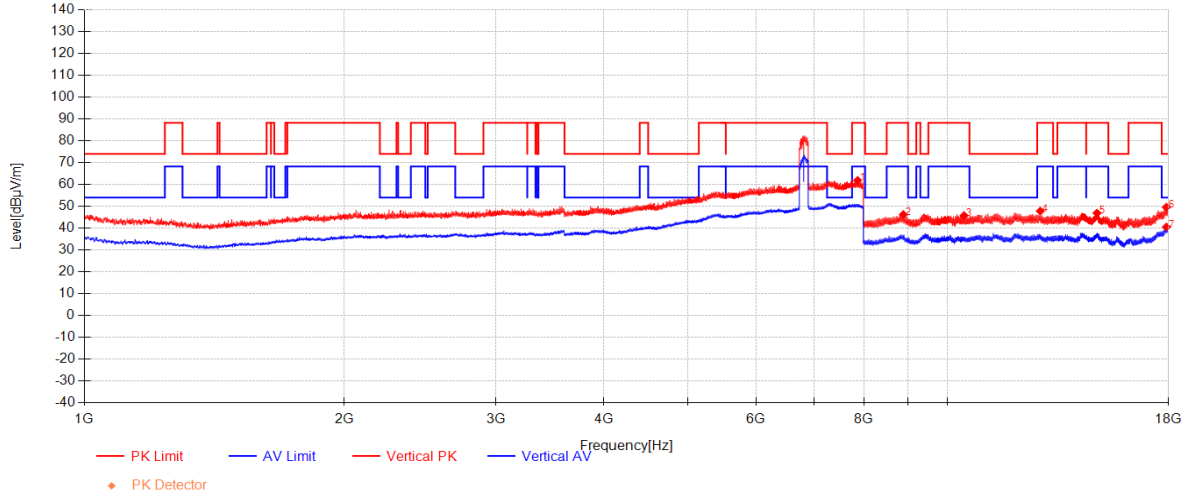


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7867	43.21	36.33	-17.61	61.93	88.30	26.37	Vertical
2	8886	52.04	37.27	-43.07	46.25	88.30	42.05	Vertical
3	10448.666	47.83	39.11	-41.17	45.77	88.30	42.53	Vertical
4	12803	47.96	38.92	-39.08	47.80	88.30	40.50	Vertical
5	14891.666	44.29	40.21	-37.60	46.90	88.30	41.40	Vertical
6	17921	42.22	44.33	-36.94	49.61	74.00	24.39	Vertical
7	17923.333	33.13	44.34	-36.93	40.54	54.00	13.46	Vertical

11be(EHT160)_TX_CH_207_Horizontal

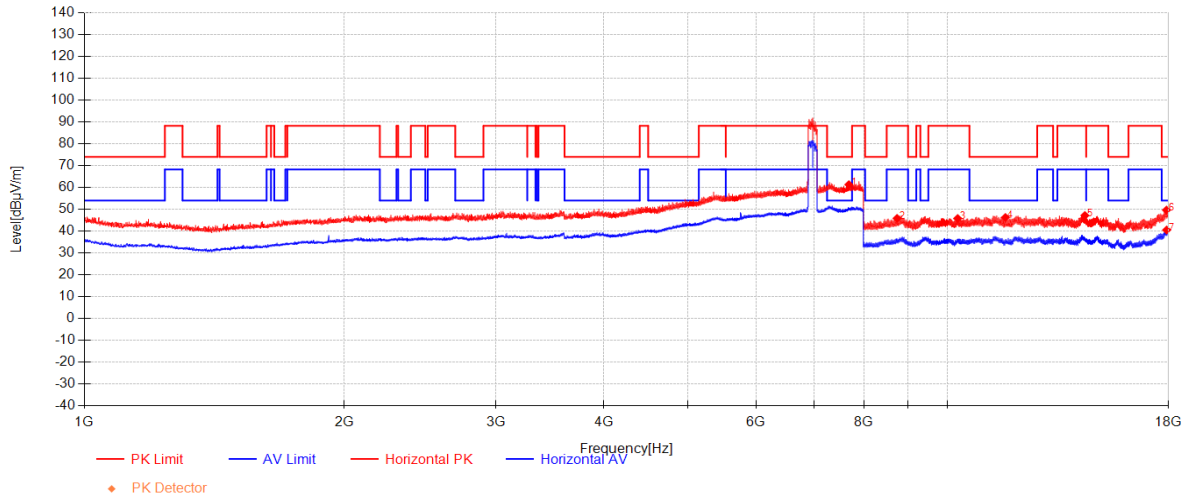


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7686	42.16	36.36	-17.19	61.33	74.00	12.67	Horizontal
2	8739.3333	52.41	37.11	-43.66	45.87	88.30	42.43	Horizontal
3	10271	48.36	38.99	-41.53	45.82	88.30	42.48	Horizontal
4	11665.333	46.53	39.43	-39.68	46.28	74.00	27.72	Horizontal
5	14422	45.61	40.26	-38.67	47.19	88.30	41.11	Horizontal
6	17925	42.24	44.35	-36.93	49.66	74.00	24.34	Horizontal
7	17932.666	33.06	44.40	-36.91	40.54	54.00	13.46	Horizontal

11be(EHT160)_TX_CH_207_Vertical

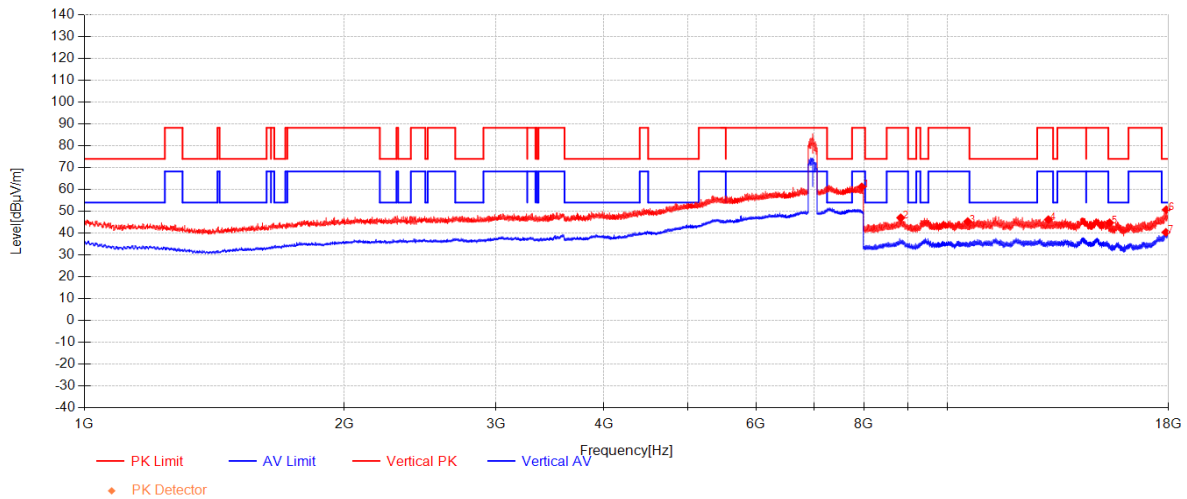


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7953.5	42.83	36.31	-17.94	61.20	88.30	27.10	Vertical
2	8825	53.07	37.21	-43.24	47.04	88.30	41.26	Vertical
3	10550.333	47.25	39.19	-41.14	45.30	88.30	43.00	Vertical
4	13083.666	45.64	38.93	-38.38	46.18	88.30	42.12	Vertical
5	15403	43.25	39.47	-37.96	44.77	74.00	29.23	Vertical
6	17915.333	43.39	44.29	-36.95	50.73	74.00	23.27	Vertical
7	17900	33.14	44.20	-36.98	40.36	54.00	13.64	Vertical

11be(EHT320)_TX_CH_31_Horizontal

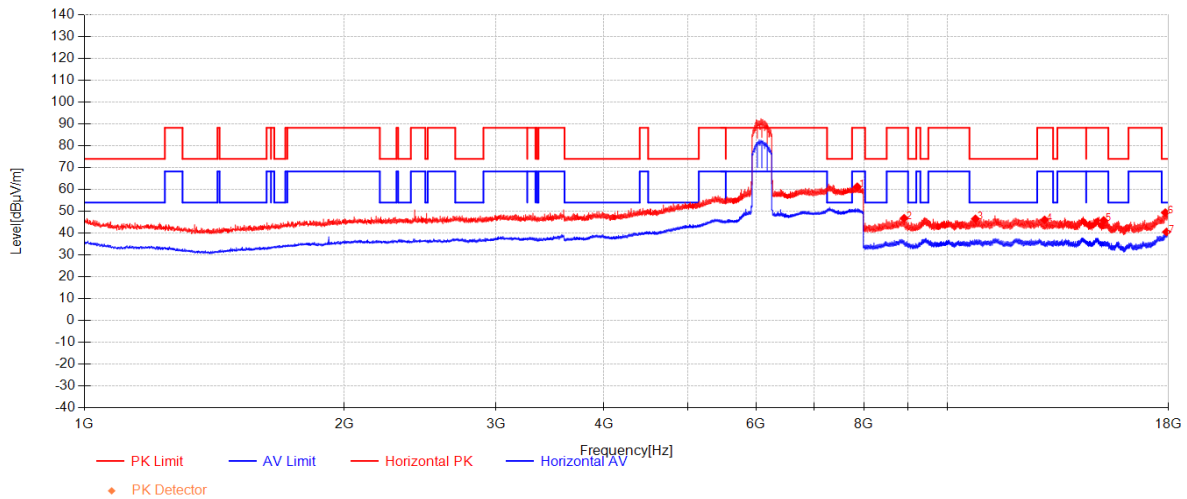


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7858.5	42.51	36.33	-17.58	61.26	88.30	27.04	Horizontal
2	8904.6667	52.57	37.30	-43.05	46.81	88.30	41.49	Horizontal
3	10770.333	47.93	39.34	-40.73	46.54	74.00	27.46	Horizontal
4	12951.666	46.63	38.83	-39.39	46.07	88.30	42.23	Horizontal
5	15162.666	43.82	39.91	-37.92	45.81	88.30	42.49	Horizontal
6	17870.333	42.61	44.02	-37.23	49.41	74.00	24.59	Horizontal
7	17928.666	33.11	44.37	-36.92	40.56	54.00	13.44	Horizontal

11be(EHT320)_TX_CH_31_Vertical

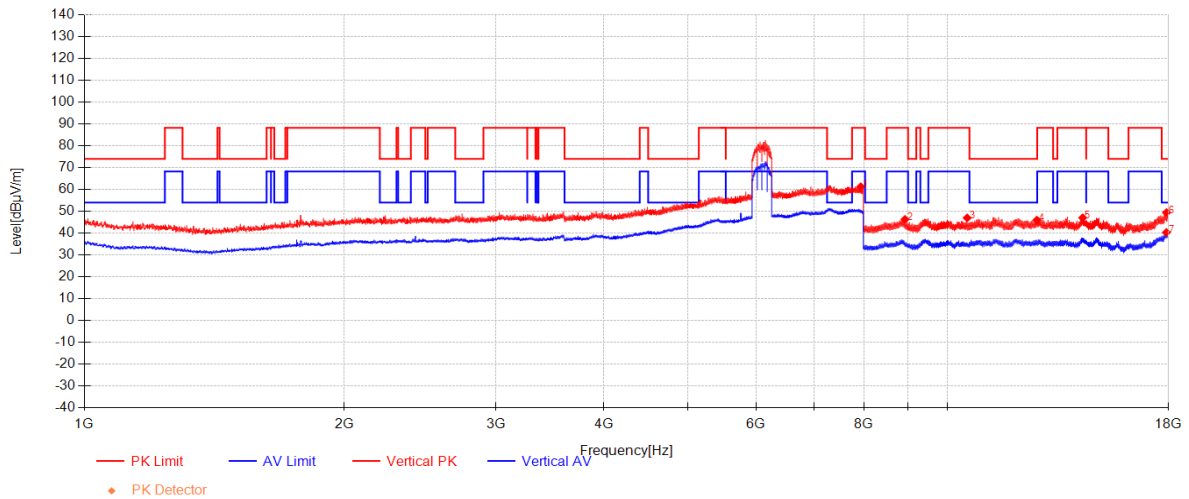


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7933	42.81	36.31	-17.87	61.26	88.30	27.04	Vertical
2	8924.3333	52.14	37.32	-43.14	46.32	88.30	41.98	Vertical
3	10536	48.99	39.18	-41.18	46.99	88.30	41.31	Vertical
4	12686.333	46.13	38.99	-39.13	45.99	74.00	28.01	Vertical
5	14336.333	45.38	40.27	-38.59	47.06	88.30	41.24	Vertical
6	17928.666	41.97	44.37	-36.92	49.42	74.00	24.58	Vertical
7	17923	32.92	44.34	-36.93	40.32	54.00	13.68	Vertical

11be(EHT320)_TX_CH_63_Horizontal

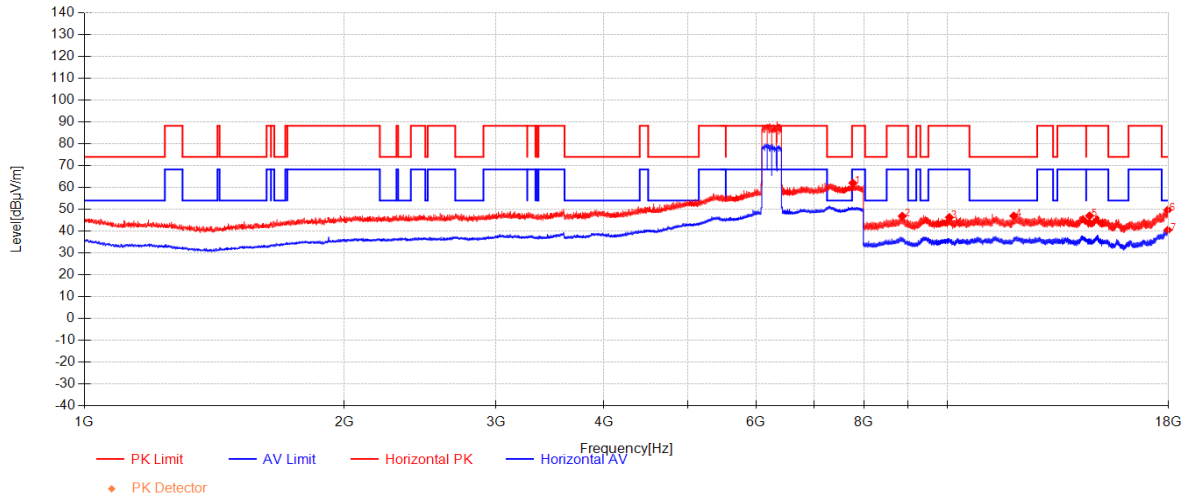


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7767	42.99	36.35	-17.28	62.06	88.30	26.24	Horizontal
2	8860.3333	52.79	37.25	-43.14	46.90	88.30	41.40	Horizontal
3	10048.333	49.13	38.83	-41.63	46.33	88.30	41.97	Horizontal
4	11930	47.25	39.41	-39.69	46.97	74.00	27.03	Horizontal
5	14603.333	45.02	40.24	-38.23	47.03	88.30	41.27	Horizontal
6	17988.333	41.73	44.73	-36.80	49.66	74.00	24.34	Horizontal
7	17996	32.54	44.78	-36.79	40.53	54.00	13.47	Horizontal

11be(EHT320)_TX_CH_63_Vertical

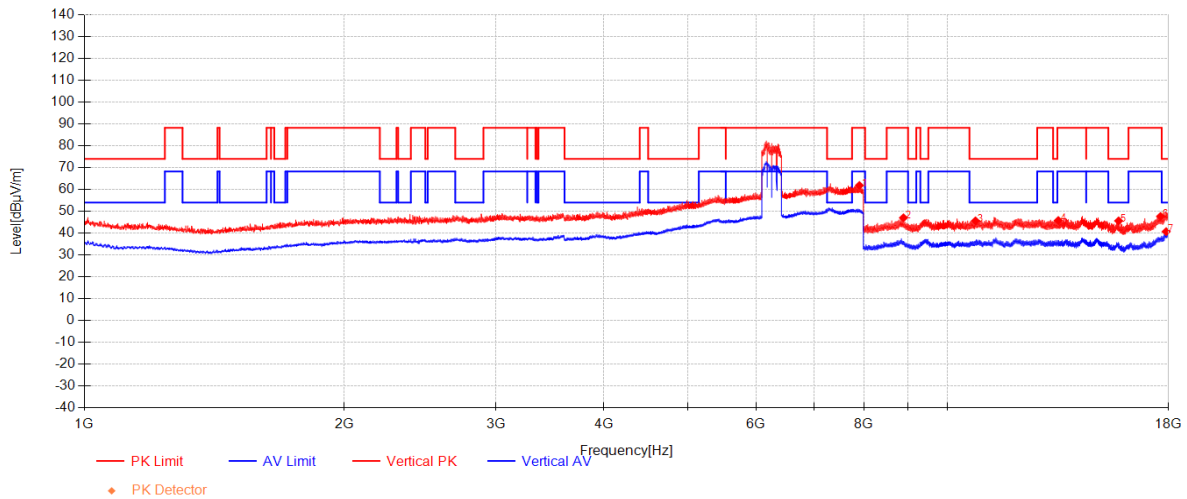


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7904	43.29	36.32	-17.76	61.85	88.30	26.45	Vertical
2	8889	52.81	37.28	-43.06	47.03	88.30	41.27	Vertical
3	10771.666	47.04	39.34	-40.72	45.66	74.00	28.34	Vertical
4	13434.666	45.67	39.45	-39.30	45.82	88.30	42.48	Vertical
5	15780	44.26	38.80	-37.42	45.64	74.00	28.36	Vertical
6	17645.333	42.31	42.67	-37.29	47.69	88.30	40.61	Vertical
7	17910.666	33.41	44.26	-36.96	40.72	54.00	13.28	Vertical

11be(EHT320)_TX_CH_95_Horizontal

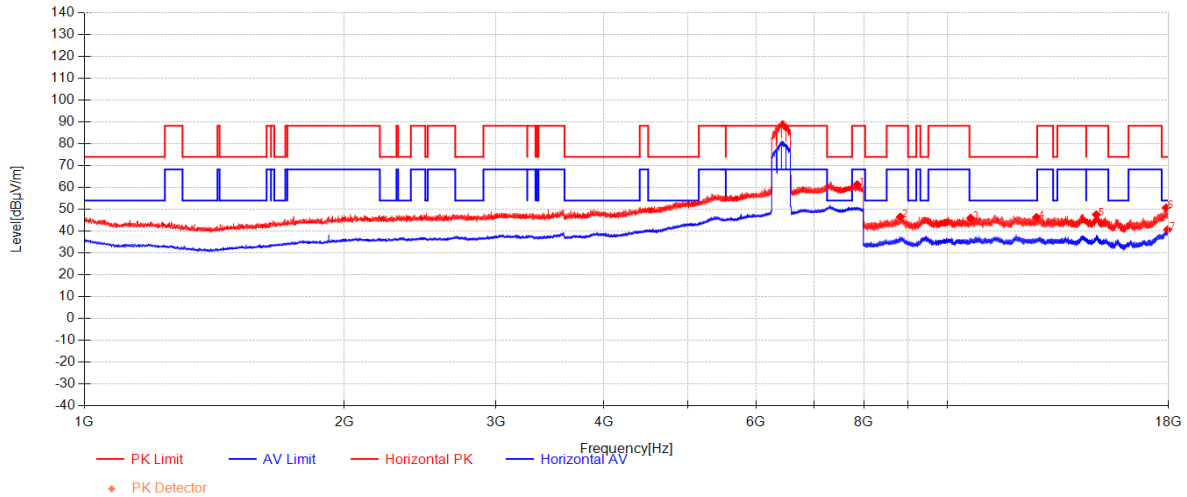


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7857.5	42.62	36.33	-17.57	61.37	88.30	26.93	Horizontal
2	8817	52.58	37.20	-43.26	46.52	88.30	41.78	Horizontal
3	10633.666	47.71	39.24	-40.98	45.98	74.00	28.02	Horizontal
4	12673	46.50	39.00	-39.12	46.38	74.00	27.62	Horizontal
5	14866	45.05	40.21	-37.66	47.60	88.30	40.70	Horizontal
6	17907	43.43	44.24	-36.97	50.71	74.00	23.29	Horizontal
7	17980.666	32.83	44.68	-36.82	40.70	54.00	13.30	Horizontal

11be(EHT320)_TX_CH_95_Vertical

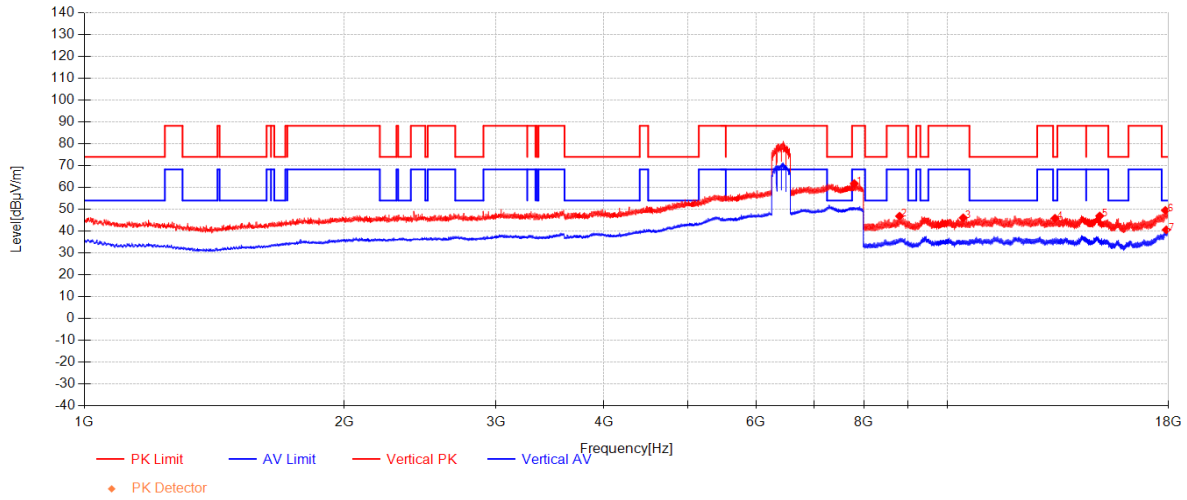


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7797	42.83	36.34	-17.34	61.83	88.30	26.47	Vertical
2	8797.3333	53.02	37.18	-43.33	46.87	88.30	41.43	Vertical
3	10424.666	48.15	39.10	-41.12	46.13	88.30	42.17	Vertical
4	13315	45.43	39.27	-38.79	45.91	74.00	28.09	Vertical
5	15002	44.78	40.20	-38.01	46.96	88.30	41.34	Vertical
6	17876.333	42.63	44.06	-37.18	49.51	74.00	24.49	Vertical
7	17914.333	33.28	44.29	-36.95	40.61	54.00	13.39	Vertical

11be(EHT320)_TX_CH_127_Horizontal

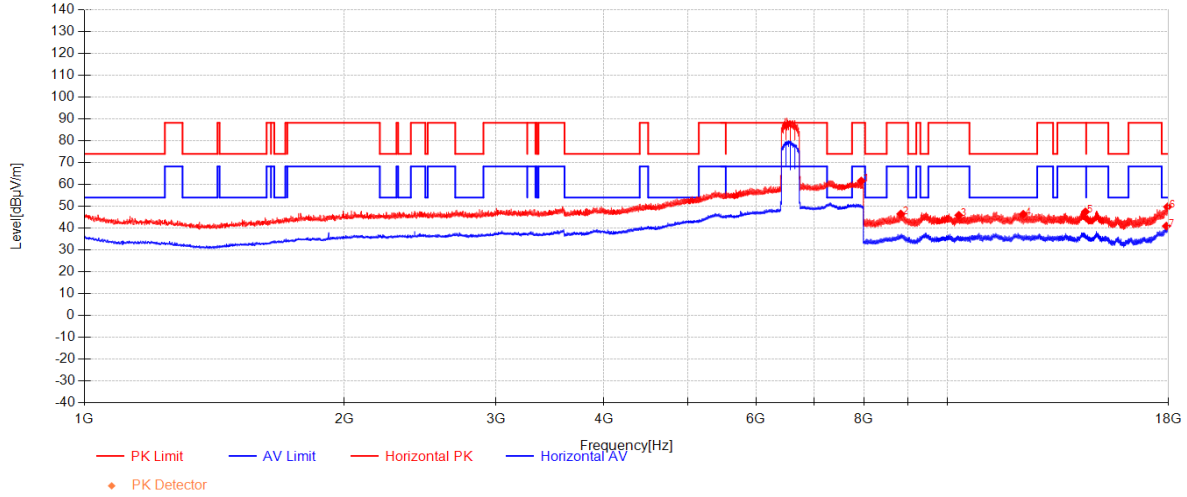


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7943.5	43.20	36.31	-17.91	61.61	88.30	26.69	Horizontal
2	8826.3333	52.53	37.21	-43.24	46.50	88.30	41.80	Horizontal
3	10304	48.24	39.01	-41.35	45.90	88.30	42.40	Horizontal
4	12235.666	46.75	39.26	-39.63	46.38	74.00	27.62	Horizontal
5	14441.666	45.90	40.26	-38.68	47.48	88.30	40.82	Horizontal
6	17982.333	41.90	44.69	-36.82	49.78	74.00	24.22	Horizontal
7	17921.666	33.56	44.33	-36.94	40.95	54.00	13.05	Horizontal

11be(EHT320)_TX_CH_127_Vertical

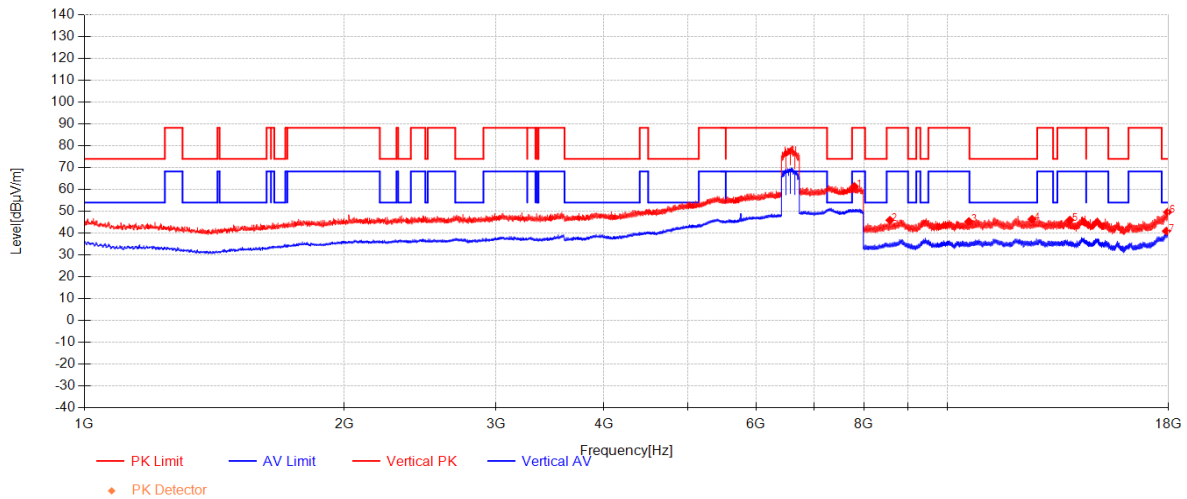


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7797.5	42.45	36.34	-17.34	61.45	88.30	26.85	Vertical
2	8574	52.74	36.93	-43.74	45.93	88.30	42.37	Vertical
3	10584	47.21	39.21	-41.04	45.37	88.30	42.93	Vertical
4	12525.333	46.80	39.08	-39.51	46.37	74.00	27.63	Vertical
5	13854	44.78	40.08	-38.87	45.99	88.30	42.31	Vertical
6	17976.666	41.76	44.66	-36.83	49.59	74.00	24.41	Vertical
7	17920.333	33.58	44.32	-36.94	40.96	54.00	13.04	Vertical

11be(EHT320)_TX_CH_159_Horizontal

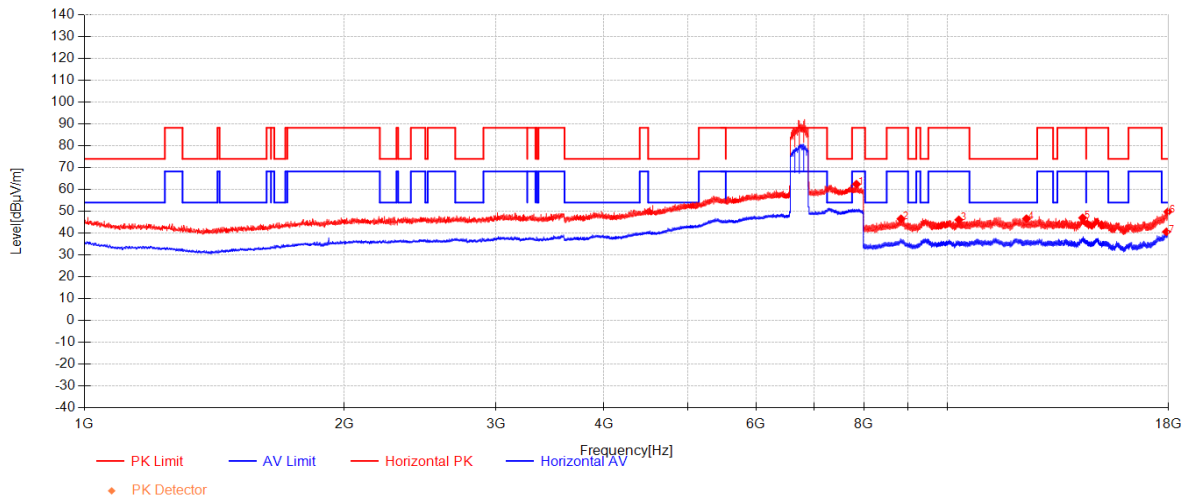


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7842	43.63	36.33	-17.51	62.45	88.30	25.85	Horizontal
2	8832.6667	52.56	37.22	-43.22	46.56	88.30	41.74	Horizontal
3	10303.333	48.43	39.01	-41.35	46.09	88.30	42.21	Horizontal
4	12341	46.82	39.20	-39.39	46.62	74.00	27.38	Horizontal
5	14336.666	45.33	40.27	-38.59	47.01	88.30	41.29	Horizontal
6	17995.333	41.82	44.77	-36.79	49.80	74.00	24.20	Horizontal
7	17923.666	33.20	44.34	-36.93	40.61	54.00	13.39	Horizontal

11be(EHT320)_TX_CH_159_Vertical

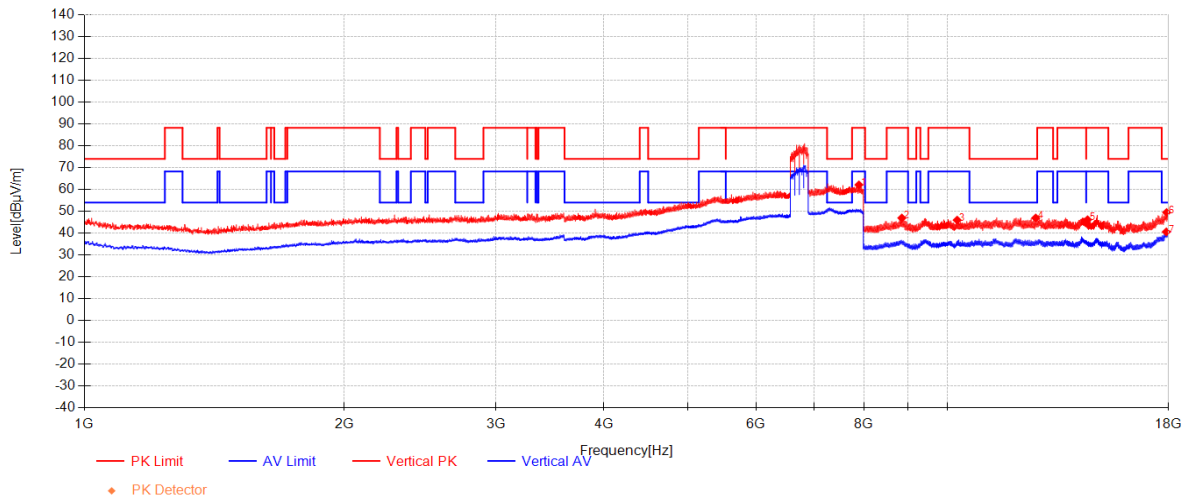


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7893.5	43.54	36.32	-17.71	62.15	88.30	26.15	Vertical
2	8851.3333	52.88	37.24	-43.17	46.95	88.30	41.35	Vertical
3	10258.333	48.60	38.98	-41.61	45.97	88.30	42.33	Vertical
4	12649	47.04	39.01	-39.09	46.96	74.00	27.04	Vertical
5	14524.333	44.51	40.25	-38.58	46.18	88.30	42.12	Vertical
6	17931.666	42.03	44.39	-36.92	49.50	74.00	24.50	Vertical
7	17918.333	33.21	44.31	-36.94	40.58	54.00	13.42	Vertical

11be(EHT320)_TX_CH_191_Horizontal

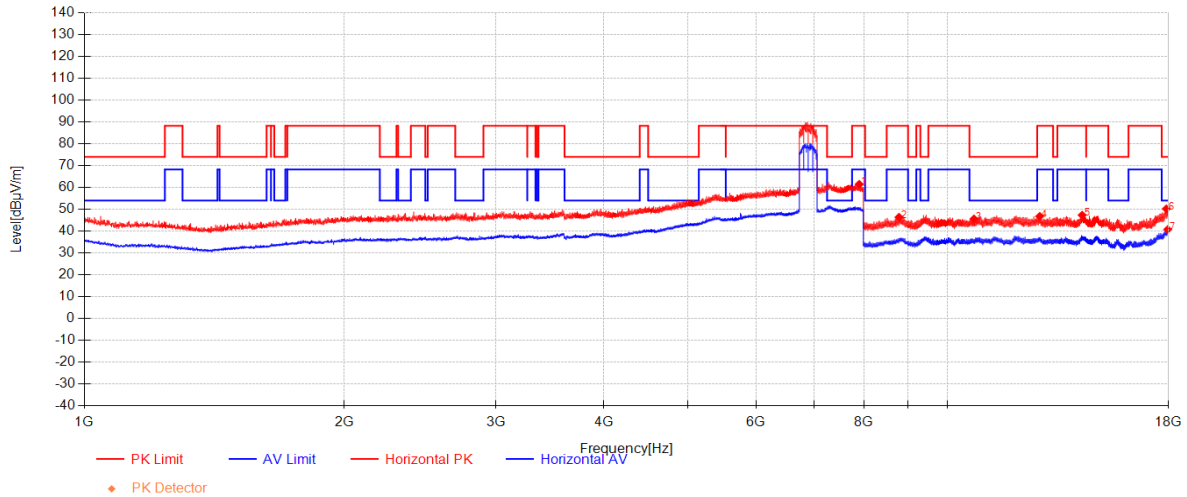

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7900.5	42.90	36.32	-17.74	61.48	88.30	26.82	Horizontal
2	8785	52.62	37.16	-43.40	46.39	88.30	41.91	Horizontal
3	10728	47.16	39.31	-40.85	45.62	74.00	28.38	Horizontal
4	12783.333	46.95	38.93	-39.08	46.80	88.30	41.50	Horizontal
5	14316	45.62	40.27	-38.56	47.33	88.30	40.97	Horizontal
6	17918.666	42.86	44.31	-36.94	50.23	74.00	23.77	Horizontal
7	17984.333	32.88	44.71	-36.81	40.77	54.00	13.23	Horizontal

11be(EHT320)_TX_CH_191_Vertical

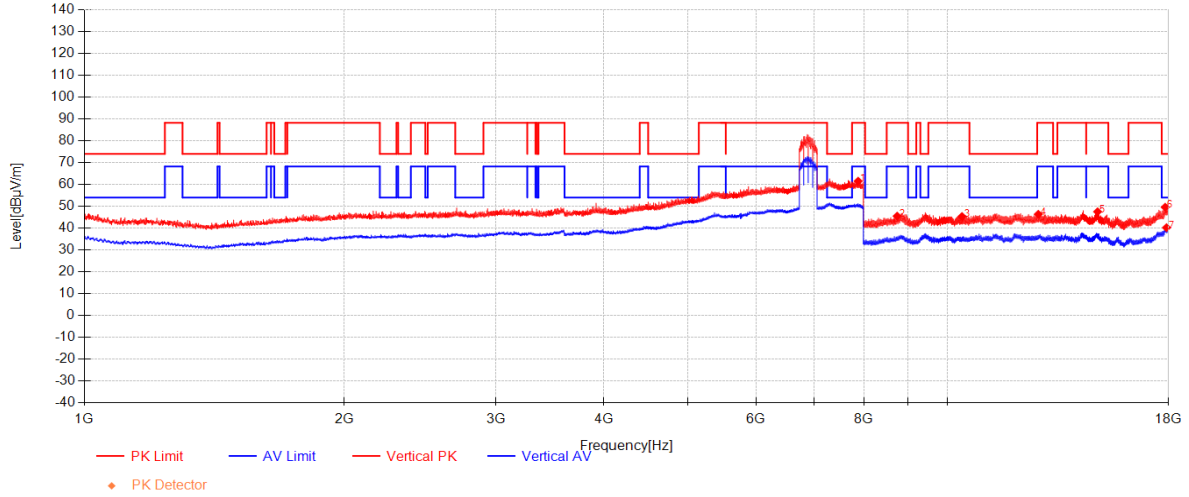

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7877.5	42.88	36.32	-17.65	61.55	88.30	26.75	Vertical
2	8741.3333	52.04	37.12	-43.64	45.51	88.30	42.79	Vertical
3	10390.666	47.37	39.07	-41.10	45.35	88.30	42.95	Vertical
4	12737.333	46.52	38.96	-39.11	46.36	88.30	41.94	Vertical
5	14918	45.00	40.21	-37.66	47.55	88.30	40.75	Vertical
6	17863.333	42.90	43.98	-37.28	49.60	74.00	24.40	Vertical
7	17925.666	32.80	44.35	-36.93	40.23	54.00	13.77	Vertical

7.3 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2020) Section 6.10.5 & 12.7.2

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	11	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	13	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	14	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

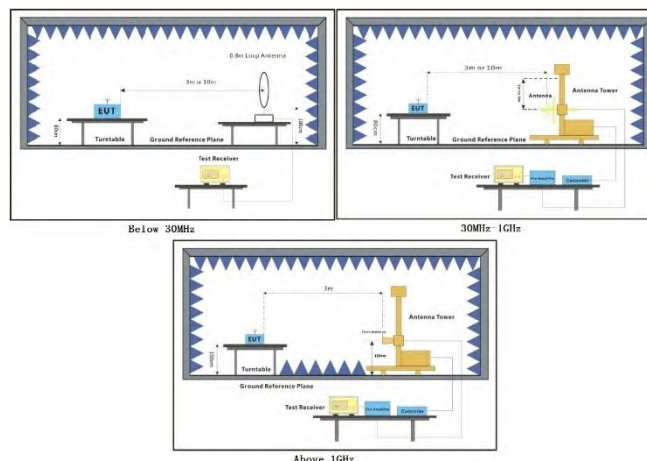

7.3.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.


Remark 3: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

11a_TX_CH_001_Horizontal_Peak

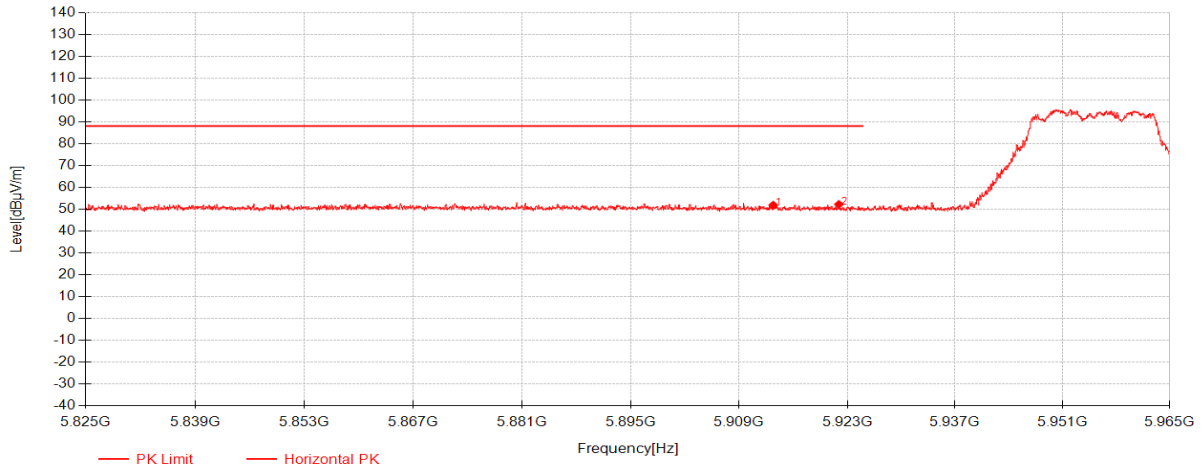


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5913.41	36.95	34.37	-19.39	51.93	88.20	36.27	Horizontal
2	5921.915	37.33	34.36	-19.39	52.29	88.20	35.91	Horizontal

11a_TX_CH_001_Horizontal_Average

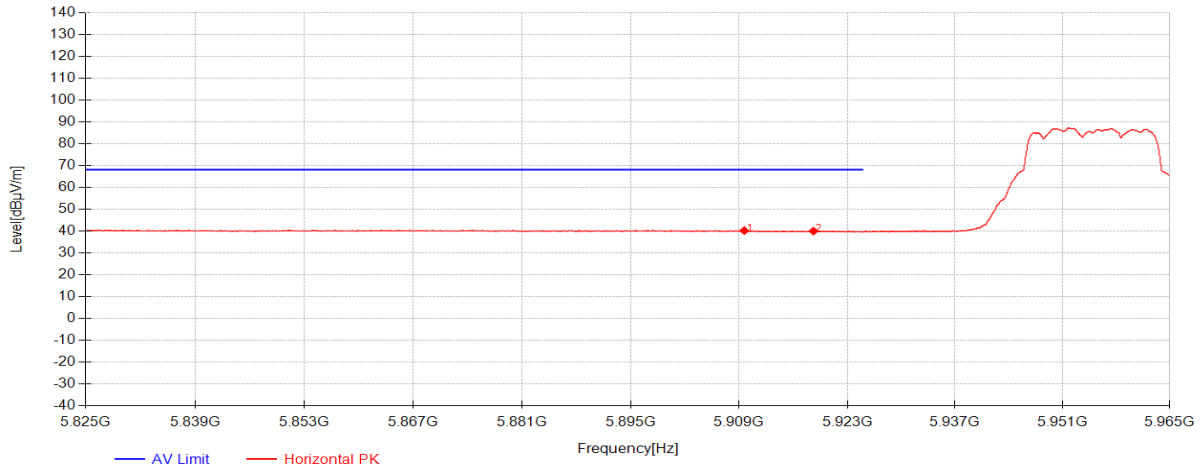


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5909.665	25.26	34.38	-19.40	40.24	68.20	27.96	Horizontal
2	5918.625	25.05	34.36	-19.39	40.02	68.20	28.18	Horizontal

11a_TX_CH_001_Vertical_Peak

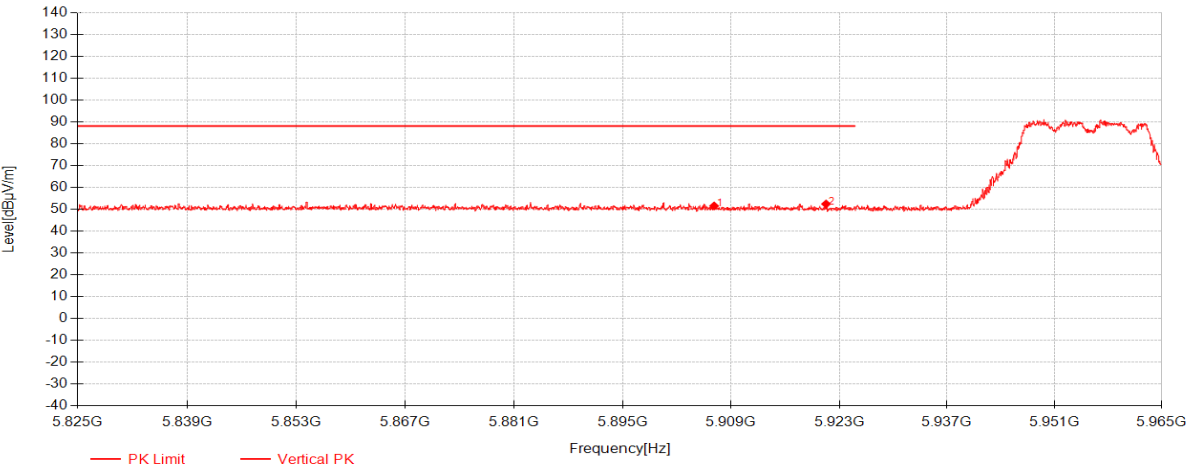


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5906.795	36.57	34.39	-19.40	51.56	88.20	36.64	Vertical
2	5921.285	37.49	34.36	-19.39	52.46	88.20	35.74	Vertical

11a_TX_CH_001_Vertical_Average

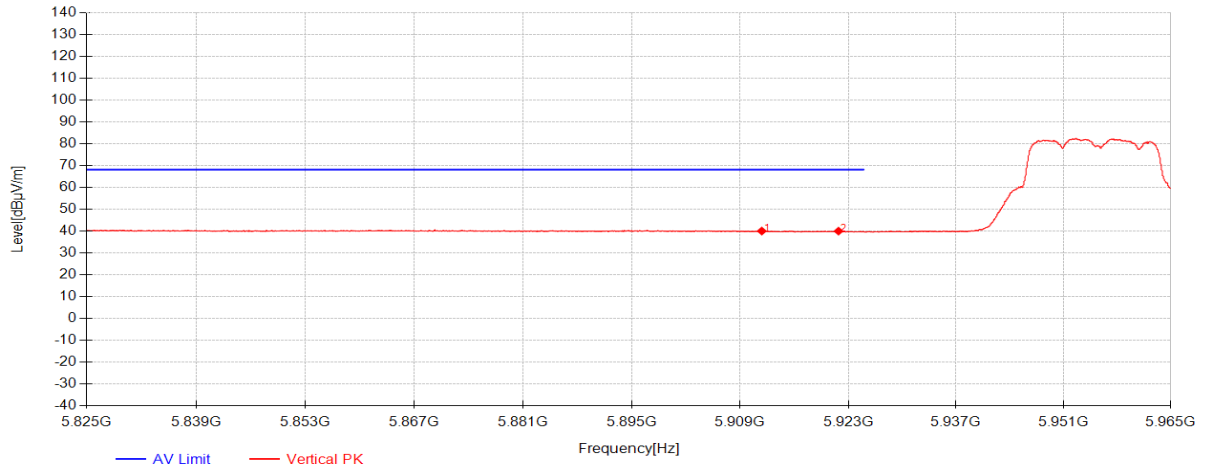


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5911.8	25.06	34.38	-19.40	40.04	68.20	28.16	Vertical
2	5921.74	25.04	34.36	-19.39	40.01	68.20	28.19	Vertical

11a_TX_CH_233_Horizontal_Peak

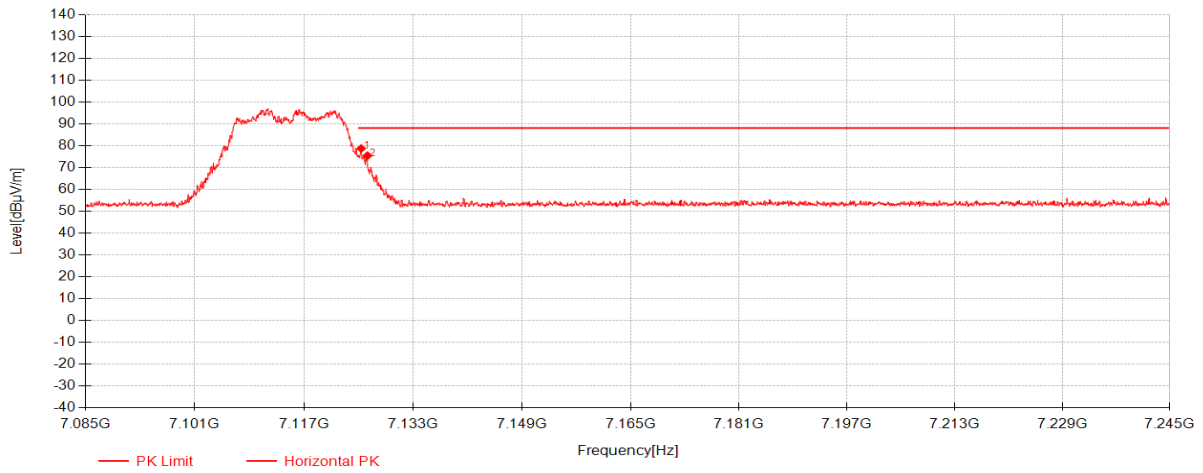


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7125.36	60.95	36.40	-18.53	78.82	88.20	9.38	Horizontal
2	7126.28	57.65	36.41	-18.53	75.53	88.20	12.67	Horizontal

11a_TX_CH_233_Horizontal_Average

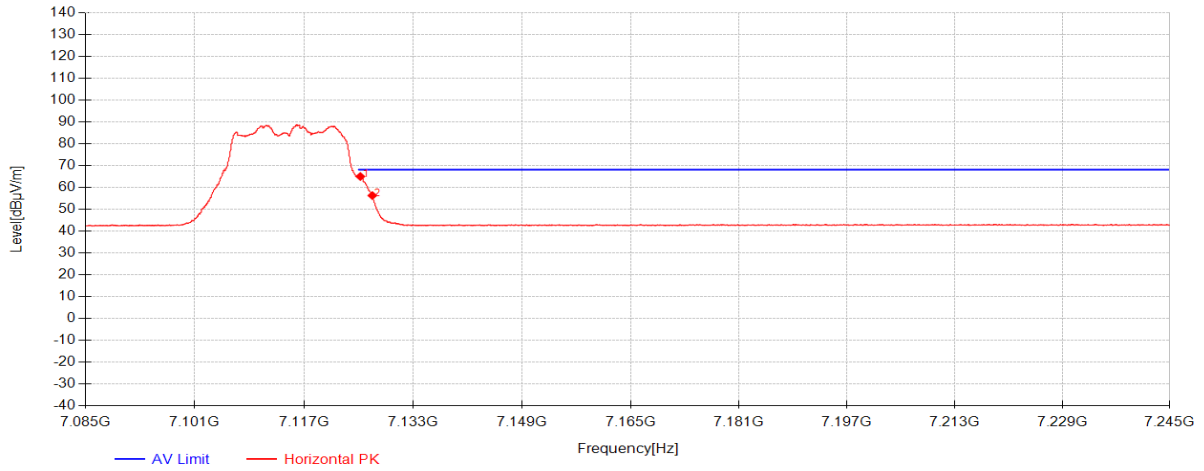


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7125.24	47.18	36.40	-18.53	65.05	68.20	3.15	Horizontal
2	7127	38.44	36.42	-18.53	56.32	68.20	11.88	Horizontal

11a_TX_CH_233_Vertical_Peak

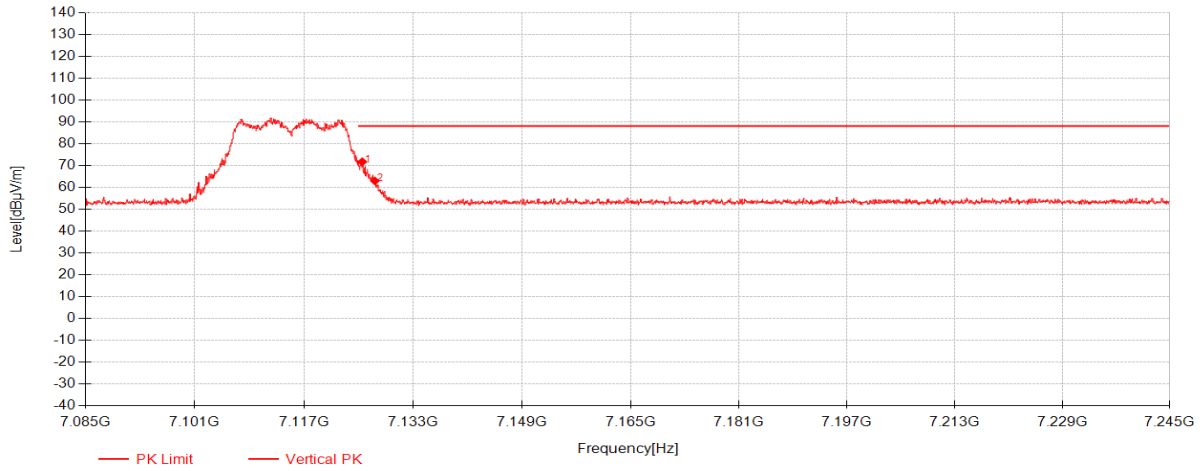


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7125.52	53.94	36.40	-18.53	71.82	88.20	16.38	Vertical
2	7127.36	45.16	36.42	-18.53	63.04	88.20	25.16	Vertical

11a_TX_CH_233_Vertical_Average

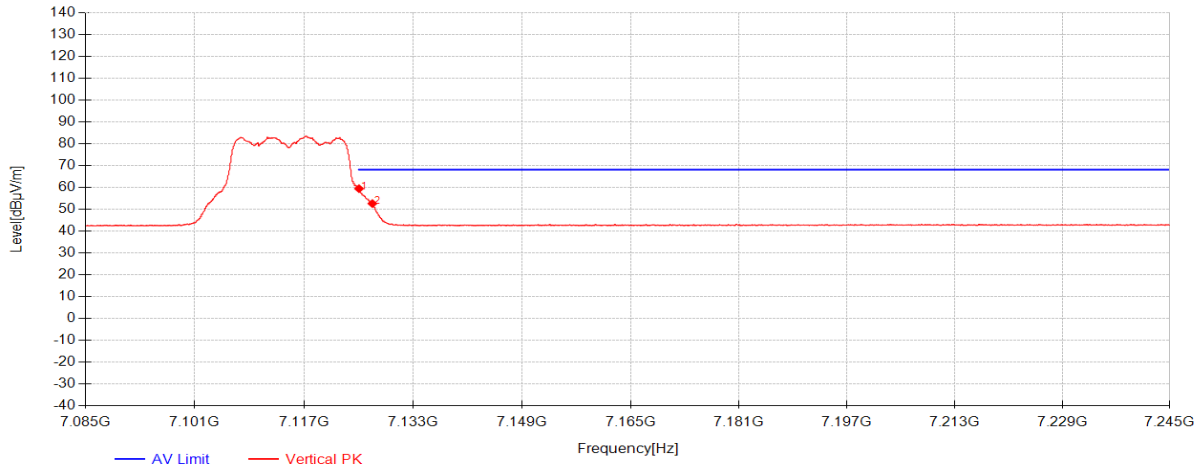


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7125.04	41.61	36.40	-18.53	59.48	68.20	8.72	Vertical
2	7127	34.77	36.42	-18.53	52.65	68.20	15.55	Vertical

11be(EHT20)_TX_CH_001_Horizontal_Peak

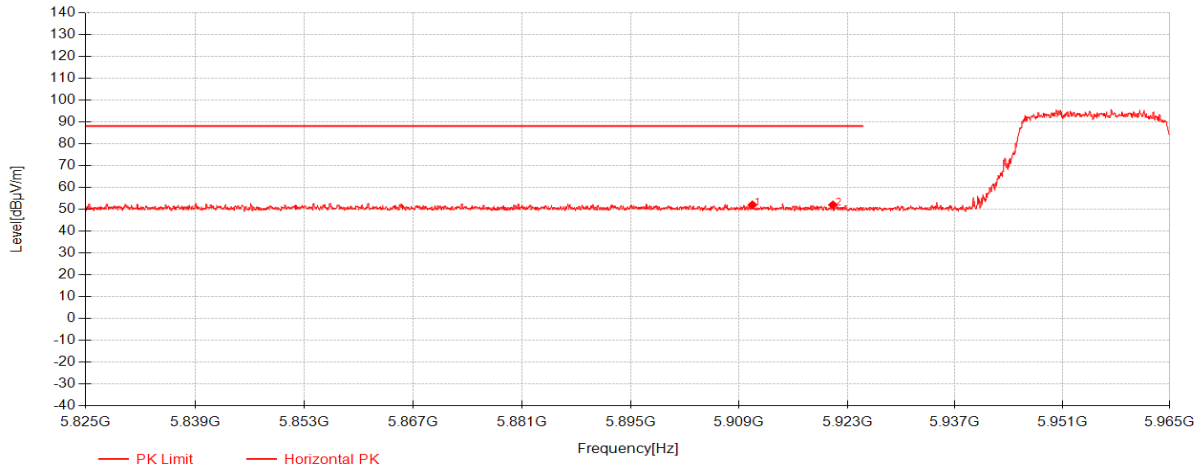


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5910.715	37.09	34.38	-19.40	52.07	88.20	36.13	Horizontal
2	5921.145	37.07	34.36	-19.39	52.04	88.20	36.16	Horizontal

11be(EHT20)_TX_CH_001_Horizontal_Average

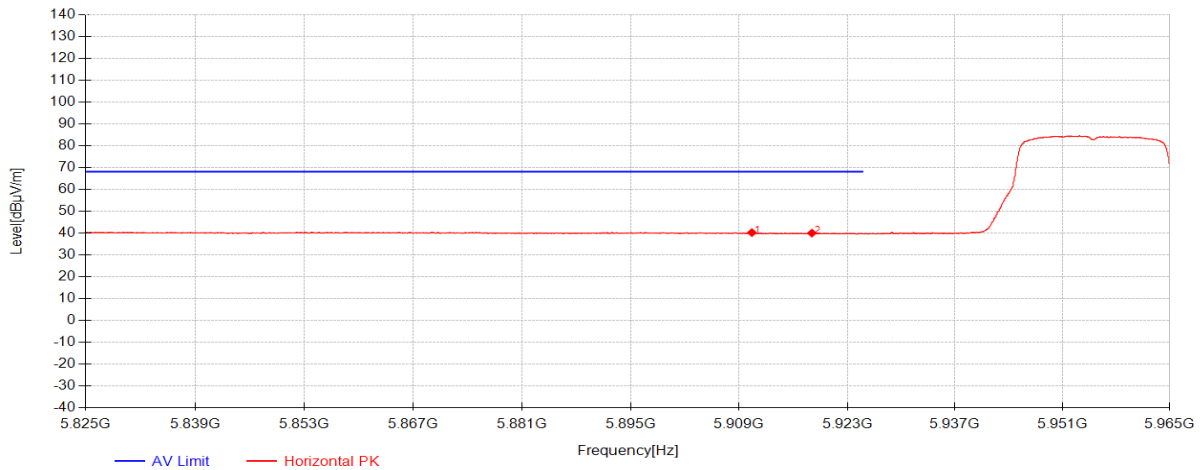


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5910.645	25.27	34.38	-19.40	40.25	68.20	27.95	Horizontal
2	5918.415	25.05	34.36	-19.39	40.02	68.20	28.18	Horizontal

11be(EHT20)_TX_CH_001_Vertical_Peak

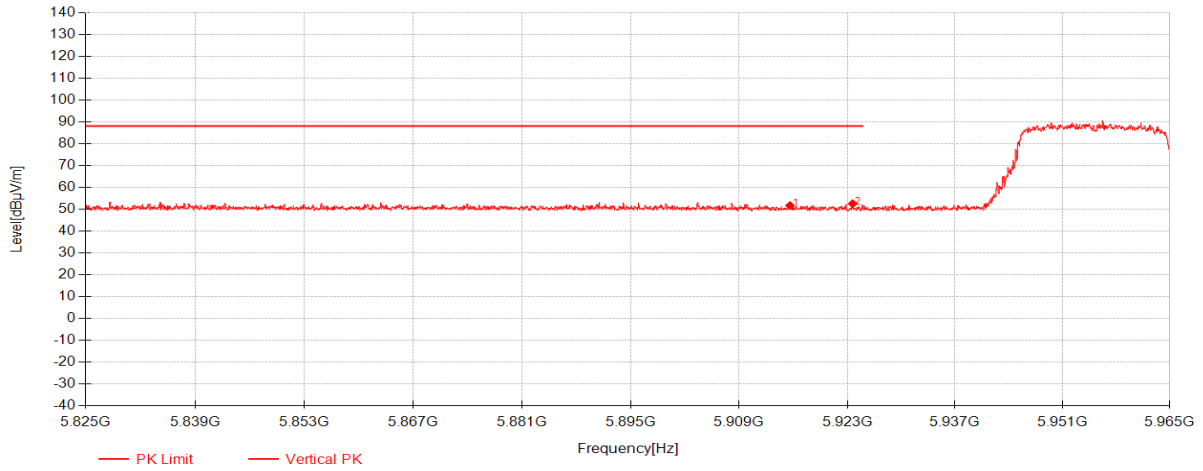


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5915.58	36.76	34.37	-19.39	51.74	88.20	36.46	Vertical
2	5923.7	37.63	34.35	-19.39	52.59	88.20	35.61	Vertical

11be(EHT20)_TX_CH_001_Vertical_Average

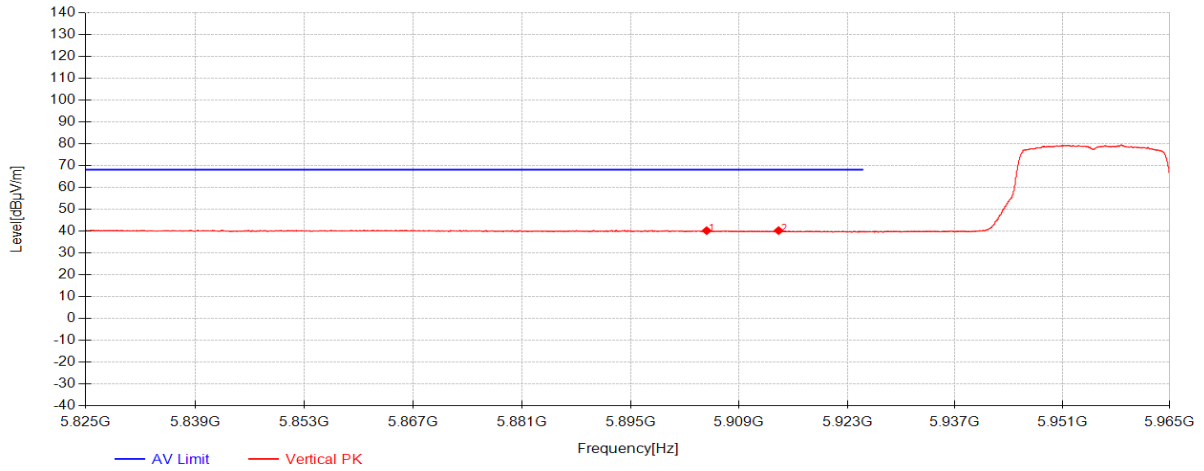


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5904.8	25.24	34.39	-19.40	40.23	68.20	27.97	Vertical
2	5914.11	25.27	34.37	-19.39	40.25	68.20	27.95	Vertical

Test Mode: 11be(EHT20)_TX_CH_233_Horizontal_Peak

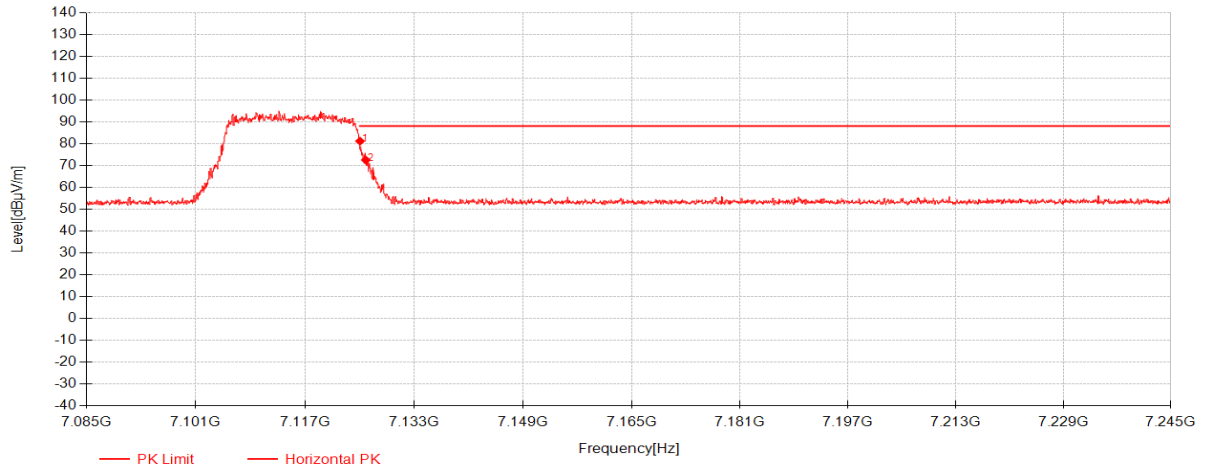


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7125.04	63.39	36.40	-18.53	81.26	88.20	6.94	Horizontal
2	7125.88	54.74	36.41	-18.53	72.62	88.20	15.58	Horizontal

Test Mode: 11be(EHT20)_TX_CH_233_Horizontal_Peak

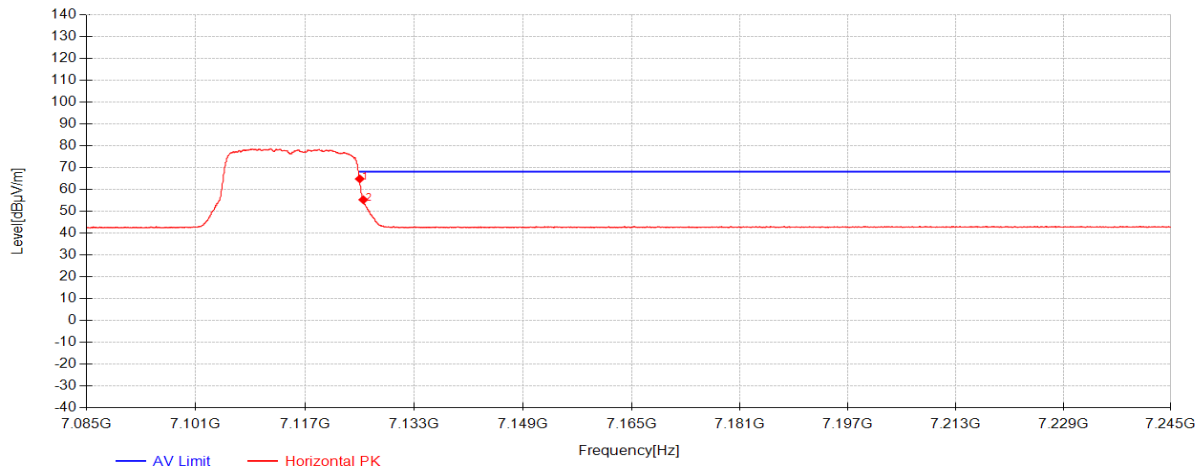


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7125.0000	47.00	36.40	-18.53	64.87	68.20	3.33	Horizontal
2	7125.52	37.43	36.40	-18.53	55.31	68.20	12.89	Horizontal

11be(EHT20)_TX_CH_233_Vertical_Peak

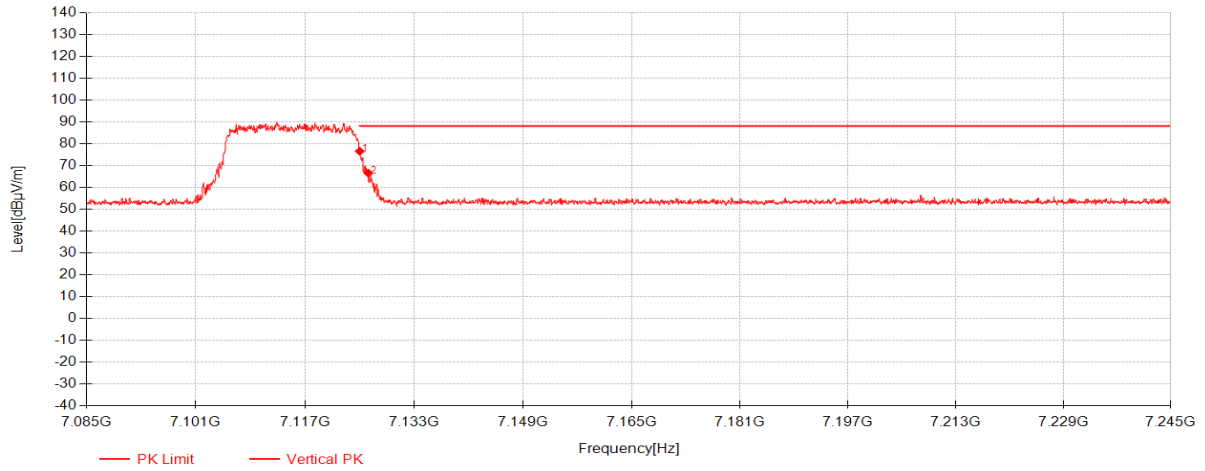


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7125	58.75	36.40	-18.53	76.62	88.20	11.58	Vertical
2	7126.24	48.76	36.41	-18.53	66.64	88.20	21.56	Vertical

11be(EHT20)_TX_CH_233_Veritical_Average

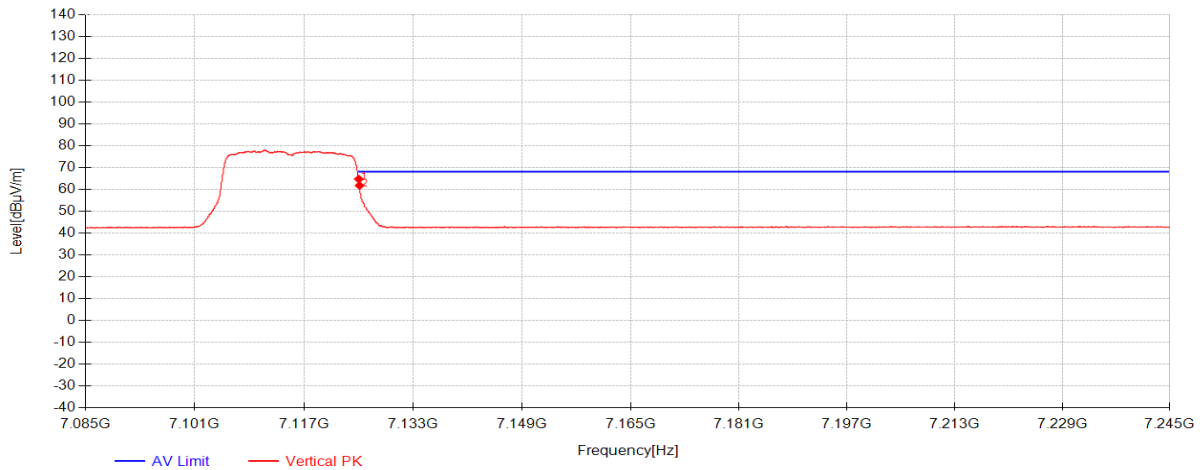


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7125.0000	46.92	36.40	-18.53	64.79	68.20	3.41	Vertical
2	7125.12	43.96	36.40	-18.53	61.83	68.20	6.37	Vertical

11be(EHT40)_TX_CH_003_Horizontal_Peak

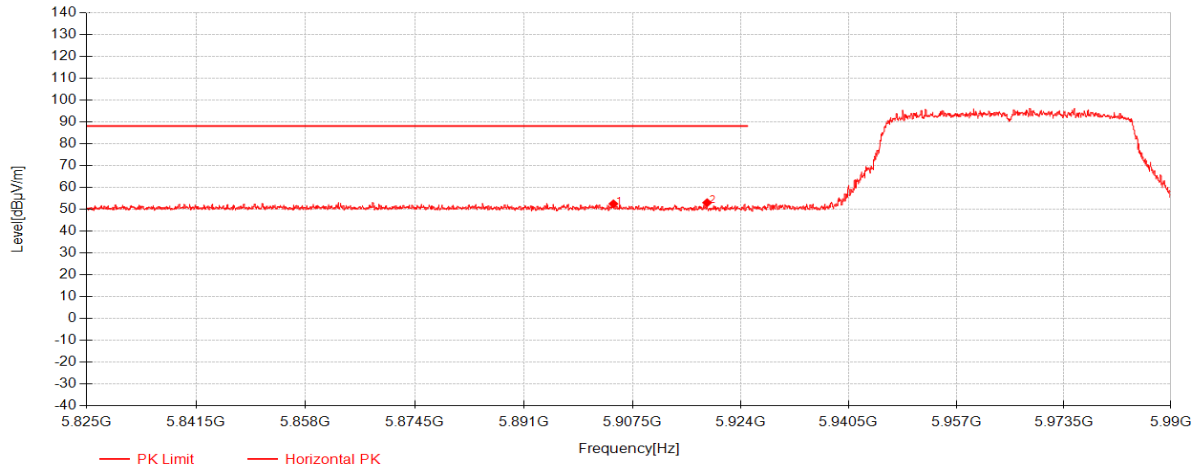


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5904.6125	37.53	34.39	-19.40	52.52	88.20	35.68	Horizontal
2	5918.885	38.08	34.36	-19.39	53.05	88.20	35.15	Horizontal

11be(EHT40)_TX_CH_003_Horizontal_Average

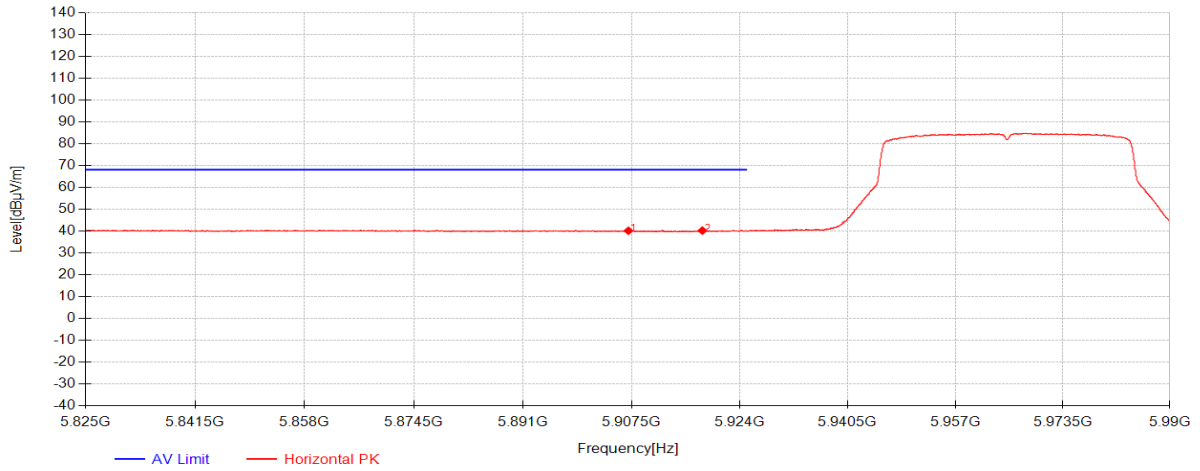


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5907.0462	25.20	34.39	-19.40	40.19	68.20	28.01	Horizontal
2	5918.3075	25.29	34.36	-19.39	40.26	68.20	27.94	Horizontal

11be(EHT40)_TX_CH_003_Vertical_Peak

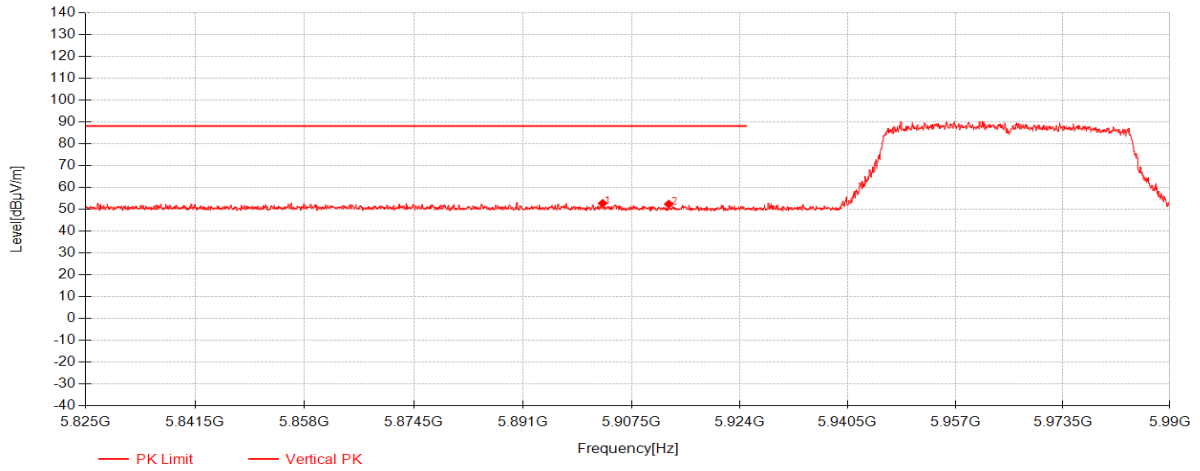


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5903.1275	37.75	34.39	-19.40	52.74	88.20	35.46	Vertical
2	5913.1925	37.43	34.37	-19.39	52.41	88.20	35.79	Vertical

11be(EHT40)_TX_CH_003_Veritical_Average

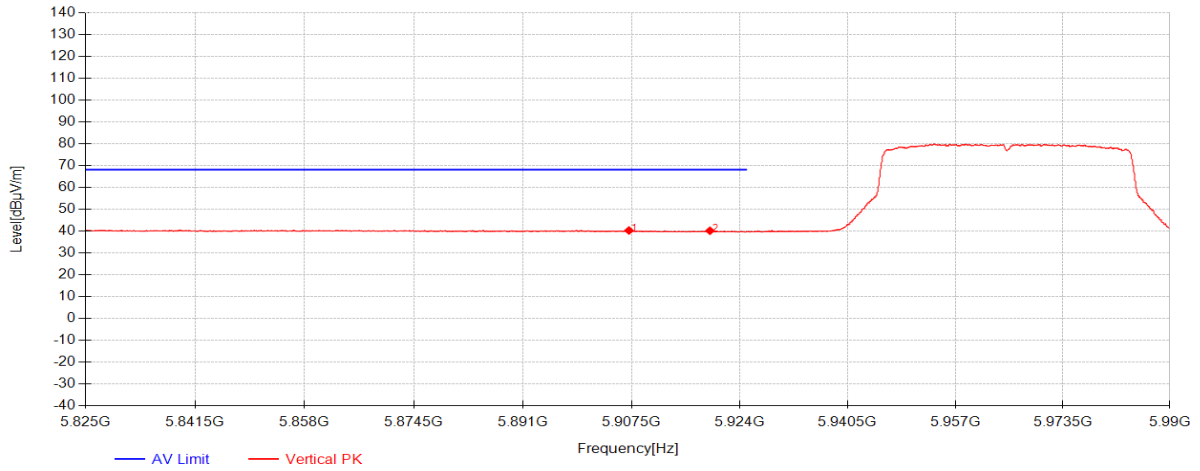


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5907.1288	25.29	34.39	-19.40	40.28	68.20	27.92	Vertical
2	5919.4625	25.22	34.36	-19.39	40.19	68.20	28.01	Vertical

Test Mode: 11be(EHT40)_TX_CH_227_Horizontal_Peak

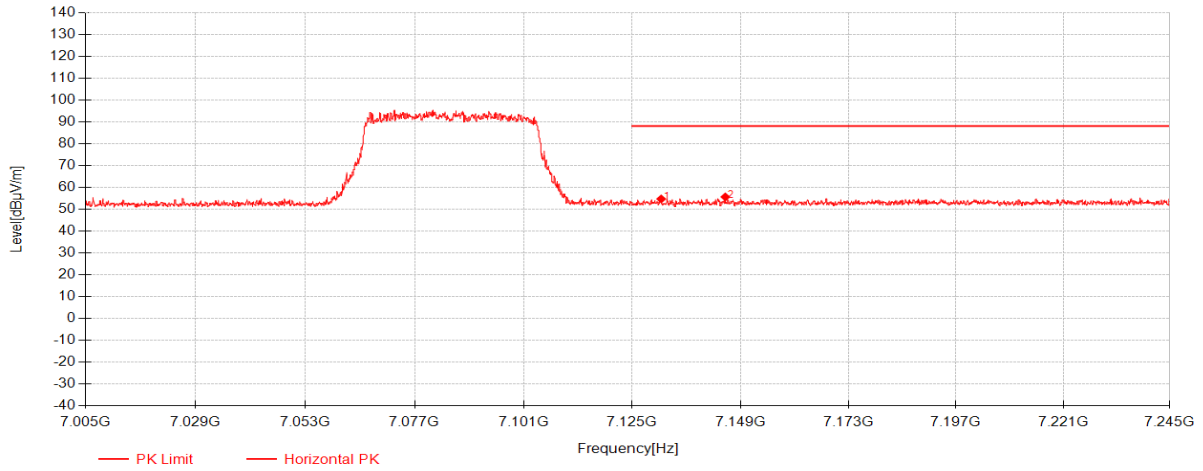


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7131.42	36.85	36.45	-18.55	54.75	88.20	33.45	Horizontal
2	7145.64	37.71	36.57	-18.59	55.68	88.20	32.52	Horizontal

Test Mode: 11be(EHT40)_TX_CH_227_Horizontal_Peak

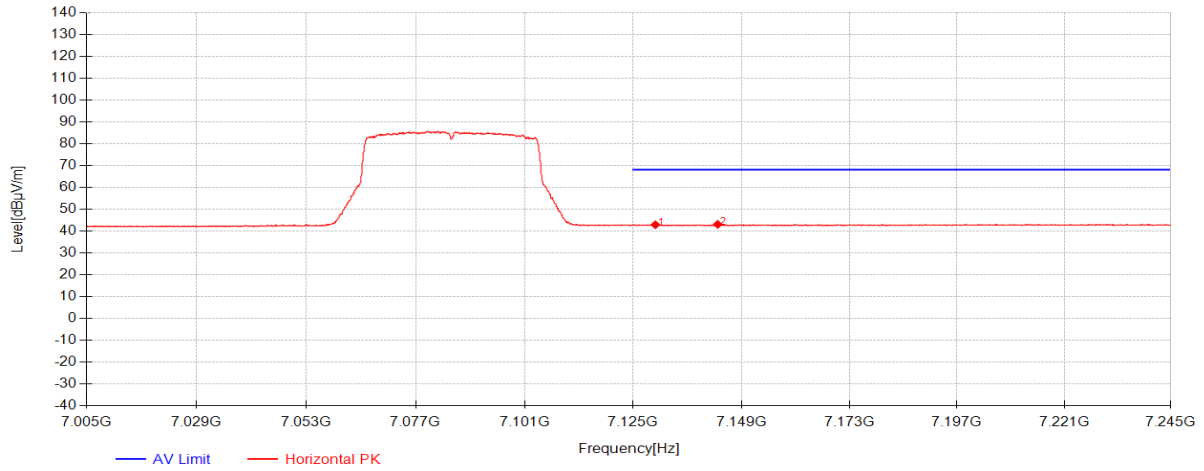


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7129.92	25.03	36.44	-18.54	42.93	68.20	25.27	Horizontal
2	7143.72	25.14	36.55	-18.59	43.10	68.20	25.10	Horizontal

11be(EHT40)_TX_CH_227_Vertical_Peak

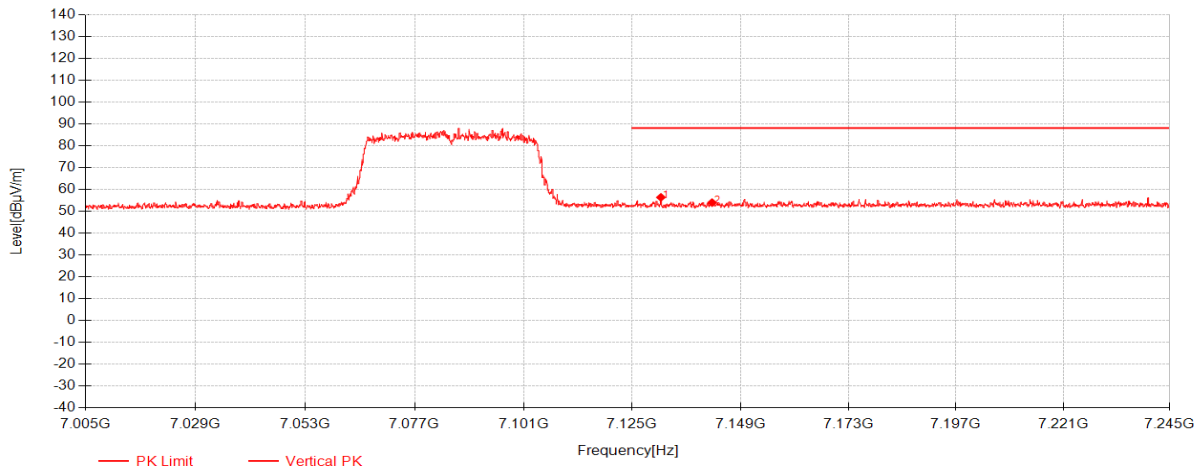


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7131.36	38.51	36.45	-18.55	56.41	88.20	31.79	Vertical
2	7142.7	36.03	36.54	-18.58	53.99	88.20	34.21	Vertical

11be(EHT40)_TX_CH_227_Veritical_Average

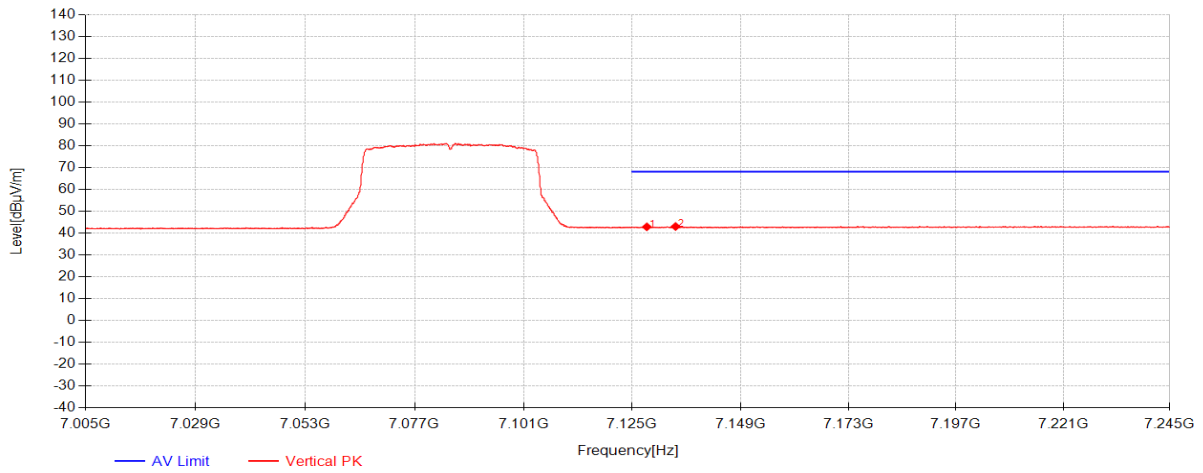


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7128.24	24.99	36.43	-18.54	42.88	68.20	25.32	Vertical
2	7134.6	25.12	36.48	-18.56	43.04	68.20	25.16	Vertical

11be(EHT80)_TX_CH_007_Horizontal_Peak

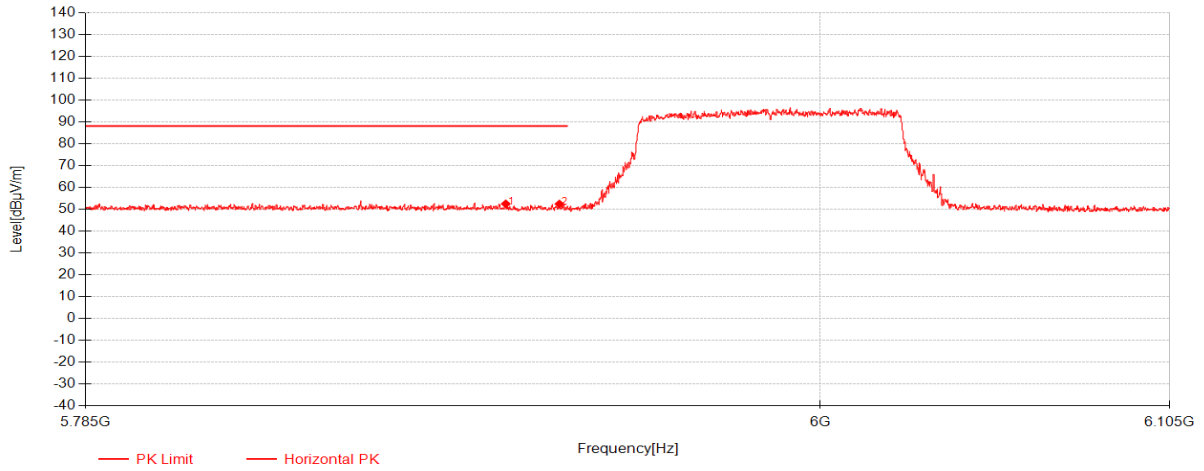


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5907	37.53	34.39	-19.40	52.52	88.20	35.68	Horizontal
2	5922.76	37.49	34.35	-19.39	52.45	88.20	35.75	Horizontal

11be(EHT80)_TX_CH_007_Horizontal_Average

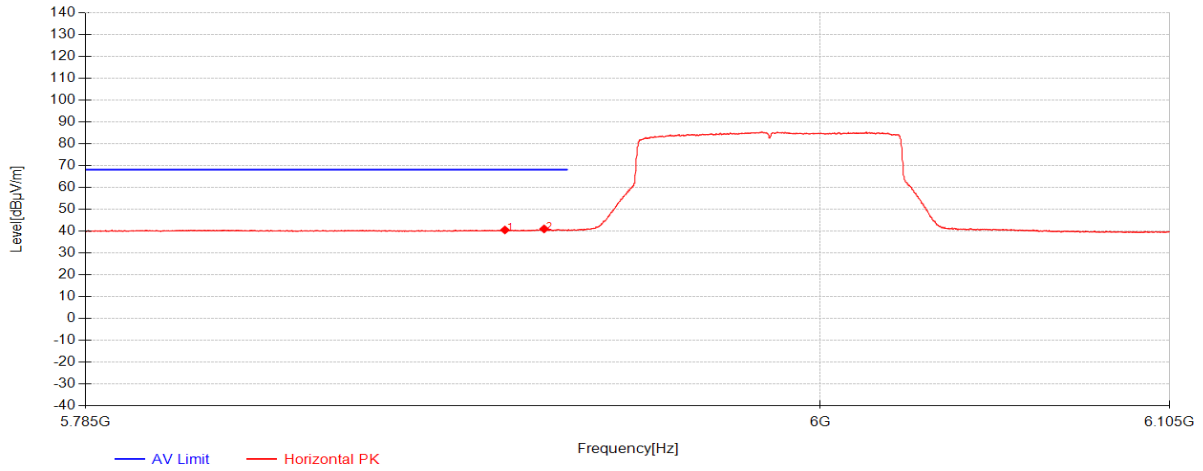


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5906.76	25.56	34.39	-19.40	40.55	68.20	27.65	Horizontal
2	5918.28	26.05	34.36	-19.39	41.02	68.20	27.18	Horizontal

11be(EHT80)_TX_CH_007_Vertical_Peak

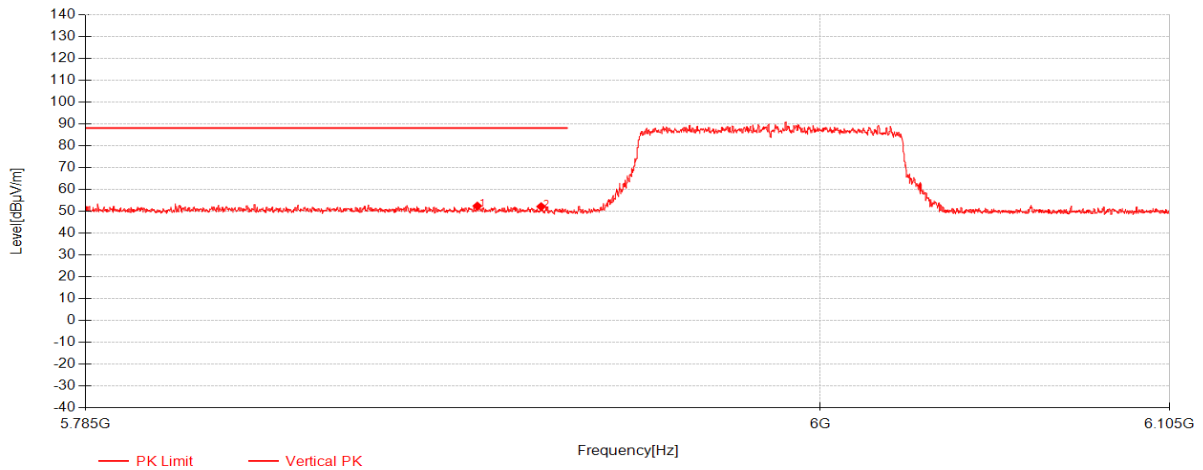


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5898.68	37.45	34.40	-19.40	52.45	88.20	35.75	Vertical
2	5917.4	37.21	34.37	-19.39	52.18	88.20	36.02	Vertical

11be(EHT80)_TX_CH_007_Veritical_Average

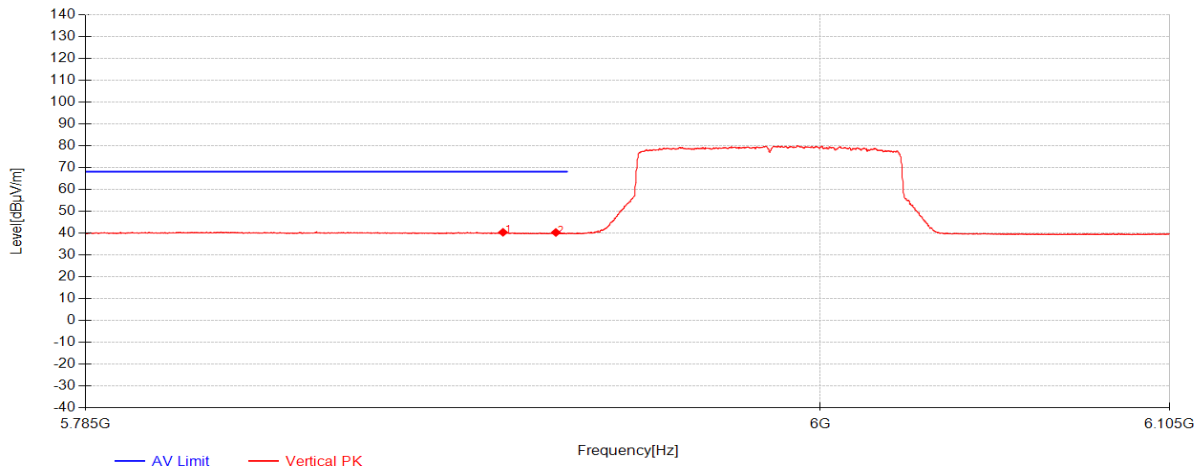


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5906.2	25.41	34.39	-19.40	40.40	68.20	27.80	Vertical
2	5921.72	25.34	34.36	-19.39	40.31	68.20	27.89	Vertical

11be(EHT80)_TX_CH_215_Horizontal_Peak

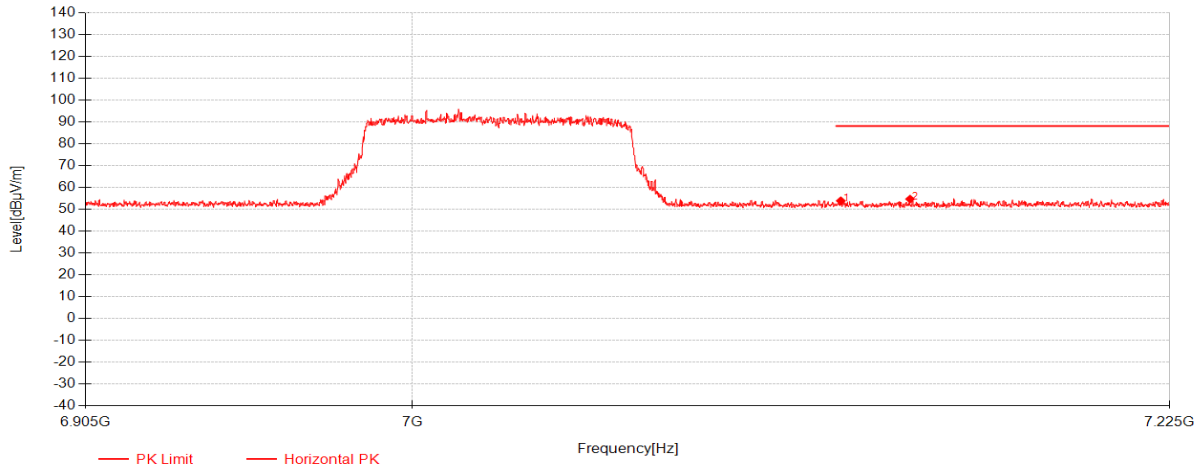


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7126.36	36.04	36.41	-18.53	53.92	88.20	34.28	Horizontal
2	7147	36.73	36.58	-18.60	54.71	88.20	33.49	Horizontal

11be(EHT80)_TX_CH_215_Horizontal_Average

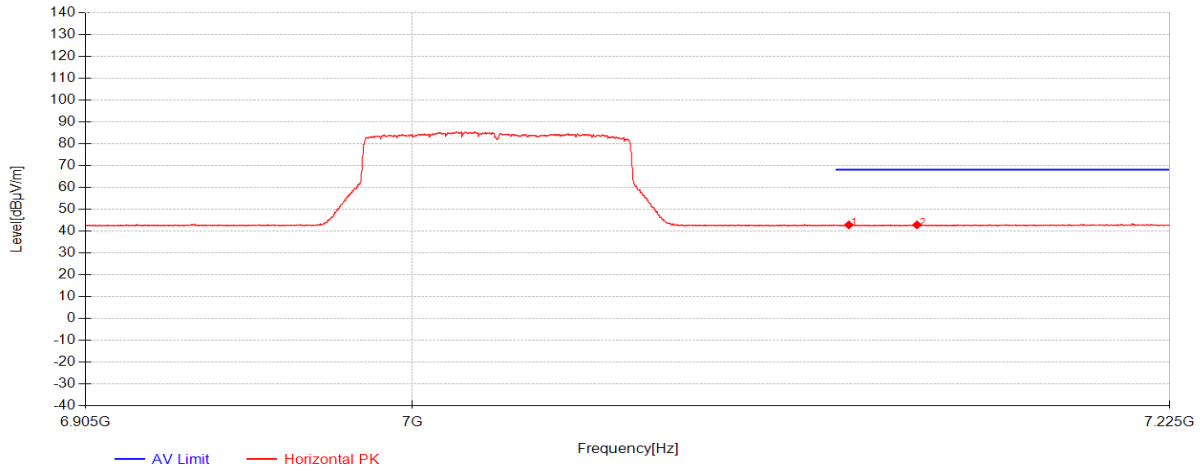


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7128.76	24.95	36.43	-18.54	42.84	68.20	25.36	Horizontal
2	7149.08	24.90	36.59	-18.60	42.89	68.20	25.31	Horizontal

11be(EHT80)_TX_CH_215_Vertical_Peak

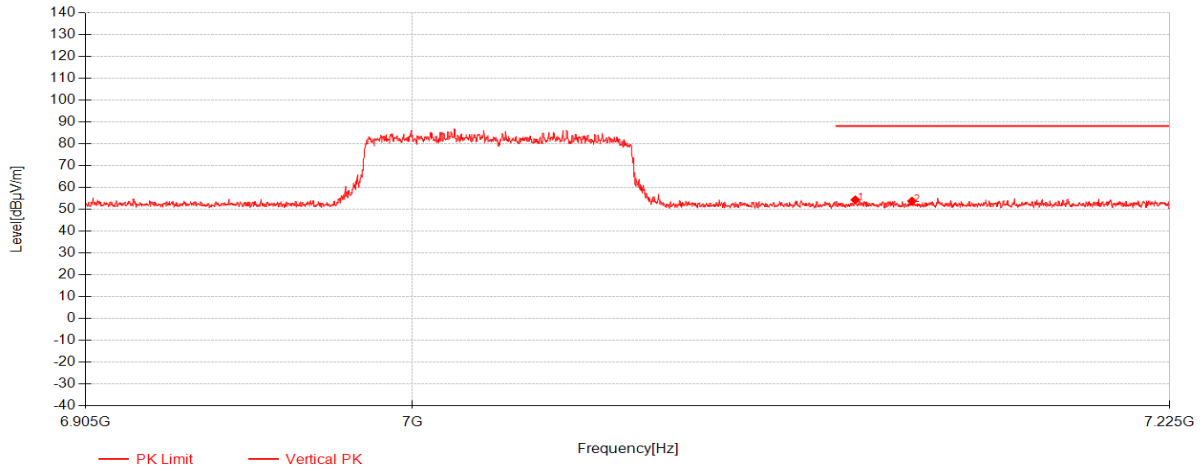


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7130.68	36.46	36.45	-18.55	54.36	88.20	33.84	Vertical
2	7147.56	35.80	36.58	-18.60	53.78	88.20	34.42	Vertical

11be(EHT80)_TX_CH_215_Veritical_Average

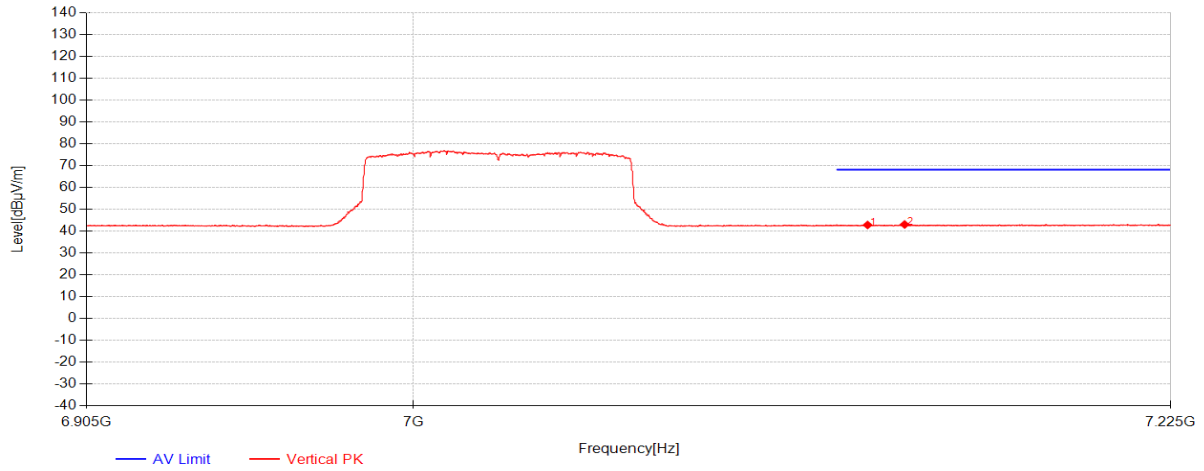


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7134.04	24.90	36.47	-18.56	42.82	68.20	25.38	Vertical
2	7145.08	25.09	36.56	-18.59	43.06	68.20	25.14	Vertical

11be(EHT160)_TX_CH_015_Horizontal_Peak

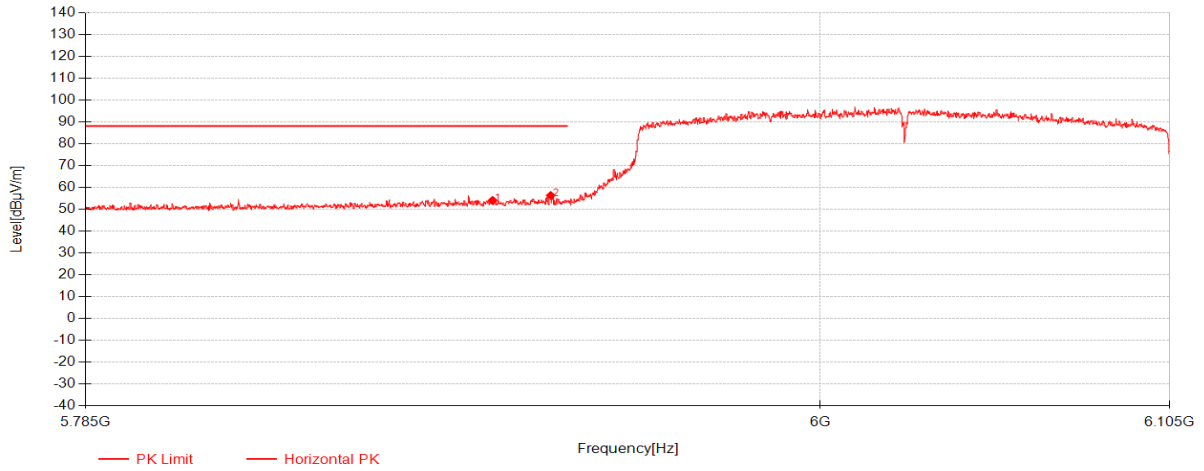


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5903.16	39.15	34.39	-19.40	54.14	88.20	34.06	Horizontal
2	5920.2	41.43	34.36	-19.39	56.40	88.20	31.80	Horizontal

11be(EHT160)_TX_CH_015_Horizontal_Average

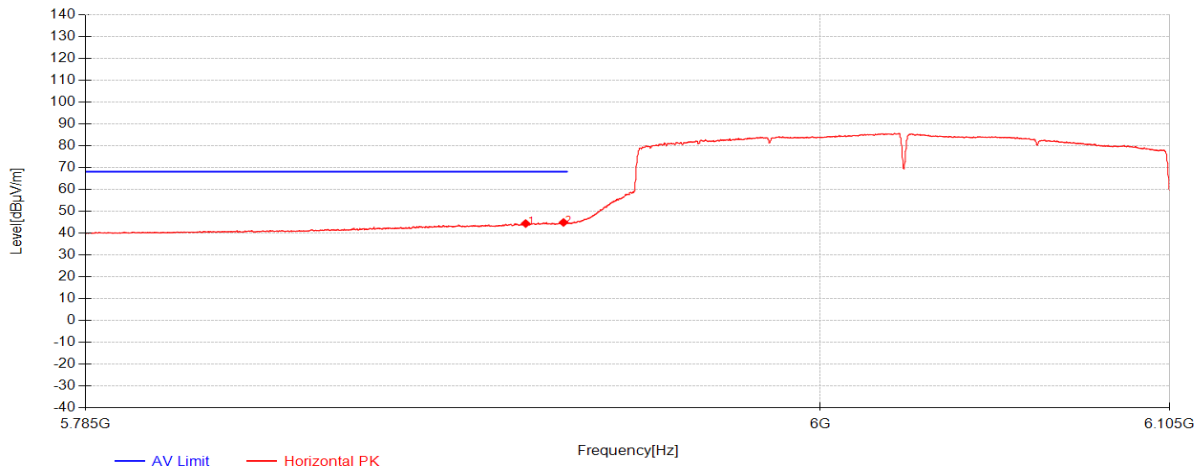


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5912.84	29.43	34.37	-19.39	44.41	68.20	23.79	Horizontal
2	5923.96	29.95	34.35	-19.39	44.91	68.20	23.29	Horizontal

11be(EHT160)_TX_CH_015_Vertical_Peak

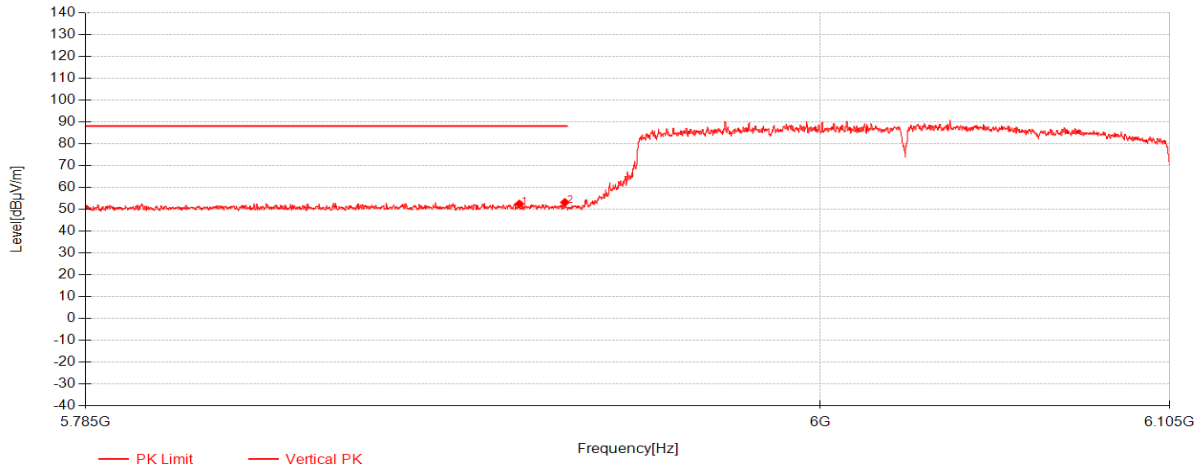


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5911	37.51	34.38	-19.40	52.49	88.20	35.71	Vertical
2	5924.36	38.24	34.35	-19.39	53.20	88.20	35.00	Vertical

11be(EHT160)_TX_CH_015_Vertical_Average

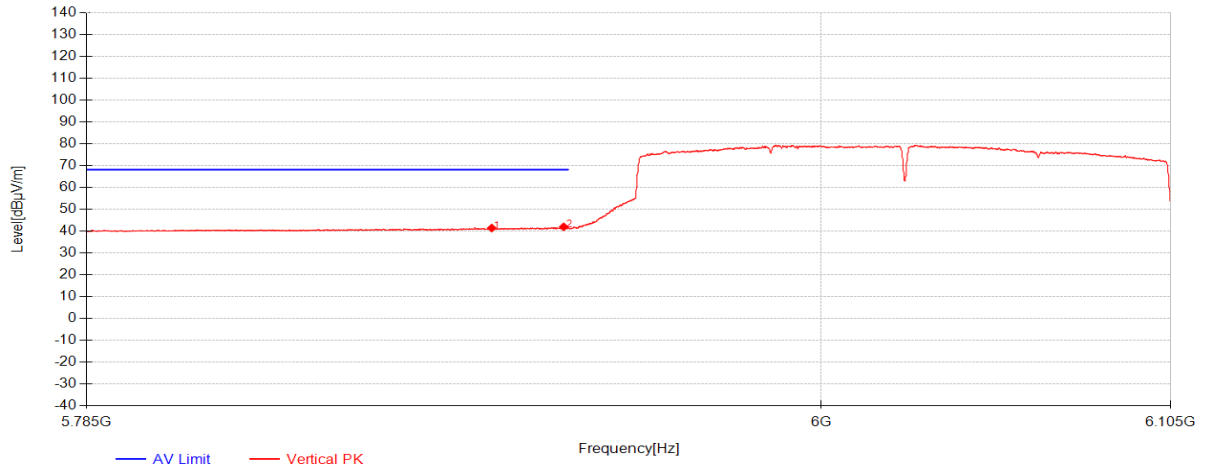

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5902.6	26.41	34.39	-19.40	41.41	68.20	26.79	Vertical
2	5923.72	27.02	34.35	-19.39	41.98	68.20	26.22	Vertical


11be(EHT160)_TX_CH_207_Horizontal_Peak

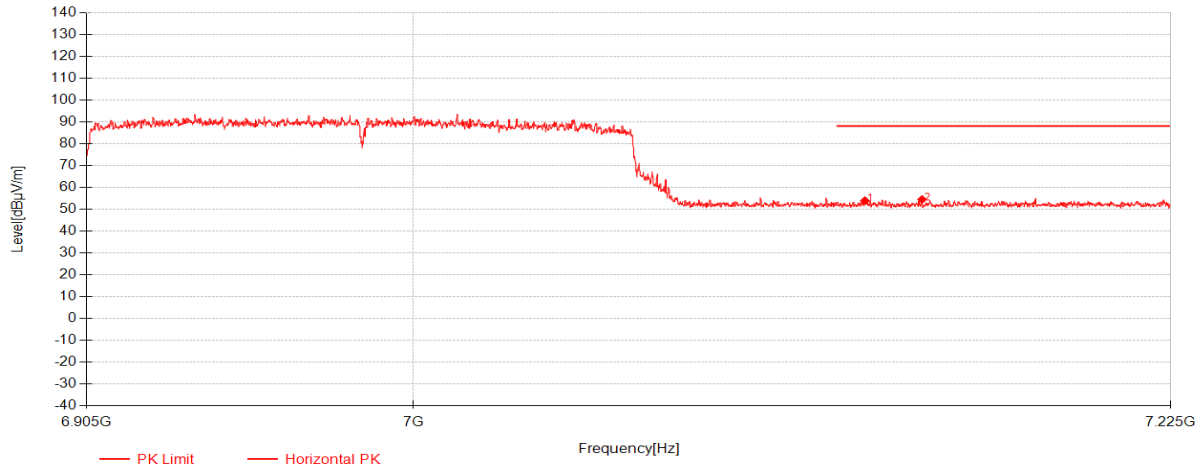

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7133.24	36.05	36.47	-18.55	53.96	88.20	34.24	Horizontal
2	7150.28	36.51	36.60	-18.61	54.51	88.20	33.69	Horizontal




11be(EHT160)_TX_CH_207_Horizontal_Average

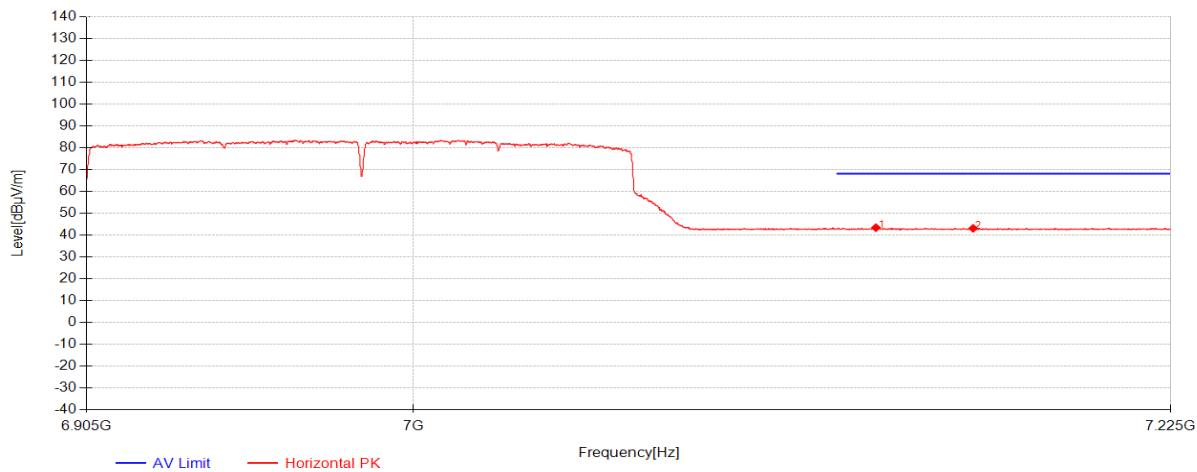


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7136.52	25.50	36.49	-18.56	43.43	68.20	24.77	Horizontal
2	7165.56	25.08	36.69	-18.65	43.12	68.20	25.08	Horizontal

11be(EHT160)_TX_CH_207_Vertical_Peak

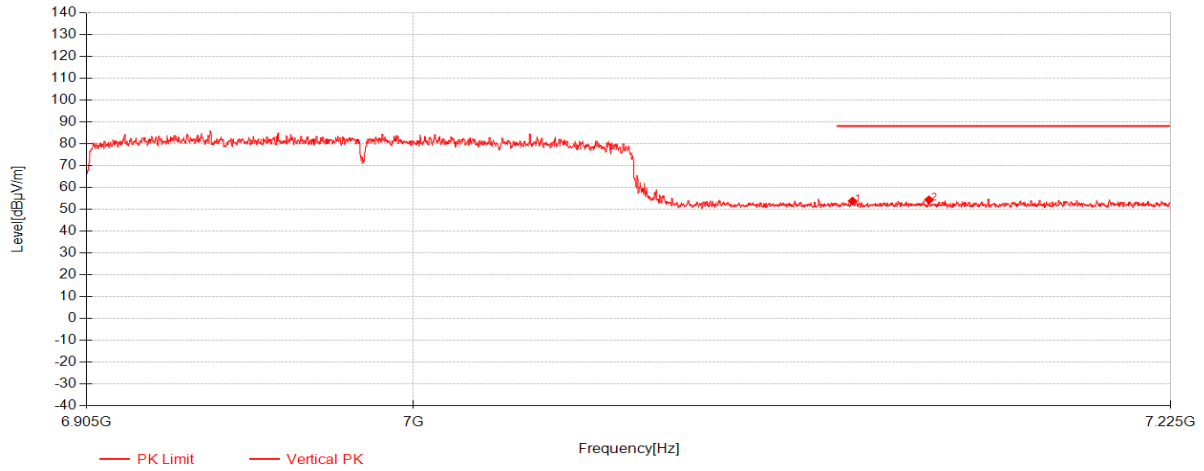


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7129.56	35.89	36.44	-18.54	53.78	88.20	34.42	Vertical
2	7152.36	36.38	36.61	-18.61	54.38	88.20	33.82	Vertical

11be(EHT160)_TX_CH_207_Vertical_Average

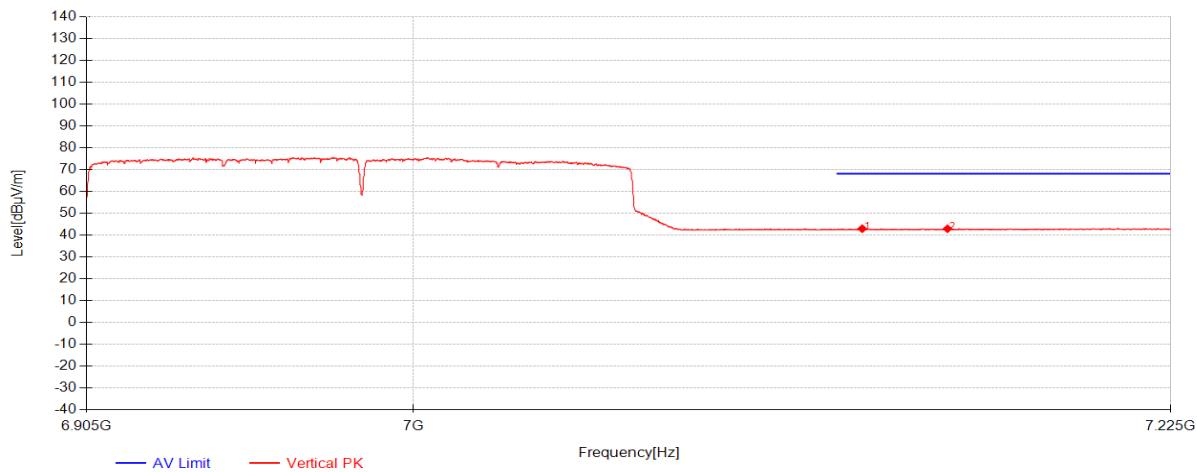


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7132.44	25.03	36.46	-18.55	42.94	68.20	25.26	Vertical
2	7157.88	24.91	36.65	-18.63	42.93	68.20	25.27	Vertical

11be(EHT320)_TX_CH_031_Horizontal_Peak

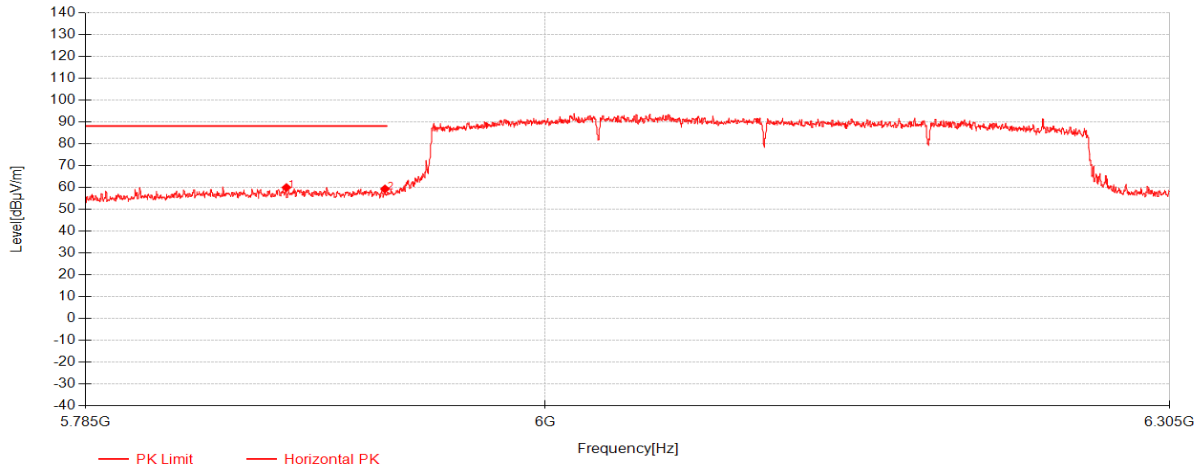


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5878.08	45.04	34.36	-19.39	60.00	88.20	28.20	Horizontal
2	5924.23	44.39	34.35	-19.39	59.35	88.20	28.85	Horizontal

11be(EHT320)_TX_CH_031_Horizontal_Average

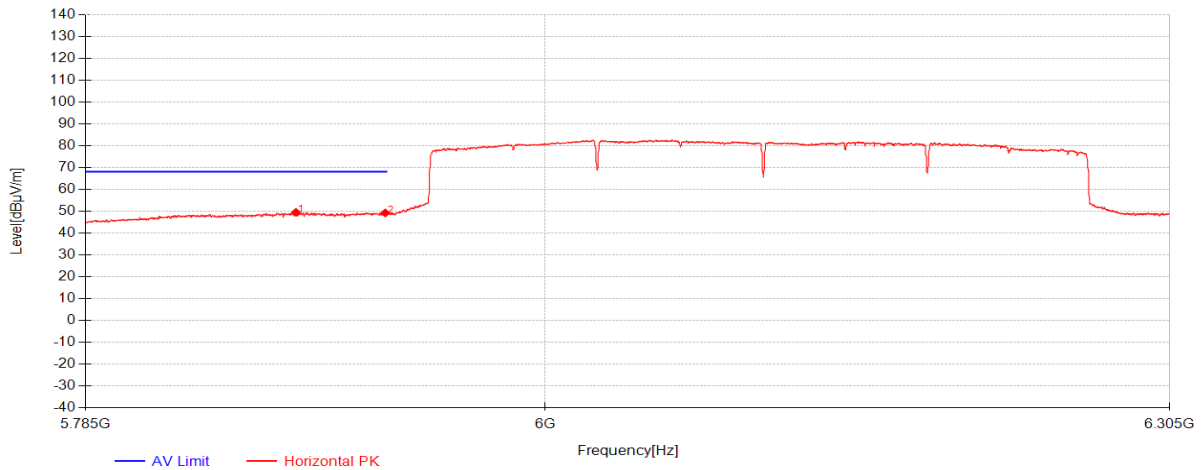


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5882.5	34.59	34.37	-19.39	49.56	68.20	18.64	Horizontal
2	5924.36	34.31	34.35	-19.39	49.27	68.20	18.93	Horizontal

11be(EHT320)_TX_CH_031_Vertical_Peak

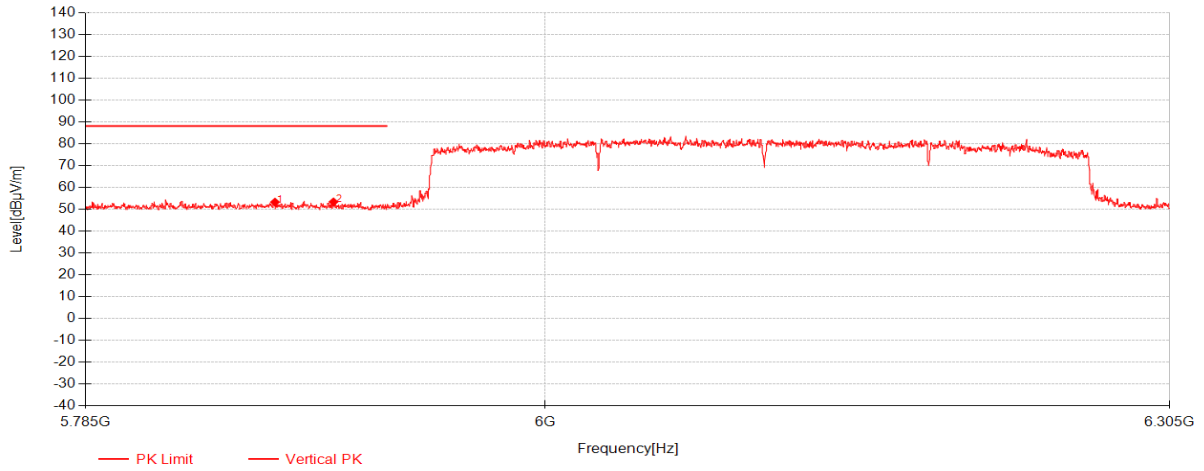


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5872.75	38.35	34.35	-19.39	53.31	88.20	34.89	Vertical
2	5900.05	38.41	34.40	-19.40	53.41	88.20	34.79	Vertical

11be(EHT320)_TX_CH_031_Vetical_Average

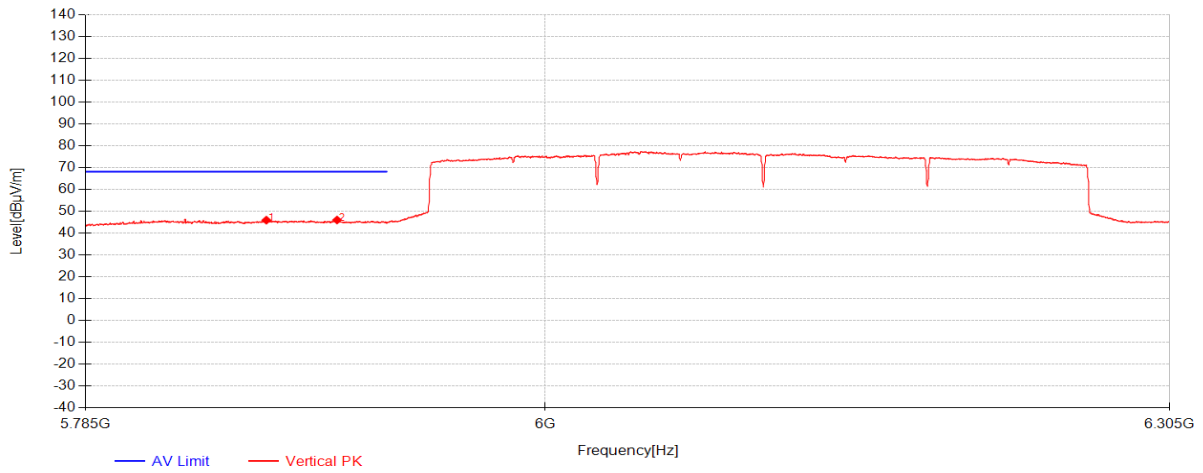


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5868.72	31.01	34.34	-19.39	45.96	68.20	22.24	Vertical
2	5901.74	31.03	34.40	-19.40	46.03	68.20	22.17	Vertical

11be(EHT320)_TX_CH_191_Horizontal_Peak

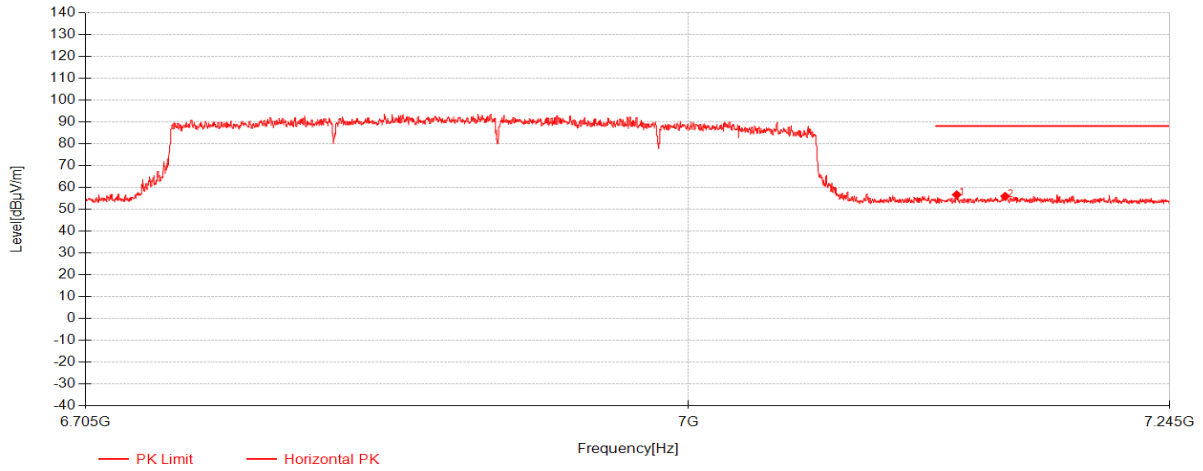


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7135.515	38.79	36.48	-18.56	56.71	88.20	31.49	Horizontal
2	7160.22	37.99	36.66	-18.64	56.01	88.20	32.19	Horizontal

11be(EHT320)_TX_CH_191_Horizontal_Average

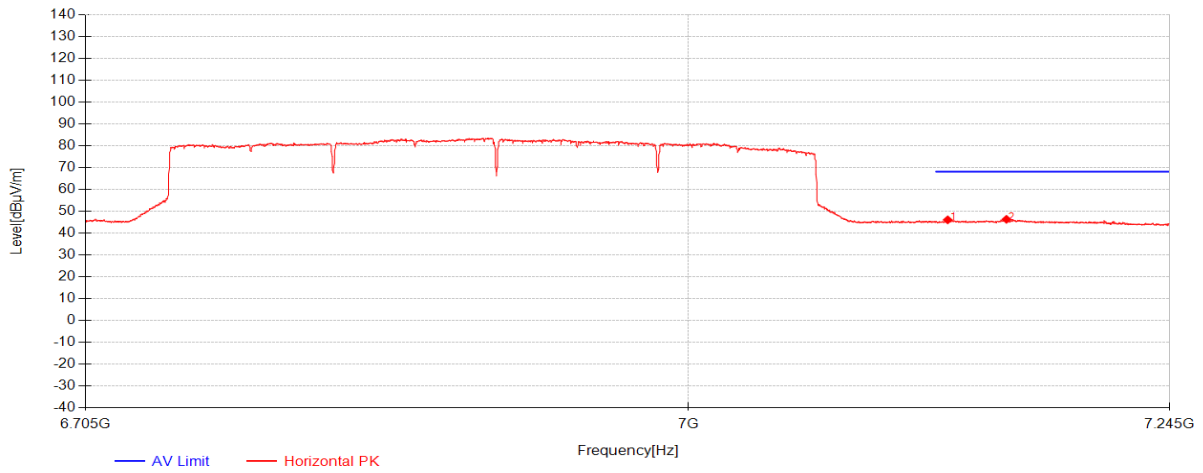


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7130.925	28.19	36.45	-18.55	46.09	68.20	22.11	Horizontal
2	7160.895	28.30	36.67	-18.64	46.33	68.20	21.87	Horizontal

11be(EHT320)_TX_CH_191_Vertical_Peak

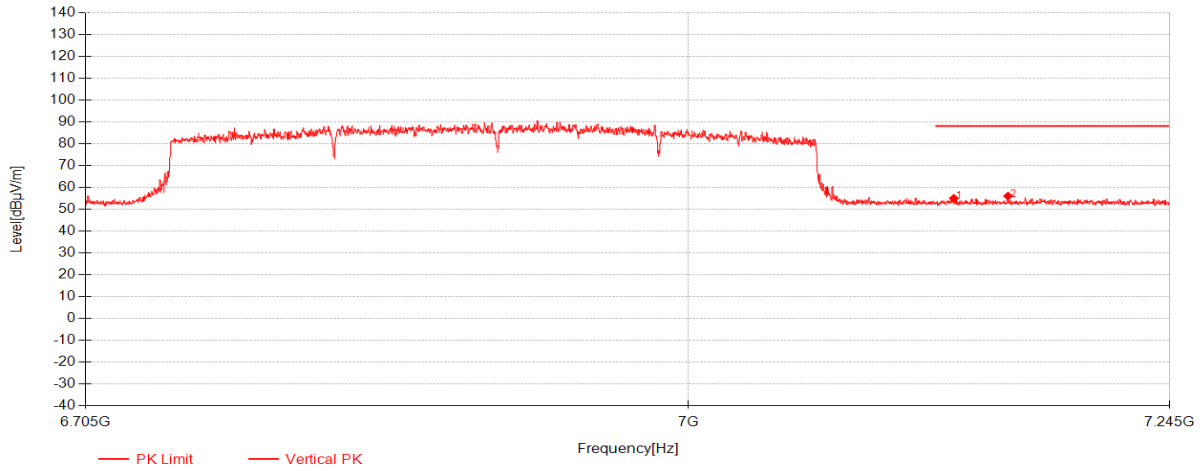

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7134.03	37.12	36.47	-18.56	55.04	88.20	33.16	Vertical
2	7161.705	38.05	36.67	-18.64	56.08	88.20	32.12	Vertical

11be(EHT320)_TX_CH_191_Vertical_Average

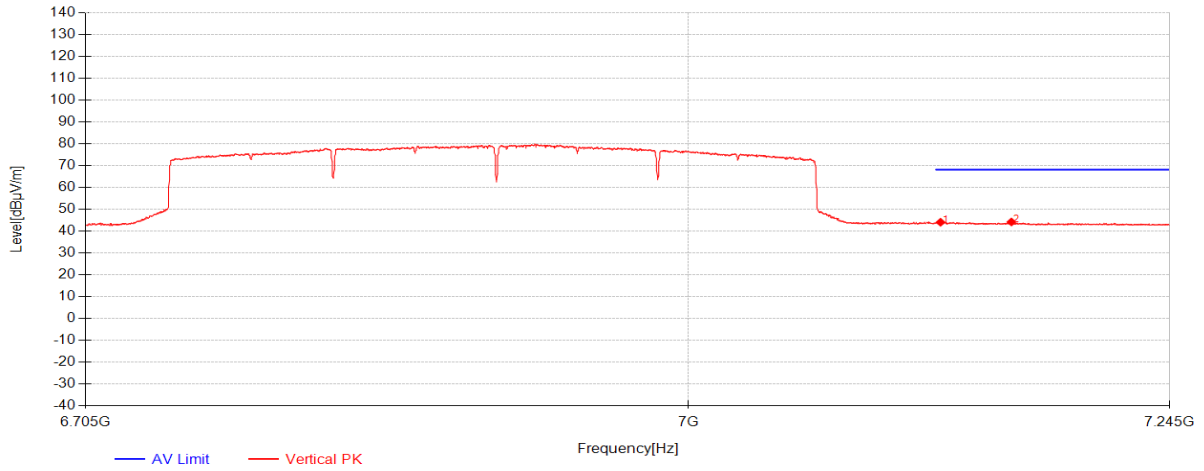

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7127.28	26.19	36.42	-18.53	44.07	68.20	24.13	Vertical
2	7163.46	26.17	36.68	-18.65	44.20	68.20	24.00	Vertical

7.4 In-Band Emissions

Test Requirement 47 CFR Part 15, Subpart E 15.407 (b)

Test Method: ANSI C63.10 (2020) Section 12.6

Limit:

For transmitters operating within the 5.925–7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and onehalf times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	11	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	13	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	14	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

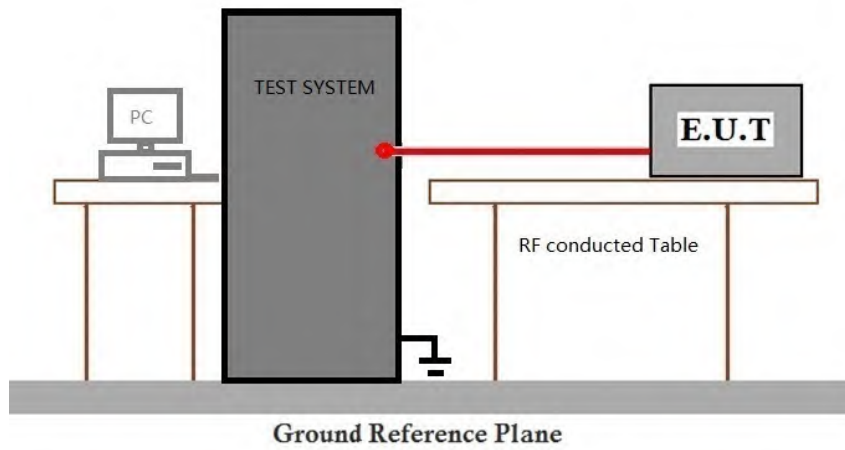

7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.5 Contention Based Protocol

Test Requirement 47 CFR Part 15, Subpart E 15.407 (d)(6)

Test Method: KDB 987594 D02 Section II.I.

Limit:

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	15	Normal operating_Keep the EUT communication with the companion device.

7.5.3 Test Setup Diagram

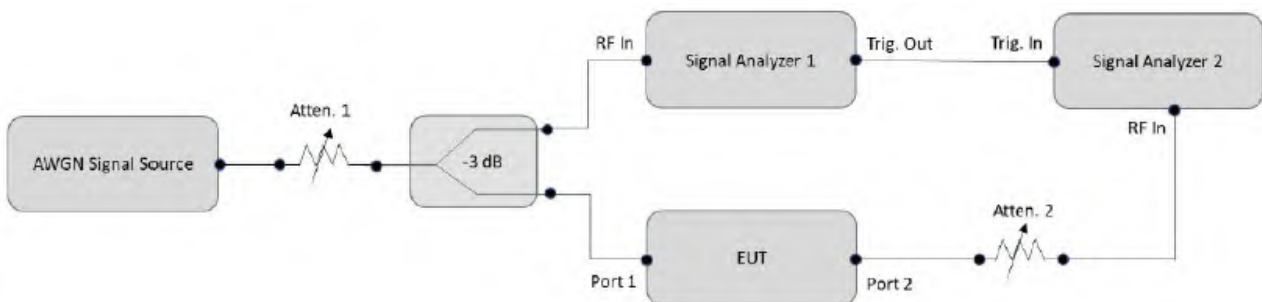

7.5.4 Measurement Procedure and Data

Detection Level= Injected AWGN Power(dBm)- Antenna Gain(dBi)+ Path Loss(dB)

Please Refer to Appendix for Details

7.6 Duty Cycle

Test Requirement ANSI C63.10 (2020) Section 12.2

Test Method: ANSI C63.10 (2020) Section 12.2

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	11	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	13	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	14	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

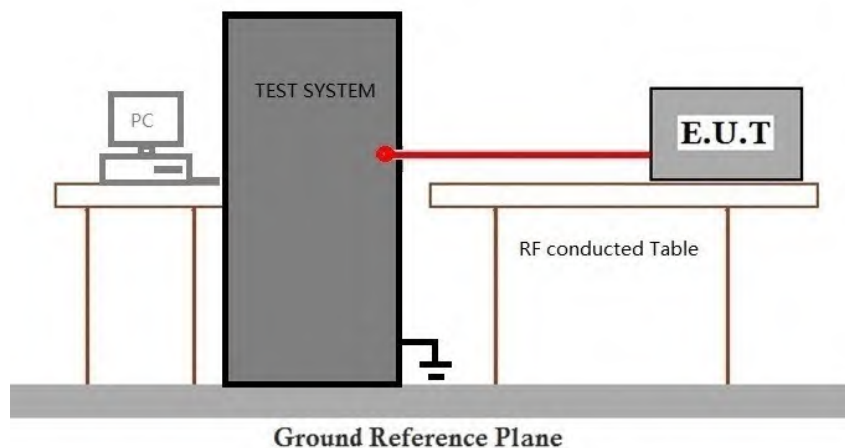

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 99% Bandwidth

Test Requirement ANSI C63.10 (2020) Section 12.5.3

Test Method: ANSI C63.10 (2020) Section 12.5.3

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	11	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	13	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	14	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

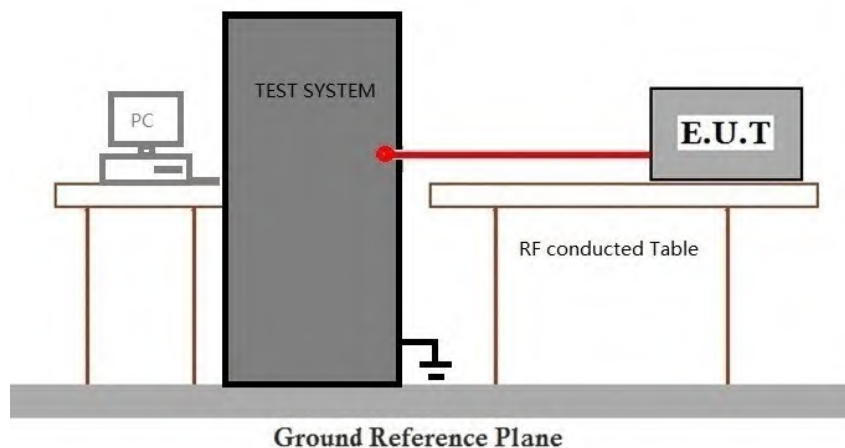

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 26dB Emission Bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.5.2

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	11	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	13	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	14	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

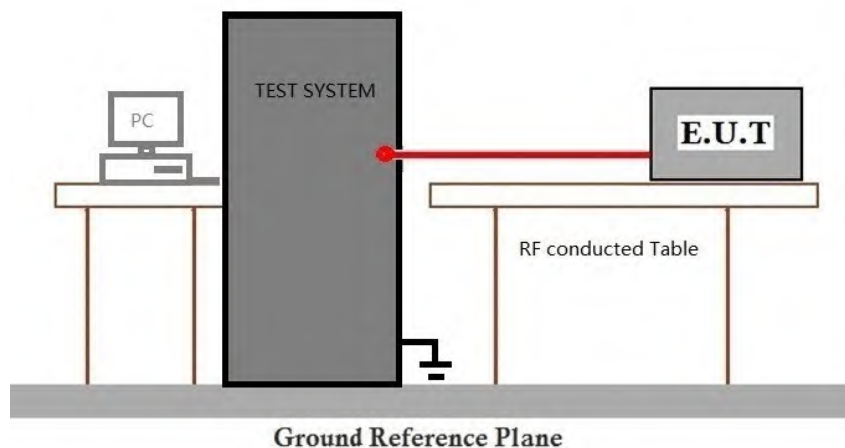

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Maximum Conducted Output Power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.4

Limit:

Device Type	Frequency Range (MHz)	EIRP Limit (dBm)	EIRP PSD Limit(dBm/MHz)
LPI AP/ Subordinate	5925-7125	≤ 30	≤ 5
LPI Client Device And Dual Client controlled by LPI AP/ Subordinate	5925-7125	≤ 24	≤ -1
Dual Client controlled by Standard Power AP	5925-6425; 6525-6875	30 max & 6dB below Std. AP	17 max & 6dB below Std. AP
Standard Power AP And Fixed Client Devices	5925-6425; 6525-6875	≤ 36 (21dBm for elevation angle greater than 30 degrees above the horizon)	≤ 23
Standard Client Devices	5925-6425; 6525-6875	30 max & 6dB below Std. AP	17 max & 6dB below Std. AP
Very Low-Power Devices	5925-6425; 6525-6875	≤ 14	≤ -5 shall demonstrate the TPC capability to operate at least 6 dB below the maximum EIRP PSD value of -5 dBm/MHz.

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C

Humidity: 43 % RH


Atmospheric Pressure: 1001 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	11	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	13	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	14	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have

been tested, Only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

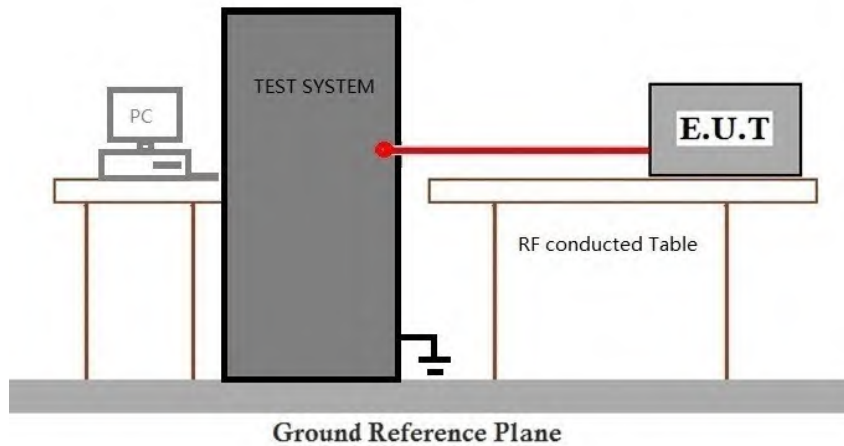

7.9.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

AV Output power Level = Reading level + Cable loss + DCCF

Please Refer to Appendix for Details

7.10 Power Spectral Density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.6

Limit:

Device Type	Frequency Range (MHz)	EIRP Limit (dBm)	EIRP PSD Limit(dBm/MHz)
LPI AP/ Subordinate	5925-7125	≤ 30	≤ 5
LPI Client Device And Dual Client controlled by LPI AP/ Subordinate	5925-7125	≤ 24	≤ -1
Dual Client controlled by Standard Power AP	5925-6425; 6525-6875	30 max & 6dB below Std. AP	17 max & 6dB below Std. AP
Standard Power AP And Fixed Client Devices	5925-6425; 6525-6875	≤ 36 (21dBm for elevation angle greater than 30 degrees above the horizon)	≤ 23
Standard Client Devices	5925-6425; 6525-6875	30 max & 6dB below Std. AP	17 max & 6dB below Std. AP
Very Low-Power Devices	5925-6425; 6525-6875	≤ 14	≤ -5 shall demonstrate the TPC capability to operate at least 6 dB below the maximum EIRP PSD value of -5 dBm/MHz.

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C

Humidity: 43 % RH


Atmospheric Pressure: 1001 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	11	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	13	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	14	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have

		been tested, Only the data of worst case is recorded in the report.
--	--	---

7.10.3 Test Setup Diagram

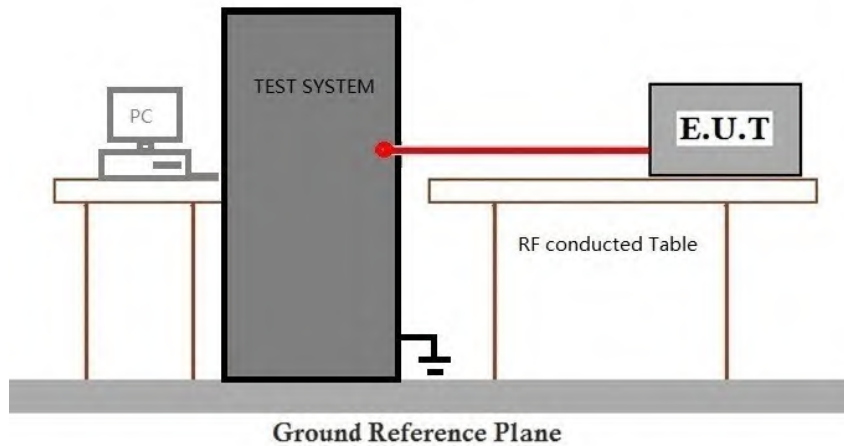

7.10.4 Measurement Procedure and Data

RBW conversion factor from 300kHz to 500kHz (2.22dB) for UNII Band 3 has been considered.

Please Refer to Appendix for Details



Report No.: SUCR260400030906

Page: 212 of 716

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SUCR2604000309MO

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SUCR2604000309MO

10 Appendix

WIFI 7

1. Duty Cycle

1.1 Test Result

1.1.1 Ant0

Ant0										
ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
NTNV	802.11be (EHT20)	MIMO	5955	SU	/	5.447	5.464	99.69	0.01	0.03
	802.11be (EHT40)	MIMO	5965	SU	/	5.446	5.464	99.67	0.01	0.04
	802.11be (EHT80)	MIMO	5985	SU	/	5.446	5.464	99.67	0.01	0.04
	802.11be (EHT160)	MIMO	6025	SU	/	5.446	5.464	99.67	0.01	0.04
	802.11be (EHT320)	MIMO	6105	SU	/	5.451	5.470	99.65	0.02	0.04

2. Bandwidth

2.1 Test Result

2.1.1 OBW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11be (EHT20)	MIMO	5955	SU	/	0	18.967	<=320	Pass
			6175	SU	/	0	18.961	<=320	Pass
			6415	SU	/	0	18.959	<=320	Pass
	802.11be (EHT40)	MIMO	5965	SU	/	0	37.878	<=320	Pass
			6165	SU	/	0	37.899	<=320	Pass
			6405	SU	/	0	37.891	<=320	Pass
	802.11be (EHT80)	MIMO	5985	SU	/	0	77.368	<=320	Pass
			6145	SU	/	0	77.315	<=320	Pass
			6385	SU	/	0	77.414	<=320	Pass
	802.11be (EHT160)	MIMO	6025	SU	/	0	155.088	<=320	Pass
			6185	SU	/	0	154.423	<=320	Pass
			6345	SU	/	0	154.801	<=320	Pass
	802.11be (EHT320)	MIMO	6105	SU	/	0	312.491	<=320	Pass
			6265	SU	/	0	310.539	<=320	Pass

2.1.2 26dB BW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11be (EHT20)	MIMO	5955	SU	/	0	22.946	/	Pass
			6175	SU	/	0	22.387	/	Pass
			6415	SU	/	0	22.735	/	Pass
	802.11be (EHT40)	MIMO	5965	SU	/	0	42.824	/	Pass
			6165	SU	/	0	43.711	/	Pass
			6405	SU	/	0	44.066	/	Pass
	802.11be (EHT80)	MIMO	5985	SU	/	0	87.068	/	Pass
			6145	SU	/	0	85.840	/	Pass
			6385	SU	/	0	86.530	/	Pass
	802.11be (EHT160)	MIMO	6025	SU	/	0	168.545	/	Pass
			6185	SU	/	0	166.760	/	Pass
			6345	SU	/	0	171.874	/	Pass
	802.11be (EHT320)	MIMO	6105	SU	/	0	338.964	/	Pass
			6265	SU	/	0	332.471	/	Pass

2.1.3 OBW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11be (EHT20)	MIMO	6435	SU	/	0	18.930	<=320	Pass
			6475	SU	/	0	19.012	<=320	Pass
			6515	SU	/	0	18.972	<=320	Pass
	802.11be (EHT40)	MIMO	6445	SU	/	0	37.910	<=320	Pass
			6485	SU	/	0	37.917	<=320	Pass
	802.11be (EHT80)	MIMO	6465	SU	/	0	77.490	<=320	Pass

2.1.4 26dB BW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11be (EHT20)	MIMO	6435	SU	/	0	22.964	/	Pass
			6475	SU	/	0	22.537	/	Pass
			6515	SU	/	0	23.086	/	Pass
	802.11be (EHT40)	MIMO	6445	SU	/	0	43.274	/	Pass
			6485	SU	/	0	43.317	/	Pass
	802.11be (EHT80)	MIMO	6465	SU	/	0	86.905	/	Pass

2.1.5 OBW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11be (EHT20)	MIMO	6535	SU	/	0	18.930	<=320	Pass
			6695	SU	/	0	18.955	<=320	Pass
			6855	SU	/	0	18.956	<=320	Pass
	802.11be (EHT40)	MIMO	6565	SU	/	0	37.881	<=320	Pass
			6685	SU	/	0	37.840	<=320	Pass
			6845	SU	/	0	37.808	<=320	Pass
	802.11be (EHT80)	MIMO	6625	SU	/	0	77.409	<=320	Pass
			6705	SU	/	0	77.381	<=320	Pass
			6785	SU	/	0	77.480	<=320	Pass
	802.11be (EHT160)	MIMO	6665	SU	/	0	155.628	<=320	Pass

2.1.6 26dB BW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11be (EHT20)	MIMO	6535	SU	/	0	22.934	/	Pass
			6695	SU	/	0	23.287	/	Pass
			6855	SU	/	0	23.226	/	Pass
	802.11be (EHT40)	MIMO	6565	SU	/	0	43.886	/	Pass
			6685	SU	/	0	42.855	/	Pass
			6845	SU	/	0	43.069	/	Pass
	802.11be (EHT80)	MIMO	6625	SU	/	0	88.501	/	Pass
			6705	SU	/	0	86.866	/	Pass
			6785	SU	/	0	87.211	/	Pass
	802.11be (EHT160)	MIMO	6665	SU	/	00	169.344	/	Pass

2.1.7 OBW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11be (EHT20)	MIMO	6895	SU	/	0	18.981	<=320	Pass
			6995	SU	/	0	18.957	<=320	Pass
			7115	SU	/	0	18.961	<=320	Pass
	802.11be (EHT40)	MIMO	6925	SU	/	0	37.933	<=320	Pass
			7005	SU	/	0	37.974	<=320	Pass
			7085	SU	/	0	37.976	<=320	Pass
	802.11be (EHT80)	MIMO	6945	SU	/	0	77.482	<=320	Pass
			7025	SU	/	0	77.367	<=320	Pass
	802.11be (EHT160)	MIMO	6985	SU	/	0	156.498	<=320	Pass

2.1.8 26dB BW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11be (EHT20)	MIMO	6895	SU	/	0	23.128	/	Pass
			6995	SU	/	0	22.777	/	Pass
			7115	SU	/	0	23.205	/	Pass
	802.11be (EHT40)	MIMO	6925	SU	/	0	43.632	/	Pass
			7005	SU	/	0	43.670	/	Pass
			7085	SU	/	0	43.757	/	Pass
	802.11be (EHT80)	MIMO	6945	SU	/	0	88.129	/	Pass
			7025	SU	/	0	86.256	/	Pass
	802.11be (EHT160)	MIMO	6985	SU	/	0	172.158	/	Pass

2.1.9 OBW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11be (EHT20)	MIMO	6875	SU	/	0	18.947	<=320	Pass
	802.11be (EHT40)	MIMO	6885	SU	/	0	37.839	<=320	Pass
	802.11be (EHT80)	MIMO	6865	SU	/	0	77.413	<=320	Pass
	802.11be (EHT160)	MIMO	6825	SU	/	0	154.933	<=320	Pass
	802.11be (EHT320)	MIMO	6745	SU	/	0	310.941	<=320	Pass
			6905	SU	/	0	312.410	<=320	Pass

2.1.10 26dB BW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11be (EHT20)	MIMO	6875	SU	/	0	22.791	/	Pass
	802.11be (EHT40)	MIMO	6885	SU	/	0	43.497	/	Pass
	802.11be (EHT80)	MIMO	6865	SU	/	0	86.854	/	Pass
	802.11be (EHT160)	MIMO	6825	SU	/	0	169.824	/	Pass
	802.11be (EHT320)	MIMO	6745	SU	/	0	336.644	/	Pass
			6905	SU	/	0	332.403	/	Pass

2.1.11 OBW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11be (EHT40)	MIMO	6525	SU	/	0	37.827	<=320	Pass
	802.11be (EHT80)	MIMO	6545	SU	/	0	77.316	<=320	Pass
	802.11be (EHT160)	MIMO	6505	SU	/	0	156.626	<=320	Pass
	802.11be (EHT320)	MIMO	6585	SU	/	0	313.294	<=320	Pass

2.1.12 26dB BW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11be (EHT40)	MIMO	6525	SU	/	0	43.355	/	Pass
	802.11be (EHT80)	MIMO	6545	SU	/	0	84.830	/	Pass
	802.11be (EHT160)	MIMO	6505	SU	/	0	175.449	/	Pass
	802.11be (EHT320)	MIMO	6585	SU	/	0	338.877	/	Pass

2.1.13 OBW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11be (EHT320)	MIMO	6425	SU	/	0	311.651	<=320	Pass


2.1.14 26dB BW

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
							Result	Limit	
NTNV	802.11be (EHT320)	MIMO	6425	SU	/	0	336.618	/	Pass

2.2 Test Graph

2.2.1 OBW

802.11be(EHT20)_LCH_5955MHz_SU_/_Ant0_NTNV

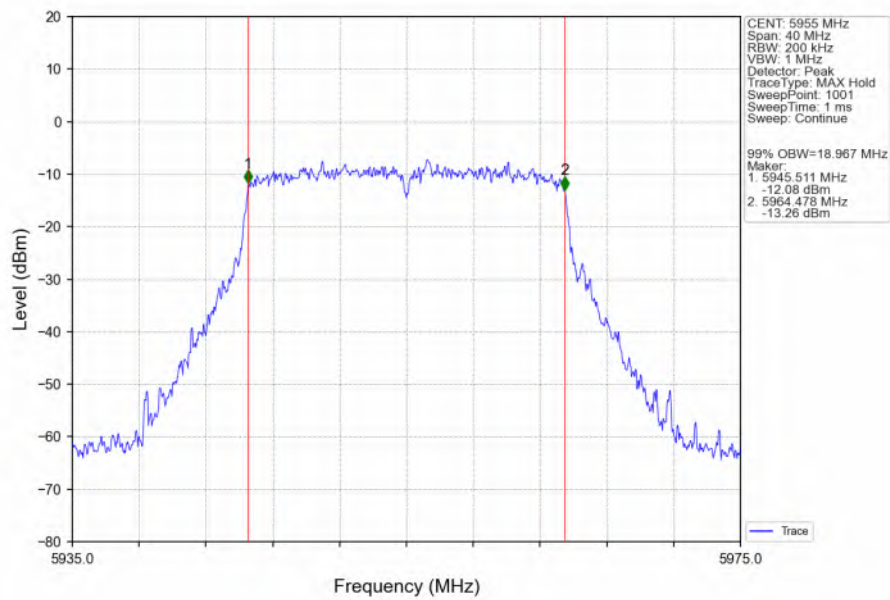

802.11be(EHT20)_MCH_6175MHz_SU_/_Ant0_NTNV

