


7.3.3 Test Setup Diagram

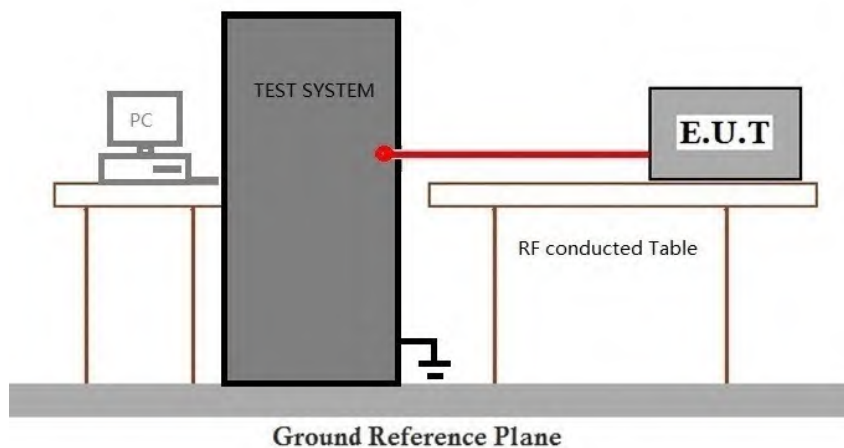

7.3.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.4 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)

Test Method: ANSI C63.10 (2020) Section 6.9.2

Limit:

20 dB bandwidth of the hopping channel	Hopping frequencies	Average time of occupancy
less than 250 kHz	least 50 hopping frequencies	shall not be greater than 0.4 seconds within a 20 second period
250 kHz to 500kHz	least 25 hopping frequencies	shall not be greater than 0.4 seconds within a 10 second period.

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 42 % RH

Atmospheric Pressure: 1001 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with FSK modulation.
Final test	05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with OFDM modulation.

7.4.3 Test Setup Diagram

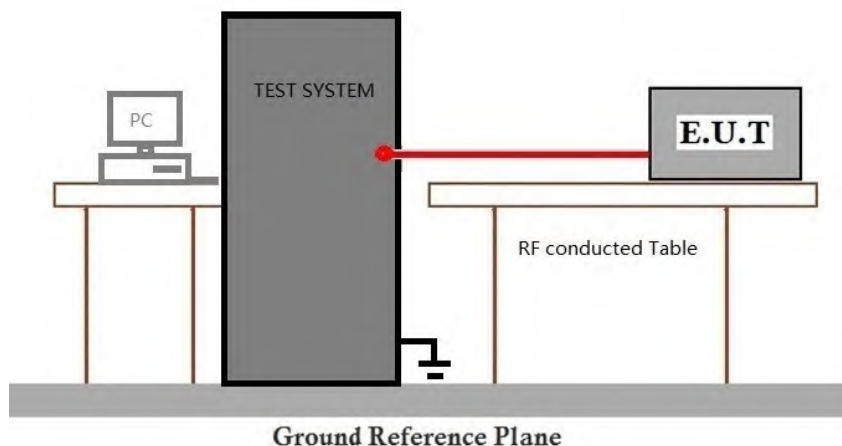



Report No.: SUCR260300021902

Page: 83 of 164

7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.5 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)

Test Method: ANSI C63.10 (2020) Section 7.8.2

Limit:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 42 % RH

Atmospheric Pressure: 1001 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with FSK modulation.
Final test	04	TX_Hop mode_Keep the EUT in frequency hopping mode with OFDM modulation.

7.5.3 Test Setup Diagram

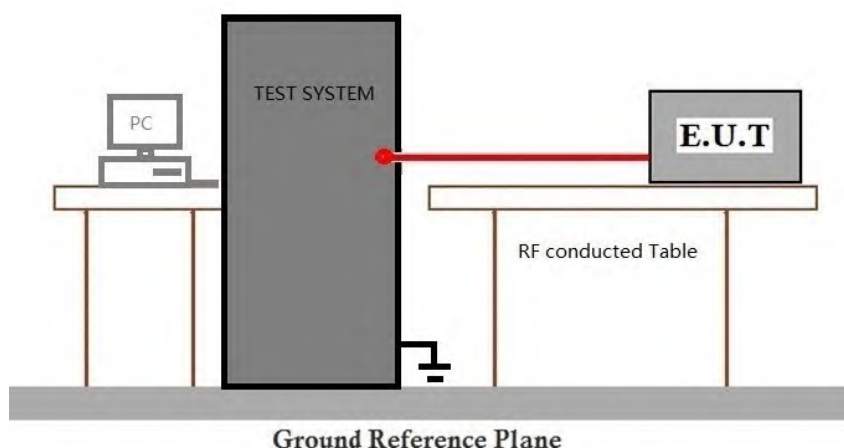

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(i)

Test Method: ANSI C63.10 (2020) Section 7.8.3

Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 42 % RH

Atmospheric Pressure: 1001 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with FSK modulation.
Final test	04	TX_Hop mode_Keep the EUT in frequency hopping mode with OFDM modulation.

7.6.3 Test Setup Diagram

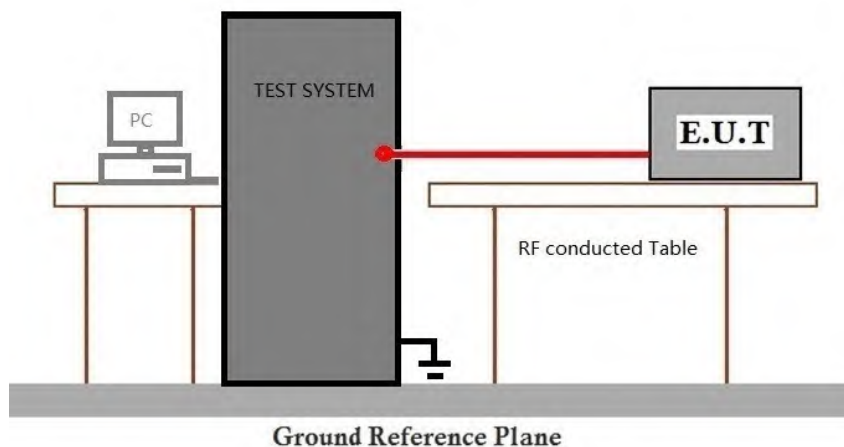

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(i)

Test Method: ANSI C63.10 (2020) Section 7.8.4

Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 42 % RH

Atmospheric Pressure: 1001 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with FSK modulation.
Final test	04	TX_Hop mode_Keep the EUT in frequency hopping mode with OFDM modulation.

7.7.3 Test Setup Diagram

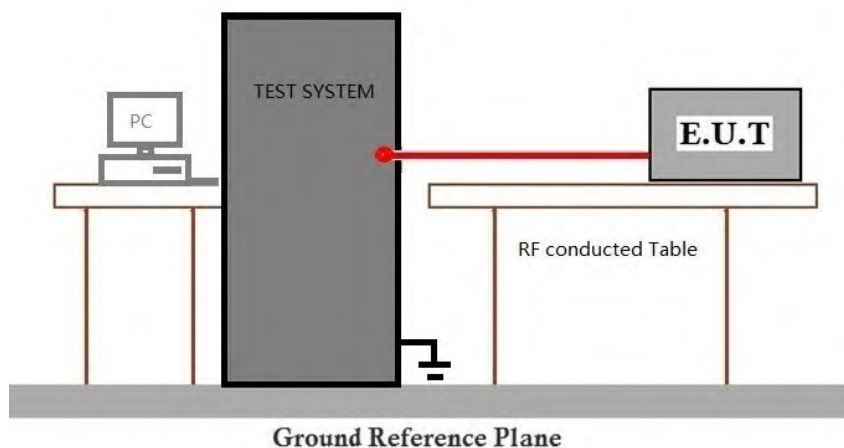



Report No.: SUCR260300021902

Page: 87 of 164

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 7.8.7.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 42 % RH

Atmospheric Pressure: 1001 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with FSK modulation.
Final test	02	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with FSK modulation.
Final test	04	TX_Hop mode_Keep the EUT in frequency hopping mode with OFDM modulation.
Final test	05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with OFDM modulation.

7.8.3 Test Setup Diagram

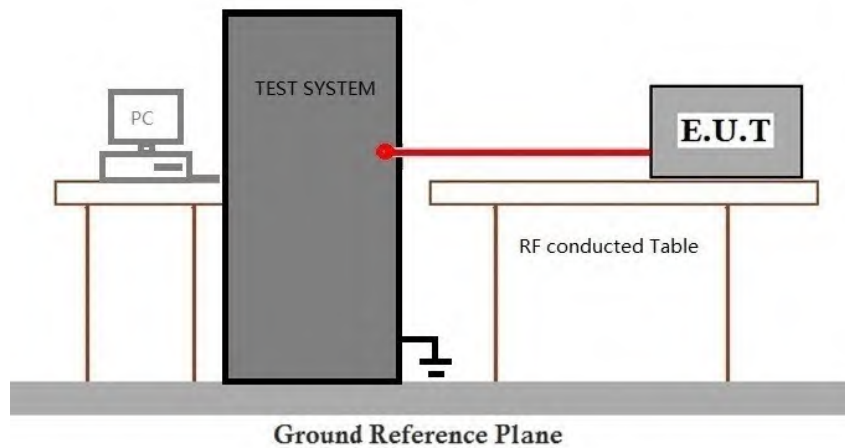

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Conducted Spurious Emissions

Test Requirement ANSI C63.10 (2020) Section 7.8.7

Test Method: ANSI C63.10 (2020) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 42 % RH

Atmospheric Pressure: 1001 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with FSK modulation.
Final test	05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with OFDM modulation.

7.9.3 Test Setup Diagram

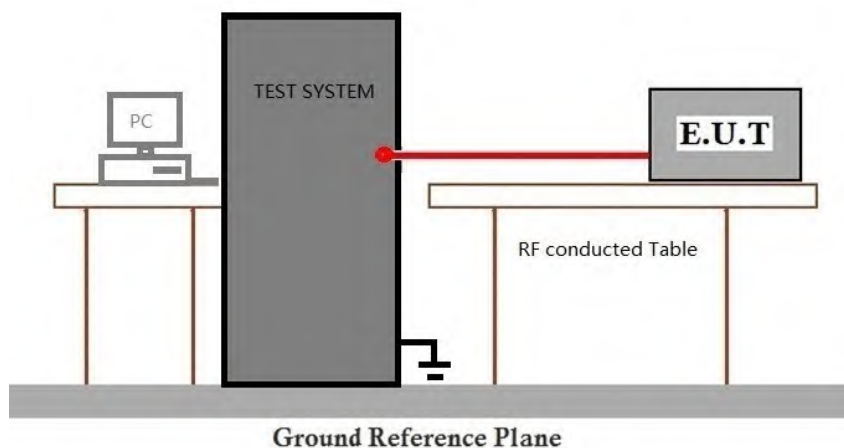



Report No.: SUCR260300021902

Page: 91 of 164

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SUCR2603000219MO

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SUCR2603000219MO

10 Appendix

OFDM

1. Bandwidth

1.1 Test Result

1.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
800kHz	SISO	902.8	1	0.560	/	Pass
		914	1	0.557	/	Pass
		926.8	1	0.557	/	Pass
400kHz	SISO	902.4	1	0.184	/	Pass
		914.8	1	0.200	/	Pass
		927.6	1	0.194	/	Pass
200kHz	SISO	902.2	1	0.108	/	Pass
		915	1	0.107	/	Pass
		927.8	1	0.110	/	Pass


1.1.2 20dB BW

Mode	TX Type	Frequency (MHz)	ANT	20dB Bandwidth (MHz)		Verdict
				Result	Limit	
800kHz	SISO	902.8	1	0.602	/	Pass
		914	1	0.603	/	Pass
		926.8	1	0.603	/	Pass
400kHz	SISO	902.4	1	0.194	/	Pass
		914.8	1	0.194	/	Pass
		927.6	1	0.204	/	Pass
200kHz	SISO	902.2	1	0.110	/	Pass
		915	1	0.107	/	Pass
		927.8	1	0.107	/	Pass


1.2 Test Graph

1.2.1 OBW


800kHz_LCH_902.8MHz_Ant1_NTNV

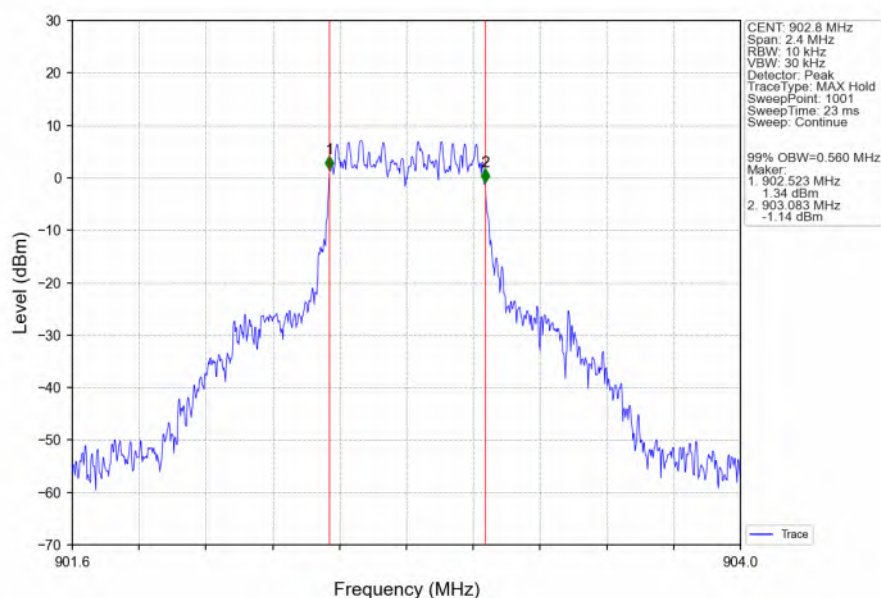


800kHz_MCH_914MHz_Ant1_NTNV

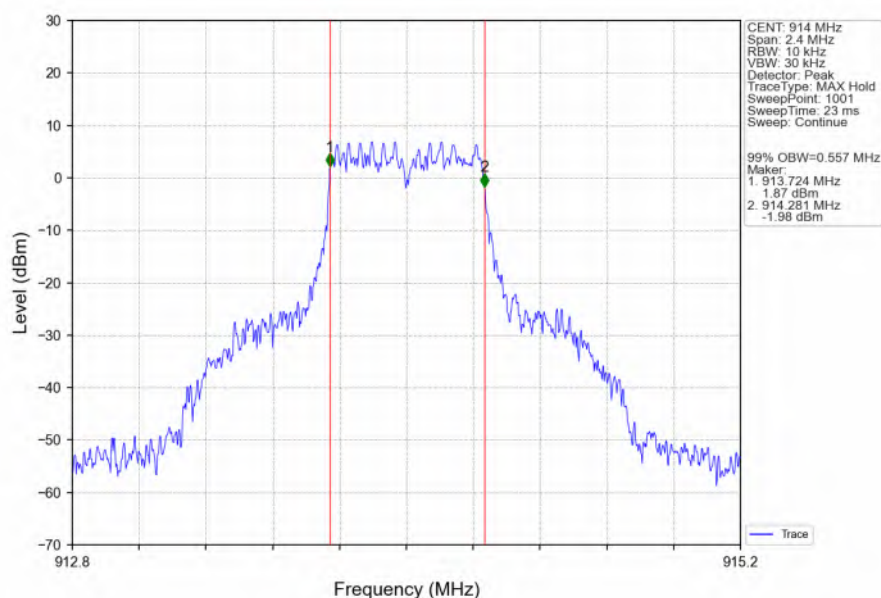


800kHz_HCH_926.8MHz_Ant1_NTNV

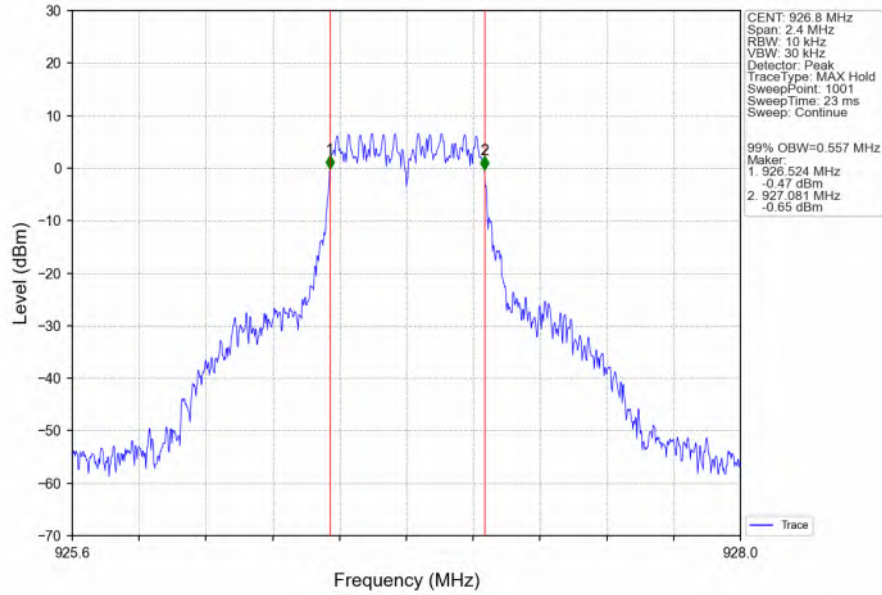


400kHz_LCH_902.4MHz_Ant1_NTNV

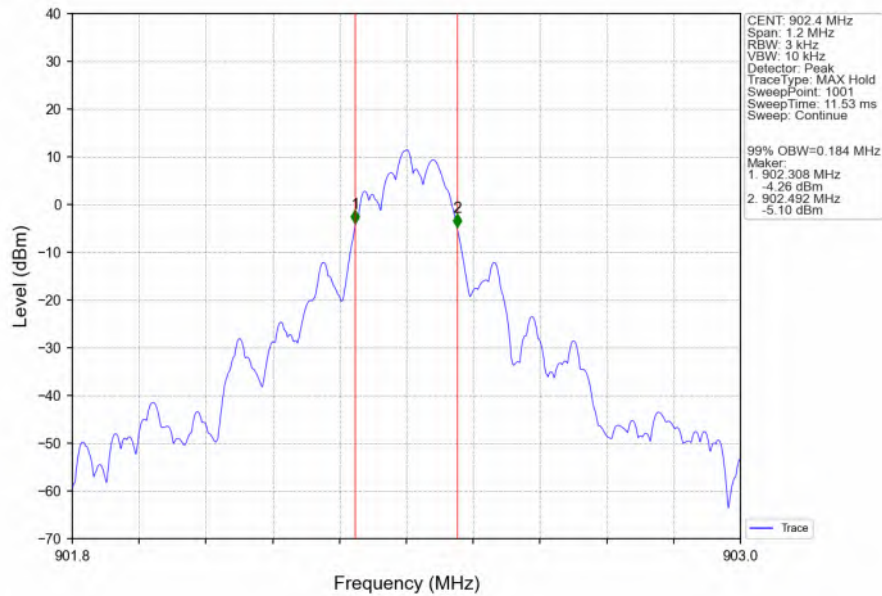


400kHz_MCH_914.8MHz_Ant1_NTNV

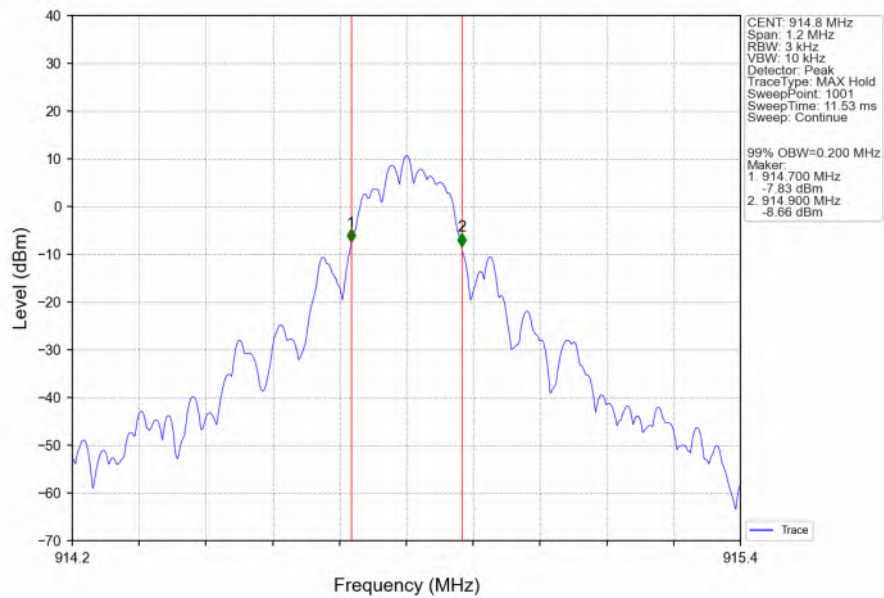


400kHz_HCH_927.6MHz_Ant1_NTNV

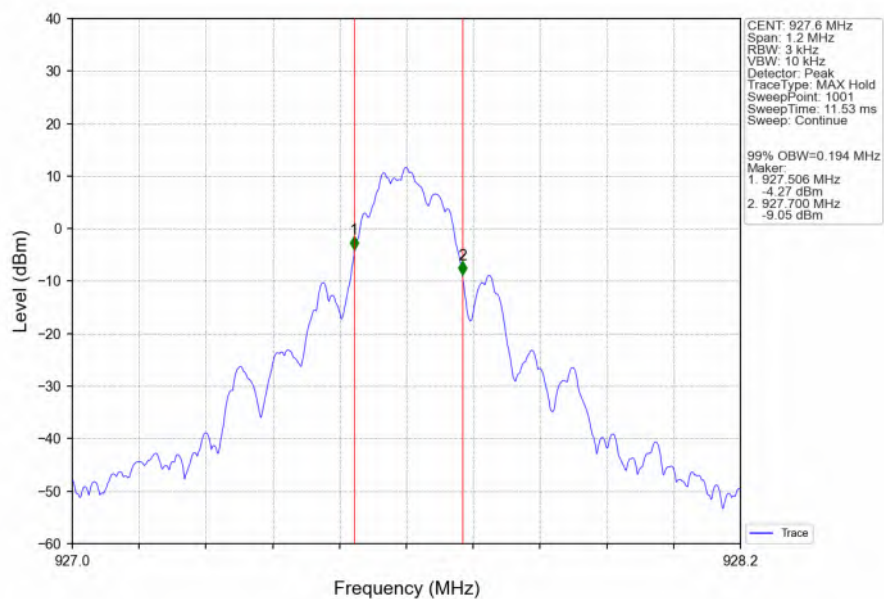


200kHz_LCH_902.2MHz_Ant1_NTNV

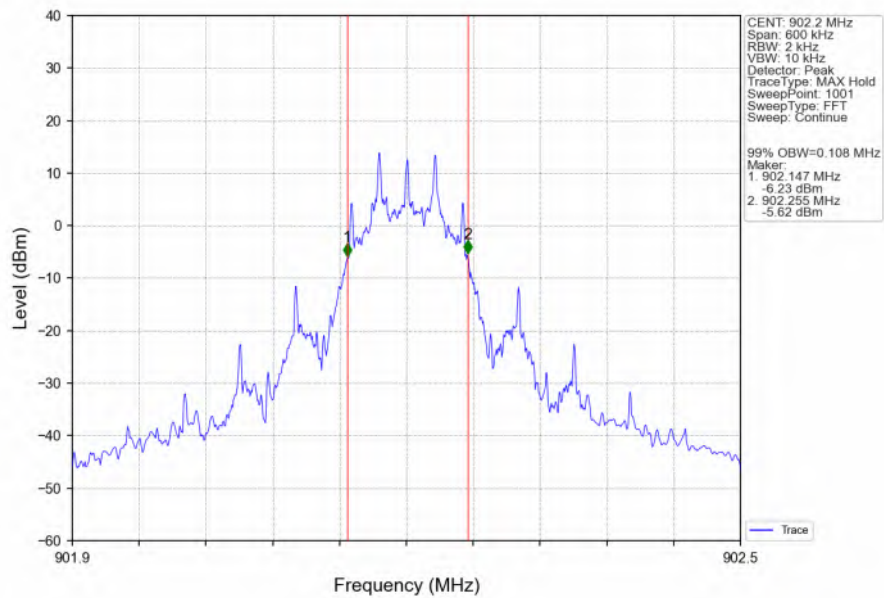

200kHz_MCH_915MHz_Ant1_NTNV

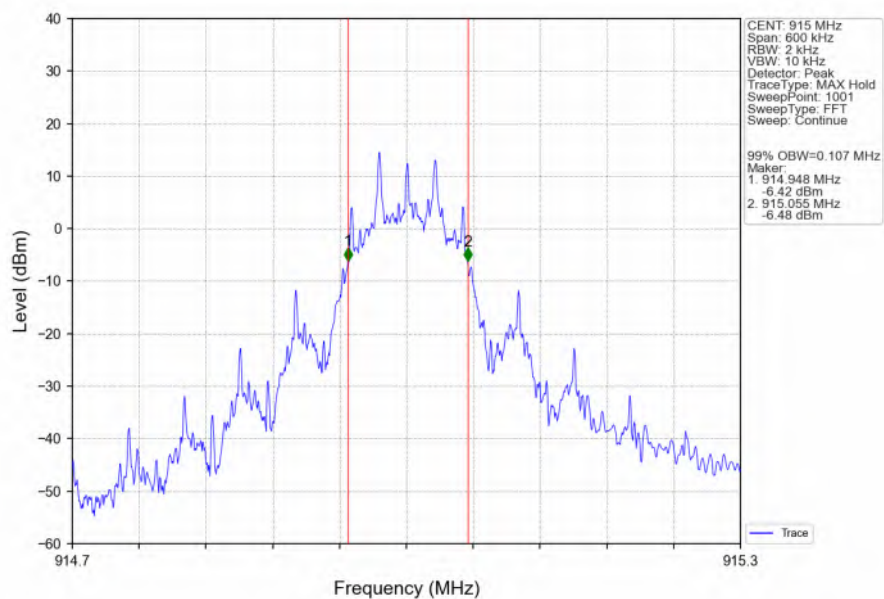


200kHz_HCH_927.8MHz_Ant1_NTNV

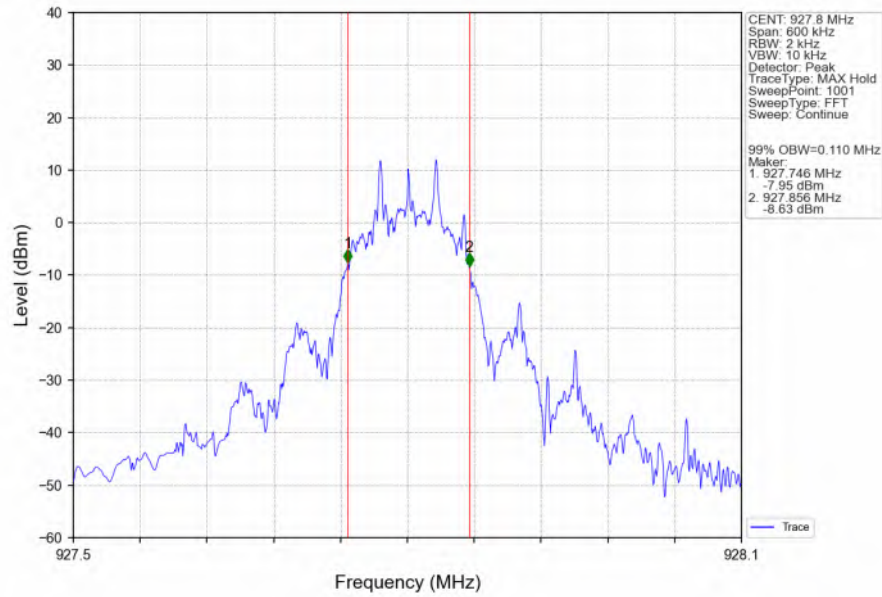


1.2.2 20dB BW


800kHz_LCH_902.8MHz_Ant1_NTNV

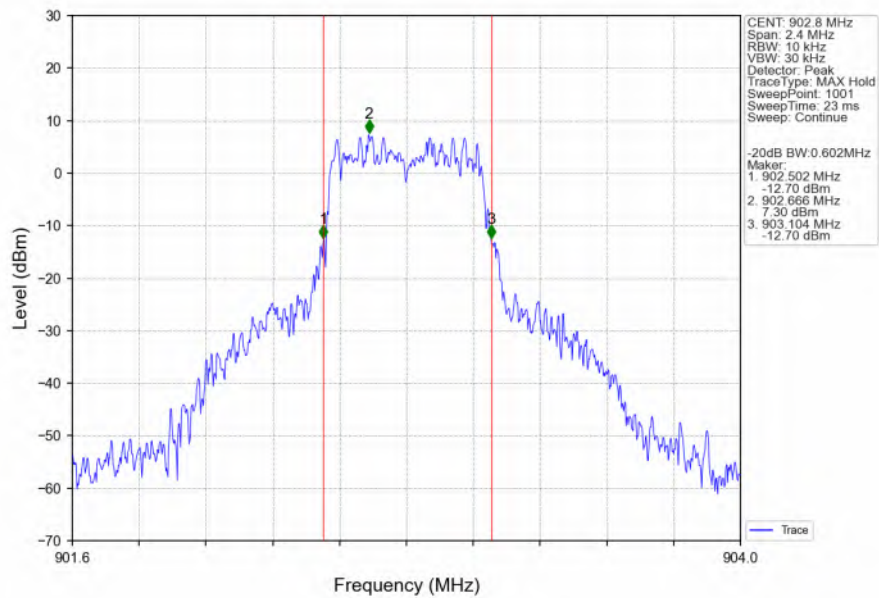


800kHz_MCH_914MHz_Ant1_NTNV

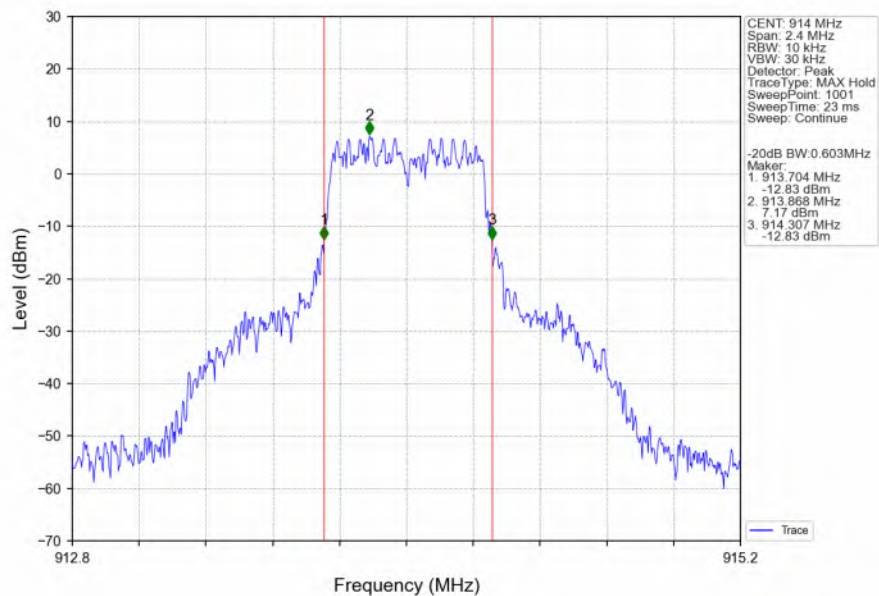


800kHz_HCH_926.8MHz_Ant1_NTNV

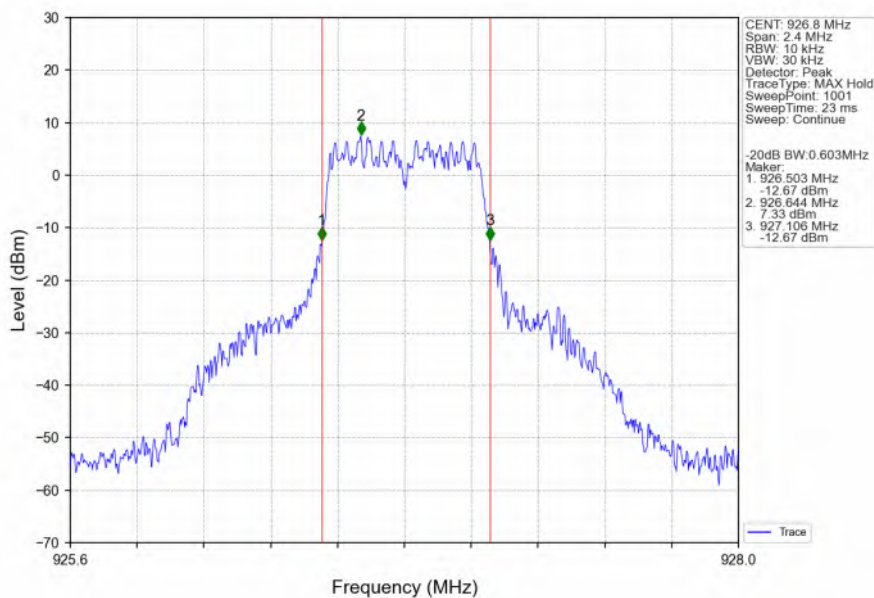


400kHz_LCH_902.4MHz_Ant1_NTNV

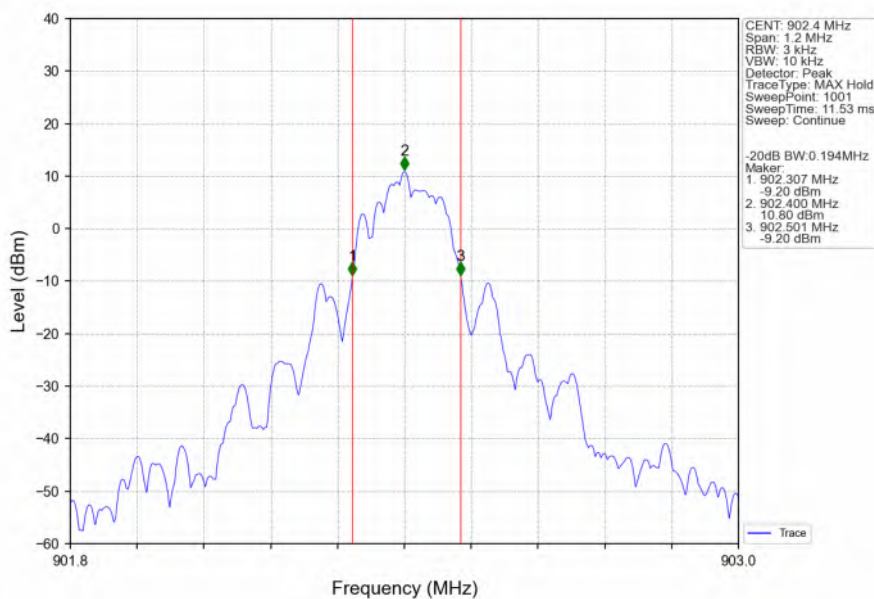


400kHz_MCH_914.8MHz_Ant1_NTNV

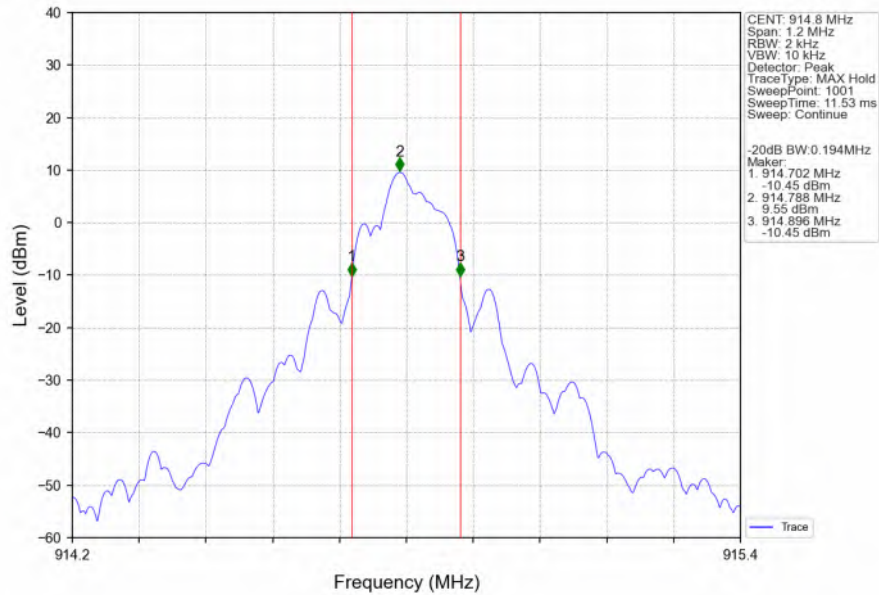


400kHz_HCH_927.6MHz_Ant1_NTNV

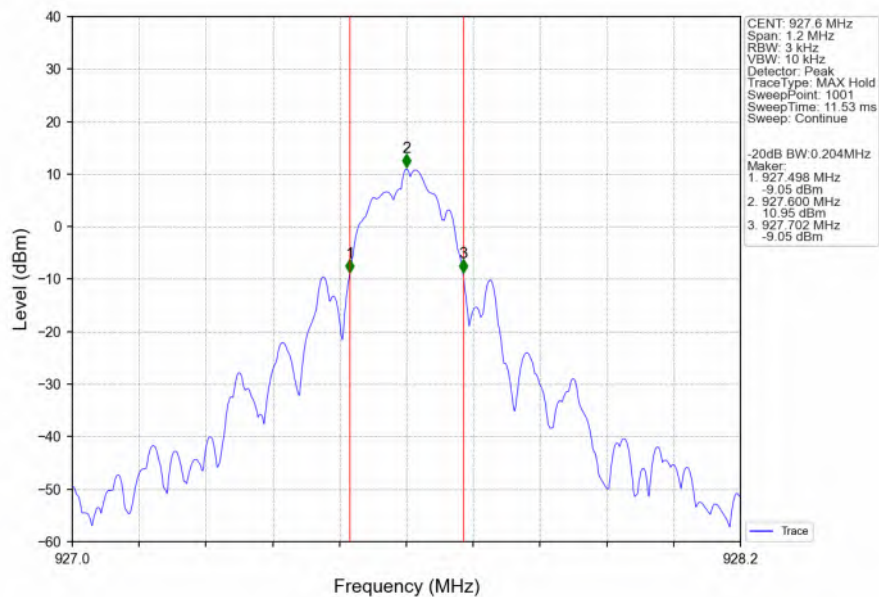


200kHz_LCH_902.2MHz_Ant1_NTNV

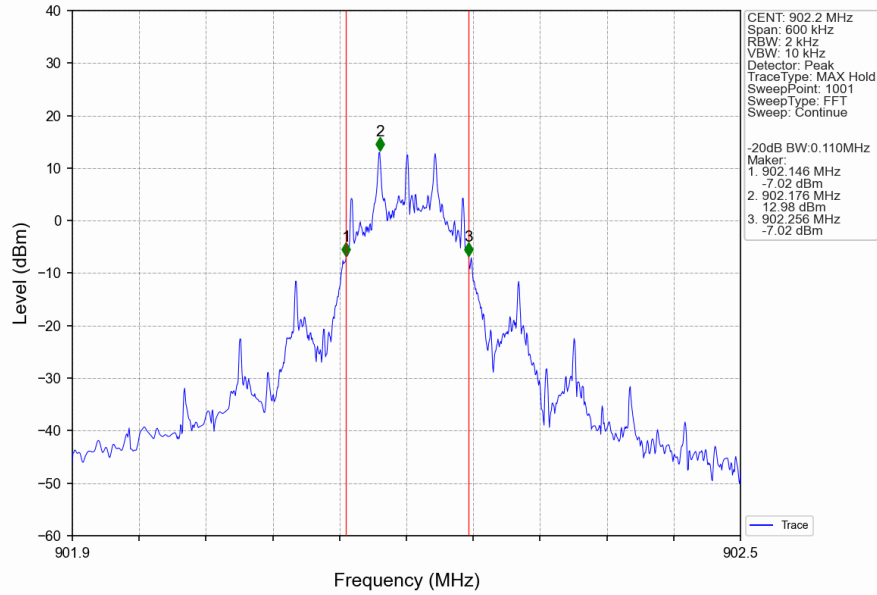

200kHz_MCH_915MHz_Ant1_NTNV

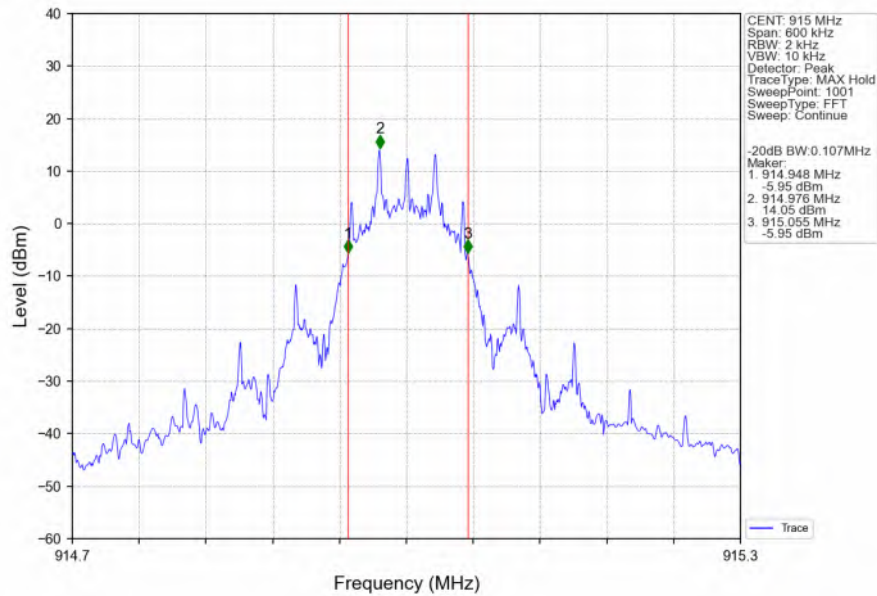

200kHz_HCH_927.8MHz_Ant1_NTNV

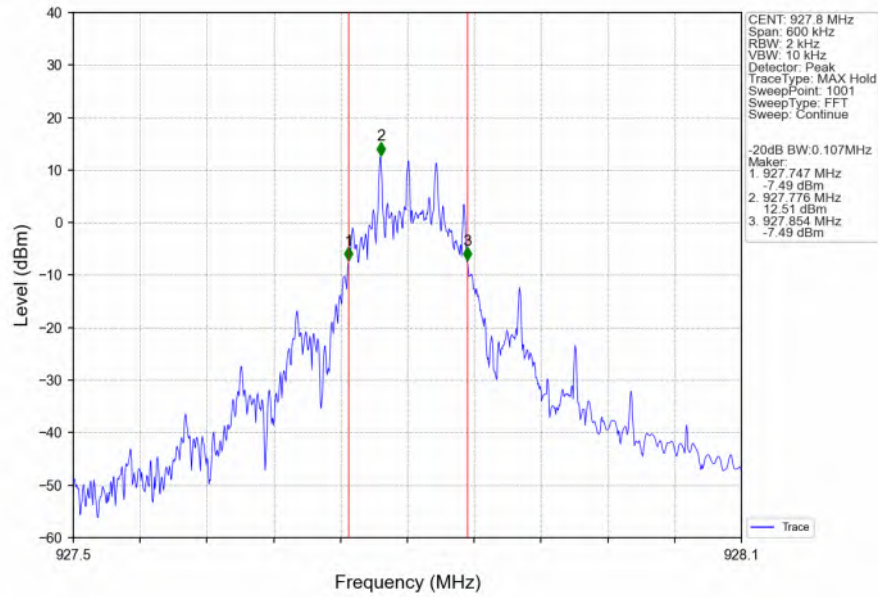

2. Maximum Conducted Output Power

2.1 Test Result

2.1.1 Power


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
800kHz	SISO	902.8	16.92	≤ 23.98	Pass
		914	16.00	≤ 23.98	Pass
		926.8	16.10	≤ 23.98	Pass
400kHz	SISO	902.4	16.90	≤ 30	Pass
		914.8	16.79	≤ 30	Pass
		927.6	17.07	≤ 30	Pass
200kHz	SISO	902.2	16.89	≤ 30	Pass
		915	16.77	≤ 30	Pass
		927.8	16.08	≤ 30	Pass

Note1: Antenna Gain: Ant1: 1.10dBi;


2.2 Test Graph

2.2.1 Power


800kHz_LCH_902.8MHz_Ant1_NTNV

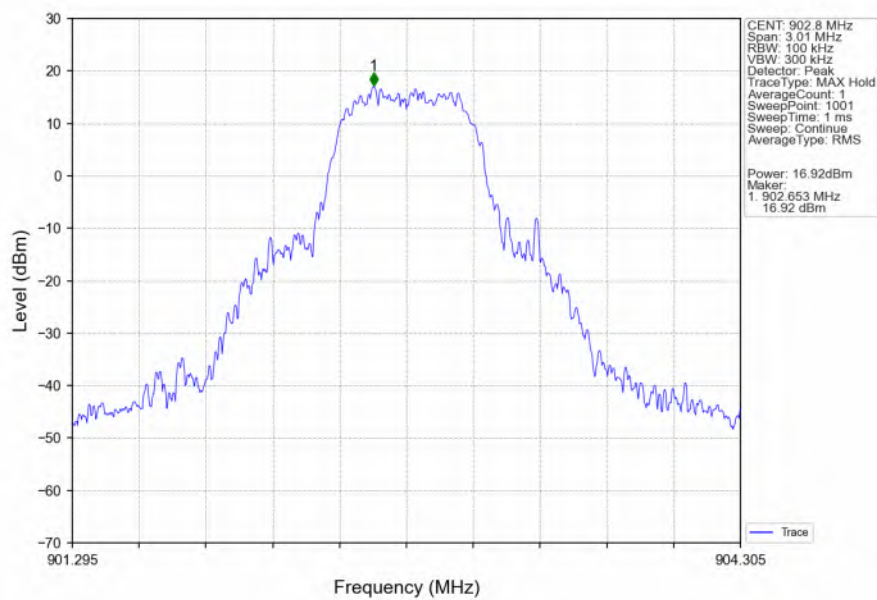


800kHz_MCH_914MHz_Ant1_NTNV

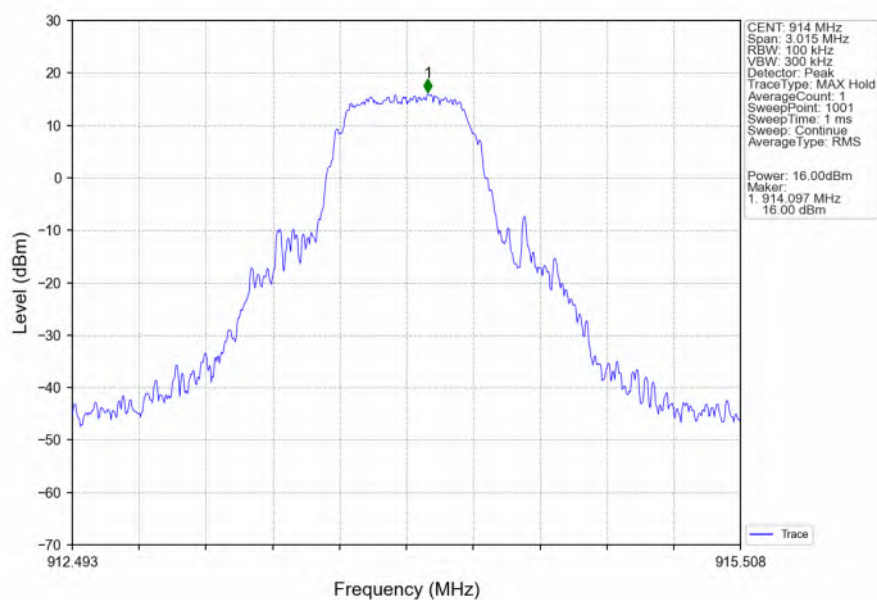


800kHz_HCH_926.8MHz_Ant1_NTNV

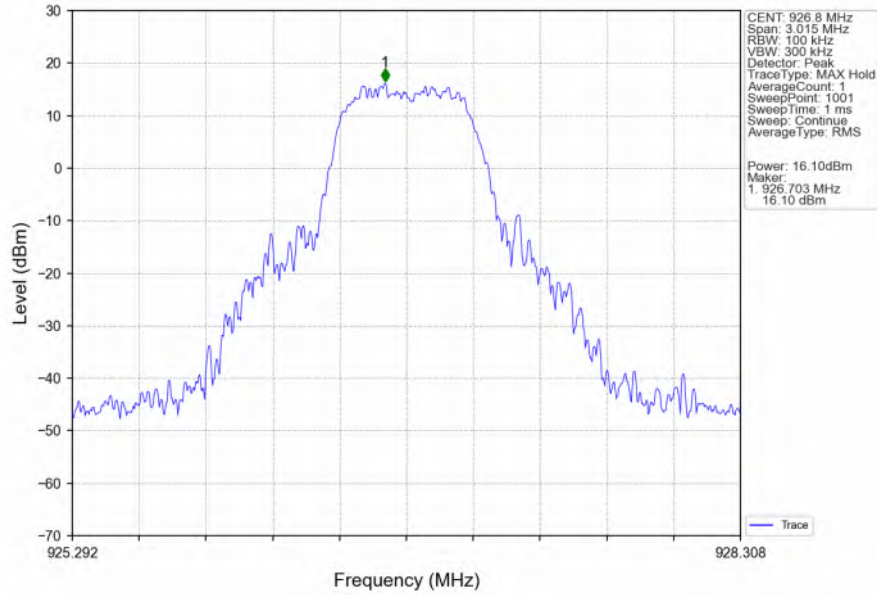


400kHz_LCH_902.4MHz_Ant1_NTNV

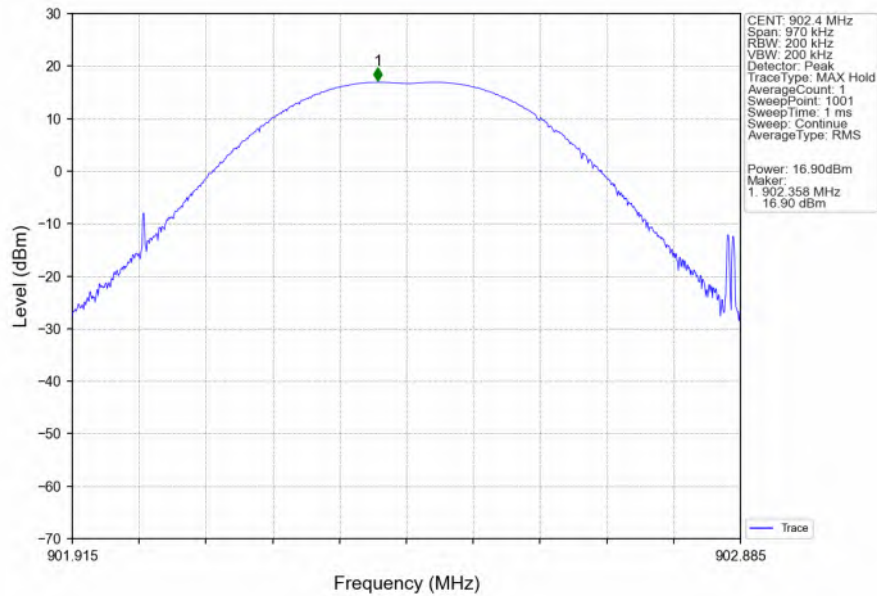


400kHz_MCH_914.8MHz_Ant1_NTNV

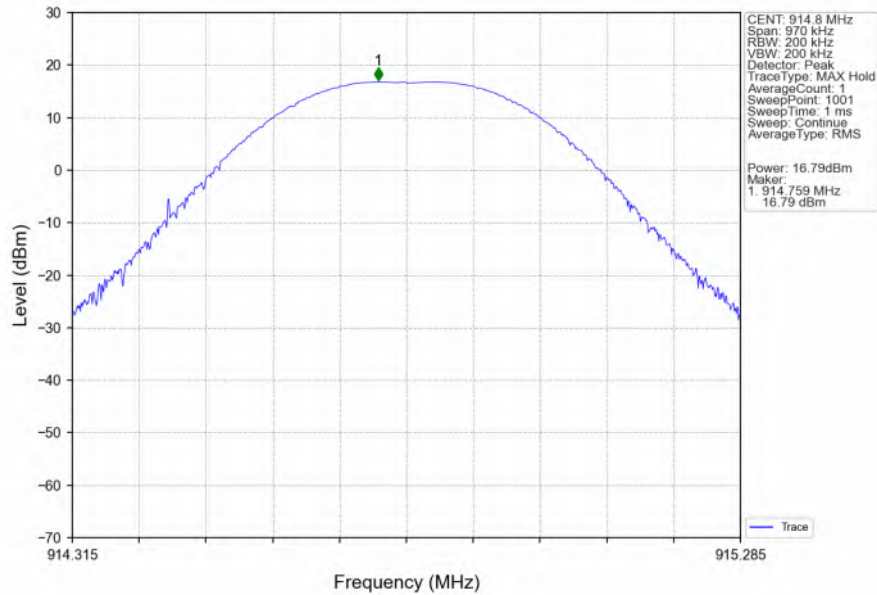


400kHz_HCH_927.6MHz_Ant1_NTNV

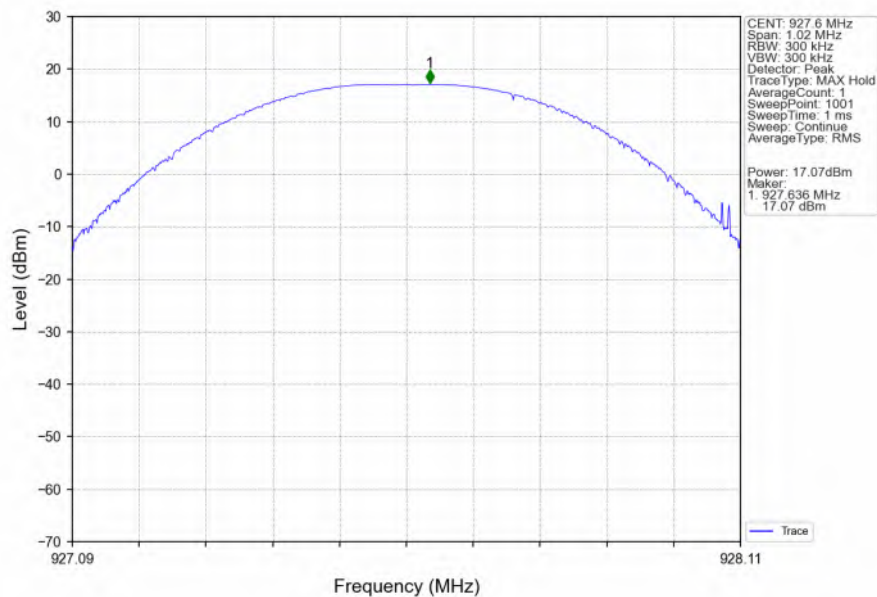


200kHz_LCH_902.2MHz_Ant1_NTNV

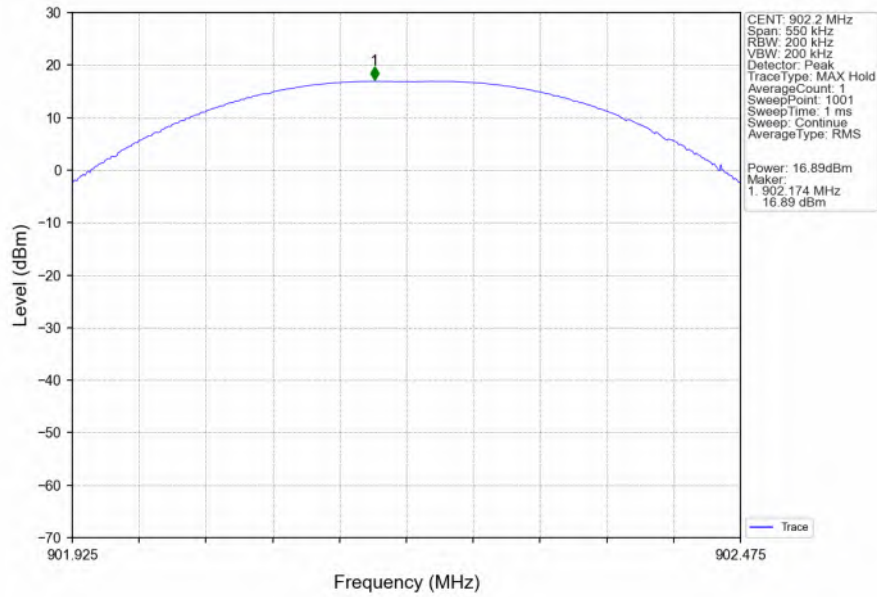

200kHz_MCH_915MHz_Ant1_NTNV

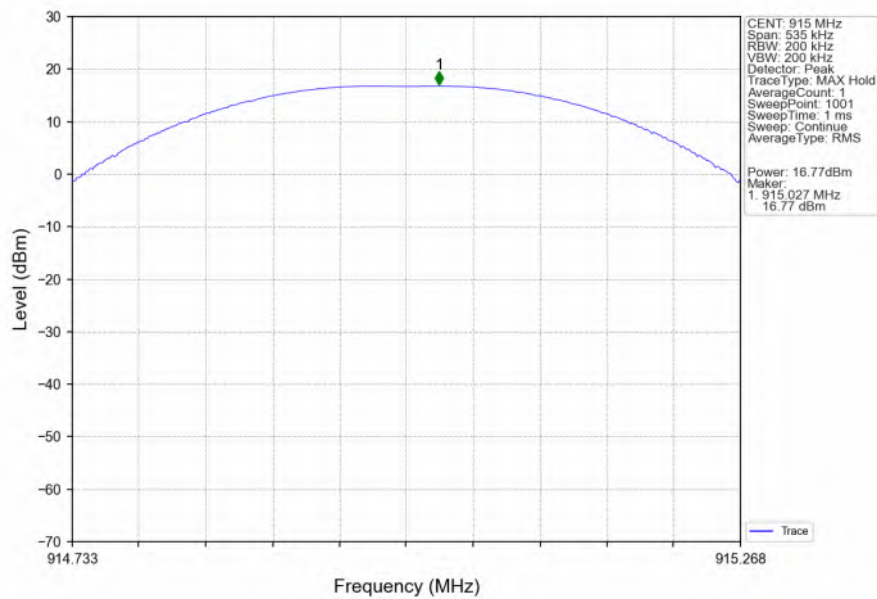

200kHz_HCH_927.8MHz_Ant1_NTNV

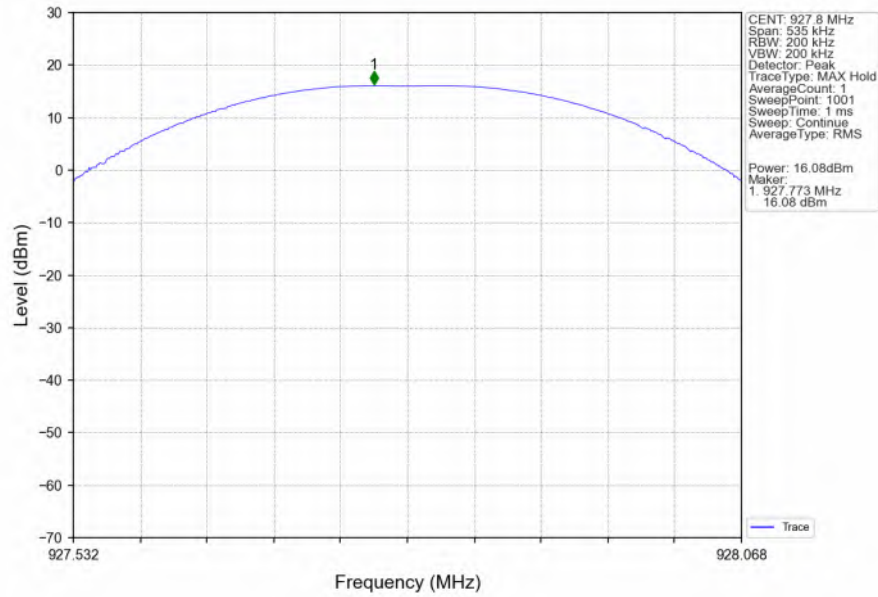

3. Carrier Frequency Separation


3.1 Test Result

3.1.1 Ant1


Ant1						
Mode	TX Type	Frequency (MHz)	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
800kHz	SISO	HOPP	0.800	0.603	≥ 0.603	Pass
400kHz	SISO	HOPP	0.400	0.204	≥ 0.204	Pass
200kHz	SISO	HOPP	0.200	0.110	≥ 0.11	Pass

3.2 Test Graph

3.2.1 Ant1

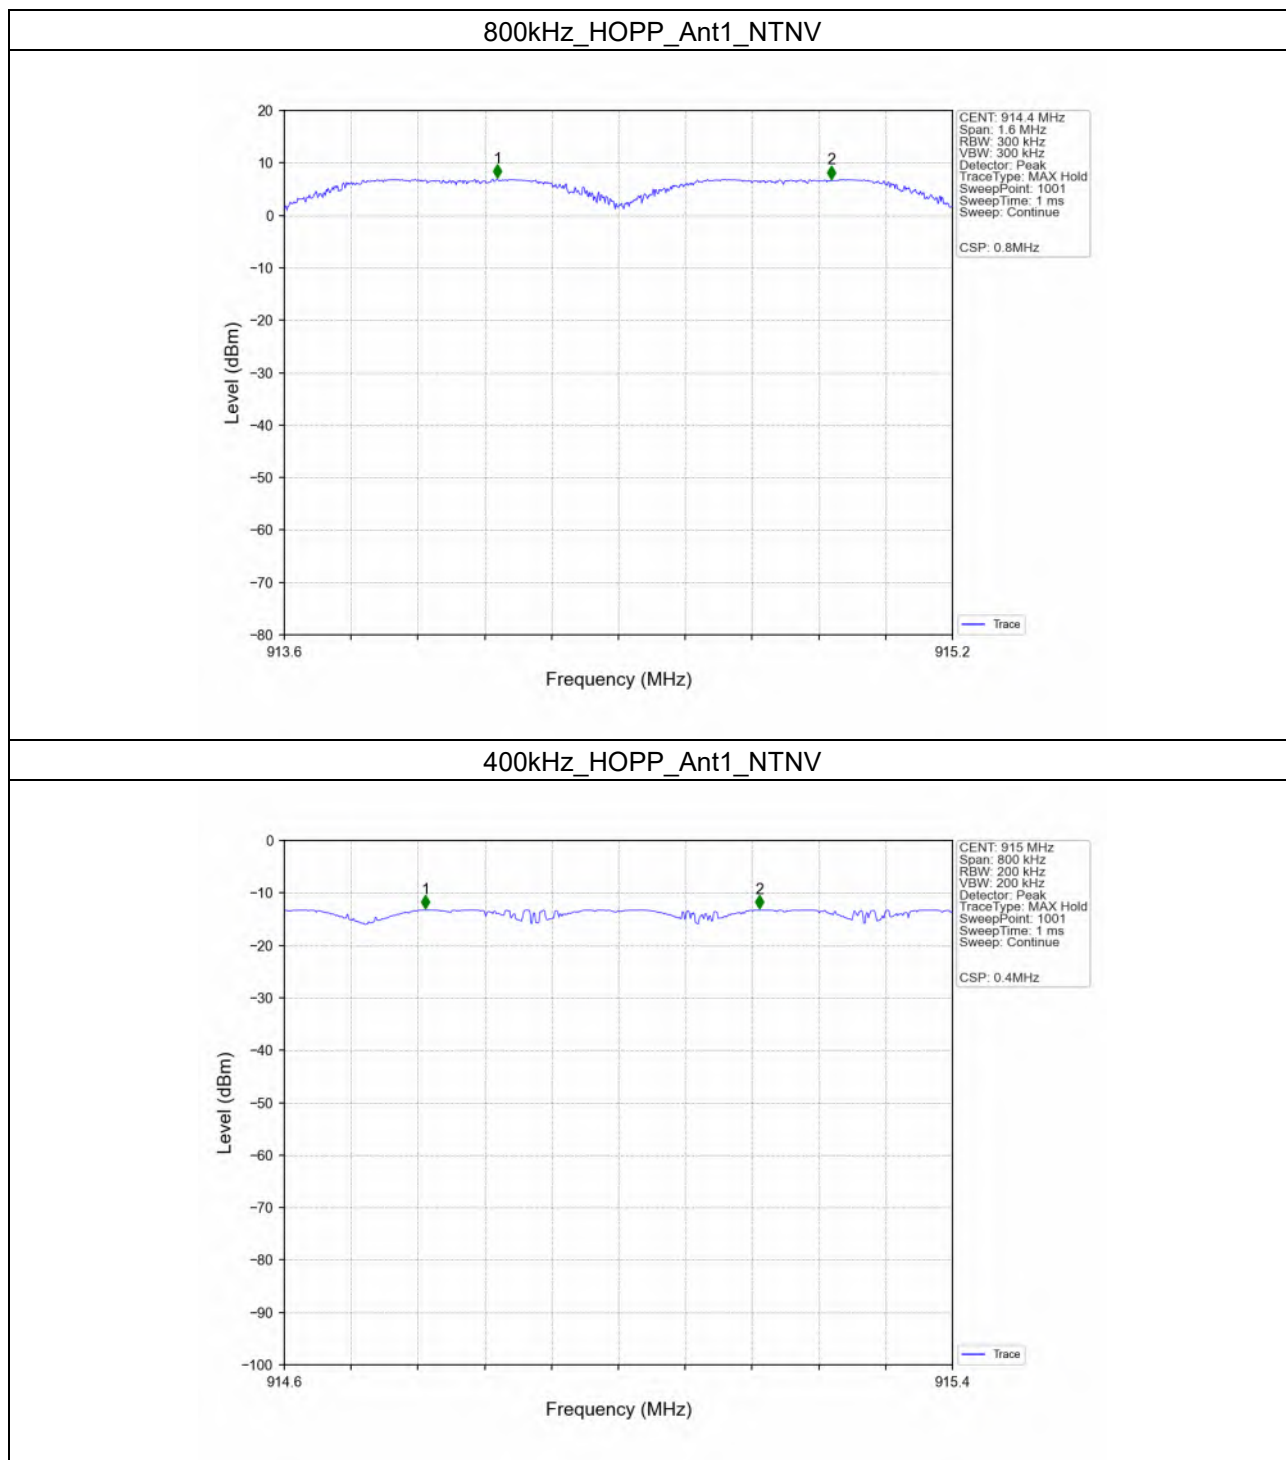

200kHz_HOPP_Ant1_NTNV

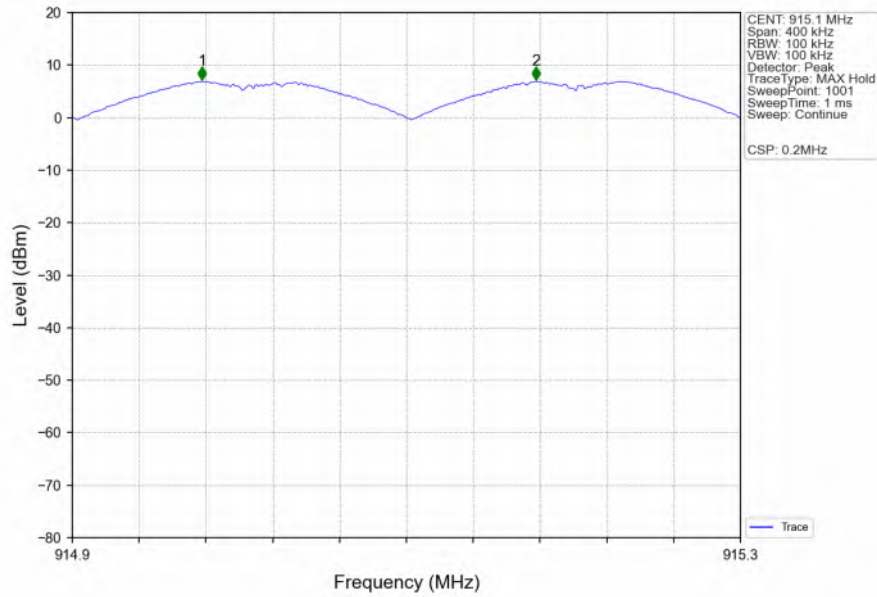



Report No.: SUCR260300021902

Page: 113 of 164

4. Number of Hopping Frequencies


4.1 Test Result

4.1.1 HoppNum


Mode	TX Type	Frequency (MHz)	Num of Hopping Frequencies		Verdict
			ANT1	Limit	
800kHz	SISO	HOPP	31	≥ 25	Pass
400kHz	SISO	HOPP	64	≥ 50	Pass
200kHz	SISO	HOPP	129	≥ 50	Pass

4.2 Test Graph

4.2.1 HoppNum

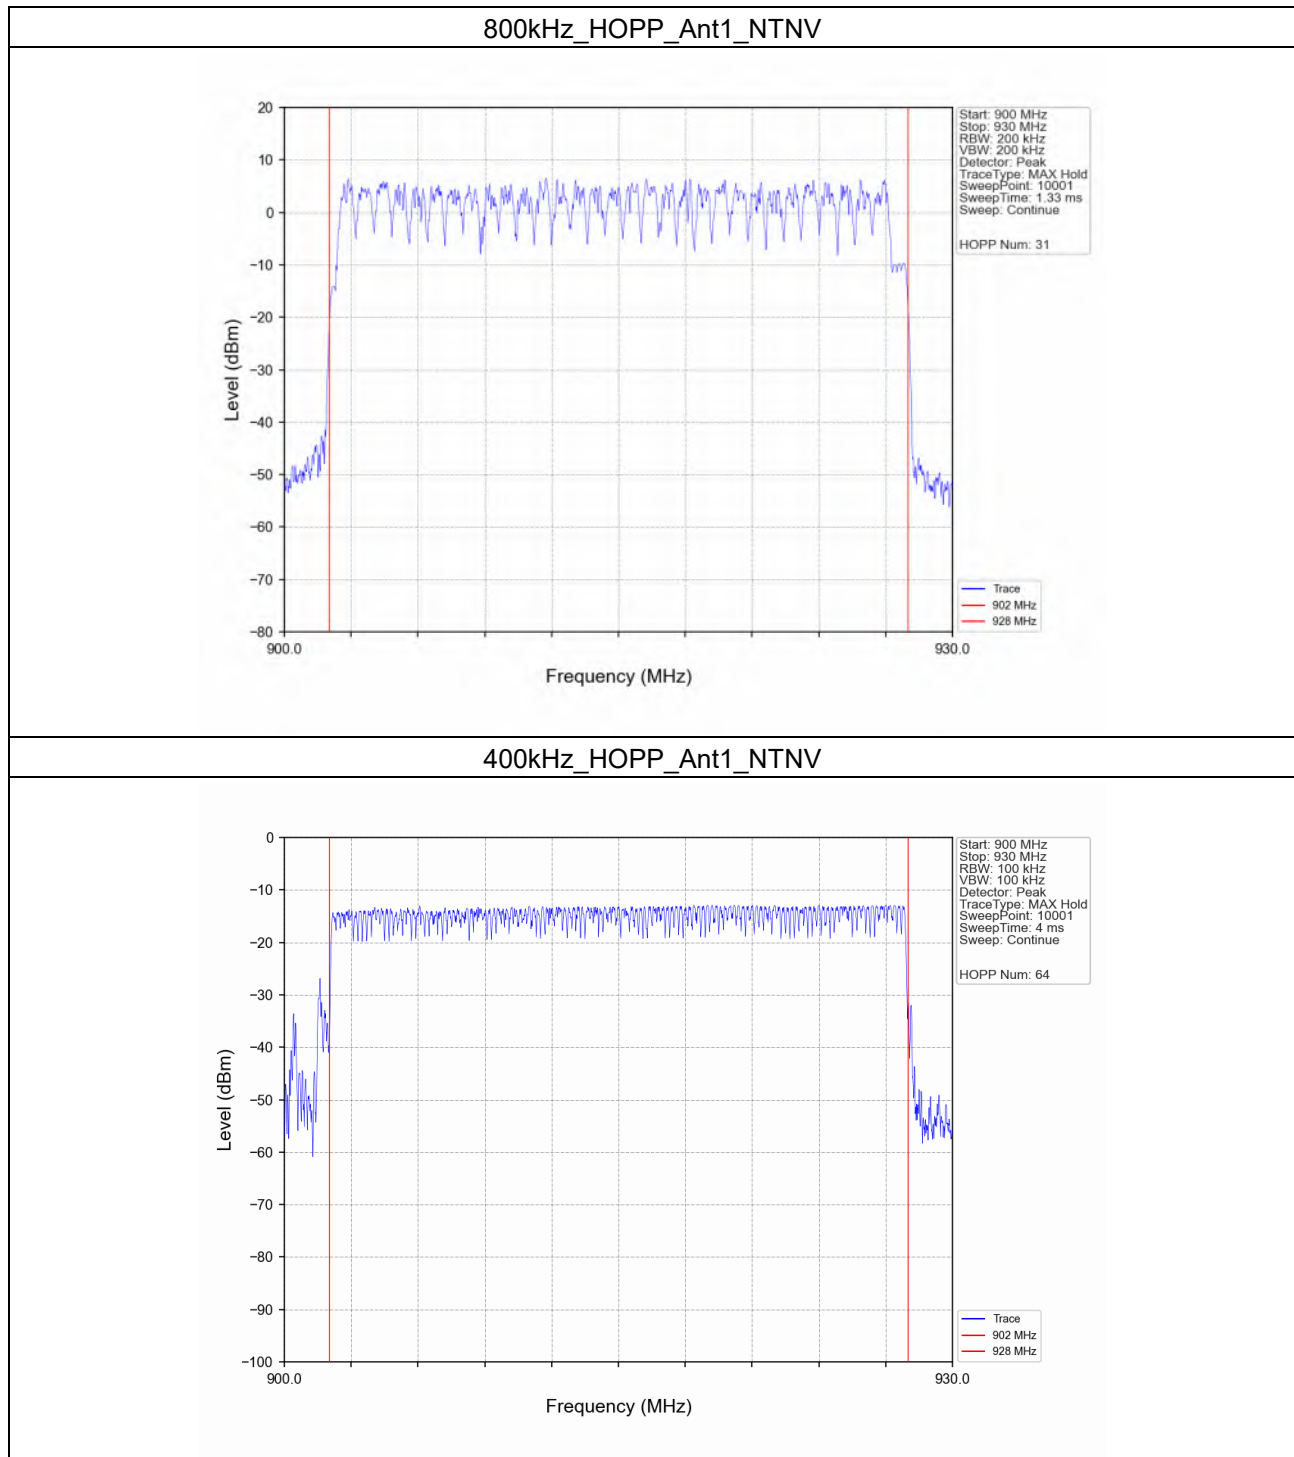

200kHz_HOPP_Ant1_NTNV

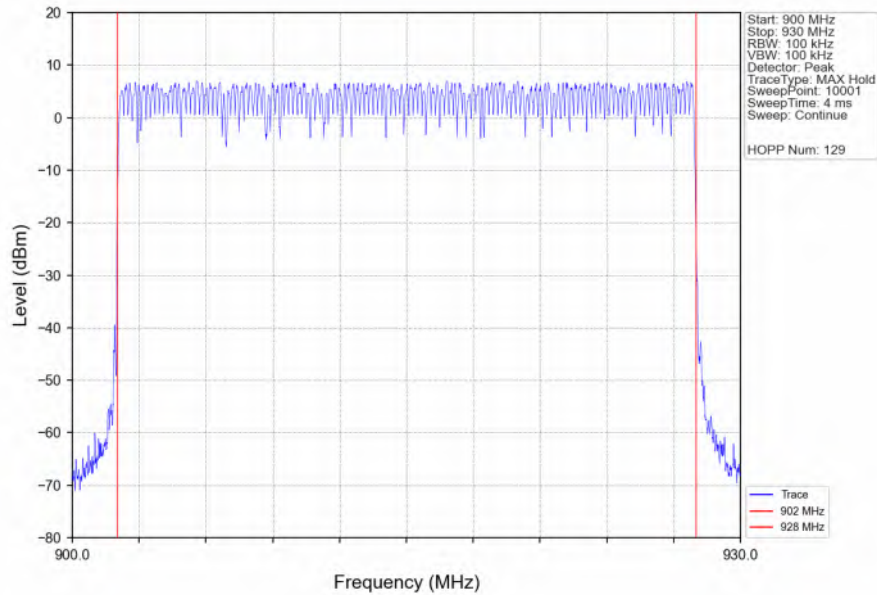

5. Time of Occupancy (Dwell Time)


5.1 Test Result

5.1.1 Ant1


Ant1								
Mode	TX Type	Frequency (MHz)	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
800kHz	SISO	HOPP	2.644	10.000	1	2.644	<=400	Pass
400kHz	SISO	HOPP	2.723	20.000	1	2.723	<=400	Pass
200kHz	SISO	HOPP	13.341	20.000	1	13.341	<=400	Pass

5.2 Test Graph


5.2.1 Ant1

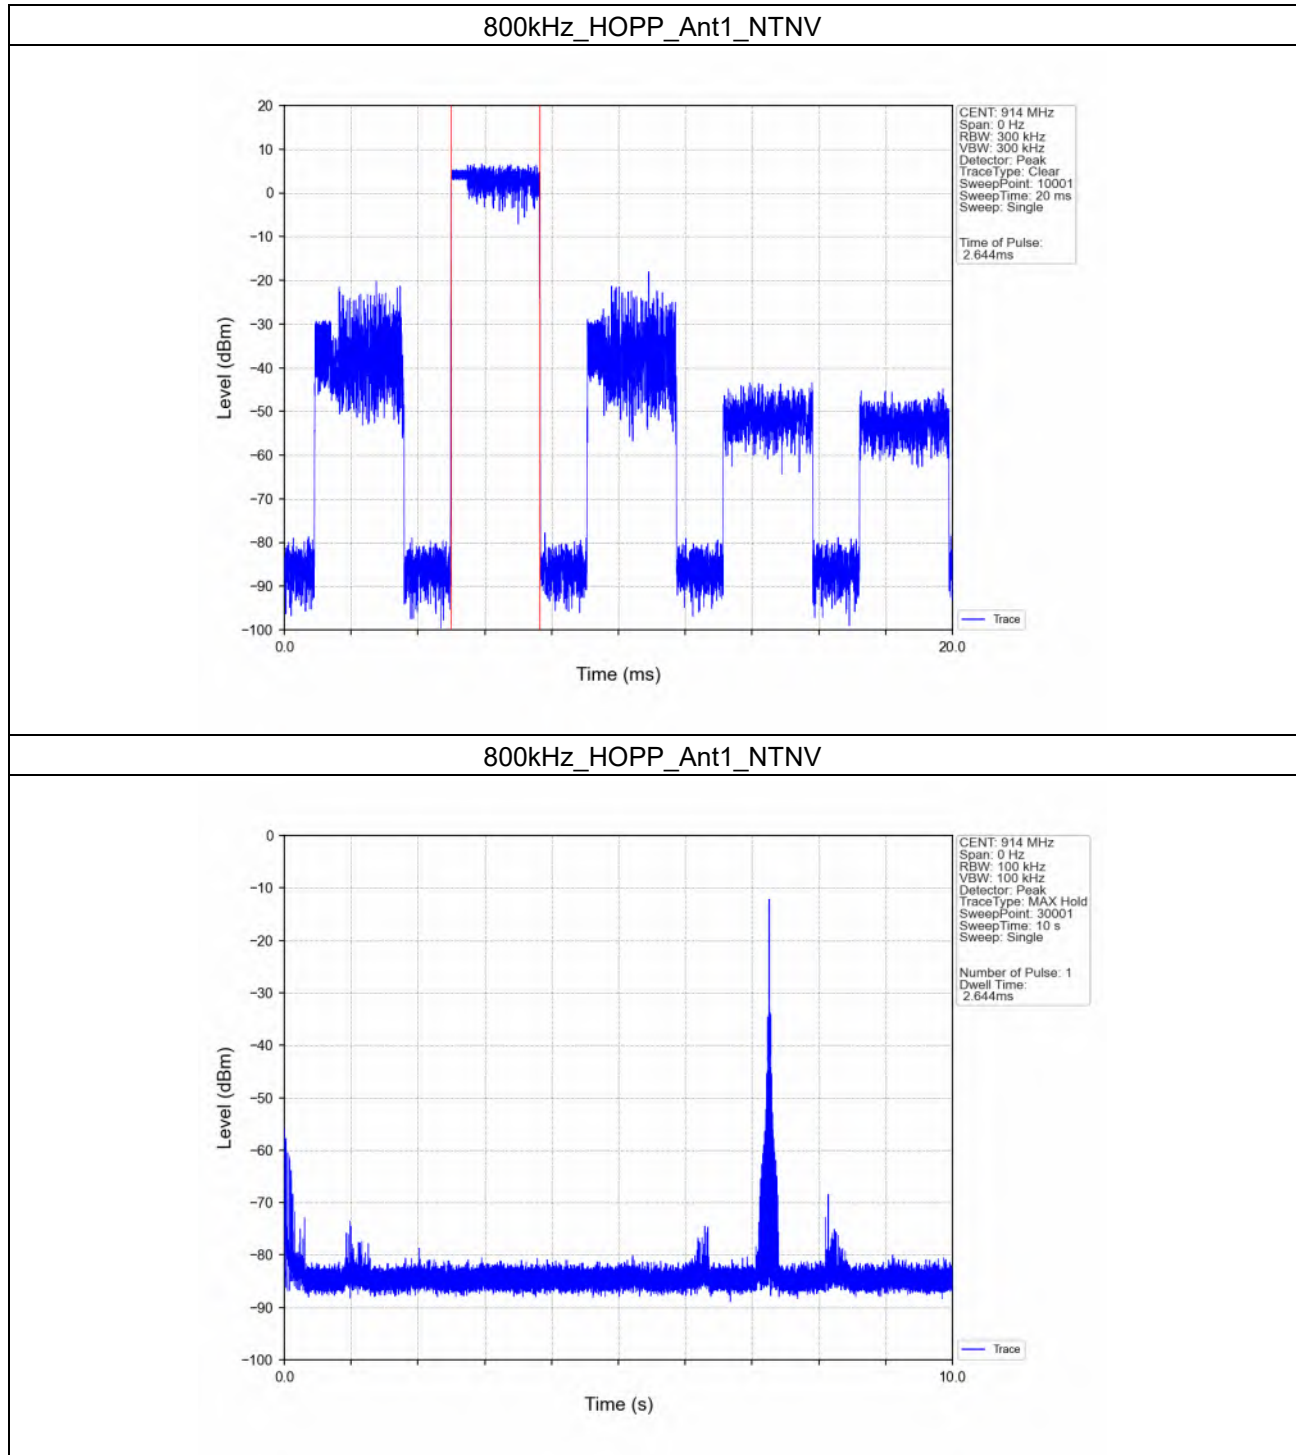


400kHz_HOPP_Ant1_NTNV

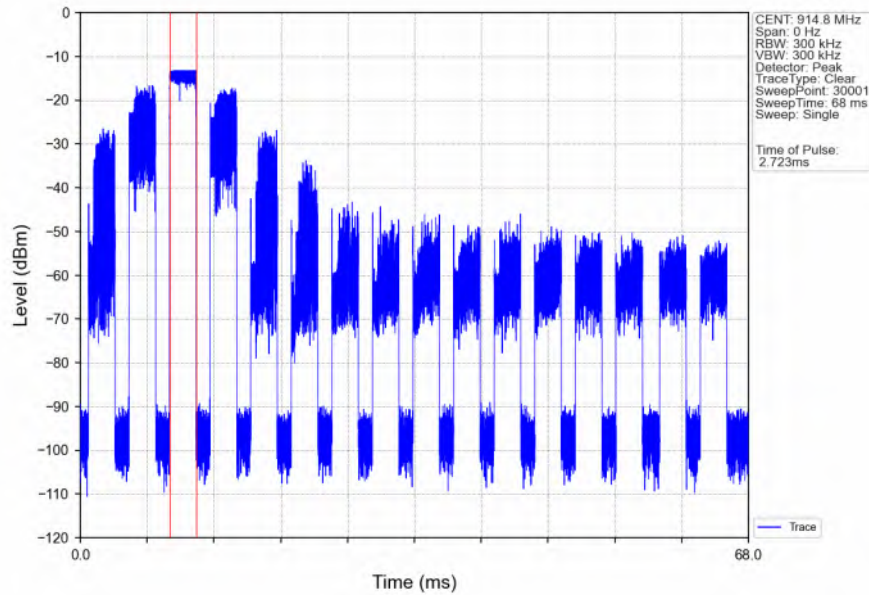


400kHz_HOPP_Ant1_NTNV

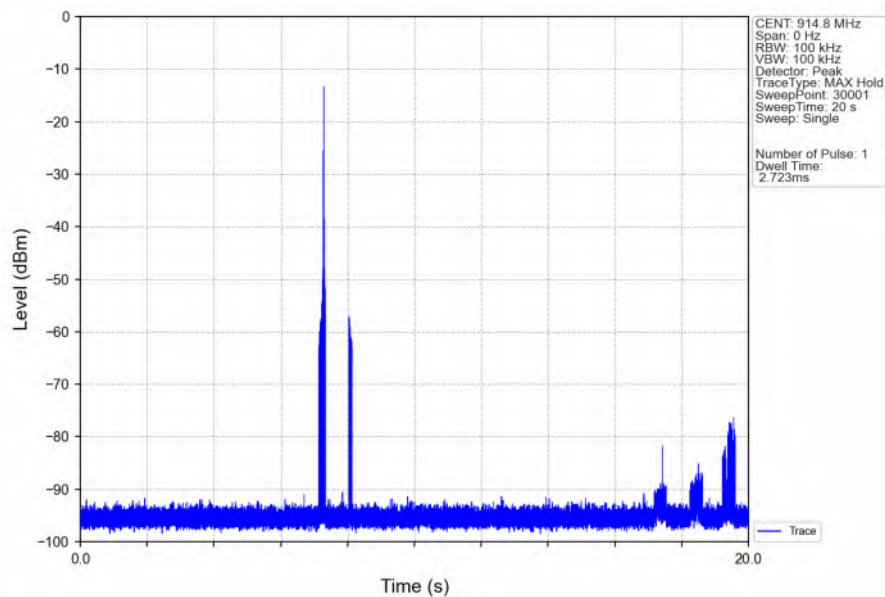

200kHz_HOPP_Ant1_NTNV

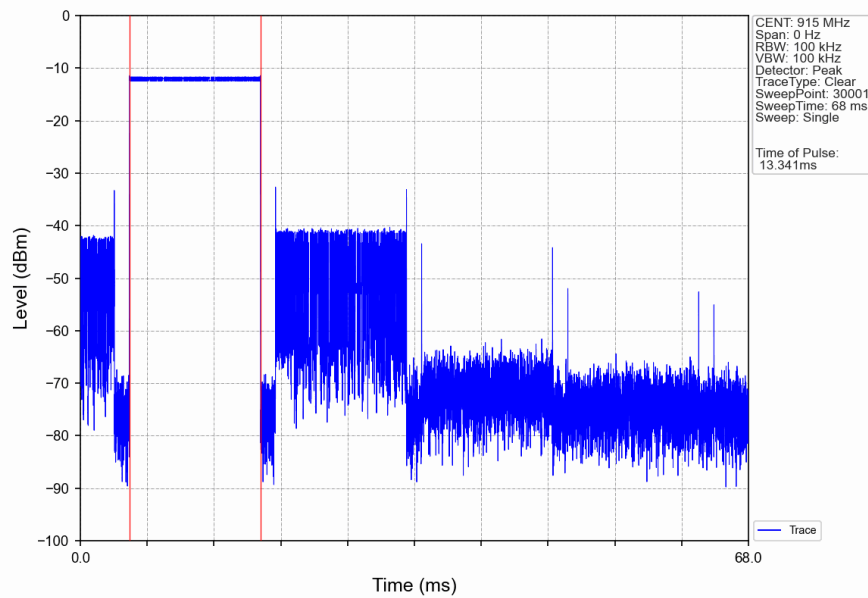

200kHz_HOPP_Ant1_NTNV

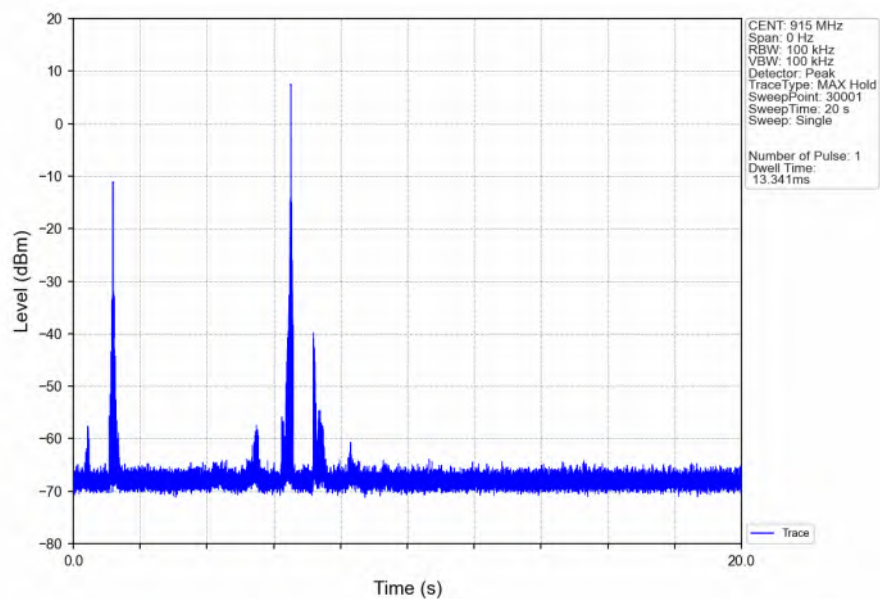

6. Unwanted Emissions In Non-restricted Frequency Bands

6.1 Test Result

6.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
800kHz	SISO	902.8	1	20.02
		914	1	19.99
		926.8	1	20.79
400kHz	SISO	902.4	1	11.96
		914.8	1	11.85
		927.6	1	12.13
200kHz	SISO	902.2	1	11.95
		915	1	11.83
		927.8	1	12.94


6.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
800kHz	SISO	902.8	1	20.79	0.79	Pass
		914	1	20.79	0.79	Pass
		926.8	1	20.79	0.79	Pass
		HOPP	1	20.79	0.79	Pass
				20.79	0.79	Pass
400kHz	SISO	902.4	1	12.13	-7.87	Pass
		914.8	1	12.13	-7.87	Pass
		927.6	1	12.13	-7.87	Pass
		HOPP	1	12.13	-7.87	Pass
				12.13	-7.87	Pass
200kHz	SISO	902.2	1	12.94	-7.06	Pass
		915	1	12.94	-7.06	Pass
		927.8	1	12.94	-7.06	Pass
		HOPP	1	12.94	-7.06	Pass
				12.94	-7.06	Pass


6.2 Test Graph

6.2.1 Ref


800kHz_LCH_902.8MHz_Ant1_NTNV

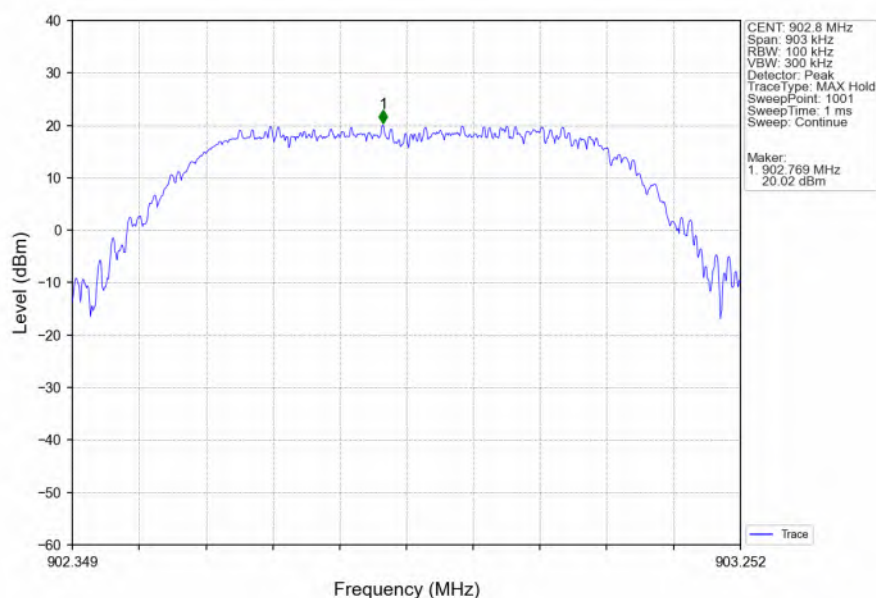


800kHz_MCH_914MHz_Ant1_NTNV

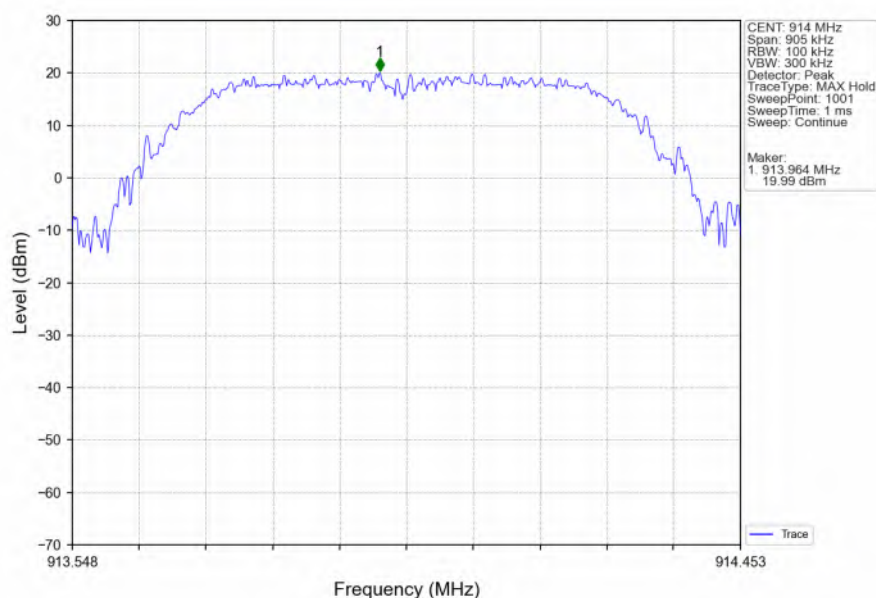


800kHz_HCH_926.8MHz_Ant1_NTNV

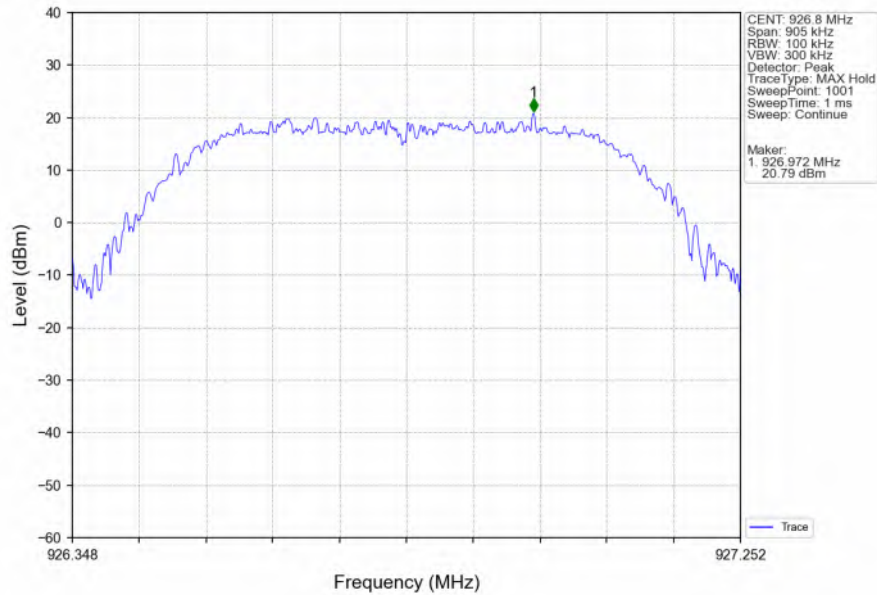


400kHz_LCH_902.4MHz_Ant1_NTNV

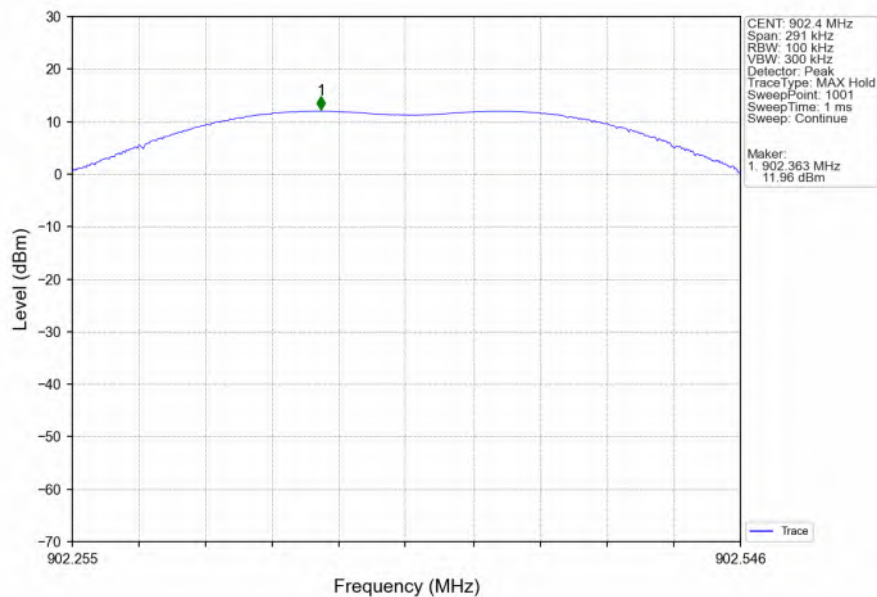


400kHz_MCH_914.8MHz_Ant1_NTNV

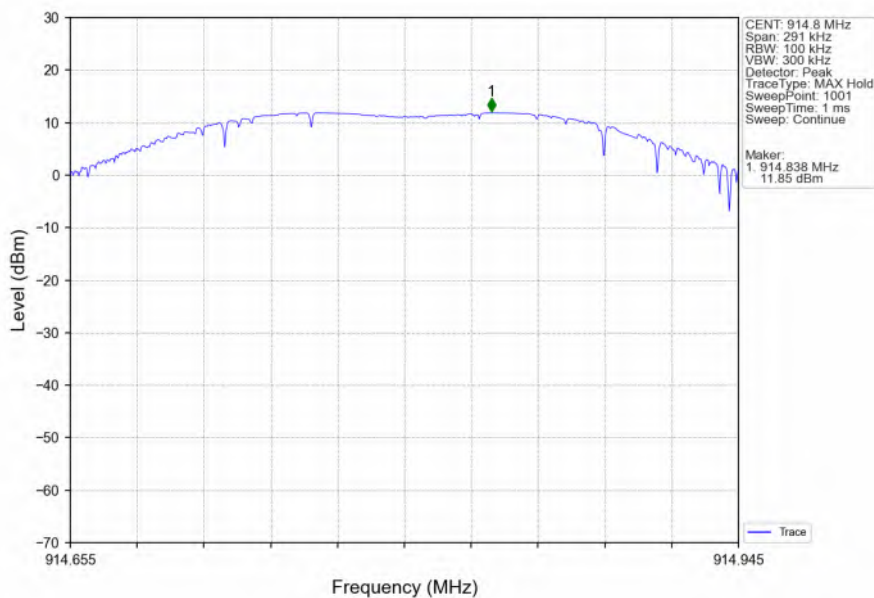


400kHz_HCH_927.6MHz_Ant1_NTNV

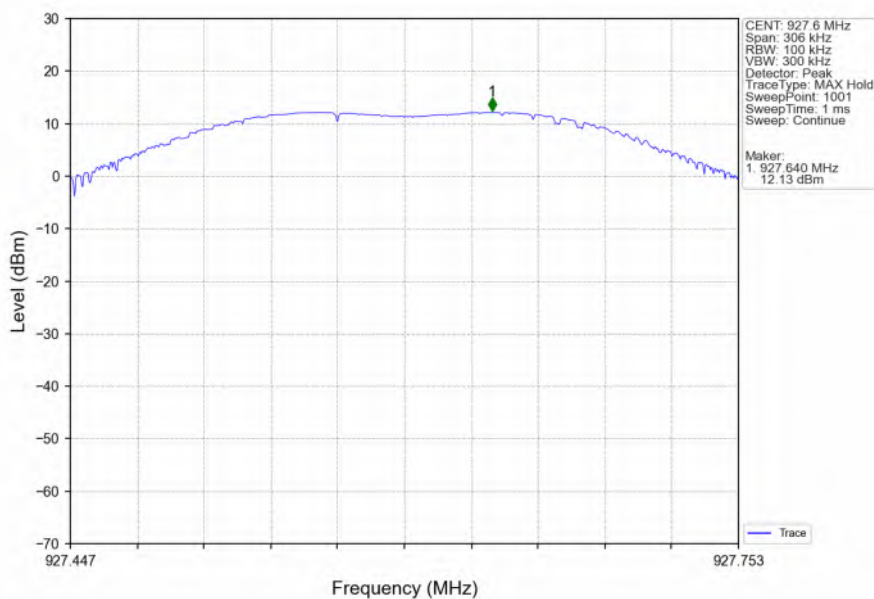


200kHz_LCH_902.2MHz_Ant1_NTNV

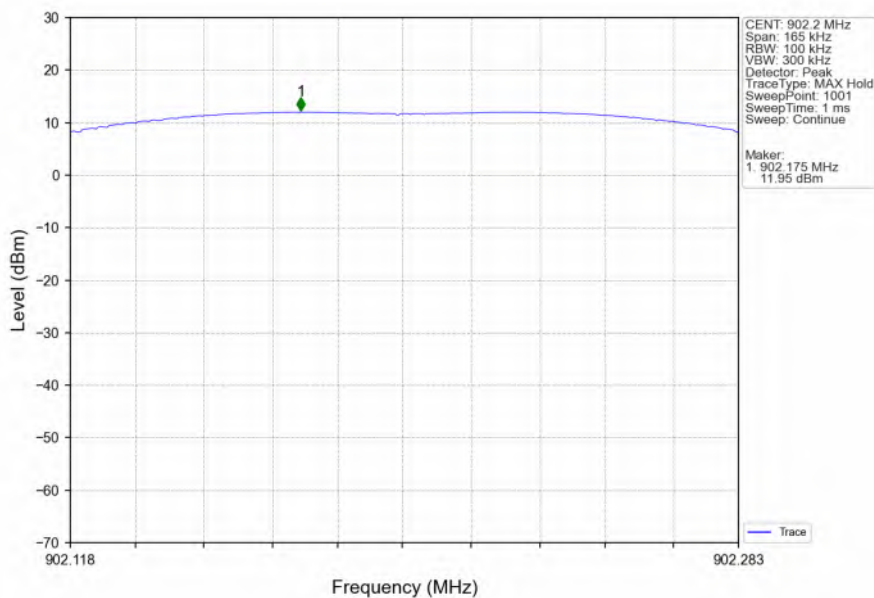

200kHz_MCH_915MHz_Ant1_NTNV

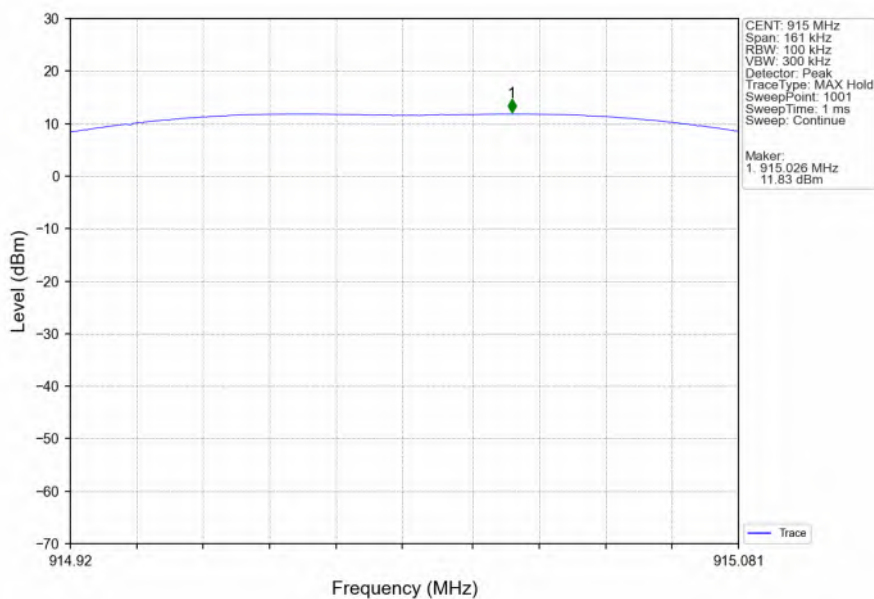


200kHz_HCH_927.8MHz_Ant1_NTNV

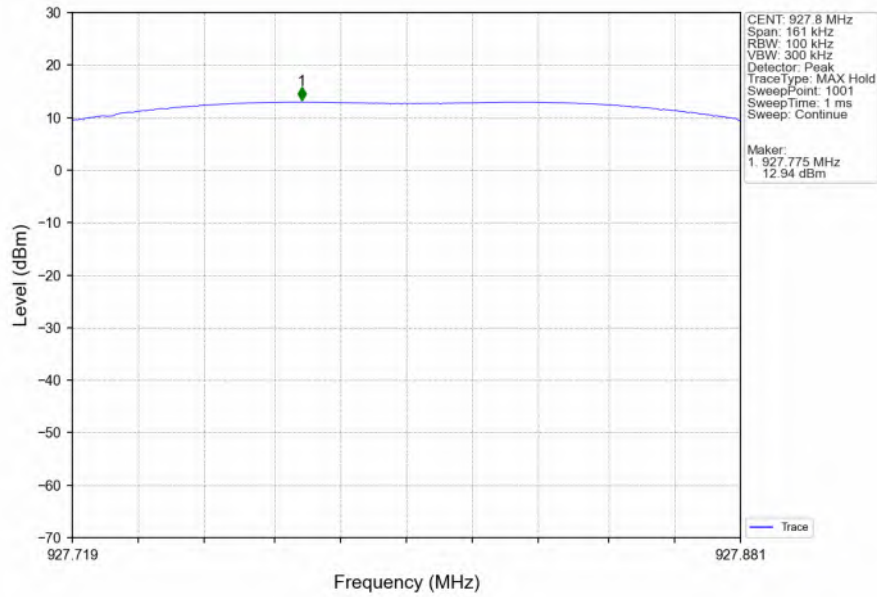


6.2.2 CSE


800kHz_LCH_902.8MHz_Ant1_NTNV

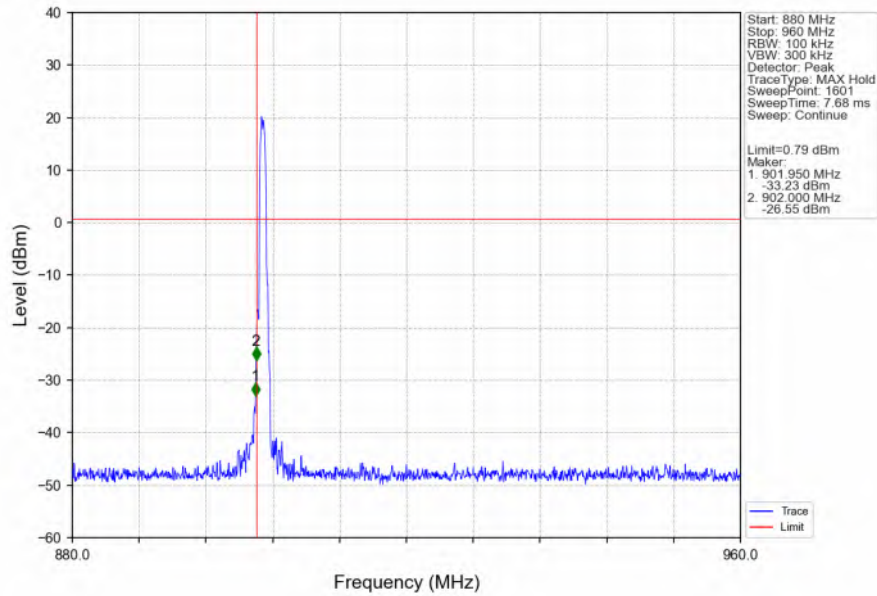


800kHz_LCH_902.8MHz_Ant1_NTNV

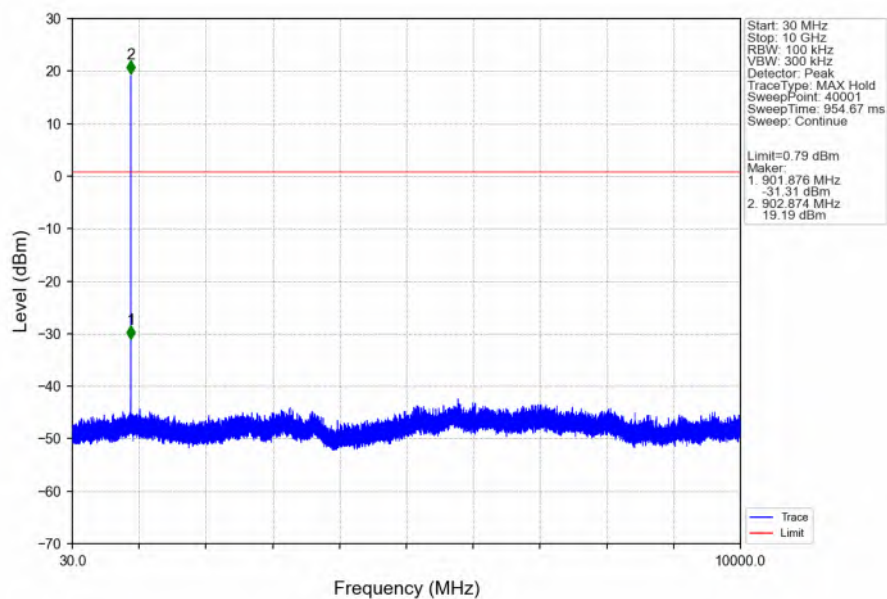


800kHz_MCH_914MHz_Ant1_NTNV

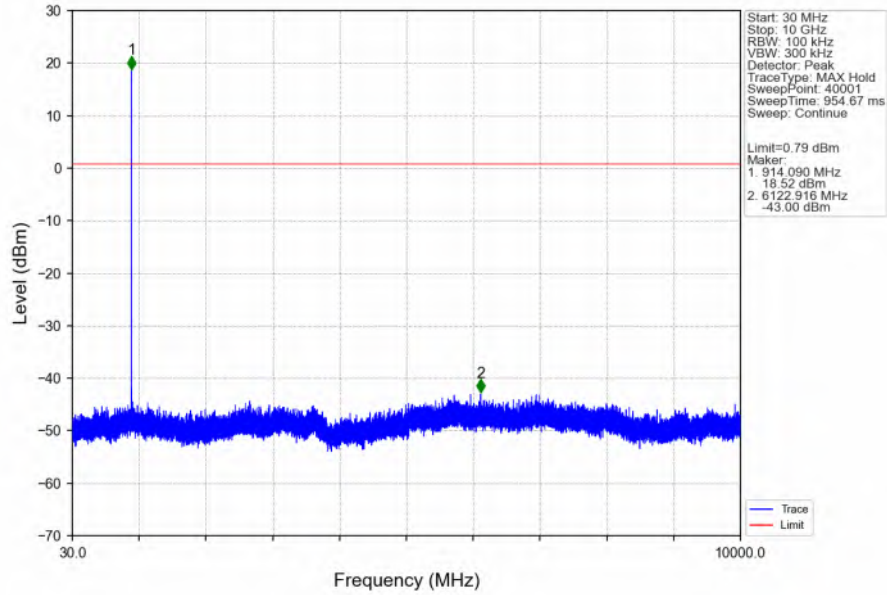


800kHz_HCH_926.8MHz_Ant1_NTNV

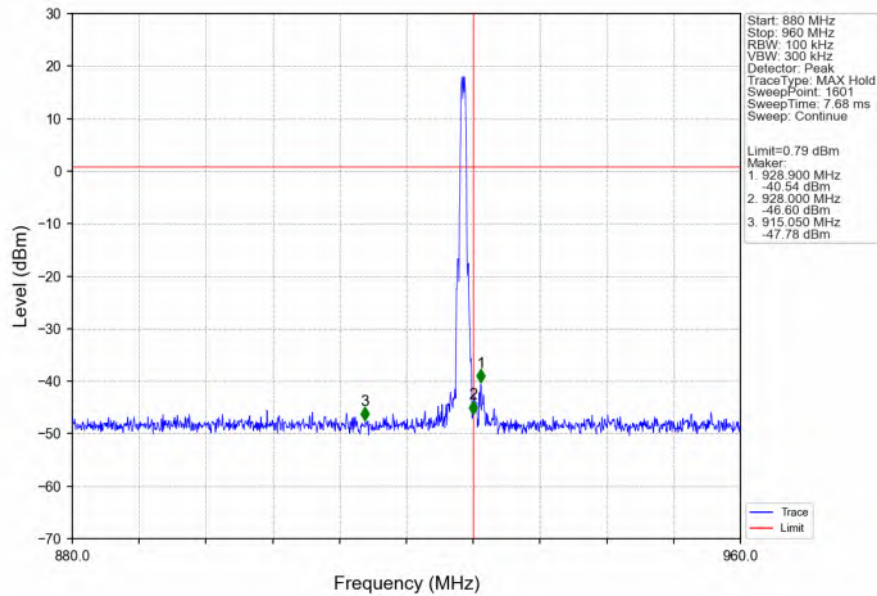


800kHz_HCH_926.8MHz_Ant1_NTNV

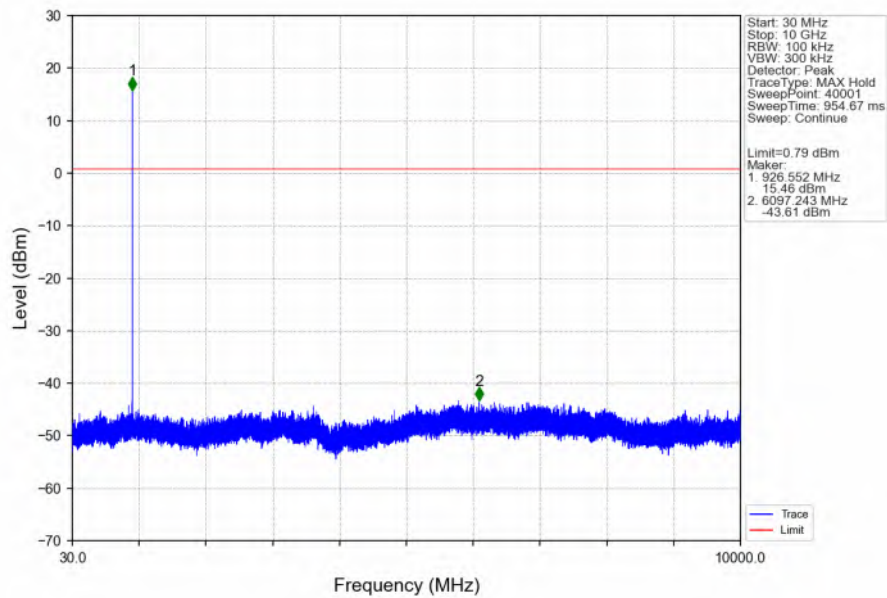


800kHz_HOPP_Ant1_NTNV

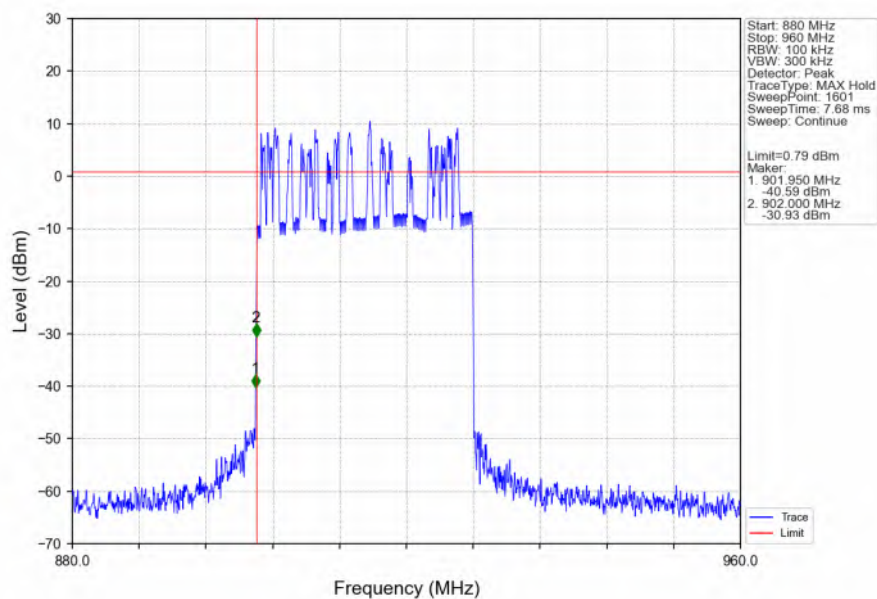


800kHz_HOPP_Ant1_NTNV

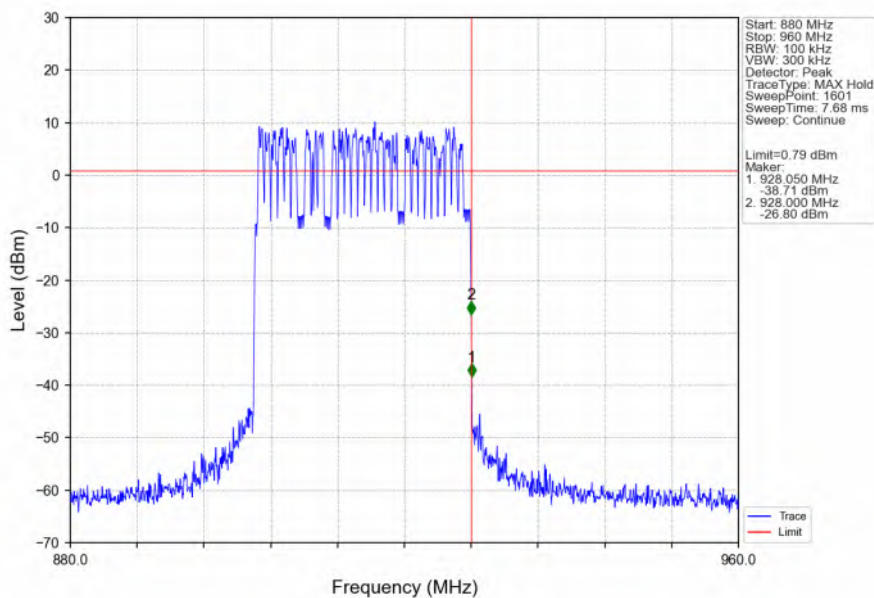


400kHz_LCH_902.4MHz_Ant1_NTNV

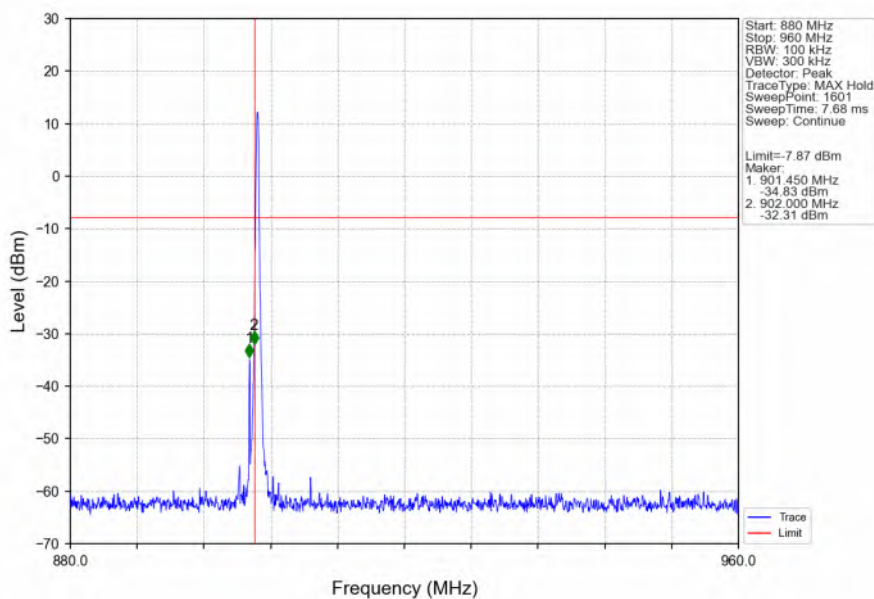


400kHz_LCH_902.4MHz_Ant1_NTNV

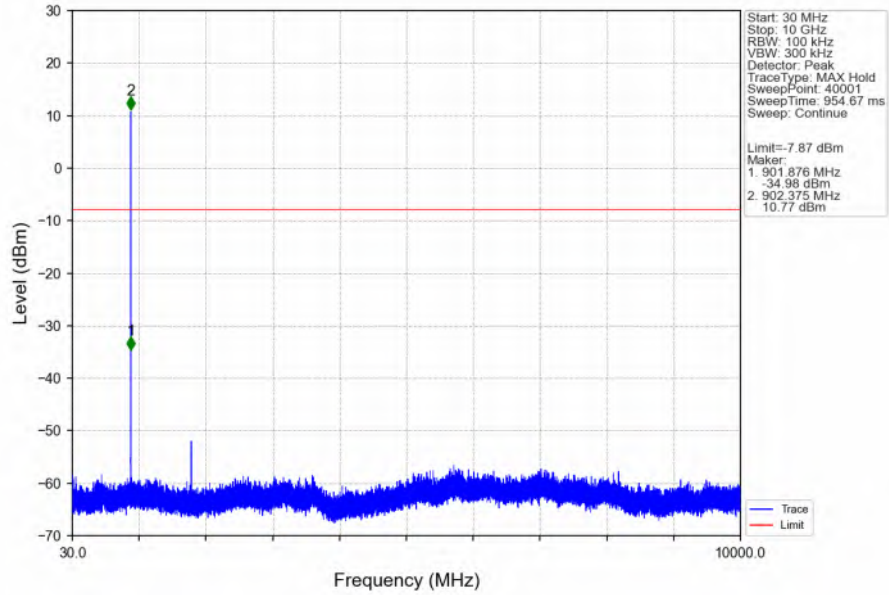


400kHz_MCH_914.8MHz_Ant1_NTNV

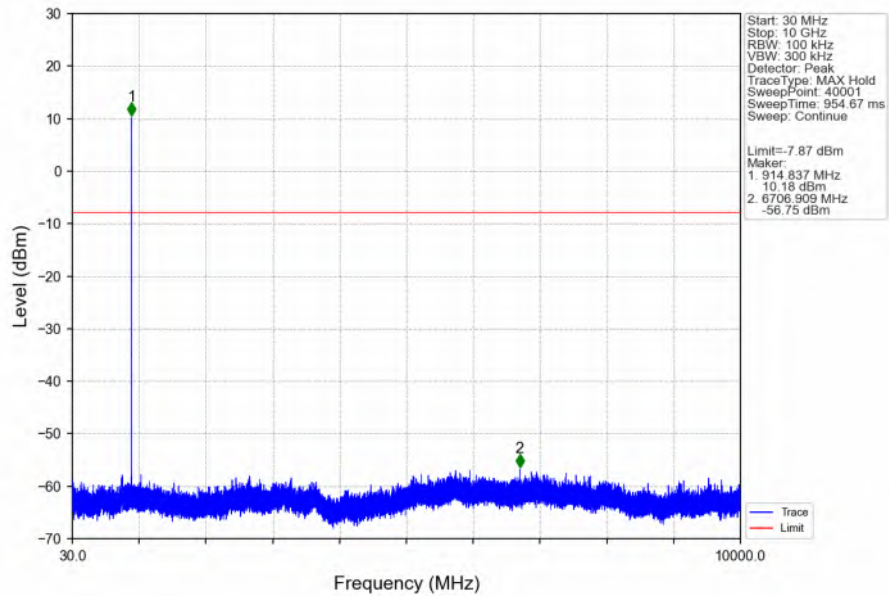


400kHz_HCH_927.6MHz_Ant1_NTNV

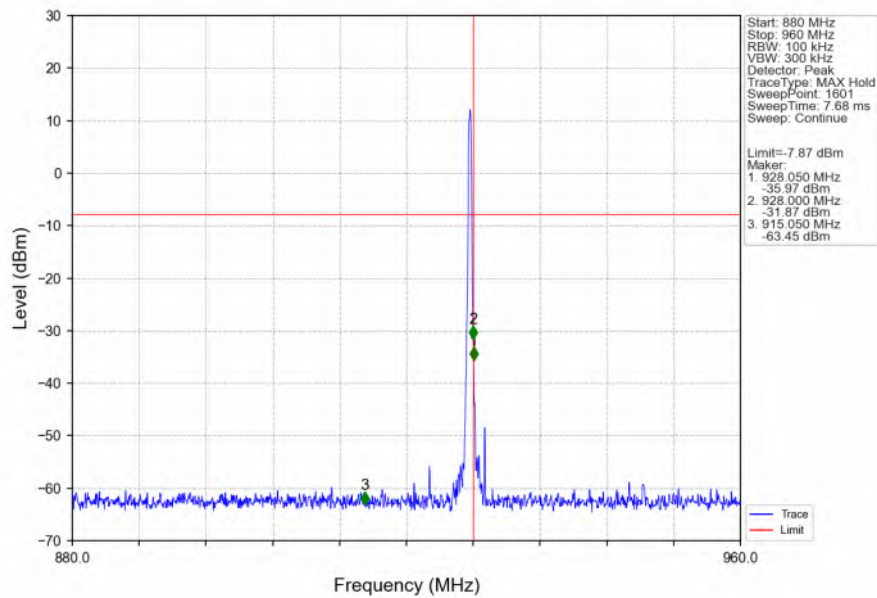


400kHz_HCH_927.6MHz_Ant1_NTNV

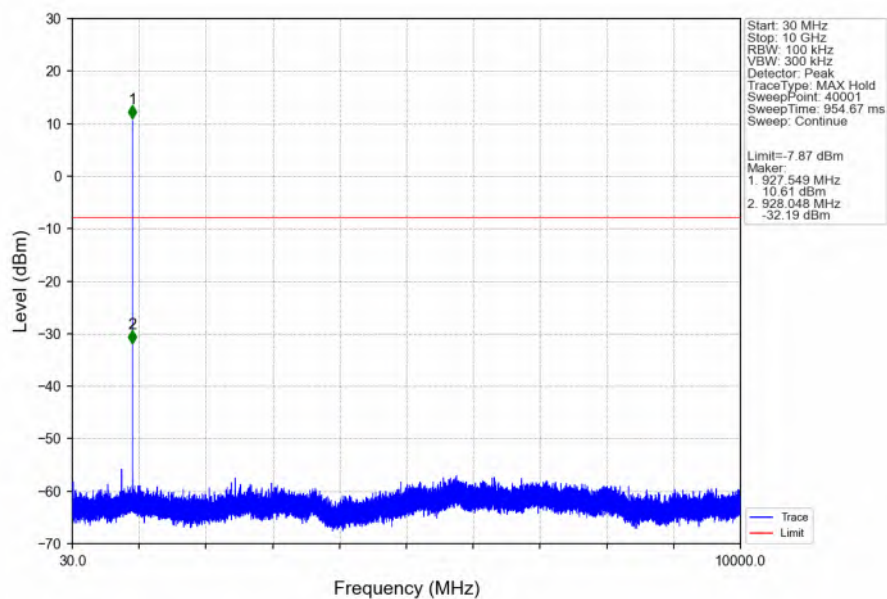


400kHz_HOPP_Ant1_NTNV

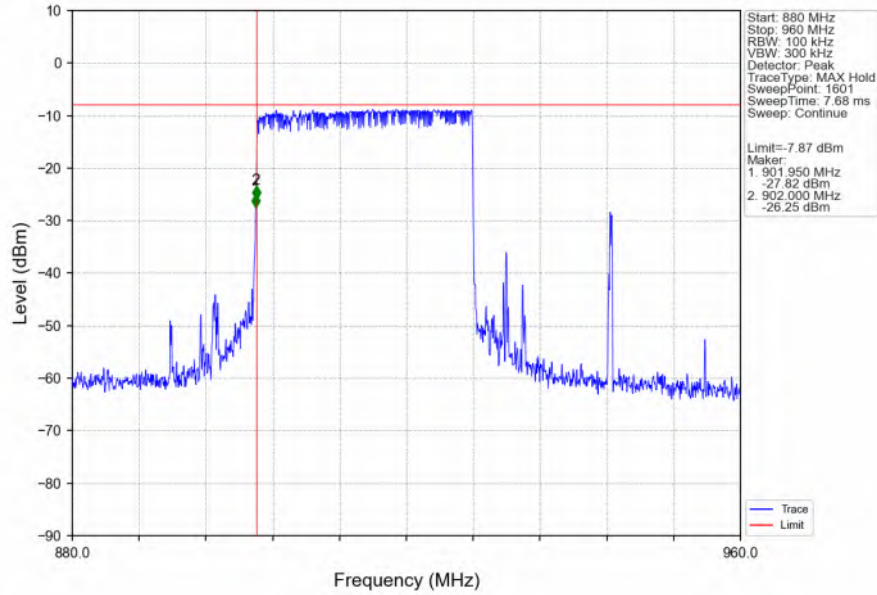


400kHz_HOPP_Ant1_NTNV

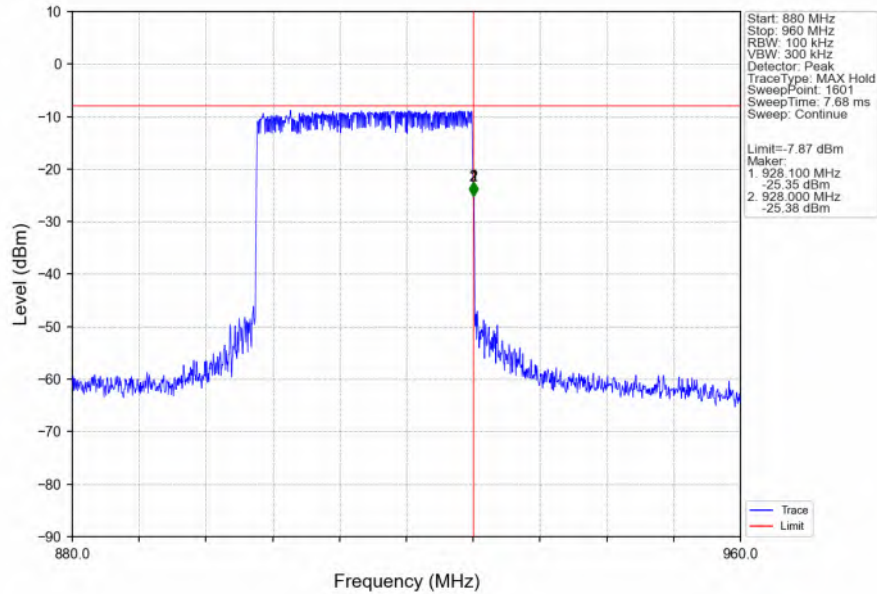


200kHz_LCH_902.2MHz_Ant1_NTNV

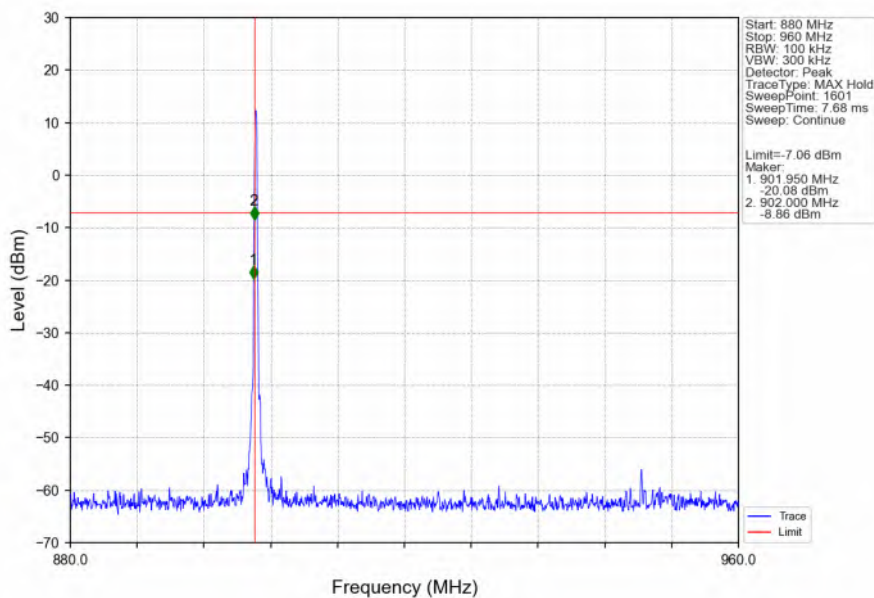


200kHz_LCH_902.2MHz_Ant1_NTNV

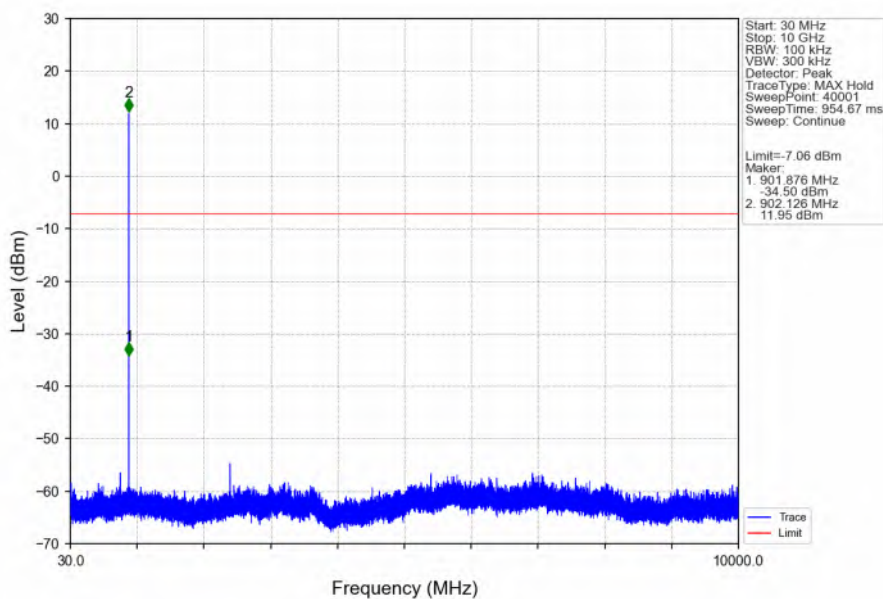


200kHz_MCH_915MHz_Ant1_NTNV

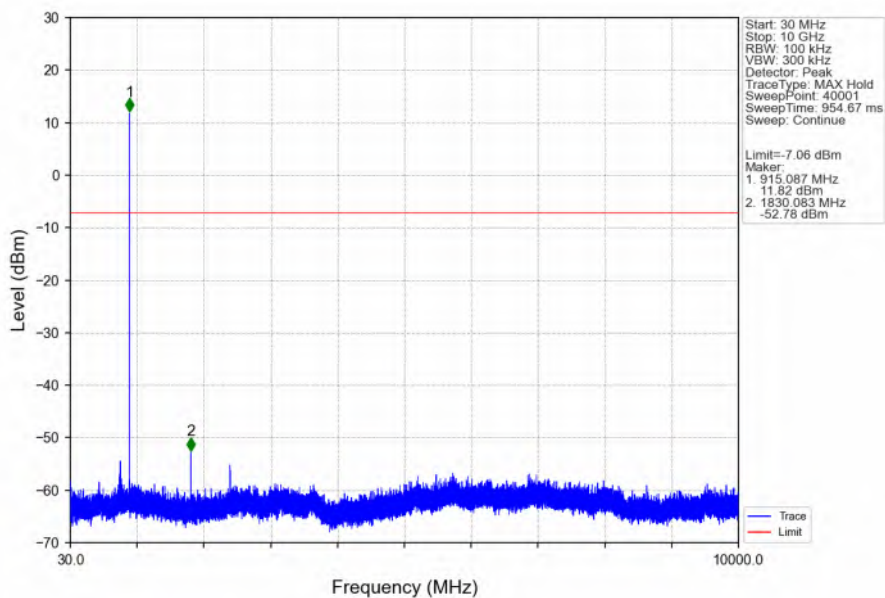


200kHz_HCH_927.8MHz_Ant1_NTNV

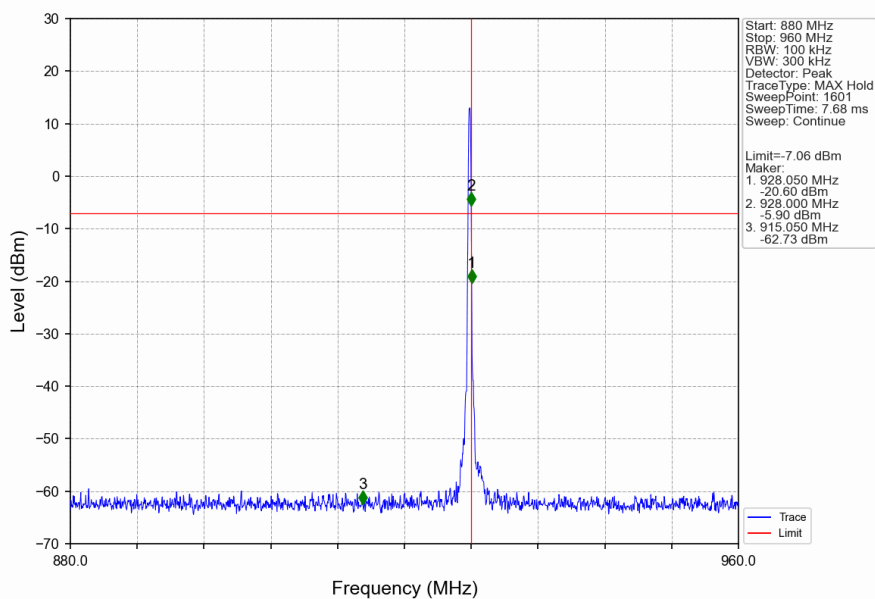


200kHz_HCH_927.8MHz_Ant1_NTNV

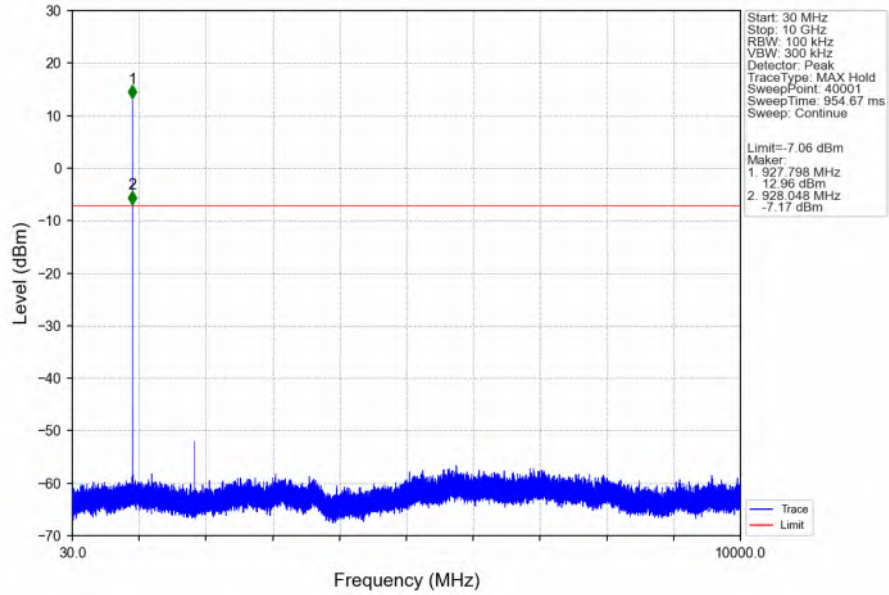

200kHz_HOPP_Ant1_NTNV

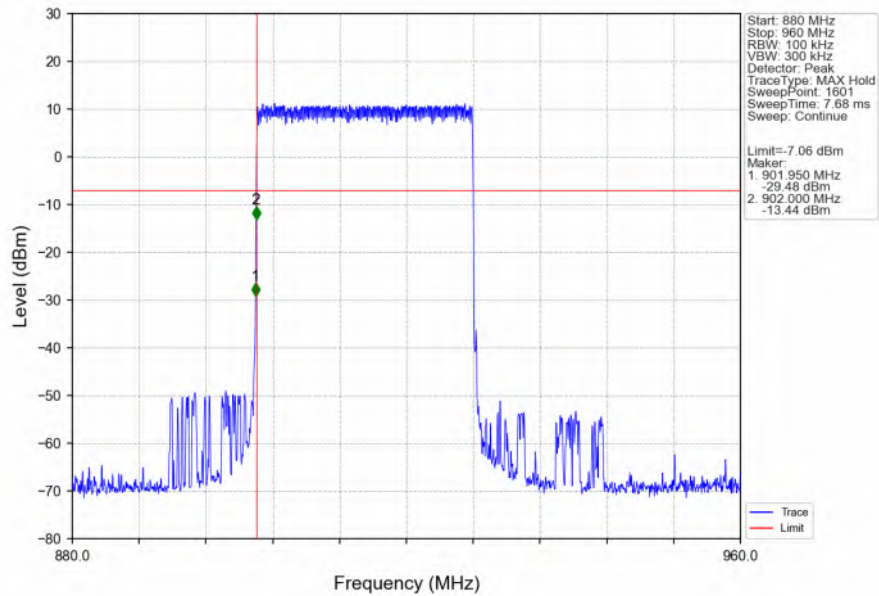

200kHz_HOPP_Ant1_NTNV

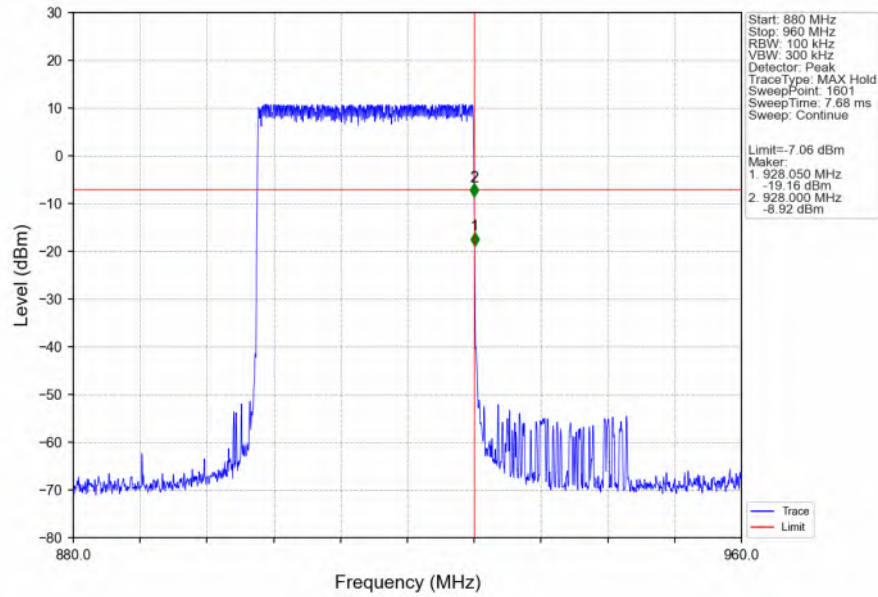

FSK

1. Bandwidth

1.1 Test Result

1.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
400kHz	SISO	902.4	1	0.194	/	Pass
		914.8	1	0.194	/	Pass
		927.6	1	0.199	/	Pass
200kHz	SISO	902.2	1	0.111	/	Pass
		915	1	0.111	/	Pass
		927.8	1	0.111	/	Pass


1.1.2 20dB BW

Mode	TX Type	Frequency (MHz)	ANT	20dB Bandwidth (MHz)		Verdict
				Result	Limit	
400kHz	SISO	902.4	1	0.248	/	Pass
		914.8	1	0.201	/	Pass
		927.6	1	0.200	/	Pass
200kHz	SISO	902.2	1	0.104	/	Pass
		915	1	0.104	/	Pass
		927.8	1	0.103	/	Pass


1.2 Test Graph

1.2.1 OBW


400kHz_LCH_902.4MHz_Ant1_NTNV

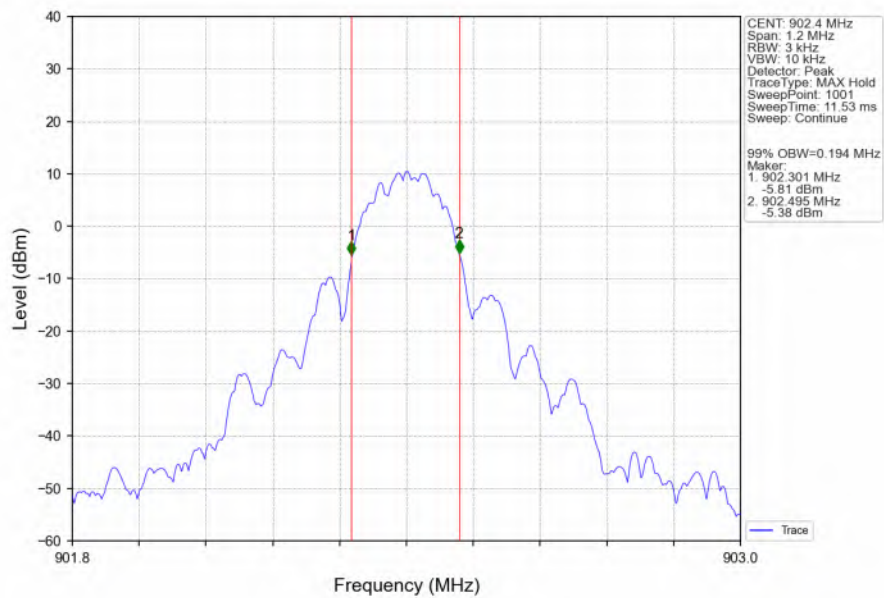


400kHz_MCH_914.8MHz_Ant1_NTNV

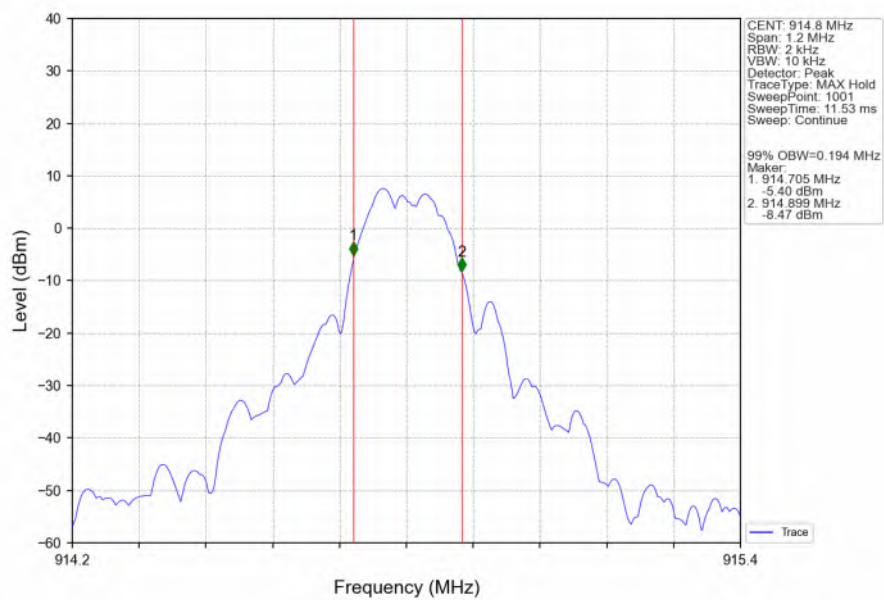


400kHz_HCH_927.6MHz_Ant1_NTNV

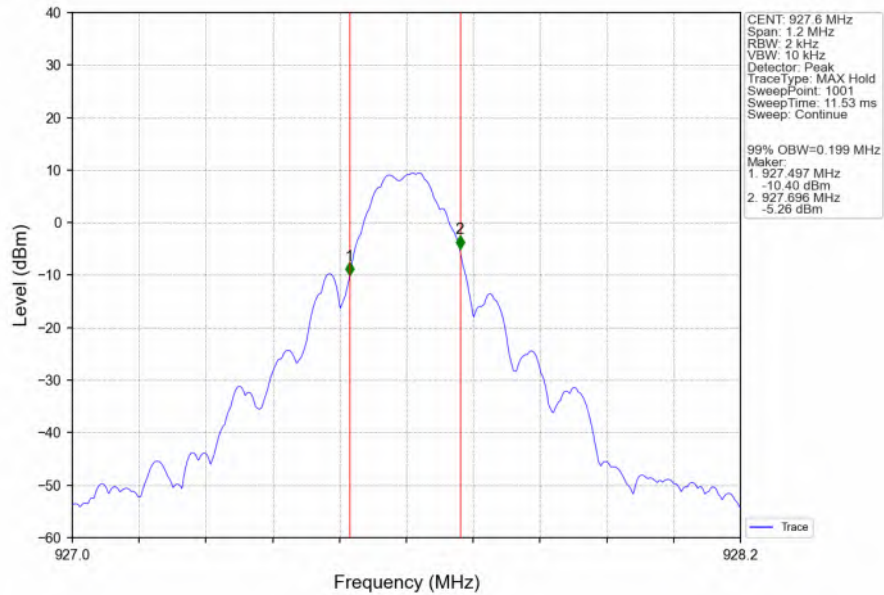


200kHz_LCH_902.2MHz_Ant1_NTNV

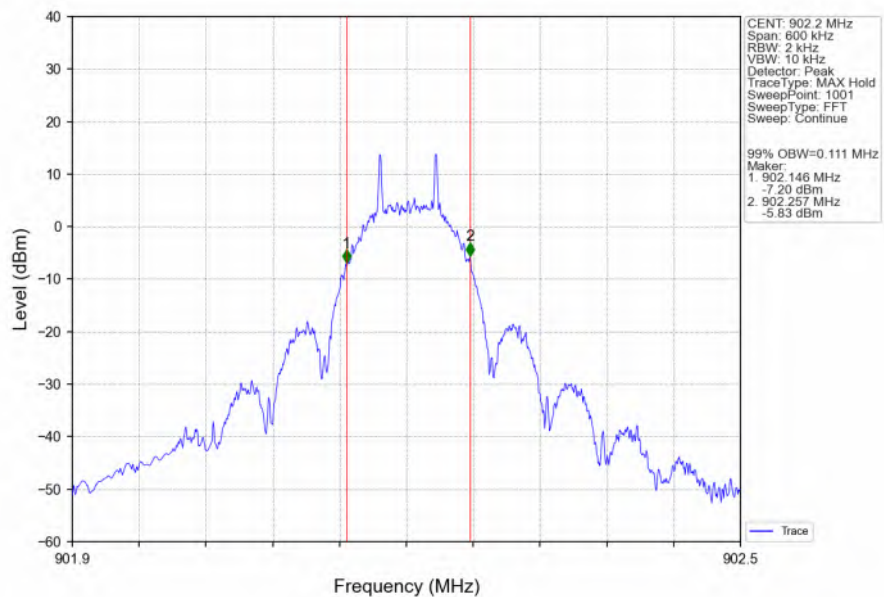

200kHz_MCH_915MHz_Ant1_NTNV

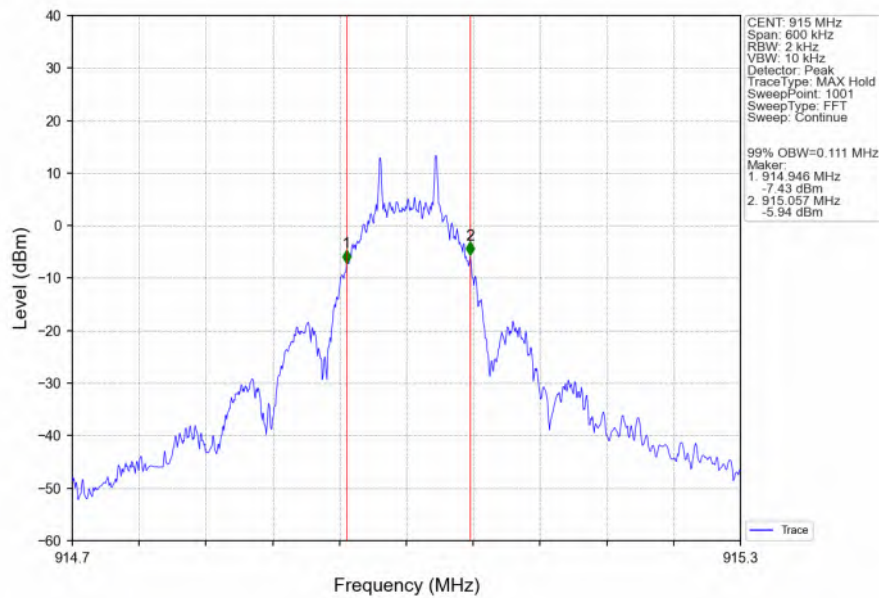


200kHz_HCH_927.8MHz_Ant1_NTNV

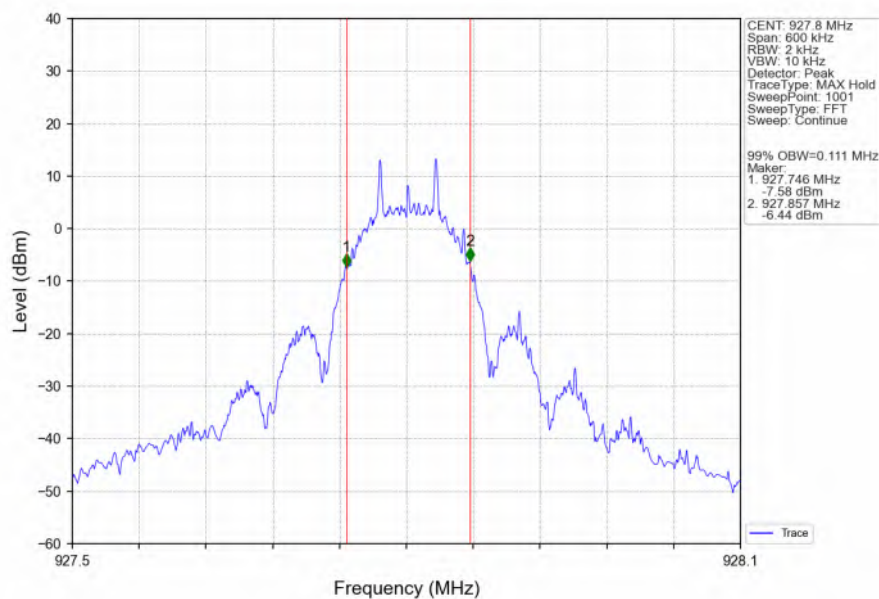


1.2.2 20dB BW


400kHz_LCH_902.4MHz_Ant1_NTNV

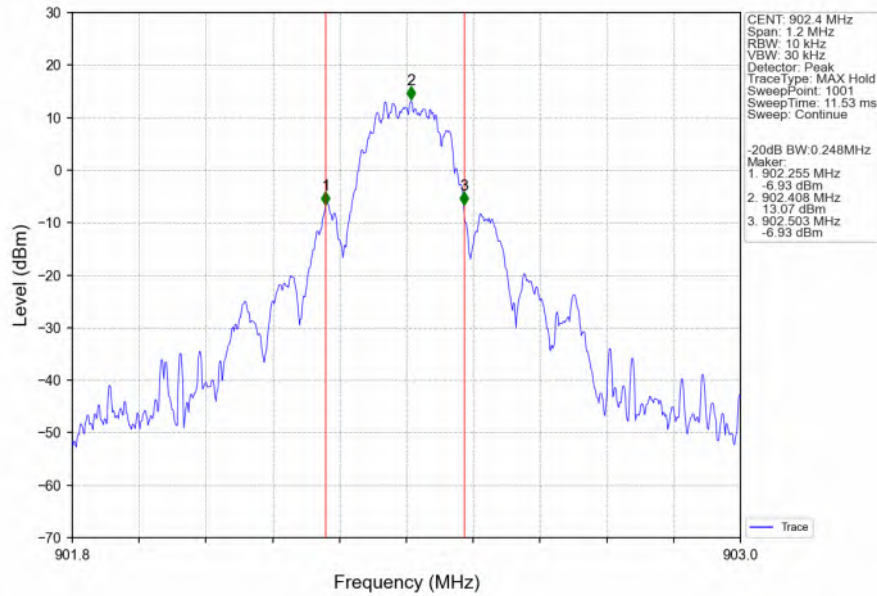


400kHz_MCH_914.8MHz_Ant1_NTNV

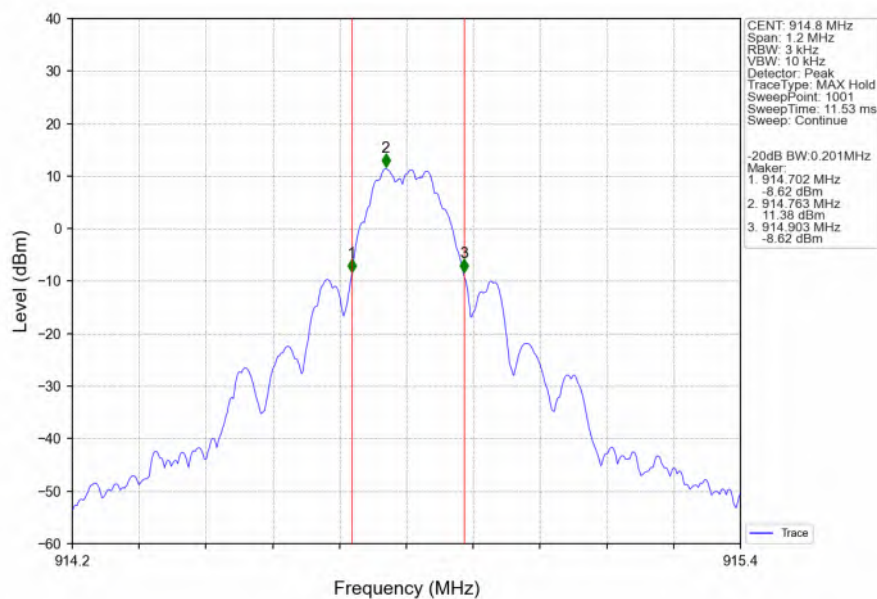


400kHz_HCH_927.6MHz_Ant1_NTNV

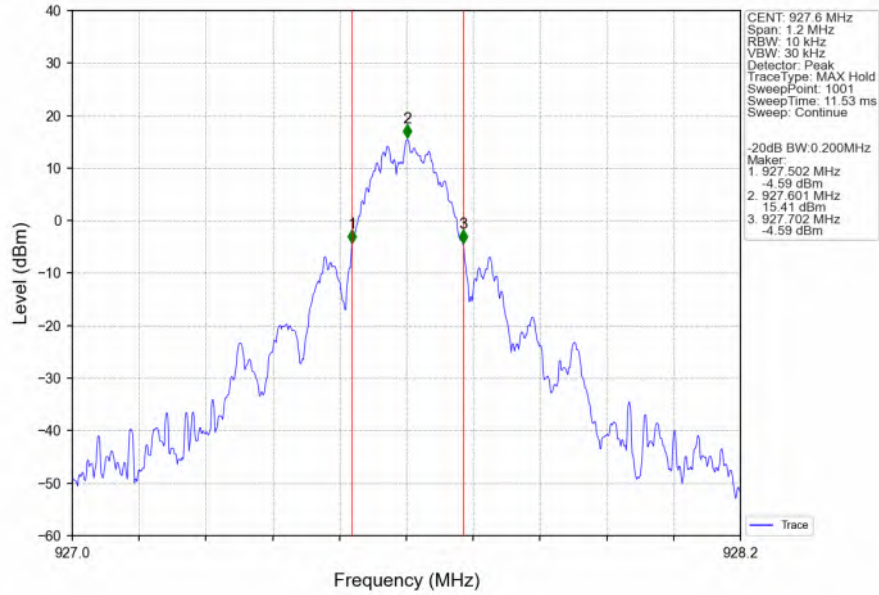


200kHz_LCH_902.2MHz_Ant1_NTNV

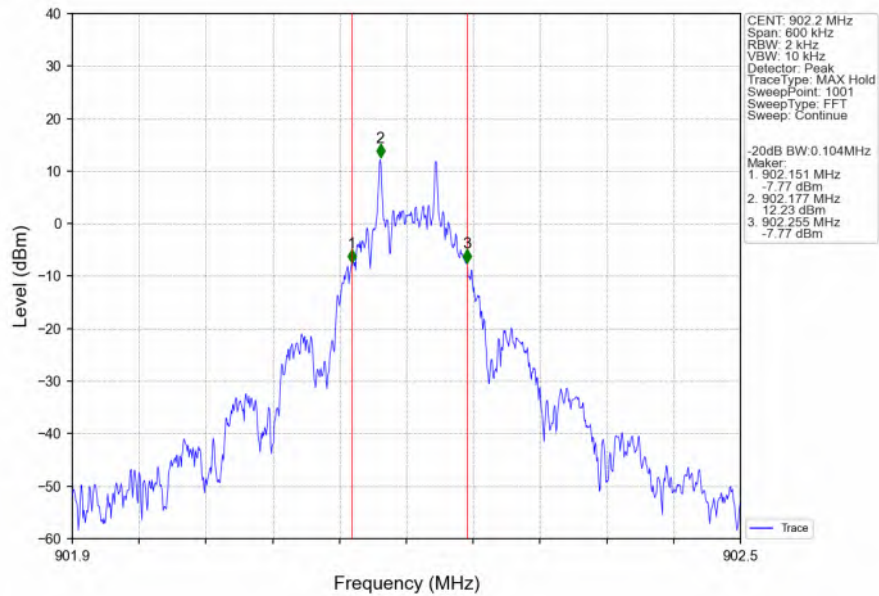

200kHz_MCH_915MHz_Ant1_NTNV

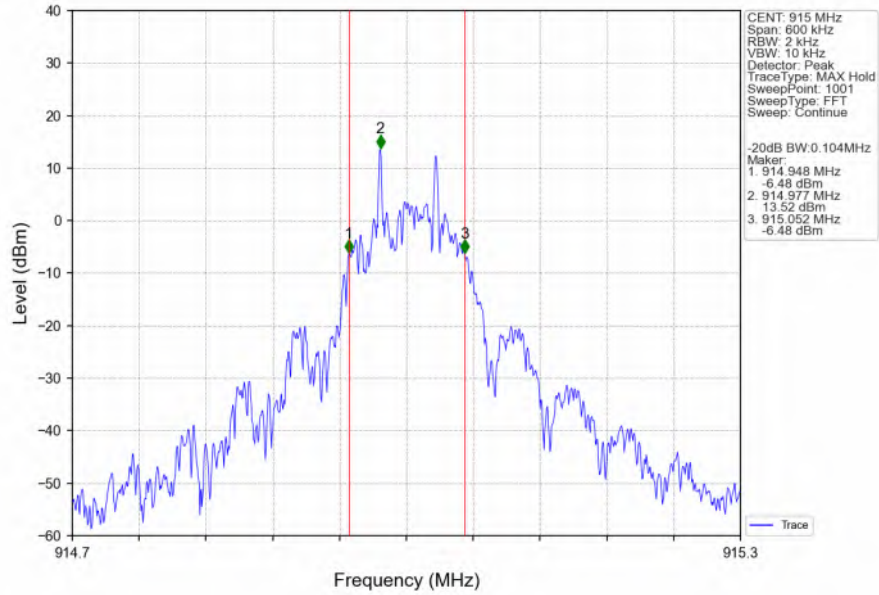

200kHz_HCH_927.8MHz_Ant1_NTNV

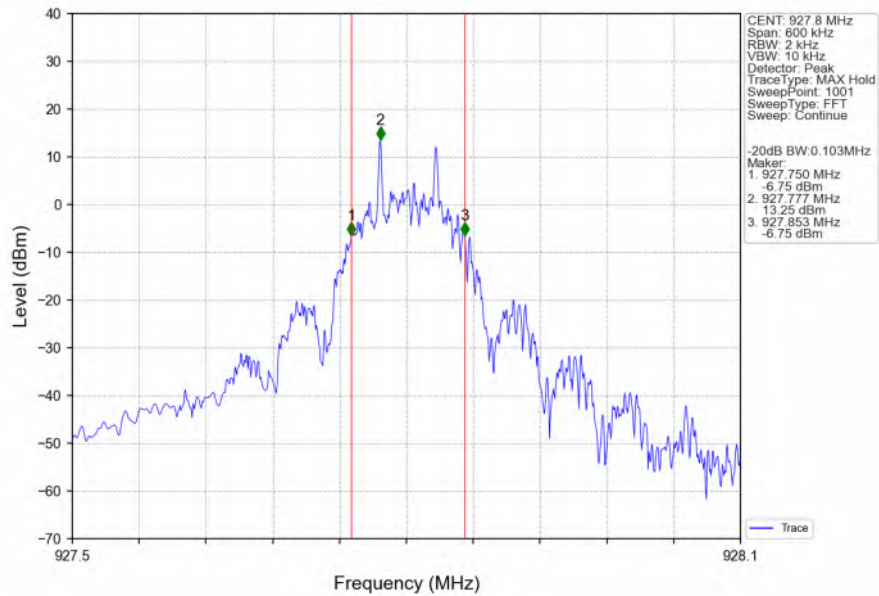



Report No.: SUCR260300021902

Page: 144 of 164

2. Maximum Conducted Output Power

2.1 Test Result


2.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
400kHz	SISO	902.4	16.54	<=30	Pass
		914.8	16.57	<=30	Pass
		927.6	16.55	<=30	Pass
200kHz	SISO	902.2	15.94	<=30	Pass
		915	15.84	<=30	Pass
		927.8	15.59	<=30	Pass
Note1: Antenna Gain: Ant1: 1.10dBi;					


2.2 Test Graph

2.2.1 Power


400kHz_LCH_902.4MHz_Ant1_NTNV

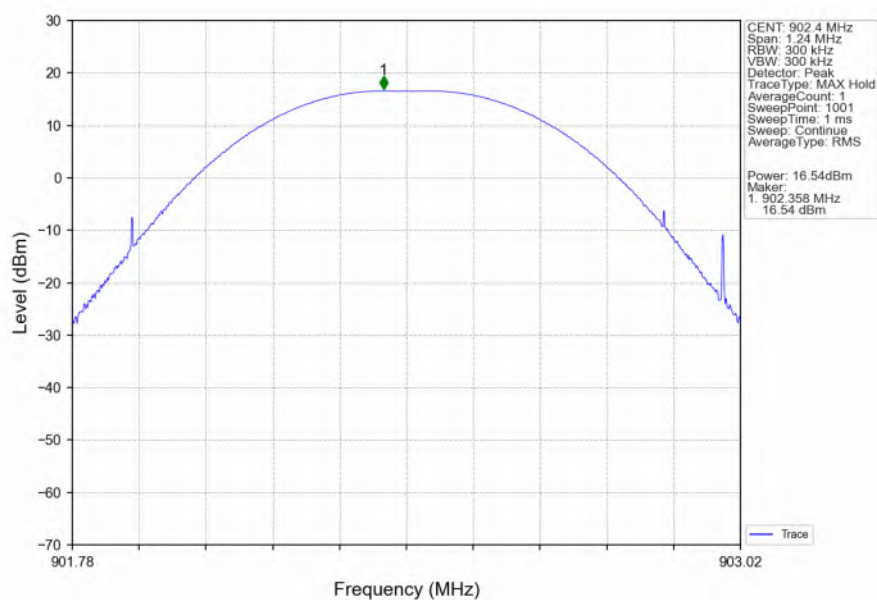


400kHz_MCH_914.8MHz_Ant1_NTNV

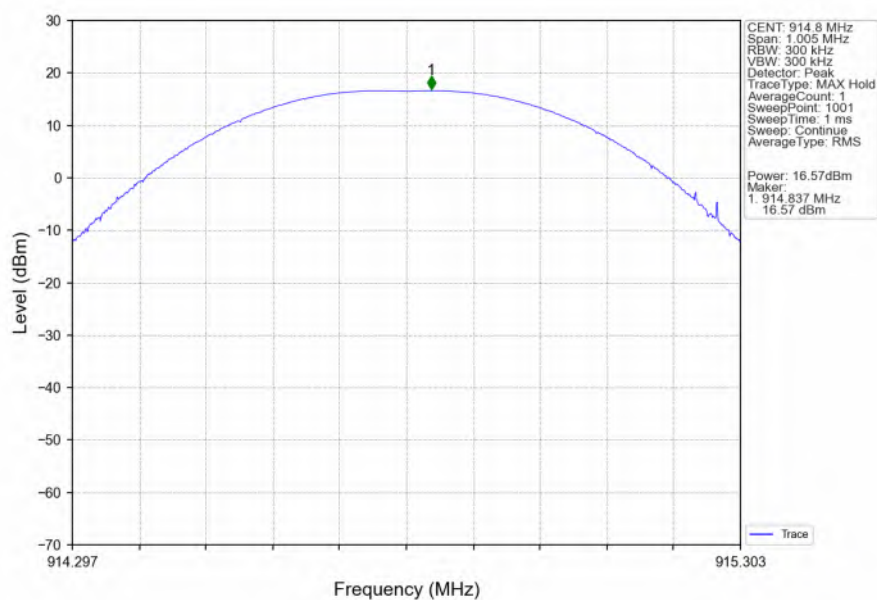


400kHz_HCH_927.6MHz_Ant1_NTNV

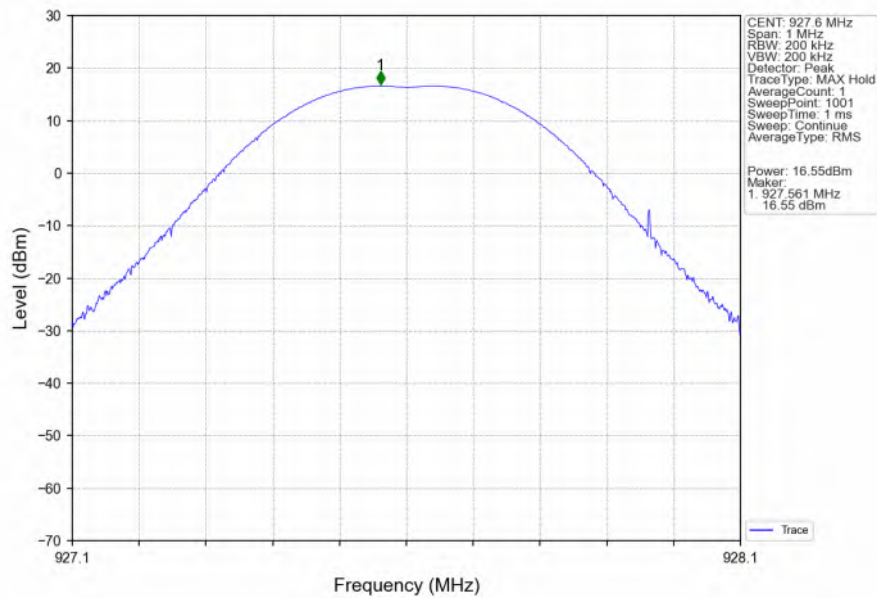


200kHz_LCH_902.2MHz_Ant1_NTNV

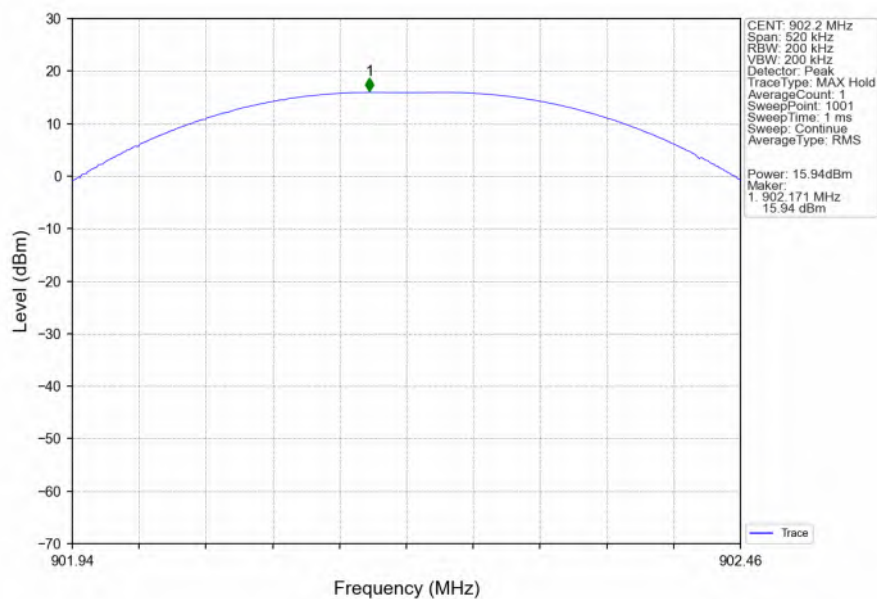

200kHz_MCH_915MHz_Ant1_NTNV

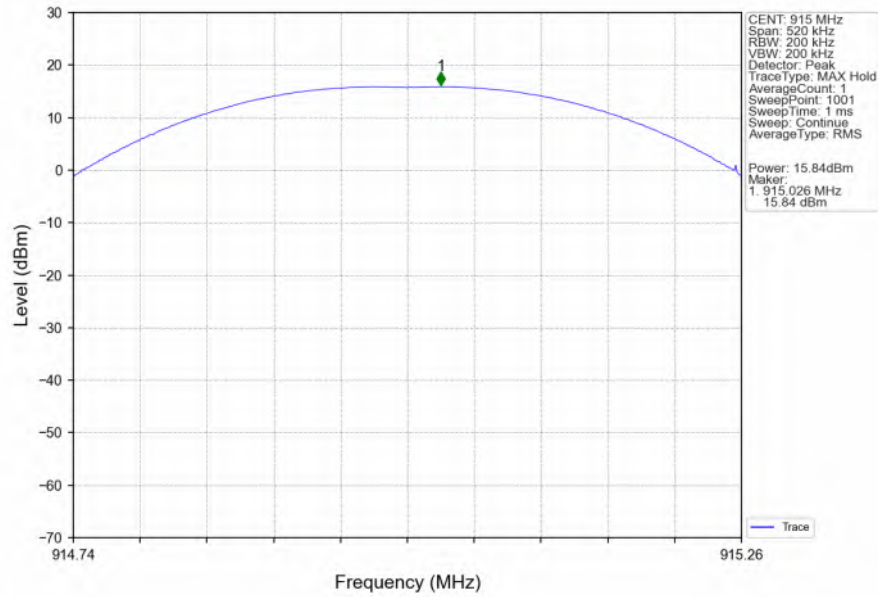

200kHz_HCH_927.8MHz_Ant1_NTNV

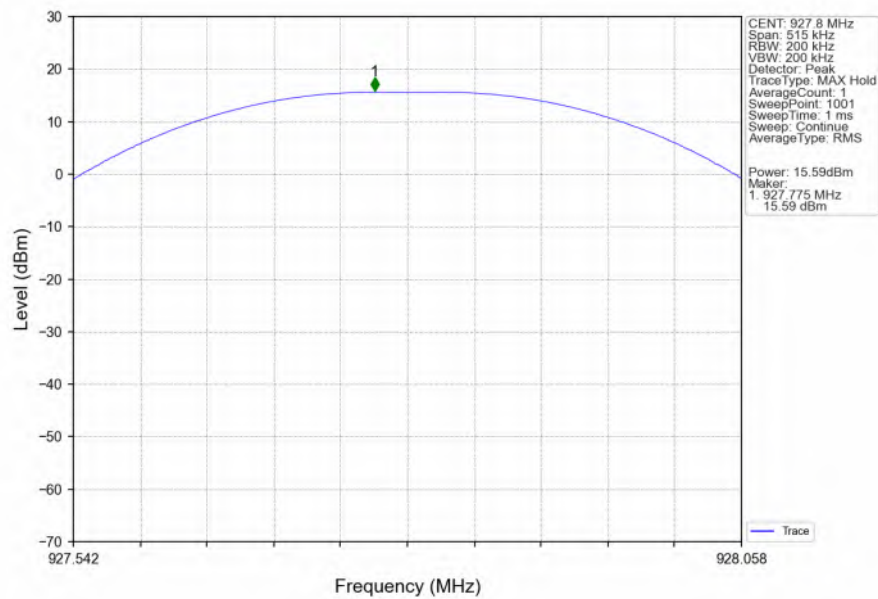



Report No.: SUCR260300021902

Page: 148 of 164

3. Carrier Frequency Separation


3.1 Test Result

3.1.1 Ant1

Ant1						
Mode	TX Type	Frequency (MHz)	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
400kHz	SISO	HOPP	0.346	0.248	≥ 0.248	Pass
200kHz	SISO	HOPP	0.202	0.104	≥ 0.104	Pass

3.2 Test Graph

3.2.1 Ant1

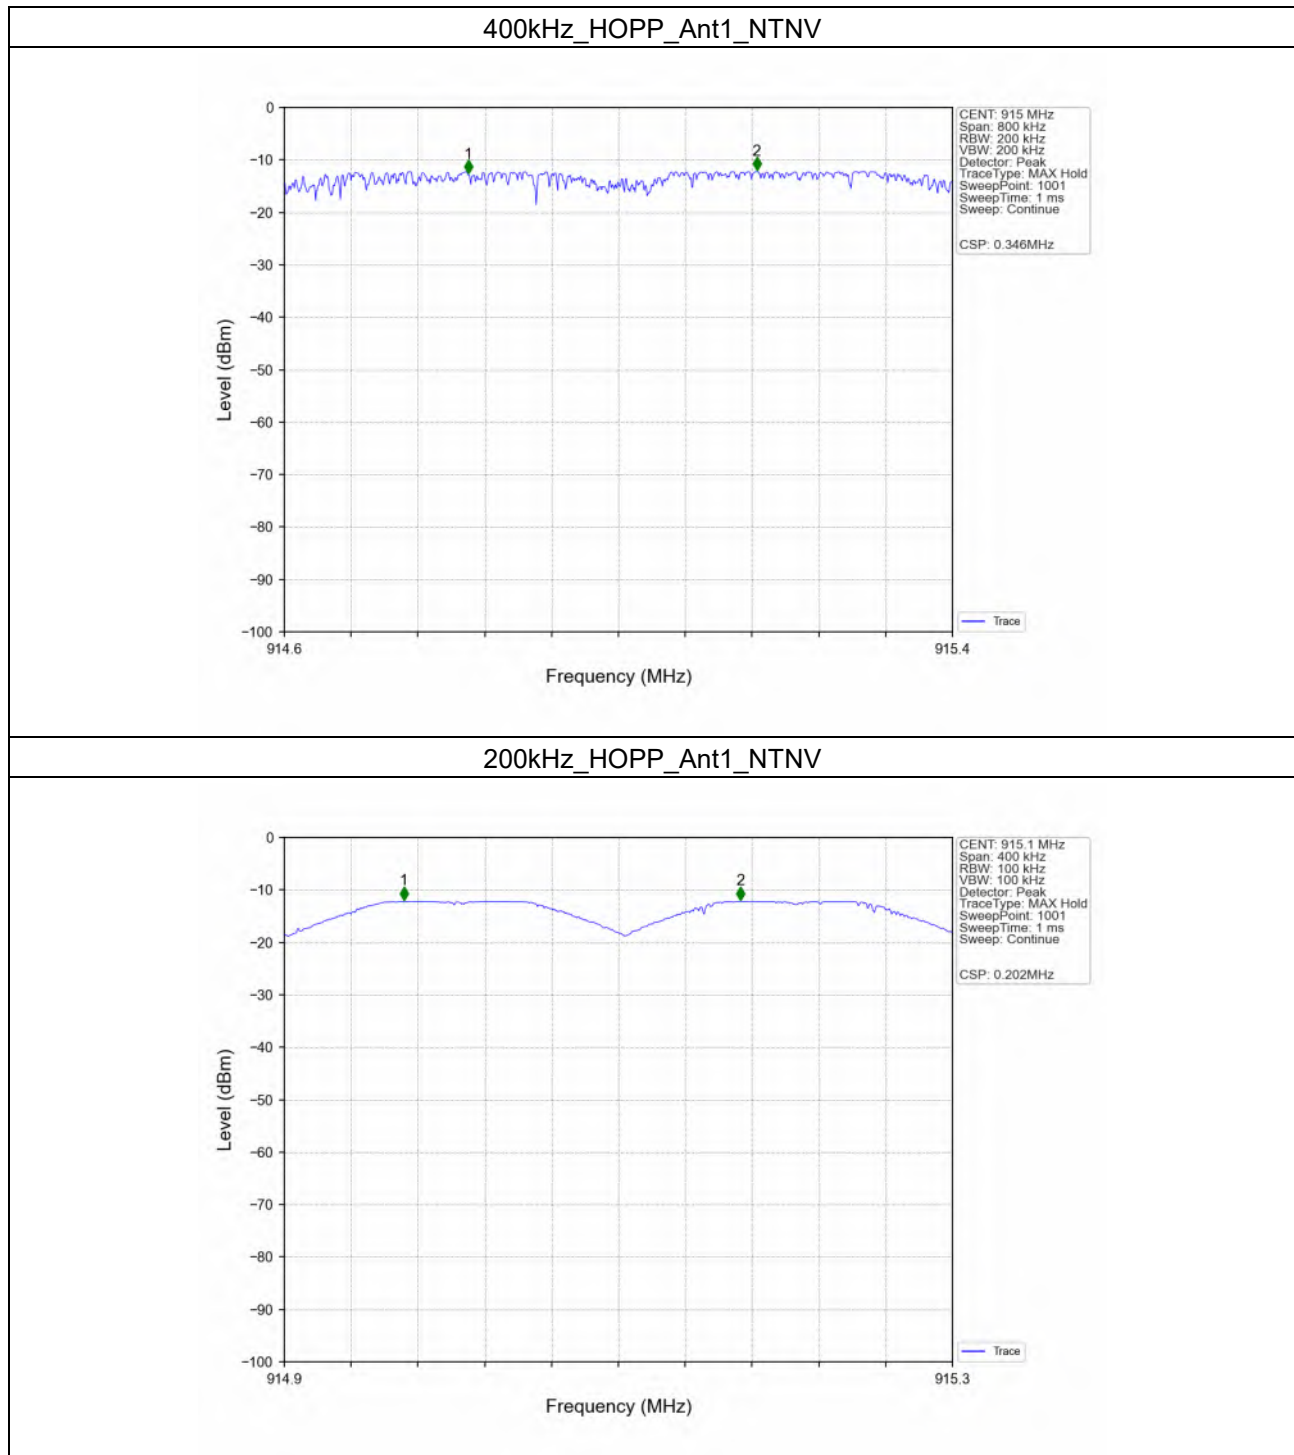



4. Number of Hopping Frequencies


4.1 Test Result

4.1.1 HoppNum

Mode	TX Type	Frequency (MHz)	Num of Hopping Frequencies		Verdict
			ANT1	Limit	
400kHz	SISO	HOPP	64	>=50	Pass
200kHz	SISO	HOPP	129	>=50	Pass

4.2 Test Graph

4.2.1 HoppNum

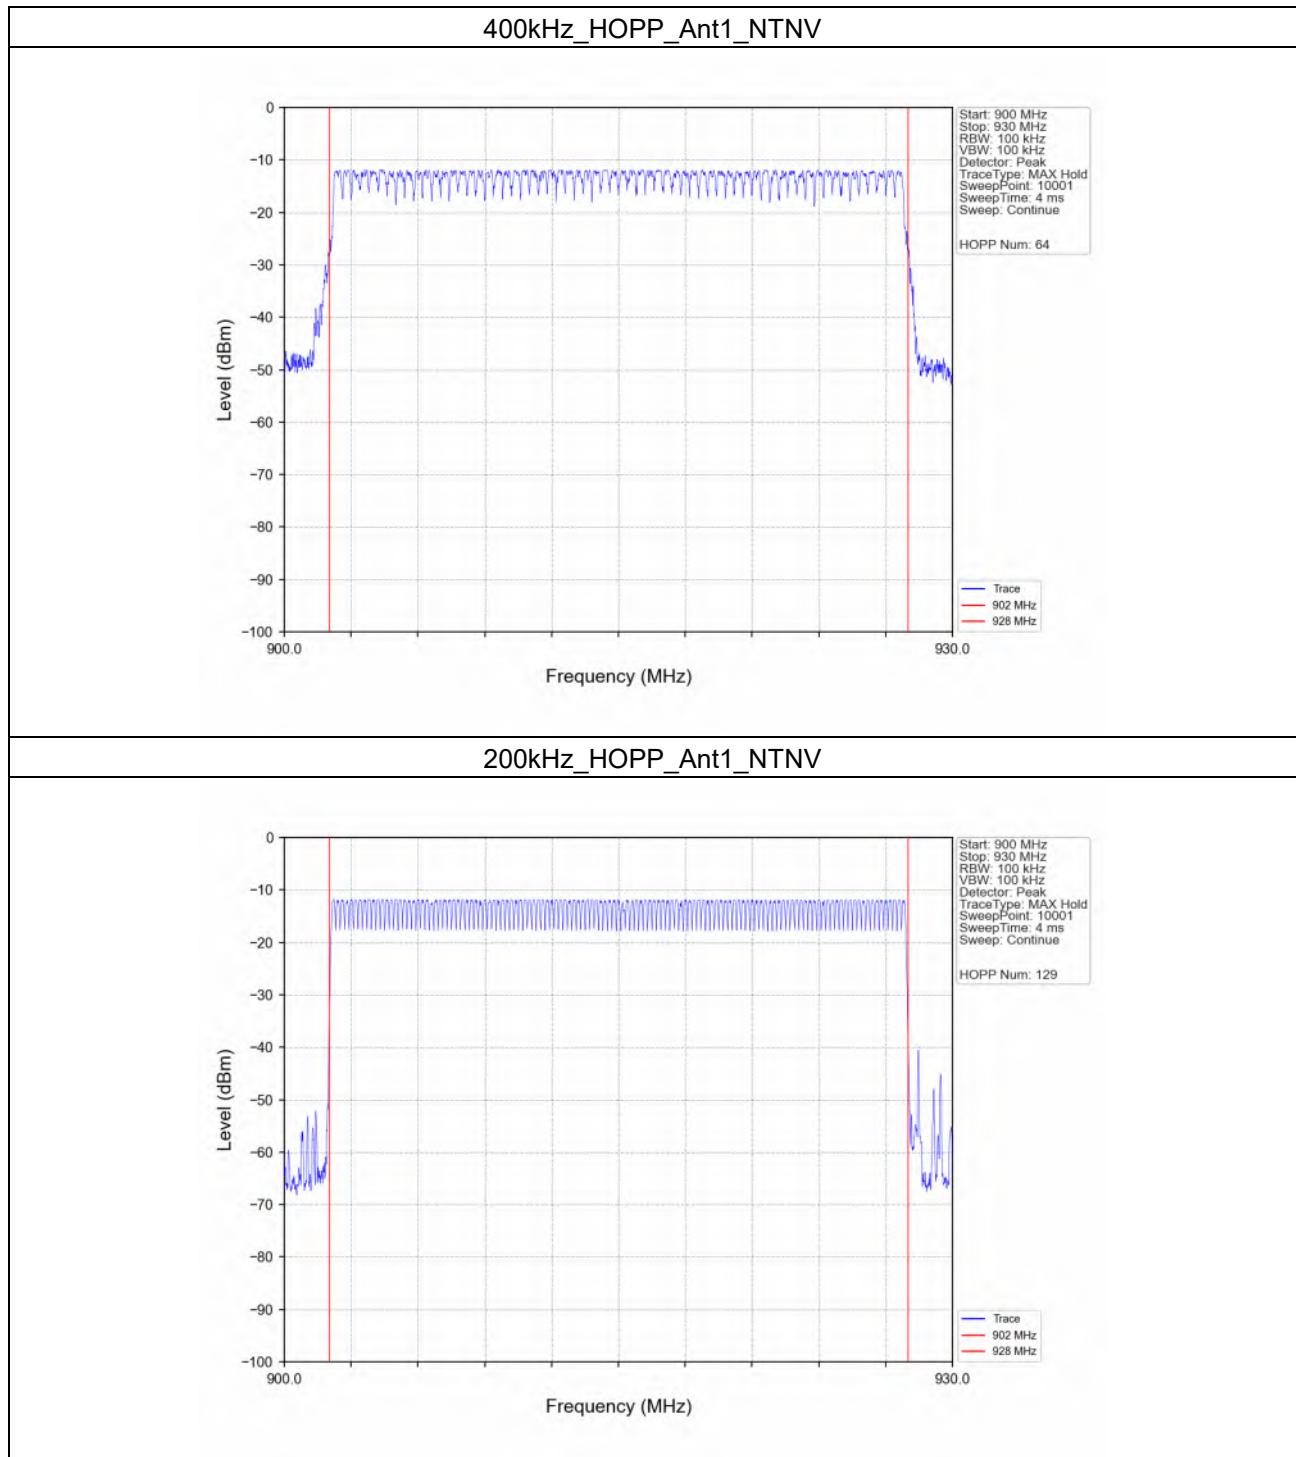



Report No.: SUCR260300021902

Page: 152 of 164

5. Time of Occupancy (Dwell Time)


5.1 Test Result

5.1.1 Ant1


Ant1								
Mode	TX Type	Frequency (MHz)	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
400kHz	SISO	HOPP	2.649	20.000	2	5.298	<=400	Pass
200kHz	SISO	HOPP	2.594	20.000	1	2.594	<=400	Pass

5.2 Test Graph


5.2.1 Ant1

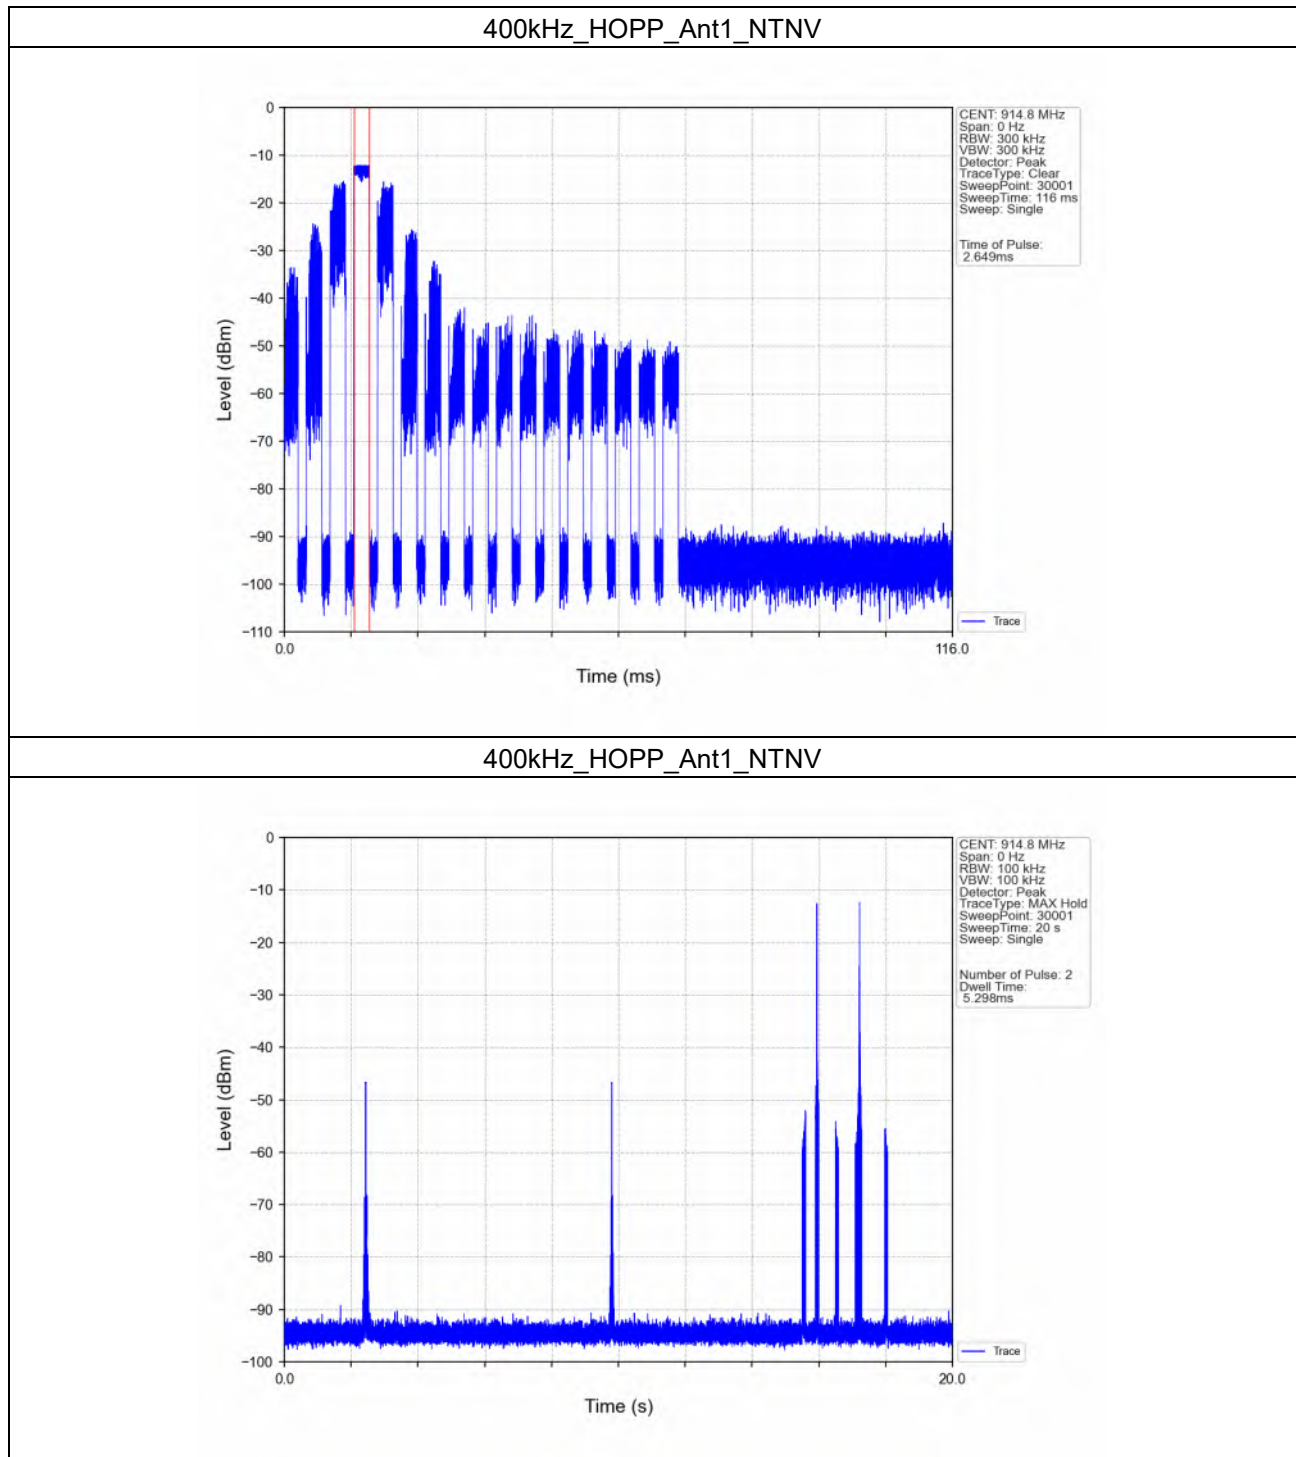

200kHz_HOPP_Ant1_NTNV

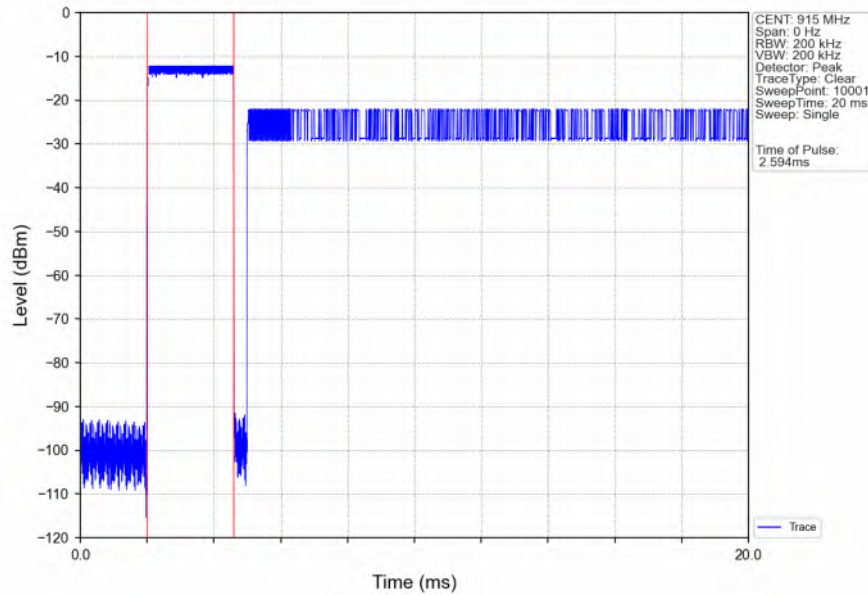

200kHz_HOPP_Ant1_NTNV

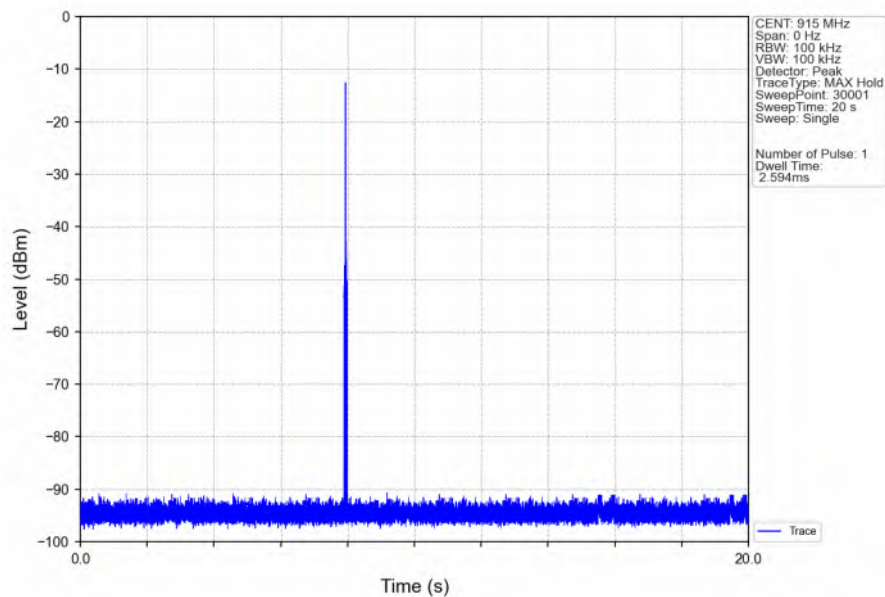

6. Unwanted Emissions In Non-restricted Frequency Bands

6.1 Test Result

6.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
400kHz	SISO	902.4	1	15.65
		914.8	1	15.65
		927.6	1	15.65
200kHz	SISO	902.2	1	16.00
		915	1	16.00
		927.8	1	16.00


6.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
400kHz	SISO	902.4	1	15.65	-4.35	Pass
		914.8	1	15.65	-4.35	Pass
		927.6	1	15.65	-4.35	Pass
		HOPP	1	15.65	-4.35	Pass
				15.65	-4.35	Pass
200kHz	SISO	902.2	1	16.00	-4.00	Pass
		915	1	16.00	-4.00	Pass
		927.8	1	16.00	-4.00	Pass
		HOPP	1	16.00	-4.00	Pass
				16.00	-4.00	Pass


6.2 Test Graph

6.2.1 Ref


400K_LCH_902.4MHz_Ant1_NTNV

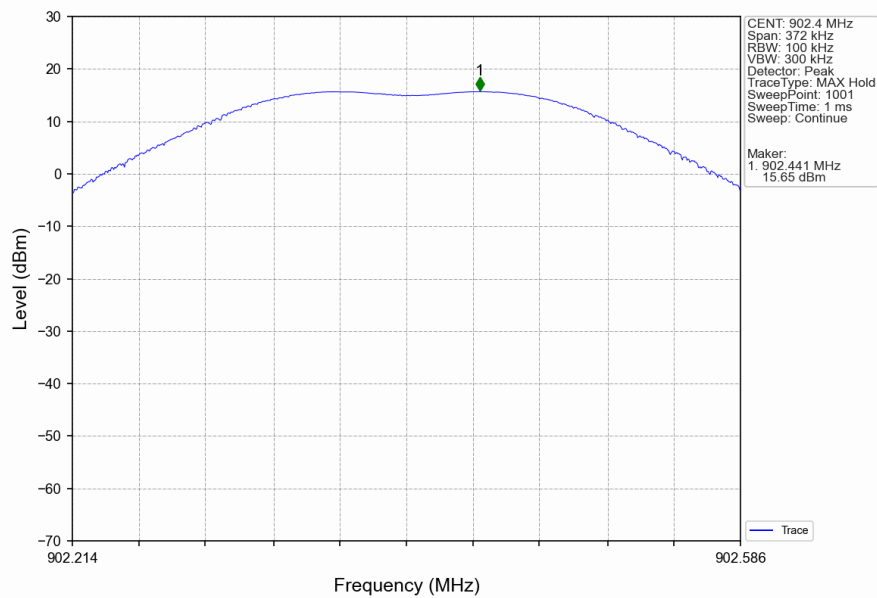


400K_MCH_914.8MHz_Ant1_NTNV

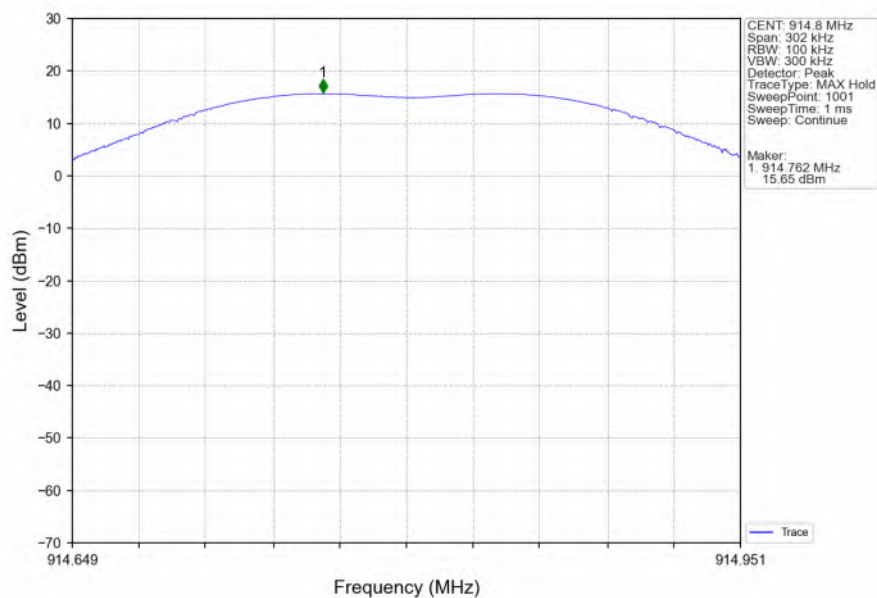


400K_HCH_927.6MHz_Ant1_NTNV

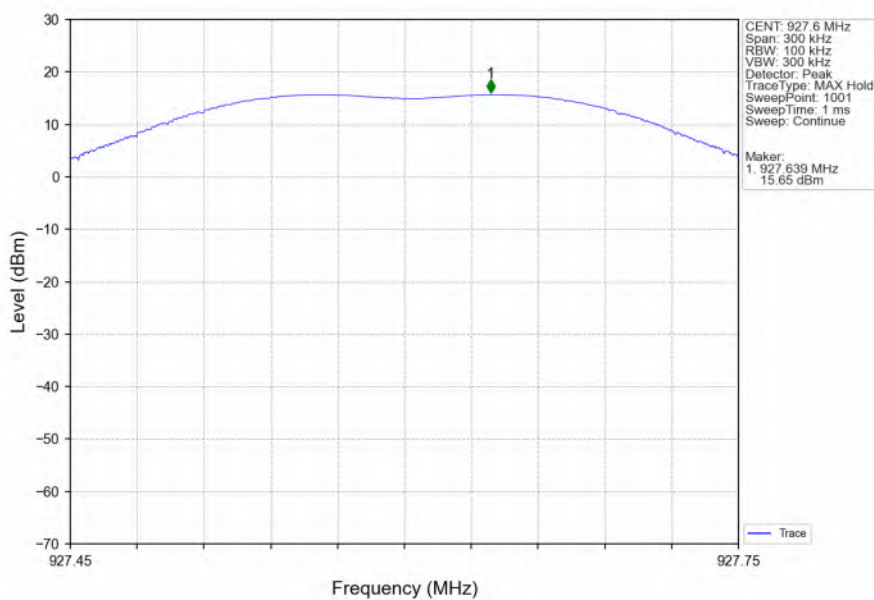


200K_LCH_902.2MHz_Ant1_NTNV

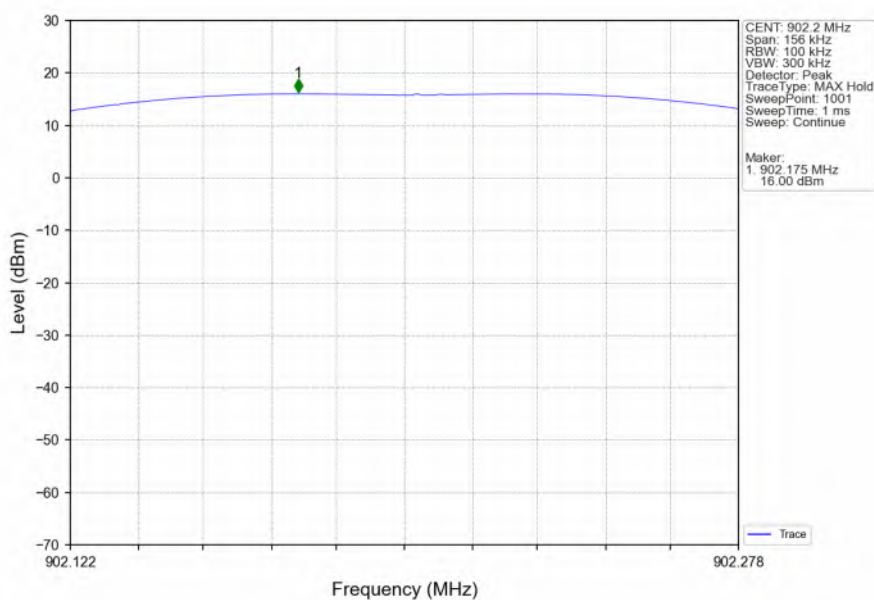

200K_MCH_915MHz_Ant1_NTNV

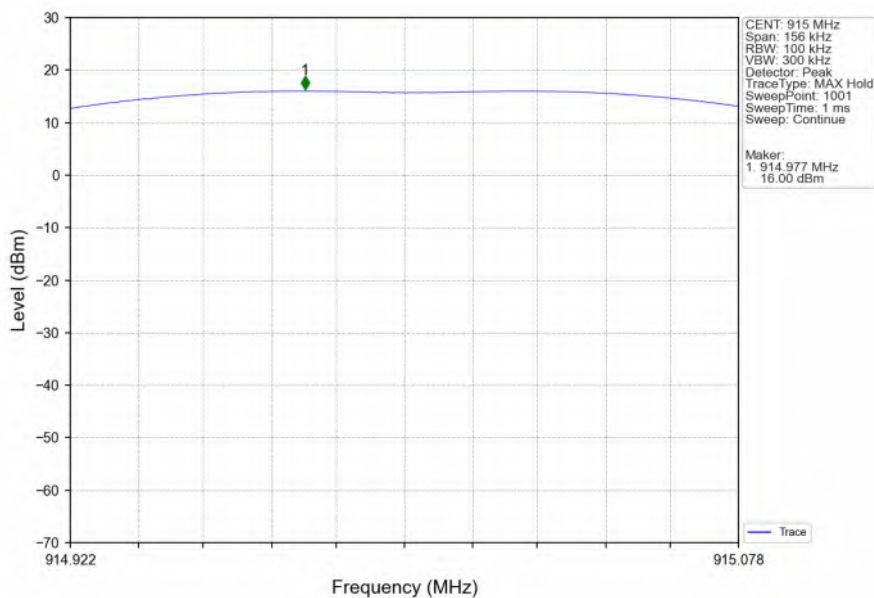


200K_HCH_927.8MHz_Ant1_NTNV

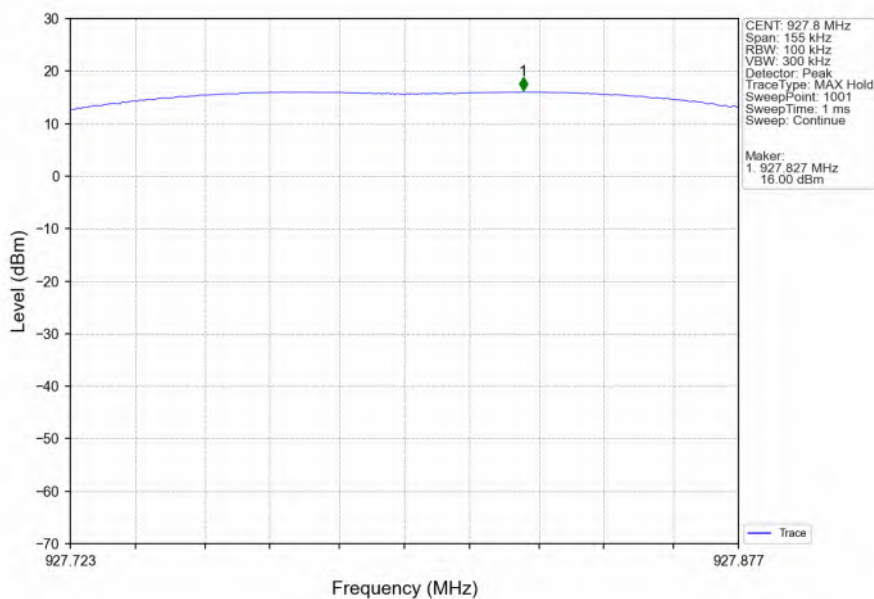


6.2.2 CSE


400kHz_LCH_902.4MHz_Ant1_NTNV

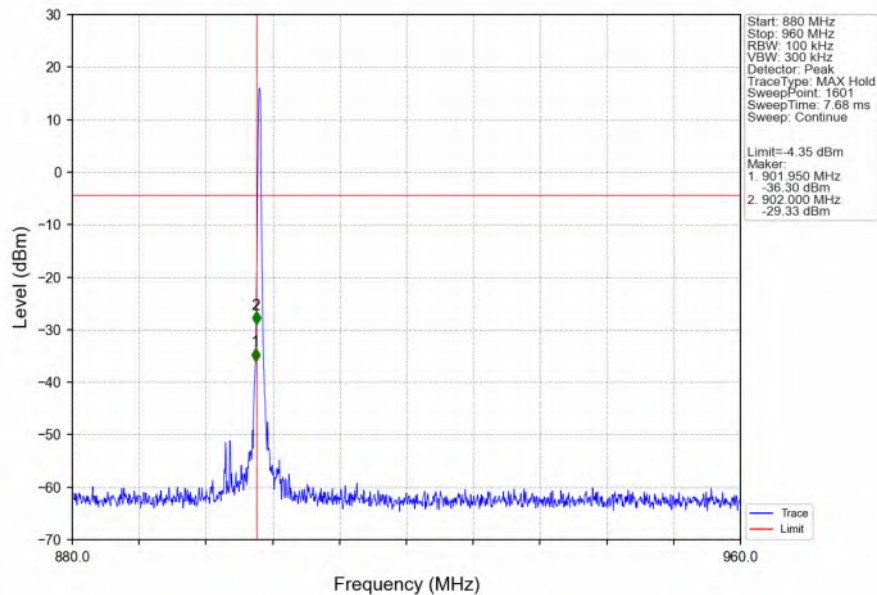


400kHz_LCH_902.4MHz_Ant1_NTNV

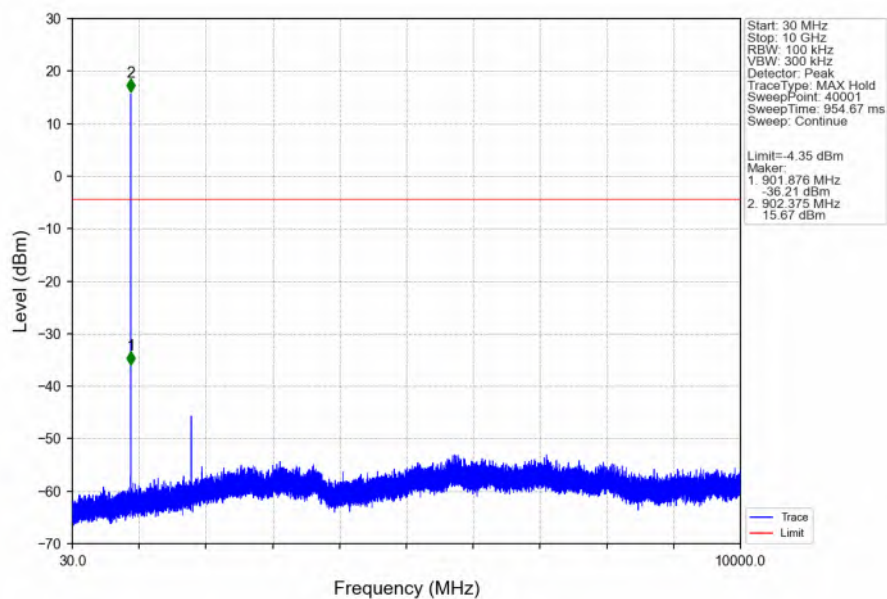


400kHz_MCH_914.8MHz_Ant1_NTNV

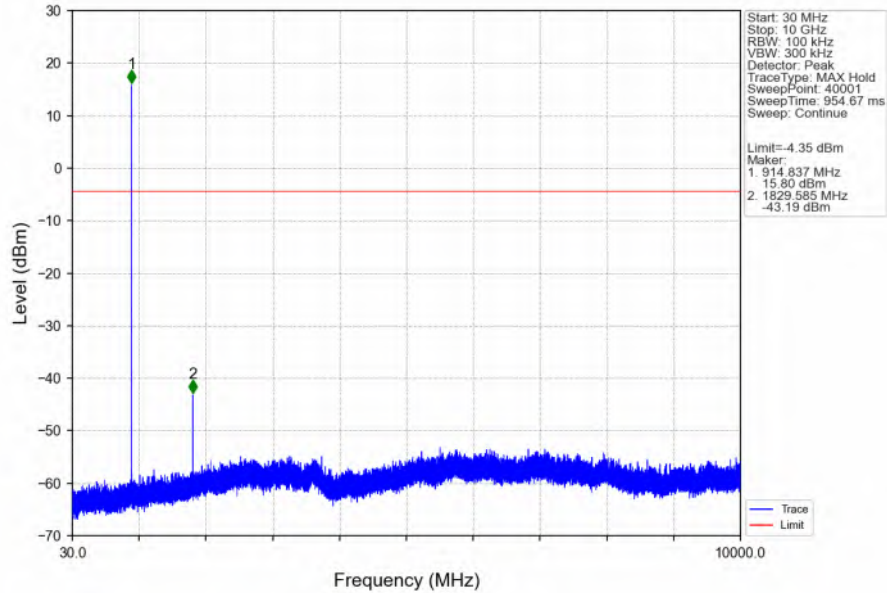


400kHz_HCH_927.6MHz_Ant1_NTNV

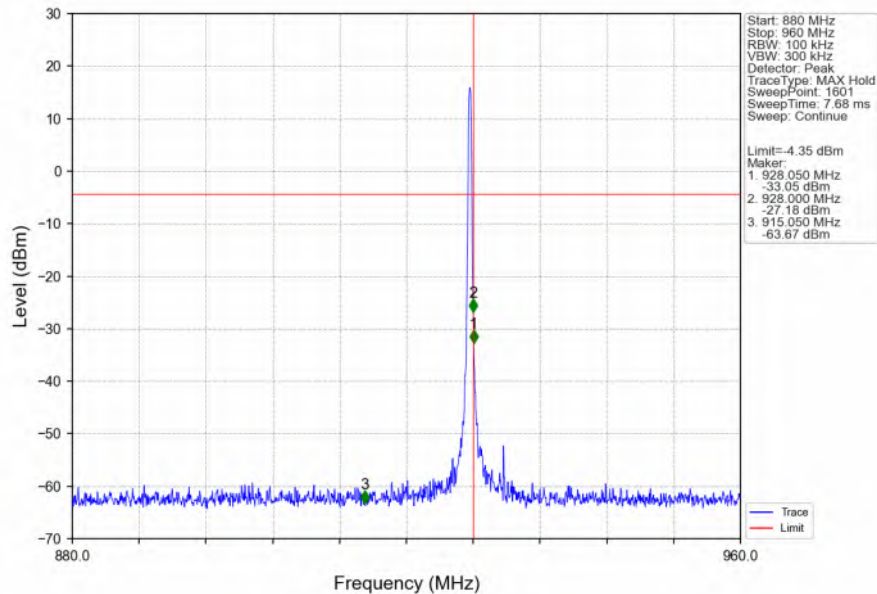


400kHz_HCH_927.6MHz_Ant1_NTNV

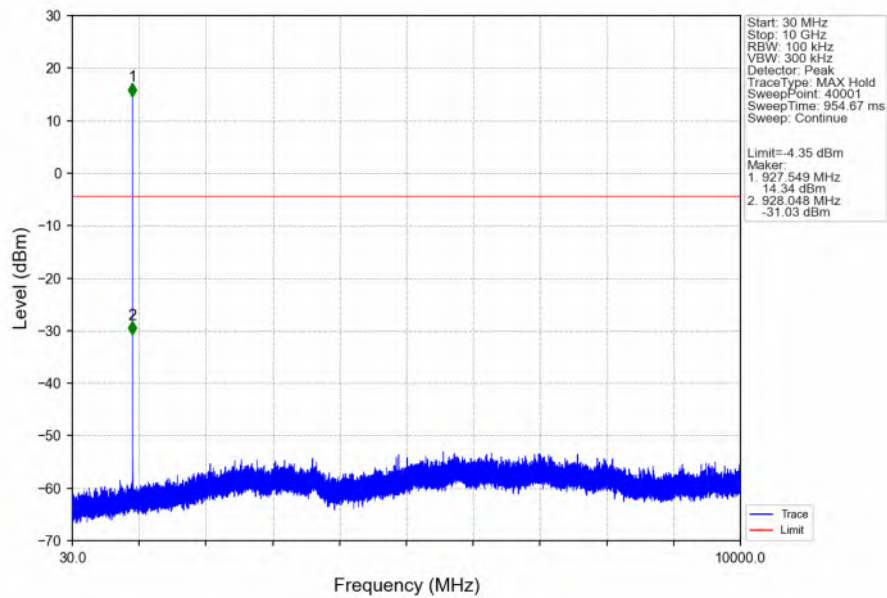


400kHz_HOPP_Ant1_NTNV

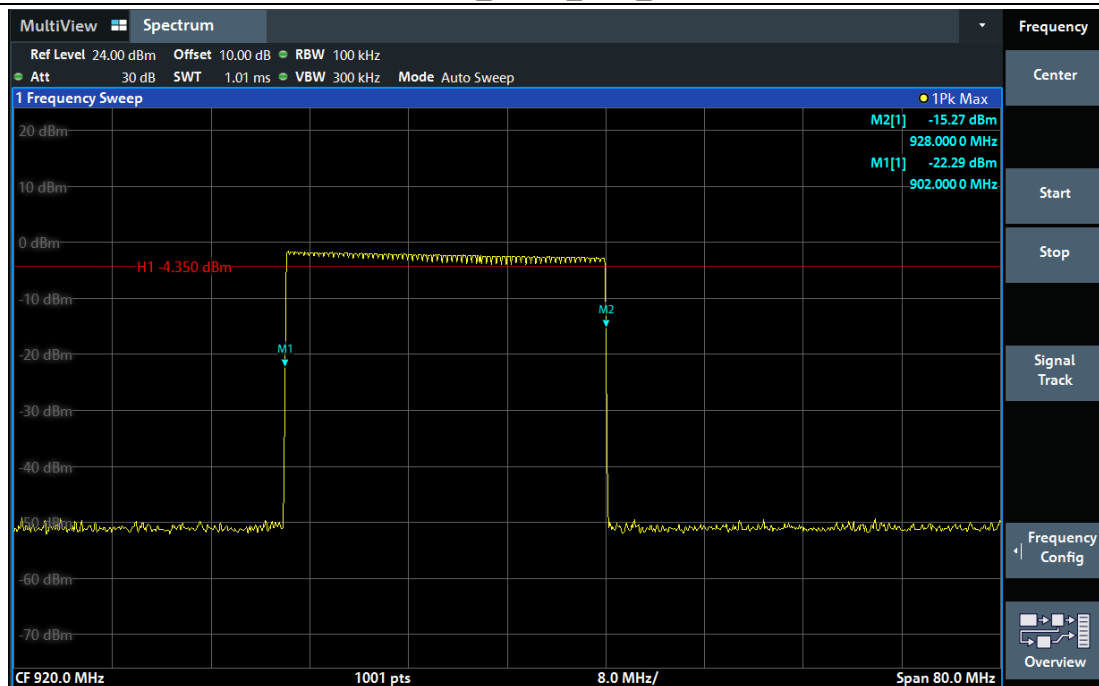


200kHz_LCH_902.2MHz_Ant1_NTNV

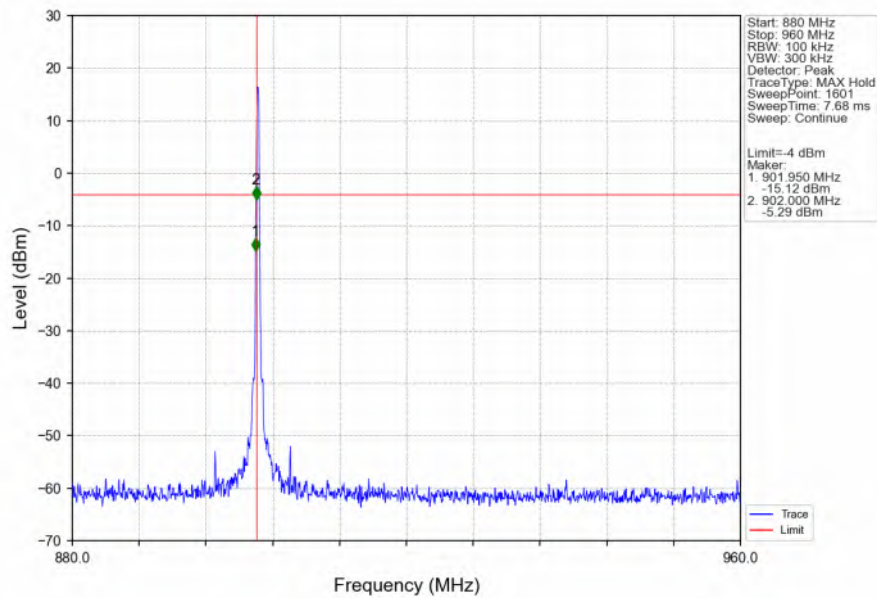


200kHz_LCH_902.2MHz_Ant1_NTNV

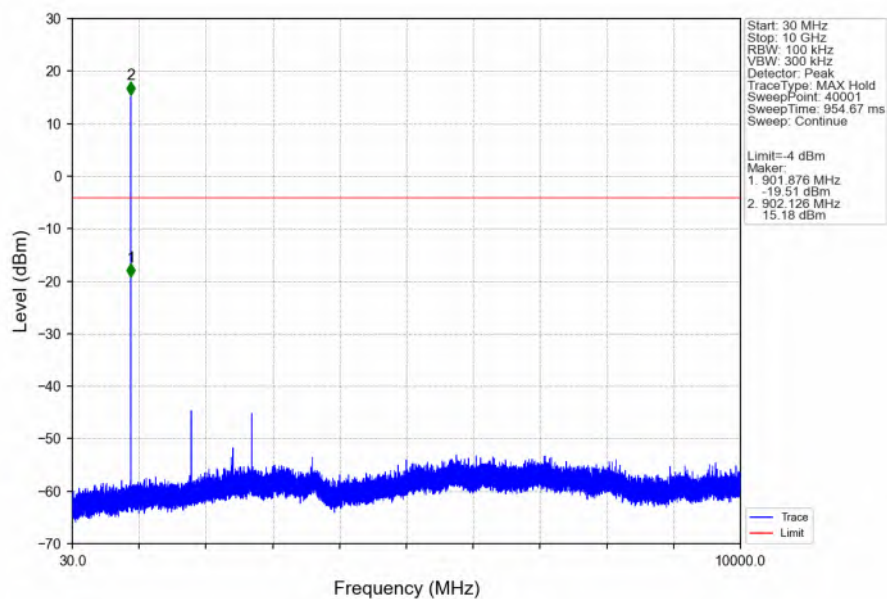


200kHz_MCH_915MHz_Ant1_NTNV

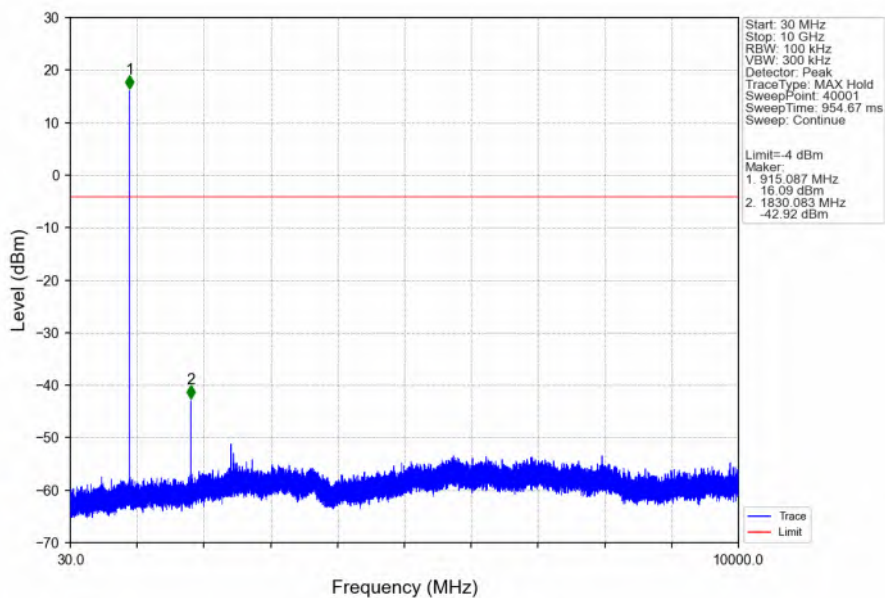


200kHz_HCH_927.8MHz_Ant1_NTNV

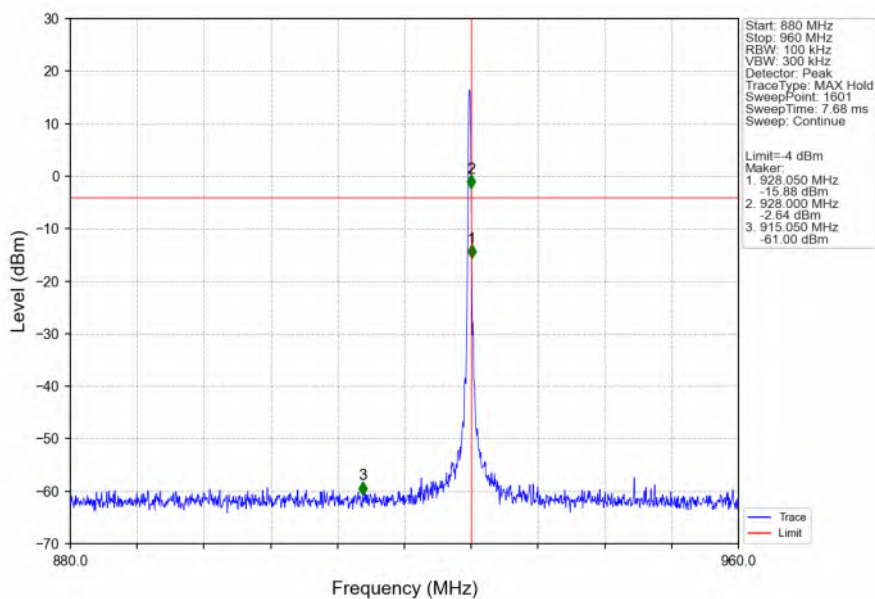

200kHz_HCH_927.8MHz_Ant1_NTNV

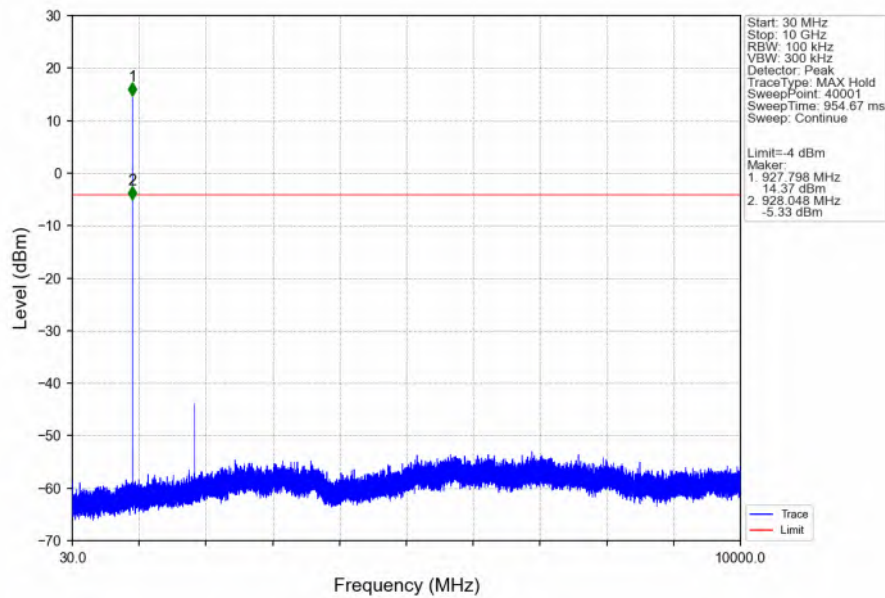

200kHz_HOPP_Ant1_NTNV

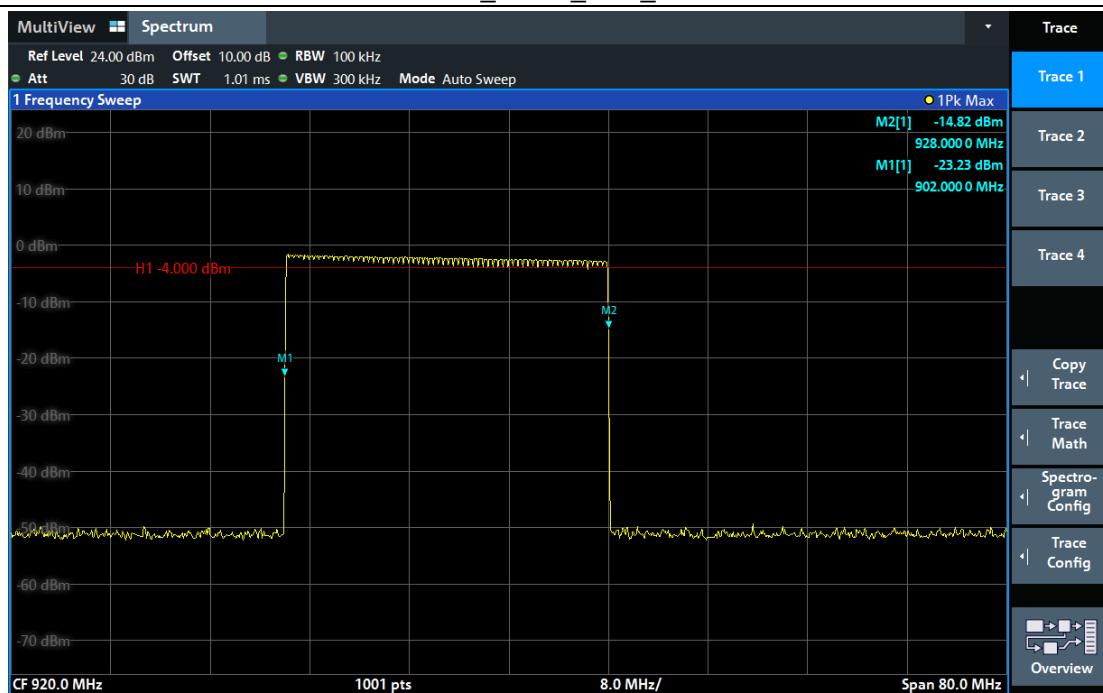

- End of the Report -