



FCC RF Test Report

APPLICANT : Quectel Wireless Solutions Co., Ltd.
EQUIPMENT : Wi-Fi and Bluetooth Combo PCBA
BRAND NAME : QUECTEL
MODEL NAME : SDC009P
FCC ID : XMR2026SDC009P
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Feb. 06, 2026 ~ Feb. 10, 2026

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

***No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China***



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	8
2.5 EUT Operation Test Setup	8
2.6 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	11
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	16
3.6 Antenna Requirements.....	20
4 LIST OF MEASURING EQUIPMENT	21
5 MEASUREMENT UNCERTAINTY	22
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR611409B	Rev. 01	Initial issue of report	Feb. 13, 2026



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Conducted Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm/3kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.52 dB at 4924.00 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Required	DC power
3.6	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Quectel Wireless Solutions Co., Ltd.

No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China

1.2 Manufacturer

Quectel Wireless Solutions Co., Ltd.

No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wi-Fi and Bluetooth Combo PCBA
Brand Name	QUECTEL
Model Name	SDC009P
FCC ID	XMR2026SDC009P
SN Code	Conducted: 200D3DD682AF Radiation: 200D3DD68316
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 16.39 dBm (0.0436 W) 802.11g : 21.47 dBm (0.1403 W) 802.11n HT20 : 21.97 dBm (0.1574 W)
99% Occupied Bandwidth	802.11b : 13.891MHz 802.11g : 17.564MHz 802.11n HT20 : 18.036MHz
Antenna Type / Gain	PCB Antenna type with gain 2.9 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH08-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH08-KS	AUDIX	E3	210616

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2020+Cor.1-2023

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z and folded/unfolded state. The worst cases (Y plane with unfolded state) were recorded in this report.

2.1 Carrier Frequency and Channel


Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

2.3 Connection Diagram of Test System

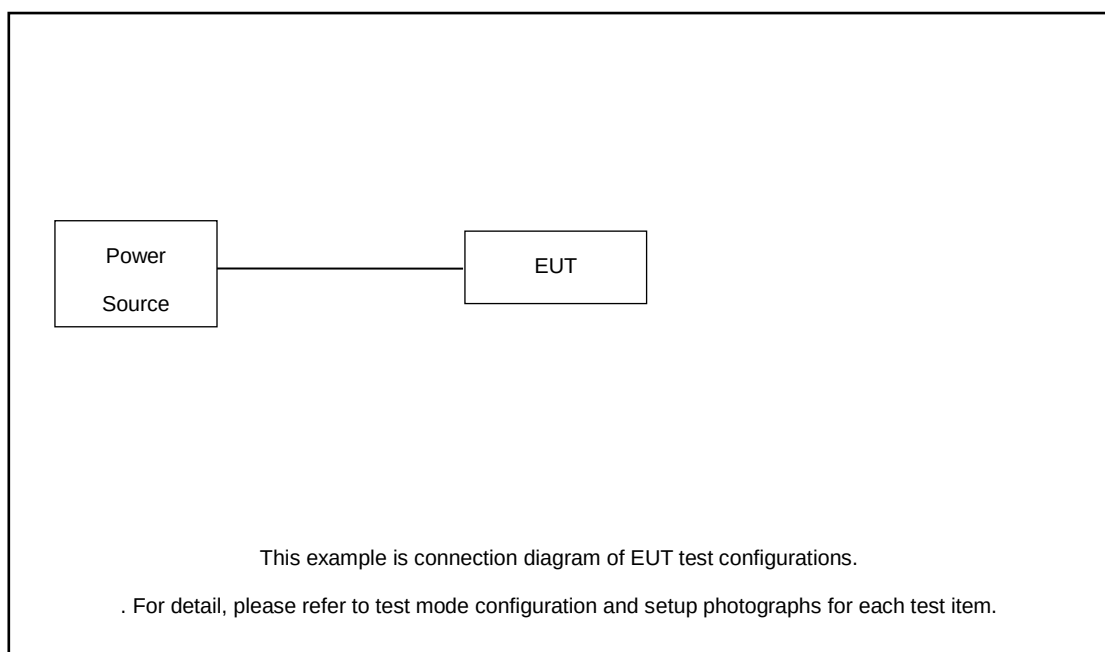

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.62 dB and 20dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.62 + 20 = 21.62 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 11.8.1 for 6dB BW and 6.9.3 for 99% occupied bandwidth measurements
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. Detector = Peak. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

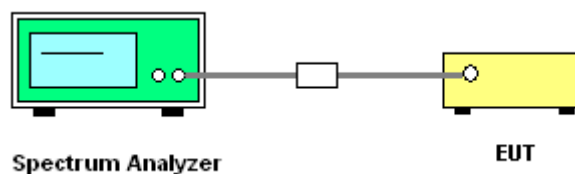

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2020 clause 11.9.1.2 PKPM1 Peak power meter or ANSI C63.10-2020 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

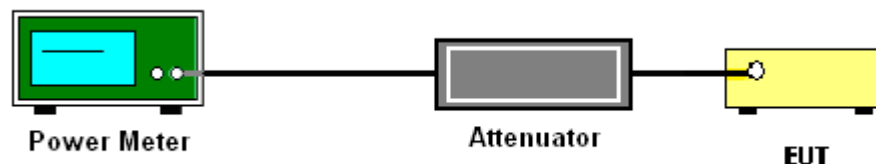



3.2.5 Test Result of Peak Output Power

TEST RESULTS DATA												
Peak Output Power												
2.4GHz Band												
Mode						Power Setting	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	Gain(dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass/Fail
Band	SISO	N _{TX}	Channel	Freq (MHz)	Data Rate	Ant 1	Ant 1		Ant 1	Ant 1		
11b	SISO	1	1	2412	1Mbps	70.00	16.18	30.00	2.90	19.08	36.00	Pass
11b	SISO	1	6	2437	1Mbps	70.00	16.16	30.00	2.90	19.06	36.00	Pass
11b	SISO	1	11	2462	1Mbps	70.00	16.39	30.00	2.90	19.29	36.00	Pass
11g	SISO	1	1	2412	6Mbps	78.00	19.99	30.00	2.90	22.89	36.00	Pass
11g	SISO	1	6	2437	6Mbps	85.00	21.47	30.00	2.90	24.37	36.00	Pass
11g	SISO	1	11	2462	6Mbps	78.00	20.52	30.00	2.90	23.42	36.00	Pass
HT20	SISO	1	1	2412	MCS0	78.00	19.87	30.00	2.90	22.77	36.00	Pass
HT20	SISO	1	6	2437	MCS0	88.00	21.97	30.00	2.90	24.87	36.00	Pass
HT20	SISO	1	11	2462	MCS0	78.00	20.33	30.00	2.90	23.23	36.00	Pass

3.2.6 Test Result of Average Output Power (Reporting Only)

TEST RESULTS DATA												
Average Output Power												
2.4GHz Band												
Mode						Power Setting	Average Conducted Power with duty factor(dBm)	Conducted Power Limit (dBm)	Gain(dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass/Fail
Band	SISO	N _{TX}	Channel	Freq (MHz)	Data Rate	Ant 1	Ant 1		Ant 1	Ant 1		
11b	SISO	1	1	2412	1Mbps	70.00	13.90	30.00	2.90	16.80	36.00	Pass
11b	SISO	1	6	2437	1Mbps	70.00	13.97	30.00	2.90	16.87	36.00	Pass
11b	SISO	1	11	2462	1Mbps	70.00	14.05	30.00	2.90	16.95	36.00	Pass
11g	SISO	1	1	2412	6Mbps	78.00	10.88	30.00	2.90	13.78	36.00	Pass
11g	SISO	1	6	2437	6Mbps	85.00	12.65	30.00	2.90	15.55	36.00	Pass
11g	SISO	1	11	2462	6Mbps	78.00	11.27	30.00	2.90	14.17	36.00	Pass
HT20	SISO	1	1	2412	MCS0	78.00	10.81	30.00	2.90	13.71	36.00	Pass
HT20	SISO	1	6	2437	MCS0	88.00	13.16	30.00	2.90	16.06	36.00	Pass
HT20	SISO	1	11	2462	MCS0	78.00	11.08	30.00	2.90	13.98	36.00	Pass



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2020 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01:

Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

3.3.4 Test Setup

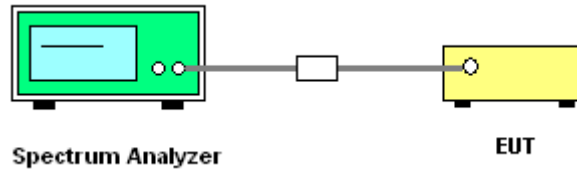

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 11.11.3
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

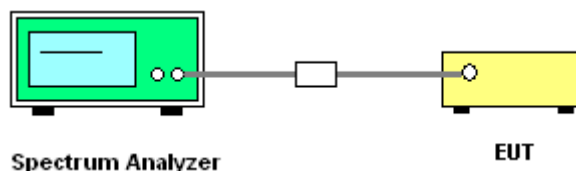

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2020 clause 6.3, 6.5, 6.6, 11.11 and 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

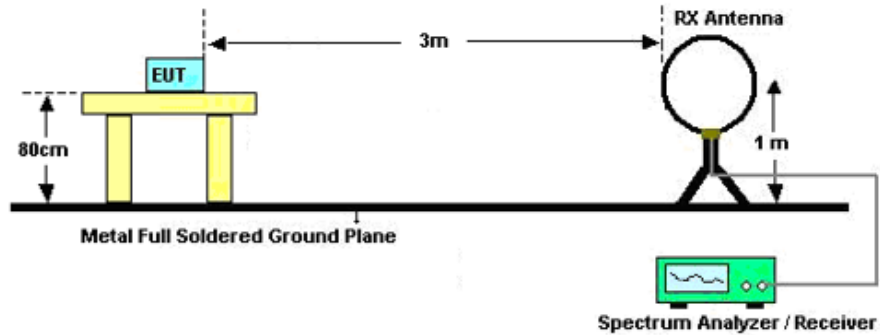

For radiated emissions from 30MHz to 1GHz

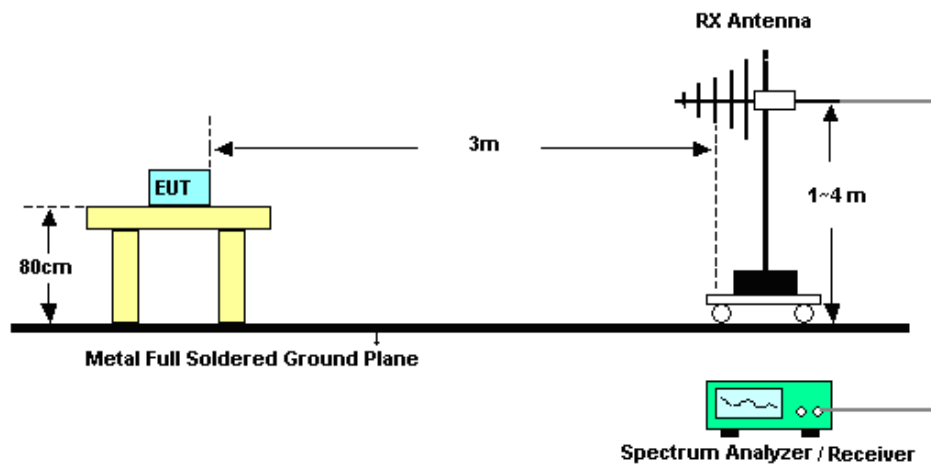

For radiated emissions above 1GHz

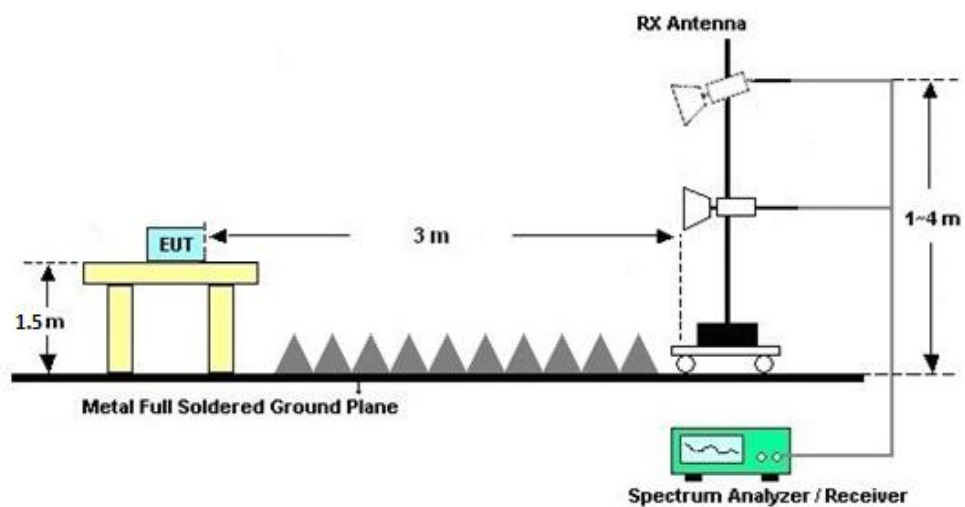



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz;Max 30dBm	Jul. 02, 2025	Feb. 10, 2026	Jul. 01, 2026	Radiation (03CH08-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44GHz	Oct. 09, 2025	Feb. 10, 2026	Oct. 08, 2026	Radiation (03CH08-KS)
Active loop antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Aug. 10, 2025	Feb. 10, 2026	Aug. 09, 2026	Radiation (03CH08-KS)
Bilog Antenna	TESEQ	CBL 6111D	59915	30MHz~1GHz	Aug. 12, 2025	Feb. 10, 2026	Aug.11, 2026	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jun. 26, 2025	Feb. 10, 2026	Jun. 25, 2026	Radiation (03CH08-KS)
high gain Amplifier	EM	EM01G18GA	060890	1GHz~18GHz	May. 23, 2025	Feb. 10, 2026	May. 22, 2026	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Oct. 18, 2025	Feb. 10, 2026	Oct. 17, 2026	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	413741	9KHz~1GHz	Jan. 02, 2026	Feb. 10, 2026	Jan. 01, 2027	Radiation (03CH08-KS)
Amplifier	Keysight	83017A	MY53270417	500MHz~26.5GHz	Oct. 10, 2025	Feb. 10, 2026	Oct. 09, 2026	Radiation (03CH08-KS)
Amplifier	EM	EM18G40GGA	060737	18~40GHz	Jan. 03, 2026	Feb. 10, 2026	Jan. 02, 2027	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Feb. 10, 2026	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Feb. 10, 2026	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Feb. 10, 2026	NCR	Radiation (03CH08-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Jul. 07, 2025	Feb. 06, 2026~Feb. 09, 2026	Jul. 06, 2026	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2026	Feb. 06, 2026~Feb. 09, 2026	Jan. 01, 2027	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2026	Feb. 06, 2026~Feb. 09, 2026	Jan. 01, 2027	Conducted (TH01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.00 dB
Occupied Channel Bandwidth	±0.384%
Conducted Power	±0.90 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.38 ppm

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.36 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results




DTS Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.30	2407.83	2416.13	0.5	PASS
		2437	8.70	2432.83	2441.53	0.5	PASS
		2462	8.33	2457.83	2466.17	0.5	PASS
11G	Ant1	2412	17.32	2403.36	2420.68	0.5	PASS
		2437	17.62	2428.10	2445.72	0.5	PASS
		2462	17.32	2453.32	2470.64	0.5	PASS
11N20SISO	Ant1	2412	16.74	2403.61	2420.35	0.5	PASS
		2437	16.71	2428.68	2445.39	0.5	PASS
		2462	16.63	2453.65	2470.28	0.5	PASS




Test Graphs

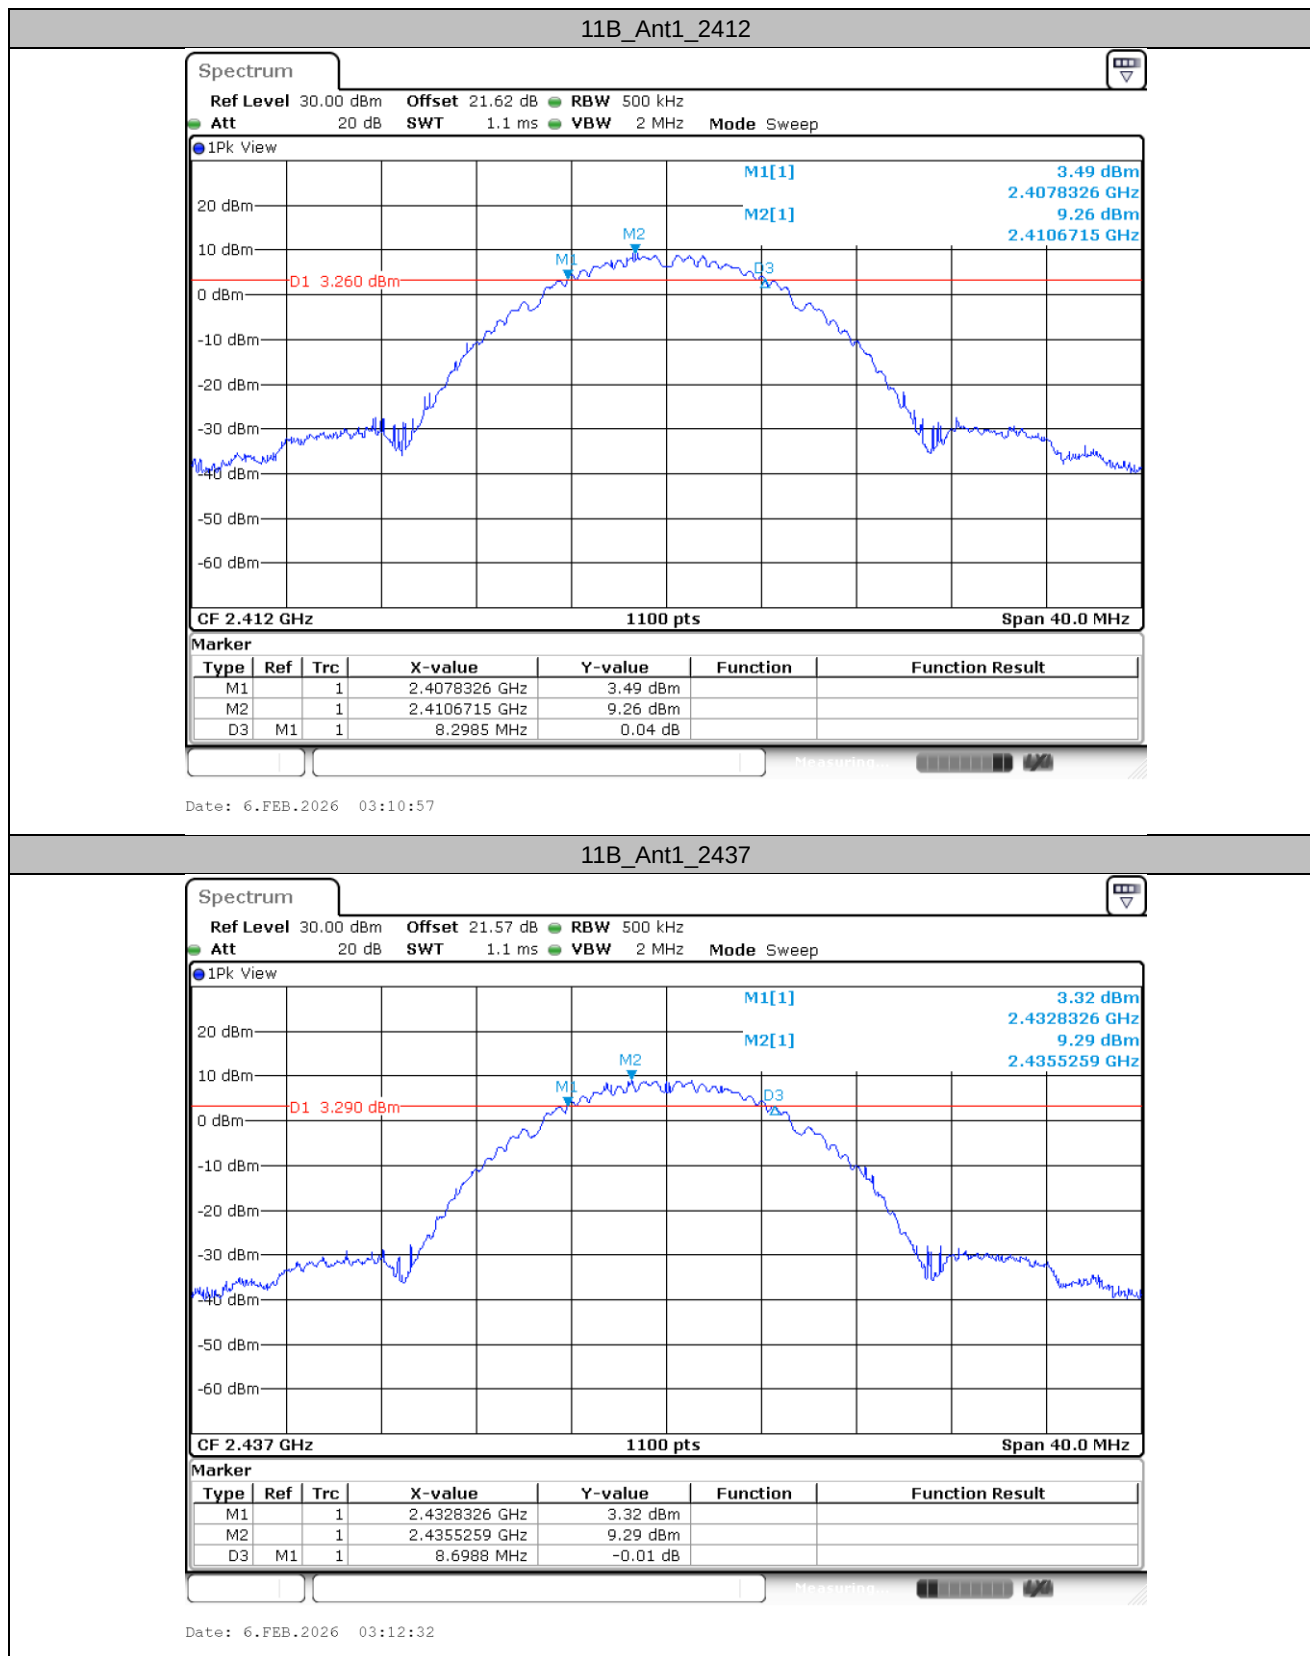




11B_Ant1_2462

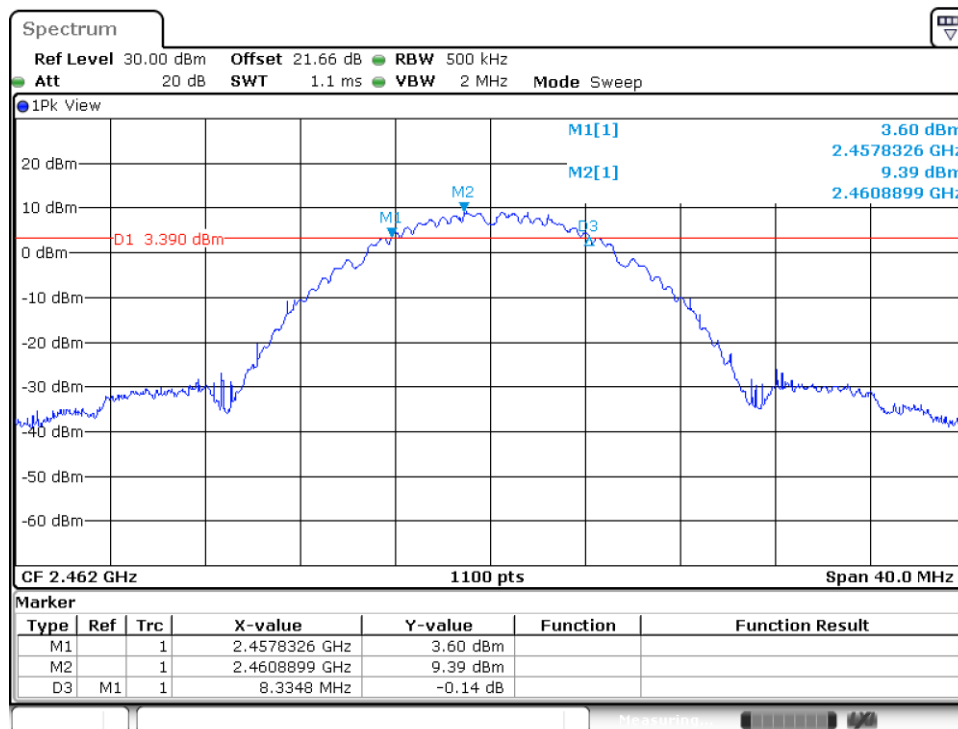

Date: 6.FEB.2026 03:13:47


11G_Ant1_2412

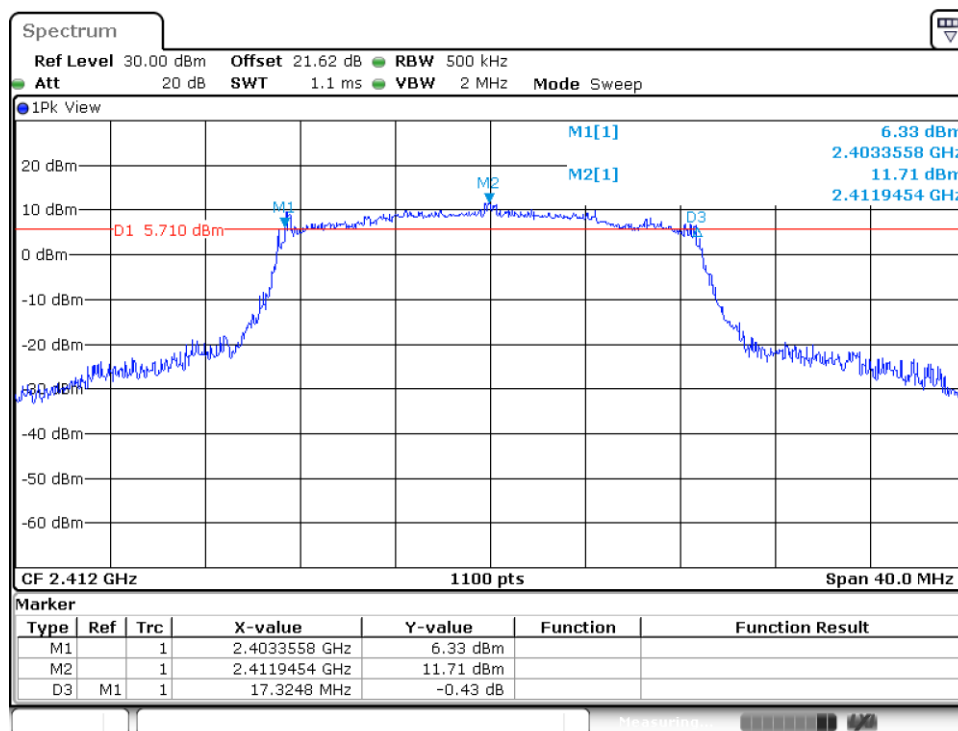

Date: 6.FEB.2026 03:17:17




11G_Ant1_2437

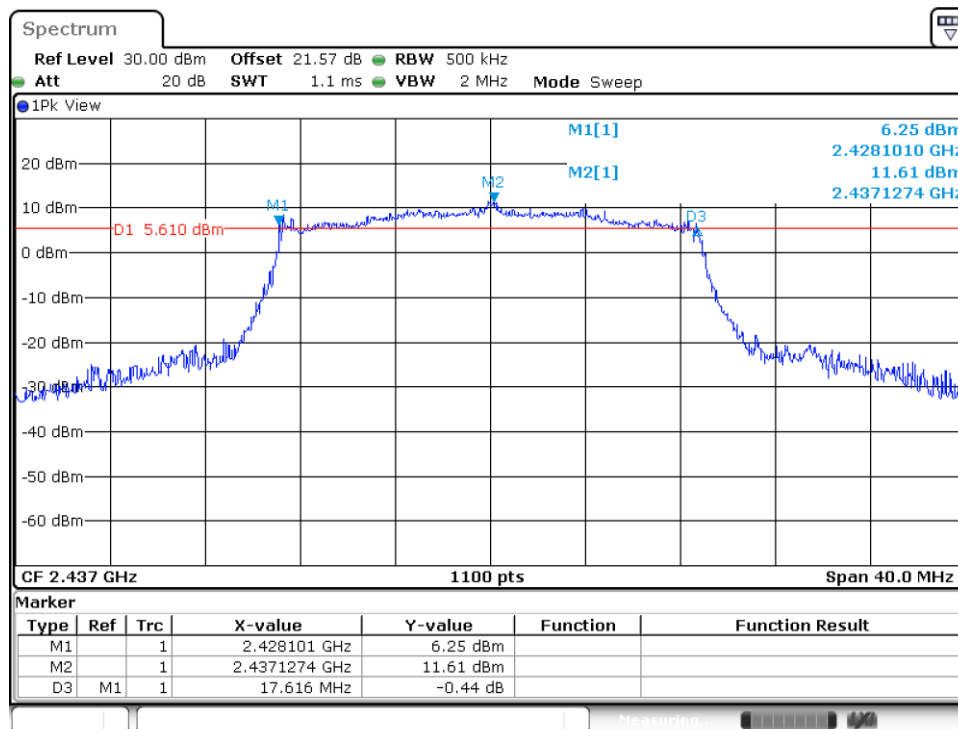


Date: 6.FEB.2026 03:18:46

11G_Ant1_2462

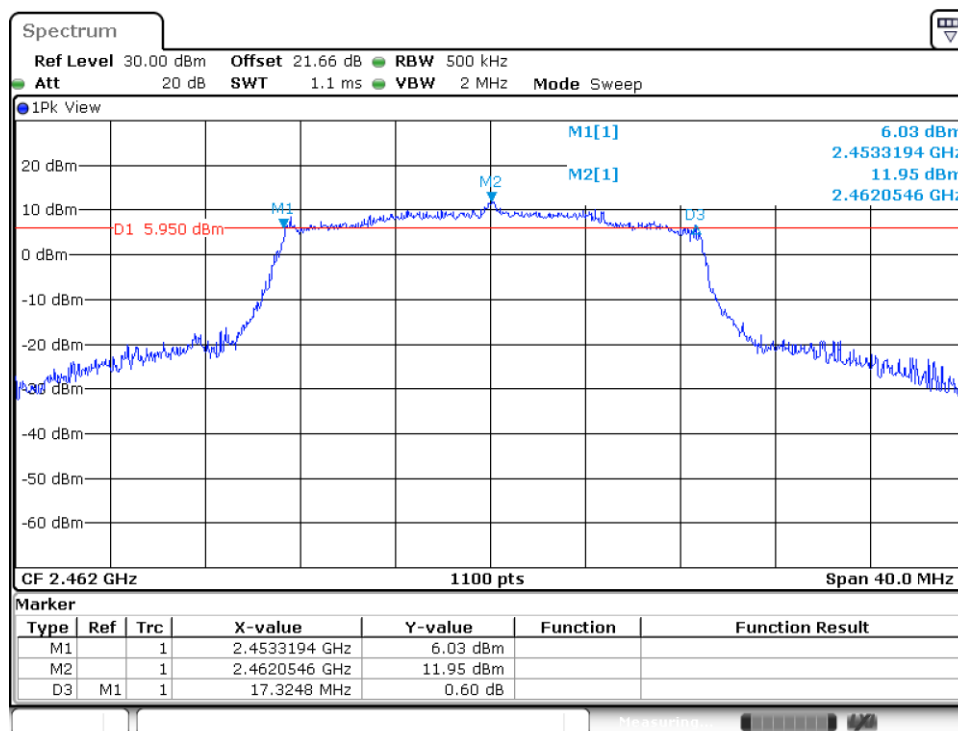



Date: 6.FEB.2026 03:20:26

11N20SISO_Ant1_2412

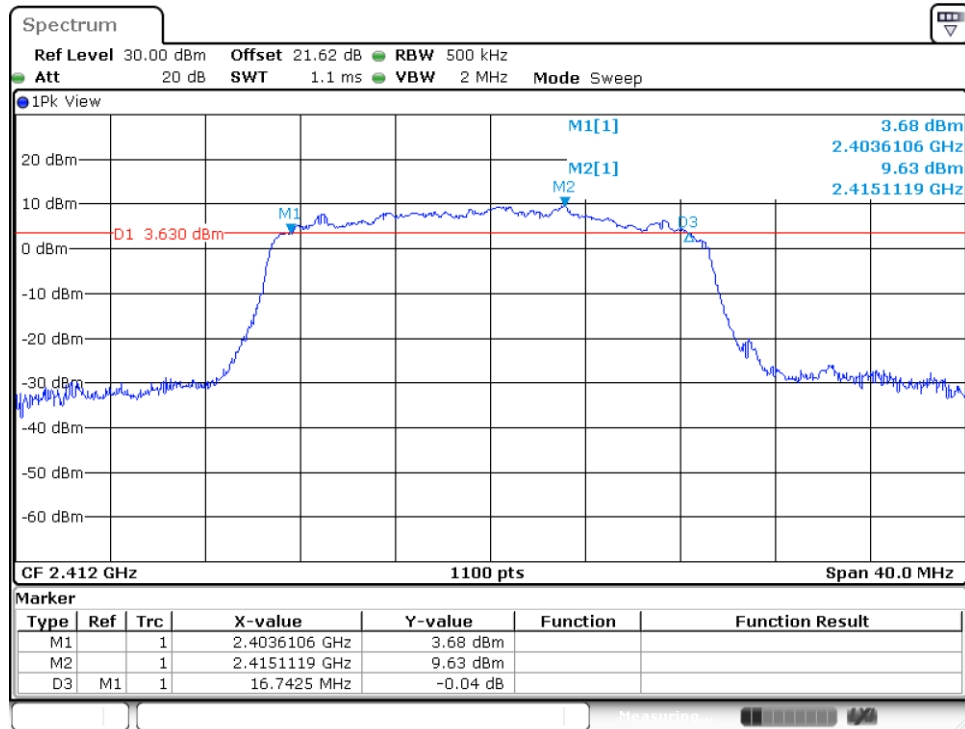

11N20SISO_Ant1_2437

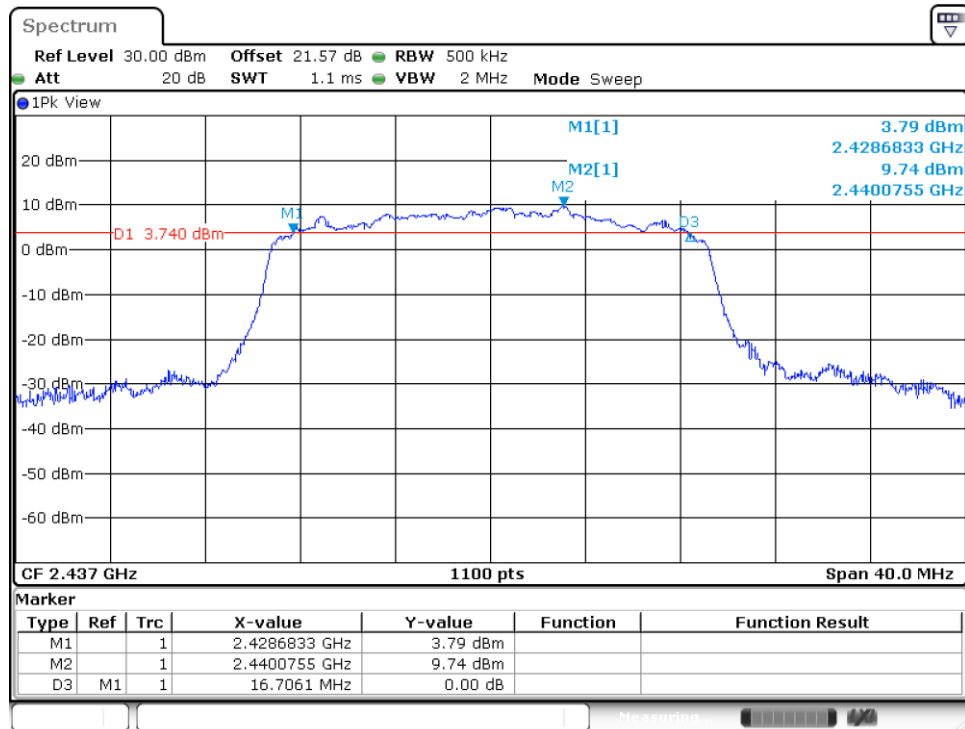

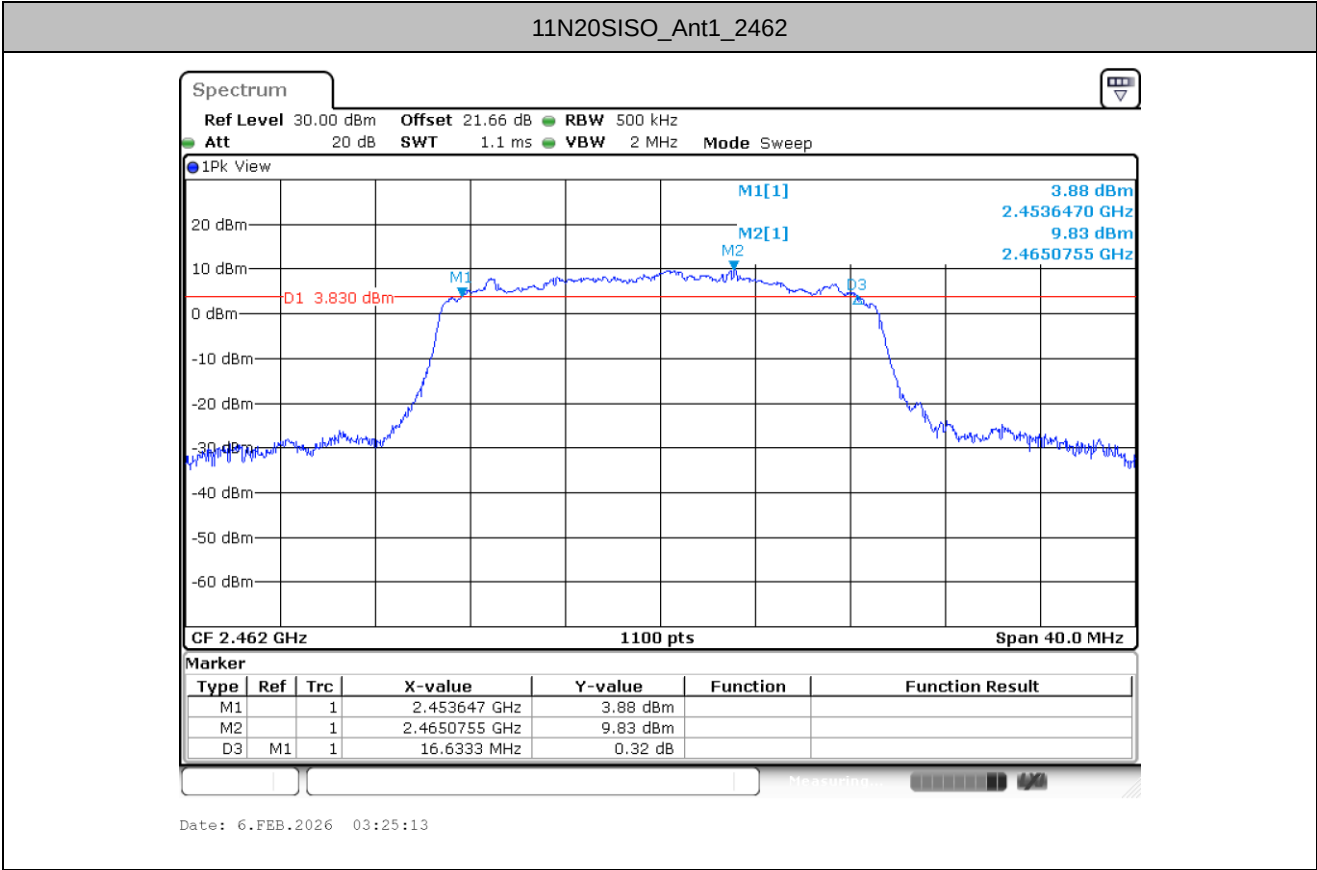




Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]
11B	Ant1	2412	13.891	2405.0364	2418.9273
		2437	13.855	2430.1091	2443.9636
		2462	13.891	2455.0727	2468.9636
11G	Ant1	2412	17.564	2403.1091	2420.6727
		2437	17.491	2428.2909	2445.7818
		2462	17.527	2453.1455	2470.6727
11N20SISO	Ant1	2412	18	2402.8909	2420.8909
		2437	18	2427.9273	2445.9273
		2462	18.036	2452.8909	2470.9273




Test Graphs

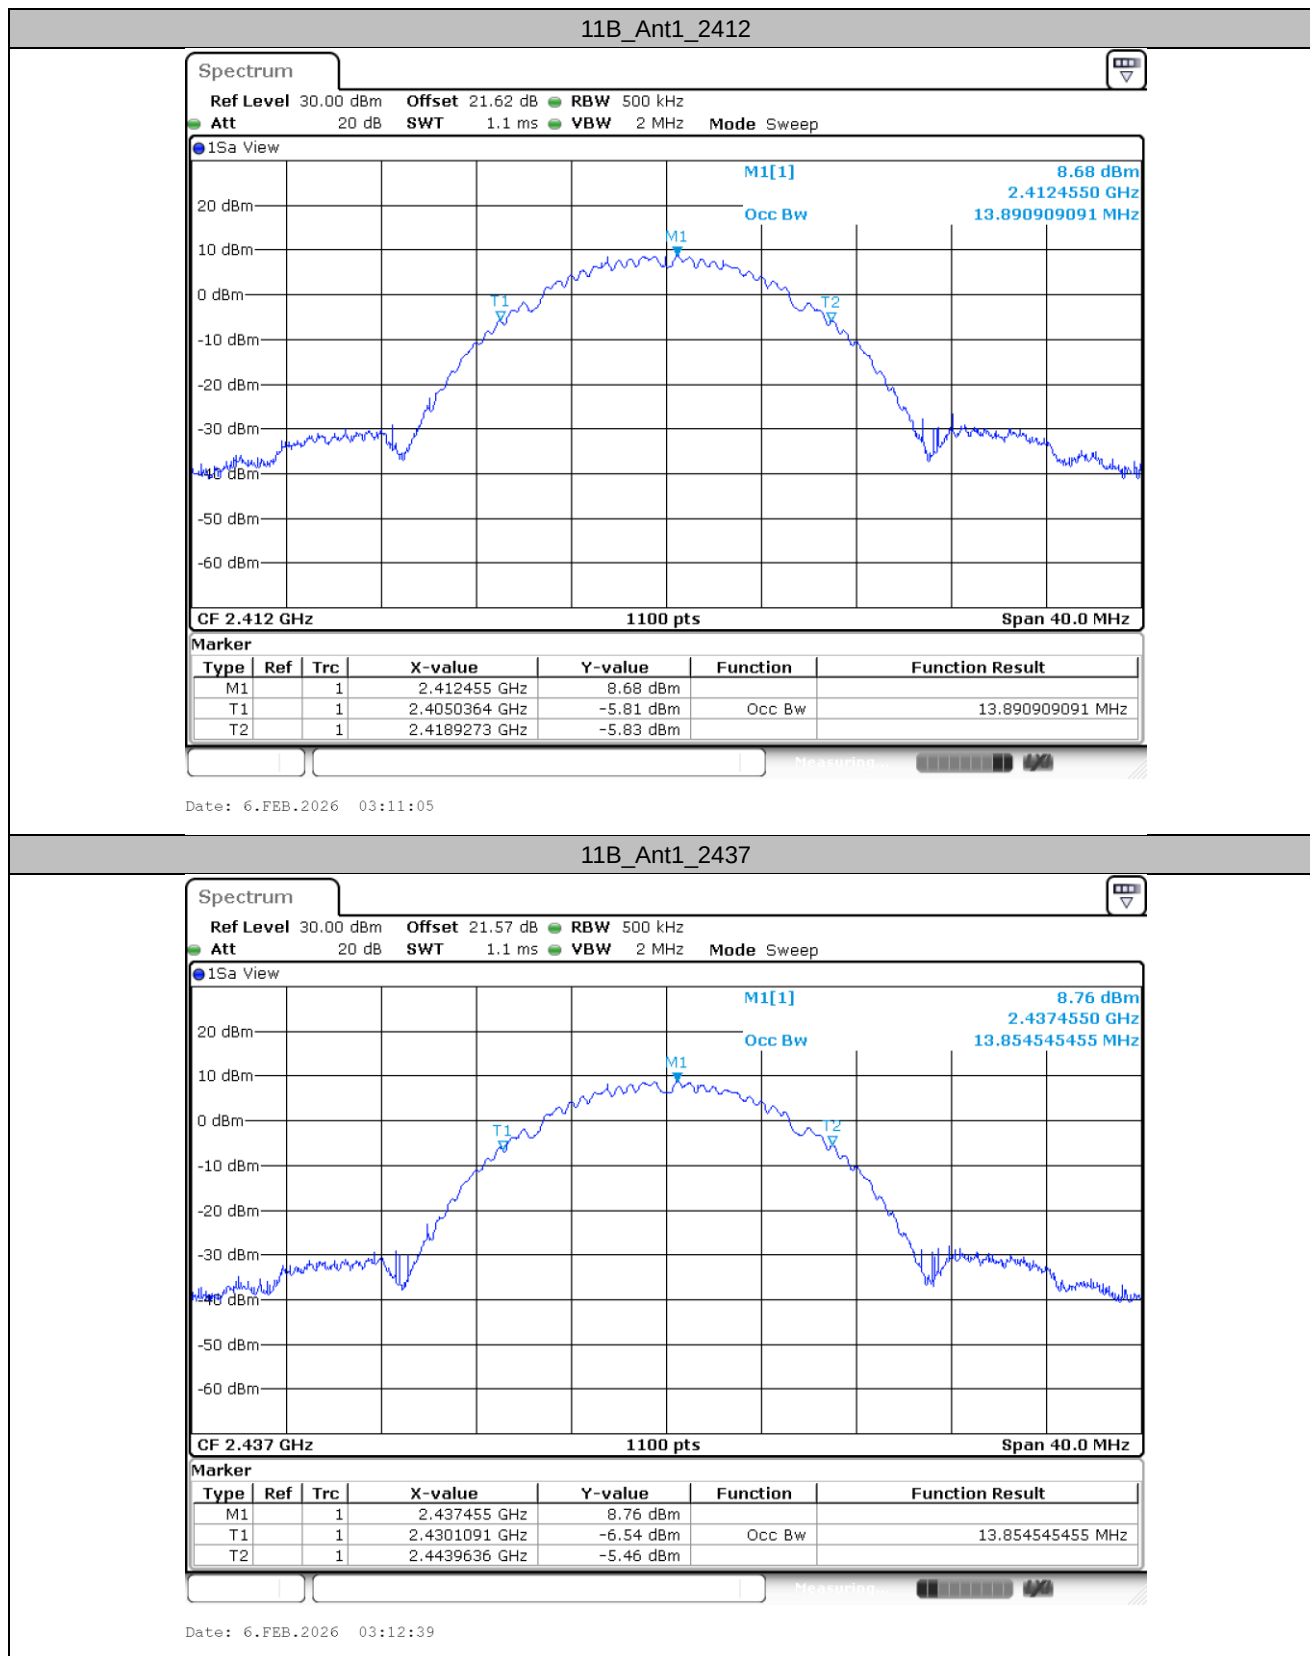




11B_Ant1_2462

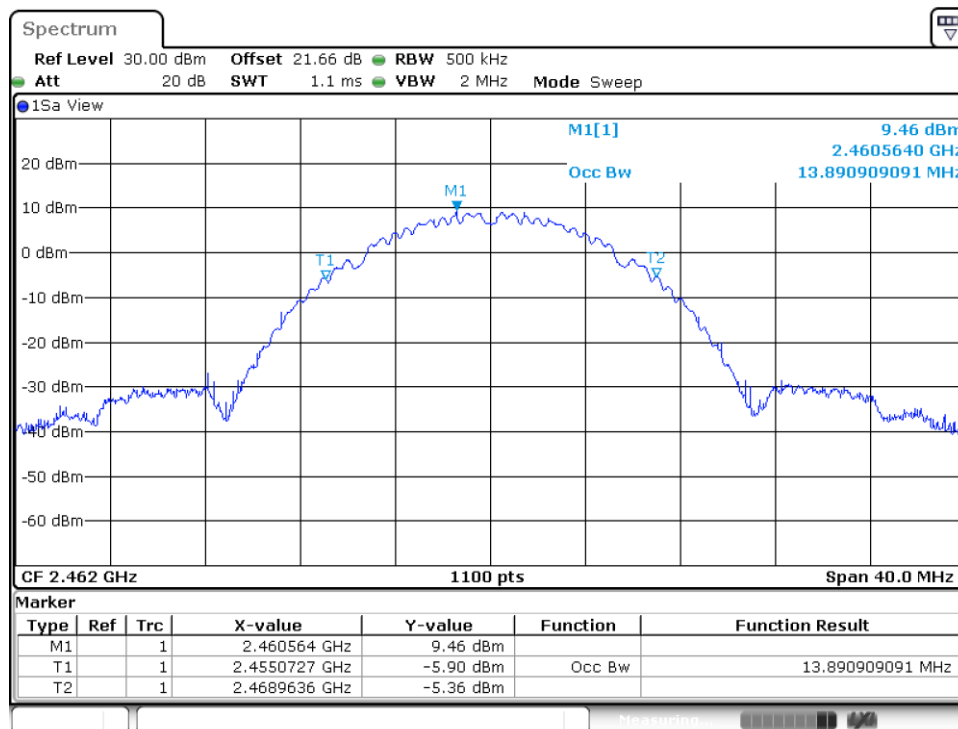

Date: 6.FEB.2026 03:13:56


11G_Ant1_2412

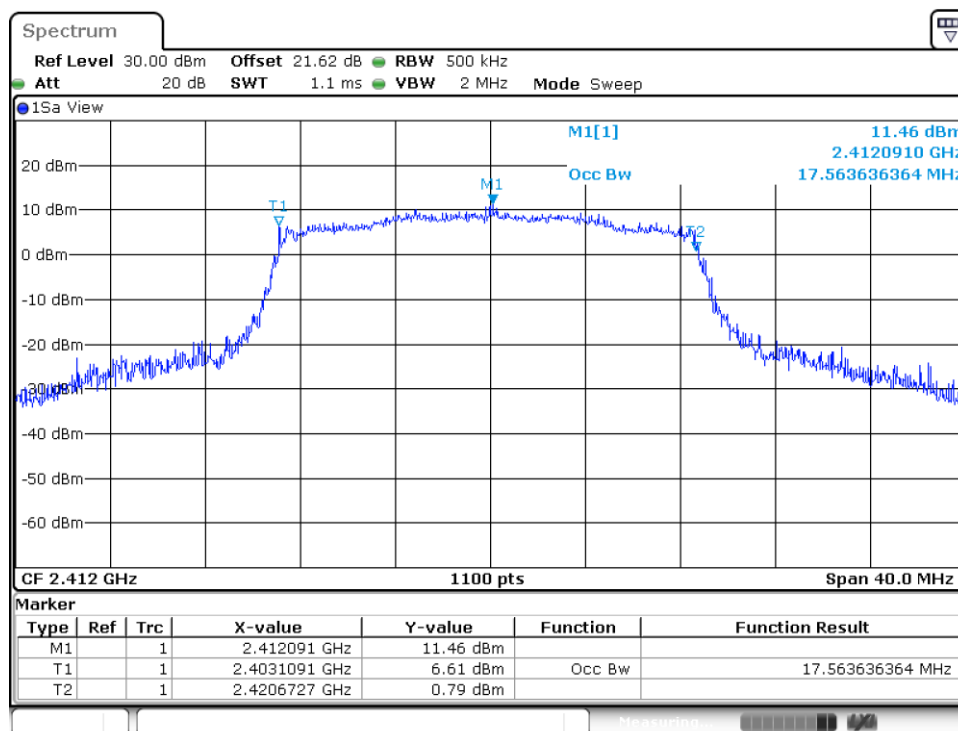

Date: 6.FEB.2026 03:17:25




11G_Ant1_2437

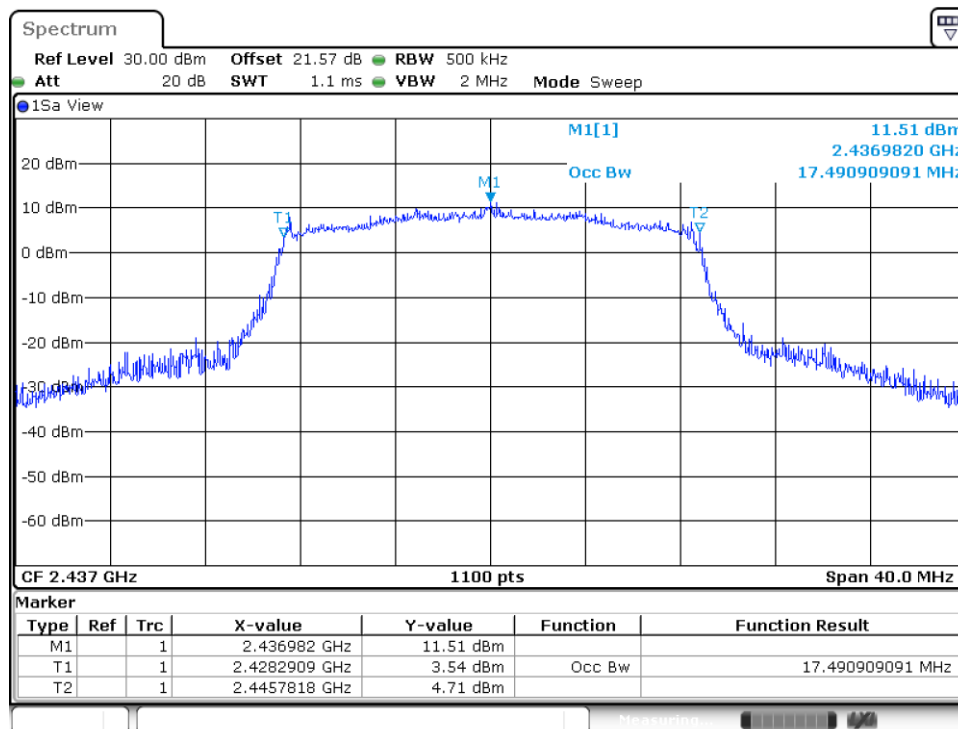

Date: 6.FEB.2026 03:18:54


11G_Ant1_2462

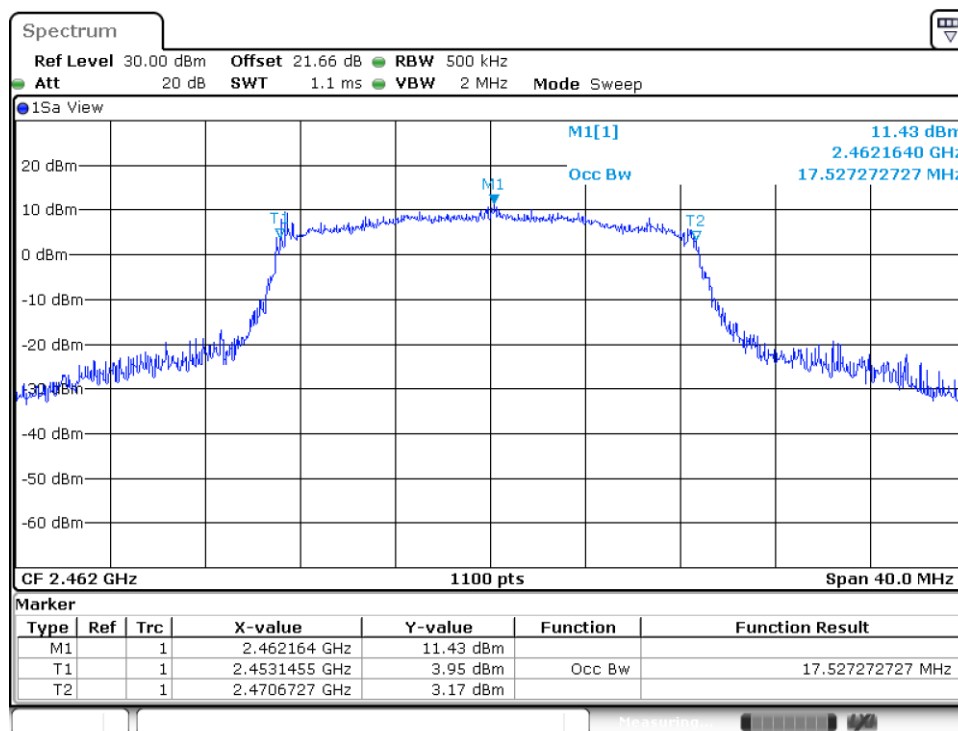

Date: 6.FEB.2026 03:20:34




11N20SISO_Ant1_2412

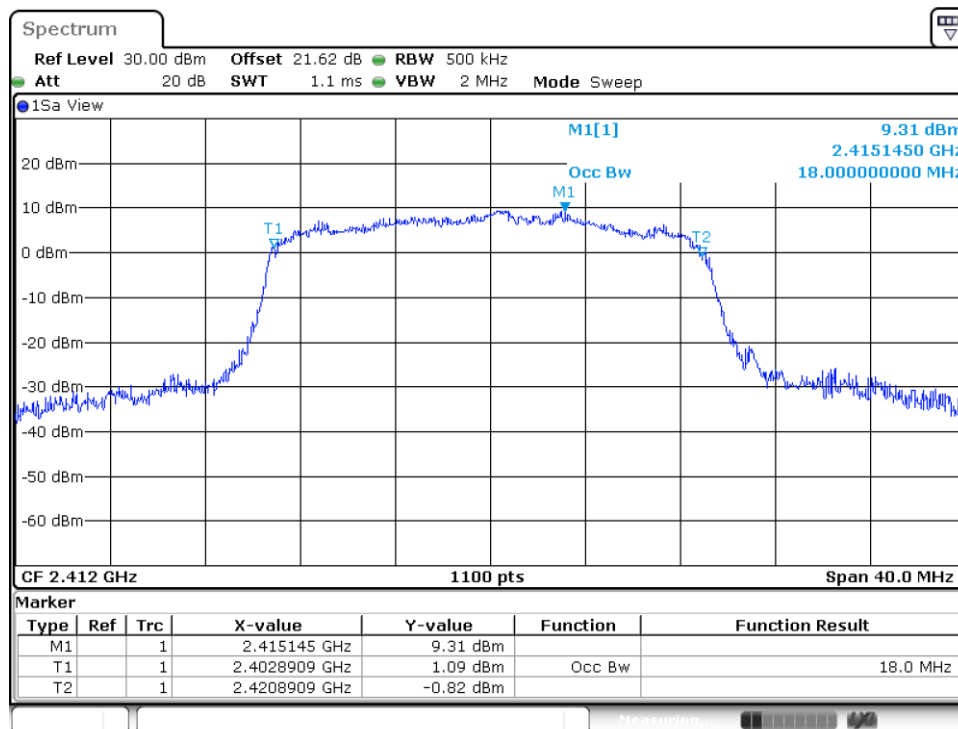


Date: 6.FEB.2026 03:22:26

11N20SISO_Ant1_2437

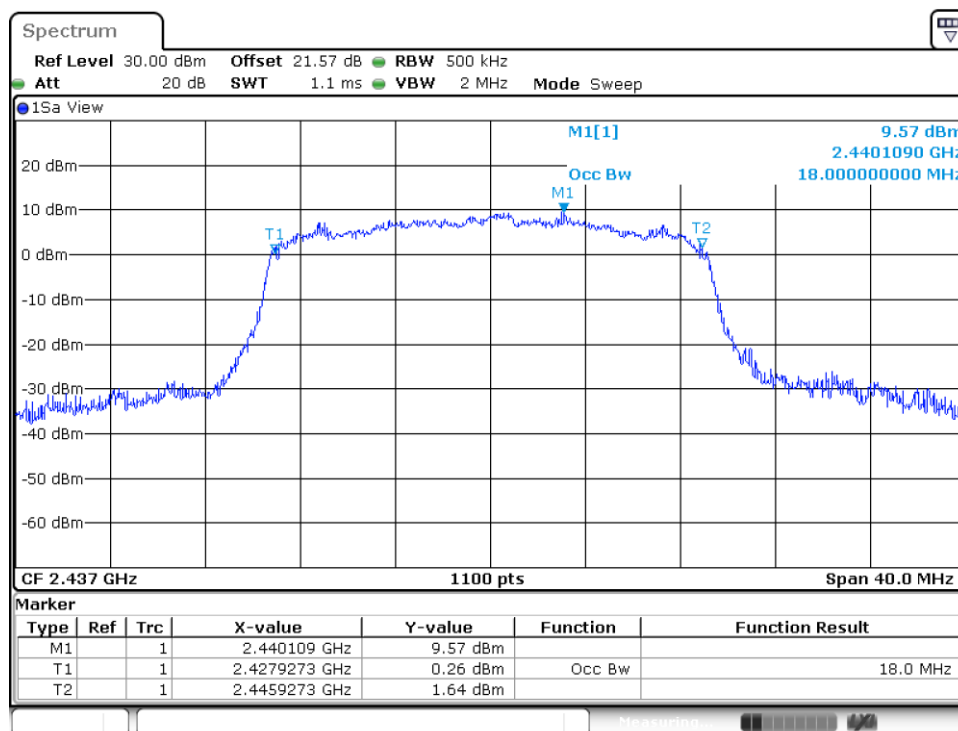

Date: 6.FEB.2026 03:23:53

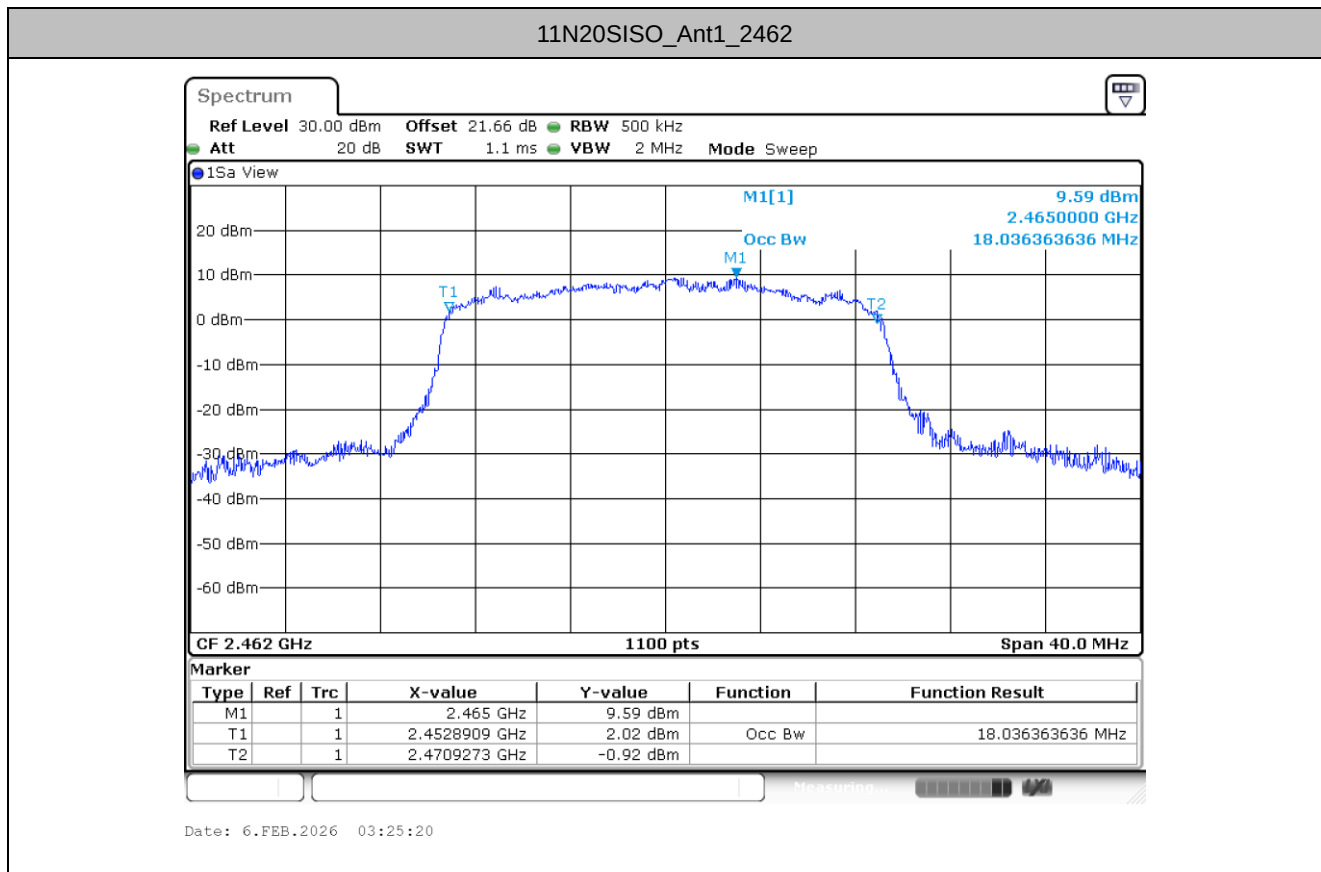




Maximum power spectral density

Test Result


TestMode	Antenna	Freq(MHz)	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-9.41	≤8.00	PASS
		2437	-9.55	≤8.00	PASS
		2462	-9.39	≤8.00	PASS
11G	Ant1	2412	-9.55	≤8.00	PASS
		2437	-8.78	≤8.00	PASS
		2462	-8.95	≤8.00	PASS
11N20SISO	Ant1	2412	-9.43	≤8.00	PASS
		2437	-8.30	≤8.00	PASS
		2462	-8.82	≤8.00	PASS



Test Graphs

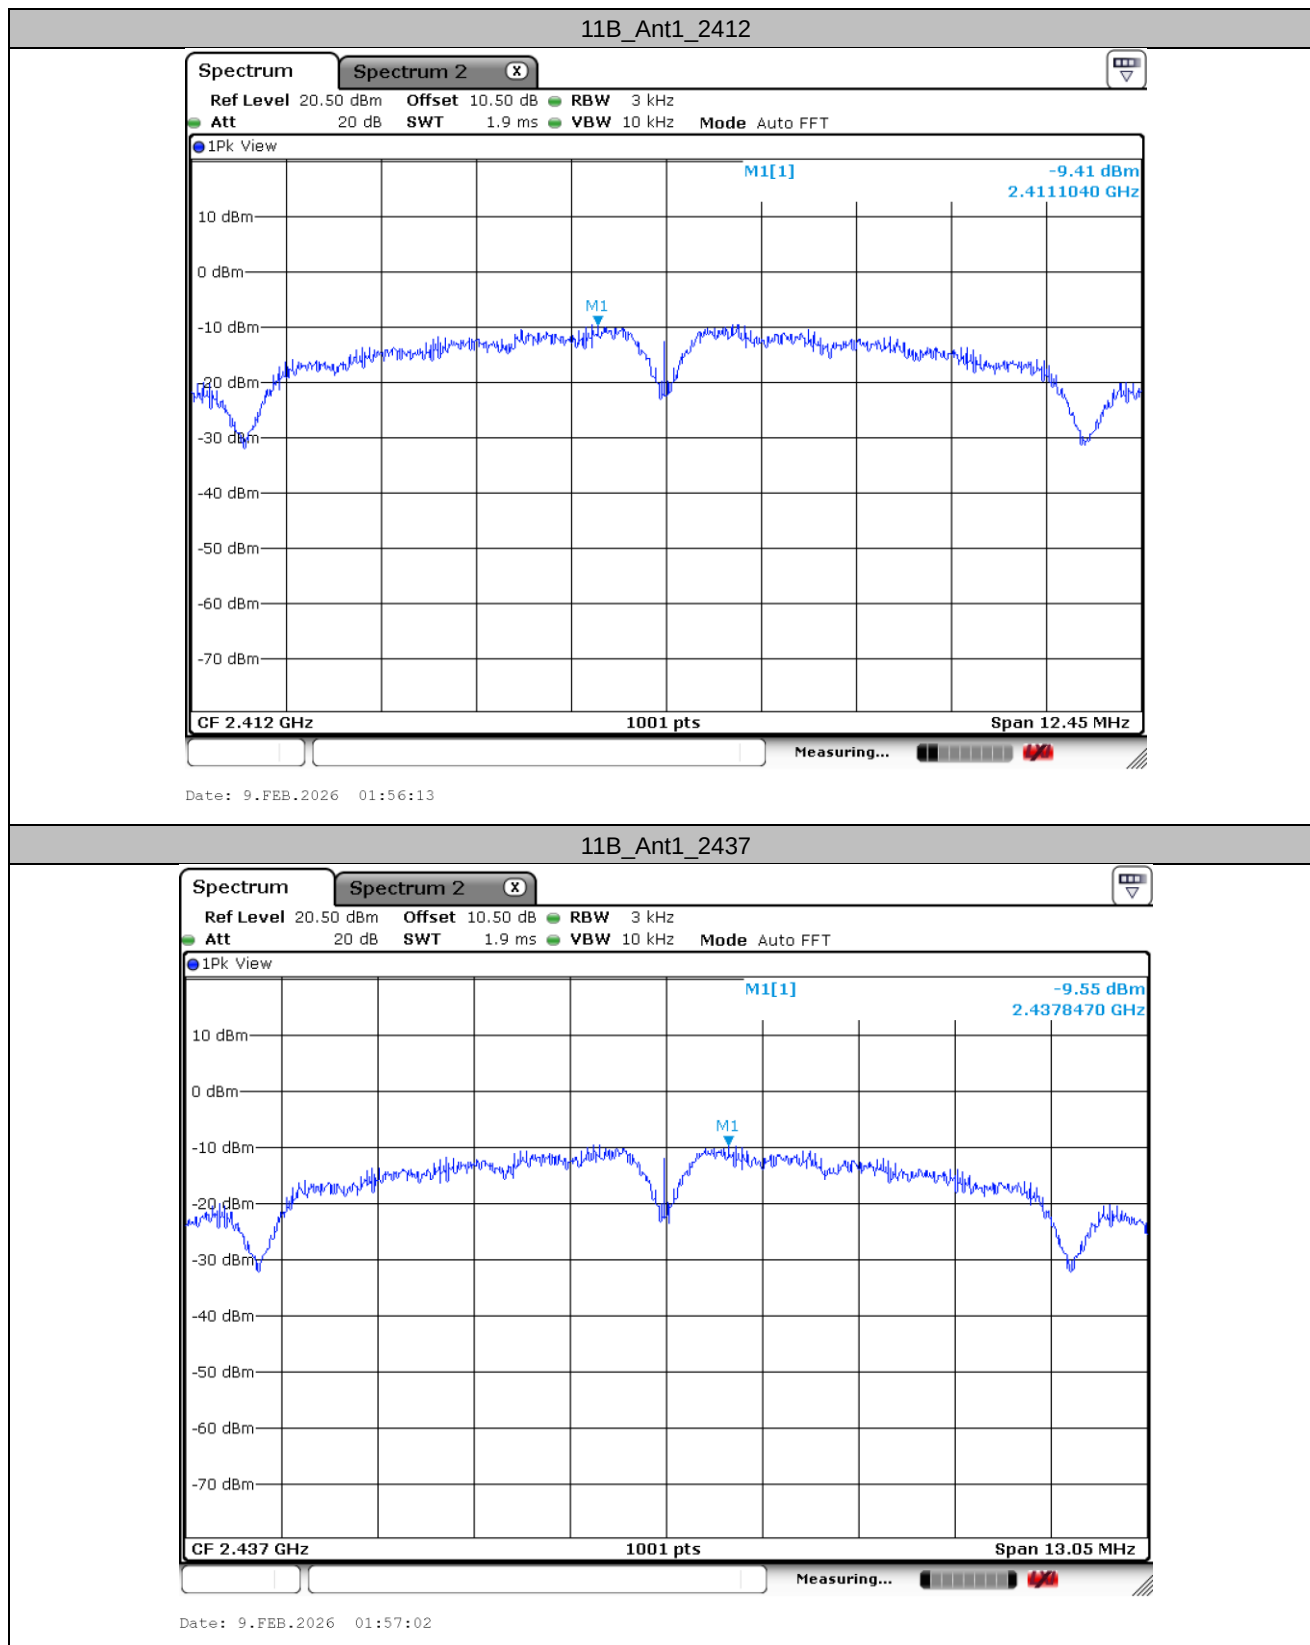


11B_Ant1_2462

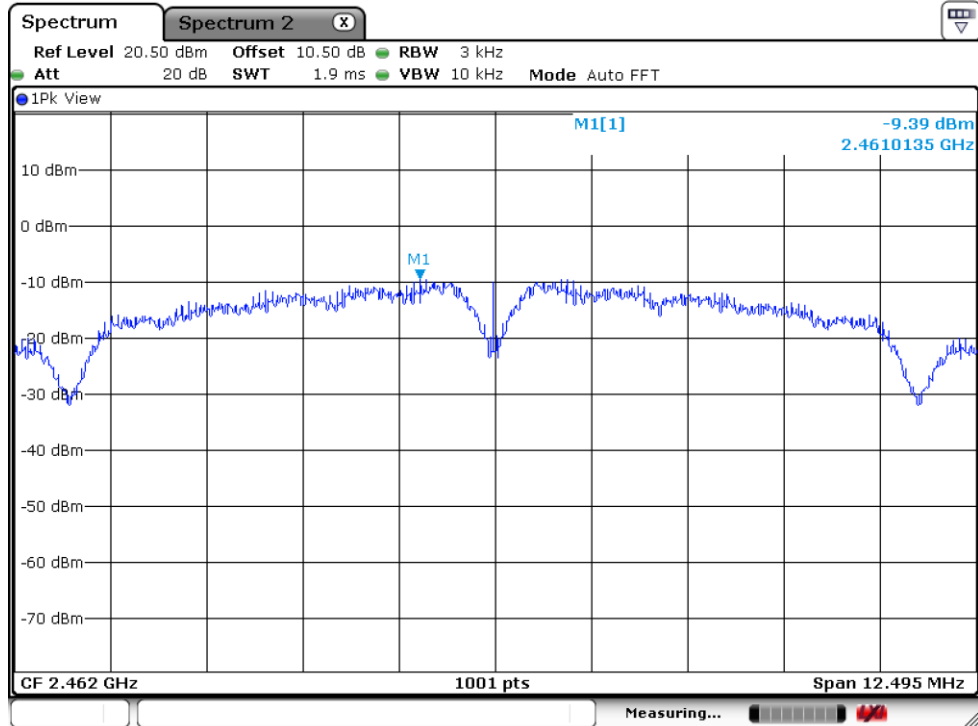

Date: 9.FEB.2026 01:57:41


11G_Ant1_2412

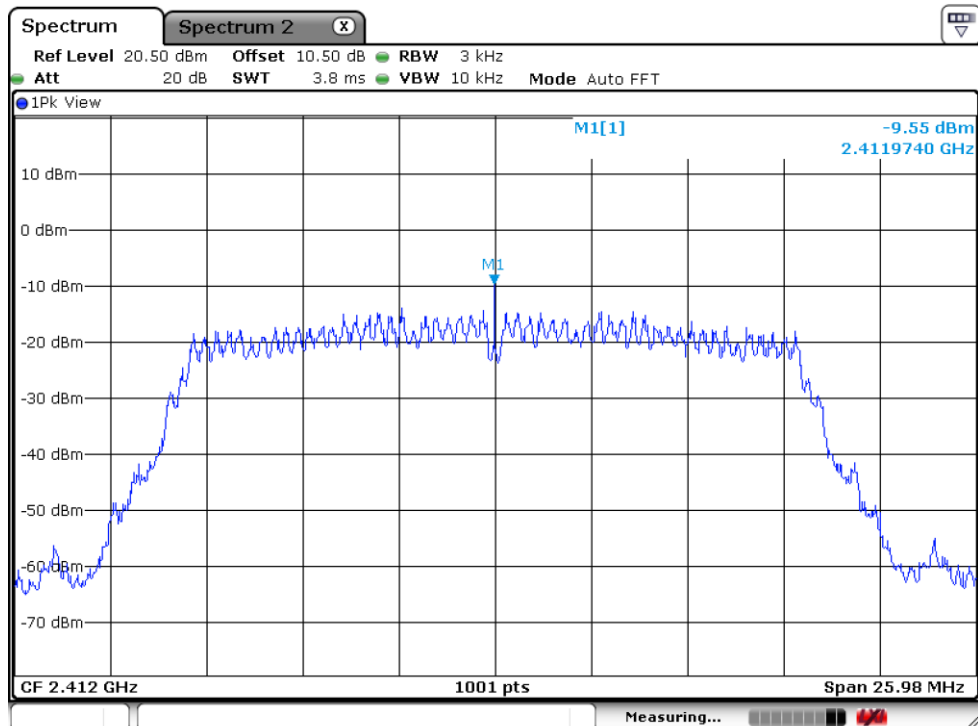

Date: 9.FEB.2026 02:03:03




11G_Ant1_2437

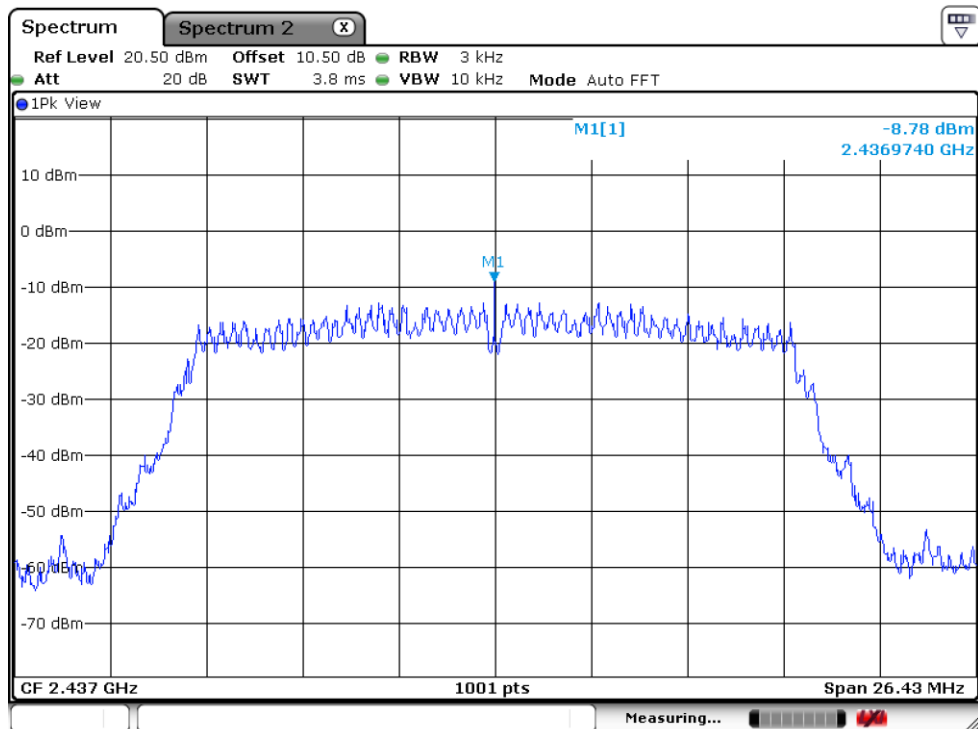

Date: 9.FEB.2026 02:04:11


11G_Ant1_2462

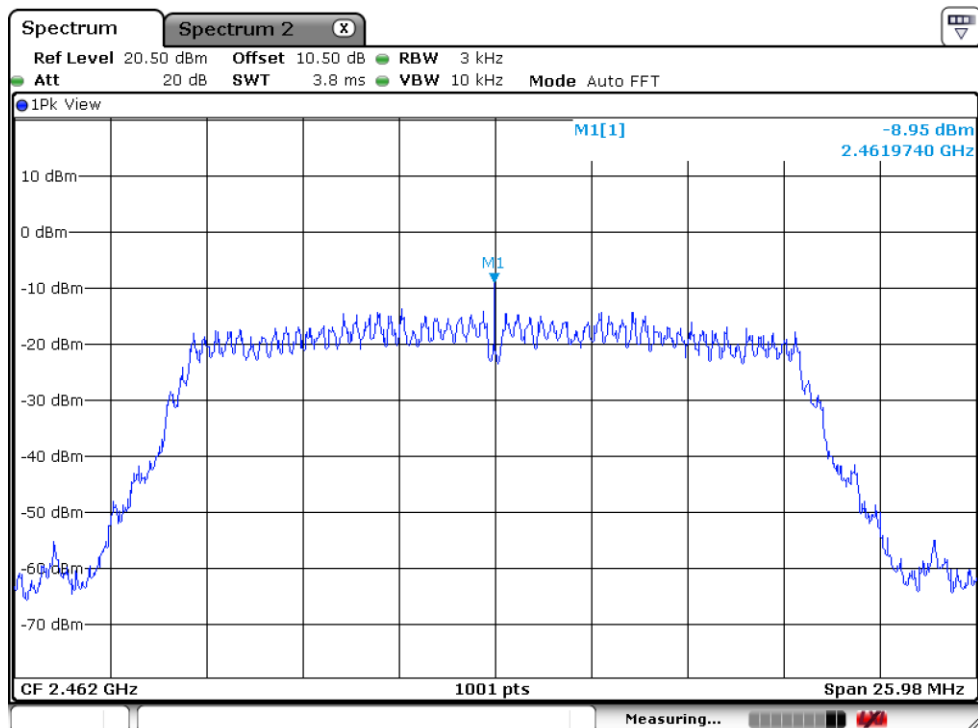

Date: 9.FEB.2026 02:05:08




11N20SISO_Ant1_2412

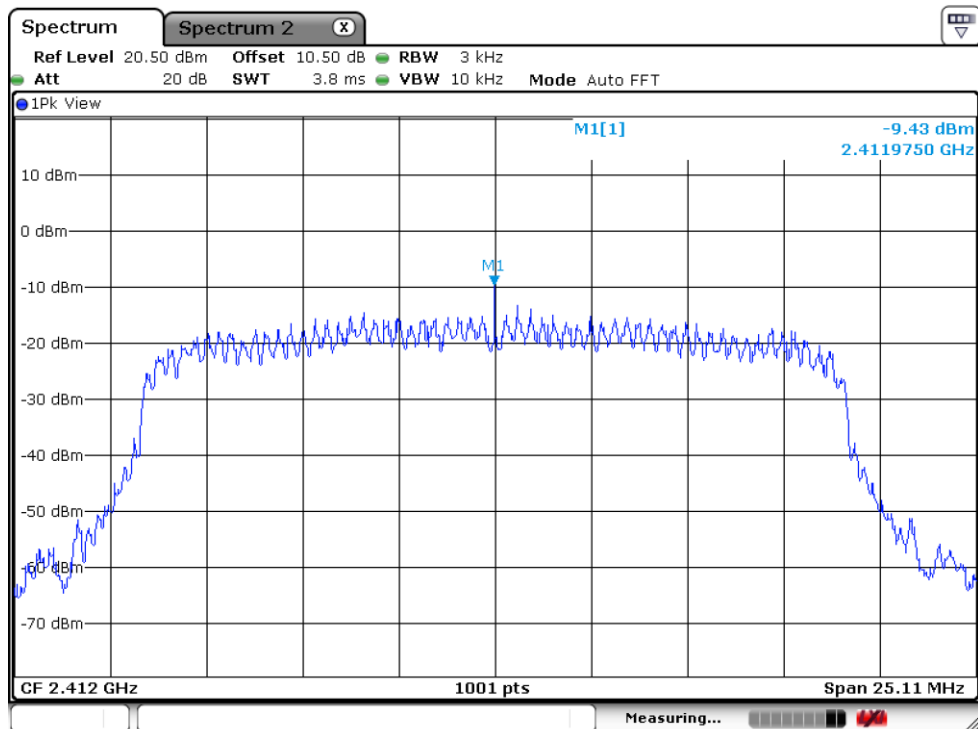


Date: 9.FEB.2026 02:06:03

11N20SISO_Ant1_2437

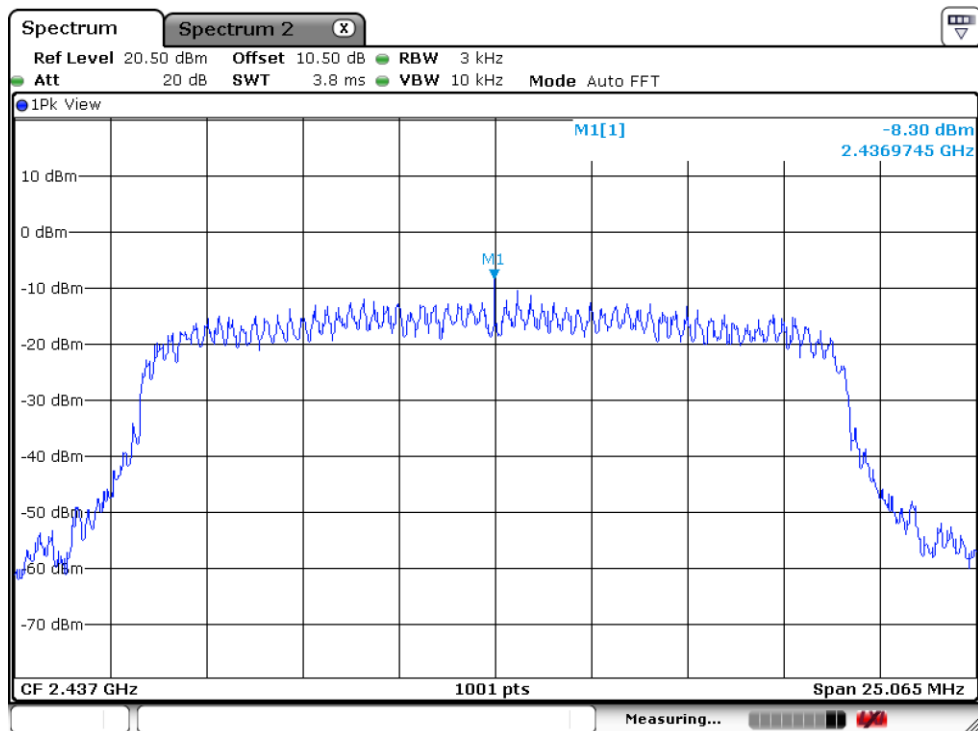

Date: 9.FEB.2026 02:07:07

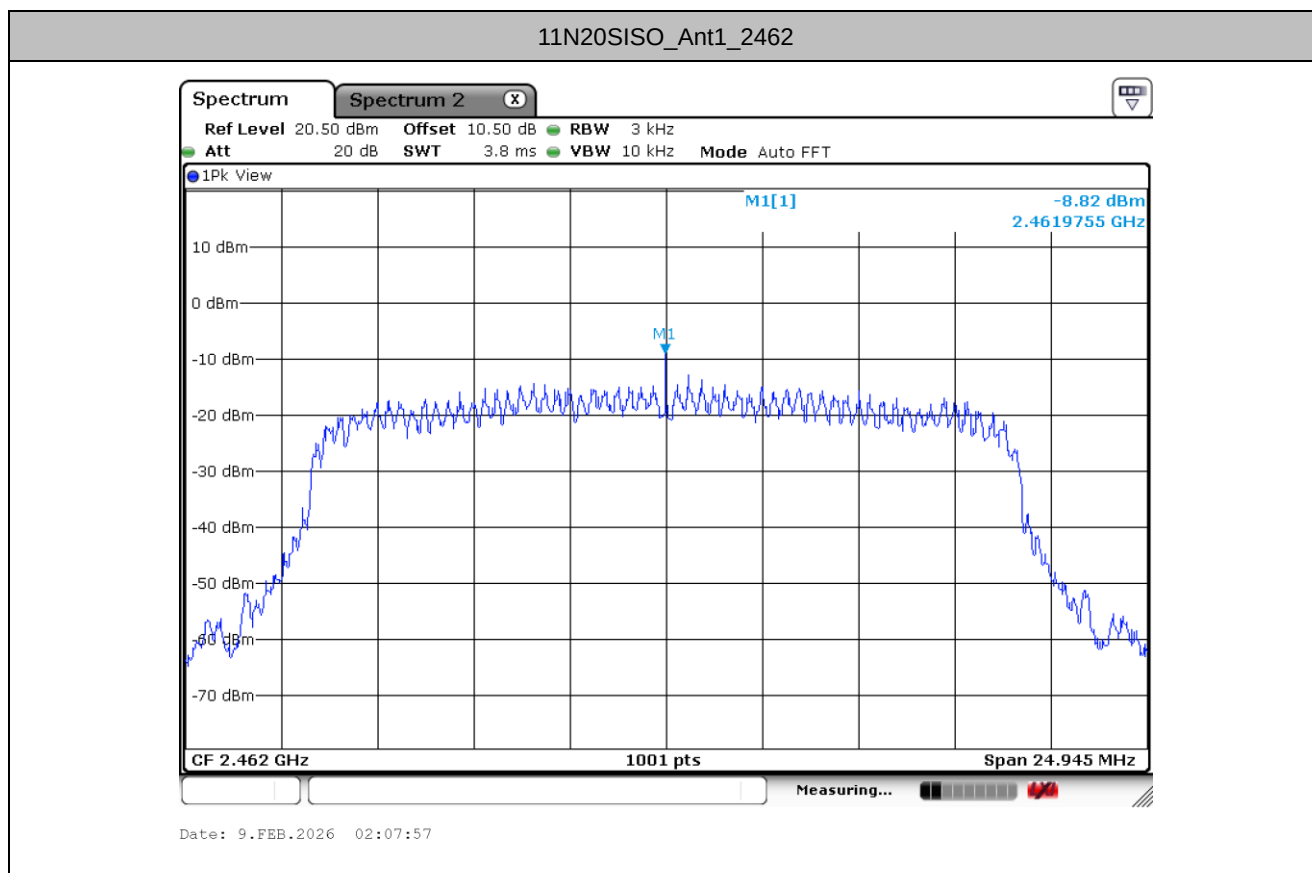




Reference level measurement

Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
11B	Ant1	2412	2412.49	7.78
		2437	2436.47	7.78
		2462	2462.99	7.41
11G	Ant1	2412	2411.96	4.03
		2437	2434.51	3.70
		2462	2458.24	4.09
11N20SISO	Ant1	2412	2414.47	3.59
		2437	2438.23	3.63
		2462	2464.49	3.97




Test Graphs

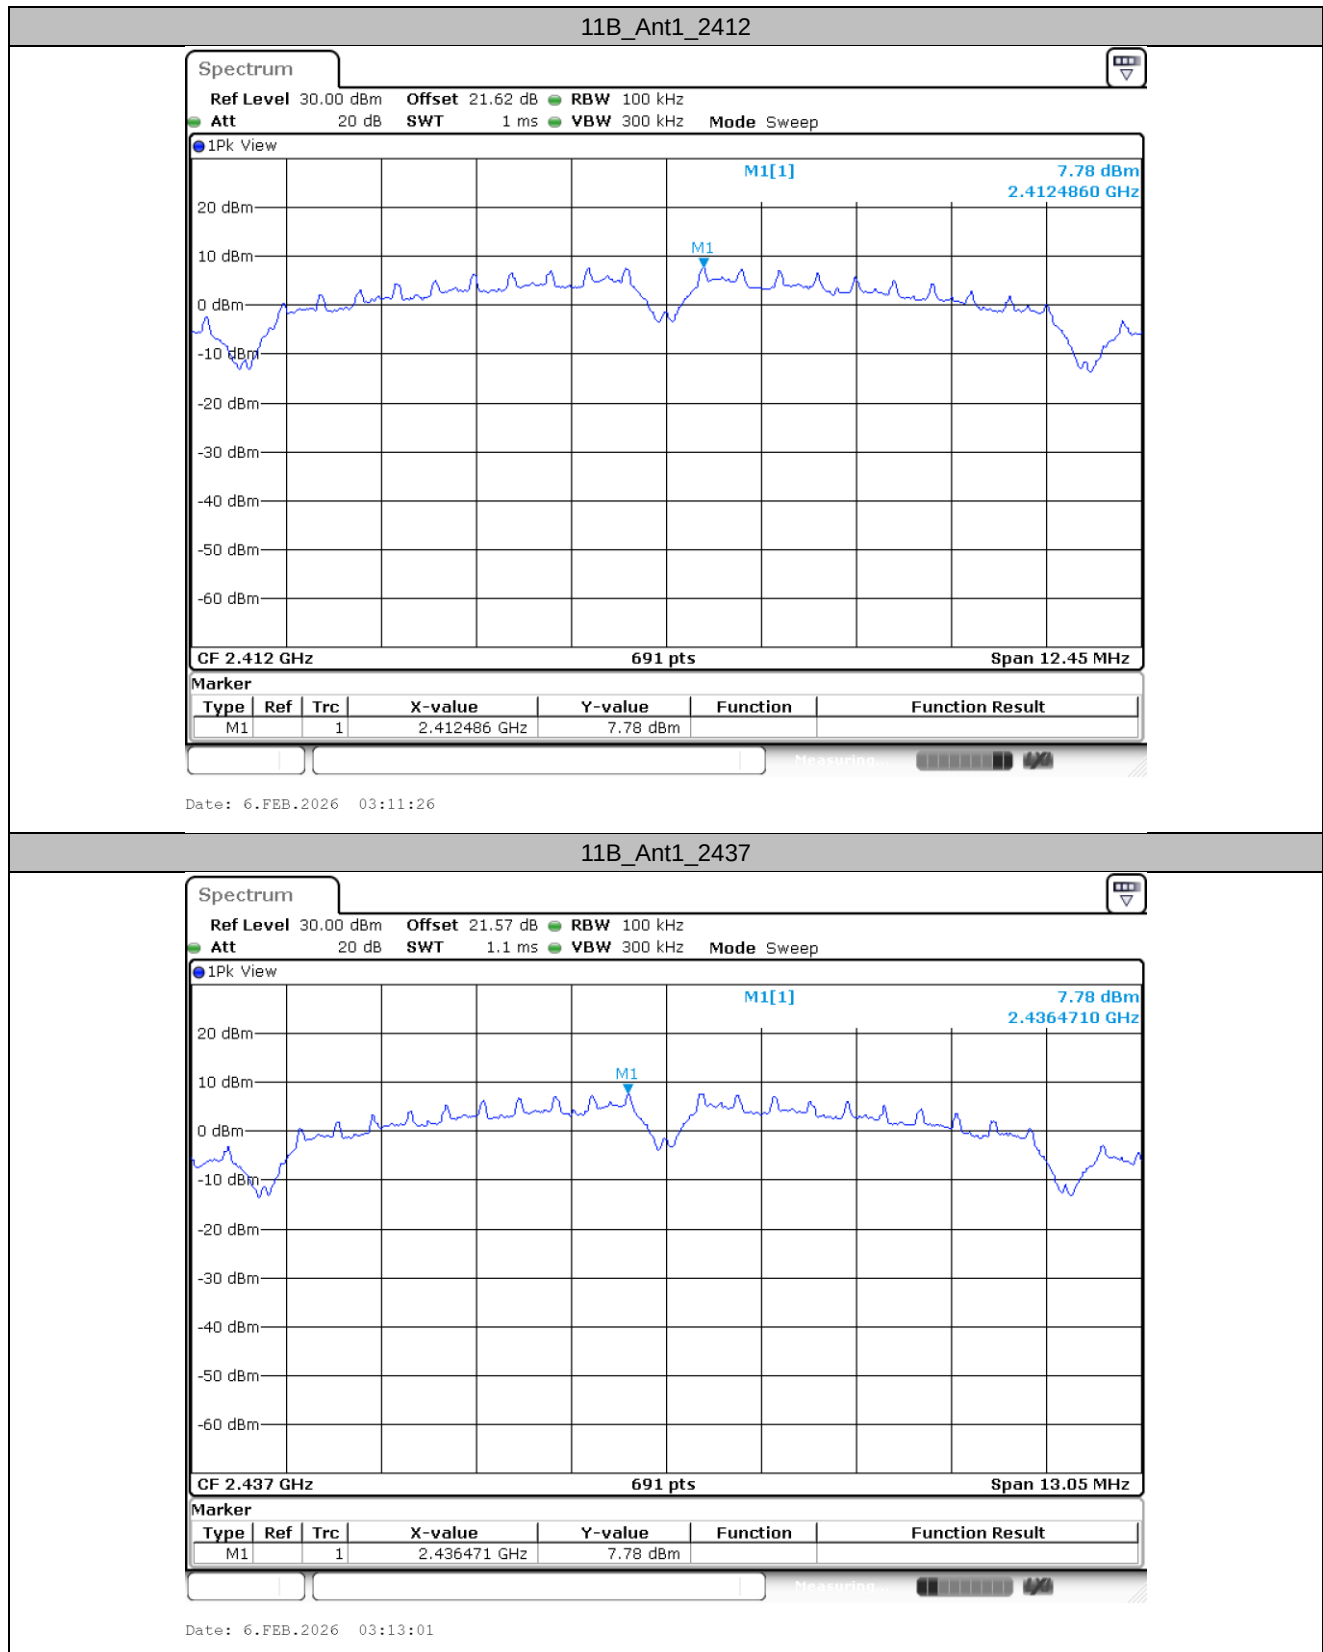




11B_Ant1_2462

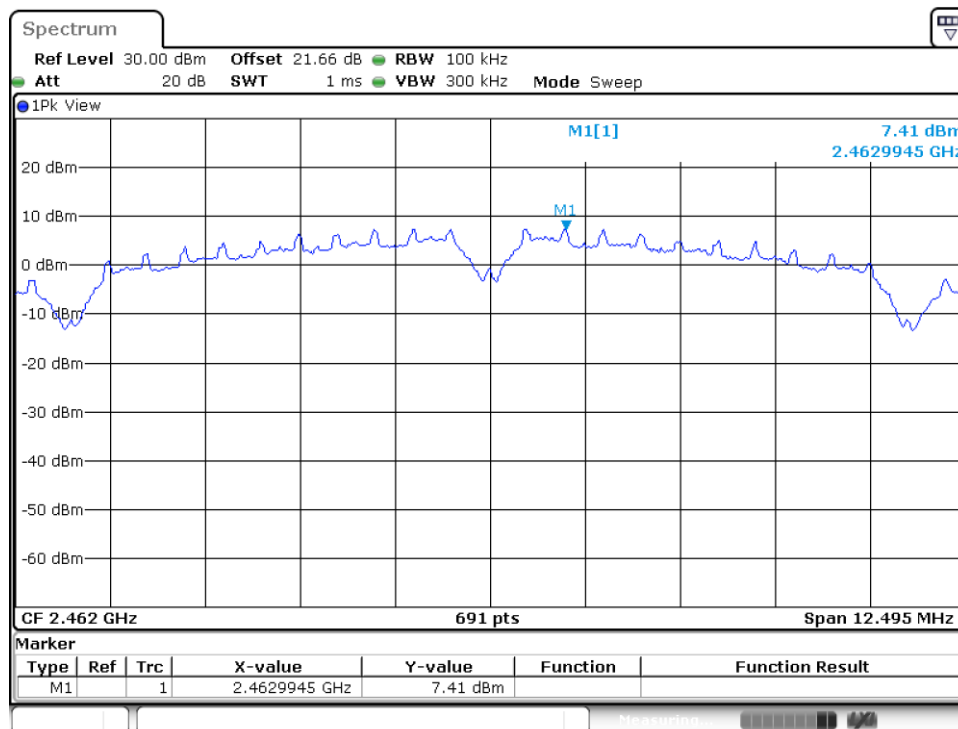

Date: 6.FEB.2026 03:14:17


11G_Ant1_2412

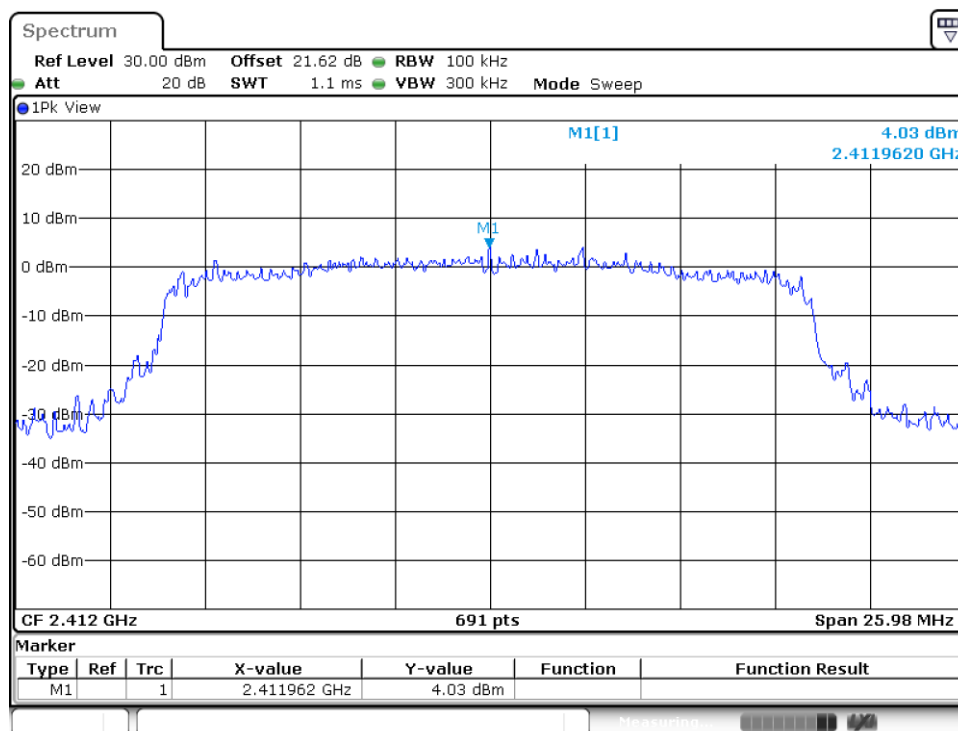


Date: 6.FEB.2026 03:17:47



11G_Ant1_2437

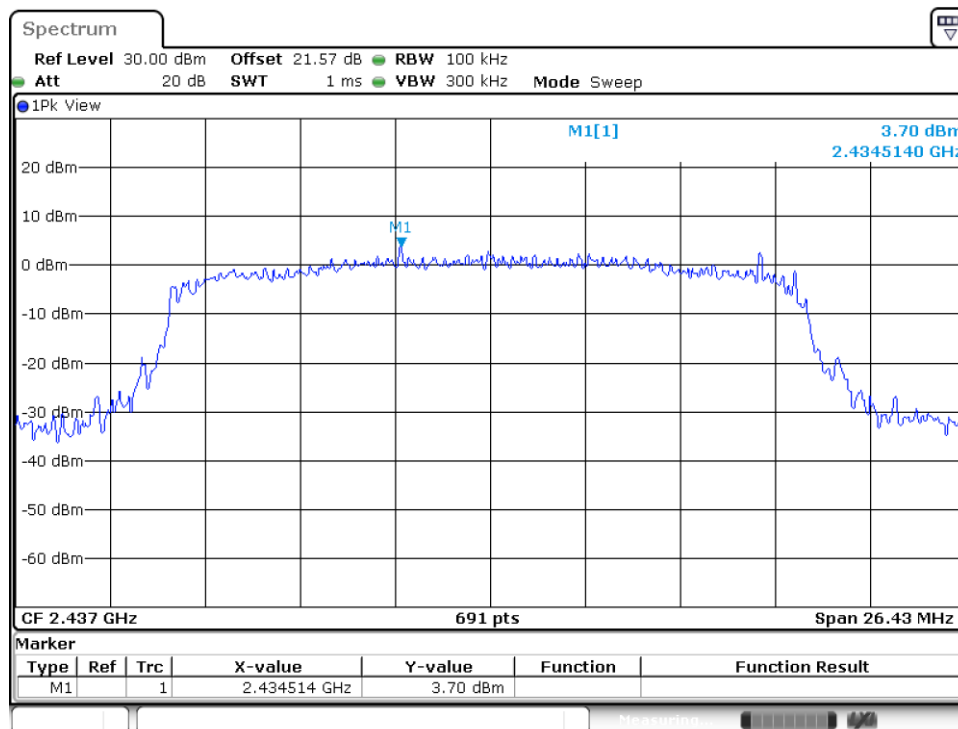


11G_Ant1_2462

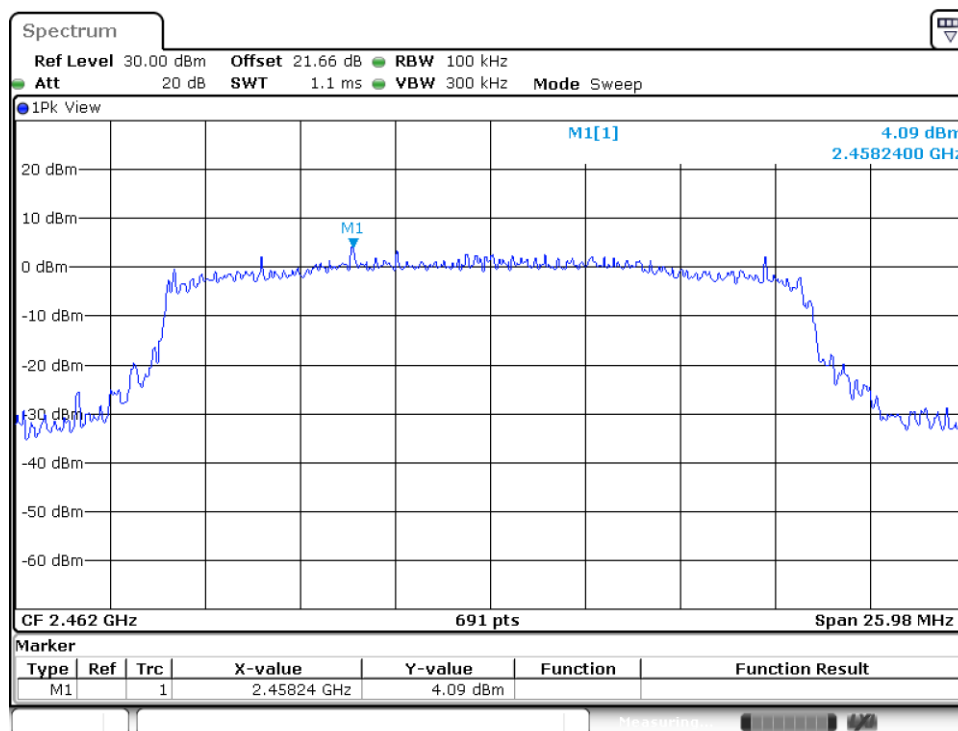




11N20SISO_Ant1_2412

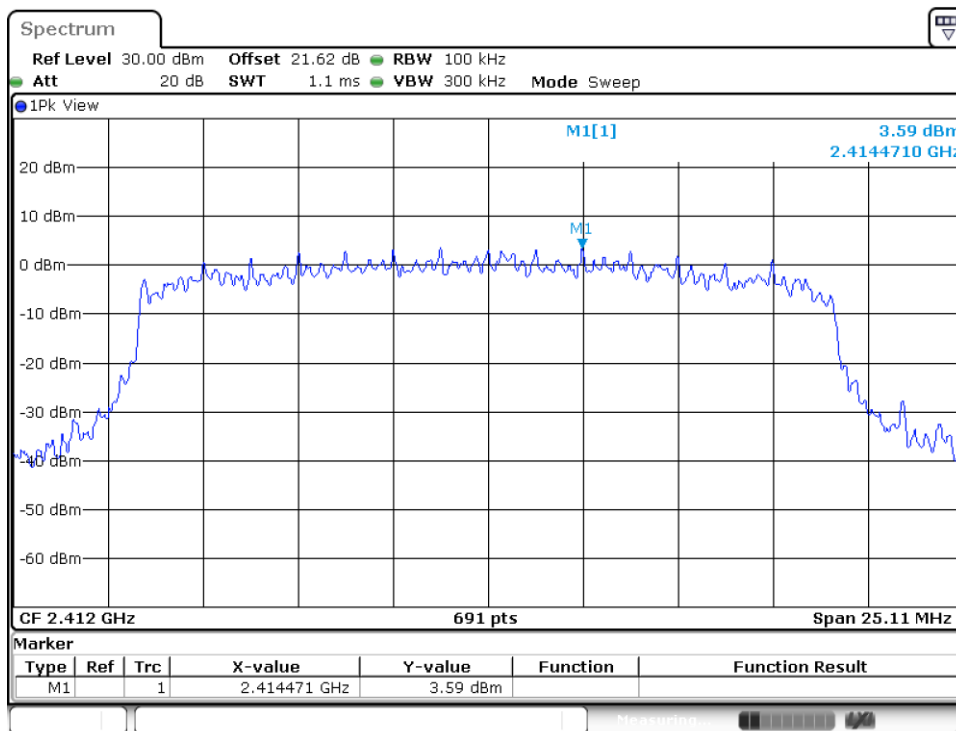


11N20SISO_Ant1_2437

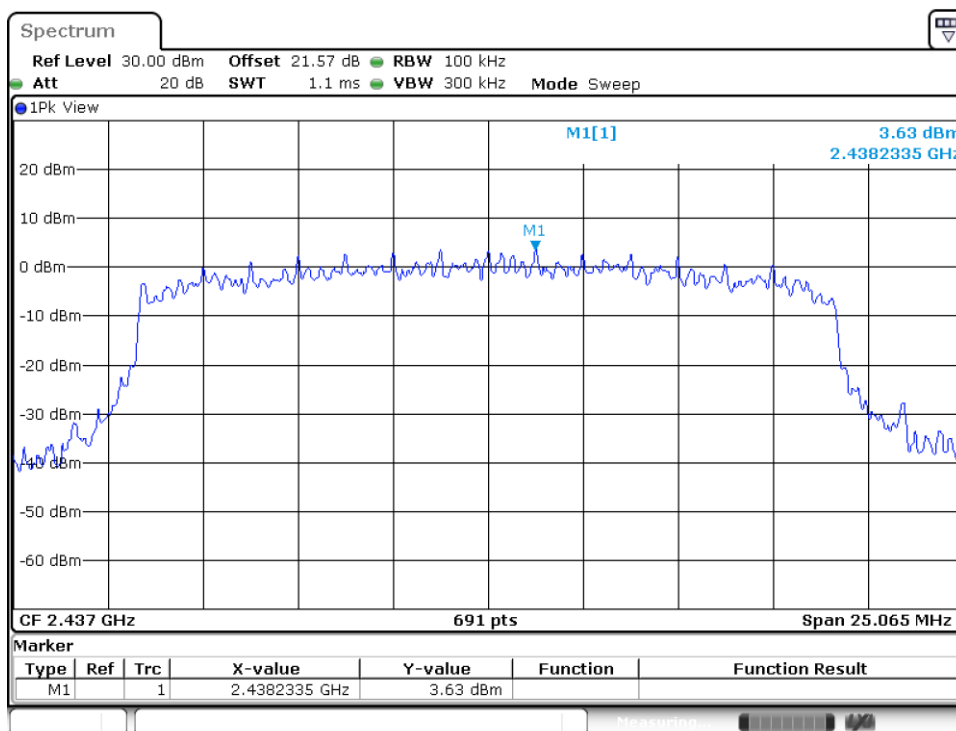



11N20SISO_Ant1_2462

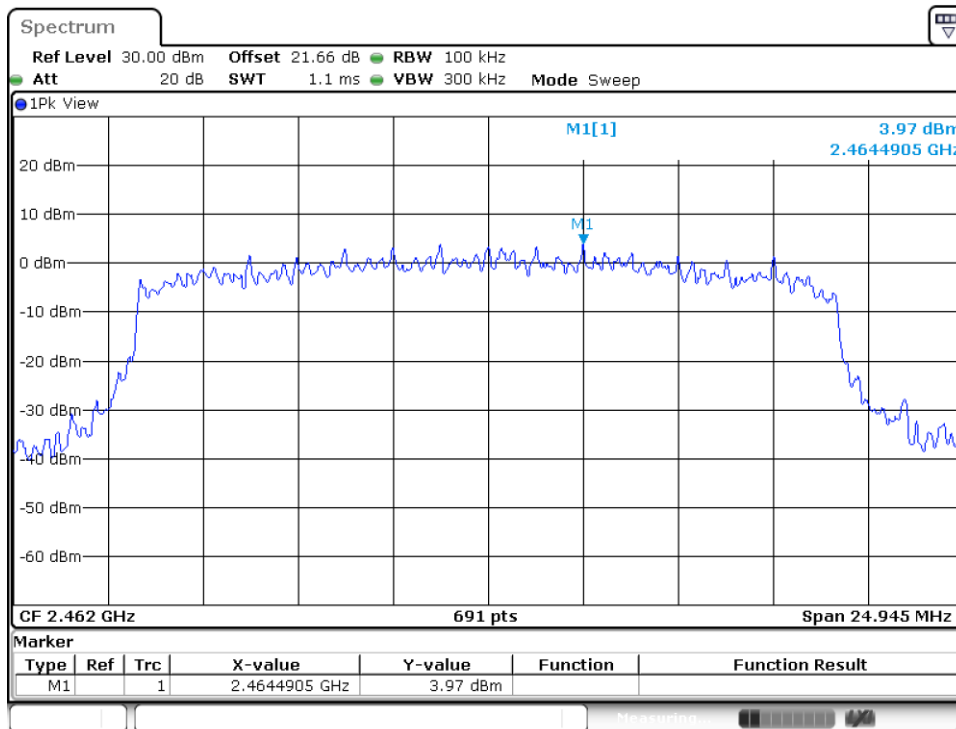

Date: 6.FEB.2026 03:25:43




Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm/100KHz]	Result[dBm/100KHz]	Limit[dBm/100KHz]	Verdict
11B	Ant1	Low	2412	7.78	-33.59	≤ -12.22	PASS
		High	2462	7.41	-42.65	≤ -12.59	PASS
11G	Ant1	Low	2412	4.03	-27.3	≤ -15.97	PASS
		High	2462	4.09	-40.51	≤ -15.91	PASS
11N20SISO	Ant1	Low	2412	3.59	-35.79	≤ -16.41	PASS
		High	2462	3.97	-41.31	≤ -16.03	PASS




Test Graphs

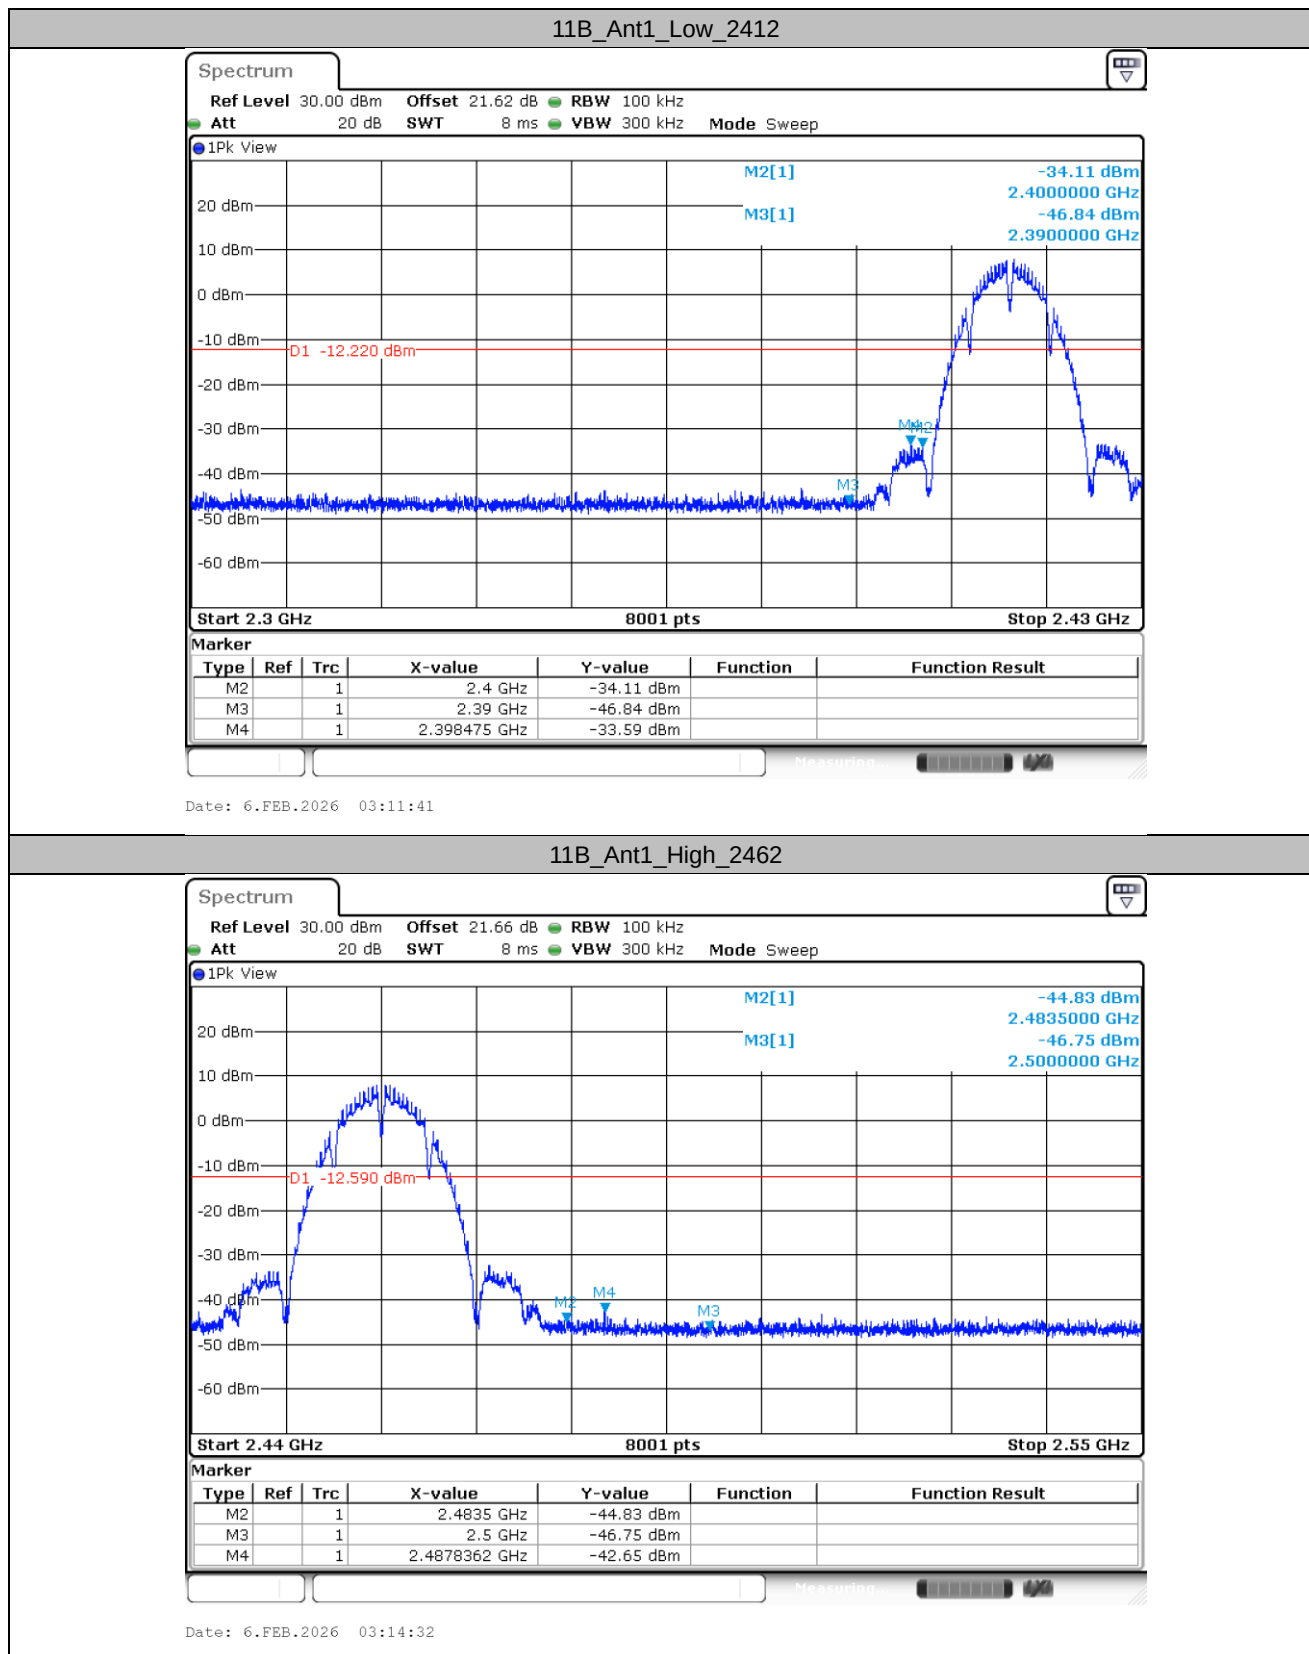




11G_Ant1_Low_2412

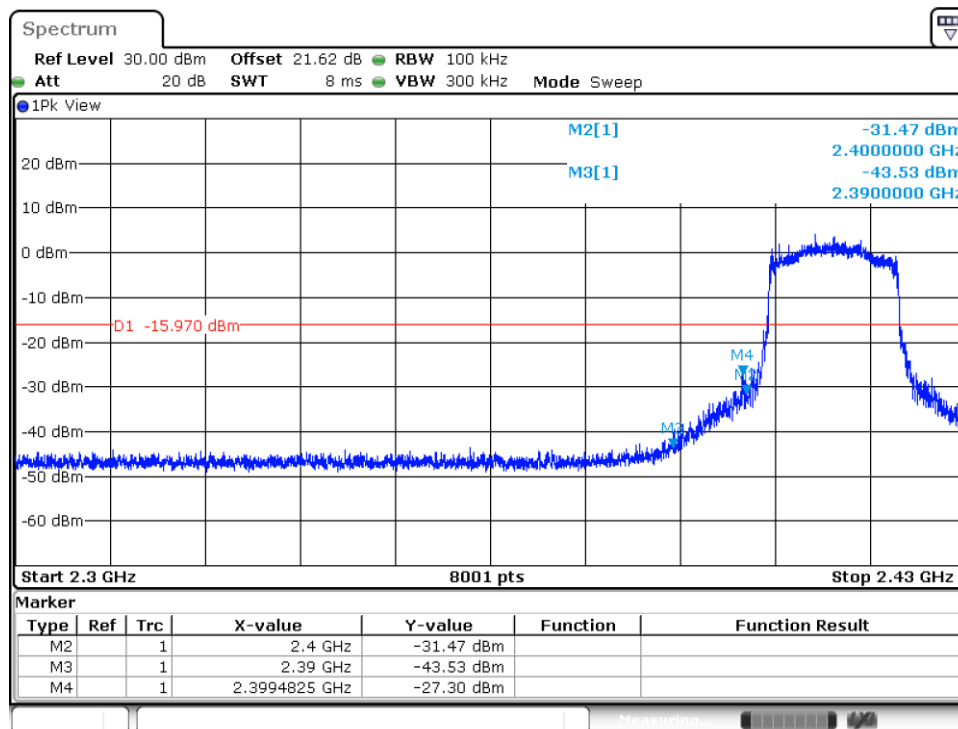


11G_Ant1_High_2462

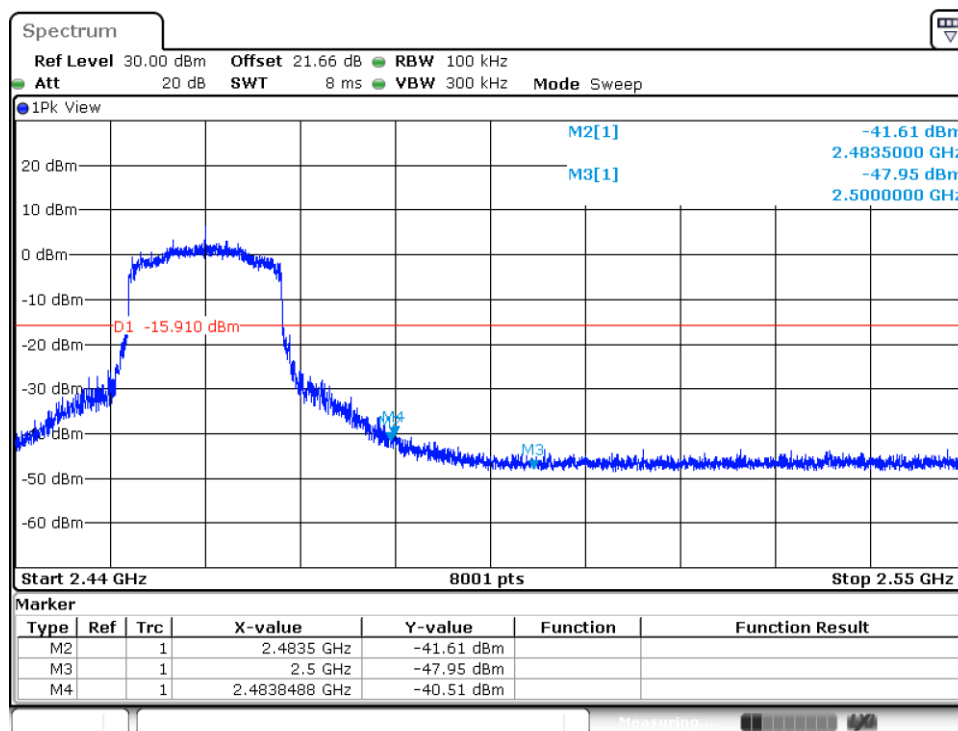




11N20SISO_Ant1_Low_2412

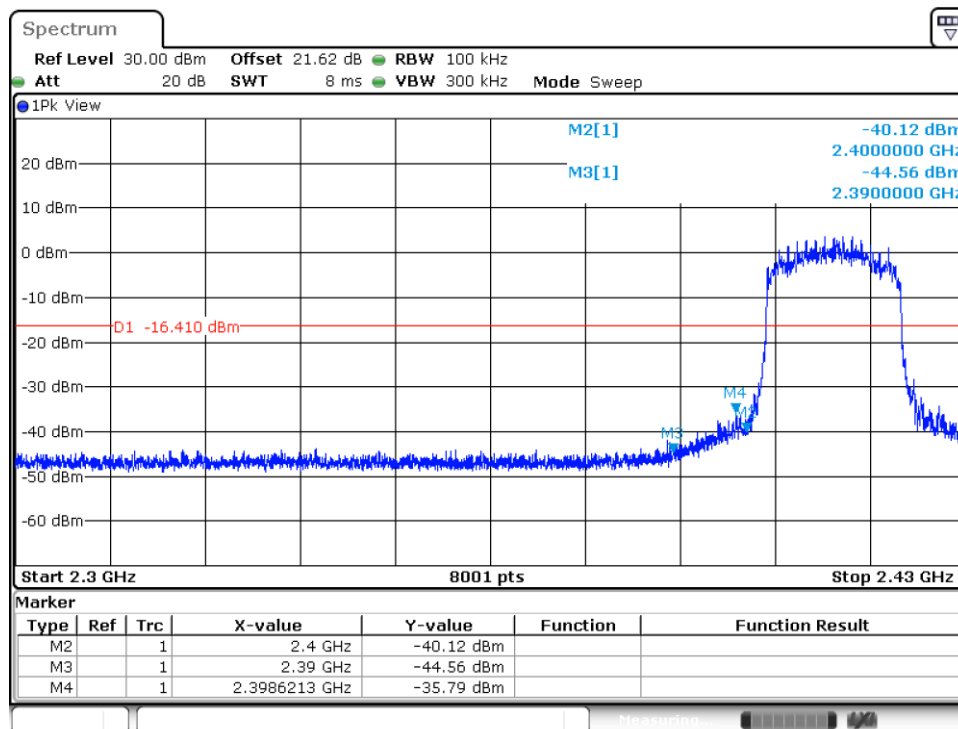

11N20SISO_Ant1_High_2462

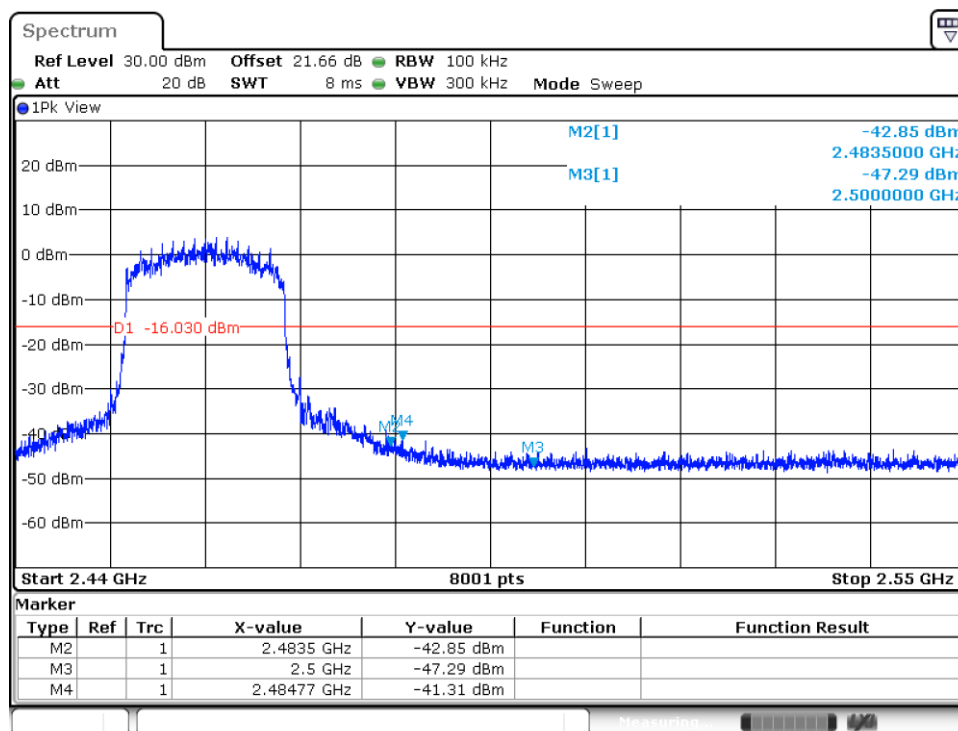




Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [Mhz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
11B	Ant1	2412	30~1000	7.78	-49.92	≤-12.22	PASS
			1000~26500	7.78	-37.52	≤-12.22	PASS
		2437	30~1000	7.78	-49.43	≤-12.22	PASS
			1000~26500	7.78	-39	≤-12.22	PASS
		2462	30~1000	7.41	-49.85	≤-12.59	PASS
			1000~26500	7.41	-39.08	≤-12.59	PASS
11G	Ant1	2412	30~1000	4.03	-49.5	≤-15.97	PASS
			1000~26500	4.03	-43.04	≤-15.97	PASS
		2437	30~1000	3.70	-49.6	≤-16.3	PASS
			1000~26500	3.70	-42.77	≤-16.3	PASS
		2462	30~1000	4.09	-48.83	≤-15.91	PASS
			1000~26500	4.09	-42.26	≤-15.91	PASS
11N20SISO	Ant1	2412	30~1000	3.59	-50.17	≤-16.41	PASS
			1000~26500	3.59	-42.9	≤-16.41	PASS
		2437	30~1000	3.63	-50.04	≤-16.37	PASS
			1000~26500	3.63	-42.86	≤-16.37	PASS
		2462	30~1000	3.97	-49.58	≤-16.03	PASS
			1000~26500	3.97	-43.52	≤-16.03	PASS




Test Graphs

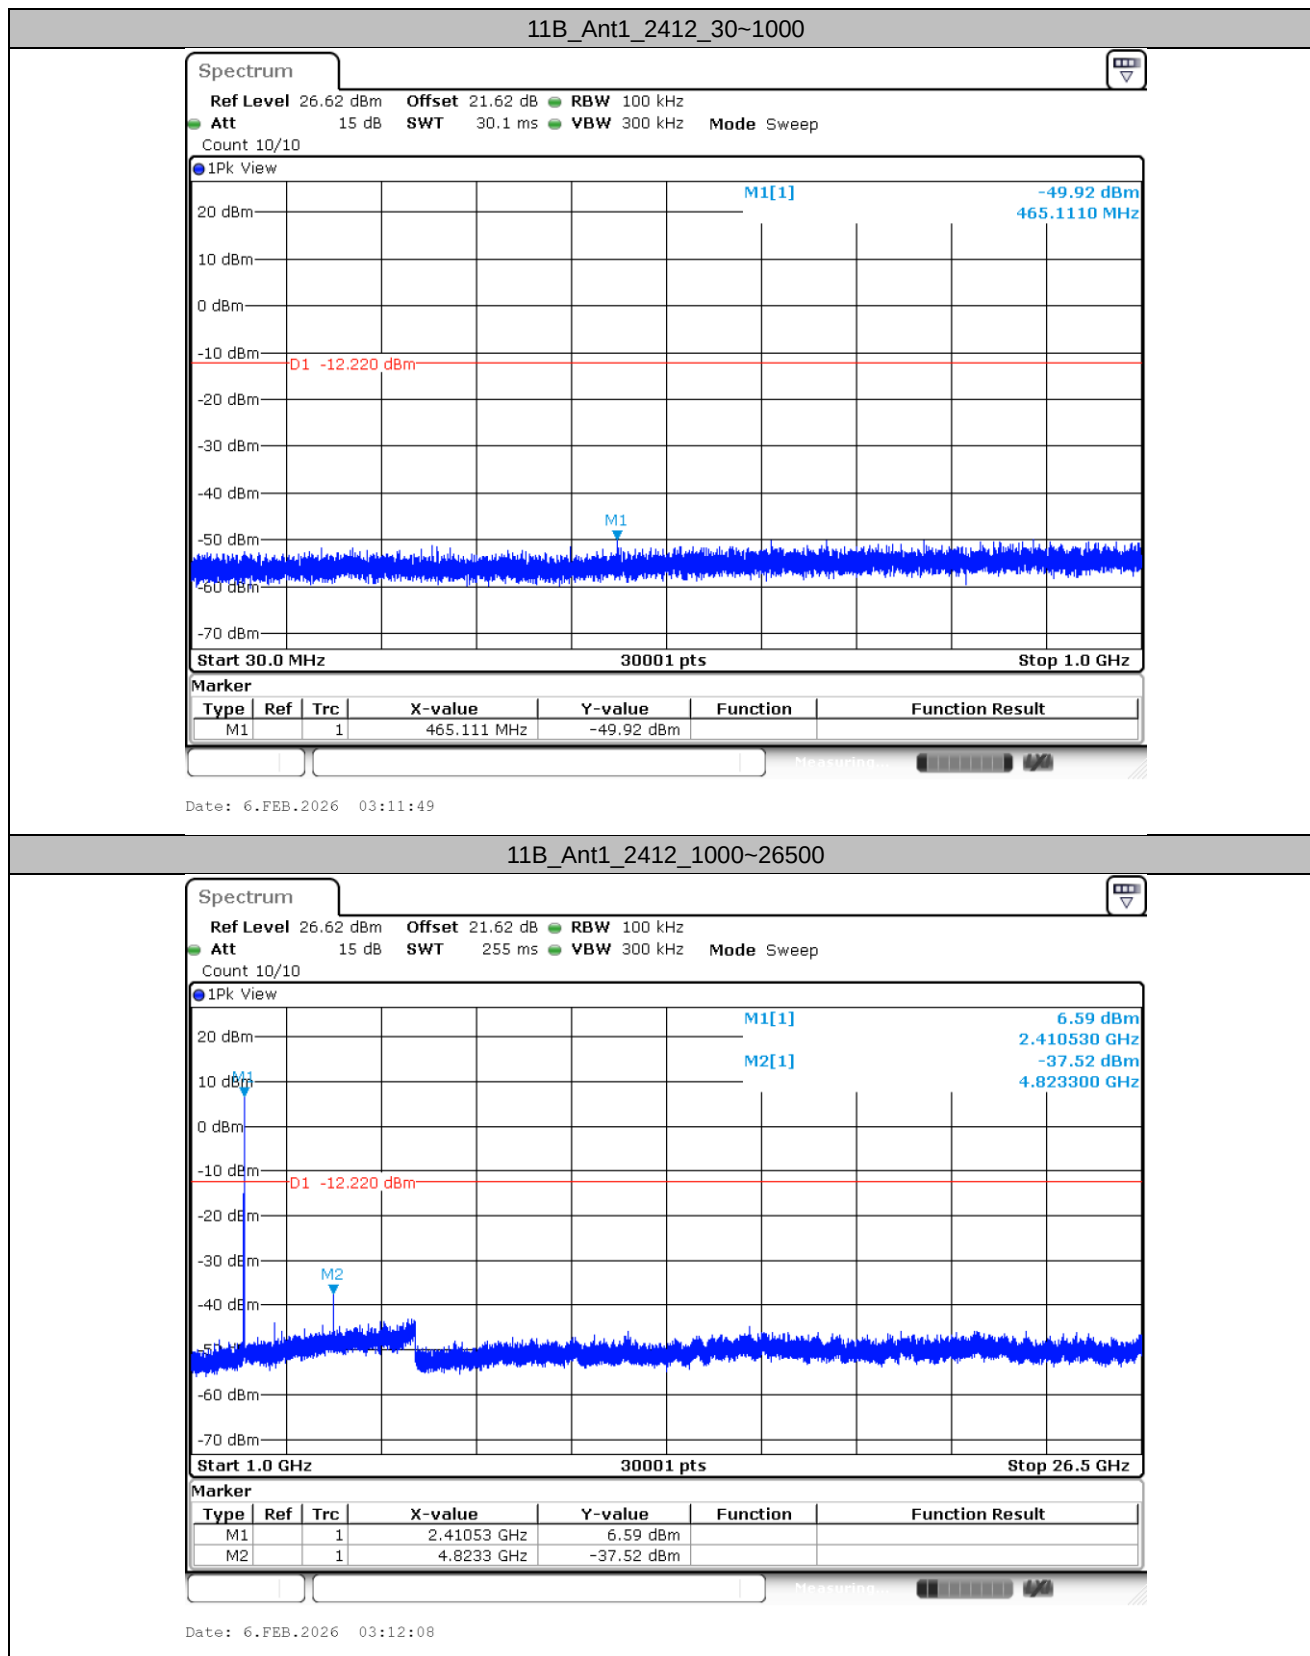




11B_Ant1_2437_30~1000

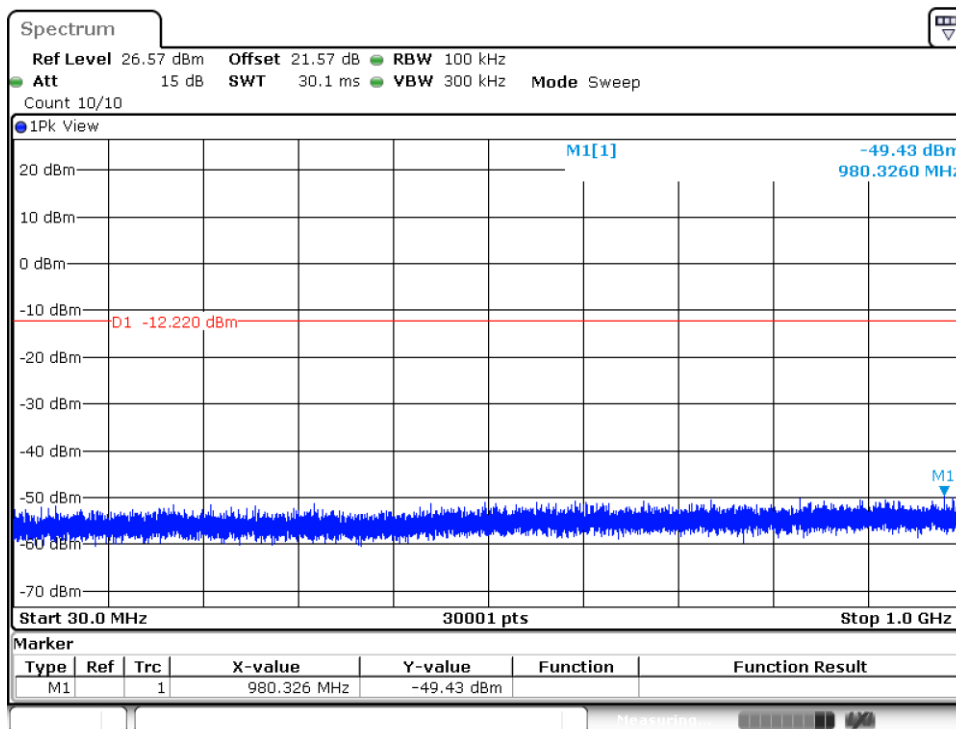


11B_Ant1_2437_1000~26500

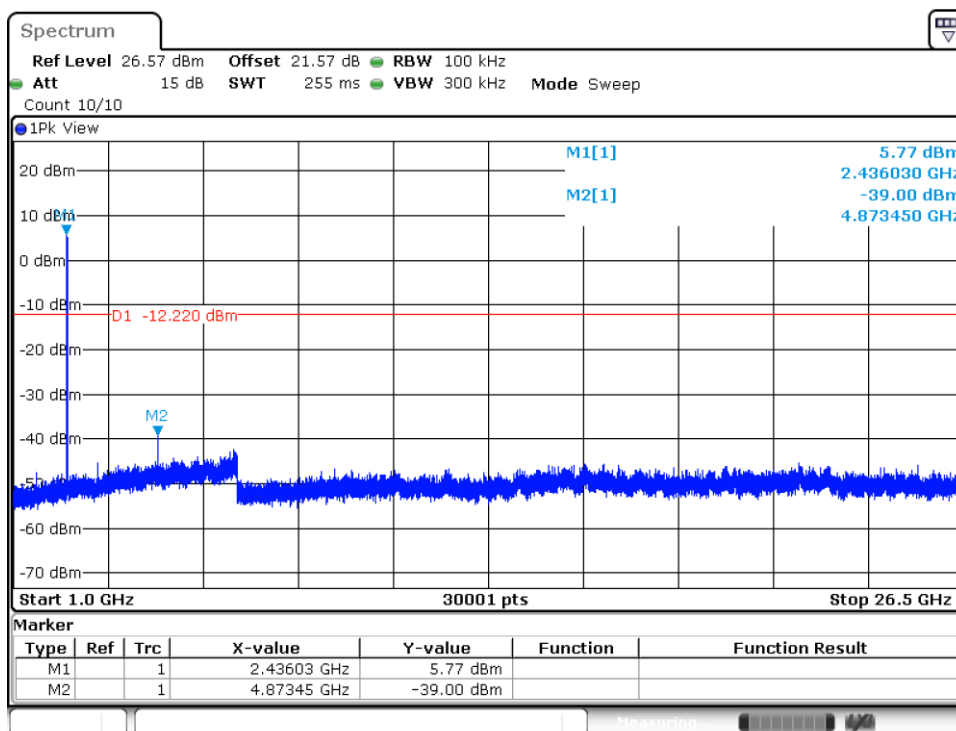




11B_Ant1_2462_30~1000

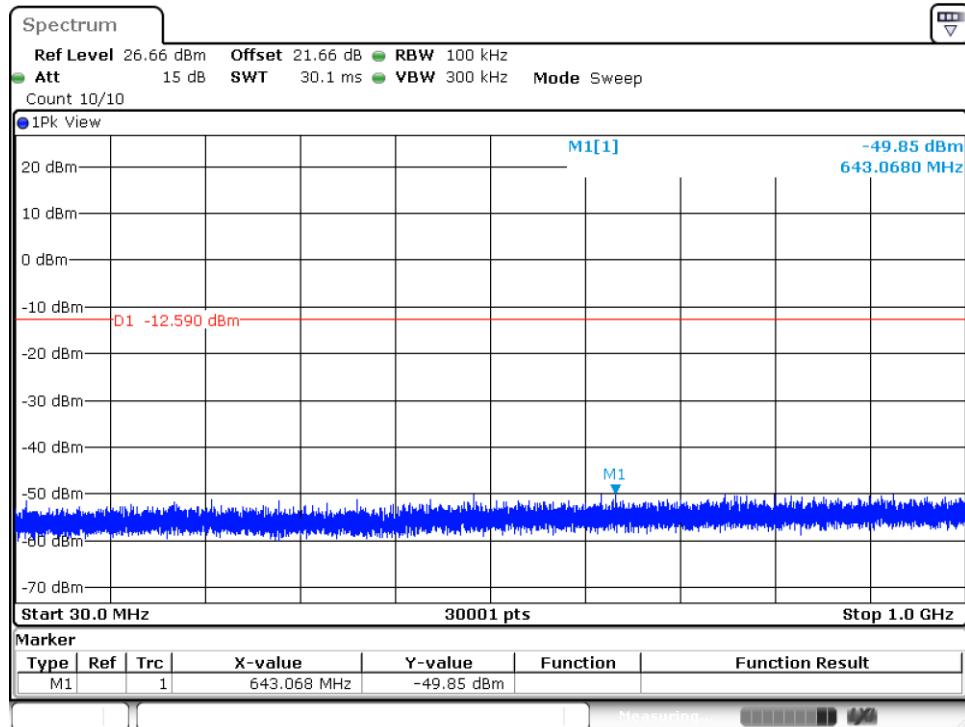


11B_Ant1_2462_1000~26500

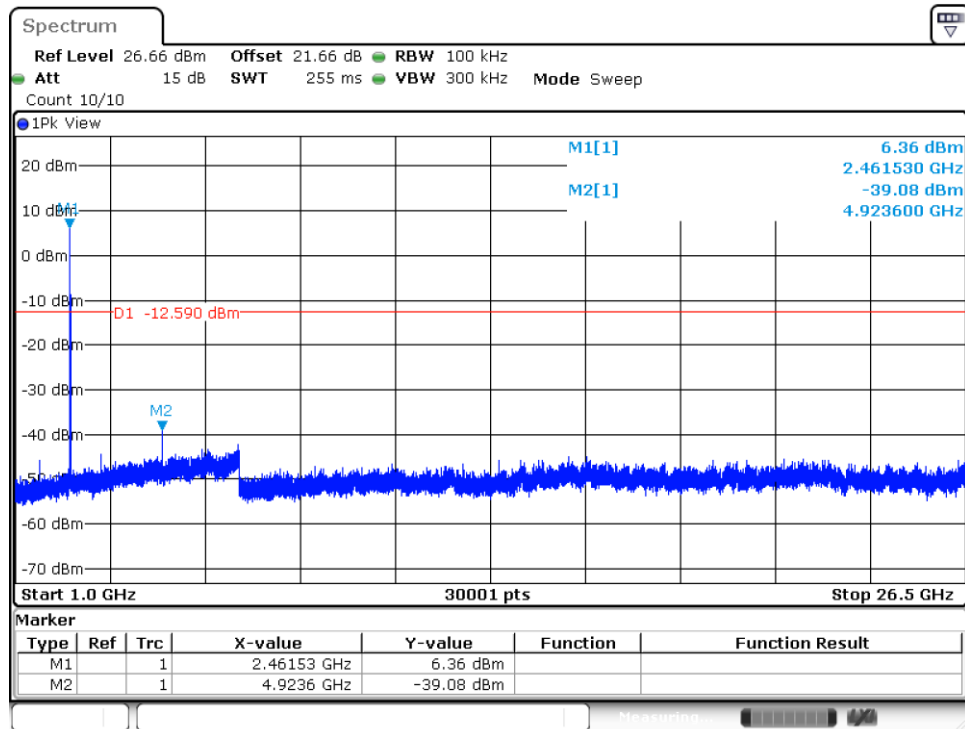




11G_Ant1_2412_30~1000

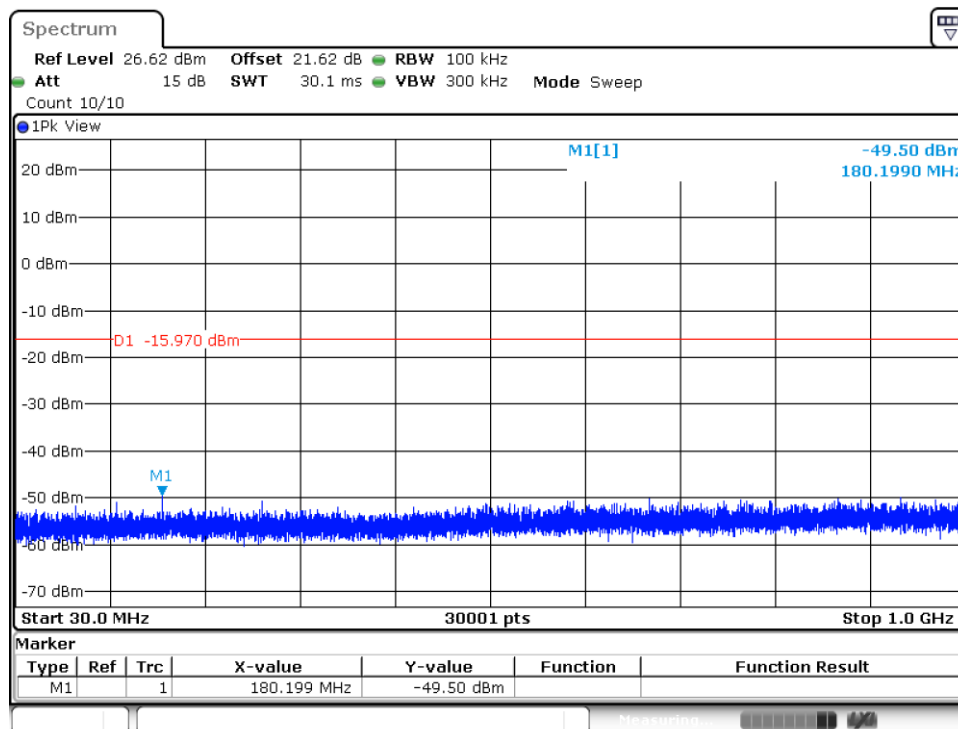


11G_Ant1_2412_1000~26500

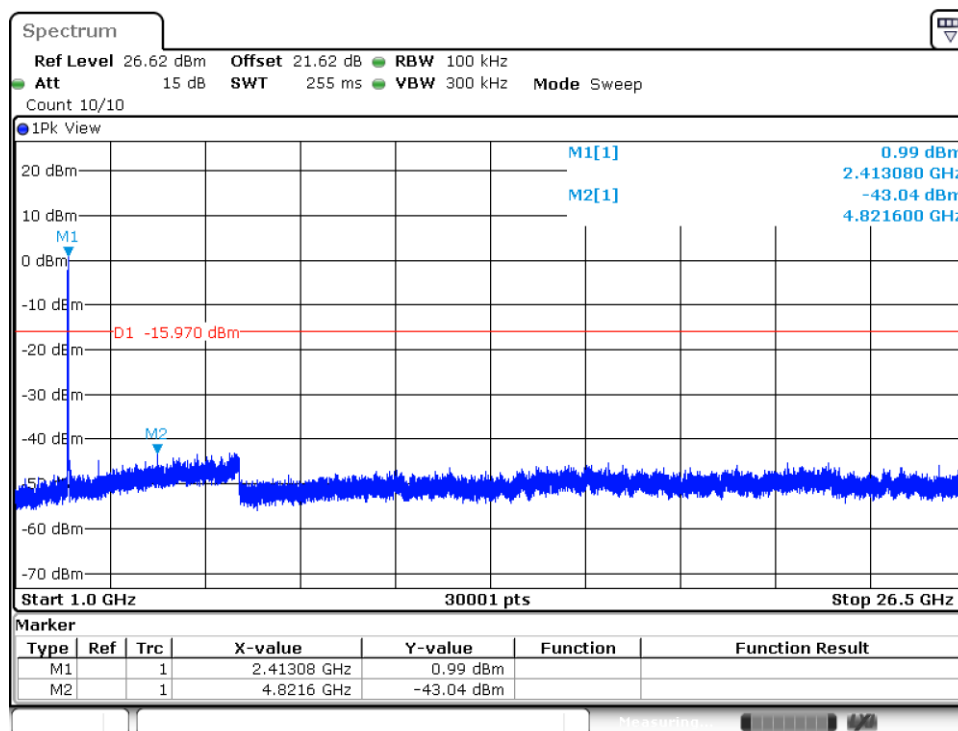




11G_Ant1_2437_30~1000

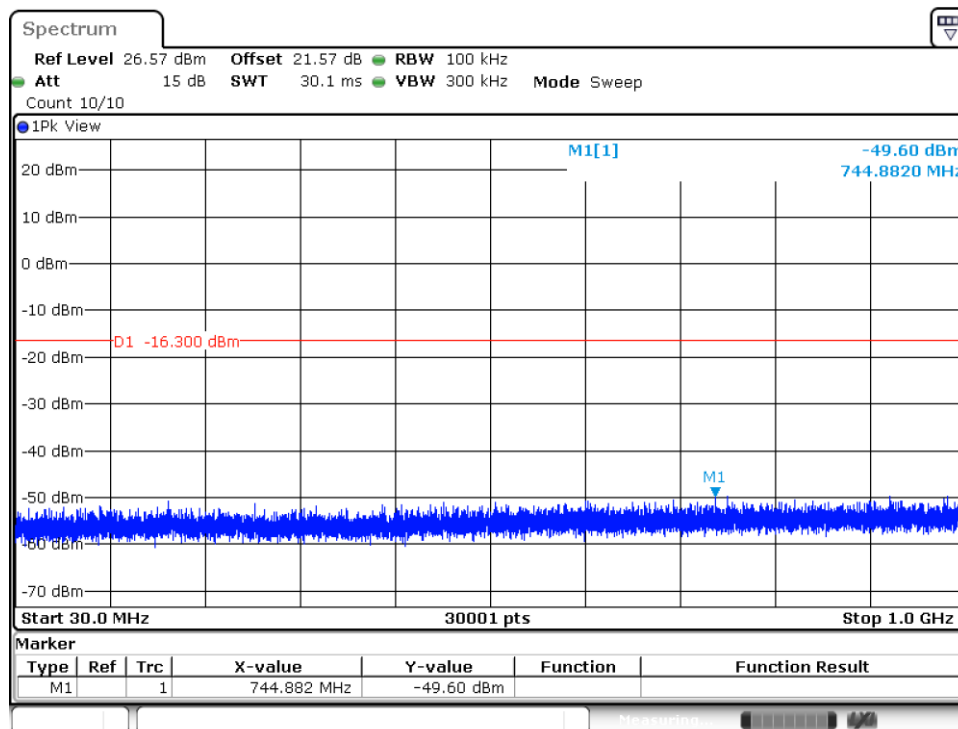


11G_Ant1_2437_1000~26500

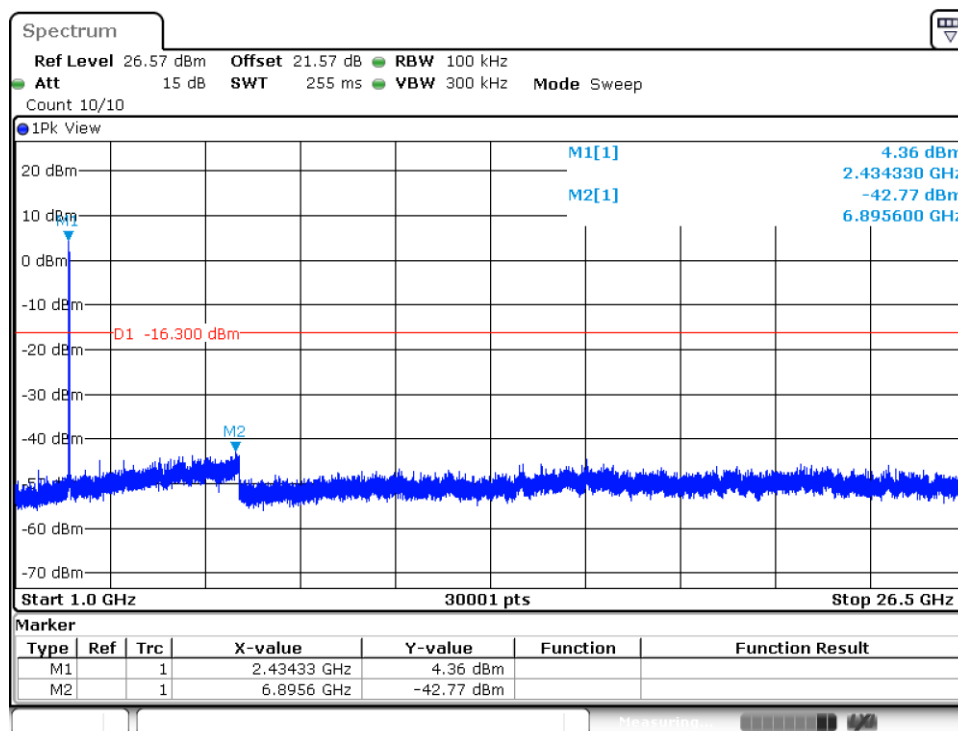




11G_Ant1_2462_30~1000

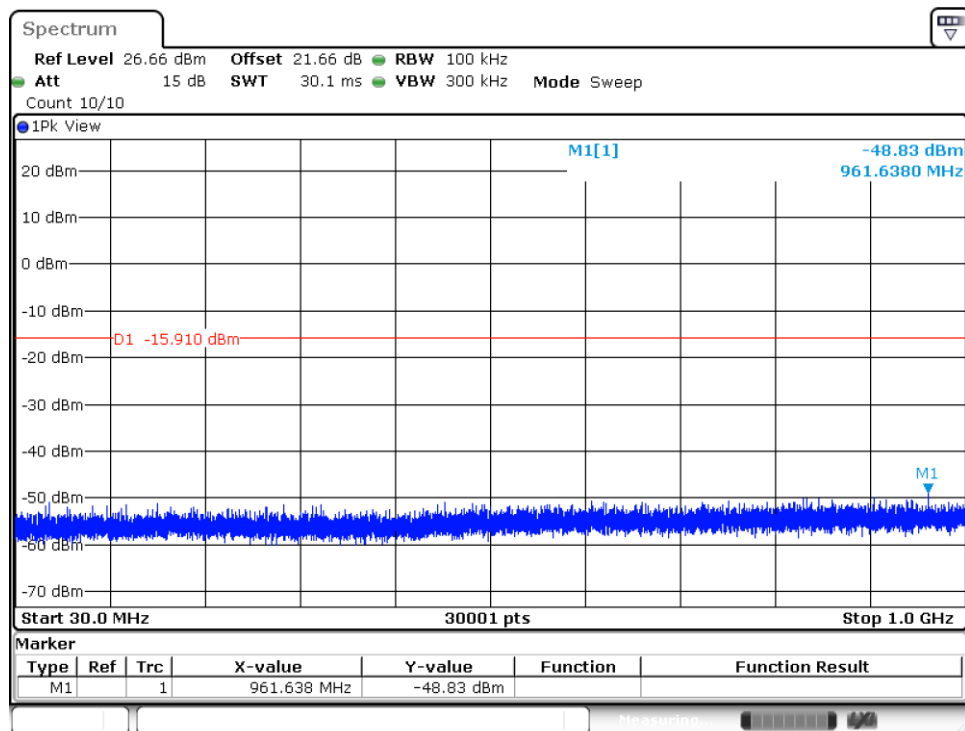


11G_Ant1_2462_1000~26500

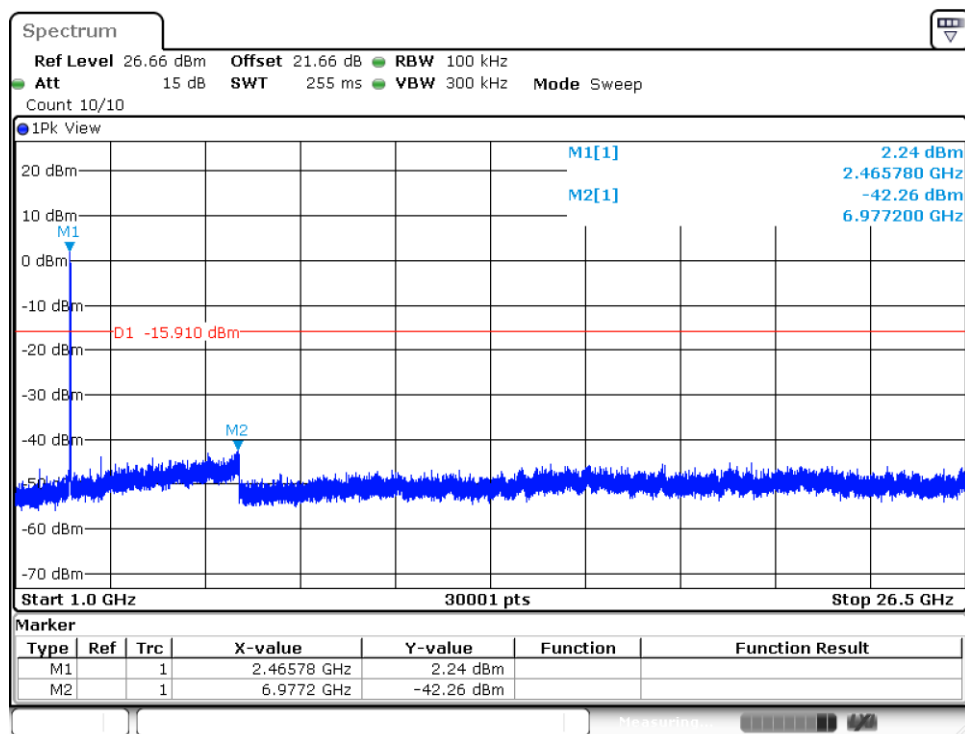




11N20SISO_Ant1_2412_30~1000

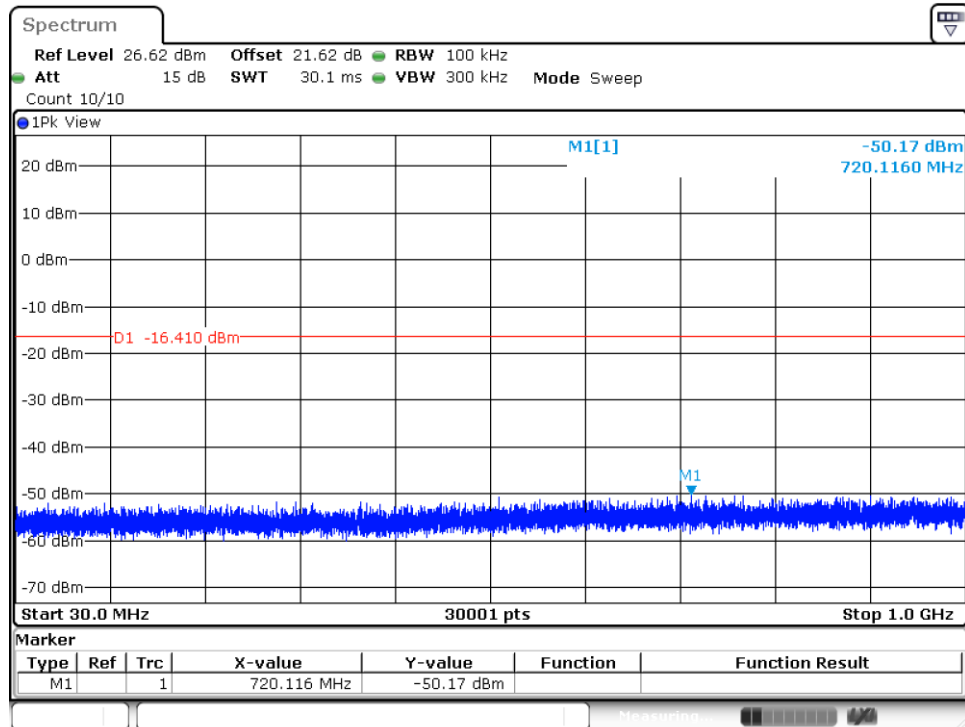


11N20SISO_Ant1_2412_1000~26500

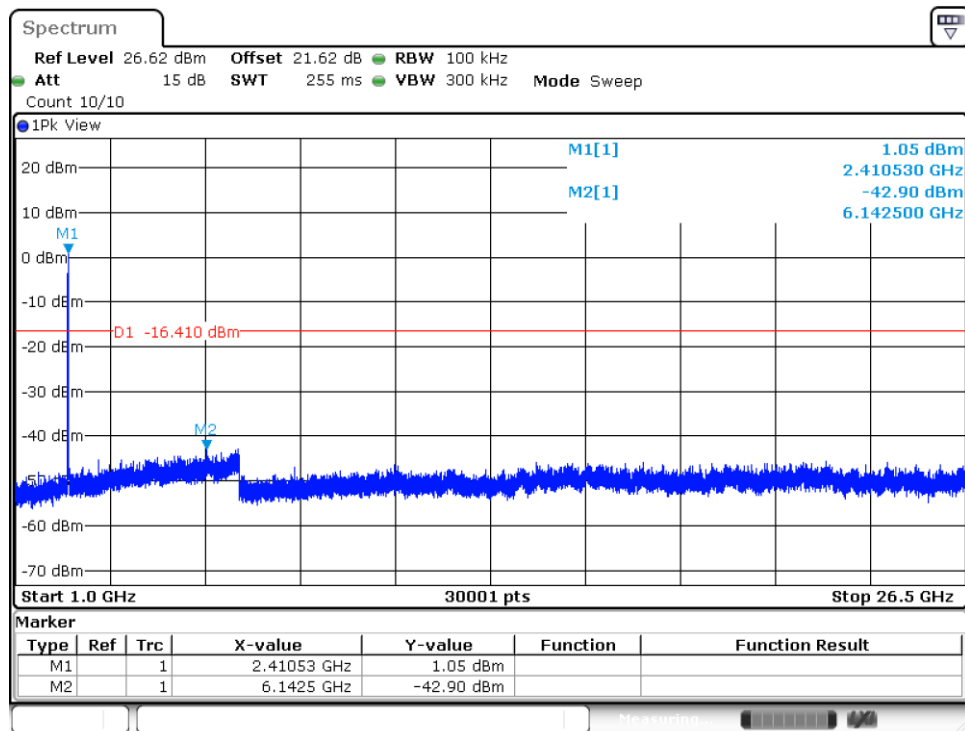




11N20SISO_Ant1_2437_30~1000

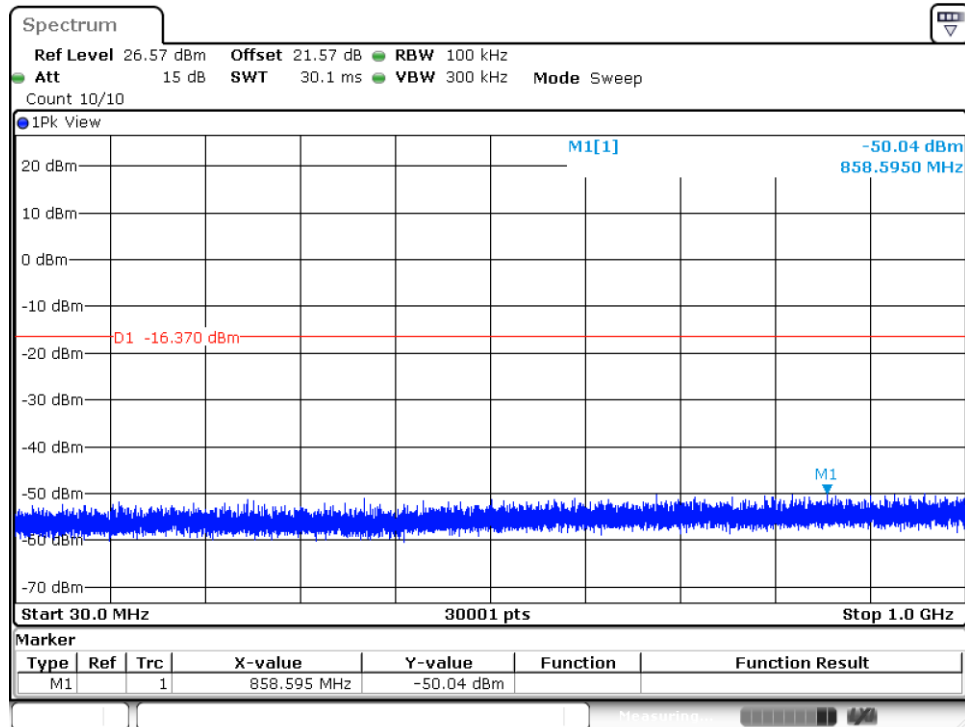


11N20SISO_Ant1_2437_1000~26500

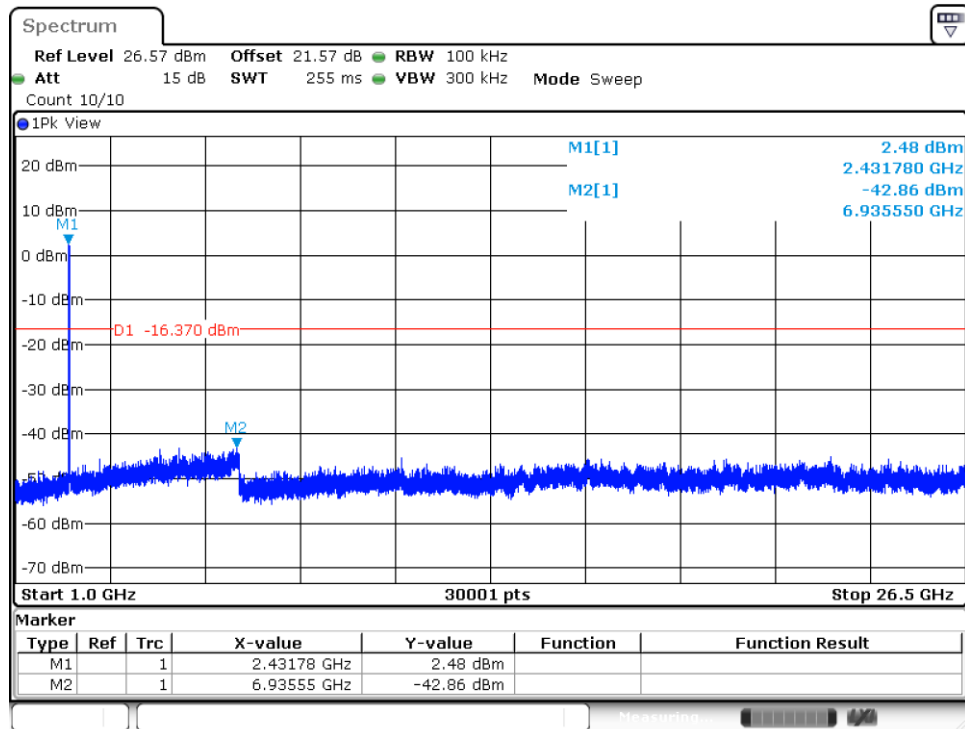




11N20SISO_Ant1_2462_30~1000

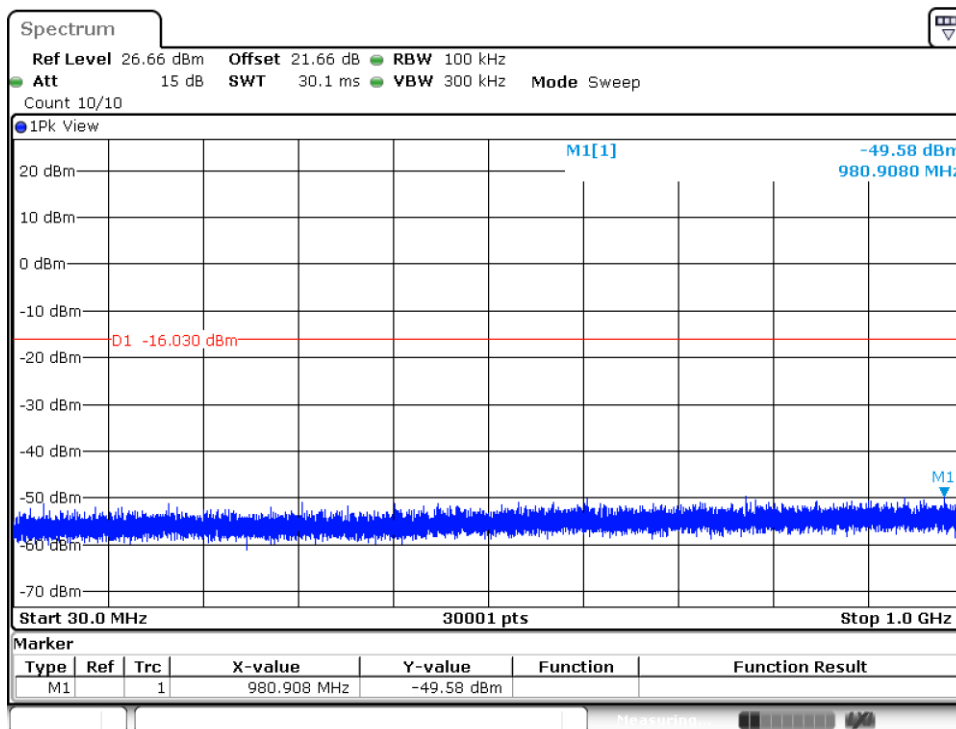

11N20SISO_Ant1_2462_1000~26500

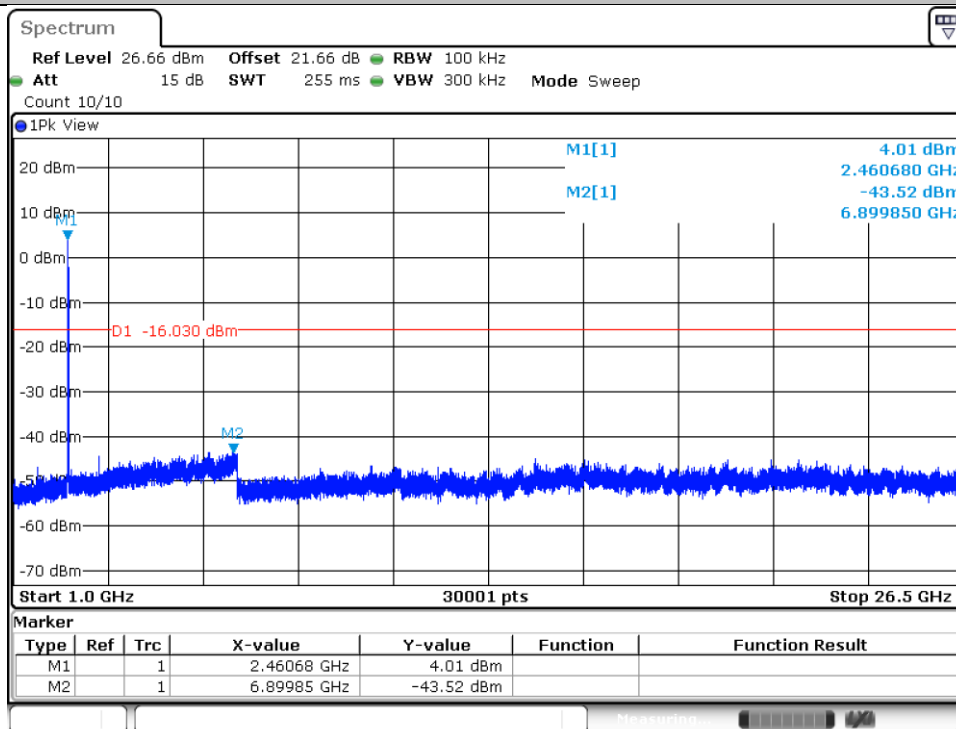



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Lex Wu	Relative Humidity :	46~ 48%
		Temperature :	26.2~27.5℃

Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 7	2400-2483.5	1	802.11b	01	2412	1Mbps	-	-
Mode 8	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
Mode 9	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
Mode 10	2400-2483.5	1	802.11g	01	2412	6Mbps	-	-
Mode 11	2400-2483.5	1	802.11g	06	2437	6Mbps	-	-
Mode 12	2400-2483.5	1	802.11g	11	2462	6Mbps	-	-
Mode 13	2400-2483.5	1	802.11n HT20	01	2412	MCS0	-	-
Mode 14	2400-2483.5	1	802.11n HT20	06	2437	MCS0	-	-
Mode 15	2400-2483.5	1	802.11n HT20	11	2462	MCS0	-	-







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
7	802.11b	01	2388.00	50.40	54.00	-3.60	H	AVERAGE	Pass	Band Edge
7	802.11b	01	4824.00	49.97	54.00	-4.03	H	AVERAGE	Pass	Harmonic
8	802.11b	06	-	-	-	-	-	-	-	Band Edge
8	802.11b	06	4874.00	50.35	54.00	-3.65	H	AVERAGE	Pass	Harmonic
9	802.11b	11	2486.02	50.37	54.00	-3.63	H	AVERAGE	Pass	Band Edge
9	802.11b	11	4924.00	50.48	54.00	-3.52	H	AVERAGE	Pass	Harmonic
10	802.11g	01	2389.43	69.97	74.00	-4.03	H	PEAK	Pass	Band Edge
10	802.11g	01	4824.00	38.34	54.00	-15.66	H	AVERAGE	Pass	Harmonic
11	802.11g	06	-	-	-	-	-	-	-	Band Edge
11	802.11g	06	7311.00	50.11	54.00	-3.89	H	AVERAGE	Pass	Harmonic
12	802.11g	11	2483.50	50.34	54.00	-3.66	H	AVERAGE	Pass	Band Edge
12	802.11g	11	4924.00	47.17	54.00	-6.83	H	AVERAGE	Pass	Harmonic
13	802.11n HT20	01	2389.95	49.00	54.00	-5.00	H	AVERAGE	Pass	Band Edge
13	802.11n HT20	01	4824.00	43.55	54.00	-10.45	H	AVERAGE	Pass	Harmonic
14	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
14	802.11n HT20	06	7311.00	50.41	54.00	-3.59	H	AVERAGE	Pass	Harmonic
15	802.11n HT20	11	2483.50	50.35	54.00	-3.65	H	AVERAGE	Pass	Band Edge
15	802.11n HT20	11	4924.00	46.44	54.00	-7.56	H	AVERAGE	Pass	Harmonic

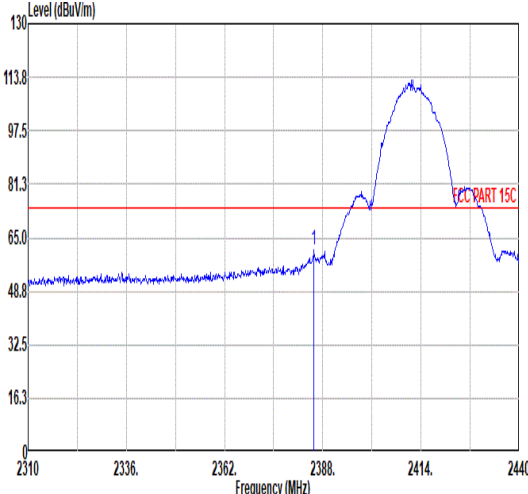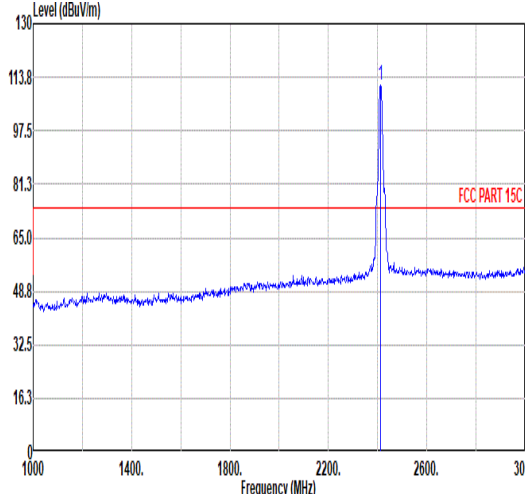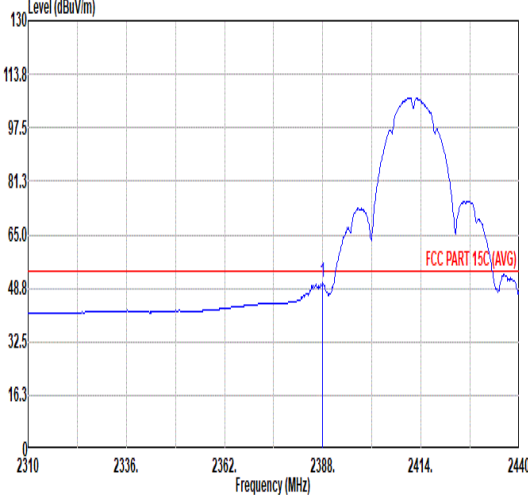
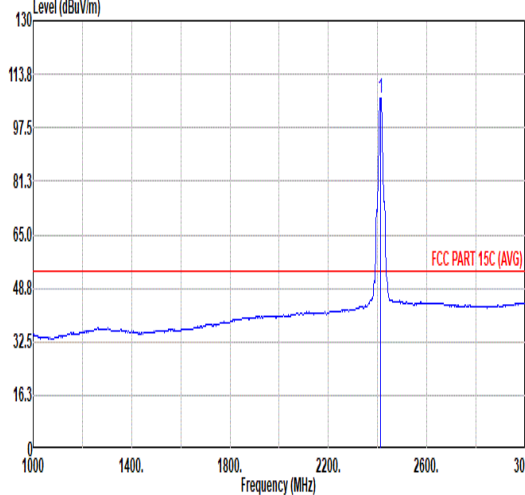


Mode	7																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.66</td><td>61.54</td><td>74.00</td><td>-12.46</td><td>47.06</td><td>32.47</td><td>9.11</td><td>33.10</td><td>6.00</td><td>300</td><td>286</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2385.66	61.54	74.00	-12.46	47.06	32.47	9.11	33.10	6.00	300	286	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>111.20</td><td>-----</td><td>-----</td><td>96.66</td><td>32.43</td><td>9.16</td><td>33.05</td><td>6.00</td><td>300</td><td>286</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	111.20	-----	-----	96.66	32.43	9.16	33.05	6.00	300	286
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2385.66	61.54	74.00	-12.46	47.06	32.47	9.11	33.10	6.00	300	286	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2412.00	111.20	-----	-----	96.66	32.43	9.16	33.05	6.00	300	286	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.00</td><td>50.40</td><td>54.00</td><td>-3.60</td><td>35.90</td><td>32.48</td><td>9.12</td><td>33.10</td><td>6.00</td><td>300</td><td>286</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2388.00	50.40	54.00	-3.60	35.90	32.48	9.12	33.10	6.00	300	286	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>106.56</td><td>-----</td><td>-----</td><td>92.02</td><td>32.43</td><td>9.16</td><td>33.05</td><td>6.00</td><td>300</td><td>286</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	106.56	-----	-----	92.02	32.43	9.16	33.05	6.00	300	286
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2388.00	50.40	54.00	-3.60	35.90	32.48	9.12	33.10	6.00	300	286	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2412.00	106.56	-----	-----	92.02	32.43	9.16	33.05	6.00	300	286	AVERAGE																																																																																							

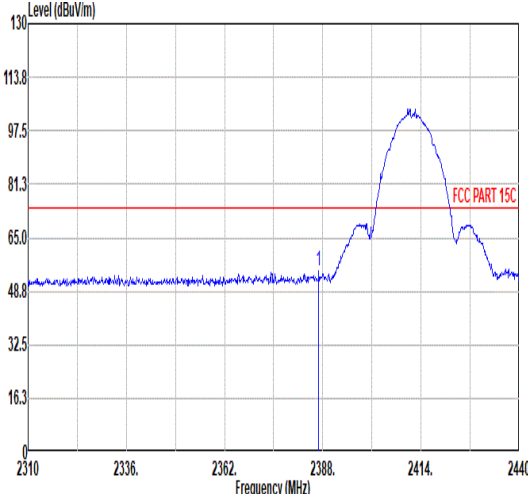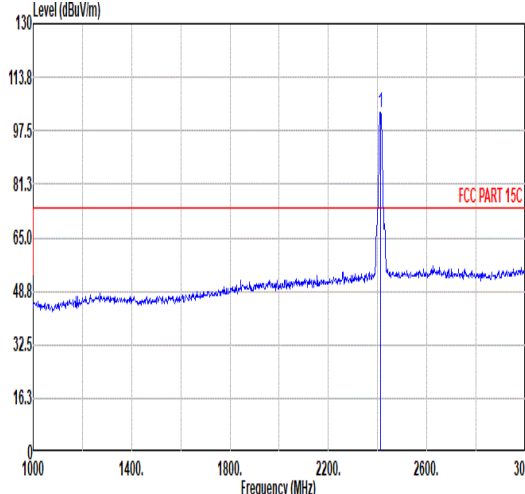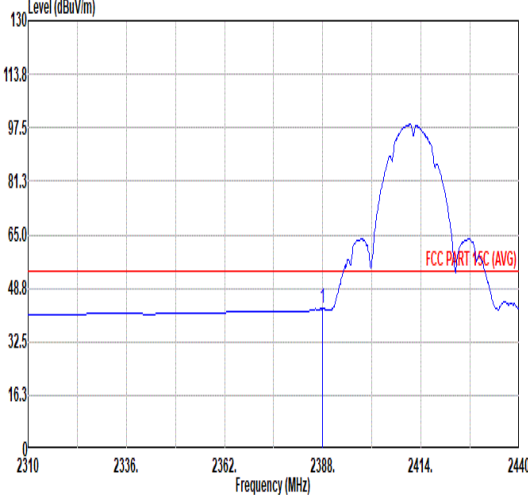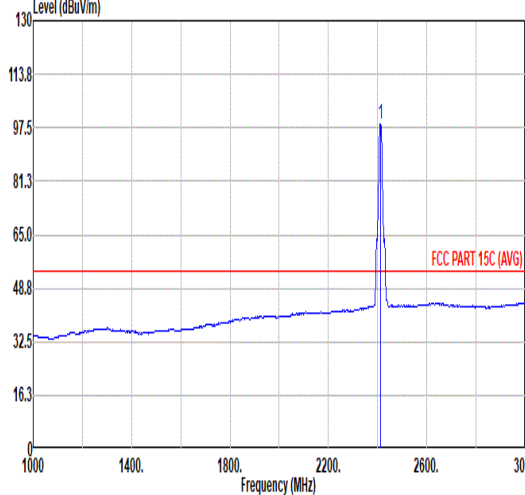



		7																																								
Mode		Band Edge																																								
		2400-2483.5_802.11b_CH01_2412MHz																																								
ANT		1																																								
Pol.		Vertical																																								
Peak																																										
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2386.96	54.82	74.00	-19.18	40.34	32.47	9.11	33.10	6.00	242
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																
1	2386.96	54.82	74.00	-19.18	40.34	32.47	9.11	33.10	6.00	242	0 PEAK																															
Fundamental																																										
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	103.18	-----	-----	88.64	32.43	9.16	33.05	6.00	242
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																
1	2412.00	103.18	-----	-----	88.64	32.43	9.16	33.05	6.00	242	0 PEAK																															
Avg																																										
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2387.87	42.73	54.00	-11.27	28.23	32.48	9.12	33.10	6.00	242
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																
1	2387.87	42.73	54.00	-11.27	28.23	32.48	9.12	33.10	6.00	242	0 AVERAGE																															
Aver																																										
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	98.62	-----	-----	84.08	32.43	9.16	33.05	6.00	242
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																
1	2412.00	98.62	-----	-----	84.08	32.43	9.16	33.05	6.00	242	0 AVERAGE																															

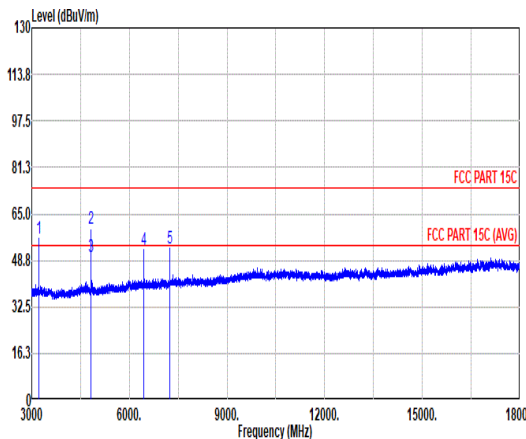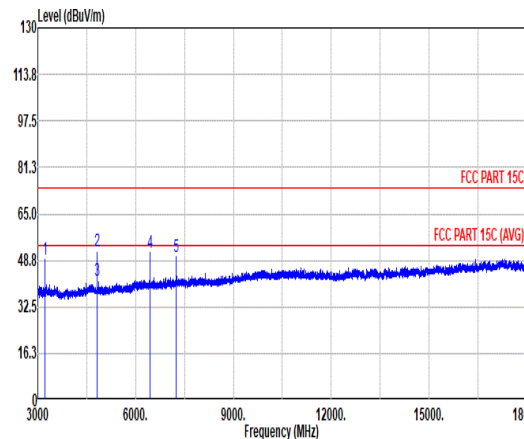





Mode	7																																																																																																																																																																																																											
	Harmonic																																																																																																																																																																																																											
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																																																																																																											
ANT	1																																																																																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																																																																																					
Peak Avg																																																																																																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3216.00</td><td>56.53</td><td>83.81</td><td>-27.28</td><td>76.63</td><td>33.03</td><td>9.91</td><td>63.04</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>59.70</td><td>74.00</td><td>-14.30</td><td>78.27</td><td>34.40</td><td>11.43</td><td>64.40</td><td>0.00</td><td>100</td><td>304</td><td>PEAK</td></tr><tr><td>3</td><td>4824.00</td><td>49.97</td><td>54.00</td><td>-4.03</td><td>68.54</td><td>34.40</td><td>11.43</td><td>64.40</td><td>0.00</td><td>100</td><td>304</td><td>AVERAGE</td></tr><tr><td>4</td><td>6432.00</td><td>52.63</td><td>83.81</td><td>-31.18</td><td>67.61</td><td>35.64</td><td>13.56</td><td>64.18</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>7236.00</td><td>52.77</td><td>83.81</td><td>-31.04</td><td>66.29</td><td>35.87</td><td>14.09</td><td>63.48</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3216.00	56.53	83.81	-27.28	76.63	33.03	9.91	63.04	0.00	--	--	Peak	2	4824.00	59.70	74.00	-14.30	78.27	34.40	11.43	64.40	0.00	100	304	PEAK	3	4824.00	49.97	54.00	-4.03	68.54	34.40	11.43	64.40	0.00	100	304	AVERAGE	4	6432.00	52.63	83.81	-31.18	67.61	35.64	13.56	64.18	0.00	--	--	Peak	5	7236.00	52.77	83.81	-31.04	66.29	35.87	14.09	63.48	0.00	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3216.00</td><td>48.89</td><td>77.03</td><td>-28.14</td><td>68.99</td><td>33.03</td><td>9.91</td><td>63.04</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>51.88</td><td>74.00</td><td>-22.12</td><td>70.45</td><td>34.40</td><td>11.43</td><td>64.40</td><td>0.00</td><td>378</td><td>270</td><td>PEAK</td></tr><tr><td>3</td><td>4824.00</td><td>41.70</td><td>54.00</td><td>-12.30</td><td>60.27</td><td>34.40</td><td>11.43</td><td>64.40</td><td>0.00</td><td>378</td><td>270</td><td>AVERAGE</td></tr><tr><td>4</td><td>6432.00</td><td>51.39</td><td>77.03</td><td>-25.64</td><td>66.37</td><td>35.64</td><td>13.56</td><td>64.18</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>7234.00</td><td>50.10</td><td>77.03</td><td>-26.93</td><td>63.62</td><td>35.87</td><td>14.09</td><td>63.48</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3216.00	48.89	77.03	-28.14	68.99	33.03	9.91	63.04	0.00	--	--	Peak	2	4824.00	51.88	74.00	-22.12	70.45	34.40	11.43	64.40	0.00	378	270	PEAK	3	4824.00	41.70	54.00	-12.30	60.27	34.40	11.43	64.40	0.00	378	270	AVERAGE	4	6432.00	51.39	77.03	-25.64	66.37	35.64	13.56	64.18	0.00	--	--	Peak	5	7234.00	50.10	77.03	-26.93	63.62	35.87	14.09	63.48	0.00	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																		
1	3216.00	56.53	83.81	-27.28	76.63	33.03	9.91	63.04	0.00	--	--	Peak																																																																																																																																																																																																
2	4824.00	59.70	74.00	-14.30	78.27	34.40	11.43	64.40	0.00	100	304	PEAK																																																																																																																																																																																																
3	4824.00	49.97	54.00	-4.03	68.54	34.40	11.43	64.40	0.00	100	304	AVERAGE																																																																																																																																																																																																
4	6432.00	52.63	83.81	-31.18	67.61	35.64	13.56	64.18	0.00	--	--	Peak																																																																																																																																																																																																
5	7236.00	52.77	83.81	-31.04	66.29	35.87	14.09	63.48	0.00	--	--	Peak																																																																																																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																		
1	3216.00	48.89	77.03	-28.14	68.99	33.03	9.91	63.04	0.00	--	--	Peak																																																																																																																																																																																																
2	4824.00	51.88	74.00	-22.12	70.45	34.40	11.43	64.40	0.00	378	270	PEAK																																																																																																																																																																																																
3	4824.00	41.70	54.00	-12.30	60.27	34.40	11.43	64.40	0.00	378	270	AVERAGE																																																																																																																																																																																																
4	6432.00	51.39	77.03	-25.64	66.37	35.64	13.56	64.18	0.00	--	--	Peak																																																																																																																																																																																																
5	7234.00	50.10	77.03	-26.93	63.62	35.87	14.09	63.48	0.00	--	--	Peak																																																																																																																																																																																																

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB



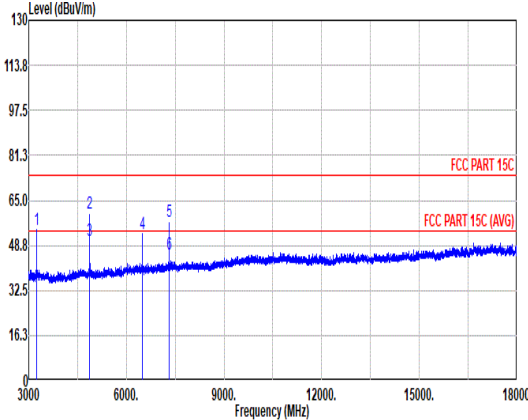
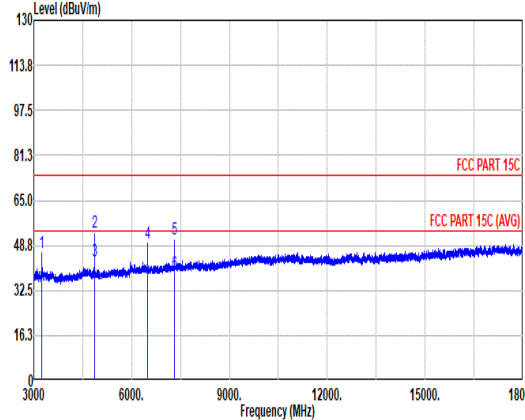


Mode	8																																																																																																																																																																																																																								
	Harmonic																																																																																																																																																																																																																								
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																																																																																								
ANT	1																																																																																																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																																																																																																		
Peak Avg																																																																																																																																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3249.00</td><td>54.59</td><td>83.87</td><td>-29.28</td><td>74.64</td><td>33.10</td><td>9.93</td><td>63.08</td><td>0.00</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>60.19</td><td>74.00</td><td>-13.81</td><td>78.54</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>100</td><td>136 PEAK</td></tr><tr><td>3</td><td>4874.00</td><td>50.35</td><td>54.00</td><td>-3.65</td><td>68.70</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>100</td><td>136 AVERAGE</td></tr><tr><td>4</td><td>6498.00</td><td>53.20</td><td>83.87</td><td>-30.67</td><td>68.23</td><td>35.60</td><td>13.57</td><td>64.20</td><td>0.00</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>7311.00</td><td>57.26</td><td>74.00</td><td>-16.74</td><td>70.68</td><td>35.82</td><td>14.18</td><td>63.42</td><td>0.00</td><td>100</td><td>297 PEAK</td></tr><tr><td>6</td><td>7311.00</td><td>45.48</td><td>54.00</td><td>-8.52</td><td>58.90</td><td>35.82</td><td>14.18</td><td>63.42</td><td>0.00</td><td>100</td><td>297 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3249.00	54.59	83.87	-29.28	74.64	33.10	9.93	63.08	0.00	--	Peak	2	4874.00	60.19	74.00	-13.81	78.54	34.40	11.54	64.29	0.00	100	136 PEAK	3	4874.00	50.35	54.00	-3.65	68.70	34.40	11.54	64.29	0.00	100	136 AVERAGE	4	6498.00	53.20	83.87	-30.67	68.23	35.60	13.57	64.20	0.00	--	Peak	5	7311.00	57.26	74.00	-16.74	70.68	35.82	14.18	63.42	0.00	100	297 PEAK	6	7311.00	45.48	54.00	-8.52	58.90	35.82	14.18	63.42	0.00	100	297 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3249.00</td><td>45.88</td><td>77.53</td><td>-31.65</td><td>65.93</td><td>33.10</td><td>9.93</td><td>63.08</td><td>0.00</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>53.35</td><td>74.00</td><td>-20.65</td><td>71.70</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>368</td><td>343 PEAK</td></tr><tr><td>3</td><td>4874.00</td><td>42.98</td><td>54.00</td><td>-11.02</td><td>61.33</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>368</td><td>343 AVERAGE</td></tr><tr><td>4</td><td>6499.00</td><td>49.34</td><td>77.53</td><td>-28.19</td><td>64.37</td><td>35.60</td><td>13.57</td><td>64.20</td><td>0.00</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>7311.00</td><td>50.87</td><td>74.00</td><td>-23.13</td><td>64.29</td><td>35.82</td><td>14.18</td><td>63.42</td><td>0.00</td><td>100</td><td>339 PEAK</td></tr><tr><td>6</td><td>7311.00</td><td>38.53</td><td>54.00</td><td>-15.47</td><td>51.95</td><td>35.82</td><td>14.18</td><td>63.42</td><td>0.00</td><td>100</td><td>339 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3249.00	45.88	77.53	-31.65	65.93	33.10	9.93	63.08	0.00	--	Peak	2	4874.00	53.35	74.00	-20.65	71.70	34.40	11.54	64.29	0.00	368	343 PEAK	3	4874.00	42.98	54.00	-11.02	61.33	34.40	11.54	64.29	0.00	368	343 AVERAGE	4	6499.00	49.34	77.53	-28.19	64.37	35.60	13.57	64.20	0.00	--	Peak	5	7311.00	50.87	74.00	-23.13	64.29	35.82	14.18	63.42	0.00	100	339 PEAK	6	7311.00	38.53	54.00	-15.47	51.95	35.82	14.18	63.42	0.00	100	339 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																															
1	3249.00	54.59	83.87	-29.28	74.64	33.10	9.93	63.08	0.00	--	Peak																																																																																																																																																																																																														
2	4874.00	60.19	74.00	-13.81	78.54	34.40	11.54	64.29	0.00	100	136 PEAK																																																																																																																																																																																																														
3	4874.00	50.35	54.00	-3.65	68.70	34.40	11.54	64.29	0.00	100	136 AVERAGE																																																																																																																																																																																																														
4	6498.00	53.20	83.87	-30.67	68.23	35.60	13.57	64.20	0.00	--	Peak																																																																																																																																																																																																														
5	7311.00	57.26	74.00	-16.74	70.68	35.82	14.18	63.42	0.00	100	297 PEAK																																																																																																																																																																																																														
6	7311.00	45.48	54.00	-8.52	58.90	35.82	14.18	63.42	0.00	100	297 AVERAGE																																																																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																															
1	3249.00	45.88	77.53	-31.65	65.93	33.10	9.93	63.08	0.00	--	Peak																																																																																																																																																																																																														
2	4874.00	53.35	74.00	-20.65	71.70	34.40	11.54	64.29	0.00	368	343 PEAK																																																																																																																																																																																																														
3	4874.00	42.98	54.00	-11.02	61.33	34.40	11.54	64.29	0.00	368	343 AVERAGE																																																																																																																																																																																																														
4	6499.00	49.34	77.53	-28.19	64.37	35.60	13.57	64.20	0.00	--	Peak																																																																																																																																																																																																														
5	7311.00	50.87	74.00	-23.13	64.29	35.82	14.18	63.42	0.00	100	339 PEAK																																																																																																																																																																																																														
6	7311.00	38.53	54.00	-15.47	51.95	35.82	14.18	63.42	0.00	100	339 AVERAGE																																																																																																																																																																																																														

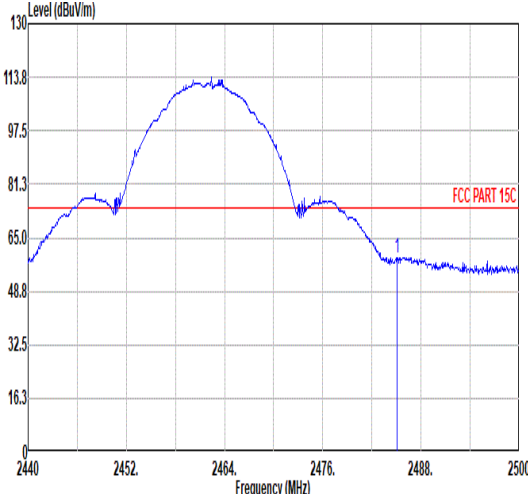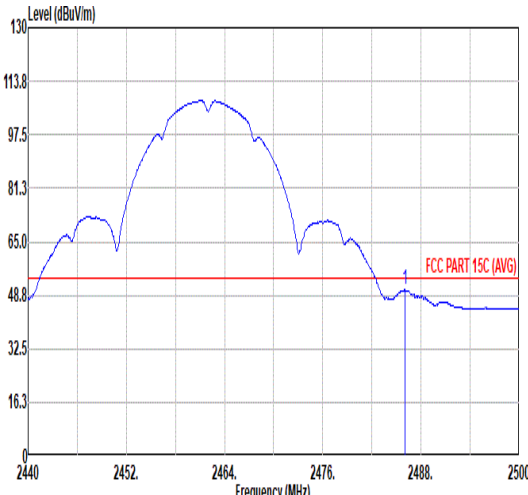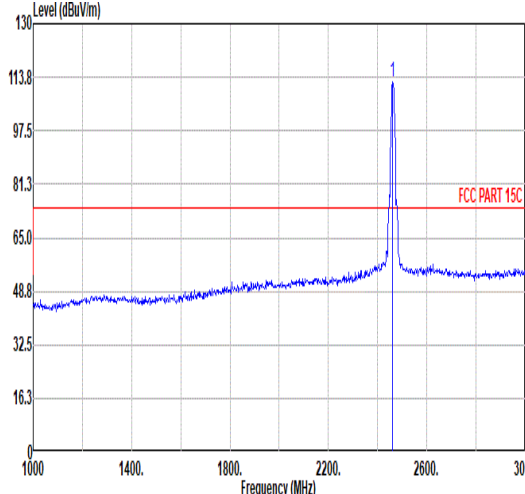
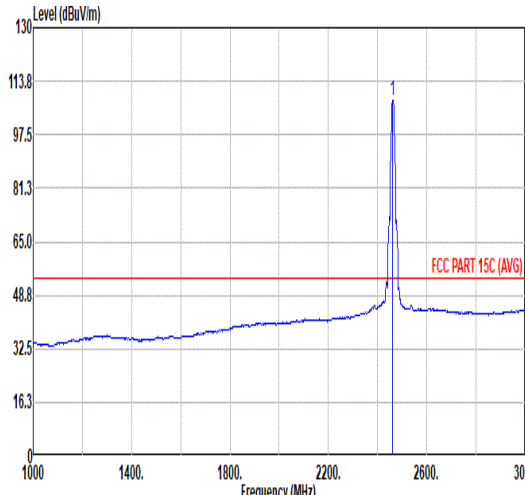


Mode	9																																																						
	Band Edge																																																						
	2400-2483.5_802.11b_CH11_2462MHz																																																						
ANT	1																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.06</td><td>59.07</td><td>74.00</td><td>-14.93</td><td>44.34</td><td>32.34</td><td>9.23</td><td>32.84</td><td>6.00</td><td>109</td><td>298</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2485.06	59.07	74.00	-14.93	44.34	32.34	9.23	32.84	6.00	109	298
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	2485.06	59.07	74.00	-14.93	44.34	32.34	9.23	32.84	6.00	109	298	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.02</td><td>50.37</td><td>54.00</td><td>-3.63</td><td>35.64</td><td>32.34</td><td>9.23</td><td>32.84</td><td>6.00</td><td>109</td><td>298</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2486.02	50.37	54.00	-3.63	35.64	32.34	9.23	32.84	6.00	109	298
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	2486.02	50.37	54.00	-3.63	35.64	32.34	9.23	32.84	6.00	109	298	AVERAGE																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>112.57</td><td>-----</td><td>-----</td><td>98.02</td><td>32.25</td><td>9.21</td><td>32.91</td><td>6.00</td><td>109</td><td>298</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	112.57	-----	-----	98.02	32.25	9.21	32.91	6.00	109	298
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	2462.00	112.57	-----	-----	98.02	32.25	9.21	32.91	6.00	109	298	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>108.02</td><td>-----</td><td>-----</td><td>93.47</td><td>32.25</td><td>9.21</td><td>32.91</td><td>6.00</td><td>109</td><td>298</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	108.02	-----	-----	93.47	32.25	9.21	32.91	6.00	109	298
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	2462.00	108.02	-----	-----	93.47	32.25	9.21	32.91	6.00	109	298	AVERAGE																																											

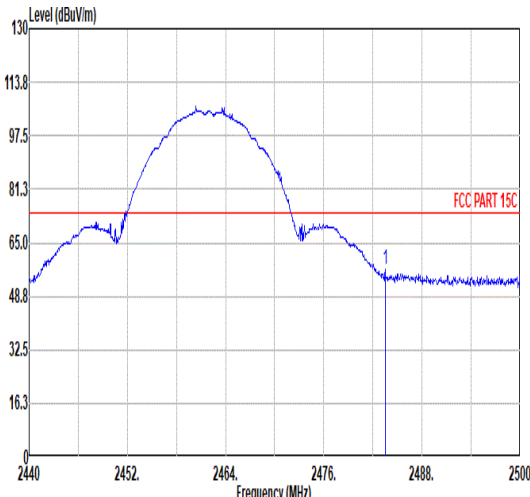
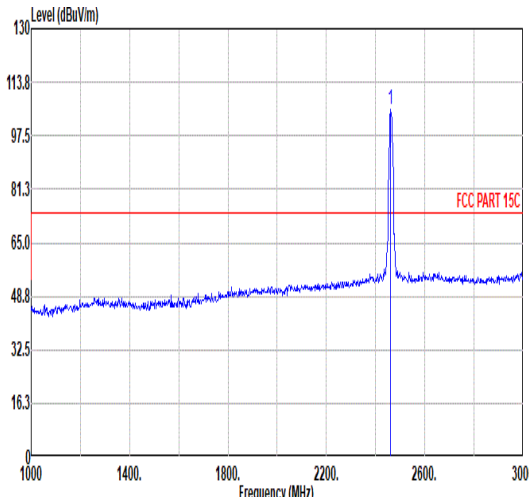
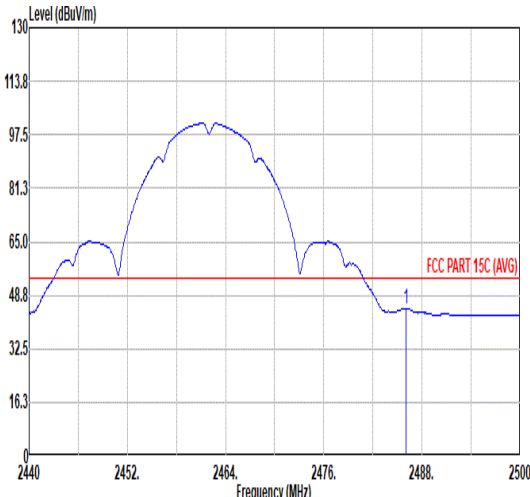
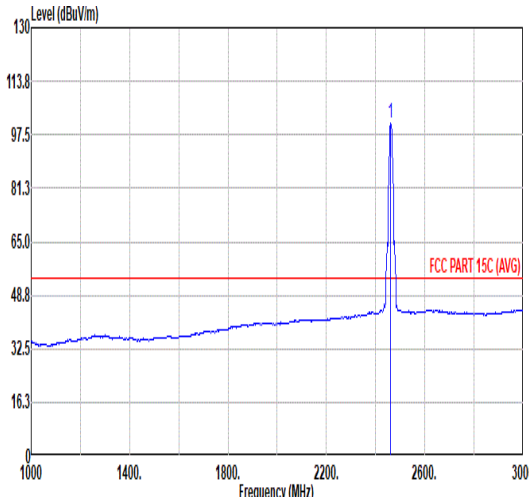


Mode	9																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>56.95</td><td>74.00</td><td>-17.05</td><td>42.24</td><td>32.33</td><td>9.23</td><td>32.85</td><td>6.00</td><td>100</td><td>5 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	56.95	74.00	-17.05	42.24	32.33	9.23	32.85	6.00	100	5 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>105.30</td><td>-----</td><td>-----</td><td>90.75</td><td>32.25</td><td>9.21</td><td>32.91</td><td>6.00</td><td>100</td><td>5 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.30	-----	-----	90.75	32.25	9.21	32.91	6.00	100	5 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.50	56.95	74.00	-17.05	42.24	32.33	9.23	32.85	6.00	100	5 PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	105.30	-----	-----	90.75	32.25	9.21	32.91	6.00	100	5 PEAK																																																																																							
Avg																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.02</td><td>44.82</td><td>54.00</td><td>-9.18</td><td>30.09</td><td>32.34</td><td>9.23</td><td>32.84</td><td>6.00</td><td>100</td><td>5 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.02	44.82	54.00	-9.18	30.09	32.34	9.23	32.84	6.00	100	5 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>100.95</td><td>-----</td><td>-----</td><td>86.40</td><td>32.25</td><td>9.21</td><td>32.91</td><td>6.00</td><td>100</td><td>5 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	100.95	-----	-----	86.40	32.25	9.21	32.91	6.00	100	5 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2486.02	44.82	54.00	-9.18	30.09	32.34	9.23	32.84	6.00	100	5 AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	100.95	-----	-----	86.40	32.25	9.21	32.91	6.00	100	5 AVERAGE																																																																																							



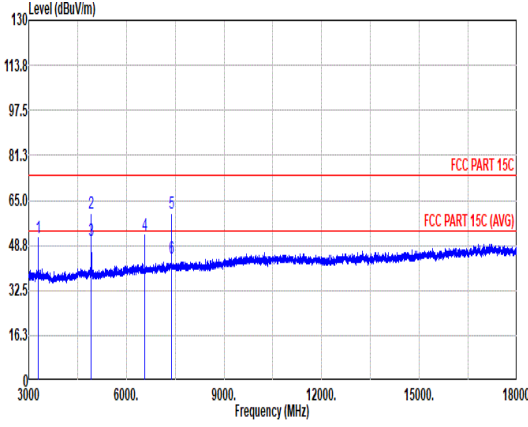
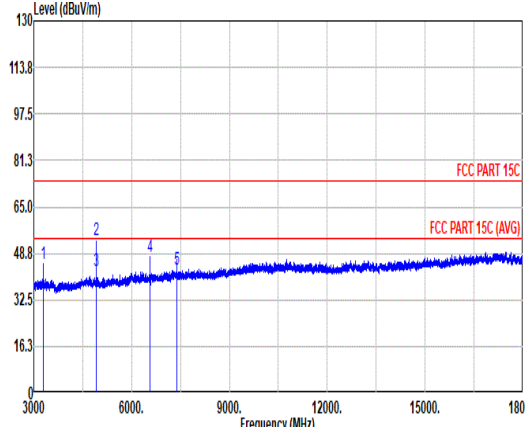


Mode	9																																																																																																																																																																																																																											
	Harmonic																																																																																																																																																																																																																											
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																																																																																											
ANT	1																																																																																																																																																																																																																											
Pol.	Horizontal											Vertical																																																																																																																																																																																																																
Peak Avg																																																																																																																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3283.00</td><td>51.32</td><td>82.40</td><td>-31.08</td><td>71.40</td><td>33.10</td><td>9.95</td><td>63.13</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>60.40</td><td>74.00</td><td>-13.60</td><td>78.62</td><td>34.40</td><td>11.65</td><td>64.27</td><td>0.00</td><td>100</td><td>154</td><td>PEAK</td></tr><tr><td>3</td><td>4924.00</td><td>50.48</td><td>54.00</td><td>-3.52</td><td>68.70</td><td>34.40</td><td>11.65</td><td>64.27</td><td>0.00</td><td>100</td><td>154</td><td>AVERAGE</td></tr><tr><td>4</td><td>6565.00</td><td>52.43</td><td>82.40</td><td>-29.97</td><td>67.28</td><td>35.70</td><td>13.58</td><td>64.13</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>7386.00</td><td>60.22</td><td>74.00</td><td>-13.78</td><td>73.55</td><td>35.76</td><td>14.27</td><td>63.36</td><td>0.00</td><td>101</td><td>298</td><td>PEAK</td></tr><tr><td>6</td><td>7386.00</td><td>44.07</td><td>54.00</td><td>-9.93</td><td>57.41</td><td>35.76</td><td>14.27</td><td>63.37</td><td>0.00</td><td>101</td><td>298</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3283.00	51.32	82.40	-31.08	71.40	33.10	9.95	63.13	0.00	--	--	Peak	2	4924.00	60.40	74.00	-13.60	78.62	34.40	11.65	64.27	0.00	100	154	PEAK	3	4924.00	50.48	54.00	-3.52	68.70	34.40	11.65	64.27	0.00	100	154	AVERAGE	4	6565.00	52.43	82.40	-29.97	67.28	35.70	13.58	64.13	0.00	--	--	Peak	5	7386.00	60.22	74.00	-13.78	73.55	35.76	14.27	63.36	0.00	101	298	PEAK	6	7386.00	44.07	54.00	-9.93	57.41	35.76	14.27	63.37	0.00	101	298	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3282.00</td><td>45.25</td><td>79.26</td><td>-34.01</td><td>65.33</td><td>33.10</td><td>9.95</td><td>63.13</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>53.26</td><td>74.00</td><td>-20.74</td><td>71.48</td><td>34.40</td><td>11.65</td><td>64.27</td><td>0.00</td><td>301</td><td>343</td><td>PEAK</td></tr><tr><td>3</td><td>4924.00</td><td>42.54</td><td>54.00</td><td>-11.46</td><td>60.76</td><td>34.40</td><td>11.65</td><td>64.27</td><td>0.00</td><td>301</td><td>343</td><td>AVERAGE</td></tr><tr><td>4</td><td>6565.00</td><td>47.81</td><td>79.26</td><td>-31.45</td><td>62.66</td><td>35.70</td><td>13.58</td><td>64.13</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>7386.00</td><td>43.15</td><td>74.00</td><td>-30.85</td><td>56.48</td><td>35.76</td><td>14.27</td><td>63.36</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3282.00	45.25	79.26	-34.01	65.33	33.10	9.95	63.13	0.00	--	--	Peak	2	4924.00	53.26	74.00	-20.74	71.48	34.40	11.65	64.27	0.00	301	343	PEAK	3	4924.00	42.54	54.00	-11.46	60.76	34.40	11.65	64.27	0.00	301	343	AVERAGE	4	6565.00	47.81	79.26	-31.45	62.66	35.70	13.58	64.13	0.00	--	--	Peak	5	7386.00	43.15	74.00	-30.85	56.48	35.76	14.27	63.36	0.00	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																		
1	3283.00	51.32	82.40	-31.08	71.40	33.10	9.95	63.13	0.00	--	--	Peak																																																																																																																																																																																																																
2	4924.00	60.40	74.00	-13.60	78.62	34.40	11.65	64.27	0.00	100	154	PEAK																																																																																																																																																																																																																
3	4924.00	50.48	54.00	-3.52	68.70	34.40	11.65	64.27	0.00	100	154	AVERAGE																																																																																																																																																																																																																
4	6565.00	52.43	82.40	-29.97	67.28	35.70	13.58	64.13	0.00	--	--	Peak																																																																																																																																																																																																																
5	7386.00	60.22	74.00	-13.78	73.55	35.76	14.27	63.36	0.00	101	298	PEAK																																																																																																																																																																																																																
6	7386.00	44.07	54.00	-9.93	57.41	35.76	14.27	63.37	0.00	101	298	AVERAGE																																																																																																																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																		
1	3282.00	45.25	79.26	-34.01	65.33	33.10	9.95	63.13	0.00	--	--	Peak																																																																																																																																																																																																																
2	4924.00	53.26	74.00	-20.74	71.48	34.40	11.65	64.27	0.00	301	343	PEAK																																																																																																																																																																																																																
3	4924.00	42.54	54.00	-11.46	60.76	34.40	11.65	64.27	0.00	301	343	AVERAGE																																																																																																																																																																																																																
4	6565.00	47.81	79.26	-31.45	62.66	35.70	13.58	64.13	0.00	--	--	Peak																																																																																																																																																																																																																
5	7386.00	43.15	74.00	-30.85	56.48	35.76	14.27	63.36	0.00	--	--	PEAK																																																																																																																																																																																																																

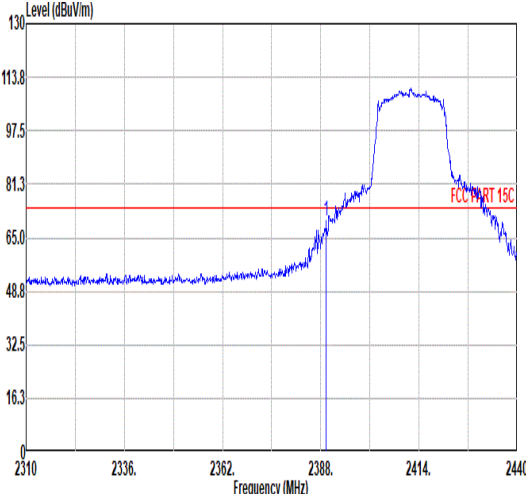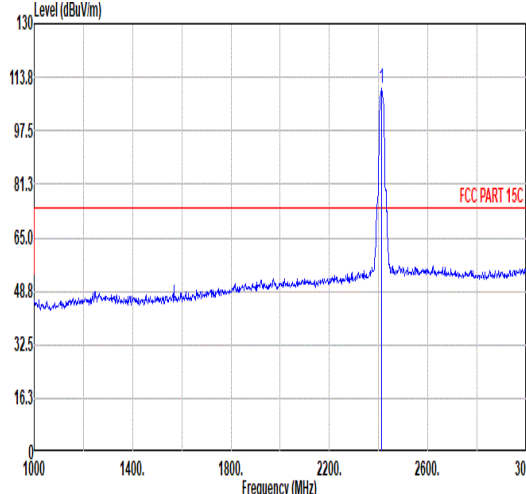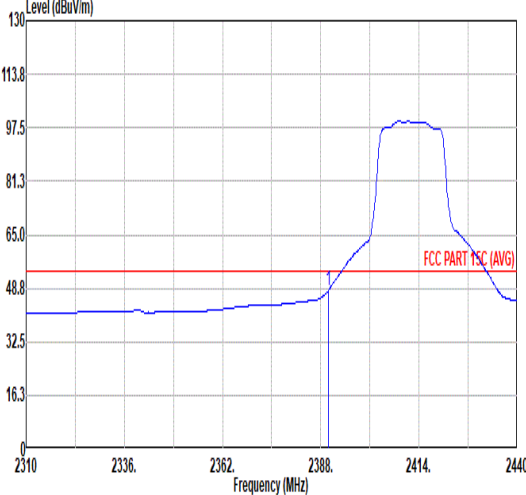
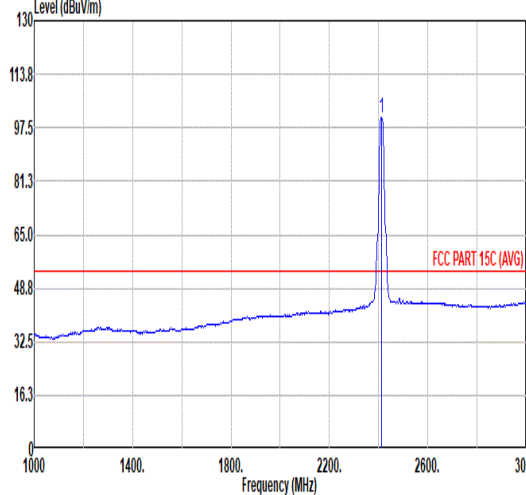


Mode	10																																																						
	Band Edge																																																						
	2400-2483.5_802.11g_CH01_2412MHz																																																						
ANT	1																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.43</td><td>69.97</td><td>74.00</td><td>-4.03</td><td>55.47</td><td>32.48</td><td>9.12</td><td>33.10</td><td>6.00</td><td>300</td><td>286</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	69.97	74.00	-4.03	55.47	32.48	9.12	33.10	6.00	300	286
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.43	69.97	74.00	-4.03	55.47	32.48	9.12	33.10	6.00	300	286	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>110.29</td><td>-----</td><td>-----</td><td>95.75</td><td>32.43</td><td>9.16</td><td>33.05</td><td>6.00</td><td>300</td><td>286</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	110.29	-----	-----	95.75	32.43	9.16	33.05	6.00	300	286
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	110.29	-----	-----	95.75	32.43	9.16	33.05	6.00	300	286	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>47.98</td><td>54.00</td><td>-6.02</td><td>33.48</td><td>32.48</td><td>9.12</td><td>33.10</td><td>6.00</td><td>300</td><td>286</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	47.98	54.00	-6.02	33.48	32.48	9.12	33.10	6.00	300	286
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.95	47.98	54.00	-6.02	33.48	32.48	9.12	33.10	6.00	300	286	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>100.54</td><td>-----</td><td>-----</td><td>86.00</td><td>32.43</td><td>9.16</td><td>33.05</td><td>6.00</td><td>300</td><td>286</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.54	-----	-----	86.00	32.43	9.16	33.05	6.00	300	286
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	100.54	-----	-----	86.00	32.43	9.16	33.05	6.00	300	286	AVERAGE																																											

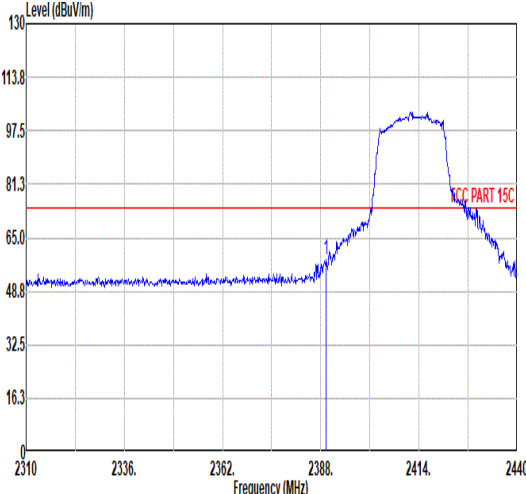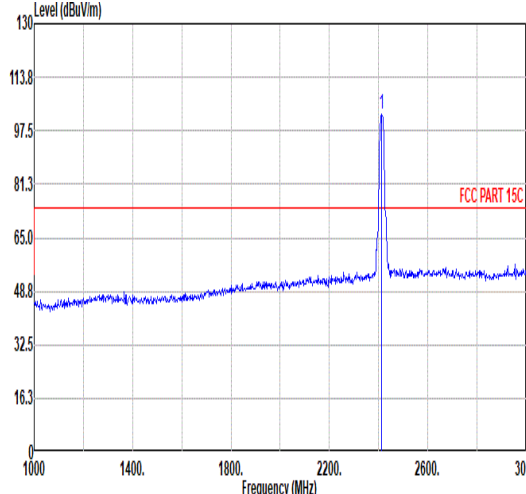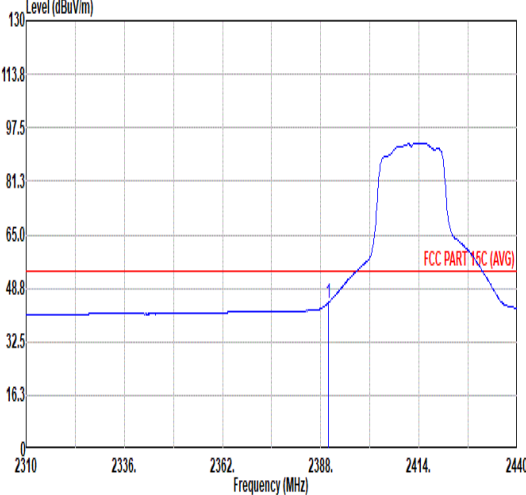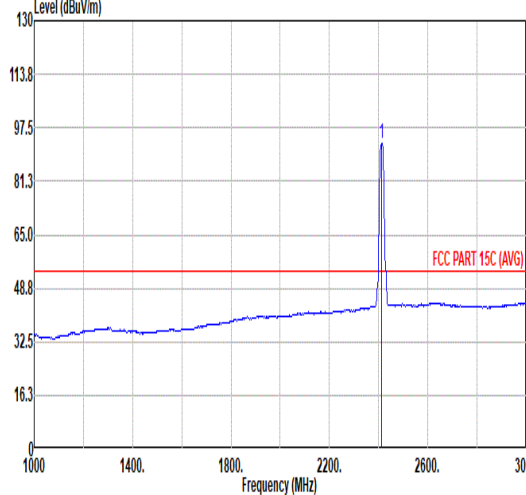


Mode	10																																																																																																												
	Band Edge																																																																																																												
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																												
ANT	1																																																																																																												
Pol.	Vertical						Fundamental																																																																																																						
Peak																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.30</td><td>58.58</td><td>74.00</td><td>-15.42</td><td>44.00</td><td>32.48</td><td>9.12</td><td>33.10</td><td>6.00</td><td>120</td><td>5 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.30	58.58	74.00	-15.42	44.00	32.48	9.12	33.10	6.00	120	5 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>102.32</td><td>-----</td><td>-----</td><td>87.78</td><td>32.43</td><td>9.16</td><td>33.05</td><td>6.00</td><td>120</td><td>5 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	102.32	-----	-----	87.78	32.43	9.16	33.05	6.00	120
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2389.30	58.58	74.00	-15.42	44.00	32.48	9.12	33.10	6.00	120	5 PEAK																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2412.00	102.32	-----	-----	87.78	32.43	9.16	33.05	6.00	120	5 PEAK																																																																																																		
Avg																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>44.24</td><td>54.00</td><td>-9.76</td><td>29.74</td><td>32.48</td><td>9.12</td><td>33.10</td><td>6.00</td><td>120</td><td>5 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	44.24	54.00	-9.76	29.74	32.48	9.12	33.10	6.00	120	5 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>92.75</td><td>-----</td><td>-----</td><td>78.22</td><td>32.40</td><td>9.17</td><td>33.04</td><td>6.00</td><td>120</td><td>5 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	92.75	-----	-----	78.22	32.40	9.17	33.04	6.00	120
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2389.95	44.24	54.00	-9.76	29.74	32.48	9.12	33.10	6.00	120	5 AVERAGE																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2412.00	92.75	-----	-----	78.22	32.40	9.17	33.04	6.00	120	5 AVERAGE																																																																																																		

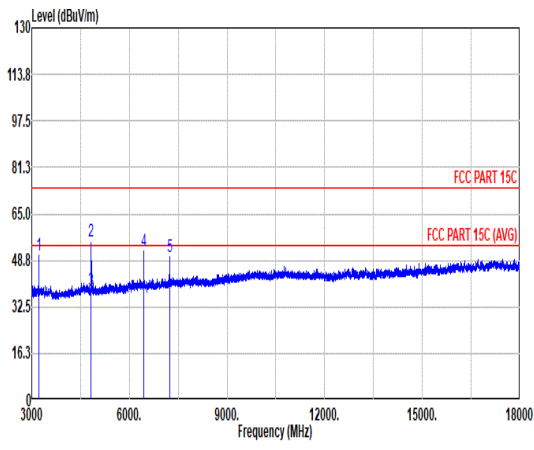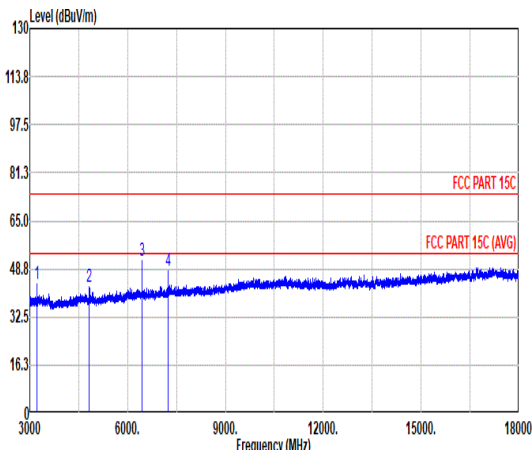

Mode	10																																																																																																																																																																																														
	Harmonic																																																																																																																																																																																														
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																																																																																														
ANT	1																																																																																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																																																																																								
Peak Avg																																																																																																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3216.00</td><td>50.70</td><td>77.01</td><td>-26.31</td><td>70.80</td><td>33.03</td><td>9.91</td><td>63.04</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>55.50</td><td>74.00</td><td>-18.50</td><td>74.07</td><td>34.40</td><td>11.43</td><td>64.40</td><td>0.00</td><td>100</td><td>301</td><td>PEAK</td></tr><tr><td>3</td><td>4824.00</td><td>38.34</td><td>54.00</td><td>-15.66</td><td>56.91</td><td>34.40</td><td>11.43</td><td>64.40</td><td>0.00</td><td>100</td><td>301</td><td>AVERAGE</td></tr><tr><td>4</td><td>6432.00</td><td>52.09</td><td>77.01</td><td>-24.92</td><td>67.07</td><td>35.64</td><td>13.56</td><td>64.18</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>7231.00</td><td>49.97</td><td>77.01</td><td>-27.04</td><td>63.50</td><td>35.86</td><td>14.09</td><td>63.48</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3216.00	50.70	77.01	-26.31	70.80	33.03	9.91	63.04	0.00	--	--	Peak	2	4824.00	55.50	74.00	-18.50	74.07	34.40	11.43	64.40	0.00	100	301	PEAK	3	4824.00	38.34	54.00	-15.66	56.91	34.40	11.43	64.40	0.00	100	301	AVERAGE	4	6432.00	52.09	77.01	-24.92	67.07	35.64	13.56	64.18	0.00	--	--	Peak	5	7231.00	49.97	77.01	-27.04	63.50	35.86	14.09	63.48	0.00	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3216.00</td><td>43.51</td><td>74.49</td><td>-30.98</td><td>63.61</td><td>33.03</td><td>9.91</td><td>63.04</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>42.48</td><td>74.00</td><td>-31.52</td><td>61.05</td><td>34.40</td><td>11.43</td><td>64.40</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>6432.00</td><td>51.64</td><td>74.49</td><td>-22.85</td><td>66.62</td><td>35.64</td><td>13.56</td><td>64.18</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>7236.00</td><td>48.31</td><td>74.49</td><td>-26.18</td><td>61.83</td><td>35.87</td><td>14.09</td><td>63.48</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3216.00	43.51	74.49	-30.98	63.61	33.03	9.91	63.04	0.00	--	--	Peak	2	4824.00	42.48	74.00	-31.52	61.05	34.40	11.43	64.40	0.00	--	--	PEAK	3	6432.00	51.64	74.49	-22.85	66.62	35.64	13.56	64.18	0.00	--	--	Peak	4	7236.00	48.31	74.49	-26.18	61.83	35.87	14.09	63.48	0.00	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																					
1	3216.00	50.70	77.01	-26.31	70.80	33.03	9.91	63.04	0.00	--	--	Peak																																																																																																																																																																																			
2	4824.00	55.50	74.00	-18.50	74.07	34.40	11.43	64.40	0.00	100	301	PEAK																																																																																																																																																																																			
3	4824.00	38.34	54.00	-15.66	56.91	34.40	11.43	64.40	0.00	100	301	AVERAGE																																																																																																																																																																																			
4	6432.00	52.09	77.01	-24.92	67.07	35.64	13.56	64.18	0.00	--	--	Peak																																																																																																																																																																																			
5	7231.00	49.97	77.01	-27.04	63.50	35.86	14.09	63.48	0.00	--	--	Peak																																																																																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																					
1	3216.00	43.51	74.49	-30.98	63.61	33.03	9.91	63.04	0.00	--	--	Peak																																																																																																																																																																																			
2	4824.00	42.48	74.00	-31.52	61.05	34.40	11.43	64.40	0.00	--	--	PEAK																																																																																																																																																																																			
3	6432.00	51.64	74.49	-22.85	66.62	35.64	13.56	64.18	0.00	--	--	Peak																																																																																																																																																																																			
4	7236.00	48.31	74.49	-26.18	61.83	35.87	14.09	63.48	0.00	--	--	Peak																																																																																																																																																																																			

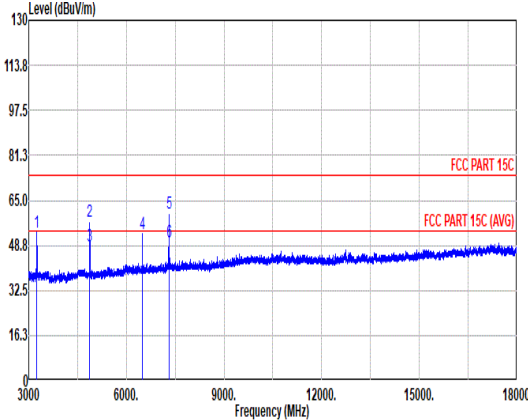

Mode	11																																																																																																													
	Harmonic																																																																																																													
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Horizontal																																																																																																													
Peak Avg																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 3249.00</td><td>53.67</td><td>79.34</td><td>-25.67</td><td>73.72</td><td>33.10</td><td>9.93</td><td>63.08</td><td>0.00</td><td>--</td><td>-- Peak</td></tr><tr><td>2 4874.00</td><td>57.55</td><td>74.00</td><td>-16.45</td><td>75.90</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>323</td><td>143 PEAK</td></tr><tr><td>3 4874.00</td><td>48.78</td><td>54.00</td><td>-5.22</td><td>67.13</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>323</td><td>143 AVERAGE</td></tr><tr><td>4 6499.00</td><td>52.81</td><td>79.34</td><td>-26.53</td><td>67.84</td><td>35.60</td><td>13.57</td><td>64.20</td><td>0.00</td><td>--</td><td>-- Peak</td></tr><tr><td>5 7311.00</td><td>60.28</td><td>74.00</td><td>-13.72</td><td>73.70</td><td>35.82</td><td>14.18</td><td>63.42</td><td>0.00</td><td>300</td><td>287 PEAK</td></tr><tr><td>6 7311.00</td><td>50.11</td><td>54.00</td><td>-3.89</td><td>63.53</td><td>35.82</td><td>14.18</td><td>63.42</td><td>0.00</td><td>300</td><td>287 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 3249.00	53.67	79.34	-25.67	73.72	33.10	9.93	63.08	0.00	--	-- Peak	2 4874.00	57.55	74.00	-16.45	75.90	34.40	11.54	64.29	0.00	323	143 PEAK	3 4874.00	48.78	54.00	-5.22	67.13	34.40	11.54	64.29	0.00	323	143 AVERAGE	4 6499.00	52.81	79.34	-26.53	67.84	35.60	13.57	64.20	0.00	--	-- Peak	5 7311.00	60.28	74.00	-13.72	73.70	35.82	14.18	63.42	0.00	300	287 PEAK	6 7311.00	50.11	54.00	-3.89	63.53	35.82	14.18	63.42	0.00	300	287 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1 3249.00	53.67	79.34	-25.67	73.72	33.10	9.93	63.08	0.00	--	-- Peak																																																																																																				
2 4874.00	57.55	74.00	-16.45	75.90	34.40	11.54	64.29	0.00	323	143 PEAK																																																																																																				
3 4874.00	48.78	54.00	-5.22	67.13	34.40	11.54	64.29	0.00	323	143 AVERAGE																																																																																																				
4 6499.00	52.81	79.34	-26.53	67.84	35.60	13.57	64.20	0.00	--	-- Peak																																																																																																				
5 7311.00	60.28	74.00	-13.72	73.70	35.82	14.18	63.42	0.00	300	287 PEAK																																																																																																				
6 7311.00	50.11	54.00	-3.89	63.53	35.82	14.18	63.42	0.00	300	287 AVERAGE																																																																																																				
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 3249.00</td><td>48.35</td><td>75.64</td><td>-27.29</td><td>68.40</td><td>33.10</td><td>9.93</td><td>63.08</td><td>0.00</td><td>--</td><td>-- Peak</td></tr><tr><td>2 4874.00</td><td>46.74</td><td>74.00</td><td>-27.26</td><td>65.09</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>100</td><td>360 PEAK</td></tr><tr><td>3 4874.00</td><td>37.78</td><td>54.00</td><td>-16.22</td><td>56.13</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>100</td><td>360 AVERAGE</td></tr><tr><td>4 6498.00</td><td>50.27</td><td>75.64</td><td>-25.37</td><td>65.30</td><td>35.60</td><td>13.57</td><td>64.20</td><td>0.00</td><td>--</td><td>-- Peak</td></tr><tr><td>5 7311.00</td><td>57.20</td><td>74.00</td><td>-16.80</td><td>70.62</td><td>35.82</td><td>14.18</td><td>63.42</td><td>0.00</td><td>103</td><td>336 PEAK</td></tr><tr><td>6 7311.00</td><td>43.92</td><td>54.00</td><td>-10.08</td><td>57.34</td><td>35.82</td><td>14.18</td><td>63.42</td><td>0.00</td><td>103</td><td>336 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 3249.00	48.35	75.64	-27.29	68.40	33.10	9.93	63.08	0.00	--	-- Peak	2 4874.00	46.74	74.00	-27.26	65.09	34.40	11.54	64.29	0.00	100	360 PEAK	3 4874.00	37.78	54.00	-16.22	56.13	34.40	11.54	64.29	0.00	100	360 AVERAGE	4 6498.00	50.27	75.64	-25.37	65.30	35.60	13.57	64.20	0.00	--	-- Peak	5 7311.00	57.20	74.00	-16.80	70.62	35.82	14.18	63.42	0.00	103	336 PEAK	6 7311.00	43.92	54.00	-10.08	57.34	35.82	14.18	63.42	0.00	103	336 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1 3249.00	48.35	75.64	-27.29	68.40	33.10	9.93	63.08	0.00	--	-- Peak																																																																																																				
2 4874.00	46.74	74.00	-27.26	65.09	34.40	11.54	64.29	0.00	100	360 PEAK																																																																																																				
3 4874.00	37.78	54.00	-16.22	56.13	34.40	11.54	64.29	0.00	100	360 AVERAGE																																																																																																				
4 6498.00	50.27	75.64	-25.37	65.30	35.60	13.57	64.20	0.00	--	-- Peak																																																																																																				
5 7311.00	57.20	74.00	-16.80	70.62	35.82	14.18	63.42	0.00	103	336 PEAK																																																																																																				
6 7311.00	43.92	54.00	-10.08	57.34	35.82	14.18	63.42	0.00	103	336 AVERAGE																																																																																																				