


16~63	±0.1	±0.2	±0.4	±0.6	± 15'
63~150	±0.15	±0.25	±0.5	±0.8	± 30'
150~250	±0.2	±0.3	±0.6	±1	± 1'
250~500	±0.4	±0.6	±0.8	±1.5	± '

Label 1

R4X2

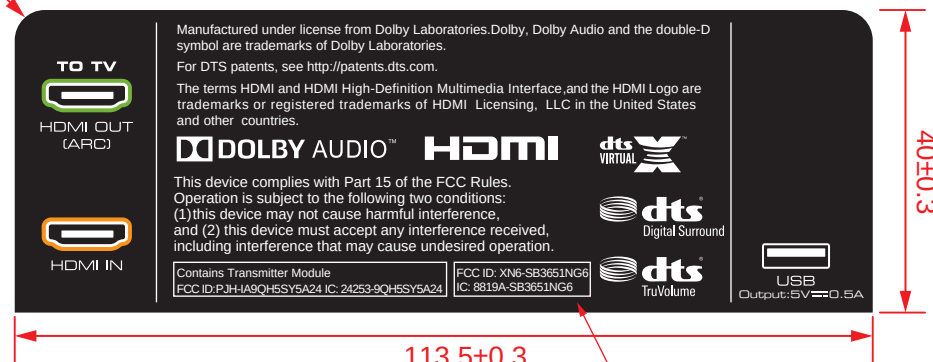

Manufactured under license from Dolby Laboratories. Dolby, Dolby Audio and the double-D symbol are trademarks of Dolby Laboratories.
For DTS patents, see <http://patents.dts.com>.

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries.

DOLBY AUDIO™ **HDMI** **dts VIRTUAL X**

This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) this device may not cause harmful interference,
and (2) this device must accept any interference received,
including interference that may cause undesired operation.

Contains Transmitter Module
FCC ID: PJH-IA9QH5SY5A24 IC: 24253-9QH5SY5A24

FCC ID: XN6-SB3651NG6
IC: 8819A-SB3651NG6

dts Digital Surround **dts** TruVolume

USB Output: 5V 0.5A

Contains Transmitter Module
FCC ID: PJH-IA9QH5SY5A24 IC: 24253-9QH5SY5A24

FCC ID: XN6-SB3651NG6
IC: 8819A-SB3651NG6

USB
Output: 5V 0.5A

NOTE
:

1. IF TOLERANCE FOR EACH DIMENSIONS NOT SHOWN, REFER TO TABLE TABLE FOR TOLERANCE.
2. USE R=1.0MM FOR ALL RADII NOT SPECIFIED.
3. UNACCEPTABLE CONDITIONS: FLASH, SHRINKAGE, DEFORMATION, AND/OR SPOTS.
4. REPRESENTS REVISIONS OR NEW DIMENSIONS.
5. REPRESENTS CRITICAL AREAS TO BE MEASURED.
6. OTHER DIMENSIONS ARE FOR REFERENCE.
7. TEXTURE NUMBER: NO
8. ALL SUBSTANCE NEED TO MEET THE ROHS2.0 / REACH REQUIREMENTS. DETAILS REFER TO ZYLUX'S PROCEDURE "QMI-P40-01".

初粘力: ≥10#;
剝離力: 1.2Kg/in;

C:55
M:0
Y:100
K:10

M:50
Y:100

認證號碼改變


3RD ANGLE
PROJECTION



TOLERANCES	A	B	C	D	ANGLE
~16	±0.05	±0.1	±0.2	±0.4	± 10°
16-63	±0.1	±0.2	±0.4	±0.6	± 15°
63-150	±0.15	±0.25	±0.5	±0.8	± 30°
150-250	±0.2	±0.3	±0.6	±1	± 1°
250-500	±0.4	±0.6	±0.8	±1.5	±

Label 2

R4

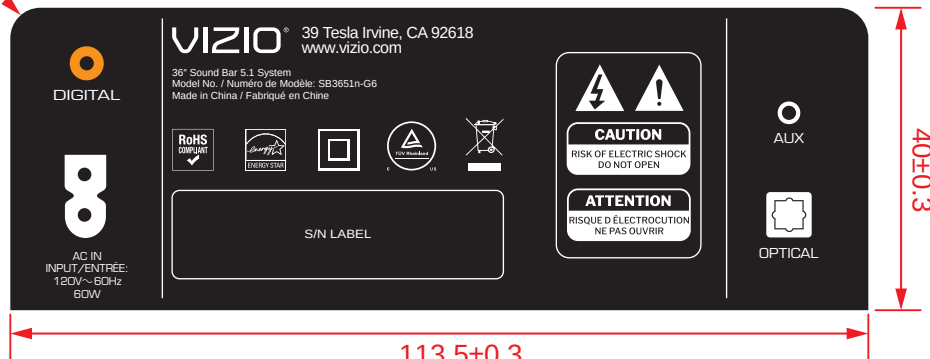

NOTE :

1. IF TOLERANCE FOR EACH DIMENSIONS NOT SHOWN, REFER TO TABLE TABLE FOR TOLERANCE.
2. USE R=1.0MM FOR ALL RADII NOT SPECIFIED.
3. UNACCEPTABLE CONDITIONS: FLASH, SHRINKAGE, DEFORMATION, AND/OR SPOTS.
4. REPRESENTS REVISIONS OR NEW DIMENSIONS.
5. REPRESENTS CRITICAL AREAS TO BE MEASURED.
6. THE MOULD NUMBER: NO
7. TEXTURE NUMBER: NO
8. ALL SUBSTANCE NEED TO MEET THE ROHS2.0 / REACH REQUIREMENTS. DETAILS REFER TO ZYLUX'S PROCEDURE "QMI-P40-01".

M:50
Y:100

