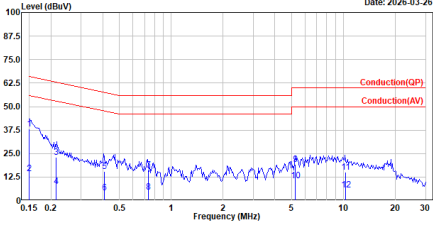
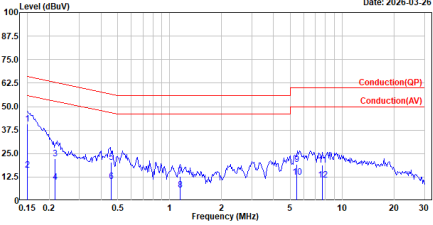


## Appendix A. Test Result of AC Power Line Conducted Emission


| TX_BLE2M_2440MHz_Line                                                                                                                                                                                                                                                               |           |       |       |        |       |        |         | TX_BLE2M_2440MHz_Neutral                                                                                                                                                                                                                                                                |           |       |       |        |       |        |         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------|-------|--------|-------|--------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------|-------|--------|-------|--------|---------|
| <div>Site :HY-SR01<br/>Condition :Line<br/>Mode :TX_BLE2M_2440MHz<br/>test by :Kevin</div> <div>Level (dBuV)<br/>Date: 2026-03-26<br/>Frequency (MHz)<br/>Conduction(QP)<br/>Conduction(AV)</div>  |           |       |       |        |       |        |         | <div>Site :HY-SR01<br/>Condition :Neutral<br/>Mode :TX_BLE2M_2440MHz<br/>test by :Kevin</div> <div>Level (dBuV)<br/>Date: 2026-03-26<br/>Frequency (MHz)<br/>Conduction(QP)<br/>Conduction(AV)</div>  |           |       |       |        |       |        |         |
| No.                                                                                                                                                                                                                                                                                 | Frequency | Level | Limit | Over   | Read  | Factor | Remark  | No.                                                                                                                                                                                                                                                                                     | Frequency | Level | Limit | Over   | Read  | Factor | Remark  |
|                                                                                                                                                                                                                                                                                     | MHz       | dBuV  | dBuV  | dB     | dBuV  | dB     |         |                                                                                                                                                                                                                                                                                         | MHz       | dBuV  | dBuV  | dB     | dBuV  | dB     |         |
| 1                                                                                                                                                                                                                                                                                   | 0.150     | 38.26 | 65.99 | -27.73 | 28.63 | 9.63   | QP      | 1                                                                                                                                                                                                                                                                                       | 0.150     | 48.60 | 65.99 | -17.39 | 38.95 | 9.65   | QP      |
| 2                                                                                                                                                                                                                                                                                   | 0.150     | 14.44 | 55.99 | -41.55 | 4.81  | 9.63   | Average | 2                                                                                                                                                                                                                                                                                       | 0.150     | 16.22 | 55.99 | -39.77 | 6.57  | 9.65   | Average |
| 3                                                                                                                                                                                                                                                                                   | 0.214     | 23.04 | 63.03 | -39.99 | 13.41 | 9.63   | QP      | 3                                                                                                                                                                                                                                                                                       | 0.217     | 22.33 | 62.93 | -40.60 | 12.69 | 9.64   | QP      |
| 4                                                                                                                                                                                                                                                                                   | 0.214     | 7.44  | 53.03 | -45.59 | -2.19 | 9.63   | Average | 4                                                                                                                                                                                                                                                                                       | 0.217     | 9.67  | 52.93 | -43.26 | 8.93  | 9.64   | Average |
| 5                                                                                                                                                                                                                                                                                   | 0.409     | 15.35 | 57.67 | -42.32 | 5.71  | 9.64   | QP      | 5                                                                                                                                                                                                                                                                                       | 0.457     | 20.25 | 56.74 | -36.49 | 10.59 | 9.66   | QP      |
| 6                                                                                                                                                                                                                                                                                   | 0.409     | 4.29  | 47.67 | -43.38 | -5.35 | 9.64   | Average | 6                                                                                                                                                                                                                                                                                       | 0.457     | 18.30 | 46.74 | -28.44 | 8.64  | 9.66   | Average |
| 7                                                                                                                                                                                                                                                                                   | 0.734     | 16.35 | 56.00 | -39.65 | 6.68  | 9.67   | QP      | 7                                                                                                                                                                                                                                                                                       | 1.150     | 12.79 | 56.00 | -43.21 | 3.08  | 9.71   | QP      |
| 8                                                                                                                                                                                                                                                                                   | 0.734     | 4.71  | 46.00 | -41.29 | -4.96 | 9.67   | Average | 8                                                                                                                                                                                                                                                                                       | 1.150     | 5.49  | 46.00 | -40.51 | -4.22 | 9.71   | Average |
| 9                                                                                                                                                                                                                                                                                   | 5.255     | 19.06 | 60.00 | -40.94 | 8.95  | 10.11  | QP      | 9                                                                                                                                                                                                                                                                                       | 5.475     | 19.42 | 60.00 | -40.58 | 9.29  | 10.13  | QP      |
| 10                                                                                                                                                                                                                                                                                  | 5.255     | 18.42 | 50.00 | -31.58 | 8.31  | 10.11  | Average | 10                                                                                                                                                                                                                                                                                      | 5.475     | 12.60 | 50.00 | -37.40 | 2.47  | 10.13  | Average |
| 11                                                                                                                                                                                                                                                                                  | 10.283    | 15.21 | 60.00 | -44.79 | 5.02  | 10.19  | QP      | 11                                                                                                                                                                                                                                                                                      | 7.666     | 18.91 | 60.00 | -41.09 | 8.72  | 10.19  | QP      |
| 12                                                                                                                                                                                                                                                                                  | 10.283    | 5.66  | 50.00 | -44.34 | -4.53 | 10.19  | Average | 12                                                                                                                                                                                                                                                                                      | 7.666     | 10.95 | 50.00 | -39.05 | 0.76  | 10.19  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = LISN insertion loss + Cable loss  
3. Over Limit = Level - Limit Line

Note:  
1. Level = Read Level + Factor  
2. Factor = LISN insertion loss + Cable loss  
3. Over Limit = Level - Limit Line

**Appendix B. Test Result of 6dB Bandwidth**

| Modulation   | Frequency<br>(MHz) | 6dB Bandwidth<br>(MHz) | Limit<br>(MHz) | Result |
|--------------|--------------------|------------------------|----------------|--------|
| GFSK (1Mbps) | 2402               | 0.71                   | $\geq 0.50$    | Pass   |
|              | 2440               | 0.71                   | $\geq 0.50$    | Pass   |
|              | 2480               | 0.71                   | $\geq 0.50$    | Pass   |
| GFSK (2Mbps) | 2402               | 1.13                   | $\geq 0.50$    | Pass   |
|              | 2440               | 1.14                   | $\geq 0.50$    | Pass   |
|              | 2480               | 1.14                   | $\geq 0.50$    | Pass   |

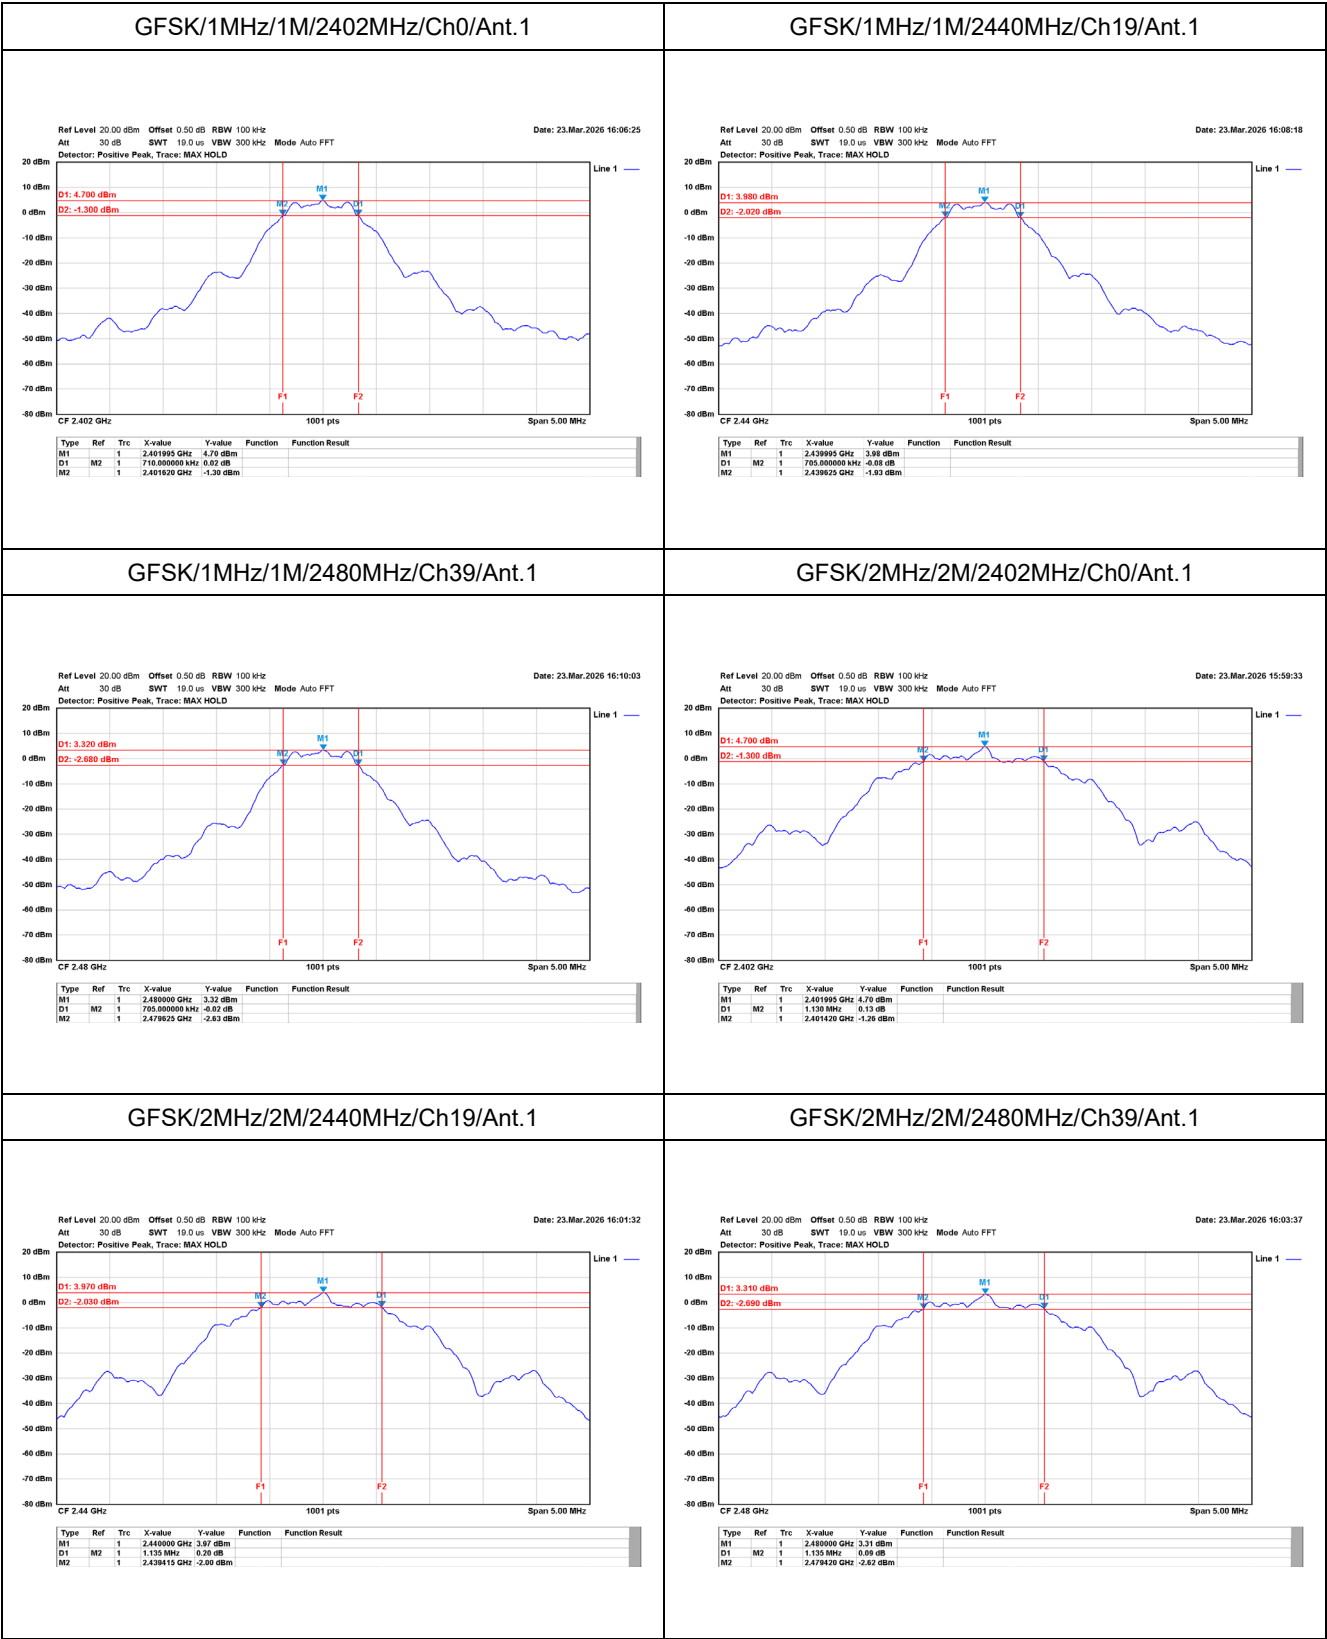


**Appendix C. Test Result of Maximum Peak Conducted Output Power**

| Modulation   | Frequency<br>(MHz) | Maximum Peak Conducted Output Power<br>(dBm) | Limit<br>(dBm) | Result |
|--------------|--------------------|----------------------------------------------|----------------|--------|
| GFSK (1Mbps) | 2402               | 6.03                                         | 30.00          | Pass   |
|              | 2440               | 5.75                                         | 30.00          | Pass   |
|              | 2480               | 5.33                                         | 30.00          | Pass   |
| GFSK (2Mbps) | 2402               | 6.07                                         | 30.00          | Pass   |
|              | 2440               | 5.79                                         | 30.00          | Pass   |
|              | 2480               | 5.37                                         | 30.00          | Pass   |


**Appendix D. Test Result of Power Spectral Density**


| Modulation   | Frequency<br>(MHz) | Maximum Power Spectral Density<br>(dBm/3kHz) | Limit<br>(dBm/3kHz) | Result |
|--------------|--------------------|----------------------------------------------|---------------------|--------|
| GFSK (1Mbps) | 2402               | -11.38                                       | 8.00                | Pass   |
|              | 2440               | -11.95                                       | 8.00                | Pass   |
|              | 2480               | -12.40                                       | 8.00                | Pass   |
| GFSK (2Mbps) | 2402               | -13.63                                       | 8.00                | Pass   |
|              | 2440               | -13.75                                       | 8.00                | Pass   |
|              | 2480               | -14.55                                       | 8.00                | Pass   |

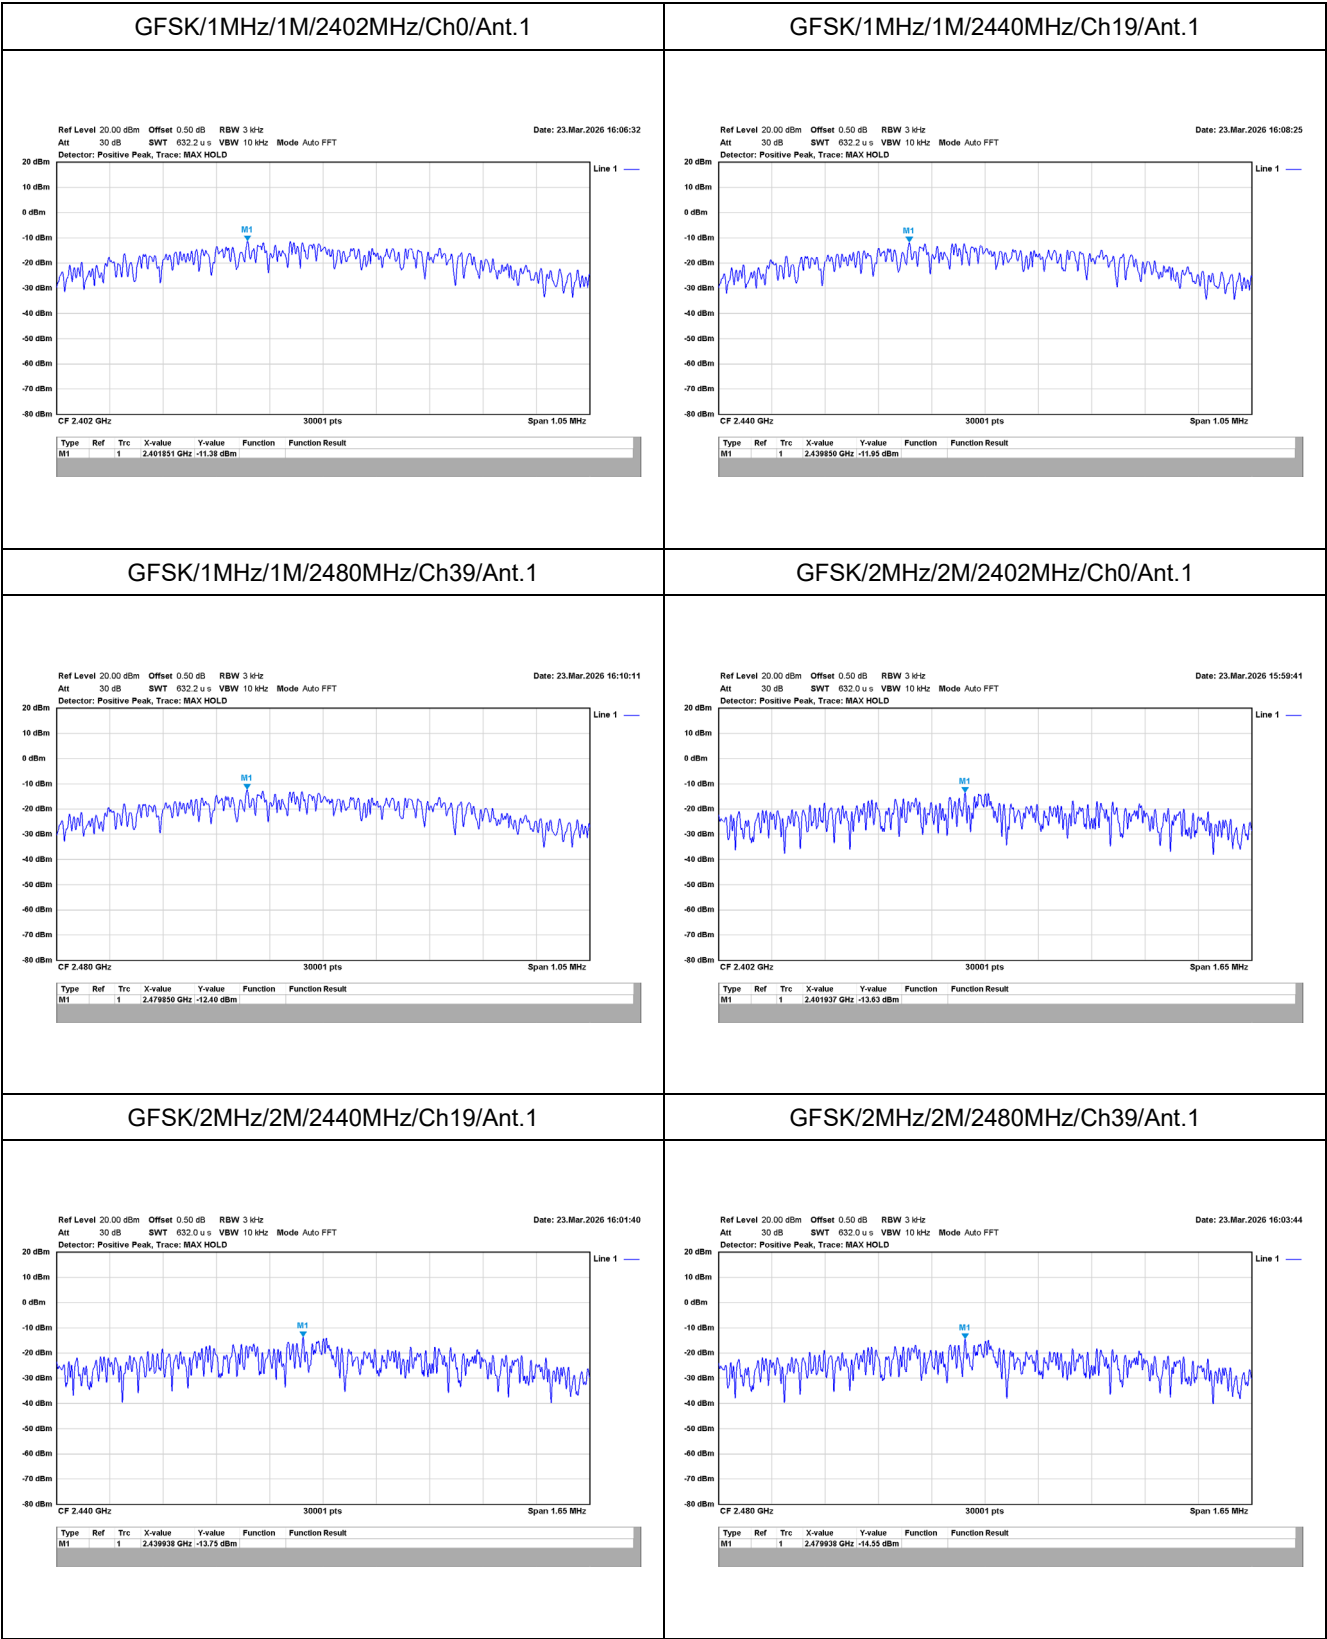


**Appendix E. Test Result of Antenna Port Conducted Emission**

| Modulation    | Measurement Level<br>$\Delta$ (dB) | Result |
|---------------|------------------------------------|--------|
| GFSK (1 Mbps) | > 20                               | PASS   |
| GFSK (2 Mbps) | > 20                               | PASS   |

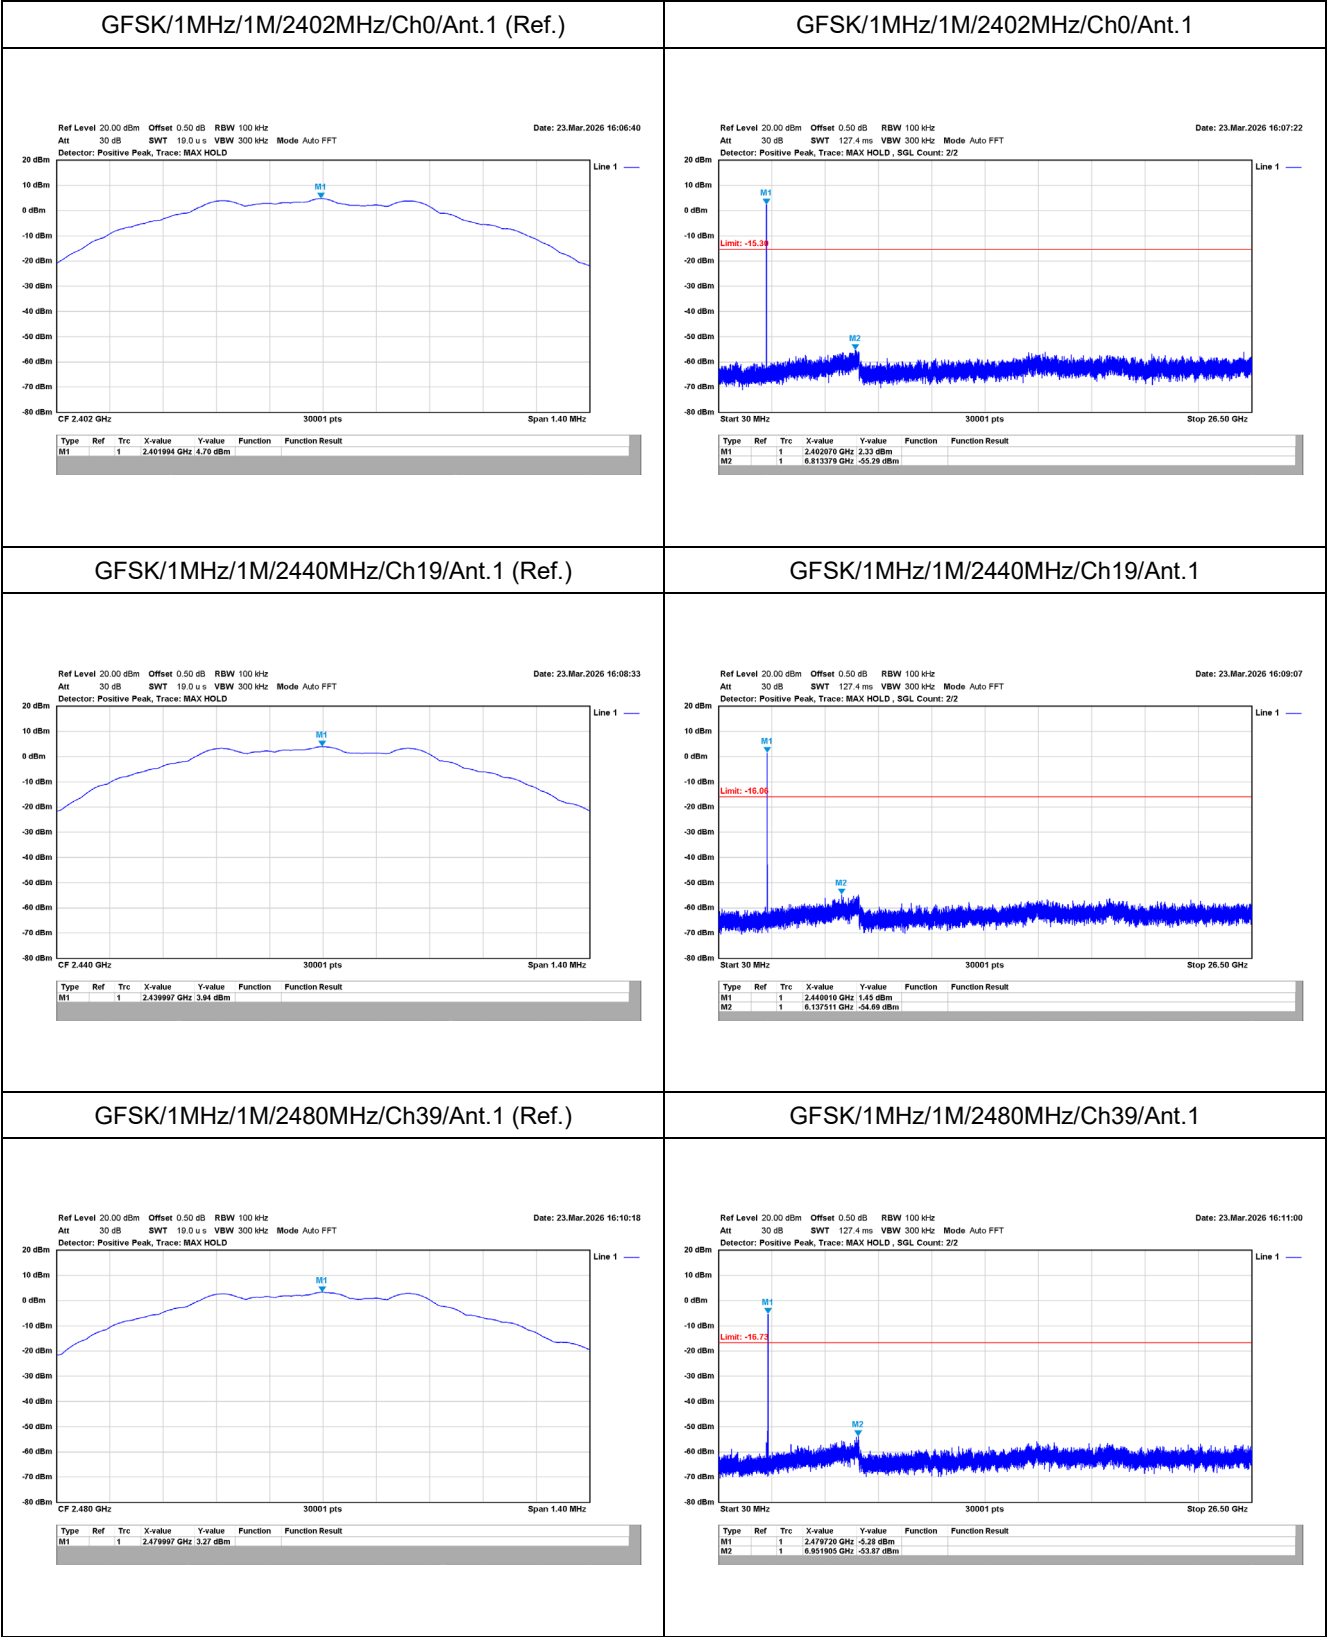


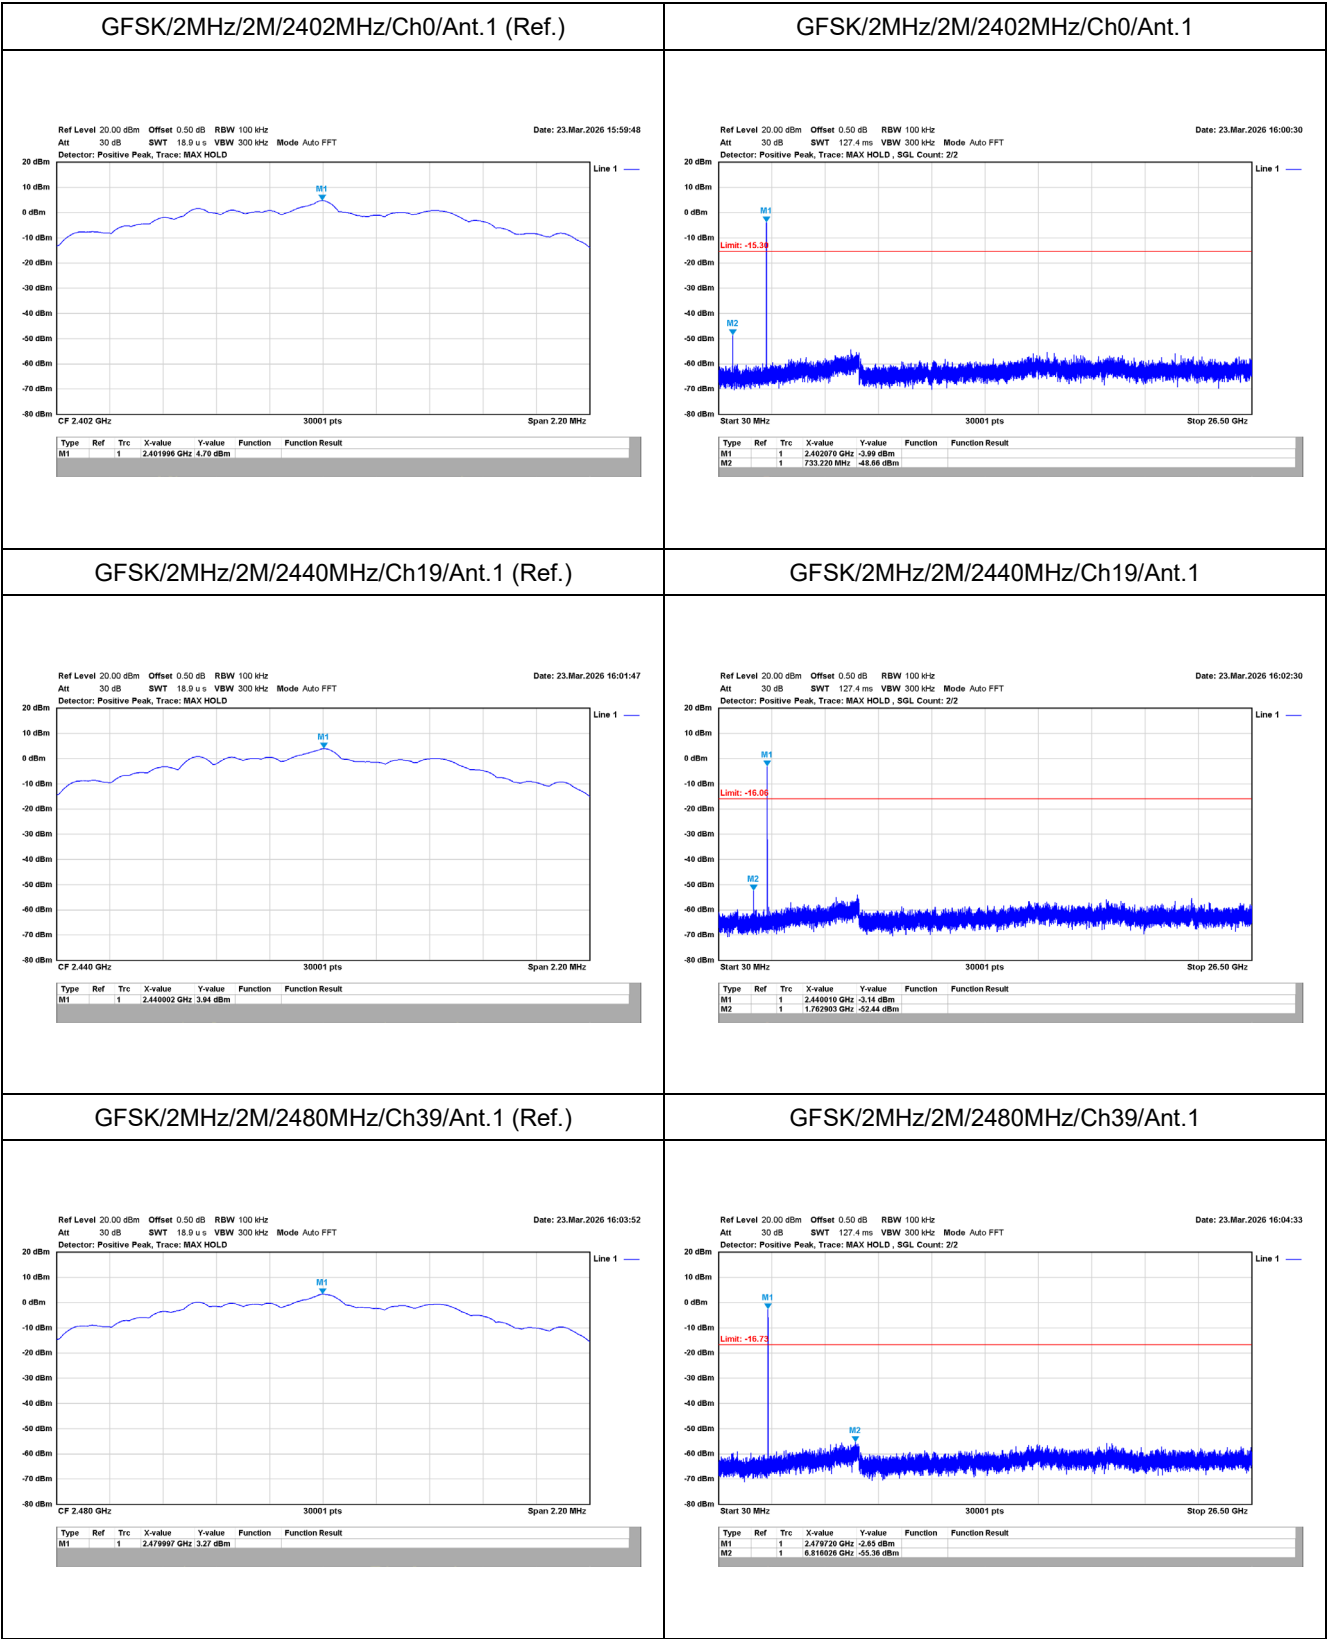


GFSK/1MHz/1M/2402MHz/Ch0/Ant.1(Band Edge)

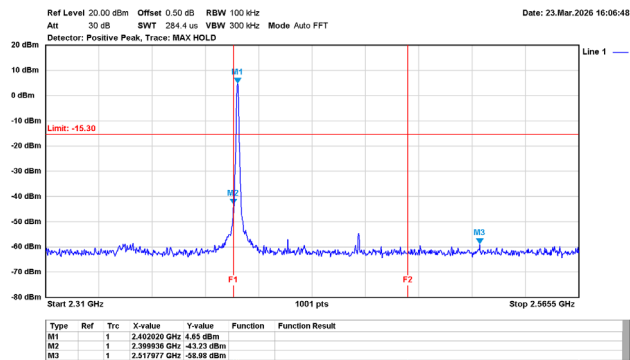


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1(Band Edge)

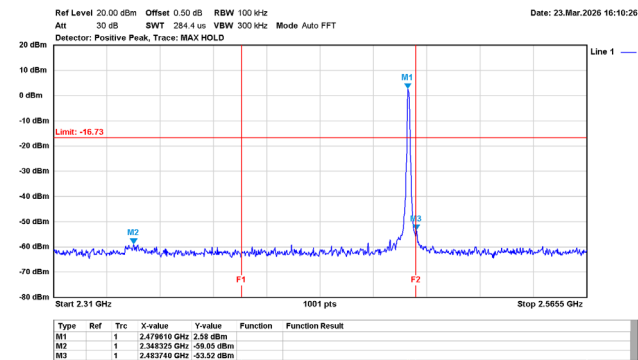

GFSK/2MHz/2M/2402MHz/Ch0/Ant.1(Band Edge)

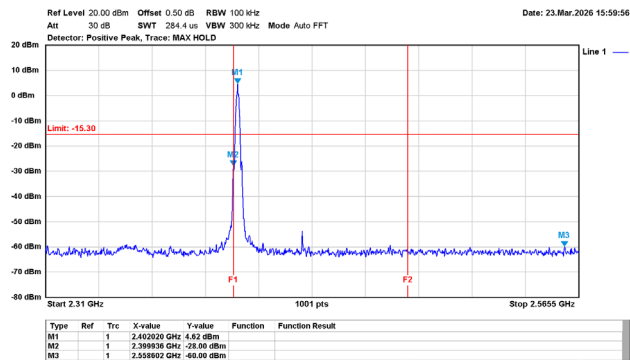


GFSK/2MHz/2M/2480MHz/Ch39/Ant.1(Band Edge)

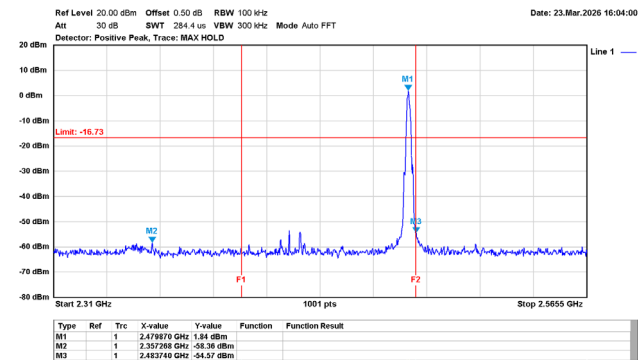

## Appendix F. Test Result of Radiated Emission

### TX\_BLE1M\_2402MHz\_H

Site :HY-CB02  
Condition :3m ,HORIZONTAL  
mode :TX\_BLE1M\_2402MHz  
Test by :Bob Chiu

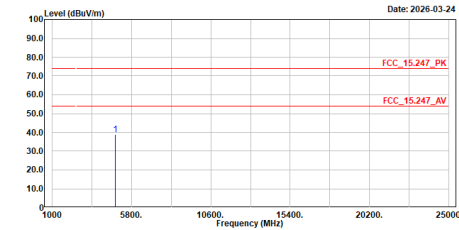


| No. | Frequency | Level  | Limit | Over   | Read  | Factor | Remark |
|-----|-----------|--------|-------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line  | Limit  | Level | dB/m   |        |
| 1   | 4884.000  | 38.89  | 74.00 | -35.11 | 51.02 | -12.13 | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

### TX\_BLE1M\_2402MHz\_V

Site :HY-CB02  
Condition :3m ,VERTICAL  
mode :TX\_BLE1M\_2402MHz  
Test by :Bob Chiu

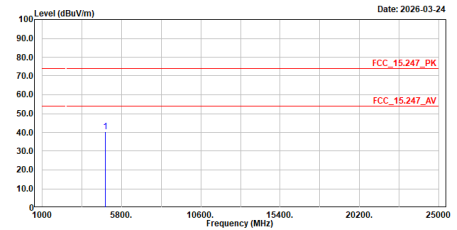


| No. | Frequency | Level  | Limit | Over   | Read  | Factor | Remark |
|-----|-----------|--------|-------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line  | Limit  | Level | dB/m   |        |
| 1   | 4884.000  | 40.47  | 74.00 | -33.53 | 52.60 | -12.13 | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

### TX\_BLE1M\_2440MHz\_H

Site :HY-CB02  
Condition :3m ,HORIZONTAL  
mode :TX\_BLE1M\_2440MHz  
Test by :Bob Chiu

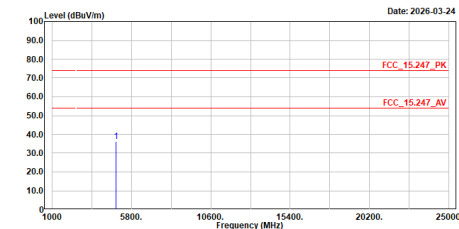


| No. | Frequency | Level  | Limit | Over   | Read  | Factor | Remark |
|-----|-----------|--------|-------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line  | Limit  | Level | dB/m   |        |
| 1   | 4880.000  | 36.11  | 74.00 | -37.89 | 47.81 | -11.70 | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

### TX\_BLE1M\_2440MHz\_V

Site :HY-CB02  
Condition :3m ,VERTICAL  
mode :TX\_BLE1M\_2440MHz  
Test by :Bob Chiu

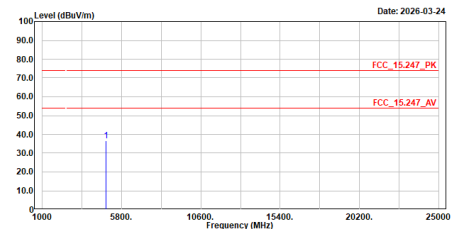


| No. | Frequency | Level  | Limit | Over   | Read  | Factor | Remark |
|-----|-----------|--------|-------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line  | Limit  | Level | dB/m   |        |
| 1   | 4880.000  | 36.54  | 74.00 | -37.46 | 48.24 | -11.70 | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE1M\_2480MHz\_H

Site :HY-CB02  
Condition :3m ,HORIZONTAL  
mode :TX\_BLE1M\_2480MHz  
Test by :Bob Chiu

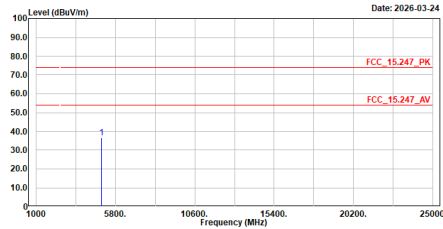


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 4960.000  | 36.43  | 74.00  | -37.57 | 47.72 | -11.29 | Peak   |

## Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE1M\_2480MHz\_V

Site :HY-CB02  
Condition :3m ,VERTICAL  
mode :TX\_BLE1M\_2480MHz  
Test by :Bob Chiu

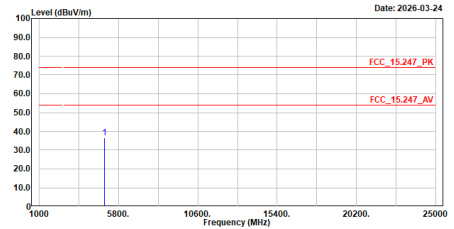


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 4960.000  | 36.58  | 74.00  | -37.42 | 47.87 | -11.29 | Peak   |

## Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2402MHz\_H

Site :HY-CB02  
Condition :3m ,HORIZONTAL  
mode :TX\_BLE2M\_2402MHz  
Test by :Bob Chiu

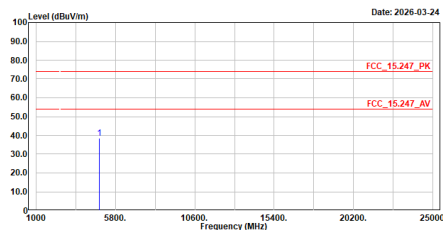


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 4804.000  | 38.59  | 74.00  | -35.41 | 50.72 | -12.13 | Peak   |

## Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2402MHz\_V

Site :HY-CB02  
Condition :3m ,VERTICAL  
mode :TX\_BLE2M\_2402MHz  
Test by :Bob Chiu

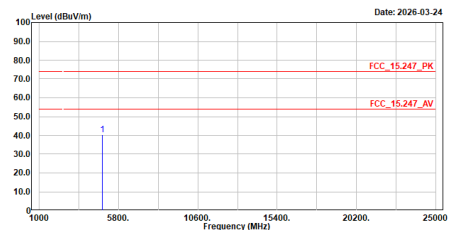


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 4804.000  | 40.28  | 74.00  | -33.72 | 52.41 | -12.13 | Peak   |

## Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2440MHz\_H

Site :HY-CB02  
Condition :3m ,HORIZONTAL  
mode :TX\_BLE2M\_2440MHz  
Test by :Bob Chiu

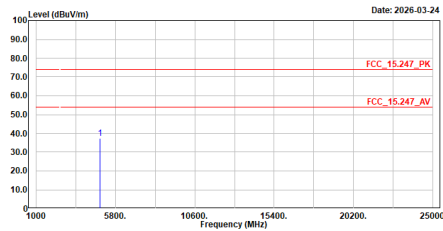


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 4880.000  | 37.49  | 74.00  | -36.51 | 49.19 | -11.70 | Peak   |

## Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2440MHz\_V

Site :HY-CB02  
Condition :3m ,VERTICAL  
mode :TX\_BLE2M\_2440MHz  
Test by :Bob Chiu

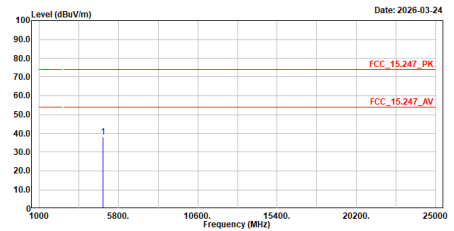


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 4880.000  | 38.25  | 74.00  | -35.75 | 49.95 | -11.70 | Peak   |

## Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2480MHz\_H

Site :HY-CB02  
Condition :3m ,HORIZONTAL  
mode :TX\_BLE2M\_2480MHz  
Test by :Bob Chiu

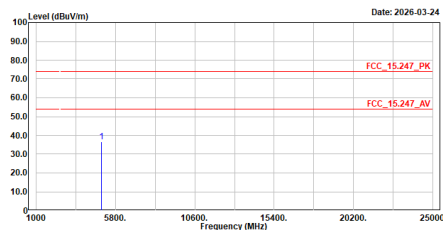


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 4960.000  | 36.66  | 74.00  | -37.34 | 47.95 | -11.29 | Peak   |

## Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2480MHz\_V

Site :HY-CB02  
Condition :3m ,VERTICAL  
mode :TX\_BLE2M\_2480MHz  
Test by :Bob Chiu

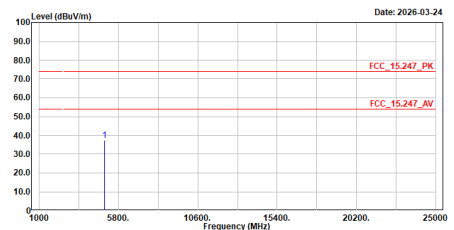


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 4960.000  | 37.42  | 74.00  | -36.58 | 48.71 | -11.29 | Peak   |

## Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2440MHz\_H\_QP

Site :HY-CB02  
Condition :3m ,HORIZONTAL  
mode :TX\_BLE2M\_2440MHz  
Test by :Bob Chiu

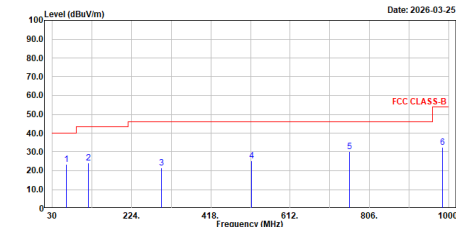


| No. | Frequency | Level  | Limit | Over   | Read  | Factor | Remark |
|-----|-----------|--------|-------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line  | Limit  | Level | dB/m   |        |
| 1   | 63.752    | 23.34  | 40.00 | -16.66 | 34.96 | -11.62 | QP     |
| 2   | 118.705   | 24.24  | 43.50 | -19.26 | 37.41 | -13.17 | QP     |
| 3   | 296.714   | 21.47  | 46.00 | -24.53 | 31.97 | -10.50 | QP     |
| 4   | 518.125   | 25.33  | 46.00 | -20.67 | 30.63 | -5.30  | QP     |
| 5   | 756.687   | 30.28  | 46.00 | -15.72 | 31.38 | -1.10  | QP     |
| 6   | 984.799   | 32.27  | 54.00 | -21.73 | 30.94 | 1.33   | QP     |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

## TX\_BLE2M\_2440MHz\_V\_QP

Site :HY-CB02  
Condition :3m ,VERTICAL  
mode :TX\_BLE2M\_2440MHz  
Test by :Bob Chiu

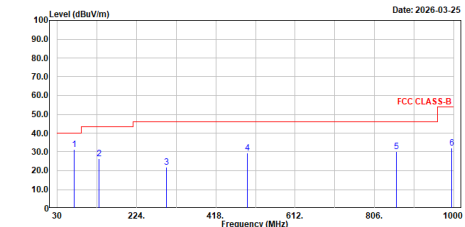


| No. | Frequency | Level  | Limit | Over   | Read  | Factor | Remark |
|-----|-----------|--------|-------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line  | Limit  | Level | dB/m   |        |
| 1   | 71.102    | 31.39  | 40.00 | -8.61  | 44.46 | -13.07 | QP     |
| 2   | 132.255   | 26.41  | 43.50 | -17.09 | 38.42 | -12.01 | QP     |
| 3   | 296.714   | 21.72  | 46.00 | -24.28 | 32.22 | -10.50 | QP     |
| 4   | 494.524   | 29.59  | 46.00 | -16.41 | 35.43 | -5.84  | QP     |
| 5   | 859.993   | 30.22  | 46.00 | -15.78 | 30.37 | -0.15  | QP     |
| 6   | 995.900   | 31.95  | 54.00 | -22.05 | 30.68 | 1.27   | QP     |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

## Charge\_H\_QP

Site :HY-CB02  
Condition :3m ,HORIZONTAL  
mode :Charge  
Test by :Bob Chiu

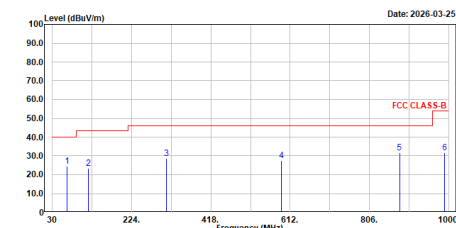


| No. | Frequency | Level  | Limit | Over   | Read  | Factor | Remark |
|-----|-----------|--------|-------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line  | Limit  | Level | dB/m   |        |
| 1   | 66.652    | 24.58  | 40.00 | -15.42 | 37.00 | -12.42 | QP     |
| 2   | 118.705   | 23.51  | 43.50 | -19.99 | 36.68 | -13.17 | QP     |
| 3   | 309.814   | 28.66  | 46.00 | -17.34 | 38.77 | -10.11 | QP     |
| 4   | 590.729   | 27.71  | 46.00 | -18.29 | 31.49 | -3.78  | QP     |
| 5   | 879.694   | 31.71  | 46.00 | -14.29 | 31.74 | -0.03  | QP     |
| 6   | 990.500   | 31.87  | 54.00 | -22.13 | 30.55 | 1.32   | QP     |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

## Charge\_V\_QP

Site :HY-CB02  
Condition :3m ,VERTICAL  
mode :Charge  
Test by :Bob Chiu

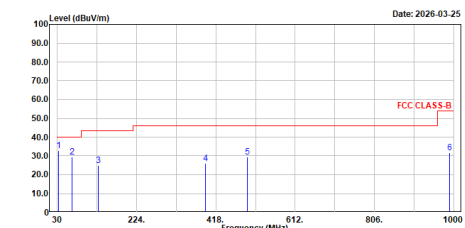


| No. | Frequency | Level  | Limit | Over   | Read  | Factor | Remark |
|-----|-----------|--------|-------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line  | Limit  | Level | dB/m   |        |
| 1   | 33.350    | 32.94  | 40.00 | -7.06  | 43.85 | -10.91 | QP     |
| 2   | 66.652    | 29.48  | 40.00 | -10.52 | 41.90 | -12.42 | QP     |
| 3   | 129.905   | 24.79  | 43.50 | -18.71 | 36.92 | -12.13 | QP     |
| 4   | 393.119   | 26.02  | 46.00 | -19.98 | 33.95 | -7.93  | QP     |
| 5   | 494.524   | 29.32  | 46.00 | -16.68 | 35.16 | -5.84  | QP     |
| 6   | 989.200   | 31.82  | 54.00 | -22.18 | 30.49 | 1.33   | QP     |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

## TX\_BLE1M\_2402MHz\_H\_Average

Site :HY-CB02  
Condition :3m ,Horizontal  
mode :TX\_BLE1M\_2402MHz  
Test by :Bob Chiu

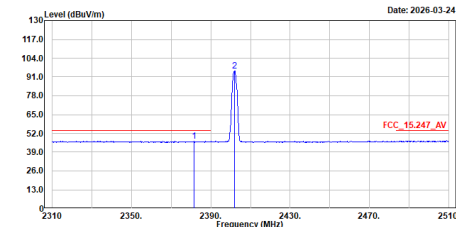


| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB/m   |         |
| 1   | 2381.400  | 46.62  | 54.00  | -7.38 | 16.41 | 30.21  | Average |
| 2   | 2402.000  | 95.12  | -----  | ----- | 65.00 | 30.12  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE1M\_2402MHz\_H\_Peak

Site :HY-CB02  
Condition :3m ,Horizontal  
mode :TX\_BLE1M\_2402MHz  
Test by :Bob Chiu

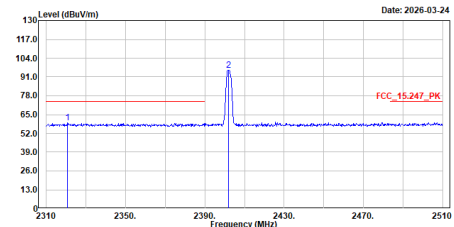


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 2330.800  | 59.59  | 74.00  | -14.41 | 29.40 | 30.19  | Peak   |
| 2   | 2401.800  | 95.68  | -----  | -----  | 65.56 | 30.12  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE1M\_2402MHz\_V\_Average

Site :HY-CB02  
Condition :3m ,Vertical  
mode :TX\_BLE1M\_2402MHz  
Test by :Bob Chiu

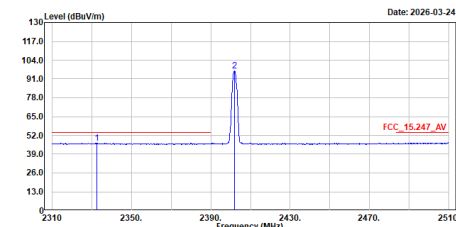


| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB/m   |         |
| 1   | 2332.600  | 46.67  | 54.00  | -7.33 | 16.42 | 30.25  | Average |
| 2   | 2402.000  | 96.50  | -----  | ----- | 66.38 | 30.12  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE1M\_2402MHz\_V\_Peak

Site :HY-CB02  
Condition :3m ,Vertical  
mode :TX\_BLE1M\_2402MHz  
Test by :Bob Chiu

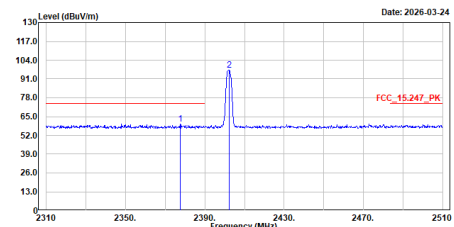


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 2377.600  | 59.63  | 74.00  | -14.37 | 29.45 | 30.18  | Peak   |
| 2   | 2402.400  | 97.05  | -----  | -----  | 66.93 | 30.12  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE1M\_2480MHz\_H\_Average

Site :HY-CB02  
Condition :3m ,Horizontal  
mode :TX\_BLE1M\_2480MHz  
Test by :Bob Chiu

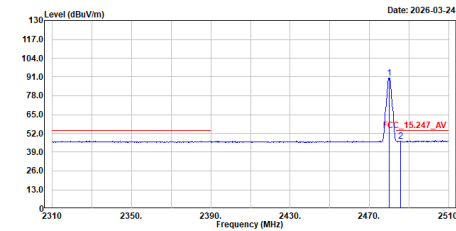


| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB/m   |         |
| 1   | 2480.000  | 90.37  | 54.00  | -7.41 | 60.29 | 30.08  | Average |
| 2   | 2485.600  | 46.59  | 54.00  | -7.41 | 16.45 | 30.14  | Average |

## Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE1M\_2480MHz\_H\_Peak

Site :HY-CB02  
Condition :3m ,Horizontal  
mode :TX\_BLE1M\_2480MHz  
Test by :Bob Chiu

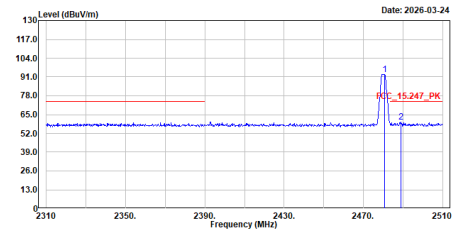


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 2480.600  | 92.93  | 54.00  | -14.04 | 62.84 | 30.09  | Peak   |
| 2   | 2489.000  | 59.96  | 54.00  | -14.04 | 29.78 | 30.18  | Peak   |

## Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE1M\_2480MHz\_V\_Average

Site :HY-CB02  
Condition :3m ,Vertical  
mode :TX\_BLE1M\_2480MHz  
Test by :Bob Chiu

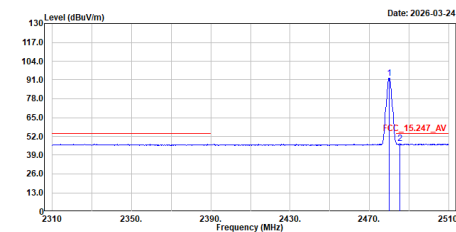


| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB/m   |         |
| 1   | 2480.000  | 92.24  | 54.00  | -7.15 | 62.16 | 30.08  | Average |
| 2   | 2485.400  | 46.85  | 54.00  | -7.15 | 16.72 | 30.13  | Average |

## Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE1M\_2480MHz\_V\_Peak

Site :HY-CB02  
Condition :3m ,Vertical  
mode :TX\_BLE1M\_2480MHz  
Test by :Bob Chiu

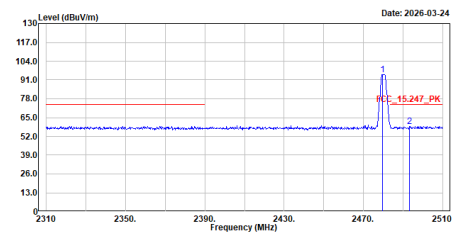


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 2479.600  | 94.76  | 54.00  | -15.04 | 64.68 | 30.08  | Peak   |
| 2   | 2493.200  | 58.96  | 54.00  | -15.04 | 28.77 | 30.19  | Peak   |

## Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2402MHz\_H\_Average

Site :HY-CB02  
Condition :3m ,Horizontal  
mode :TX\_BLE2M\_2402MHz  
Test by :Bob Chiu

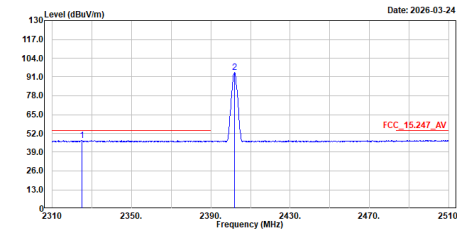


| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB/m   |         |
| 1   | 2325.000  | 47.10  | 54.00  | -6.90 | 16.87 | 30.23  | Average |
| 2   | 2402.000  | 93.97  | -----  | ----- | 63.85 | 30.12  | Average |

## Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2402MHz\_H\_Peak

Site :HY-CB02  
Condition :3m ,Horizontal  
mode :TX\_BLE2M\_2402MHz  
Test by :Bob Chiu

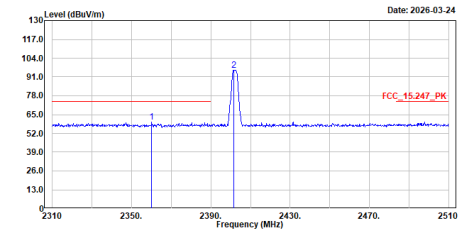


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 2360.200  | 59.63  | 74.00  | -14.37 | 29.44 | 30.19  | Peak   |
| 2   | 2401.600  | 95.67  | -----  | -----  | 65.55 | 30.12  | Peak   |

## Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2402MHz\_V\_Average

Site :HY-CB02  
Condition :3m ,Vertical  
mode :TX\_BLE2M\_2402MHz  
Test by :Bob Chiu

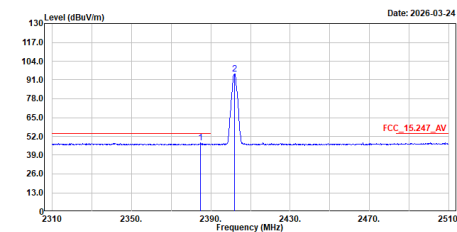


| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB/m   |         |
| 1   | 2384.800  | 47.48  | 54.00  | -6.52 | 17.27 | 30.21  | Average |
| 2   | 2402.000  | 95.29  | -----  | ----- | 65.17 | 30.12  | Average |

## Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2402MHz\_V\_Peak

Site :HY-CB02  
Condition :3m ,Vertical  
mode :TX\_BLE2M\_2402MHz  
Test by :Bob Chiu

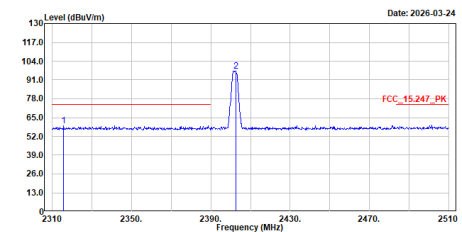

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 2315.800  | 59.36  | 74.00  | -14.64 | 29.19 | 30.17  | Peak   |
| 2   | 2402.600  | 97.01  | -----  | -----  | 66.88 | 30.13  | Peak   |

## Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

<