FCC SAR TEST REPORT

FCC ID	:	**XNAWUP01**
Equipment	:	**Data Hub**
Brand Name	:	**Withings**
Model Name	:	**WUP01**
Applicant	:	**Withings 2 rue Maurice Hartmann 92130 Issy-Les-Moulineaux France**
Manufacturer	:	**Withings 2 rue Maurice Hartmann 92130 Issy-Les-Moulineaux France**
Standard	:	**FCC 47 CFR Part 2 (2.1093)**

The product was received on May 26, 2021 and testing was started from Jun 07, 2021 and completed on Jun 08, 2021. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Cona Huang / Deputy Manager

Sporton International Inc. EMC & Wireless Communications Laboratory
No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan

Table of Contents

1. Statement of Compliance **4**
2. Guidance Applied **4**
3. Equipment Under Test (EUT) Information **5**
3.1 General Information 5
3.2 General LTE SAR Test and Reporting Considerations 6
4. RF Exposure Limits **8**
4.1 Uncontrolled Environment 8
4.2 Controlled Environment 8
5. Specific Absorption Rate (SAR) **9**
5.1 Introduction 9
5.2 SAR Definition 9
6. System Description and Setup **10**
6.1 Test Site Location 10
6.2 E-Field Probe 11
6.3 Data Acquisition Electronics (DAE) 11
6.4 Phantom 12
6.5 Device Holder 13
7. Measurement Procedures **14**
7.1 Spatial Peak SAR Evaluation 14
7.2 Power Reference Measurement 15
7.3 Area Scan 15
7.4 Zoom Scan 16
7.5 Volume Scan Procedures 16
7.6 Power Drift Monitoring 16
8. Test Equipment List **17**
9. System Verification **18**
9.1 Tissue Verification 18
9.2 System Performance Check Results 18
10. LTE Cat M1 / NB-IOT Output Power (Unit: dBm) **19**
11. Antenna Location **32**
12. SAR Test Results **33**
12.1 Cat M1 Body-worn SAR 34
12.2 NB-IOT Body-worn SAR 35
13. Simultaneous Transmission Analysis **36**
13.1 Body-worn Exposure Conditions 36
14. Uncertainty Assessment **38**
15. References **38**
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASY Calibration Certificate
Appendix D. Test Setup Photos

History of this test report

Report No.	Version	Description	Issued Date
FA150304	01	Initial issue of report	Jul. 16, 2021

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Withings, Data Hub, WUP01, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary Body-worn (Separation 15mm) 1g SAR (W/kg)	Highest Simultaneous Transmission 1g SAR (W/kg)
Licensed	Cat-M1 LTE Band 5	0.29	1.15
	Cat-M1 LTE Band 12	0.19	
	Cat-M1 LTE Band 13	0.20	
	Cat-M1 LTE Band 2 / 25	0.58	
	Cat-M1 LTE Band 26	0.29	
	Cat-M1 LTE Band 4 /66	0.68	
	NB-IOT LTE Band 5	0.30	1.17
	NB-IOT LTE Band 12	0.05	
	NB-IOT LTE Band 13	0.10	
	NB-IOT LTE Band 2 / 25	0.42	
	NB-IOT LTE Band 26	0.37	
	NB-IOT LTE Band 4 / 66	0.70	
DTS	2.4GHz WLAN	0.70	1.17
DSS	Bluetooth	0.06	0.73
Date of Testing:		2021/6/7 ~ 2021/6/8	

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Carlie Tsai

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D05 SAR for LTE Devices v02r05

3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Data Hub
Brand Name	Withings
Model Name	WUP01
FCC ID	XNAWUP01
SAR MAC ID	00:24:E4:B1:08:62
Wireless Technology and Frequency Range	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 66: 1710 MHz ~ 1780 MHz WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	LTE: QPSK, 16QAM WLAN: 802.11b/g/n HT20 Bluetooth BR/EDR/LE
HW Version	v6a
SW Version	v521
EUT Stage	Identical Prototype

Remark:

1. Based on original report FCC ID: XNAWUP01, Sporton SAR report no.: FA031828 changed WWAN antenna, in this report full SAR testing for WWAN operation, and WLAN/Bluetooth SAR refer to FCC ID: XNAWUP01, Sporton SAR report no.: FA031828, and the result are used perform Sim-Tx analysis.

3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05	
FCC ID	XNAWUP01
Equipment Name	Data Hub
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 66: 1710 MHz ~ 1780 MHz
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz
uplink modulations used	QPSK / 16QAM
LTE Voice / Data requirements	Data only
LTE MPR permanently built-in by design	**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3**

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.

Transmission (H, M, L) channel numbers and frequencies in each LTE band

LTE Band 2

	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900

LTE Band 4

	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745

LTE Band 5

	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844

LTE Band 12

	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711

LTE Band 13

	Bandwidth 5 MHz		Bandwidth 10 MHz	
	Channel #	Freq.(MHz)	Channel #	Freq.(MHz)
L	23205	779.5	23230	782
M	23230	782		
H	23255	784.5		

LTE Band 25

	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905

LTE Band 26

	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5

LTE Band 66

	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\mathbf{SAR} = \frac{\mathbf{d}}{\mathbf{dt}}\left(\frac{\mathbf{dW}}{\mathbf{dm}}\right) = \frac{\mathbf{d}}{\mathbf{dt}}\left(\frac{\mathbf{dW}}{\boldsymbol{\rho}\mathbf{dv}}\right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

$$\mathbf{SAR} = \frac{\boldsymbol{\sigma}|\mathbf{E}|^2}{\boldsymbol{\rho}}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

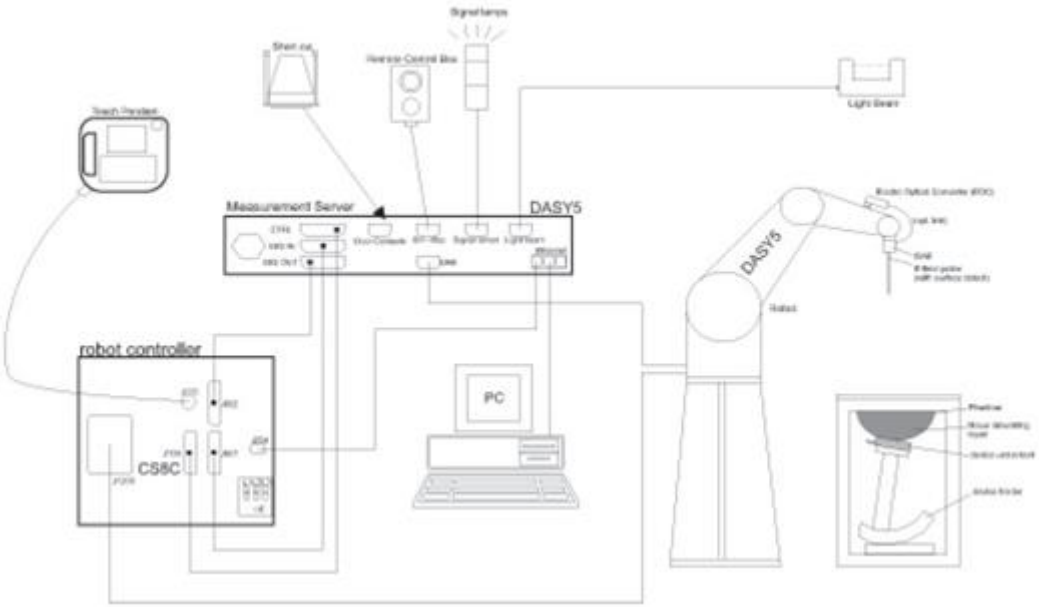

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	EMC & Wireless Communications Laboratory		Wensan Laboratory		
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan		
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	

6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ±0.2 dB (30 MHz – 4 GHz)	
Directivity	±0.2 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 µW/g – >100 mW/g; Linearity: ±0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

Fig 5.1 Photo of DAE

6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	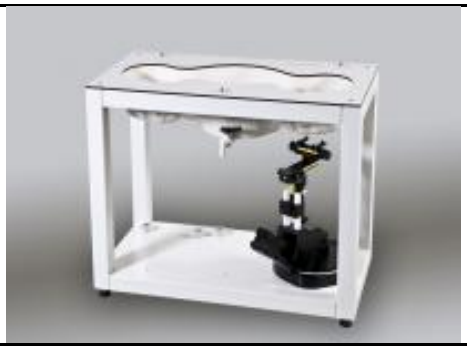
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	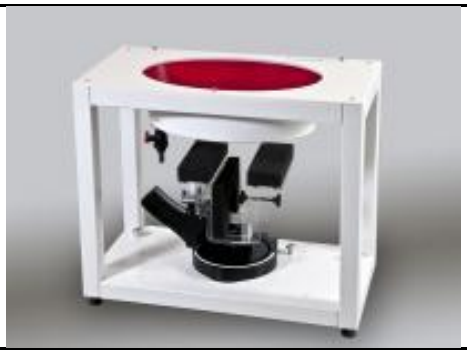
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.

Mounting Device for Hand-Held Transmitters

Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

(a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
(b) Read the WWAN RF power level from the base station simulator.
(c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
(d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

(a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
(b) Place the EUT in the positions as Appendix D demonstrates.
(c) Set scan area, grid size and other setting on the DASY software.
(d) Measure SAR results for the highest power channel on each testing position.
(e) Find out the largest SAR result on these testing positions of each band
(f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

(a) Power reference measurement
(b) Area scan
(c) Zoom scan
(d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

(a) Extraction of the measured data (grid and values) from the Zoom Scan
(b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
(c) Generation of a high-resolution mesh within the measured volume
(d) Interpolation of all measured values form the measurement grid to the high-resolution grid
(e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
(f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	½·δ·ln(2) ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area}, Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx_{Zoom}, Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

7.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit(2)	D750V3	1107	Mar. 08, 2019	Mar. 05, 2022
SPEAG	835MHz System Validation Kit(2)	D835V2	4d167	Nov. 25, 2019	Nov. 23, 2021
SPEAG	1750MHz System Validation Kit(2)	D1750V2	1112	Mar. 07, 2019	Mar. 04, 2022
SPEAG	1900MHz System Validation Kit(2)	D1900V2	5d041	Sep. 11, 2018	Sep. 08, 2021
SPEAG	Data Acquisition Electronics	DAE3	577	Sep. 16, 2020	Sep. 15, 2021
SPEAG	Dosimetric E-Field Probe	ES3DV3	3124	Nov. 23, 2020	Nov. 22, 2021
Testo	Hygro meter	608-H1	45196600	Nov. 10, 2020	Nov. 09, 2021
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Nov. 10, 2020	Nov. 09, 2021
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 11, 2020	Nov. 10, 2021
Keysight	ENA Network Analyzer	E5071C	MY46104758	Sep. 03, 2020	Sep. 02, 2021
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 16, 2020	Sep. 15, 2021
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Nov. 06, 2020	Nov. 05, 2021
Anritsu	Power Meter	ML2495A	1419002	Aug. 19, 2020	Aug. 18, 2021
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2020	Aug. 17, 2021
Anritsu	Power Meter	ML2495A	1804003	Oct. 21, 2020	Oct. 20, 2021
Anritsu	Power Sensor	MA2411B	1726150	Oct. 21, 2020	Oct. 20, 2021
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 30, 2020	Jun. 29, 2021
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Jan. 15, 2021	Jan. 14, 2022
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 21, 2020	Oct. 20, 2021
Mini-Circuits	Power Amplifier	ZVE-8G+	479102029	Aug. 26, 2020	Aug. 25, 2021
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

9. System Verification

9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18℃ to 25℃, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18℃ to 25℃ and within ± 2℃ of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.
The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (℃)	Conductivity (σ)	Permittivity (ε_r)	Conductivity Target (σ)	Permittivity Target (ε_r)	Delta (σ) (%)	Delta (ε_r) (%)	Limit (%)	Date
750	22.5	0.897	42.900	0.89	41.90	0.79	2.39	±5	2021/6/7
835	22.6	0.900	41.900	0.90	41.50	0.00	0.96	±5	2021/6/7
1750	22.4	1.360	40.900	1.37	40.10	-0.73	2.00	±5	2021/6/8
1900	22.5	1.450	39.400	1.40	40.00	3.57	-1.50	±5	2021/6/8

9.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
SAR01	2021/6/7	750	250	D750V3-1107	ES3DV3 - SN3124	DAE3 Sn577	2.21	8.32	8.84	6.25
SAR01	2021/6/7	835	250	D835V2-4d167	ES3DV3 - SN3124	DAE3 Sn577	2.36	9.55	9.44	-1.15
SAR01	2021/6/8	1750	250	D1750V2-1112	ES3DV3 - SN3124	DAE3 Sn577	8.83	36.70	35.32	-3.76
SAR01	2021/6/8	1900	250	D1900V2-5d041	ES3DV3 - SN3124	DAE3 Sn577	10.00	40.20	40	-0.50

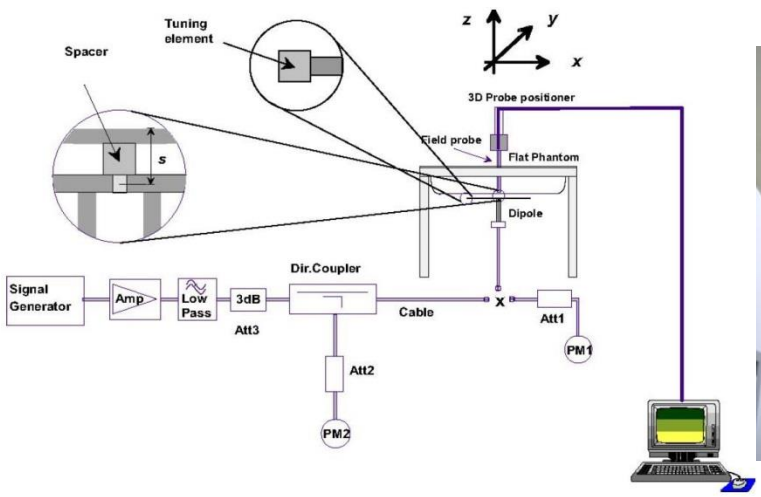

Fig 8.3.1 System Performance Check Setup

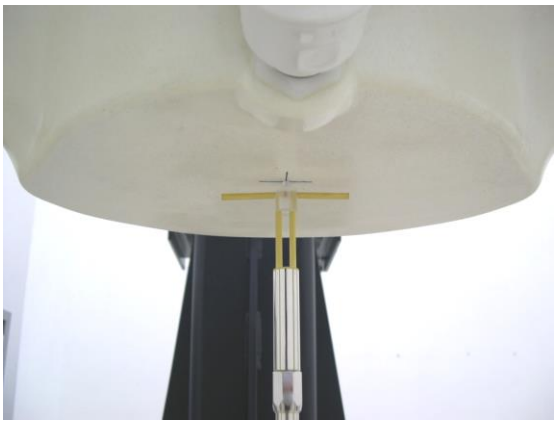

Fig 8.3.2 Setup Photo

10. LTE Cat M1 / NB-IOT Output Power (Unit: dBm)

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, for Cat M1 and NBIoT with the largest channel bandwidth and measure SAR for QPSK with highest RB allocation of each required test channel.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is > not ½ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is > not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. LTE band 2/4 SAR test was covered by Band 25/66; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
   a. the maximum output power, including tolerance, for the smaller band is ≤ the larger band to qualify for the SAR test exclusion
   b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

Cat M1

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Index			Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				L	M	H	18700	18900	19100	
Frequency (MHz)							1860	1880	1900	
20	QPSK	1	0	0	0	15	21.92	22.11	22.04	23.50
20	QPSK	1	5	0	0	15	21.77	21.94	21.91	
20	QPSK	3	0	0	0	15	21.89	22.00	22.02	
20	QPSK	3	3	0	0	15	21.58	21.67	21.68	
20	QPSK	6	0	0	0	15	21.70	21.79	21.79	
20	16QAM	1	0	0	0	15	21.81	21.90	21.93	
20	16QAM	1	5	0	0	15	22.00	22.10	22.10	
20	16QAM	3	0	0	0	15	21.86	22.02	21.95	
20	16QAM	3	3	0	0	15	21.80	21.98	22.00	
20	16QAM	5	0	0	0	15	21.79	21.97	21.96	
Channel				L	M	H	18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)							1857.5	1880	1902.5	
15	QPSK	1	0	0	0	11	21.82	22.03	21.96	23.50
15	QPSK	1	5	0	0	11	21.73	21.86	21.90	
15	QPSK	3	0	0	0	11	21.88	21.92	21.97	
15	QPSK	3	3	0	0	11	21.52	21.66	21.64	
15	QPSK	6	0	0	0	11	21.61	21.74	21.70	
15	16QAM	1	0	0	0	11	21.80	21.88	21.87	
15	16QAM	1	5	0	0	11	22.00	22.08	22.03	
15	16QAM	3	0	0	0	11	21.85	21.99	21.93	
15	16QAM	3	3	0	0	11	21.71	21.94	21.99	
15	16QAM	5	0	0	0	11	21.70	21.89	21.95	
Channel				L	M	H	18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)							1855	1880	1905	
10	QPSK	1	0	0	0	7	21.89	22.07	22.01	23.50
10	QPSK	1	5	0	0	7	21.77	21.90	21.81	
10	QPSK	3	0	0	0	7	21.79	21.99	21.96	
10	QPSK	3	3	0	0	7	21.56	21.61	21.59	
10	QPSK	6	0	0	0	7	20.60	20.73	20.72	22.50
10	16QAM	1	0	0	0	7	21.74	21.87	21.87	23.50
10	16QAM	1	5	0	0	7	21.96	22.08	22.08	
10	16QAM	3	0	0	0	7	21.81	22.00	21.87	
10	16QAM	3	3	0	0	7	21.71	21.88	22.00	
10	16QAM	5	0	0	0	7	20.76	20.87	20.94	22.50
Channel				L	M	H	18625	18900	19175	Tune-up limit (dBm)
Frequency (MHz)							1852.5	1880	1907.5	
5	QPSK	1	0	0	0	3	21.89	22.03	22.03	23.50
5	QPSK	1	5	0	0	3	21.71	21.89	21.90	
5	QPSK	3	0	0	0	3	20.81	21.00	20.95	22.50
5	QPSK	3	3	0	0	3	20.58	20.60	20.65	
5	QPSK	6	0	0	0	3	20.67	20.79	20.75	
5	16QAM	1	0	0	0	3	21.77	21.85	21.90	23.50
5	16QAM	1	5	0	0	3	21.93	22.04	22.00	
5	16QAM	3	0	0	0	3	20.78	21.00	20.95	22.50
5	16QAM	3	3	0	0	3	20.77	20.94	20.92	
5	16QAM	5	0	0	0	3	19.75	19.96	19.89	21.50
Channel				L	M	H	18615	18900	19185	Tune-up limit (dBm)
Frequency (MHz)							1851.5	1880	1908.5	
3	QPSK	1	0	0	0	1	21.88	22.07	22.01	23.50

3	QPSK	1	5	0	0	1	21.76	21.90	21.83	
3	QPSK	3	0	0	0	1	20.81	20.92	20.93	22.50
3	QPSK	3	3	0	0	1	20.49	20.59	20.65	
3	QPSK	6	0	0	0	1	19.61	19.70	19.78	21.50
3	16QAM	1	0	0	0	1	20.80	20.84	20.91	22.50
3	16QAM	1	5	0	0	1	20.94	21.09	21.00	
3	16QAM	3	0	0	0	1	19.77	20.00	19.86	21.50
3	16QAM	3	3	0	0	1	19.72	19.91	20.00	
3	16QAM	5	0	0	0	1	19.71	19.92	19.88	
Channel				L	M	H	18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)							1850.7	1880	1909.3	
1.4	QPSK	1	0	0	0	0	21.88	22.05	21.96	23.50
1.4	QPSK	1	5	0	0	0	21.77	21.92	21.81	
1.4	QPSK	3	0	0	0	0	20.88	20.96	20.93	22.50
1.4	QPSK	3	3	0	0	0	20.56	20.57	20.59	
1.4	QPSK	6	0	0	0	0	19.66	19.73	19.76	21.50
1.4	16QAM	1	0	0	0	0	20.80	20.89	20.89	22.50
1.4	16QAM	1	5	0	0	0	20.94	21.07	21.02	
1.4	16QAM	3	0	0	0	0	19.76	20.00	19.89	21.50
1.4	16QAM	3	3	0	0	0	19.75	19.91	19.95	
1.4	16QAM	5	0	0	0	0	19.73	19.93	19.87	

<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Index			Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				L	M	H	20050	20175	20300	
Frequency (MHz)							1720	1732.5	1745	
20	QPSK	1	0	0	0	15	21.88	22.07	21.84	23.65
20	QPSK	1	5	0	0	15	21.81	21.96	21.64	
20	QPSK	3	0	0	0	15	21.67	21.78	21.61	
20	QPSK	3	3	0	0	15	21.66	21.63	21.58	
20	QPSK	6	0	0	0	15	21.67	21.72	21.65	
20	16QAM	1	0	0	0	15	21.86	21.94	21.78	
20	16QAM	1	5	0	0	15	21.91	22.04	21.83	
20	16QAM	3	0	0	0	15	22.01	22.03	21.86	
20	16QAM	3	3	0	0	15	21.98	22.03	21.68	
20	16QAM	5	0	0	0	15	21.75	21.82	21.74	
Channel				L	M	H	20025	20175	20325	Tune-up limit (dBm)
Frequency (MHz)							1717.5	1732.5	1747.5	
15	QPSK	1	0	0	0	11	21.92	22.05	21.79	23.65
15	QPSK	1	5	0	0	11	21.83	21.93	21.69	
15	QPSK	3	0	0	0	11	21.70	21.75	21.57	
15	QPSK	3	3	0	0	11	21.43	21.46	21.30	
15	QPSK	6	0	0	0	11	21.65	21.76	21.48	
15	16QAM	1	0	0	0	11	21.91	21.88	21.77	
15	16QAM	1	5	0	0	11	21.86	22.06	21.83	
15	16QAM	3	0	0	0	11	21.94	22.06	21.83	
15	16QAM	3	3	0	0	11	21.98	22.04	21.73	
15	16QAM	5	0	0	0	11	21.81	21.88	21.74	
Channel				L	M	H	20000	20175	20350	Tune-up limit (dBm)
Frequency (MHz)							1715	1732.5	1750	
10	QPSK	1	0	0	0	7	21.95	22.02	21.80	23.65
10	QPSK	1	5	0	0	7	21.85	21.87	21.69	
10	QPSK	3	0	0	0	7	21.71	21.79	21.63	
10	QPSK	3	3	0	0	7	21.43	21.52	21.31	

10	QPSK	6	0	0	0	7	20.69	20.73	20.46	22.65
10	16QAM	1	0	0	0	7	21.83	21.85	21.77	23.65
10	16QAM	1	5	0	0	7	21.85	22.06	21.84	
10	16QAM	3	0	0	0	7	22.01	22.07	21.82	
10	16QAM	3	3	0	0	7	21.91	22.05	21.75	
10	16QAM	5	0	0	0	7	20.80	20.90	20.67	22.65
Channel				L	M	H	19975	20175	20375	Tune-up limit (dBm)
Frequency (MHz)							1712.5	1732.5	1752.5	
5	QPSK	1	0	0	0	3	21.80	22.01	21.81	23.65
5	QPSK	1	5	0	0	3	21.75	21.86	21.62	
5	QPSK	3	0	0	0	3	20.60	20.78	20.56	22.65
5	QPSK	3	3	0	0	3	20.66	20.60	20.54	
5	QPSK	6	0	0	0	3	20.59	20.62	20.65	
5	16QAM	1	0	0	0	3	21.83	21.84	21.73	23.65
5	16QAM	1	5	0	0	3	21.83	22.02	21.81	
5	16QAM	3	0	0	0	3	20.98	20.94	20.85	22.65
5	16QAM	3	3	0	0	3	20.92	21.02	20.64	
5	16QAM	5	0	0	0	3	19.69	19.80	19.68	21.65
Channel				L	M	H	19965	20175	20385	Tune-up limit (dBm)
Frequency (MHz)							1711.5	1732.5	1753.5	
3	QPSK	1	0	0	0	1	21.87	22.05	21.76	23.65
3	QPSK	1	5	0	0	1	21.87	21.92	21.64	
3	QPSK	3	0	0	0	1	20.74	20.79	20.55	22.65
3	QPSK	3	3	0	0	1	20.46	20.48	20.32	
3	QPSK	6	0	0	0	1	19.62	19.69	19.56	21.65
3	16QAM	1	0	0	0	1	20.82	20.86	20.77	22.65
3	16QAM	1	5	0	0	1	20.89	21.00	20.79	
3	16QAM	3	0	0	0	1	19.93	20.05	19.80	21.65
3	16QAM	3	3	0	0	1	19.99	20.04	19.69	
3	16QAM	5	0	0	0	1	19.71	19.84	19.70	
Channel				L	M	H	19957	20175	20393	Tune-up limit (dBm)
Frequency (MHz)							1710.7	1732.5	1754.3	
1.4	QPSK	1	0	0	0	0	21.87	22.04	21.78	23.65
1.4	QPSK	1	5	0	0	0	21.84	21.94	21.68	
1.4	QPSK	3	0	0	0	0	20.67	20.78	20.61	22.65
1.4	QPSK	3	3	0	0	0	20.39	20.45	20.25	
1.4	QPSK	6	0	0	0	0	19.59	19.74	19.49	21.65
1.4	16QAM	1	0	0	0	0	20.87	20.90	20.69	22.65
1.4	16QAM	1	5	0	0	0	20.94	21.03	20.79	
1.4	16QAM	3	0	0	0	0	19.99	20.04	19.85	21.65
1.4	16QAM	3	3	0	0	0	19.96	20.00	19.76	
1.4	16QAM	5	0	0	0	0	19.71	19.90	19.66	

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Index			Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				L	M	H	20450	20525	20600	
Frequency (MHz)							829	836.5	844	
10	QPSK	1	0	0	0	7	22.08	22.15	22.09	23.80
10	QPSK	1	5	0	0	7	21.89	21.97	21.72	
10	QPSK	3	0	0	0	7	21.74	21.84	21.65	
10	QPSK	3	3	0	0	7	21.46	21.53	21.34	
10	QPSK	6	0	0	0	7	21.69	21.78	21.56	22.80
10	16QAM	1	0	0	0	7	21.97	22.09	21.85	23.80
10	16QAM	1	5	0	0	7	21.94	22.08	21.89	

10	16QAM	3	0	0	0	7	22.03	22.07	21.87	
10	16QAM	3	3	0	0	7	22.00	22.05	21.78	
10	16QAM	5	0	0	0	7	21.81	21.91	21.74	22.80
Channel				L	M	H	20425	20525	20625	Tune-up limit (dBm)
Frequency (MHz)							826.5	836.5	846.5	
5	QPSK	1	0	0	0	3	22.01	22.09	22.05	23.80
5	QPSK	1	5	0	0	3	21.79	21.88	21.63	
5	QPSK	3	0	0	0	3	20.74	20.77	20.64	22.80
5	QPSK	3	3	0	0	3	20.45	20.52	20.30	
5	QPSK	6	0	0	0	3	21.65	21.73	21.52	
5	16QAM	1	0	0	0	3	21.94	22.04	21.82	23.80
5	16QAM	1	5	0	0	3	21.86	22.01	21.86	
5	16QAM	3	0	0	0	3	20.95	20.97	20.84	22.80
5	16QAM	3	3	0	0	3	20.98	20.96	20.70	
5	16QAM	5	0	0	0	3	20.71	20.89	20.71	21.80
Channel				L	M	H	20415	20525	20635	Tune-up limit (dBm)
Frequency (MHz)							825.5	836.5	847.5	
3	QPSK	1	0	0	0	1	22.06	22.14	22.05	23.80
3	QPSK	1	5	0	0	1	21.86	21.97	21.71	
3	QPSK	3	0	0	0	1	20.69	20.83	20.65	22.80
3	QPSK	3	3	0	0	1	20.42	20.50	20.28	
3	QPSK	6	0	0	0	1	20.65	20.72	20.51	21.80
3	16QAM	1	0	0	0	1	20.97	21.08	20.80	22.80
3	16QAM	1	5	0	0	1	20.91	21.08	20.85	
3	16QAM	3	0	0	0	1	20.01	20.05	19.84	21.80
3	16QAM	3	3	0	0	1	19.92	19.99	19.74	
3	16QAM	5	0	0	0	1	20.71	20.85	20.64	
Channel				L	M	H	20407	20525	20643	Tune-up limit (dBm)
Frequency (MHz)							824.7	836.5	848.3	
1.4	QPSK	1	0	0	0	0	22.08	22.15	22.03	23.80
1.4	QPSK	1	5	0	0	0	21.87	21.92	21.65	
1.4	QPSK	3	0	0	0	0	20.65	20.83	20.55	22.80
1.4	QPSK	3	3	0	0	0	20.46	20.46	20.33	
1.4	QPSK	6	0	0	0	0	20.67	20.75	20.47	21.80
1.4	16QAM	1	0	0	0	0	20.95	21.09	20.78	22.80
1.4	16QAM	1	5	0	0	0	20.88	21.04	20.86	
1.4	16QAM	3	0	0	0	0	19.98	19.99	19.85	21.80
1.4	16QAM	3	3	0	0	0	19.97	20.05	19.71	
1.4	16QAM	5	0	0	0	0	20.81	20.85	20.70	

<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Index			Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				L	M	H	23060	23095	23130	
Frequency (MHz)							704	707.5	711	
10	QPSK	1	0	0	0	7	23.14	23.17	22.95	24.60
10	QPSK	1	5	0	0	7	22.83	22.82	22.63	
10	QPSK	3	0	0	0	7	22.96	23.00	22.82	
10	QPSK	3	3	0	0	7	22.72	22.71	22.49	
10	QPSK	6	0	0	0	7	21.80	21.83	21.67	23.60
10	16QAM	1	0	0	0	7	22.80	22.79	22.64	24.60
10	16QAM	1	5	0	0	7	23.02	23.07	22.85	
10	16QAM	3	0	0	0	7	23.03	23.04	22.84	
10	16QAM	3	3	0	0	7	22.94	23.03	22.79	
10	16QAM	5	0	0	0	7	21.82	21.87	21.70	23.60

Channel				L	M	H	23035	23095	23155	Tune-up limit (dBm)
Frequency (MHz)							701.5	707.5	713.5	
5	QPSK	1	0	0	0	3	23.07	23.13	22.94	24.60
5	QPSK	1	5	0	0	3	22.73	22.73	22.57	
5	QPSK	3	0	0	0	3	21.88	22.00	21.79	23.60
5	QPSK	3	3	0	0	3	21.64	21.64	21.49	
5	QPSK	6	0	0	0	3	21.73	21.83	21.64	
5	16QAM	1	0	0	0	3	22.74	22.76	22.56	24.60
5	16QAM	1	5	0	0	3	22.95	22.99	22.83	
5	16QAM	3	0	0	0	3	21.97	21.97	21.80	23.60
5	16QAM	3	3	0	0	3	21.93	21.97	21.75	
5	16QAM	5	0	0	0	3	20.73	20.82	20.65	22.60
Channel				L	M	H	23025	23095	23165	Tune-up limit (dBm)
Frequency (MHz)							700.5	707.5	714.5	
3	QPSK	1	0	0	0	1	23.05	23.10	22.88	24.60
3	QPSK	1	5	0	0	1	22.73	22.82	22.55	
3	QPSK	3	0	0	0	1	21.88	21.98	21.75	23.60
3	QPSK	3	3	0	0	1	21.69	21.71	21.47	
3	QPSK	6	0	0	0	1	20.73	20.82	20.63	22.60
3	16QAM	1	0	0	0	1	21.80	21.73	21.55	23.60
3	16QAM	1	5	0	0	1	21.95	22.02	21.80	
3	16QAM	3	0	0	0	1	20.94	20.95	20.74	22.60
3	16QAM	3	3	0	0	1	20.94	21.00	20.79	
3	16QAM	5	0	0	0	1	20.80	20.78	20.70	
Channel				L	M	H	23017	23095	23173	Tune-up limit (dBm)
Frequency (MHz)							699.7	707.5	715.3	
1.4	QPSK	1	0	0	0	0	23.04	23.14	22.88	24.60
1.4	QPSK	1	5	0	0	0	22.82	22.75	22.57	
1.4	QPSK	3	0	0	0	0	21.93	21.97	21.76	23.60
1.4	QPSK	3	3	0	0	0	21.69	21.63	21.45	
1.4	QPSK	6	0	0	0	0	20.77	20.77	20.57	22.60
1.4	16QAM	1	0	0	0	0	21.72	21.72	21.63	23.60
1.4	16QAM	1	5	0	0	0	21.96	21.98	21.82	
1.4	16QAM	3	0	0	0	0	21.03	20.95	20.78	22.60
1.4	16QAM	3	3	0	0	0	20.85	21.02	20.70	
1.4	16QAM	5	0	0	0	0	20.74	20.87	20.61	

<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Index			Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				L	M	H		23230		
Frequency (MHz)								782		
10	QPSK	1	0	0	0	7		22.24		24.00
10	QPSK	1	5	0	0	7		22.01		
10	QPSK	3	0	0	0	7		22.04		
10	QPSK	3	3	0	0	7		22.01		
10	QPSK	6	0	0	0	7		21.03		23.00
10	16QAM	1	0	0	0	7		21.83		24.00
10	16QAM	1	5	0	0	7		21.80		
10	16QAM	3	0	0	0	7		22.19		
10	16QAM	3	3	0	0	7		22.21		
10	16QAM	5	0	0	0	7		21.13		23.00
Channel				L	M	H	23205	23230	23255	Tune-up limit (dBm)
Frequency (MHz)							779.5	782	784.5	
5	QPSK	1	0	0	0	3	22.00	21.98	21.90	24.00

5	QPSK	1	5	0	0	3	22.01	22.00	21.92	
5	QPSK	3	0	0	0	3	21.02	21.01	20.84	23.00
5	QPSK	3	3	0	0	3	20.68	20.72	20.58	
5	QPSK	6	0	0	0	3	20.83	20.85	20.67	
5	16QAM	1	0	0	0	3	22.26	22.27	22.10	24.00
5	16QAM	1	5	0	0	3	22.19	22.21	22.11	
5	16QAM	3	0	0	0	3	21.07	21.15	20.98	23.00
5	16QAM	3	3	0	0	3	21.07	21.13	20.96	
5	16QAM	5	0	0	0	3	20.28	20.26	20.10	22.00

<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Index			Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				L	M	H	26140	26365	26590	
Frequency (MHz)							1860	1882.5	1905	
20	QPSK	1	0	0	0	15	22.16	22.34	22.29	23.50
20	QPSK	1	5	0	0	15	21.97	22.21	22.09	
20	QPSK	3	0	0	0	15	21.96	22.16	22.02	
20	QPSK	3	3	0	0	15	21.63	21.86	21.78	
20	QPSK	6	0	0	0	15	21.80	22.01	21.95	
20	16QAM	1	0	0	0	15	22.11	22.29	22.24	
20	16QAM	1	5	0	0	15	21.97	22.24	22.18	
20	16QAM	3	0	0	0	15	22.01	22.22	22.11	
20	16QAM	3	3	0	0	15	21.99	22.18	22.05	
20	16QAM	5	0	0	0	15	21.89	22.11	22.04	
Channel				L	M	H	26115	26365	26615	Tune-up limit (dBm)
Frequency (MHz)							1857.5	1882.5	1907.5	
15	QPSK	1	0	0	0	11	22.08	22.30	22.22	23.50
15	QPSK	1	5	0	0	11	21.94	22.13	22.15	
15	QPSK	3	0	0	0	11	21.92	22.10	22.01	
15	QPSK	3	3	0	0	11	21.58	21.80	21.80	
15	QPSK	6	0	0	0	11	21.73	21.99	21.88	
15	16QAM	1	0	0	0	11	22.05	22.27	22.17	
15	16QAM	1	5	0	0	11	22.04	22.20	22.12	
15	16QAM	3	0	0	0	11	21.96	22.14	22.12	
15	16QAM	3	3	0	0	11	21.92	22.12	22.07	
15	16QAM	5	0	0	0	11	21.86	22.09	22.05	
Channel				L	M	H	26090	26365	26640	Tune-up limit (dBm)
Frequency (MHz)							1855	1882.5	1910	
10	QPSK	1	0	0	0	7	22.06	22.31	22.20	23.50
10	QPSK	1	5	0	0	7	21.95	22.20	22.03	
10	QPSK	3	0	0	0	7	21.90	22.07	21.94	
10	QPSK	3	3	0	0	7	21.55	21.77	21.74	
10	QPSK	6	0	0	0	7	20.77	21.01	20.93	22.50
10	16QAM	1	0	0	0	7	22.07	22.28	22.14	23.50
10	16QAM	1	5	0	0	7	21.97	22.23	22.13	
10	16QAM	3	0	0	0	7	21.97	22.16	22.09	
10	16QAM	3	3	0	0	7	21.97	22.09	22.01	
10	16QAM	5	0	0	0	7	20.84	21.08	20.95	22.50
Channel				L	M	H	26065	26365	26665	Tune-up limit (dBm)
Frequency (MHz)							1852.5	1882.5	1912.5	
5	QPSK	1	0	0	0	3	22.06	22.25	22.20	23.50
5	QPSK	1	5	0	0	3	21.88	22.12	22.00	
5	QPSK	3	0	0	0	3	21.93	22.13	21.94	
5	QPSK	3	3	0	0	3	21.62	21.76	21.68	

5	QPSK	6	0	0	0	3	20.77	20.95	20.92	22.50
5	16QAM	1	0	0	0	3	22.06	22.19	22.16	23.50
5	16QAM	1	5	0	0	3	21.96	22.22	22.17	
5	16QAM	3	0	0	0	3	21.99	22.19	22.03	
5	16QAM	3	3	0	0	3	21.95	22.15	21.99	
5	16QAM	5	0	0	0	3	20.85	21.04	20.97	22.50
Channel				L	M	H	26055	26365	26675	Tune-up limit (dBm)
Frequency (MHz)							1851.5	1882.5	1913.5	
3	QPSK	1	0	0	0	1	22.09	22.29	22.27	23.50
3	QPSK	1	5	0	0	1	21.96	22.11	22.01	
3	QPSK	3	0	0	0	1	20.90	21.13	20.97	22.50
3	QPSK	3	3	0	0	1	20.60	20.79	20.70	
3	QPSK	6	0	0	0	1	19.78	20.01	19.95	21.50
3	16QAM	1	0	0	0	1	21.05	21.20	21.19	22.50
3	16QAM	1	5	0	0	1	20.93	21.20	21.14	
3	16QAM	3	0	0	0	1	19.96	20.16	20.04	21.50
3	16QAM	3	3	0	0	1	19.99	20.17	19.99	
3	16QAM	5	0	0	0	1	19.80	20.02	19.97	
Channel				L	M	H	26047	26365	26683	Tune-up limit (dBm)
Frequency (MHz)							1850.7	1882.5	1914.3	
1.4	QPSK	1	0	0	0	0	22.12	22.27	22.24	23.50
1.4	QPSK	1	5	0	0	0	21.95	22.14	22.00	
1.4	QPSK	3	0	0	0	0	20.88	21.06	20.99	22.50
1.4	QPSK	3	3	0	0	0	20.57	20.77	20.75	
1.4	QPSK	6	0	0	0	0	19.71	20.00	19.89	21.50
1.4	16QAM	1	0	0	0	0	21.10	21.29	21.23	22.50
1.4	16QAM	1	5	0	0	0	20.89	21.20	21.11	
1.4	16QAM	3	0	0	0	0	20.00	20.22	20.06	21.50
1.4	16QAM	3	3	0	0	0	19.92	20.08	20.03	
1.4	16QAM	5	0	0	0	0	19.81	20.07	20.04	

<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Index			Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				L	M	H	26765	26865	26965	
Frequency (MHz)							821.5	831.5	841.5	
15	QPSK	1	0	0	0	11	22.23	22.28	22.26	23.80
15	QPSK	1	5	0	0	11	22.08	22.14	22.04	
15	QPSK	3	0	0	0	11	22.07	22.17	22.12	
15	QPSK	3	3	0	0	11	21.76	21.88	21.79	
15	QPSK	6	0	0	0	11	21.90	22.05	22.03	
15	16QAM	1	0	0	0	11	22.26	22.26	22.23	
15	16QAM	1	5	0	0	11	22.24	22.22	22.21	
15	16QAM	3	0	0	0	11	22.23	22.20	22.23	
15	16QAM	3	3	0	0	11	22.20	22.27	22.26	
15	16QAM	5	0	0	0	11	22.05	22.17	22.10	
Channel				L	M	H	26740	26865	26990	Tune-up limit (dBm)
Frequency (MHz)							819	831.5	844	
10	QPSK	1	0	0	0	7	22.22	22.28	22.19	23.80
10	QPSK	1	5	0	0	7	21.99	22.14	22.04	
10	QPSK	3	0	0	0	7	22.02	22.09	22.10	
10	QPSK	3	3	0	0	7	21.73	21.88	21.77	
10	QPSK	6	0	0	0	7	20.84	20.95	20.93	22.80
10	16QAM	1	0	0	0	7	22.16	22.21	22.13	23.80

10	16QAM	1	5	0	0	7	22.22	22.12	22.20	
10	16QAM	3	0	0	0	7	22.20	22.14	22.13	
10	16QAM	3	3	0	0	7	22.13	22.21	22.17	
10	16QAM	5	0	0	0	7	21.00	21.08	21.08	22.80
Channel				L	M	H	26715	26865	27015	Tune-up limit (dBm)
Frequency (MHz)							816.5	831.5	846.5	
5	QPSK	1	0	0	0	3	22.17	22.24	22.25	23.80
5	QPSK	1	5	0	0	3	22.03	22.07	22.00	
5	QPSK	3	0	0	0	3	21.05	21.15	21.12	22.80
5	QPSK	3	3	0	0	3	20.75	20.81	20.76	
5	QPSK	6	0	0	0	3	20.82	20.95	20.96	
5	16QAM	1	0	0	0	3	22.22	22.20	22.23	23.80
5	16QAM	1	5	0	0	3	22.21	22.20	22.19	
5	16QAM	3	0	0	0	3	21.19	21.19	21.17	22.80
5	16QAM	3	3	0	0	3	21.18	21.18	21.26	
5	16QAM	5	0	0	0	3	19.97	20.13	20.07	21.80
Channel				L	M	H	26705	26865	27025	Tune-up limit (dBm)
Frequency (MHz)							815.5	831.5	847.5	
3	QPSK	1	0	0	0	1	22.15	22.24	22.23	23.80
3	QPSK	1	5	0	0	1	22.05	22.14	21.94	
3	QPSK	3	0	0	0	1	21.04	21.17	21.12	22.80
3	QPSK	3	3	0	0	1	20.76	20.81	20.79	
3	QPSK	6	0	0	0	1	19.81	20.01	20.00	21.80
3	16QAM	1	0	0	0	1	21.18	21.17	21.18	22.80
3	16QAM	1	5	0	0	1	21.18	21.13	21.17	
3	16QAM	3	0	0	0	1	20.15	20.19	20.21	21.80
3	16QAM	3	3	0	0	1	20.15	20.22	20.24	
3	16QAM	5	0	0	0	1	20.01	20.14	20.08	
Channel				L	M	H	26697	26865	27033	Tune-up limit (dBm)
Frequency (MHz)							814.7	831.5	848.3	
1.4	QPSK	1	0	0	0	0	22.22	22.26	22.21	23.80
1.4	QPSK	1	5	0	0	0	22.00	22.10	21.99	
1.4	QPSK	3	0	0	0	0	21.07	21.11	21.05	22.80
1.4	QPSK	3	3	0	0	0	20.69	20.84	20.78	
1.4	QPSK	6	0	0	0	0	19.80	20.01	19.95	21.80
1.4	16QAM	1	0	0	0	0	21.25	21.26	21.22	22.80
1.4	16QAM	1	5	0	0	0	21.19	21.18	21.12	
1.4	16QAM	3	0	0	0	0	20.21	20.12	20.14	21.80
1.4	16QAM	3	3	0	0	0	20.11	20.17	20.19	
1.4	16QAM	5	0	0	0	0	19.99	20.15	20.09	

<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Index			Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				L	M	H	132047	132322	132597	
Frequency (MHz)							1717.5	1745	1772.5	
15	QPSK	1	0	0	0	11	21.94	21.97	21.88	23.65
15	QPSK	1	5	0	0	11	21.81	21.89	21.68	
15	QPSK	3	0	0	0	11	21.62	21.71	21.48	
15	QPSK	3	3	0	0	11	21.33	21.42	21.22	
15	QPSK	6	0	0	0	11	21.65	21.73	21.49	
15	16QAM	1	0	0	0	11	21.94	21.93	21.83	
15	16QAM	1	5	0	0	11	21.92	21.92	21.73	
15	16QAM	3	0	0	0	11	21.87	21.95	21.75	

15	16QAM	3	3	0	0	11	21.88	21.96	21.75	
15	16QAM	5	0	0	0	11	21.81	21.87	21.63	
Channel				L	M	H	132022	132322	132622	Tune-up limit (dBm)
Frequency (MHz)							1715	1745	1775	
10	QPSK	1	0	0	0	7	21.85	21.92	21.87	23.65
10	QPSK	1	5	0	0	7	21.76	21.88	21.58	
10	QPSK	3	0	0	0	7	21.54	21.65	21.41	
10	QPSK	3	3	0	0	7	21.31	21.40	21.12	
10	QPSK	6	0	0	0	7	20.62	20.68	20.39	22.65
10	16QAM	1	0	0	0	7	21.87	21.83	21.78	23.65
10	16QAM	1	5	0	0	7	21.89	21.85	21.67	
10	16QAM	3	0	0	0	7	21.85	21.86	21.75	
10	16QAM	3	3	0	0	7	21.87	21.92	21.74	
10	16QAM	5	0	0	0	7	20.74	20.84	20.63	22.65
Channel				L	M	H	131997	132322	132647	Tune-up limit (dBm)
Frequency (MHz)							1712.5	1745	1777.5	
5	QPSK	1	0	0	0	3	21.92	21.90	21.88	23.65
5	QPSK	1	5	0	0	3	21.73	21.80	21.68	
5	QPSK	3	0	0	0	3	20.54	20.67	20.47	22.65
5	QPSK	3	3	0	0	3	20.32	20.34	20.14	
5	QPSK	6	0	0	0	3	20.65	20.66	20.45	
5	16QAM	1	0	0	0	3	21.89	21.90	21.80	23.65
5	16QAM	1	5	0	0	3	21.84	21.88	21.69	
5	16QAM	3	0	0	0	3	20.82	20.95	20.70	22.65
5	16QAM	3	3	0	0	3	20.85	20.94	20.70	
5	16QAM	5	0	0	0	3	19.76	19.84	19.56	21.65
Channel				L	M	H	131987	132322	132657	Tune-up limit (dBm)
Frequency (MHz)							1711.5	1745	1778.5	
3	QPSK	1	0	0	0	1	21.88	21.94	21.83	23.65
3	QPSK	1	5	0	0	1	21.75	21.81	21.67	
3	QPSK	3	0	0	0	1	20.60	20.66	20.41	22.65
3	QPSK	3	3	0	0	1	20.27	20.38	20.16	
3	QPSK	6	0	0	0	1	19.61	19.65	19.41	21.65
3	16QAM	1	0	0	0	1	20.89	20.84	20.76	22.65
3	16QAM	1	5	0	0	1	20.90	20.84	20.71	
3	16QAM	3	0	0	0	1	19.87	19.86	19.70	21.65
3	16QAM	3	3	0	0	1	19.86	19.86	19.72	
3	16QAM	5	0	0	0	1	19.80	19.77	19.67	
Channel				L	M	H	131979	132322	132665	Tune-up limit (dBm)
Frequency (MHz)							1710.7	1745	1779.3	
1.4	QPSK	1	0	0	0	0	21.86	21.88	21.79	23.65
1.4	QPSK	1	5	0	0	0	21.79	21.81	21.68	
1.4	QPSK	3	0	0	0	0	20.57	20.65	20.38	22.65
1.4	QPSK	3	3	0	0	0	20.32	20.33	20.13	
1.4	QPSK	6	0	0	0	0	19.60	19.64	19.45	21.65
1.4	16QAM	1	0	0	0	0	20.94	20.91	20.74	22.65
1.4	16QAM	1	5	0	0	0	20.85	20.92	20.70	
1.4	16QAM	3	0	0	0	0	19.83	19.86	19.71	21.65
1.4	16QAM	3	3	0	0	0	19.87	19.90	19.74	
1.4	16QAM	5	0	0	0	0	19.73	19.83	19.63	

NB-IOT

<LTE Band 2>

Sub-carrier Speacing (KHz)	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18602	18900	19198	
Frequency (MHz)				1850.2	1880	1909.8	
3.75	BPSK	1	0	23.79	23.30	22.98	24
3.75	BPSK	1	47	23.69	23.27	22.97	
3.75	QPSK	1	0	23.73	23.22	22.89	
3.75	QPSK	1	47	23.62	23.24	22.82	
15	BPSK	1	0	21.11	21.11	21.16	21.5
15	BPSK	1	11	21.15	21.14	21.19	
15	QPSK	1	0	21.11	21.08	21.11	
15	QPSK	1	11	21.06	21.10	21.08	
15	QPSK	12	0	20.50	20.51	20.56	

<LTE Band 4>

Sub-carrier Speacing (KHz)	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				19952	20175	20398	
Frequency (MHz)				1710.2	1732.5	1754.8	
3.75	BPSK	1	0	20.82	21.50	21.79	22
3.75	BPSK	1	47	20.91	21.26	21.78	
3.75	QPSK	1	0	20.81	21.25	21.76	
3.75	QPSK	1	47	20.79	21.24	21.77	
15	BPSK	1	0	20.88	20.76	20.68	
15	BPSK	1	11	20.96	20.81	20.71	
15	QPSK	1	0	20.87	20.73	20.66	
15	QPSK	1	11	20.97	20.77	20.67	
15	QPSK	12	0	20.27	20.18	20.11	

<LTE Band 5>

Sub-carrier Speacing (KHz)	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20402	20525	20648	
Frequency (MHz)				824.2	836.5	848.8	
3.75	BPSK	1	0	21.94	21.88	21.82	22.5
3.75	BPSK	1	47	21.89	21.79	21.77	
3.75	QPSK	1	0	21.81	21.76	21.69	
3.75	QPSK	1	47	21.78	21.71	21.65	
15	BPSK	1	0	21.49	21.47	21.44	
15	BPSK	1	11	21.51	21.53	21.45	
15	QPSK	1	0	21.41	21.42	21.39	
15	QPSK	1	11	21.42	21.47	21.40	
15	QPSK	12	0	20.83	20.82	20.80	

<LTE Band 12>

Sub-carrier Speacing (KHz)	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23012	23095	23178	
Frequency (MHz)				699.2	707.5	715.8	
3.75	BPSK	1	0	23.01	23.03	22.94	23.5
3.75	BPSK	1	47	23.00	23.01	22.91	
3.75	QPSK	1	0	22.92	22.95	22.82	
3.75	QPSK	1	47	22.90	22.92	22.78	
15	BPSK	1	0	22.21	22.10	22.04	23
15	BPSK	1	11	22.25	22.16	22.09	
15	QPSK	1	0	22.16	22.06	21.97	
15	QPSK	1	11	22.19	22.11	22.01	
15	QPSK	12	0	21.47	21.44	21.38	

<LTE Band 13>

Sub-carrier Speacing (KHz)	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23182	23230	23278	
Frequency (MHz)				777.2	782	786.8	
3.75	BPSK	1	0	21.38	21.57	21.56	22
3.75	BPSK	1	47	21.37	21.54	21.37	
3.75	QPSK	1	0	21.31	21.49	21.33	
3.75	QPSK	1	47	21.24	21.46	21.28	
15	BPSK	1	0	21.50	21.41	21.52	
15	BPSK	1	11	21.52	21.46	21.55	
15	QPSK	1	0	21.42	21.37	21.46	
15	QPSK	1	11	21.42	21.36	21.46	
15	QPSK	12	0	20.80	20.73	20.88	

<LTE Band 25>

Sub-carrier Speacing (KHz)	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26042	26365	26688	
Frequency (MHz)				1850.2	1882.5	1914.8	
3.75	BPSK	1	0	23.69	23.17	22.90	24
3.75	BPSK	1	47	23.68	23.12	22.88	
3.75	QPSK	1	0	23.62	23.15	22.86	
3.75	QPSK	1	47	23.61	23.16	22.85	
15	BPSK	1	0	21.18	21.12	21.19	22
15	BPSK	1	11	21.16	21.14	21.23	
15	QPSK	1	0	21.11	21.07	21.14	
15	QPSK	1	11	21.02	21.06	21.17	
15	QPSK	12	0	20.51	20.52	20.57	

<LTE Band 26>

Sub-carrier Speacing (KHz)	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26692	26740	26788	
Frequency (MHz)				814.2	819	823.8	
3.75	BPSK	1	0	21.99	21.84	21.85	22.5
3.75	BPSK	1	47	21.87	21.77	21.79	
3.75	QPSK	1	0	21.93	21.76	21.83	
3.75	QPSK	1	47	21.90	21.83	21.81	
15	BPSK	1	0	21.54	21.50	21.52	
15	BPSK	1	11	21.61	21.52	21.56	
15	QPSK	1	0	21.53	21.45	21.47	
15	QPSK	1	11	21.56	21.44	21.49	
15	QPSK	12	0	20.88	20.85	20.86	

Sub-carrier Speacing (KHz)	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26792	26915	27038	
Frequency (MHz)				824.2	836.5	848.8	
3.75	BPSK	1	0	21.83	21.72	21.66	22.5
3.75	BPSK	1	47	21.79	21.68	21.65	
3.75	QPSK	1	0	21.81	21.70	21.65	
3.75	QPSK	1	47	21.79	21.71	21.63	
15	BPSK	1	0	21.51	21.50	21.45	
15	BPSK	1	11	21.58	21.52	21.42	
15	QPSK	1	0	21.48	21.49	21.39	
15	QPSK	1	11	21.51	21.47	21.38	
15	QPSK	12	0	20.83	20.86	20.77	

<LTE Band 66>

Sub-carrier Speacing (KHz)	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				131974	132322	132670	
Frequency (MHz)				1710.2	1745	1779.8	
3.75	BPSK	1	0	21.84	21.58	22.36	23
3.75	BPSK	1	47	21.79	21.53	22.32	
3.75	QPSK	1	0	21.81	21.57	22.27	
3.75	QPSK	1	47	21.80	21.51	22.18	
15	BPSK	1	0	20.88	20.71	20.67	22
15	BPSK	1	11	20.93	20.75	20.54	
15	QPSK	1	0	20.86	20.69	20.66	
15	QPSK	1	11	20.89	20.72	20.52	
15	QPSK	12	0	20.30	20.15	20.01	

11. Antenna Location

Front View

12. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
   a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
   b. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
   - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
   - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
   - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.

LTE Note:

1. Per KDB 941225 D05v02r05, for Cat M1 and NBIoT with the largest channel bandwidth and measure SAR for QPSK with highest RB allocation of each required test channel.
2. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is > not ½ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
3. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is > not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
4. LTE band 2/4 SAR test was covered by Band 25/66; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
   a. The maximum output power, including tolerance, for the smaller band is ≤ the larger band to qualify for the SAR test exclusion.
   b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

12.1 Cat M1 Body-worn SAR

<FDD LTE SAR>

Plot No.	Band	BW (Hz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	Cat M1 LTE Band 5	10M	QPSK	1	0	Front	15mm	20525	836.5	22.15	23.80	1.462	0.06	0.195	0.285
	Cat M1 LTE Band 5	10M	QPSK	1	0	Back	15mm	20525	836.5	22.15	23.80	1.462	0.13	0.135	0.197
	Cat M1 LTE Band 5	10M	QPSK	1	0	Left Side	15mm	20525	836.5	22.15	23.80	1.462	0.01	0.001	0.001
	Cat M1 LTE Band 5	10M	QPSK	1	0	Right Side	15mm	20525	836.5	22.15	23.80	1.462	0.15	0.001	0.001
	Cat M1 LTE Band 5	10M	QPSK	1	0	Top Side	15mm	20525	836.5	22.15	23.80	1.462	-0.03	0.043	0.063
02	Cat M1 LTE Band 12	10M	QPSK	1	0	Front	15mm	23095	707.5	23.17	24.60	1.390	0.07	0.138	0.192
	Cat M1 LTE Band 12	10M	QPSK	1	0	Back	15mm	23095	707.5	23.17	24.60	1.390	0.14	0.132	0.183
	Cat M1 LTE Band 12	10M	QPSK	1	0	Left Side	15mm	23095	707.5	23.17	24.60	1.390	0.02	0.045	0.063
	Cat M1 LTE Band 12	10M	QPSK	1	0	Right Side	15mm	23095	707.5	23.17	24.60	1.390	-0.17	0.001	0.001
	Cat M1 LTE Band 12	10M	QPSK	1	0	Top Side	15mm	23095	707.5	23.17	24.60	1.390	0.11	0.001	0.001
03	Cat M1 LTE Band 13	10M	QPSK	1	0	Front	15mm	23230	782	22.24	24.00	1.500	0.05	0.134	0.201
	Cat M1 LTE Band 13	10M	QPSK	1	0	Back	15mm	23230	782	22.24	24.00	1.500	0.07	0.089	0.133
	Cat M1 LTE Band 13	10M	QPSK	1	0	Left Side	15mm	23230	782	22.24	24.00	1.500	-0.13	0.001	0.001
	Cat M1 LTE Band 13	10M	QPSK	1	0	Right Side	15mm	23230	782	22.24	24.00	1.500	0.18	0.001	0.001
	Cat M1 LTE Band 13	10M	QPSK	1	0	Top Side	15mm	23230	782	22.24	24.00	1.500	0.17	0.001	0.001
	Cat M1 LTE Band 25	20M	QPSK	1	0	Front	15mm	26365	1882.5	22.34	23.50	1.306	0.15	0.385	0.503
04	Cat M1 LTE Band 25	20M	QPSK	1	0	Front	15mm	26140	1860	22.16	23.50	1.361	0.01	0.424	0.577
	Cat M1 LTE Band 25	20M	QPSK	1	0	Front	15mm	26590	1905	22.29	23.50	1.321	-0.17	0.338	0.447
	Cat M1 LTE Band 25	20M	QPSK	1	0	Back	15mm	26365	1882.5	22.34	23.50	1.306	0.03	0.189	0.247
	Cat M1 LTE Band 25	20M	QPSK	1	0	Left Side	15mm	26365	1882.5	22.34	23.50	1.306	0.07	0.376	0.491
	Cat M1 LTE Band 25	20M	QPSK	1	0	Right Side	15mm	26365	1882.5	22.34	23.50	1.306	-0.09	0.001	0.001
	Cat M1 LTE Band 25	20M	QPSK	1	0	Top Side	15mm	26365	1882.5	22.34	23.50	1.306	-0.09	0.001	0.001
05	Cat M1 LTE Band 26	15M	QPSK	1	0	Front	15mm	26865	831.5	22.28	23.80	1.419	-0.12	0.204	0.289
	Cat M1 LTE Band 26	15M	QPSK	1	0	Back	15mm	26865	831.5	22.28	23.80	1.419	-0.04	0.147	0.209
	Cat M1 LTE Band 26	15M	QPSK	1	0	Left Side	15mm	26865	831.5	22.28	23.80	1.419	-0.04	0.001	0.001
	Cat M1 LTE Band 26	15M	QPSK	1	0	Right Side	15mm	26865	831.5	22.28	23.80	1.419	0.01	0.001	0.001
	Cat M1 LTE Band 26	15M	QPSK	1	0	Top Side	15mm	26865	831.5	22.28	23.80	1.419	-0.16	0.045	0.064
	Cat M1 LTE Band 66	15M	QPSK	1	0	Front	15mm	132322	1745	21.97	23.65	1.472	0.02	0.447	0.658
	Cat M1 LTE Band 66	15M	QPSK	1	0	Front	15mm	132047	1717.5	21.94	23.65	1.483	-0.16	0.327	0.485
06	Cat M1 LTE Band 66	15M	QPSK	1	0	Front	15mm	132597	1772.5	21.88	23.65	1.503	0.03	0.453	0.681
	Cat M1 LTE Band 66	15M	QPSK	1	0	Back	15mm	132322	1745	21.97	23.65	1.472	0.1	0.271	0.399
	Cat M1 LTE Band 66	15M	QPSK	1	0	Left Side	15mm	132322	1745	21.97	23.65	1.472	0.02	0.374	0.551
	Cat M1 LTE Band 66	15M	QPSK	1	0	Right Side	15mm	132322	1745	21.97	23.65	1.472	-0.14	0.001	0.001
	Cat M1 LTE Band 66	15M	QPSK	1	0	Top Side	15mm	132322	1745	21.97	23.65	1.472	0.06	0.001	0.001

12.2 NB-IOT Body-worn SAR

<FDD LTE SAR>

Plot No.	Band	BW (Hz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
07	NB-IOT LTE Band 5	3.75K	BPSK	1	0	Front	15mm	20402	824.2	21.94	22.50	1.138	0.04	0.259	0.295
	NB-IOT LTE Band 5	3.75K	BPSK	1	0	Front	15mm	20525	836.5	21.88	22.50	1.153	0.09	0.241	0.278
	NB-IOT LTE Band 5	3.75K	BPSK	1	0	Front	15mm	20648	848.8	21.82	22.50	1.169	-0.02	0.237	0.277
	NB-IOT LTE Band 5	3.75K	BPSK	1	0	Back	15mm	20402	824.2	21.94	22.50	1.138	0.09	0.038	0.043
	NB-IOT LTE Band 5	3.75K	BPSK	1	0	Left Side	15mm	20402	824.2	21.94	22.50	1.138	-0.12	0.035	0.040
	NB-IOT LTE Band 5	3.75K	BPSK	1	0	Right Side	15mm	20402	824.2	21.94	22.50	1.138	0.01	0.001	0.001
	NB-IOT LTE Band 5	3.75K	BPSK	1	0	Top Side	15mm	20402	824.2	21.94	22.50	1.138	0.08	0.026	0.030
08	NB-IOT LTE Band 12	3.75K	BPSK	1	0	Front	15mm	23095	707.5	23.03	23.50	1.114	0.02	0.041	0.046
	NB-IOT LTE Band 12	3.75K	BPSK	1	0	Front	15mm	23012	699.2	23.01	23.50	1.119	0.06	0.032	0.036
	NB-IOT LTE Band 12	3.75K	BPSK	1	0	Front	15mm	23178	715.8	22.94	23.50	1.138	-0.05	0.037	0.042
	NB-IOT LTE Band 12	3.75K	BPSK	1	0	Back	15mm	23095	707.5	23.03	23.50	1.114	-0.09	0.034	0.038
	NB-IOT LTE Band 12	3.75K	BPSK	1	0	Left Side	15mm	23095	707.5	23.03	23.50	1.114	0.11	0.005	0.006
	NB-IOT LTE Band 12	3.75K	BPSK	1	0	Right Side	15mm	23095	707.5	23.03	23.50	1.114	0.05	0.004	0.004
	NB-IOT LTE Band 12	3.75K	BPSK	1	0	Top Side	15mm	23095	707.5	23.03	23.50	1.114	0.08	0.001	0.001
	NB-IOT LTE Band 13	3.75K	BPSK	1	0	Front	15mm	23230	782	21.57	22.00	1.104	-0.01	0.067	0.074
	NB-IOT LTE Band 13	3.75K	BPSK	1	0	Front	15mm	23182	777.2	21.38	22.00	1.153	0.08	0.079	0.091
09	NB-IOT LTE Band 13	3.75K	BPSK	1	0	Front	15mm	23278	786.8	21.56	22.00	1.107	-0.06	0.086	0.095
	NB-IOT LTE Band 13	3.75K	BPSK	1	0	Back	15mm	23230	782	21.57	22.00	1.104	-0.05	0.060	0.066
	NB-IOT LTE Band 13	3.75K	BPSK	1	0	Left Side	15mm	23230	782	21.57	22.00	1.104	0.02	0.001	0.001
	NB-IOT LTE Band 13	3.75K	BPSK	1	0	Right Side	15mm	23230	782	21.57	22.00	1.104	0.08	0.001	0.001
	NB-IOT LTE Band 13	3.75K	BPSK	1	0	Top Side	15mm	23230	782	21.57	22.00	1.104	-0.1	0.001	0.001
	NB-IOT LTE Band 25	3.75K	BPSK	1	0	Front	15mm	26042	1850.2	23.69	24.00	1.074	0.08	0.296	0.318
	NB-IOT LTE Band 25	3.75K	BPSK	1	0	Front	15mm	26365	1882.5	23.17	24.00	1.211	0.11	0.324	0.392
10	NB-IOT LTE Band 25	3.75K	BPSK	1	0	Front	15mm	26688	1914.8	22.90	24.00	1.288	-0.06	0.327	0.421
	NB-IOT LTE Band 25	3.75K	BPSK	1	0	Back	15mm	26042	1850.2	23.69	24.00	1.074	-0.04	0.253	0.272
	NB-IOT LTE Band 25	3.75K	BPSK	1	0	Left Side	15mm	26042	1850.2	23.69	24.00	1.074	0.05	0.027	0.029
	NB-IOT LTE Band 25	3.75K	BPSK	1	0	Right Side	15mm	26042	1850.2	23.69	24.00	1.074	0.09	0.001	0.001
	NB-IOT LTE Band 25	3.75K	BPSK	1	0	Top Side	15mm	26042	1850.2	23.69	24.00	1.074	0.02	0.001	0.001
	NB-IOT LTE Band 26	3.75K	BPSK	1	0	Front	15mm	26692	814.2	21.99	22.50	1.125	0.08	0.194	0.218
11	NB-IOT LTE Band 26	3.75K	BPSK	1	0	Front	15mm	26740	819	21.84	22.50	1.164	-0.11	0.321	0.374
	NB-IOT LTE Band 26	3.75K	BPSK	1	0	Front	15mm	26788	823.8	21.85	22.50	1.161	0.02	0.296	0.344
	NB-IOT LTE Band 26	3.75K	BPSK	1	0	Back	15mm	26692	814.2	21.99	22.50	1.125	-0.08	0.037	0.042
	NB-IOT LTE Band 26	3.75K	BPSK	1	0	Left Side	15mm	26692	814.2	21.99	22.50	1.125	0.09	0.035	0.039
	NB-IOT LTE Band 26	3.75K	BPSK	1	0	Right Side	15mm	26692	814.2	21.99	22.50	1.125	-0.07	0.001	0.001
	NB-IOT LTE Band 26	3.75K	BPSK	1	0	Top Side	15mm	26692	814.2	21.99	22.50	1.125	0.06	0.048	0.054
	NB-IOT LTE Band 26	3.75K	BPSK	1	0	Front	15mm	26792	824.2	21.83	22.50	1.167	-0.02	0.217	0.253
	NB-IOT LTE Band 26	3.75K	BPSK	1	0	Front	15mm	26915	836.5	21.72	22.50	1.197	-0.03	0.172	0.206
	NB-IOT LTE Band 26	3.75K	BPSK	1	0	Front	15mm	27038	848.8	21.66	22.50	1.213	0.02	0.169	0.205
	NB-IOT LTE Band 26	3.75K	BPSK	1	0	Back	15mm	26792	824.2	21.83	22.50	1.167	-0.11	0.134	0.156
	NB-IOT LTE Band 26	3.75K	BPSK	1	0	Left Side	15mm	26792	824.2	21.83	22.50	1.167	-0.04	0.001	0.001
	NB-IOT LTE Band 26	3.75K	BPSK	1	0	Right Side	15mm	26792	824.2	21.83	22.50	1.167	0.16	0.001	0.001
	NB-IOT LTE Band 26	3.75K	BPSK	1	0	Top Side	15mm	26792	824.2	21.83	22.50	1.167	0	0.055	0.064
12	NB-IOT LTE Band 66	3.75K	BPSK	1	0	Front	15mm	132670	1779.8	22.36	23.00	1.159	-0.06	0.607	0.703
	NB-IOT LTE Band 66	3.75K	BPSK	1	0	Front	15mm	131974	1710.2	21.84	23.00	1.306	0.17	0.220	0.287
	NB-IOT LTE Band 66	3.75K	BPSK	1	0	Front	15mm	132322	1745	21.58	23.00	1.387	-0.07	0.460	0.638
	NB-IOT LTE Band 66	3.75K	BPSK	1	0	Back	15mm	132670	1779.8	22.36	23.00	1.159	0.19	0.303	0.351
	NB-IOT LTE Band 66	3.75K	BPSK	1	0	Left Side	15mm	132670	1779.8	22.36	23.00	1.159	0.14	0.259	0.300
	NB-IOT LTE Band 66	3.75K	BPSK	1	0	Right Side	15mm	132670	1779.8	22.36	23.00	1.159	0.01	0.001	0.001
	NB-IOT LTE Band 66	3.75K	BPSK	1	0	Top Side	15mm	132670	1779.8	22.36	23.00	1.159	-0.04	0.001	0.001

13. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	WWAN + WLAN2.4GHz	Yes
2.	WWAN + Bluetooth	Yes

General Note:

1. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. All licensed modes share the same antenna part and cannot transmit simultaneously
3. The Scaled SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
   i) Scalar SAR summation < 1.6W/kg.
   ii) SPLSR = (SAR1 + SAR2)^1.5 / (min. separation distance, mm), and the peak separation distance is determined from the square root of [(x1-x2)2 + (y1-y2)2 + (z1-z2)2], where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
   iii) If SPLSR ≤ 0.04, simultaneously transmission SAR measurement is not necessary.
   iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

13.1 Body-worn Exposure Conditions

WWAN Band	Exposure Position	1 WWAN 1g SAR (W/kg)	2 2.4GHz WLAN 1g SAR (W/kg)	3 Bluetooth 1g SAR (W/kg)	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
Cat M1 LTE Band 5	Front at 15mm	0.285	0.470	0.025	**0.755**	**0.310**
	Back at 15mm	0.197	0.699	0.056	**0.896**	**0.253**
	Left Side at 15mm	0.001	0.016	0.001	**0.017**	**0.002**
	Right Side at 15mm	0.001	0.354	0.025	**0.355**	**0.026**
	Top Side at 15mm	0.063	0.242	0.018	**0.305**	**0.081**
Cat M1 LTE Band 12	Front at 15mm	0.192	0.470	0.025	**0.662**	**0.217**
	Back at 15mm	0.183	0.699	0.056	**0.882**	**0.239**
	Left Side at 15mm	0.063	0.016	0.001	**0.079**	**0.064**
	Right Side at 15mm	0.001	0.354	0.025	**0.355**	**0.026**
	Top Side at 15mm	0.001	0.242	0.018	**0.243**	**0.019**
Cat M1 LTE Band 13	Front at 15mm	0.201	0.470	0.025	**0.671**	**0.226**
	Back at 15mm	0.133	0.699	0.056	**0.832**	**0.189**
	Left Side at 15mm	0.001	0.016	0.001	**0.017**	**0.002**
	Right Side at 15mm	0.001	0.354	0.025	**0.355**	**0.026**
	Top Side at 15mm	0.001	0.242	0.018	**0.243**	**0.019**
Cat M1 LTE Band 25	Front at 15mm	0.577	0.470	0.025	**1.047**	**0.602**
	Back at 15mm	0.247	0.699	0.056	**0.946**	**0.303**
	Left Side at 15mm	0.491	0.016	0.001	**0.507**	**0.492**
	Right Side at 15mm	0.001	0.354	0.025	**0.355**	**0.026**
	Top Side at 15mm	0.001	0.242	0.018	**0.243**	**0.019**
Cat M1 LTE Band 26	Front at 15mm	0.289	0.470	0.025	**0.759**	**0.314**
	Back at 15mm	0.209	0.699	0.056	**0.908**	**0.265**
	Left Side at 15mm	0.001	0.016	0.001	**0.017**	**0.002**
	Right Side at 15mm	0.001	0.354	0.025	**0.355**	**0.026**
	Top Side at 15mm	0.064	0.242	0.018	**0.306**	**0.082**
Cat M1 LTE Band 66	Front at 15mm	0.681	0.470	0.025	**1.151**	**0.706**
	Back at 15mm	0.399	0.699	0.056	**1.098**	**0.455**
	Left Side at 15mm	0.551	0.016	0.001	**0.567**	**0.552**
	Right Side at 15mm	0.001	0.354	0.025	**0.355**	**0.026**
	Top Side at 15mm	0.001	0.242	0.018	**0.243**	**0.019**

WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	Bluetooth		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
NB-IOT LTE Band 5	Front at 15mm	0.295	0.470	0.025	**0.765**	**0.320**
	Back at 15mm	0.043	0.699	0.056	**0.742**	**0.099**
	Left Side at 15mm	0.040	0.016	0.001	**0.056**	**0.041**
	Right Side at 15mm	0.001	0.354	0.025	**0.355**	**0.026**
	Top Side at 15mm	0.030	0.242	0.018	**0.272**	**0.048**
NB-IOT LTE Band 12	Front at 15mm	0.046	0.470	0.025	**0.516**	**0.071**
	Back at 15mm	0.038	0.699	0.056	**0.737**	**0.094**
	Left Side at 15mm	0.006	0.016	0.001	**0.022**	**0.007**
	Right Side at 15mm	0.004	0.354	0.025	**0.358**	**0.029**
	Top Side at 15mm	0.001	0.242	0.018	**0.243**	**0.019**
NB-IOT LTE Band 13	Front at 15mm	0.095	0.470	0.025	**0.565**	**0.120**
	Back at 15mm	0.066	0.699	0.056	**0.765**	**0.122**
	Left Side at 15mm	0.001	0.016	0.001	**0.017**	**0.002**
	Right Side at 15mm	0.001	0.354	0.025	**0.355**	**0.026**
	Top Side at 15mm	0.001	0.242	0.018	**0.243**	**0.019**
NB-IOT LTE Band 25	Front at 15mm	0.421	0.470	0.025	**0.891**	**0.446**
	Back at 15mm	0.272	0.699	0.056	**0.971**	**0.328**
	Left Side at 15mm	0.029	0.016	0.001	**0.045**	**0.030**
	Right Side at 15mm	0.001	0.354	0.025	**0.355**	**0.026**
	Top Side at 15mm	0.001	0.242	0.018	**0.243**	**0.019**
NB-IOT LTE Band 26	Front at 15mm	0.374	0.470	0.025	**0.844**	**0.399**
	Back at 15mm	0.156	0.699	0.056	**0.855**	**0.212**
	Left Side at 15mm	0.039	0.016	0.001	**0.055**	**0.040**
	Right Side at 15mm	0.001	0.354	0.025	**0.355**	**0.026**
	Top Side at 15mm	0.064	0.242	0.018	**0.306**	**0.082**
NB-IOT LTE Band 66	Front at 15mm	0.703	0.470	0.025	**1.173**	**0.728**
	Back at 15mm	0.351	0.699	0.056	**1.050**	**0.407**
	Left Side at 15mm	0.300	0.016	0.001	**0.316**	**0.301**
	Right Side at 15mm	0.001	0.354	0.025	**0.355**	**0.026**
	Top Side at 15mm	0.001	0.242	0.018	**0.243**	**0.019**

Test Engineer： EN Liu

14. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be ≤ 30%, for a confidence interval of k = 2. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:
The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

15. References

[1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”

[2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992

[3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013

[4] SPEAG DASY System Handbook

[5] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.

[6] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015

[7] FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 2015

[8] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.

[9] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.