

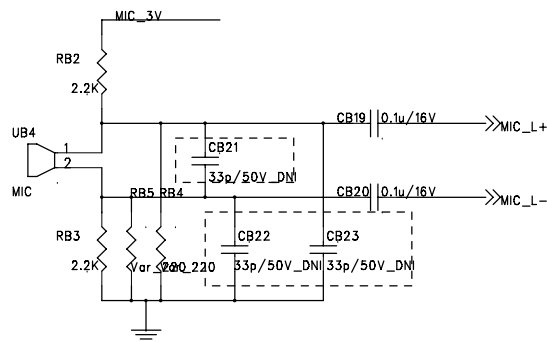
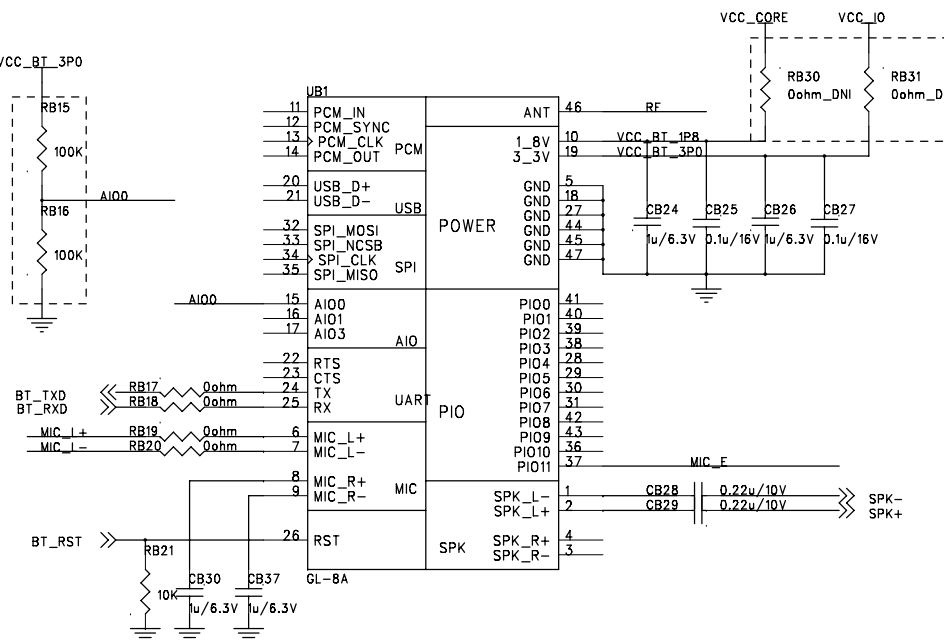

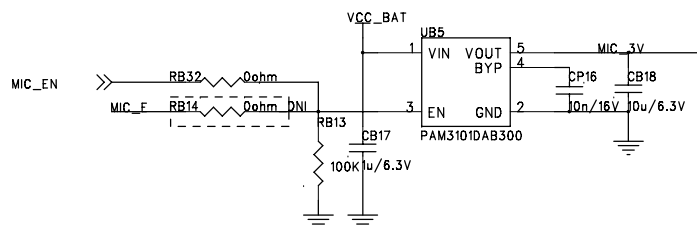
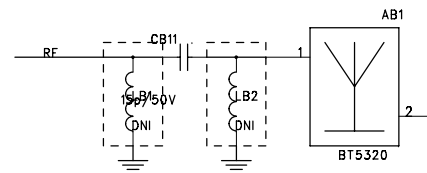
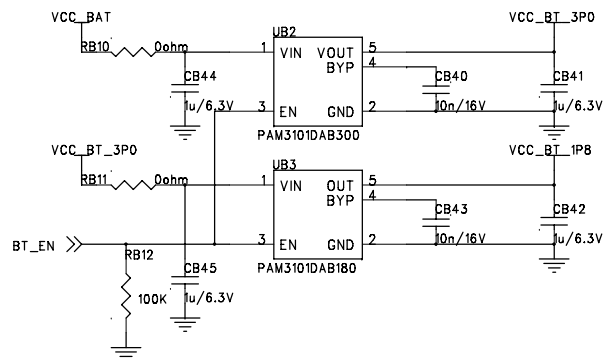












Title 09 BLUETOOTH

Size B	Document Number A802	Rev 1.2
Date: Friday, May 30, 2008	Sheet 9	of 10




Title		
10 OTHER		
Size	Document Number	Rev
A	A802	1.2
Date:	Friday, May 30, 2008	Sheet 10 of 10

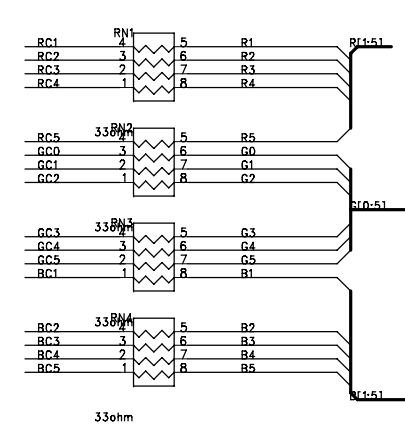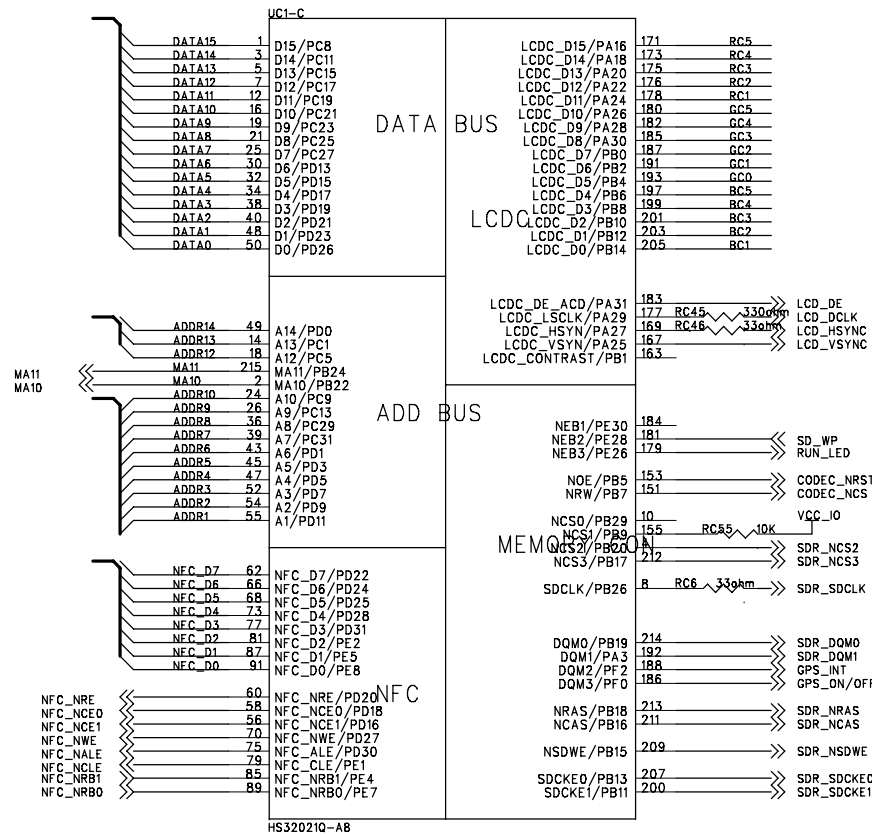










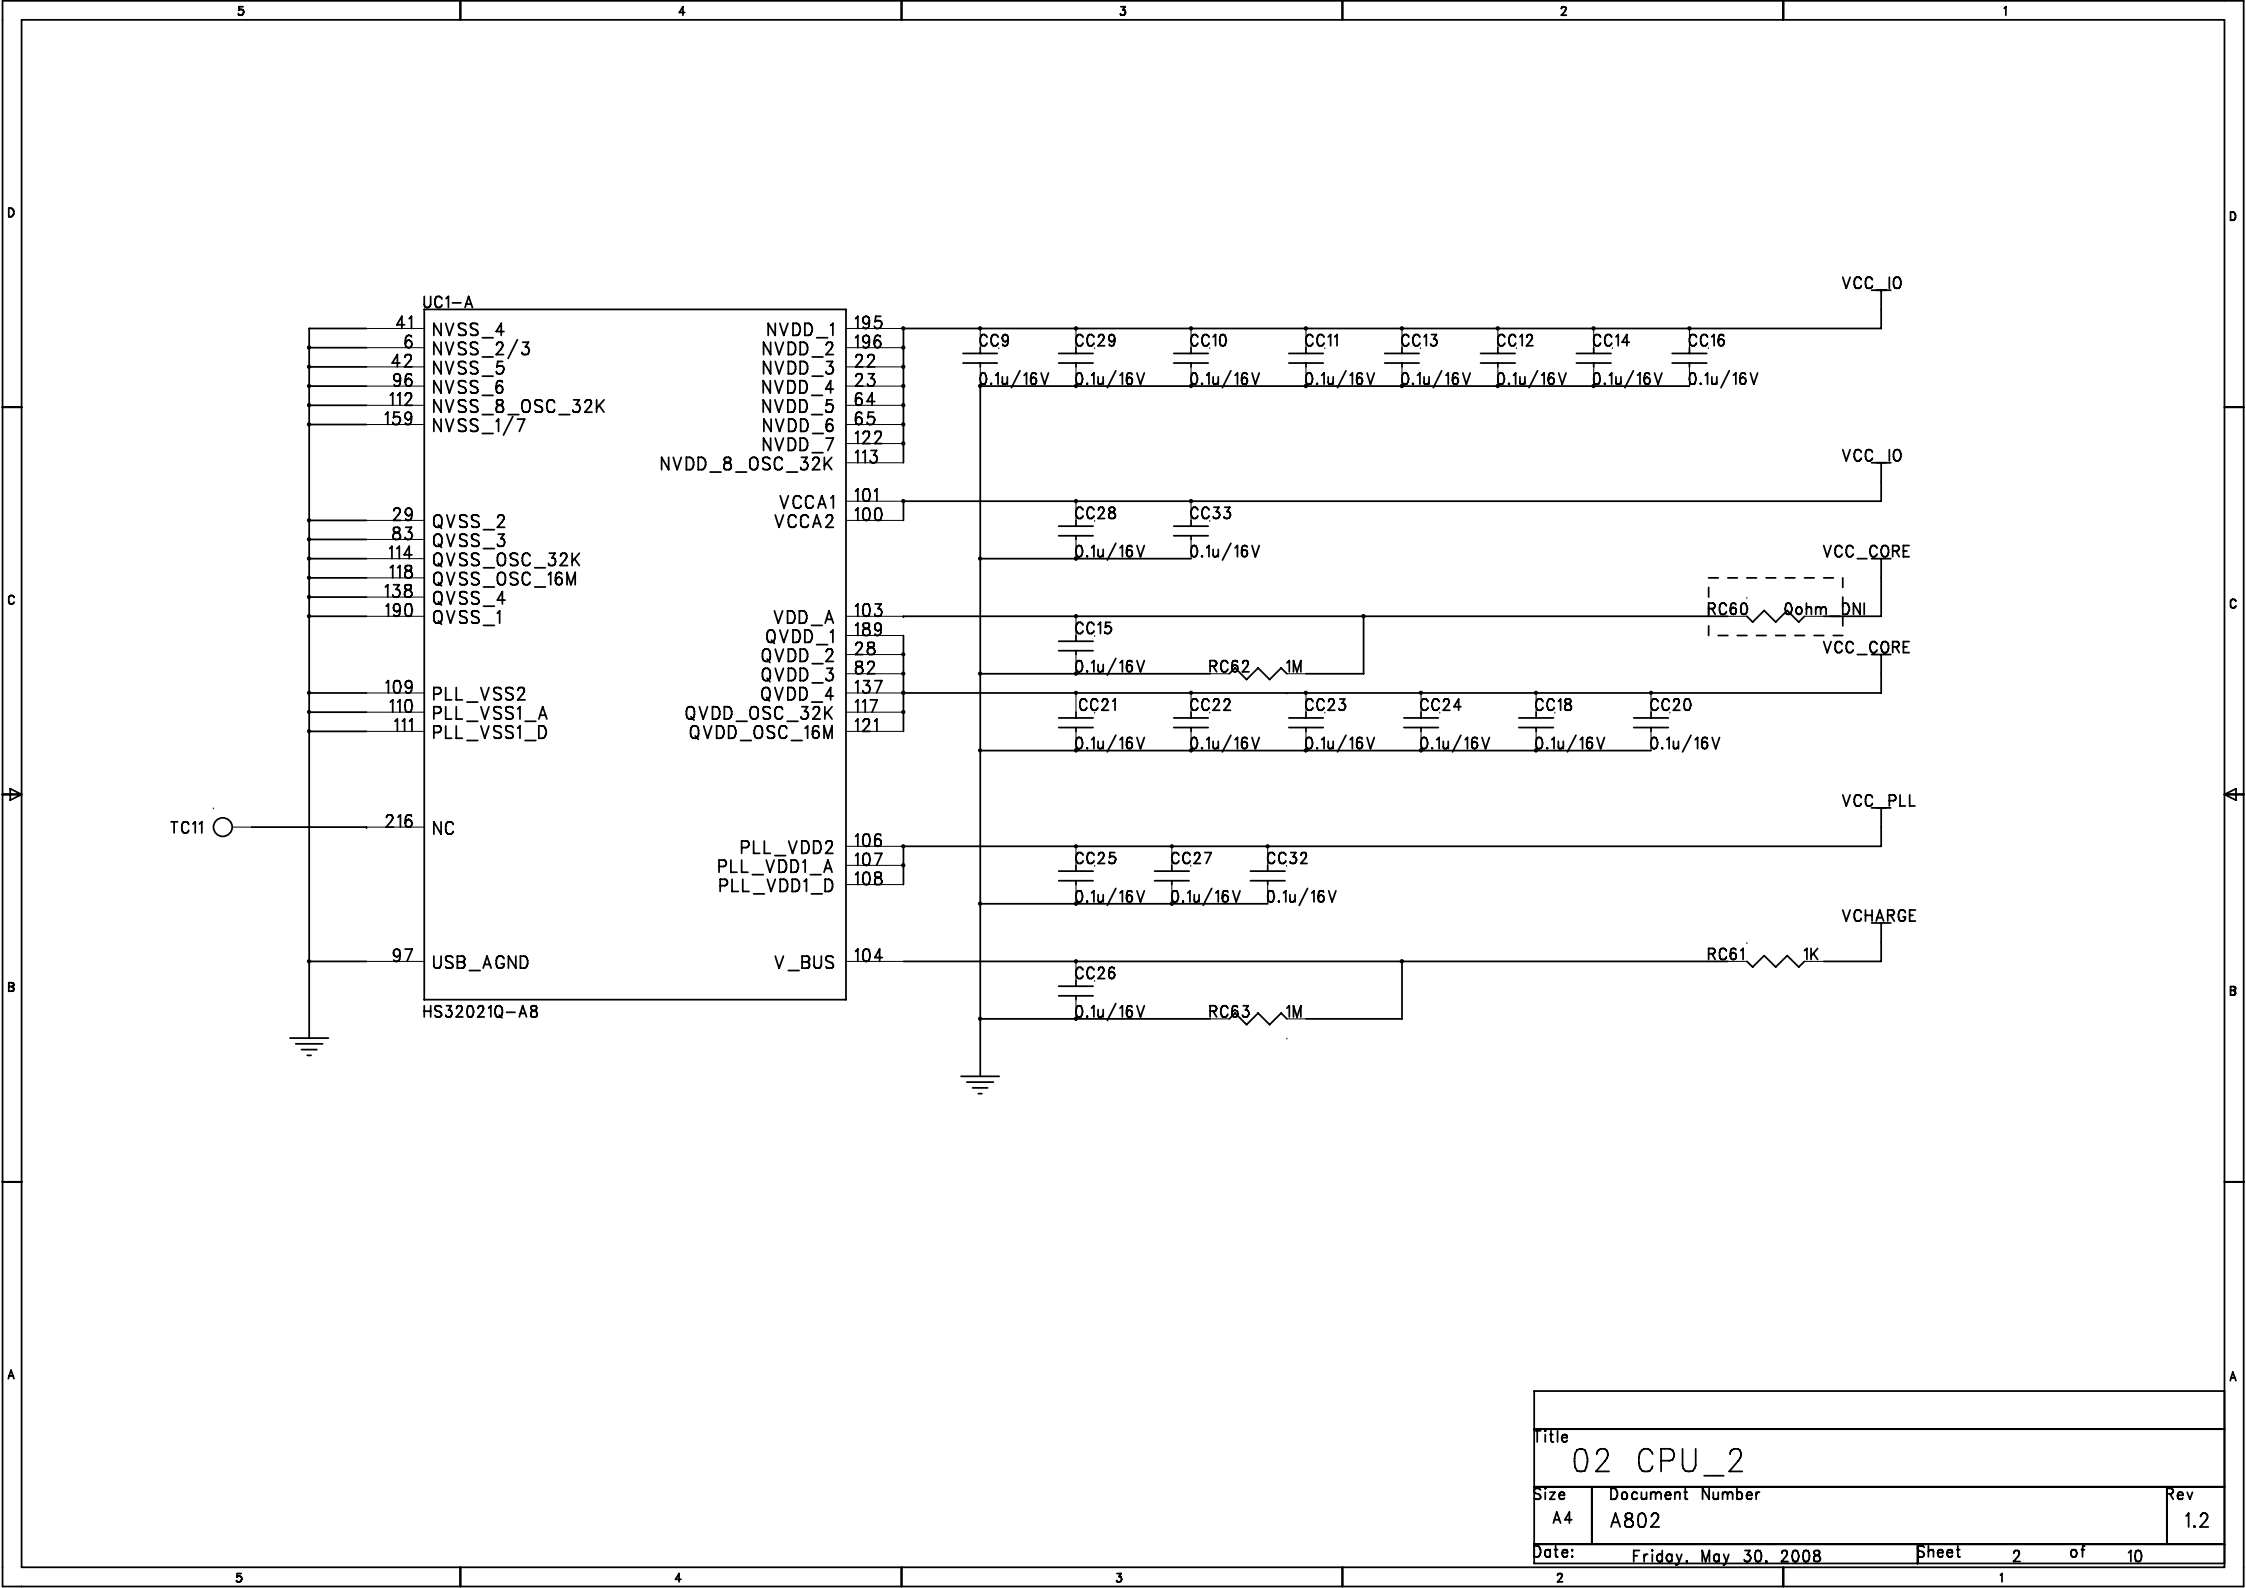


Title		
02 CPU_2		
Size	Document Number	Rev
A4	A802	1.2
Date:	Friday, May 30, 2008	
	Sheet	2 of 10

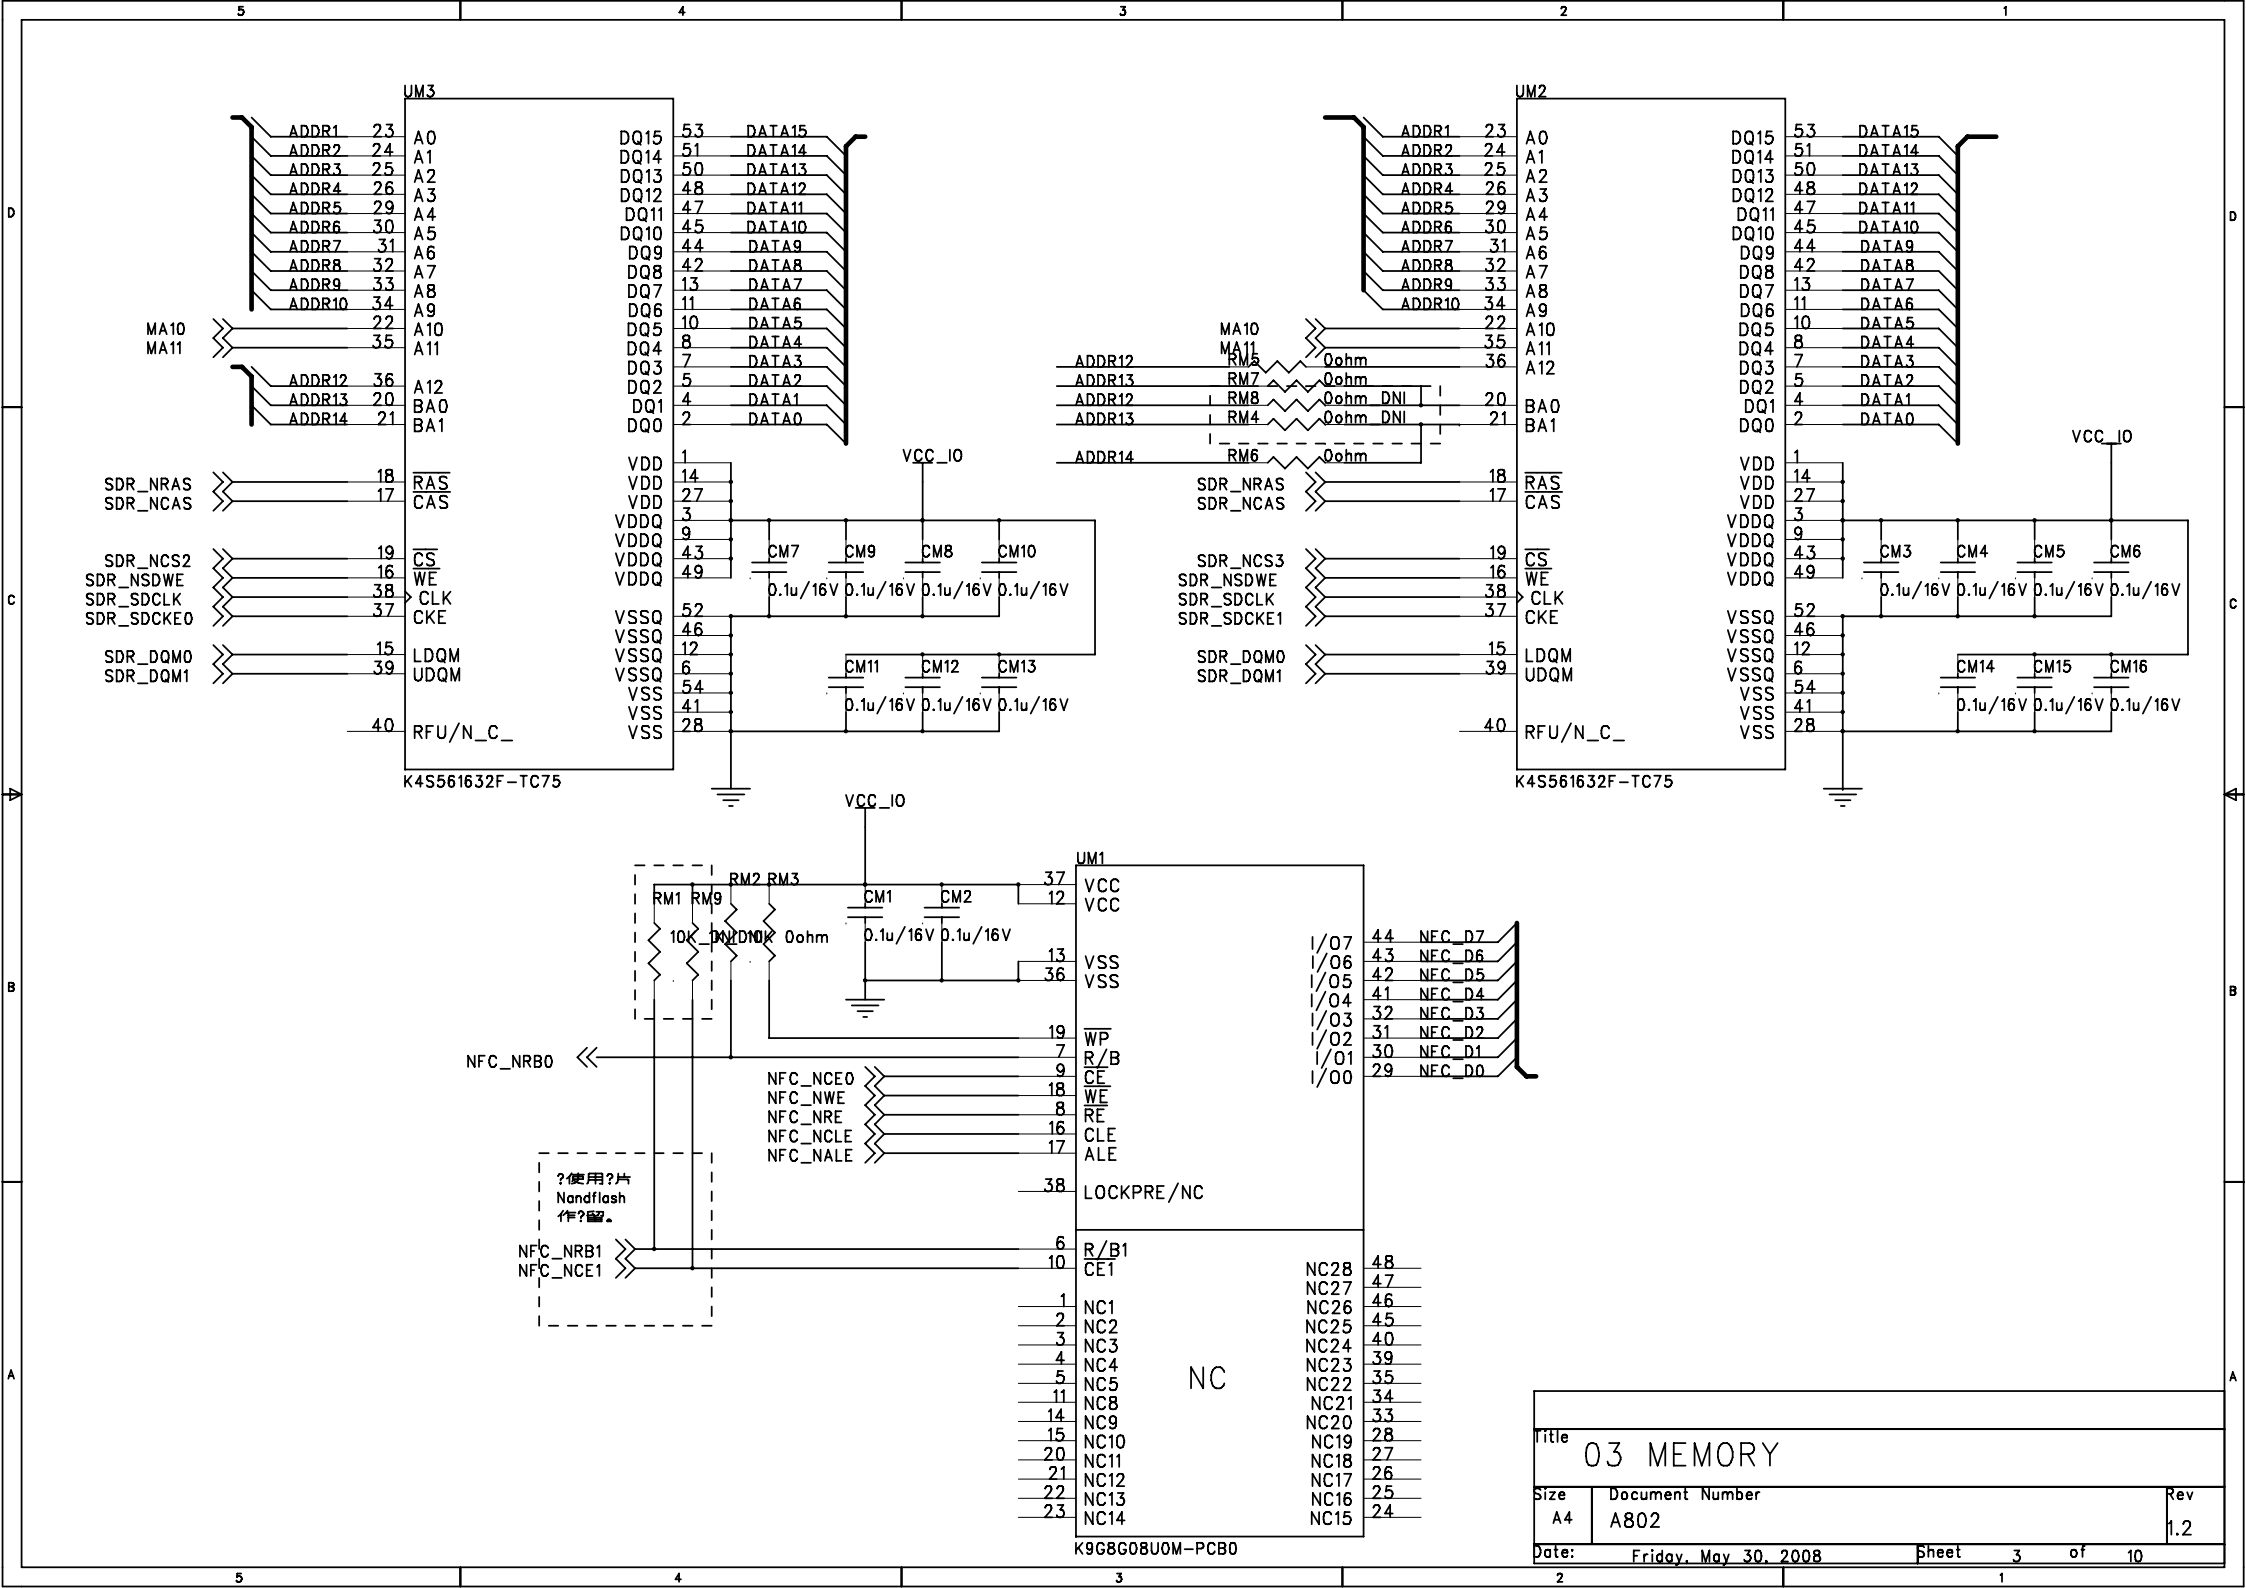


codec 模??入建?用 高PSRR的LDO(40db/50khz)



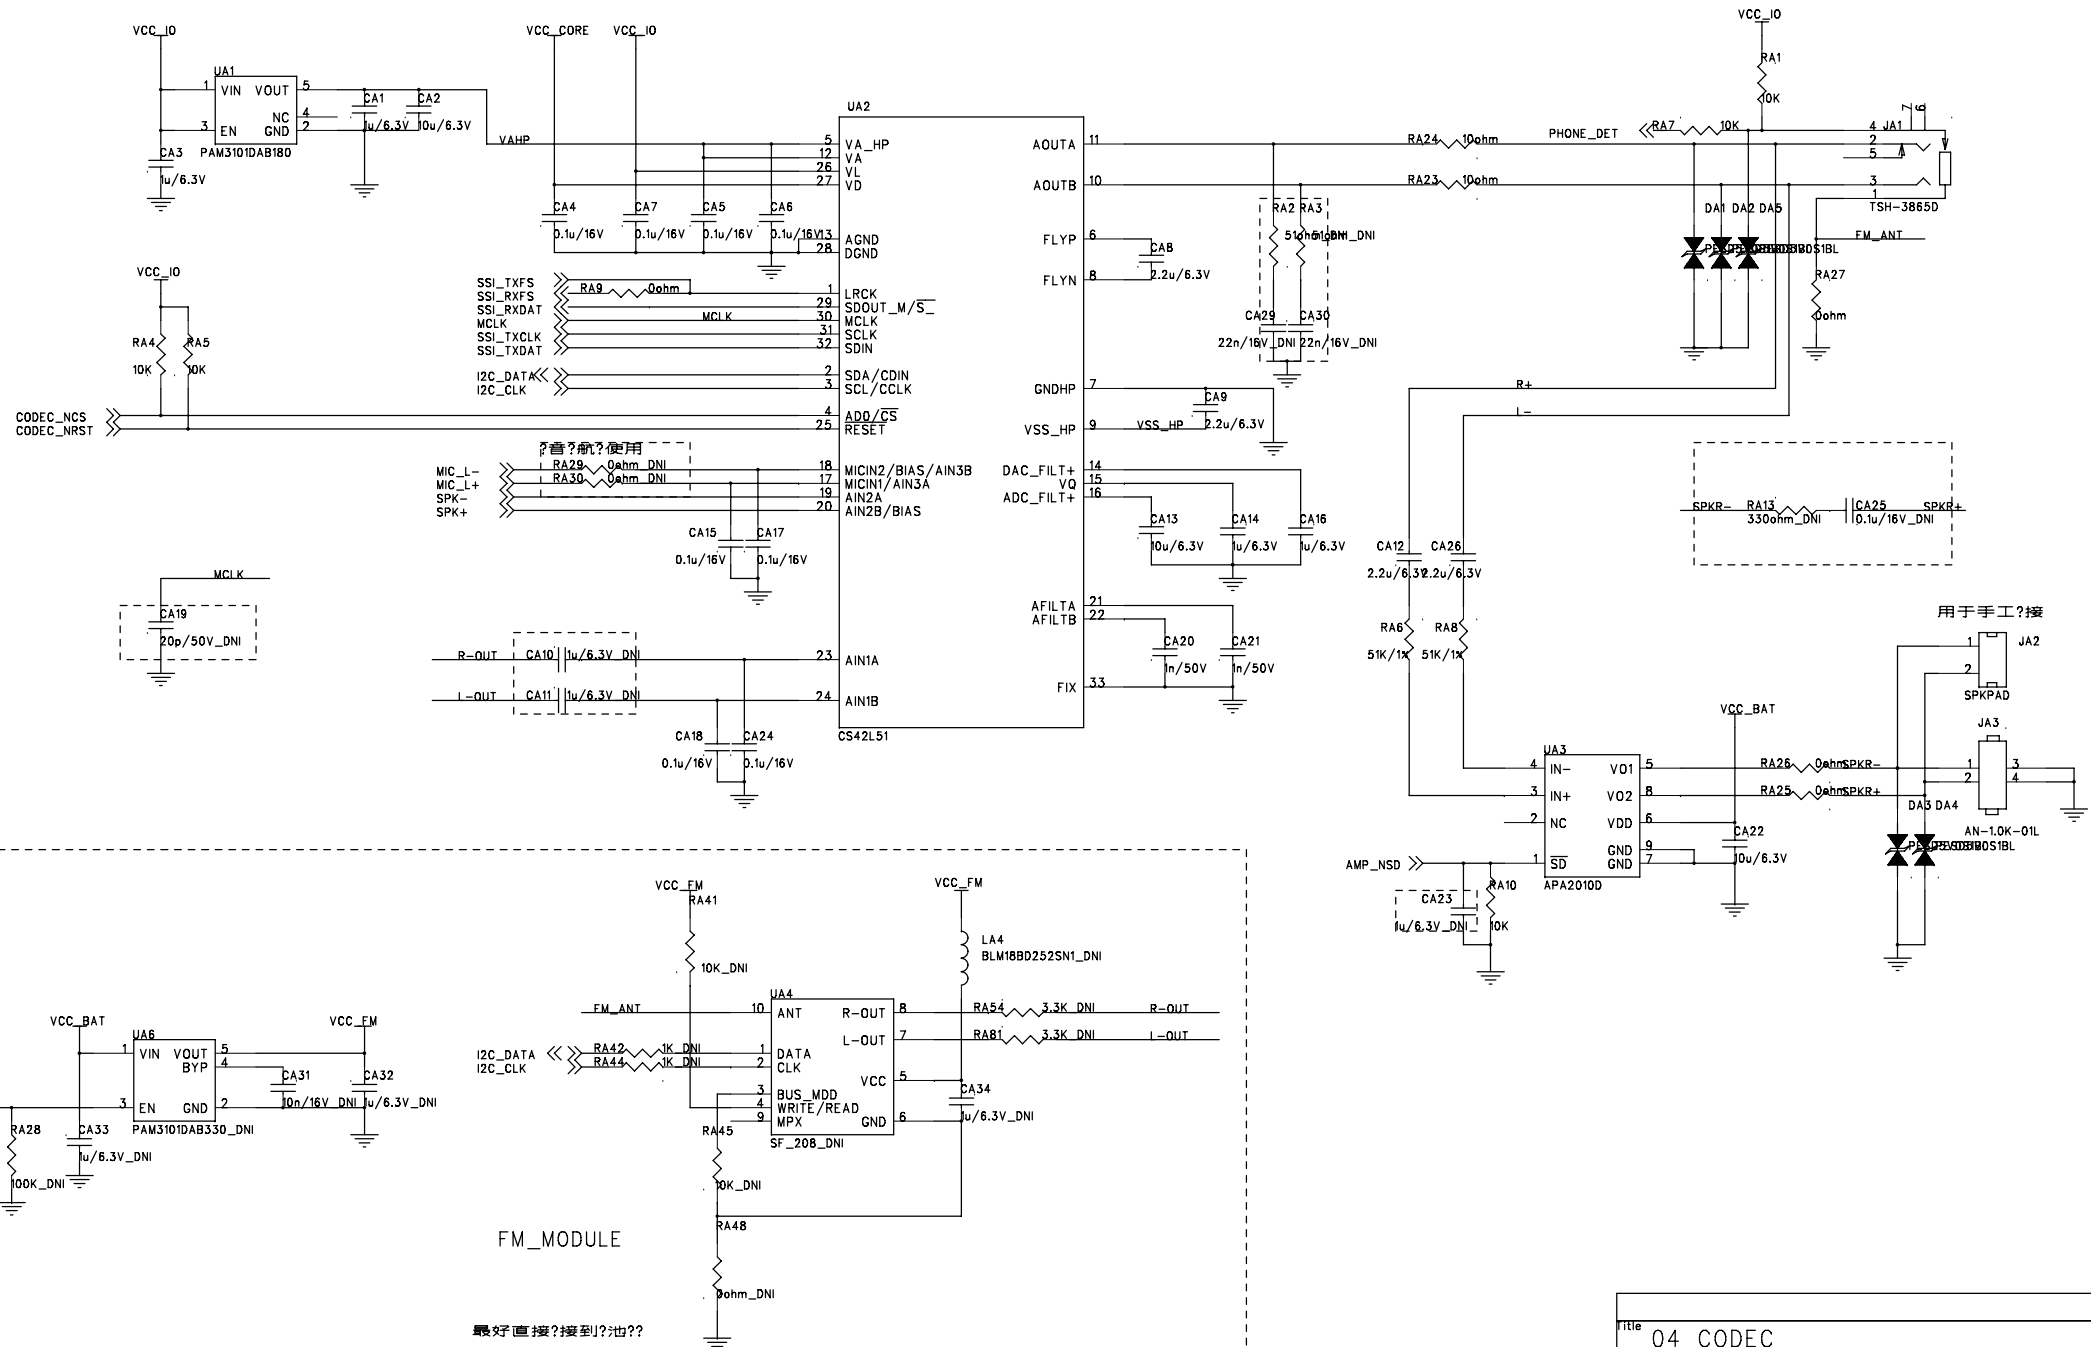


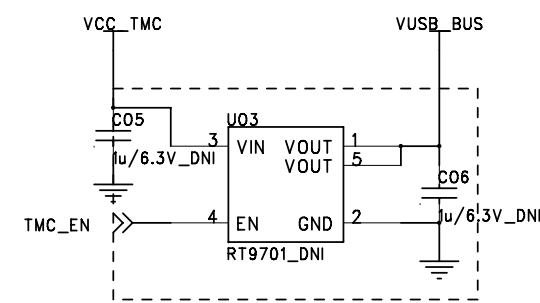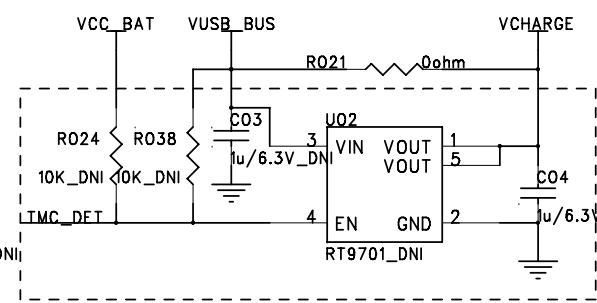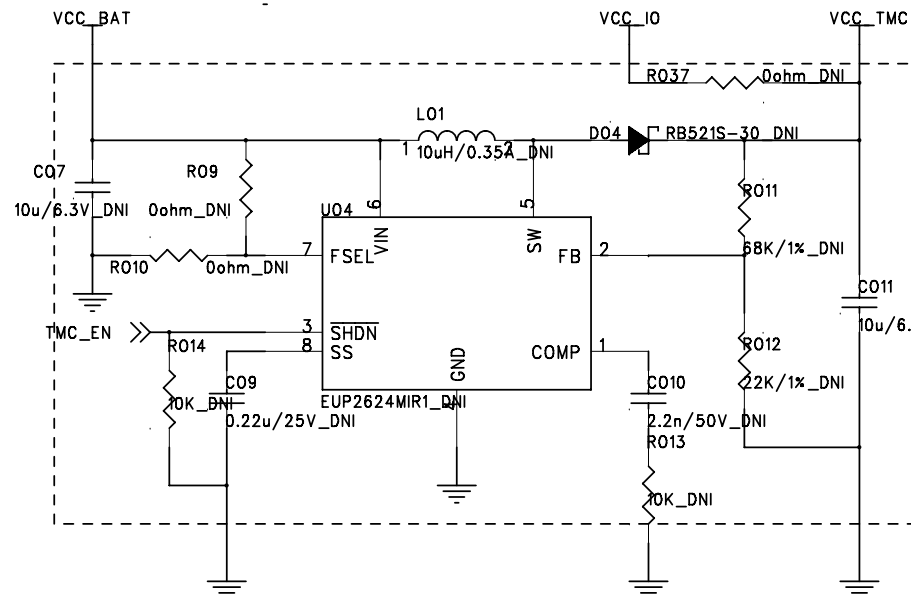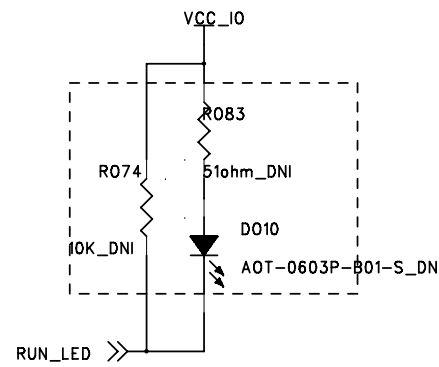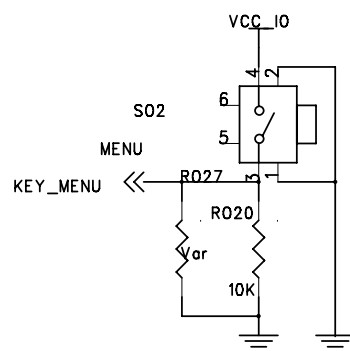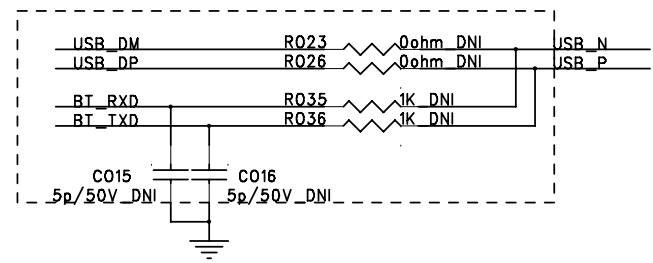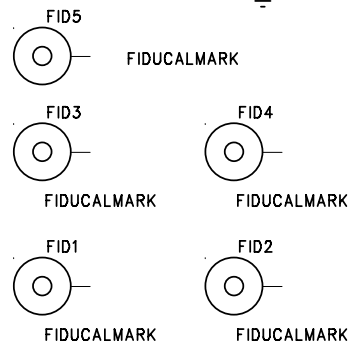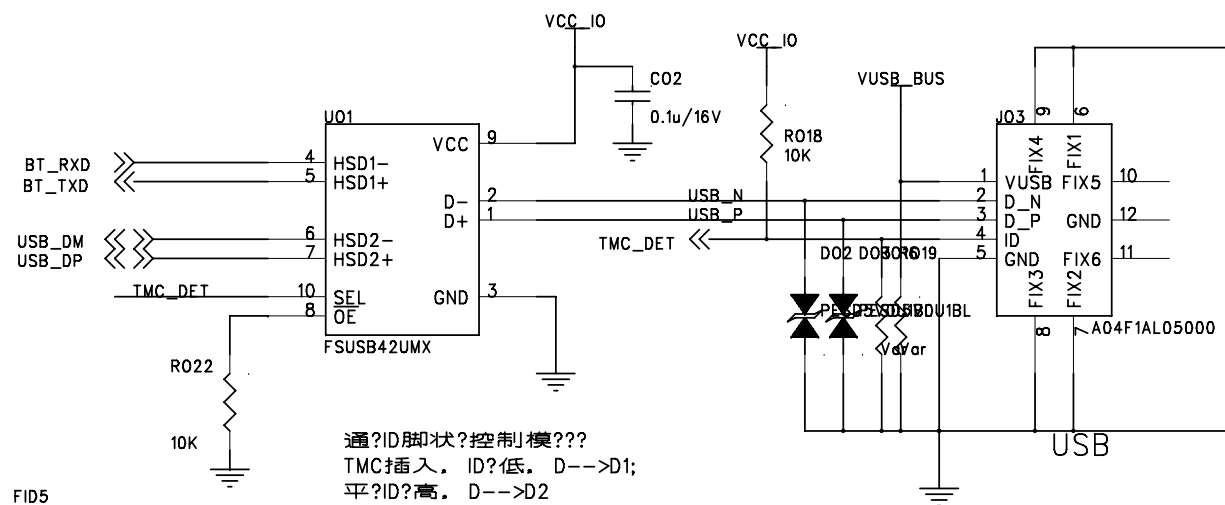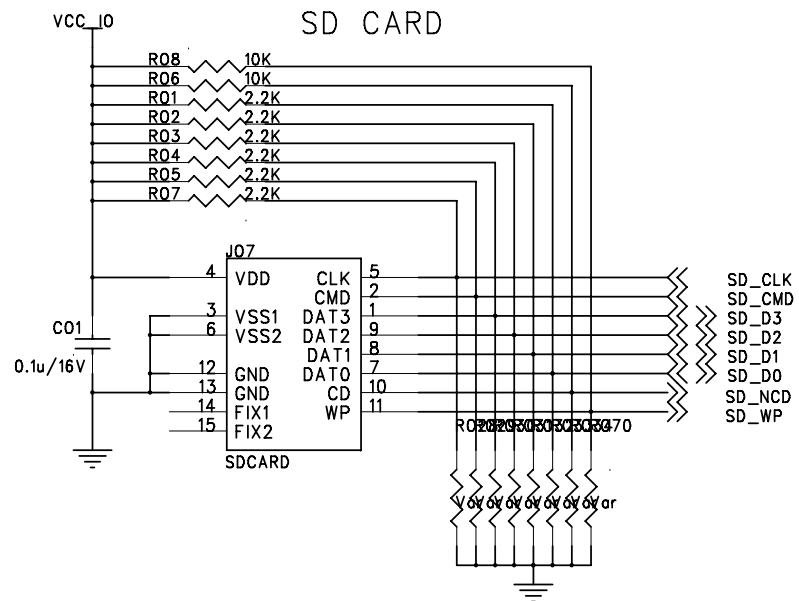

?U02. 那?TMC_DET的上拉?阻就?R024和R038. R018和R021DNI;
?R021. 那?TMC_DET的上拉?阻就只?R018. U02?路都DNI.


Title		
05 KEY_TFLASH_USB_LED		
Size	Document Number	Rev
A4	A802	1.2
Date:	Friday, May 30, 2008	Sheet 5 of 10

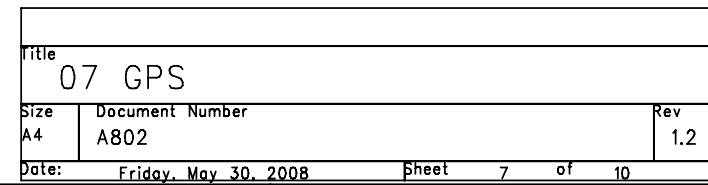

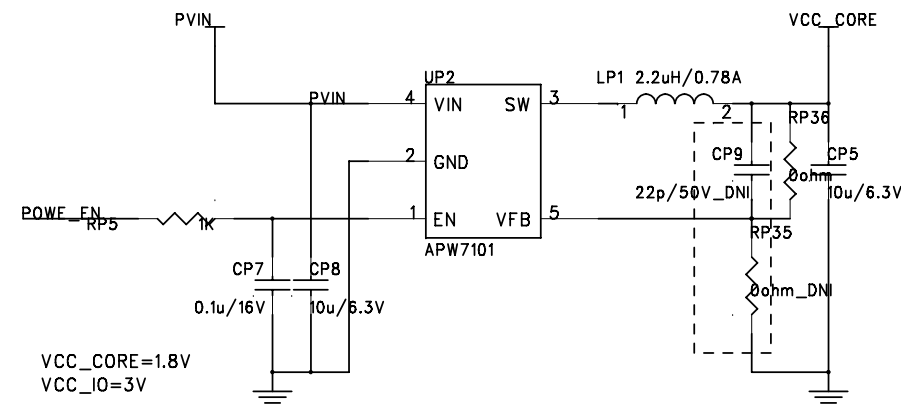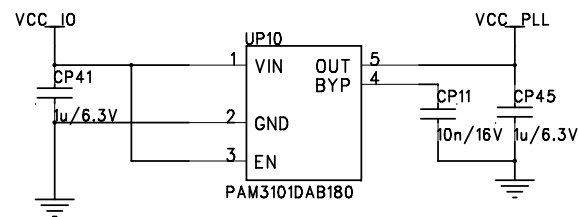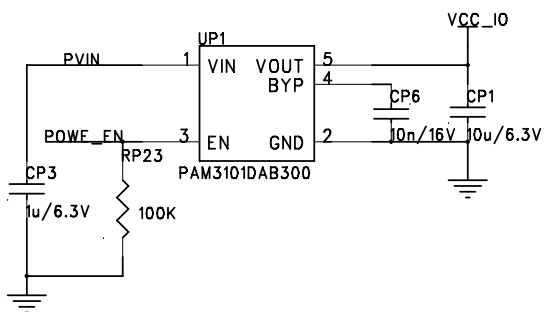


System Power

Battery Charge

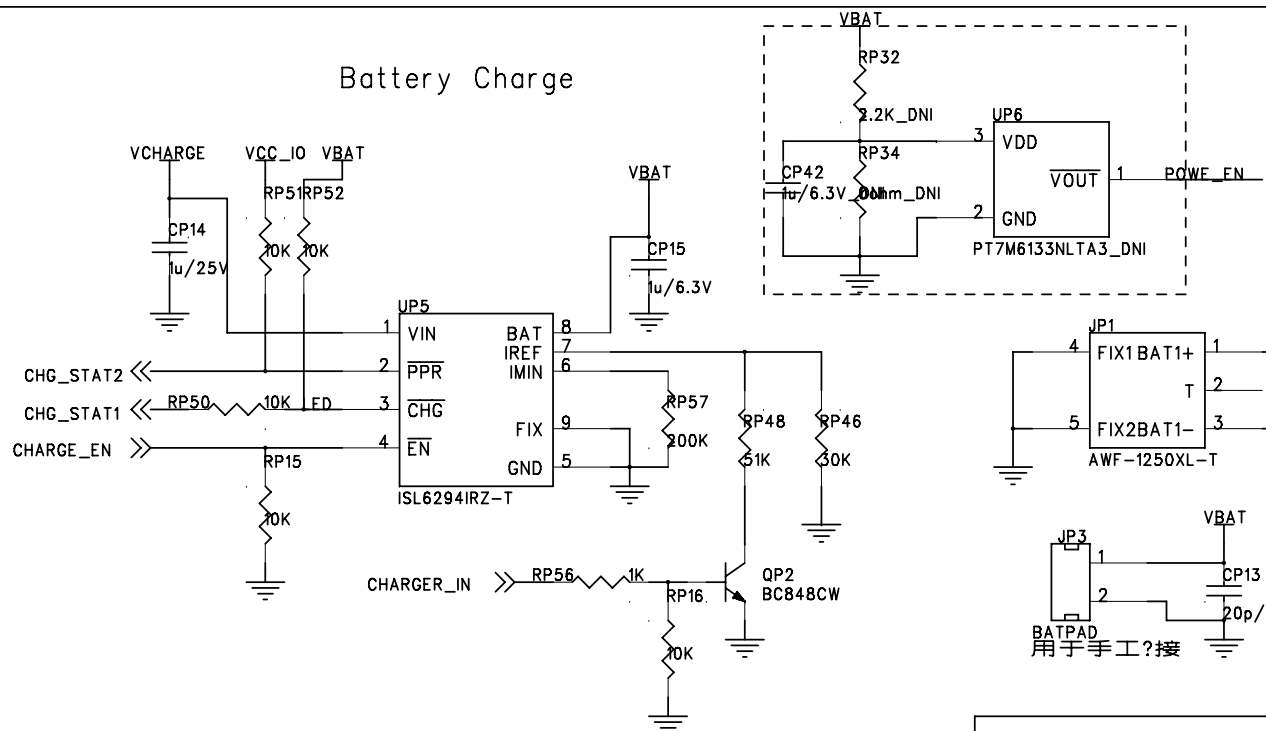

Charge Current From USB Is 400mA
Charge Current From Charger Is 640mA

当??到USB插入后, ?件通?RESET信号来判断是否?接到了PC

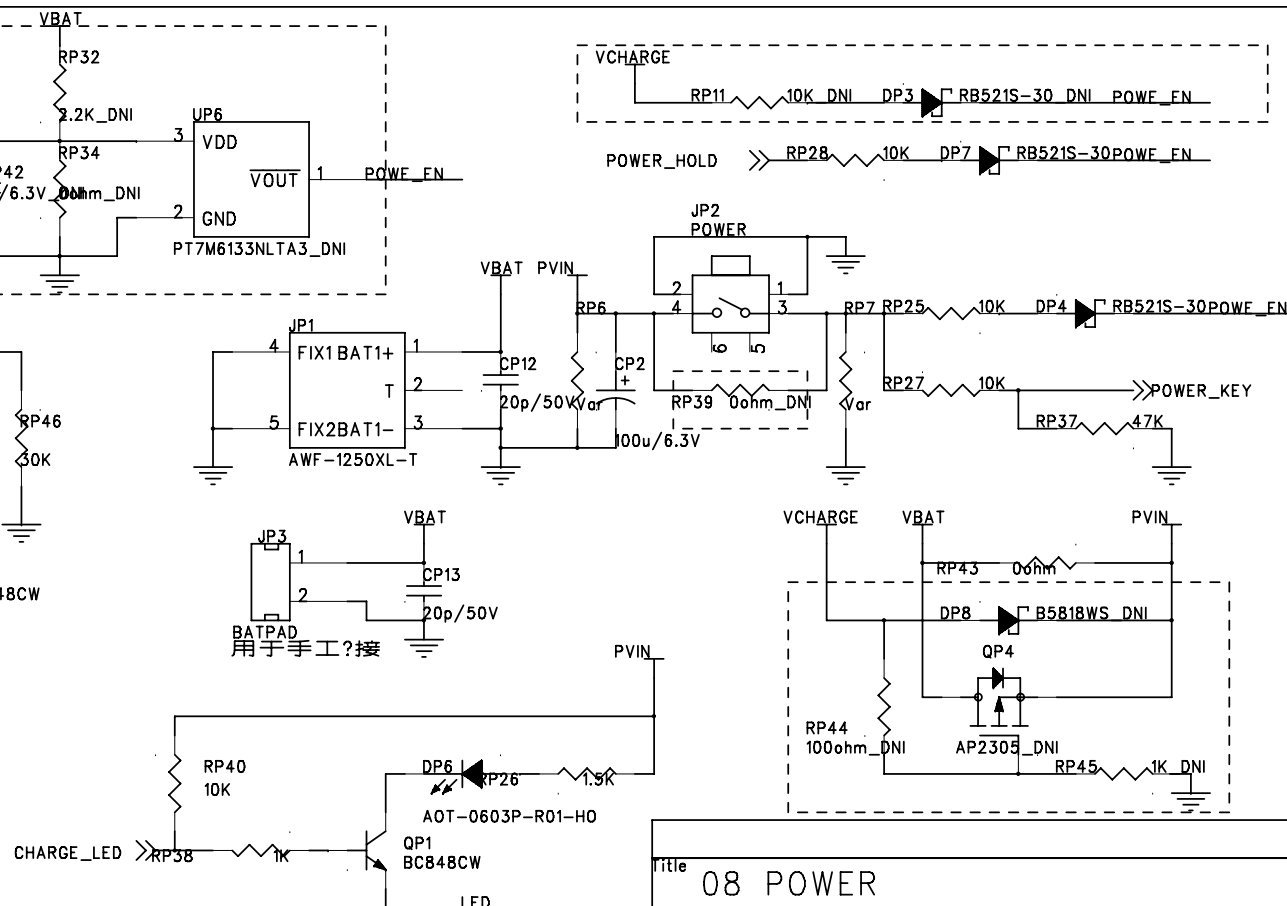

POWER ON CONTROL

Title		
08 POWER		
Size	Document Number	Rev
A4	A802	1.2
Date:	Friday, May 30, 2008	Sheet 8 of 10